

# FCC SAR Test Report

**APPLICANT** : Motorola Solutions, Inc.  
**EQUIPMENT** : NITRO Two-Way Radio  
**BRAND NAME** : Motorola Solutions  
**MODEL NAME** : SLN 1000  
**FCC ID** : AZ489FT7123  
**STANDARD** : FCC 47 CFR PART 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on Apr. 02, 2019 and testing was started from Apr. 05, 2019 and completed on May 10, 2019. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager

**Sporton International (Shenzhen) Inc.**  
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City,  
Guangdong Province 518055, China



Table of Contents

1. Statement of Compliance ..... 4
2. Administration Data ..... 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information ..... 6
4.1 General Information ..... 6
4.2 Specification of Accessory ..... 7
4.3 General LTE SAR Test and Reporting Considerations ..... 8
5. RF Exposure Limits..... 9
5.1 Uncontrolled Environment..... 9
5.2 Controlled Environment..... 9
6. Specific Absorption Rate (SAR).....10
6.1 Introduction .....10
6.2 SAR Definition.....10
7. System Description and Setup .....11
7.1 E-Field Probe .....12
7.2 Data Acquisition Electronics (DAE) .....12
7.3 Phantom.....13
7.4 Device Holder.....14
8. Measurement Procedures .....15
8.1 Spatial Peak SAR Evaluation .....15
8.2 Power Reference Measurement.....16
8.3 Area Scan .....16
8.4 Zoom Scan.....17
8.5 Volume Scan Procedures.....17
8.6 Power Drift Monitoring.....17
9. Test Equipment List .....18
10. System Verification .....19
10.1 Tissue Simulating Liquids.....19
10.2 Tissue Verification .....20
10.3 System Performance Check Results.....21
11. RF Exposure Positions .....22
11.1 Wireless Router.....22
12. Conducted RF Output Power (Unit: dBm).....23
13. Antenna Location .....32
14. SAR Test Results .....33
14.1 Face SAR.....35
14.2 Hotspot SAR .....36
14.3 Body Worn Accessory SAR.....37
15. Simultaneous Transmission Analysis .....38
15.1 Head Exposure Conditions .....39
15.2 Hotspot Exposure Conditions.....39
15.3 Body-Worn Accessory Exposure Conditions .....39
16. Uncertainty Assessment .....40
17. References .....41
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



### Revision History

| REPORT NO. | VERSION | DESCRIPTION                           | ISSUED DATE  |
|------------|---------|---------------------------------------|--------------|
| FA913001   | Rev. 01 | Initial issue of report.              | May 07, 2019 |
| FA913001   | Rev. 02 | Retest body-worn SAR for WLAN 5.8GHz. | May 10, 2019 |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |
|            |         |                                       |              |



### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Solutions, Inc., NITRO Two-Way Radio, SLN 1000**, are as follows.

| Equipment Class | Frequency Band |             | Highest Standalone SAR Summary |                           |                            |
|-----------------|----------------|-------------|--------------------------------|---------------------------|----------------------------|
|                 |                |             | Face (Separation 25mm)         | Hotspot (Separation 10mm) | Body-worn (Separation 0mm) |
|                 |                |             | 1g SAR (W/kg)                  |                           |                            |
| Licensed        | LTE            | Band 48     | 0.10                           | 0.47                      | <b>0.47</b>                |
| DTS             | WLAN           | 2.4GHz WLAN | <0.10                          | 0.32                      | <0.10                      |
| NII             |                | 5GHz WLAN   | <b>0.20</b>                    | <b>0.67</b>               | 0.22                       |
| DSS             | 2.4GHz Band    | Bluetooth   |                                |                           | <0.10                      |

| Highest SAR Summary Highest Simultaneous Transmission 1g SAR (W/kg) |                      |             |
|---|----------------------|-------------|
| Face  | Licensed + DTS       | 0.18        |
|   | Licensed + NII       | 0.30        |
| Hotspot   | Licensed + DTS       | 0.62        |
|   | Licensed + NII       | <b>0.72</b> |
| Body-worn   | Licensed + DTS       | 0.54        |
|   | Licensed + NII       | 0.60        |
|   | Licensed + NII + DSS | 0.61        |
| Date of Testing:  | 2019/4/5 ~ 2019/5/10 |             |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications



## 2. Administration Data

| Testing Laboratory |   |
|--------------------|---|
| Test Site          | Sporton International (Shenzhen) Inc.   |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China<br>TEL: +86-755-8637-9589<br>FAX: +86-755-8637-9595 |

| Applicant    |  |
|--------------|--|
| Company Name | Motorola Solutions, Inc.   |
| Address      | 8000 West Sunrise Blvd., Ft Lauderdale, Florida 33322, United States |

| Manufacturer |  |
|--------------|--|
| Company Name | Motorola Solutions, Inc.   |
| Address      | 8000 West Sunrise Blvd., Ft Lauderdale, Florida 33322, United States |

## 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

## 4. Equipment Under Test (EUT) Information

### 4.1 General Information

| Product Feature & Specification   |   |
|---|---|
| Equipment Name  | NITRO Two-Way Radio   |
| Brand Name  | Motorola Solutions  |
| Model Name  | SLN 1000  |
| FCC ID  | AZ489FT7123   |
| IMEI Code   | 004401680684863   |
| Wireless Technology and Frequency Range   | LTE Band 48: 3552.5 MHz ~ 3697.5 MHz<br>WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz<br>WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz<br>WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz<br>WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz<br>WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz |
| Mode  | LTE: QPSK, 16QAM<br>WLAN 2.4GHz : 802.11b/g/n HT20/HT40<br>WLAN 5GHz : 802.11a/n HT20/HT40<br>Bluetooth BR/EDR/LE   |
| HW Version  | P2  |
| SW Version  | KEY_BASE_USR_D05.00.66  |
| EUT Stage   | Identical Prototype   |
| <b>Remark:</b>  |   |
| <ol style="list-style-type: none"> <li>1. This device has PTT (push-to-talk) function, so perform 25mm in-front-of the face SAR. For the device can't support held-to-ear operating mode, so no need to considering head SAR testing.</li> <li>2. The device can use with assigned accessory manufacturer offered, so perform 0mm body worn accessory SAR.</li> <li>3. This device also support hotspot mode, so hotspot SAR has been performed.</li> <li>4. This device 2.4GHz WLAN support hotspot operation.</li> <li>5. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).</li> </ol> |   |



**4.2 Specification of Accessory**

| Specification of Accessory                 |              |   |                              |
|--|--------------|---|------------------------------|
| US AC Adapter 1<br>(Micro USB Charger)     | Brand Name   | Motorola  | Model Name PS000150A11       |
|  | Power Rating | I/P: 100 - 240Vac, 0.25A, O/P: 5Vdc, 1.5A             |                              |
| US AC Adapter 2<br>(SUC)                   | Brand Name   | Motorola  | Model Name PMLN7109A         |
|  | Power Rating | I/P: 100 - 240Vac, 0.25A, O/P: 5Vdc, 1A               |                              |
| US AC Adapter 3<br>(MUC)                   | Brand Name   | Motorola  | Model Name PMLN7101A         |
|  | Power Rating | I/P: 100 - 240Vac, 1A, O/P: 5Vdc, 1A                  |                              |
| Battery 1                                  | Brand Name   | Motorola  | Model Name BT110 (PMNN4578A) |
|  | Power Rating | 3.7V~4.35Vdc,<br>2300/2500mAh(min/typ)                | Type Li-ion                  |
| Earphone 1                                 | Brand Name   | Motorola  | Model Name PMLN7189A         |
|  | Signal Line  | 1.28meter, non-shielded cable, with w/o ferrite core  |                              |
| Earphone 2                                 | Brand Name   | Motorola  | Model Name PMLN7156A         |
|  | Signal Line  | 1.18meter, non-shielded cable, with w/o ferrite core  |                              |
| Earphone 3                                 | Brand Name   | Motorola  | Model Name PMLN7157A         |
|  | Signal Line  | 1.64meter, non-shielded cable, with w/o ferrite core  |                              |
| Earphone 4                                 | Brand Name   | Motorola  | Model Name PMLN7158A         |
|  | Signal Line  | 2.11meter, non-shielded cable, with w/o ferrite core  |                              |
| Earphone 5                                 | Brand Name   | Motorola  | Model Name PMLN7159A         |
|  | Signal Line  | 1.69 meter, non-shielded cable, with w/o ferrite core |                              |
| Nylon Wrist Strap                          | Brand Name   | Motorola  | Model Name PMLN6074A         |
| Heavy Duty Swivel Belt Clip                | Brand Name   | Motorola  | Model Name PMLN7128A         |
| Carry Holder/Holster with Swivel Belt Clip | Brand Name   | Motorola  | Model Name PMLN7932A         |
| AINA PTT voice responder                   | Brand Name   | Motorola  | Model Name PMNN4126A         |



**4.3 General LTE SAR Test and Reporting Considerations**

| Summarized necessary items addressed in KDB 941225 D05 v02r05 |  |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
|---|--|------------|---|-------|--------|--------|--------|-----|----------|----------|---------|-------|--------|--------|--------|------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|---------|-----|--|--|--|--|--|-----|
| Equipment Name  | NITRO Two-Way Radio  |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| Operating Frequency Range of each LTE transmission band       | LTE Band 48: 3552.5 MHz ~ 3697.5 MHz   |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| Channel Bandwidth   | LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz   |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| Uplink Modulations used                                       | QPSK / 16QAM   |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| LTE Voice / Data requirements                                 | Data only  |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| LTE Release Version   | R10, Cat 4   |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| CA Support  | Not Supported  |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| LTE MPR permanently built-in by design                        | <b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b>   |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
|   | <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> | Modulation | Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> ) |       |        |        |        |     | MPR (dB) | 1.4 MHz  | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 | 64 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 2 | 64 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 3 | 256 QAM | ≥ 1 |  |  |  |  |  | ≤ 5 |
|   | Modulation   |            | Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> ) |       |        |        |        |     |          | MPR (dB) |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
|   |  | 1.4 MHz    | 3.0 MHz   | 5 MHz | 10 MHz | 15 MHz | 20 MHz |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
|   | QPSK   | > 5        | > 4   | > 8   | > 12   | > 16   | > 18   | ≤ 1 |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
|   | 16 QAM   | ≤ 5        | ≤ 4   | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1 |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
|   | 16 QAM   | > 5        | > 4   | > 8   | > 12   | > 16   | > 18   | ≤ 2 |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| 64 QAM  | ≤ 5  | ≤ 4        | ≤ 8   | ≤ 12  | ≤ 16   | ≤ 18   | ≤ 2    |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| 64 QAM  | > 5  | > 4        | > 8   | > 12  | > 16   | > 18   | ≤ 3    |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| 256 QAM   | ≥ 1  |            |   |       |        |        | ≤ 5    |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| LTE A-MPR   | In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)  |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |
| Spectrum plots for RB configuration                           | A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.   |            |   |       |        |        |        |     |          |          |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |         |     |  |  |  |  |  |     |

| LTE Band 48 |                 |             |                  |             |                  |             |                  |             |
|-------------|-----------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|
|             | Bandwidth 5 MHz |             | Bandwidth 10 MHz |             | Bandwidth 15 MHz |             | Bandwidth 20 MHz |             |
|             | Ch. #           | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) | Ch. #            | Freq. (MHz) |
| L           | 55265           | 3552.5      | 55290            | 3555        | 55315            | 3557.5      | 55340            | 3560        |
| LM          | 55810           | 3607        | 55815            | 3607.5      | 55820            | 3608        | 55830            | 3609        |
| HM          | 56170           | 3643        | 55165            | 3642.5      | 56160            | 3642        | 56150            | 3641        |
| H           | 56715           | 3697.5      | 56690            | 3695        | 56665            | 3692.5      | 56640            | 3690        |



**5. RF Exposure Limits**

**5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4        | 8.0          | 20.0                           |

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08       | 1.6          | 4.0                            |

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

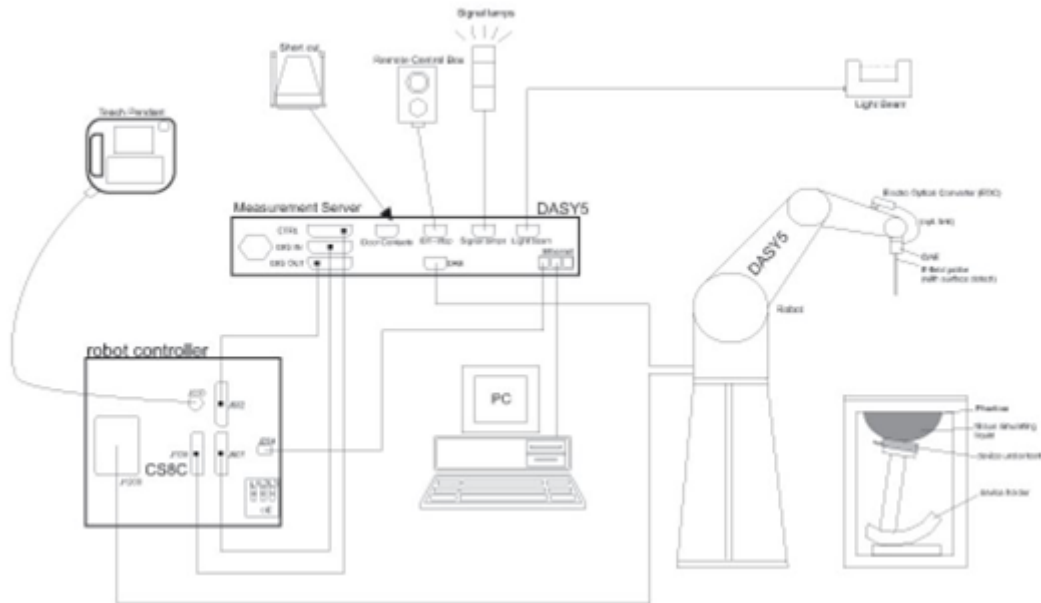


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<EX3DV4 Probe>**

|                      |   |  |
|----------------------|---|--|
| <b>Construction</b>  | Symmetric design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz – >6 GHz<br>Linearity: ±0.2 dB (30 MHz – 6 GHz)  |  |
| <b>Directivity</b>   | ±0.3 dB in TSL (rotation around probe axis)<br>±0.5 dB in TSL (rotation normal to probe axis)   |  |
| <b>Dynamic Range</b> | 10 µW/g – >100 mW/g<br>Linearity: ±0.2 dB (noise: typically <1 µW/g)  |  |
| <b>Dimensions</b>    | Overall length: 337 mm (tip: 20 mm)<br>Tip diameter: 2.5 mm (body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                      |  |

**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Photo of DAE**

**7.3 Phantom**

**<SAM Twin Phantom>**

|                          |   |
|--------------------------|---|
| <b>Shell Thickness</b>   | 2 ± 0.2 mm;<br>Center ear point: 6 ± 0.2 mm             |
| <b>Filling Volume</b>    | Approx. 25 liters                                       |
| <b>Dimensions</b>        | Length: 1000 mm; Width: 500 mm; Height: adjustable feet |
| <b>Measurement Areas</b> | Left Hand, Right Hand, Flat Phantom                     |



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

|                        |  |
|------------------------|--|
| <b>Shell Thickness</b> | 2 ± 0.2 mm (sagging: <1%)                        |
| <b>Filling Volume</b>  | Approx. 30 liters                                |
| <b>Dimensions</b>      | Major ellipse axis: 600 mm<br>Minor axis: 400 mm |



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 7.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|  | ≤ 3 GHz   | > 3 GHz  |
|--|---|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm  | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | 30° ± 1°  | 20° ± 1°   |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm  | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm           |
|  | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |  |



**8.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

|  |                                    | ≤ 3 GHz  | > 3 GHz   |  |
|--|------------------------------------|--|---|--|
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$   |                                    | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*                                 | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |  |
| Maximum zoom scan spatial resolution, normal to phantom surface  | uniform grid: $\Delta z_{Zoom}(n)$ | $\leq 5$ mm  | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |  |
|  | graded grid                        | $\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm   | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm |
|  |                                    | $\Delta z_{Zoom}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$   |  |
| Minimum zoom scan volume   | x, y, z                            | $\geq 30$ mm   | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |  |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.<br>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                    |  |   |  |

**8.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



**9. Test Equipment List**

| Manufacturer   | Name of Equipment               | Type/Model    | Serial Number | Calibration |            |
|----------------|---------------------------------|---------------|---------------|-------------|------------|
|                |                                 |               |               | Last Cal.   | Due Date   |
| SPEAG          | 2450MHz System Validation Kit   | D2450V2       | 736           | 2018/8/31   | 2019/8/30  |
| SPEAG          | 3500MHz System Validation Kit   | D3500V2       | 1037          | 2018/11/27  | 2019/11/26 |
| SPEAG          | 3700MHz System Validation Kit   | D3700V2       | 1008          | 2018/11/27  | 2019/11/26 |
| SPEAG          | 5000MHz System Validation Kit   | D5GHzV2       | 1167          | 2018/8/3    | 2019/8/2   |
| SPEAG          | Data Acquisition Electronics    | DAE4          | 1303          | 2019/1/3    | 2020/1/2   |
| SPEAG          | Dosimetric E-Field Probe        | EX3DV4        | 3819          | 2019/3/1    | 2020/2/29  |
| SPEAG          | SAM Twin Phantom                | QD 000 P40 CD | TP-1670       | NCR         | NCR        |
| SPEAG          | Phone Positioner                | N/A           | N/A           | NCR         | NCR        |
| Anritsu        | Radio communication analyzer    | MT8820C       | 6201300653    | 2018/7/18   | 2019/7/17  |
| Agilent        | Wireless Communication Test Set | E5515C        | MY50267224    | 2018/9/11   | 2019/9/10  |
| Agilent        | Network Analyzer                | E5071C        | MY46523671    | 2018/10/18  | 2019/10/17 |
| Speag          | Dielectric Assessment KIT       | DAK-3.5       | 1071          | 2018/11/20  | 2019/11/19 |
| Agilent        | Signal Generator                | N5181A        | MY50145381    | 2018/12/22  | 2019/12/21 |
| Anritsu        | Power Sensor                    | MA2411B       | 1306099       | 2018/7/30   | 2019/7/29  |
| Anritsu        | Power Meter                     | ML2495A       | 1349001       | 2018/7/26   | 2019/7/25  |
| Anritsu        | Power Sensor                    | MA2411B       | 1207253       | 2018/12/22  | 2019/12/21 |
| Anritsu        | Power Meter                     | ML2495A       | 1218010       | 2018/12/22  | 2019/12/21 |
| R&S            | CBT BLUETOOTH TESTER            | CBT           | 100963        | 2018/12/22  | 2019/12/21 |
| R&S            | Spectrum Analyzer               | FSP7          | 100818        | 2018/7/18   | 2019/7/17  |
| LKM electronic | Hygrometer                      | DTM3000       | 3241          | 2018/8/10   | 2019/8/9   |
| Anymetre       | Thermo-Hygrometer               | JR593         | 2015030903    | 2018/12/22  | 2019/12/21 |
| ARRA           | Power Divider                   | A3200-2       | N/A           | Note        |            |
| PASTERNAK      | Dual Directional Coupler        | PE2214-10     | N/A           | Note        |            |
| Agilent        | Dual Directional Coupler        | 778D          | 50422         | Note        |            |
| MCL            | Attenuation1                    | BW-S10W5      | N/A           | Note        |            |
| Weinschel      | Attenuation2                    | 3M-20         | N/A           | Note        |            |
| Zhongjilianhe  | Attenuation3                    | MVE2214-03    | N/A           | Note        |            |
| mini-circuits  | Amplifier                       | ZHL-42W+      | QA1341002     | Note        |            |
| mini-circuits  | Amplifier                       | ZVE-3W-83+    | 599201528     | Note        |            |

**Note:** Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

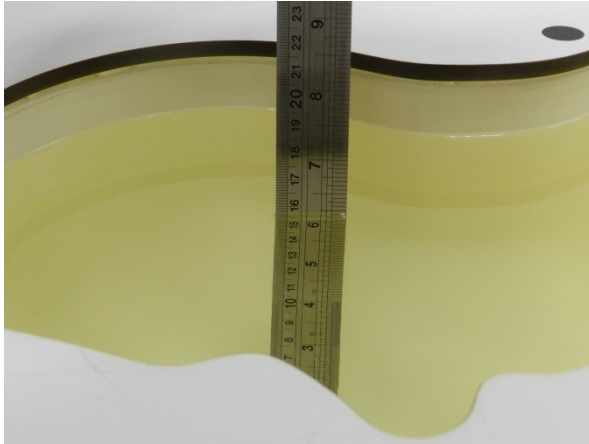


Fig 10.1 Photo of Liquid Height for Head SAR

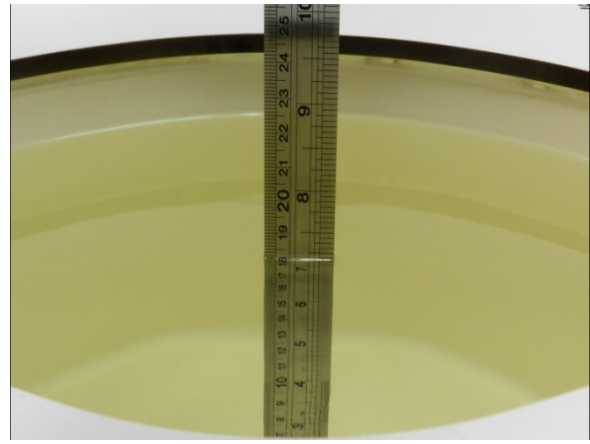


Fig 10.2 Photo of Liquid Height for Body SAR

**10.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Frequency (MHz) | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity (σ) | Permittivity (ε <sub>r</sub> ) |
|-----------------|-----------|-----------|---------------|----------|---------------|----------|------------------|--------------------------------|
| For Head        |           |           |               |          |               |          |                  |                                |
| 2450            | 55.0      | 0         | 0             | 0        | 0             | 45.0     | 1.80             | 39.2                           |
| For Body        |           |           |               |          |               |          |                  |                                |
| 2450            | 68.6      | 0         | 0             | 0        | 0             | 31.4     | 1.95             | 52.7                           |

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

| Ingredients        | (% by weight) |
|--------------------|---------------|
| Water              | 64~78%        |
| Mineral oil        | 11~18%        |
| Emulsifiers        | 9~15%         |
| Additives and Salt | 2~3%          |


**<Tissue Dielectric Parameter Check Results>**

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity (σ) | Permittivity (ε <sub>r</sub> ) | Conductivity Target (σ) | Permittivity Target (ε <sub>r</sub> ) | Delta (σ) (%) | Delta (ε <sub>r</sub> ) (%) | Limit (%) | Date      |
|-----------------|-------------|-------------------|------------------|--------------------------------|-------------------------|---------------------------------------|---------------|-----------------------------|-----------|-----------|
| 2450            | Head        | 22.6              | 1.878            | 40.464                         | 1.80                    | 39.20                                 | 4.33          | 3.22                        | ±5        | 2019/4/17 |
| 3500            | Head        | 22.4              | 2.817            | 39.527                         | 2.91                    | 37.90                                 | -3.20         | 4.29                        | ±5        | 2019/4/5  |
| 3700            | Head        | 22.4              | 3.054            | 38.374                         | 3.12                    | 37.70                                 | -2.12         | 1.79                        | ±5        | 2019/4/5  |
| 5250            | Head        | 22.8              | 4.703            | 36.115                         | 4.71                    | 35.95                                 | -0.15         | 0.46                        | ±5        | 2019/4/17 |
| 5600            | Head        | 22.4              | 4.848            | 35.767                         | 5.07                    | 35.50                                 | -4.38         | 0.75                        | ±5        | 2019/4/17 |
| 5750            | Head        | 22.5              | 5.170            | 35.843                         | 5.22                    | 35.35                                 | -0.96         | 1.39                        | ±5        | 2019/4/17 |
| 2450            | Body        | 22.5              | 1.992            | 52.291                         | 1.95                    | 52.70                                 | 2.15          | -0.78                       | ±5        | 2019/4/17 |
| 3500            | Body        | 22.7              | 3.319            | 51.784                         | 3.31                    | 51.30                                 | 0.27          | 0.94                        | ±5        | 2019/4/7  |
| 3700            | Body        | 22.7              | 3.524            | 51.522                         | 3.55                    | 51.00                                 | -0.73         | 1.02                        | ±5        | 2019/4/7  |
| 5250            | Body        | 22.6              | 5.276            | 50.886                         | 5.36                    | 48.95                                 | -1.57         | 3.96                        | ±5        | 2019/4/17 |
| 5600            | Body        | 22.4              | 5.825            | 50.395                         | 5.77                    | 48.50                                 | 0.95          | 3.91                        | ±5        | 2019/4/17 |
| 5750            | Body        | 22.6              | 6.051            | 50.049                         | 5.94                    | 48.28                                 | 1.87          | 3.66                        | ±5        | 2019/4/17 |
| 5750            | Body        | 22.9              | 6.050            | 50.057                         | 5.94                    | 48.28                                 | 1.85          | 3.68                        | ±5        | 2019/5/10 |


**10.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Date      | Frequency (MHz) | Tissue Type | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|-------------|------------------|------------|-----------|---------|------------------------|------------------------|--------------------------|---------------|
| 2019/4/17 | 2450            | Head        | 250              | 736        | 3819      | 1303    | 12.10                  | 52.70                  | 48.4                     | -8.16         |
| 2019/4/5  | 3500            | Head        | 100              | 1037       | 3819      | 1303    | 6.79                   | 65.30                  | 67.9                     | 3.98          |
| 2019/4/5  | 3700            | Head        | 100              | 1008       | 3819      | 1303    | 6.16                   | 67.00                  | 61.6                     | -8.06         |
| 2019/4/17 | 5250            | Head        | 100              | 1167       | 3819      | 1303    | 7.34                   | 77.00                  | 73.4                     | -4.68         |
| 2019/4/17 | 5600            | Head        | 100              | 1167       | 3819      | 1303    | 7.34                   | 80.80                  | 73.4                     | -9.16         |
| 2019/4/17 | 5750            | Head        | 100              | 1167       | 3819      | 1303    | 7.07                   | 76.90                  | 70.7                     | -8.06         |
| 2019/4/17 | 2450            | Body        | 250              | 736        | 3819      | 1303    | 11.80                  | 51.50                  | 47.2                     | -8.35         |
| 2019/4/7  | 3500            | Body        | 100              | 1037       | 3819      | 1303    | 6.51                   | 61.40                  | 65.1                     | 6.03          |
| 2019/4/7  | 3700            | Body        | 100              | 1008       | 3819      | 1303    | 6.19                   | 63.60                  | 61.9                     | -2.67         |
| 2019/4/17 | 5250            | Body        | 100              | 1167       | 3819      | 1303    | 7.19                   | 74.40                  | 71.9                     | -3.36         |
| 2019/4/17 | 5600            | Body        | 100              | 1167       | 3819      | 1303    | 8.34                   | 77.10                  | 83.4                     | 8.17          |
| 2019/4/17 | 5750            | Body        | 100              | 1167       | 3819      | 1303    | 7.62                   | 74.30                  | 76.2                     | 2.56          |
| 2019/5/10 | 5750            | Body        | 100              | 1167       | 3819      | 1303    | 7.21                   | 74.30                  | 72.1                     | -2.96         |

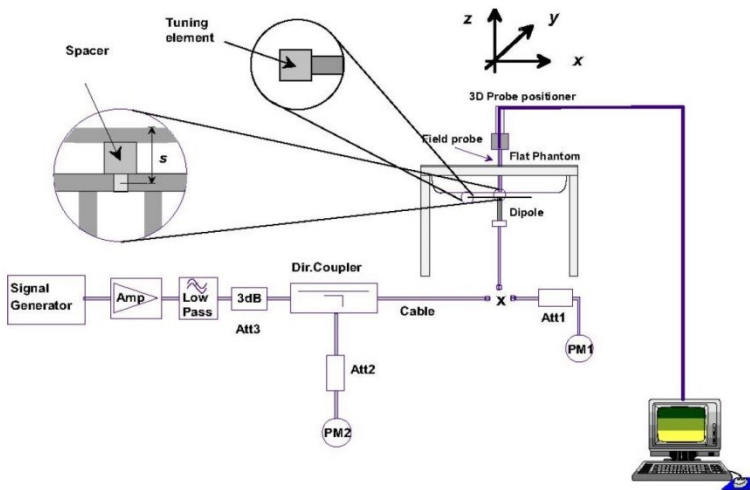

**Fig 10.3.1 System Performance Check Setup**

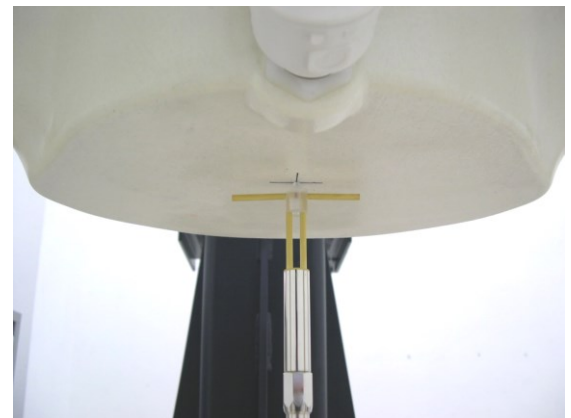

**Fig 10.3.2 Setup Photo**



## **11. RF Exposure Positions**

### **11.1 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## **12. Conducted RF Output Power (Unit: dBm)**

### **<LTE Conducted Power>**

#### **General Note:**


1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

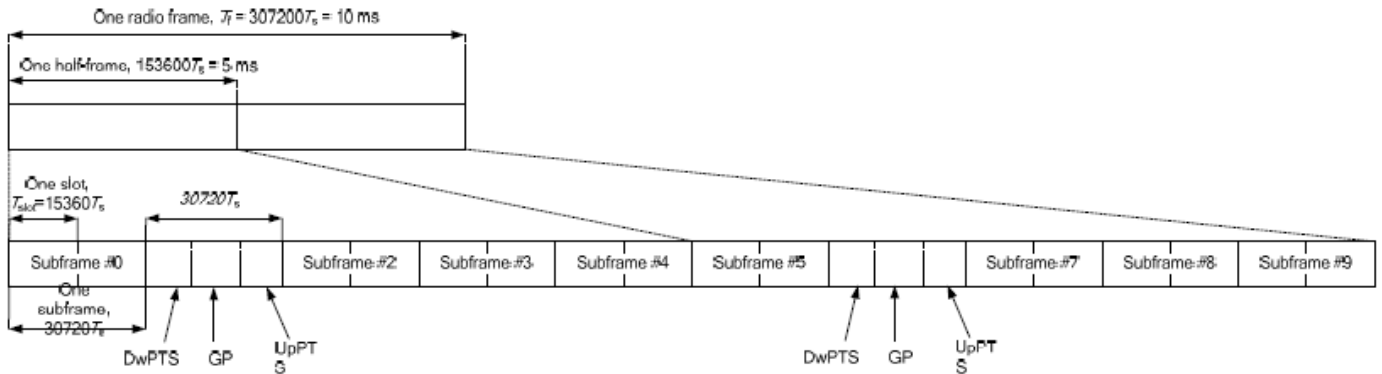

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|
|                               |   | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms  | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms  | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms  | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms  | D               | S | U | U | U | D | S | U | U | D |

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |   |   |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|---|---|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |   |   |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |   |   |
| 0                              | 6592 · Ts                        | 2192 · Ts                      | 2560 · Ts                        | 7680 · Ts                          | 2192 · Ts                      | 2560 · Ts                        |   |   |
| 1                              | 19760 · Ts                       |                                |                                  | 20480 · Ts                         |                                |                                  |   |   |
| 2                              | 21952 · Ts                       |                                |                                  | 23040 · Ts                         |                                |                                  |   |   |
| 3                              | 24144 · Ts                       |                                |                                  | 25600 · Ts                         |                                |                                  |   |   |
| 4                              | 26336 · Ts                       |                                |                                  | 7680 · Ts                          |                                |                                  |   |   |
| 5                              | 6592 · Ts                        | 4384 · Ts                      | 5120 · Ts                        | 20480 · Ts                         | 4384 · Ts                      | 5120 · Ts                        |   |   |
| 6                              | 19760 · Ts                       |                                |                                  | 23040 · Ts                         |                                |                                  |   |   |
| 7                              | 21952 · Ts                       |                                |                                  | 12800 · Ts                         |                                |                                  |   |   |
| 8                              | 24144 · Ts                       |                                |                                  | -                                  |                                |                                  | - | - |
| 9                              | 13168 · Ts                       |                                |                                  | -                                  |                                |                                  | - | - |



| <b>Special subframe (30720·T<sub>s</sub>): Normal cyclic prefix in downlink (UpPTS)</b> |                                       |                                       |   |
|---|---------------------------------------|---------------------------------------|---|
|   | <b>Special subframe configuration</b> | <b>Normal cyclic prefix in uplink</b> | <b>Extended cyclic prefix in uplink</b> |
| <b>Uplink duty factor in one special subframe</b>                                       | <b>0~4</b>                            | 7.13%                                 | 8.33%                                   |
|   | <b>5~9</b>                            | 14.3%                                 | 16.7%                                   |

| <b>Special subframe(30720·T<sub>s</sub>): Extended cyclic prefix in downlink (UpPTS)</b> |                                       |                                       |   |
|--|---------------------------------------|---------------------------------------|---|
|  | <b>Special subframe configuration</b> | <b>Normal cyclic prefix in uplink</b> | <b>Extended cyclic prefix in uplink</b> |
| <b>Uplink duty factor in one special subframe</b>  | <b>0~3</b>                            | 7.13%                                 | 8.33%                                   |
|  | <b>4~7</b>                            | 14.3%                                 | 16.7%                                   |

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.



<LTE Band 48>

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Low Middle Ch. / Freq. | Power High Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up limit (dBm) |       |       |        | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------------|-------------------------------|------------------------|---------------------|-------|-------|--------|----------|
|                 |            |         |           |                       |                              |                               |                        | Channel             | 55340 | 55830 | 56150  |          |
| Frequency (MHz) |            |         |           | 3560                  | 3609                         | 3641                          | 3690                   | 3560                | 3609  | 3641  | 3690   |          |
| 20              | QPSK       | 1       | 0         | 20.89                 | 20.54                        | 19.88                         | 19.46                  | 22                  | 22    | 21.5  | 21     | 0        |
| 20              | QPSK       | 1       | 49        | 20.51                 | 20.20                        | 19.57                         | 19.09                  |                     |       |       |        |          |
| 20              | QPSK       | 1       | 99        | 20.43                 | 20.09                        | 19.64                         | 19.11                  |                     |       |       |        |          |
| 20              | QPSK       | 50      | 0         | 20.71                 | 20.37                        | 19.76                         | 19.33                  | 22                  | 22    | 21.5  | 21     | ≤ 1      |
| 20              | QPSK       | 50      | 24        | 20.60                 | 20.28                        | 19.69                         | 19.16                  |                     |       |       |        |          |
| 20              | QPSK       | 50      | 50        | 20.46                 | 20.07                        | 19.61                         | 19.10                  |                     |       |       |        |          |
| 20              | QPSK       | 100     | 0         | 20.55                 | 20.13                        | 19.70                         | 19.21                  | 21                  | 21    | 20.5  | 20     | ≤ 1      |
| 20              | 16QAM      | 1       | 0         | 19.92                 | 19.61                        | 18.99                         | 19.54                  |                     |       |       |        |          |
| 20              | 16QAM      | 1       | 49        | 19.59                 | 19.29                        | 18.67                         | 18.20                  |                     |       |       |        |          |
| 20              | 16QAM      | 1       | 99        | 19.53                 | 19.19                        | 18.80                         | 18.27                  | 21                  | 21    | 20.5  | 20     | ≤ 2      |
| 20              | 16QAM      | 50      | 0         | 19.77                 | 19.45                        | 18.82                         | 18.34                  |                     |       |       |        |          |
| 20              | 16QAM      | 50      | 24        | 19.69                 | 19.34                        | 18.78                         | 18.25                  |                     |       |       |        |          |
| 20              | 16QAM      | 50      | 50        | 19.53                 | 19.15                        | 18.70                         | 18.19                  | 21                  | 21    | 20.5  | 20     | ≤ 2      |
| 20              | 16QAM      | 100     | 0         | 19.64                 | 19.24                        | 18.78                         | 18.30                  |                     |       |       |        |          |
| Channel         |            |         |           | 55315                 | 55820                        | 56160                         | 56665                  |                     |       |       |        |          |
| Frequency (MHz) |            |         |           | 3557.5                | 3608                         | 3642                          | 3692.5                 | 3557.5              | 3608  | 3642  | 3692.5 |          |
| 15              | QPSK       | 1       | 0         | 20.85                 | 20.55                        | 19.91                         | 19.45                  | 22                  | 22    | 21.5  | 21     | 0        |
| 15              | QPSK       | 1       | 37        | 20.64                 | 20.29                        | 19.71                         | 19.19                  |                     |       |       |        |          |
| 15              | QPSK       | 1       | 74        | 20.66                 | 20.29                        | 19.77                         | 19.23                  |                     |       |       |        |          |
| 15              | QPSK       | 36      | 0         | 20.78                 | 20.41                        | 19.83                         | 19.35                  | 22                  | 22    | 21.5  | 21     | ≤ 1      |
| 15              | QPSK       | 36      | 20        | 20.70                 | 20.36                        | 19.78                         | 19.26                  |                     |       |       |        |          |
| 15              | QPSK       | 36      | 39        | 20.64                 | 20.15                        | 19.69                         | 19.21                  |                     |       |       |        |          |
| 15              | QPSK       | 75      | 0         | 20.72                 | 20.23                        | 19.75                         | 19.25                  | 21                  | 21    | 20.5  | 20     | ≤ 1      |
| 15              | 16QAM      | 1       | 0         | 20.08                 | 19.69                        | 19.08                         | 18.57                  |                     |       |       |        |          |
| 15              | 16QAM      | 1       | 37        | 19.86                 | 19.41                        | 18.62                         | 18.29                  |                     |       |       |        |          |
| 15              | 16QAM      | 1       | 74        | 19.86                 | 19.31                        | 18.87                         | 18.31                  | 21                  | 21    | 20.5  | 20     | ≤ 2      |
| 15              | 16QAM      | 36      | 0         | 19.92                 | 19.53                        | 18.87                         | 18.36                  |                     |       |       |        |          |
| 15              | 16QAM      | 36      | 20        | 19.87                 | 19.48                        | 18.82                         | 18.32                  |                     |       |       |        |          |
| 15              | 16QAM      | 36      | 39        | 19.83                 | 19.23                        | 18.82                         | 18.31                  | 21                  | 21    | 20.5  | 20     | ≤ 2      |
| 15              | 16QAM      | 75      | 0         | 19.90                 | 19.33                        | 18.88                         | 18.38                  |                     |       |       |        |          |



| Channel         |       |    |    | 55290  | 55815  | 56165  | 56690  | 55290  | 55815  | 56165  | 56690  | MPR<br>(dB) |
|-----------------|-------|----|----|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| Frequency (MHz) |       |    |    | 3555   | 3607.5 | 3642.5 | 3695   | 3555   | 3607.5 | 3642.5 | 3695   |             |
| 10              | QPSK  | 1  | 0  | 20.84  | 20.46  | 19.78  | 19.41  | 22     | 22     | 21.5   | 21     | 0           |
| 10              | QPSK  | 1  | 25 | 20.66  | 20.31  | 19.63  | 19.13  |        |        |        |        |             |
| 10              | QPSK  | 1  | 49 | 20.65  | 20.31  | 19.67  | 19.16  |        |        |        |        |             |
| 10              | QPSK  | 25 | 0  | 20.73  | 20.34  | 19.68  | 19.20  | 22     | 22     | 21.5   | 21     | ≤ 1         |
| 10              | QPSK  | 25 | 12 | 20.70  | 20.37  | 19.66  | 19.18  |        |        |        |        |             |
| 10              | QPSK  | 25 | 25 | 20.64  | 20.27  | 19.62  | 19.10  |        |        |        |        |             |
| 10              | QPSK  | 50 | 0  | 20.73  | 20.35  | 19.67  | 19.16  |        |        |        |        |             |
| 10              | 16QAM | 1  | 0  | 19.63  | 19.30  | 18.62  | 18.21  | 21     | 21     | 20.5   | 20     | ≤ 1         |
| 10              | 16QAM | 1  | 25 | 19.47  | 19.12  | 18.61  | 18.12  |        |        |        |        |             |
| 10              | 16QAM | 1  | 49 | 19.51  | 19.15  | 18.59  | 18.09  |        |        |        |        |             |
| 10              | 16QAM | 25 | 0  | 19.76  | 19.42  | 18.72  | 18.31  | 21     | 21     | 20.5   | 20     | ≤ 2         |
| 10              | 16QAM | 25 | 12 | 19.73  | 19.37  | 18.71  | 18.28  |        |        |        |        |             |
| 10              | 16QAM | 25 | 25 | 19.71  | 19.37  | 18.66  | 18.21  |        |        |        |        |             |
| 10              | 16QAM | 50 | 0  | 19.74  | 19.42  | 18.69  | 18.28  |        |        |        |        |             |
| Channel         |       |    |    | 55265  | 55810  | 56170  | 56715  | 55265  | 55810  | 56170  | 56715  | MPR<br>(dB) |
| Frequency (MHz) |       |    |    | 3552.5 | 3607   | 3643   | 3697.5 | 3552.5 | 3607   | 3643   | 3697.5 |             |
| 5               | QPSK  | 1  | 0  | 20.78  | 20.39  | 19.81  | 19.32  | 22     | 22     | 21.5   | 21     | 0           |
| 5               | QPSK  | 1  | 12 | 20.67  | 20.32  | 19.73  | 19.21  |        |        |        |        |             |
| 5               | QPSK  | 1  | 24 | 20.70  | 20.35  | 19.77  | 19.22  |        |        |        |        |             |
| 5               | QPSK  | 12 | 0  | 20.73  | 20.31  | 19.78  | 19.24  | 22     | 22     | 21.5   | 21     | ≤ 1         |
| 5               | QPSK  | 12 | 7  | 20.71  | 20.33  | 19.76  | 19.23  |        |        |        |        |             |
| 5               | QPSK  | 12 | 13 | 20.68  | 20.31  | 19.75  | 19.21  |        |        |        |        |             |
| 5               | QPSK  | 25 | 0  | 20.65  | 20.32  | 19.74  | 19.22  |        |        |        |        |             |
| 5               | 16QAM | 1  | 0  | 19.56  | 19.23  | 18.67  | 18.13  | 21     | 21     | 20.5   | 20     | ≤ 1         |
| 5               | 16QAM | 1  | 12 | 19.49  | 19.15  | 18.55  | 18.09  |        |        |        |        |             |
| 5               | 16QAM | 1  | 24 | 19.50  | 19.14  | 18.58  | 18.05  |        |        |        |        |             |
| 5               | 16QAM | 12 | 0  | 19.76  | 19.38  | 18.82  | 18.31  | 21     | 21     | 20.5   | 20     | ≤ 2         |
| 5               | 16QAM | 12 | 7  | 19.75  | 19.35  | 18.80  | 18.27  |        |        |        |        |             |
| 5               | 16QAM | 12 | 13 | 19.69  | 19.34  | 18.75  | 18.24  |        |        |        |        |             |
| 5               | 16QAM | 25 | 0  | 19.72  | 19.33  | 18.79  | 18.25  |        |        |        |        |             |



**<WLAN Conducted Power>**

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.



**<2.4GHz WLAN>**

|             | Mode              | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| 2.4GHz WLAN | 802.11b 1Mbps     | 1       | 2412            | 19.06               | 21.00         | 100.00       |
|             |                   | 6       | 2437            | 18.33               | 20.00         |              |
|             |                   | 11      | 2462            | 18.18               | 20.00         |              |
|             | 802.11g 6Mbps     | 1       | 2412            | 16.19               | 18.00         | 94.67        |
|             |                   | 6       | 2437            | 15.41               | 17.00         |              |
|             |                   | 11      | 2462            | 15.40               | 17.00         |              |
|             | 802.11n-HT20 MCS0 | 1       | 2412            | 15.11               | 17.00         | 92.36        |
|             |                   | 6       | 2437            | 14.52               | 16.50         |              |
|             |                   | 11      | 2462            | 14.35               | 16.00         |              |
|             | 802.11n-HT40 MCS0 | 3       | 2422            | 12.03               | 14.00         | 89.12        |
|             |                   | 6       | 2437            | 11.82               | 13.50         |              |
|             |                   | 9       | 2452            | 12.10               | 14.00         |              |

**<5GHz WLAN>**

|             | Mode              | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.2GHz WLAN | 802.11a 6Mbps     | 36      | 5180            | 14.80               | 16.50         | 94.94        |
|             |                   | 40      | 5200            | 14.93               | 16.50         |              |
|             |                   | 44      | 5220            | 15.89               | 17.50         |              |
|             |                   | 48      | 5240            | 15.83               | 17.50         |              |
|             | 802.11n-HT20 MCS0 | 36      | 5180            | 13.86               | 15.50         | 94.73        |
|             |                   | 40      | 5200            | 13.88               | 15.50         |              |
|             |                   | 44      | 5220            | 13.82               | 15.50         |              |
|             |                   | 48      | 5240            | 13.74               | 15.50         |              |
|             | 802.11n-HT40 MCS0 | 38      | 5190            | 12.84               | 14.50         | 85.25        |
|             |                   | 46      | 5230            | 12.86               | 14.50         |              |

|             | Mode              | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.3GHz WLAN | 802.11a 6Mbps     | 52      | 5260            | 15.87               | 17.50         | 94.94        |
|             |                   | 56      | 5280            | 15.64               | 17.50         |              |
|             |                   | 60      | 5300            | 15.57               | 17.50         |              |
|             |                   | 64      | 5320            | 15.50               | 17.50         |              |
|             | 802.11n-HT20 MCS0 | 52      | 5260            | 14.16               | 16.00         | 94.73        |
|             |                   | 56      | 5280            | 14.03               | 16.00         |              |
|             |                   | 60      | 5300            | 13.92               | 15.50         |              |
|             |                   | 64      | 5320            | 13.89               | 15.50         |              |
|             | 802.11n-HT40 MCS0 | 54      | 5270            | 13.33               | 15.00         | 85.25        |
|             |                   | 62      | 5310            | 12.39               | 14.00         |              |


|             | Mode              | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.5GHz WLAN | 802.11a 6Mbps     | 100     | 5500            | 15.92               | 17.50         | 94.94        |
|             |                   | 116     | 5580            | 16.06               | 18.00         |              |
|             |                   | 124     | 5620            | 16.30               | 18.00         |              |
|             |                   | 132     | 5660            | 16.08               | 18.00         |              |
|             |                   | 140     | 5700            | 15.81               | 17.50         |              |
|             |                   | 144     | 5720            | 15.51               | 17.50         |              |
|             | 802.11n-HT20 MCS0 | 100     | 5500            | 13.82               | 15.50         | 94.73        |
|             |                   | 116     | 5580            | 14.08               | 16.00         |              |
|             |                   | 124     | 5620            | 13.75               | 15.50         |              |
|             |                   | 132     | 5660            | 13.69               | 15.50         |              |
|             |                   | 140     | 5700            | 13.39               | 15.00         |              |
|             |                   | 144     | 5720            | 13.22               | 15.00         |              |
|             | 802.11n-HT40 MCS0 | 102     | 5510            | 12.90               | 14.50         | 85.25        |
|             |                   | 110     | 5550            | 13.18               | 15.00         |              |
|             |                   | 126     | 5630            | 12.97               | 14.50         |              |
| 134         |                   | 5670    | 12.96           | 14.50               |               |              |
| 142         |                   | 5710    | 12.89           | 14.50               |               |              |

|             | Mode              | Channel | Frequency (MHz) | Average power (dBm) | Tune-Up Limit | Duty Cycle % |
|-------------|-------------------|---------|-----------------|---------------------|---------------|--------------|
| 5.8GHz WLAN | 802.11a MCS0      | 149     | 5745            | 15.61               | 17.50         | 94.94        |
|             |                   | 157     | 5785            | 16.06               | 18.00         |              |
|             |                   | 165     | 5825            | 15.98               | 17.50         |              |
|             | 802.11n-HT20 MCS0 | 149     | 5745            | 13.60               | 15.50         | 94.73        |
|             |                   | 157     | 5785            | 14.00               | 16.00         |              |
|             |                   | 165     | 5825            | 13.98               | 15.50         |              |
|             | 802.11n-HT40 MCS0 | 151     | 5755            | 12.92               | 14.50         | 85.25        |
|             |                   | 159     | 5795            | 13.18               | 15.00         |              |

**<2.4GHz Bluetooth>**

**General Note:**

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.94 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

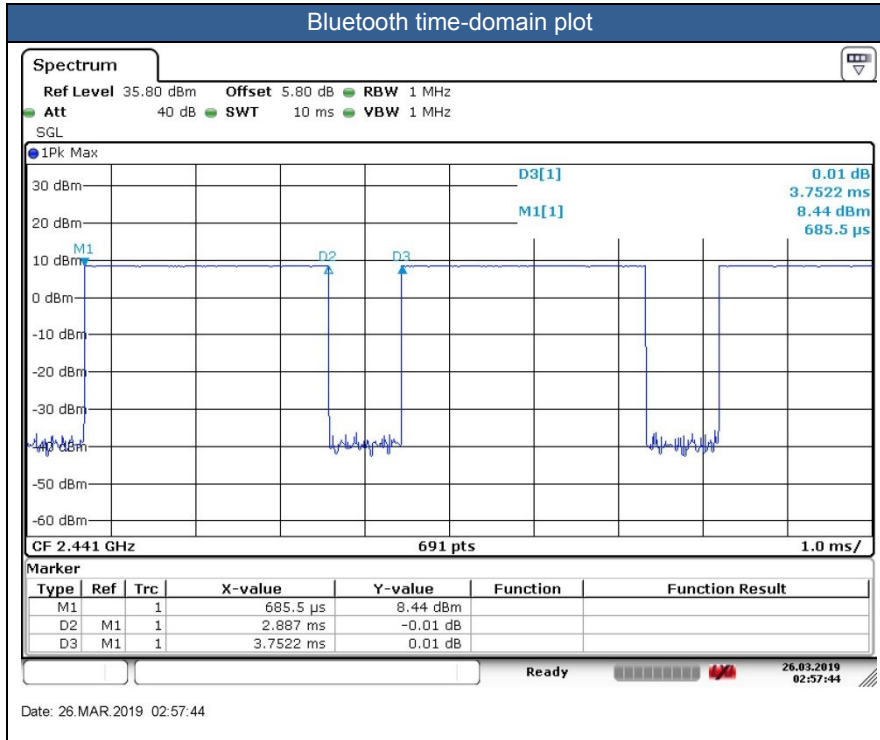

| Mode                | Channel | Frequency (MHz) | Average power (dBm) |
|---------------------|---------|-----------------|---------------------|
|                     |         |                 | 1Mbps               |
| BR/EDR              | CH 00   | 2402            | <b>9.02</b>         |
|                     | CH 39   | 2441            | 8.50                |
|                     | CH 78   | 2480            | 7.86                |
| Tune-up limit (dBm) |         |                 | 11.00               |

| Mode                | Channel | Frequency (MHz) | Average power (dBm) |
|---------------------|---------|-----------------|---------------------|
|                     |         |                 | GFSK                |
| v4.0 LE             | CH 00   | 2402            | <b>0.77</b>         |
|                     | CH 19   | 2440            | 0.42                |
|                     | CH 39   | 2480            | 0.27                |
| Tune-up limit (dBm) |         |                 | 2.50                |



### **13. Antenna Location**

Please refer to appendix D for SAR test setup photo.





## **14. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) for power class 2 and 1:1.59 (62.9 %) for power class 3 were used perform testing and considering the theoretical duty cycle of 43.3% for power class 2 and 63.3% for power class 3 for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for power class 2 and 62.9% for power class 3 for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $43.3\%/42.9\% = 1.009$  for power class 2 and  $63.3\%/62.9\% = 1.006$  for power class 3 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. This device has PTT (push-to-talk) function, so perform 25mm in-front-of the face SAR.
5. The device can use with assigned accessory manufacturer offered, so perform 0mm body worn accessory SAR.
6. For Swivel Carry Holster, when using body-worn accessory, the device can enclose the holster with front face or back face, so for body-worn SAR testing, evaluated front/back face when enclose to the holster. There is a swivel belt clip adhere to holster, only rotation for using.
7. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.

### **LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $> \text{not } \frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.



**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



**14.1 Face SAR**

**<LTE SAR>**

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position    | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|------------------|----------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 01       | LTE Band 48 | 20M      | QPSK       | 1       | 0         | In front of face | 25       | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | -0.01            | 0.074                  | <b>0.097</b>           |
|          | LTE Band 48 | 20M      | QPSK       | 50      | 0         | In front of face | 25       | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | 0.02             | 0.071                  | 0.096                  |

**<WLAN 2.4GHz SAR>**

| Plot No. | Band       | Mode          | Test Position    | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|------------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 02       | WLAN2.4GHz | 802.11b 1Mbps | In front of face | 25       | 1   | 2412        | 19.06               | 21.00               | 1.563                  | 100          | 1.000                     | 0.02             | 0.051                  | <b>0.080</b>           |

**<WLAN 5GHz SAR>**

| Plot No. | Band       | Mode          | Test Position    | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|------------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 03       | WLAN5.3GHz | 802.11a 6Mbps | In front of face | 25       | 52  | 5260        | 15.87               | 17.50               | 1.455                  | 94.94        | 1.053                     | 0.08             | 0.129                  | <b>0.198</b>           |
| 04       | WLAN5.5GHz | 802.11a 6Mbps | In front of face | 25       | 124 | 5620        | 16.30               | 18.00               | 1.479                  | 94.94        | 1.053                     | 0.05             | 0.052                  | <b>0.081</b>           |
| 05       | WLAN5.8GHz | 802.11a 6Mbps | In front of face | 25       | 157 | 5785        | 16.06               | 18.00               | 1.563                  | 94.94        | 1.053                     | 0.04             | 0.065                  | <b>0.107</b>           |



**14.2 Hotspot SAR**

**<LTE SAR>**

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | LTE Band 48 | 20M      | QPSK       | 1       | 0         | Front         | 10       | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | 0.05             | 0.224                  | 0.291                  |
|          | LTE Band 48 | 20M      | QPSK       | 50      | 0         | Front         | 10       | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | -0.06            | 0.222                  | 0.301                  |
|          | LTE Band 48 | 20M      | QPSK       | 1       | 0         | Back          | 10       | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | 0.03             | 0.245                  | 0.318                  |
|          | LTE Band 48 | 20M      | QPSK       | 50      | 0         | Back          | 10       | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | -0.01            | 0.232                  | 0.314                  |
|          | LTE Band 48 | 20M      | QPSK       | 1       | 0         | Right Side    | 10       | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | 0.1              | 0.269                  | 0.349                  |
| 06       | LTE Band 48 | 20M      | QPSK       | 50      | 0         | Right Side    | 10       | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | 0.05             | 0.349                  | <b>0.473</b>           |
|          | LTE Band 48 | 20M      | QPSK       | 1       | 0         | Top Side      | 10       | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | -0.01            | 0.073                  | 0.095                  |
|          | LTE Band 48 | 20M      | QPSK       | 50      | 0         | Top Side      | 10       | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | 0.03             | 0.081                  | 0.110                  |

**<WLAN 2.4GHz SAR>**

| Plot No. | Band       | Mode          | Test Position | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 07       | WLAN2.4GHz | 802.11b 1Mbps | Front         | 10       | 1   | 2412        | 19.06               | 21.00               | 1.563                  | 100          | 1.000                     | -0.17            | 0.206                  | <b>0.322</b>           |
|          | WLAN2.4GHz | 802.11b 1Mbps | Back          | 10       | 1   | 2412        | 19.06               | 21.00               | 1.563                  | 100          | 1.000                     | 0.1              | 0.106                  | 0.166                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Left Side     | 10       | 1   | 2412        | 19.06               | 21.00               | 1.563                  | 100          | 1.000                     | 0.03             | 0.076                  | 0.119                  |

**<WLAN 5GHz SAR>**

| Plot No. | Band       | Mode          | Test Position | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | WLAN5.2GHz | 802.11a 6Mbps | Front         | 10       | 44  | 5220        | 15.89               | 17.50               | 1.448                  | 94.94        | 1.053                     | 0.17             | 0.102                  | 0.156                  |
|          | WLAN5.2GHz | 802.11a 6Mbps | Back          | 10       | 44  | 5220        | 15.89               | 17.50               | 1.448                  | 94.94        | 1.053                     | -0.02            | 0.176                  | 0.268                  |
| 08       | WLAN5.2GHz | 802.11a 6Mbps | Left Side     | 10       | 44  | 5220        | 15.89               | 17.50               | 1.448                  | 94.94        | 1.053                     | -0.04            | 0.310                  | <b>0.473</b>           |
|          | WLAN5.8GHz | 802.11a 6Mbps | Front         | 10       | 157 | 5785        | 16.06               | 18.00               | 1.563                  | 94.94        | 1.053                     | 0.03             | 0.194                  | 0.319                  |
|          | WLAN5.8GHz | 802.11a 6Mbps | Back          | 10       | 157 | 5785        | 16.06               | 18.00               | 1.563                  | 94.94        | 1.053                     | 0.05             | 0.242                  | 0.398                  |
| 09       | WLAN5.8GHz | 802.11a 6Mbps | Left Side     | 10       | 157 | 5785        | 16.06               | 18.00               | 1.563                  | 94.94        | 1.053                     | 0.11             | 0.404                  | <b>0.665</b>           |
|          | WLAN5.8GHz | 802.11a 6Mbps | Left Side     | 10       | 165 | 5825        | 15.98               | 17.50               | 1.419                  | 94.94        | 1.053                     | 0.05             | 0.316                  | 0.472                  |

**14.3 Body Worn Accessory SAR**

**<LTE SAR>**

| Plot No. | Band        | BW (MHz) | Modulation | RB Size | RB Offset | Test Position | Carry Accessory      | Gap (mm) | Ch.   | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------------|---------|-----------|---------------|----------------------|----------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | LTE Band 48 | 20M      | QPSK       | 1       | 0         | Front Face    | Swivel Carry Holster | 0        | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | 0.01             | 0.359                  | 0.466                  |
| 10       | LTE Band 48 | 20M      | QPSK       | 50      | 0         | Front Face    | Swivel Carry Holster | 0        | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | -0.06            | 0.350                  | <b>0.474</b>           |
|          | LTE Band 48 | 20M      | QPSK       | 1       | 0         | Back Face     | Swivel Carry Holster | 0        | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | 0.03             | 0.137                  | 0.178                  |
|          | LTE Band 48 | 20M      | QPSK       | 50      | 0         | Back Face     | Swivel Carry Holster | 0        | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | -0.08            | 0.134                  | 0.181                  |
|          | LTE Band 48 | 20M      | QPSK       | 1       | 0         | Back Face     | Belt Clip            | 0        | 55340 | 3560        | 20.89               | 22.00               | 1.291                  | 62.9         | 1.006                     | 0.1              | 0.246                  | 0.320                  |
|          | LTE Band 48 | 20M      | QPSK       | 50      | 0         | Back Face     | Belt Clip            | 0        | 55340 | 3560        | 20.71               | 22.00               | 1.346                  | 62.9         | 1.006                     | -0.06            | 0.242                  | 0.328                  |

**<WLAN 2.4GHz SAR>**

| Plot No. | Band       | Mode          | Test Position | Carry Accessory      | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|---------------|----------------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | WLAN2.4GHz | 802.11b 1Mbps | Front Face    | Swivel Carry Holster | 0        | 1   | 2412        | 19.06               | 21.00               | 1.563                  | 100          | 1.000                     | 0.13             | 0.044                  | 0.069                  |
|          | WLAN2.4GHz | 802.11b 1Mbps | Back Face     | Swivel Carry Holster | 0        | 1   | 2412        | 19.06               | 21.00               | 1.563                  | 100          | 1.000                     | 0.05             | 0.026                  | 0.040                  |
| 11       | WLAN2.4GHz | 802.11b 1Mbps | Back Face     | Belt Clip            | 0        | 1   | 2412        | 19.06               | 21.00               | 1.563                  | 100          | 1.000                     | 0.02             | 0.059                  | <b>0.092</b>           |

**<WLAN 5GHz SAR>**

| Plot No. | Band       | Mode          | Test Position | Carry Accessory      | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|------------|---------------|---------------|----------------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | WLAN5.3GHz | 802.11a 6Mbps | Front Face    | Swivel Carry Holster | 0        | 52  | 5260        | 15.87               | 17.50               | 1.455                  | 94.94        | 1.053                     | 0.03             | 0.050                  | 0.076                  |
| 12       | WLAN5.3GHz | 802.11a 6Mbps | Back Face     | Swivel Carry Holster | 0        | 52  | 5260        | 15.87               | 17.50               | 1.455                  | 94.94        | 1.053                     | 0.09             | 0.112                  | <b>0.172</b>           |
|          | WLAN5.3GHz | 802.11a 6Mbps | Back Face     | Belt Clip            | 0        | 52  | 5260        | 15.87               | 17.50               | 1.455                  | 94.94        | 1.053                     | 0.12             | 0.074                  | 0.113                  |
|          | WLAN5.5GHz | 802.11a 6Mbps | Front Face    | Swivel Carry Holster | 0        | 124 | 5620        | 16.30               | 18.00               | 1.479                  | 94.94        | 1.053                     | -0.07            | 0.080                  | 0.125                  |
| 13       | WLAN5.5GHz | 802.11a 6Mbps | Back Face     | Swivel Carry Holster | 0        | 124 | 5620        | 16.30               | 18.00               | 1.479                  | 94.94        | 1.053                     | -0.09            | 0.141                  | <b>0.220</b>           |
|          | WLAN5.5GHz | 802.11a 6Mbps | Back Face     | Belt Clip            | 0        | 124 | 5620        | 16.30               | 18.00               | 1.479                  | 94.94        | 1.053                     | 0.05             | 0.082                  | 0.128                  |
|          | WLAN5.8GHz | 802.11a 6Mbps | Front Face    | Swivel Carry Holster | 0        | 157 | 5785        | 16.06               | 18.00               | 1.563                  | 94.94        | 1.053                     | -0.01            | 0.065                  | 0.107                  |
| 14       | WLAN5.8GHz | 802.11a 6Mbps | Back Face     | Swivel Carry Holster | 0        | 157 | 5785        | 16.06               | 18.00               | 1.563                  | 94.94        | 1.053                     | -0.07            | 0.136                  | <b>0.224</b>           |
|          | WLAN5.8GHz | 802.11a 6Mbps | Back Face     | Belt Clip            | 0        | 157 | 5785        | 16.06               | 18.00               | 1.563                  | 94.94        | 1.053                     | -0.07            | 0.088                  | 0.145                  |

**<Bluetooth SAR>**

| Plot No. | Band      | Mode  | Test Position | Carry Accessory      | Gap (mm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-----------|-------|---------------|----------------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
|          | Bluetooth | 1Mbps | Front Face    | Swivel Carry Holster | 0        | 0   | 2402        | 9.02                | 11                  | 1.578                  | 76.94        | 1.083                     | 0.01             | 0.005                  | 0.009                  |
|          | Bluetooth | 1Mbps | Back Face     | Swivel Carry Holster | 0        | 0   | 2402        | 9.02                | 11                  | 1.578                  | 76.94        | 1.083                     | 0.03             | 0.003                  | 0.004                  |
| 15       | Bluetooth | 1Mbps | Back Face     | Belt Clip            | 0        | 0   | 2402        | 9.02                | 11                  | 1.578                  | 76.94        | 1.083                     | -0.05            | 0.00831                | <b>0.014</b>           |

**15. Simultaneous Transmission Analysis**

| No. | Simultaneous Transmission Configurations | WAVE TWO-WAY RADIO |         |           |
|-----|--|--------------------|---------|-----------|
|     |  | Face               | Hotspot | Body-worn |
| 1.  | LTE + WLAN2.4GHz                         | Yes                | Yes     | Yes       |
| 2.  | LTE + WLAN5.2GHz                         | Yes                | Yes     | Yes       |
| 3.  | LTE + WLAN5.3GHz                         | Yes                |         | Yes       |
| 4.  | LTE + WLAN5.5GHz                         | Yes                |         | Yes       |
| 5.  | LTE + WLAN5.8GHz                         | Yes                | Yes     | Yes       |
| 6.  | LTE + Bluetooth                          |                    |         | Yes       |
| 7.  | LTE + WLAN5.2GHz+ Bluetooth              |                    |         | Yes       |
| 8.  | LTE + WLAN5.3GHz+ Bluetooth              |                    |         | Yes       |
| 9.  | LTE + WLAN5.5GHz+ Bluetooth              |                    |         | Yes       |
| 10. | LTE + WLAN5.8GHz+ Bluetooth              |                    |         | Yes       |

**General Note:**

1. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
2. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
3. According to EUT character, WLAN5GHz can transmit with Bluetooth simultaneously though they share the same antenna.
4. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
5. The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

**15.1 Head Exposure Conditions**

| WWAN Band |         | Exposure Position            | 1                | 2                | 3                | 1+2<br>Summed<br>1g SAR<br>(W/kg) | 1+3<br>Summed<br>1g SAR<br>(W/kg) |
|-----------|---------|------------------------------|------------------|------------------|------------------|-----------------------------------|-----------------------------------|
|           |         |                              | WWAN             | 2.4GHz<br>WLAN   | 5GHz WLAN        |                                   |                                   |
|           |         |                              | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                   |                                   |
| LTE       | Band 48 | In the front of face at 25mm | 0.097            | 0.080            | 0.198            | 0.18                              | 0.30                              |

**15.2 Hotspot Exposure Conditions**

| WWAN Band |         | Exposure Position  | 1                | 2                | 3                | 1+2<br>Summed<br>1g SAR<br>(W/kg) | 1+3<br>Summed<br>1g SAR<br>(W/kg) |
|-----------|---------|--------------------|------------------|------------------|------------------|-----------------------------------|-----------------------------------|
|           |         |                    | WWAN             | 2.4GHz<br>WLAN   | 5GHz<br>WLAN     |                                   |                                   |
|           |         |                    | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                   |                                   |
| LTE       | Band 48 | Front at 10mm      | 0.301            | 0.322            | 0.319            | 0.62                              | 0.62                              |
|           |         | Back at 10mm       | 0.318            | 0.166            | 0.398            | 0.48                              | 0.72                              |
|           |         | Left side at 10mm  |                  | 0.119            | 0.665            | 0.12                              | 0.67                              |
|           |         | Right side at 10mm | 0.473            |                  |                  | 0.47                              | 0.47                              |
|           |         | Top side at 10mm   | 0.110            |                  |                  | 0.11                              | 0.11                              |

**15.3 Body-Worn Accessory Exposure Conditions**

| WWAN Band |         | Exposure Position                      | 1                | 2                | 3                | 4                | 1+2<br>Summed<br>1g SAR<br>(W/kg) | 1+3<br>Summed<br>1g SAR<br>(W/kg) | 1+3+4<br>Summed<br>1g SAR<br>(W/kg) |
|-----------|---------|--|------------------|------------------|------------------|------------------|-----------------------------------|-----------------------------------|-------------------------------------|
|           |         |  | WWAN             | 2.4GHz<br>WLAN   | 5GHz<br>WLAN     | Bluetooth        |                                   |                                   |                                     |
|           |         |  | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                   |                                   |                                     |
| LTE       | Band 48 | Front Face at 0mm Swivel Carry Holster | 0.474            | 0.069            | 0.125            | 0.009            | 0.54                              | 0.60                              | 0.61                                |
|           |         | Back Face at 0mm Swivel Carry Holster  | 0.181            | 0.040            | 0.224            | 0.004            | 0.22                              | 0.41                              | 0.41                                |
|           |         | Back Face at 0mm Belt Clip             | 0.328            | 0.092            | 0.145            | 0.014            | 0.42                              | 0.47                              | 0.49                                |

**Test Engineer : Johnny Chen**



## **16. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.





## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.

## System Check\_Head\_2450MHz

**DUT: D2450V2-SN:736**


Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450\_190417 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.878$  S/m;  $\epsilon_r = 40.464$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 2019.03.01
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 25.4 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 100.5 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 33.7 W/kg  
**SAR(1 g) = 12.1 W/kg; SAR(10 g) = 6.32 W/kg**  
Maximum value of SAR (measured) = 25.3 W/kg

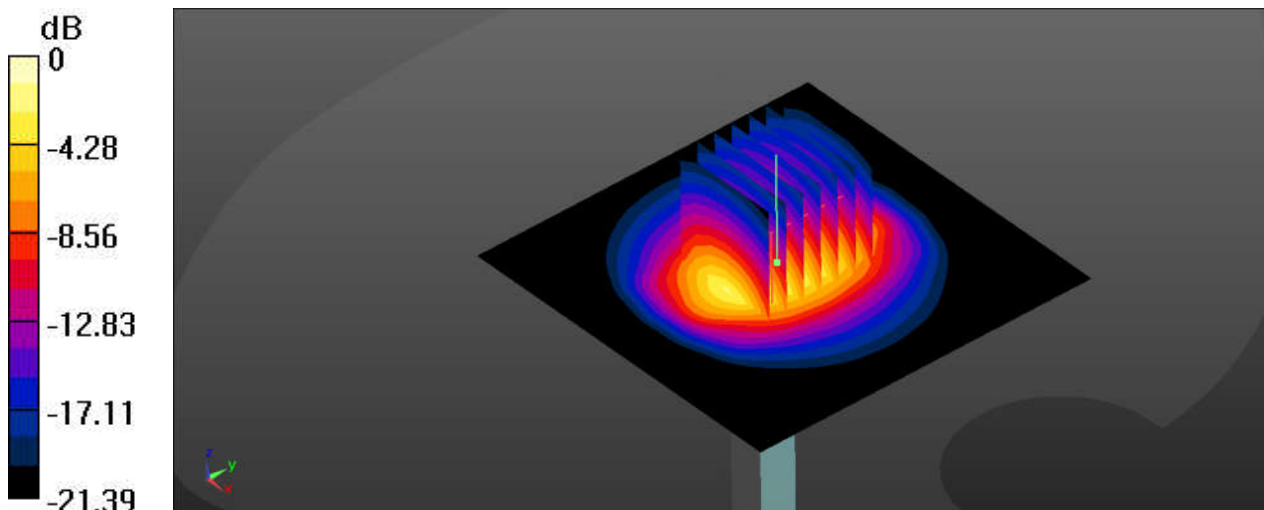

0 dB = 25.3 W/kg

## System Check\_Head\_3500MHz

**DUT: D3500V2-SN:1037**


Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1  
Medium: HSL\_3500\_190405 Medium parameters used:  $f = 3500$  MHz;  $\sigma = 2.817$  S/m;  $\epsilon_r = 39.527$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.89, 6.89, 6.89); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 13.9 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 49.96 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 19.4 W/kg  
**SAR(1 g) = 6.79 W/kg; SAR(10 g) = 2.45 W/kg**  
Maximum value of SAR (measured) = 13.6 W/kg

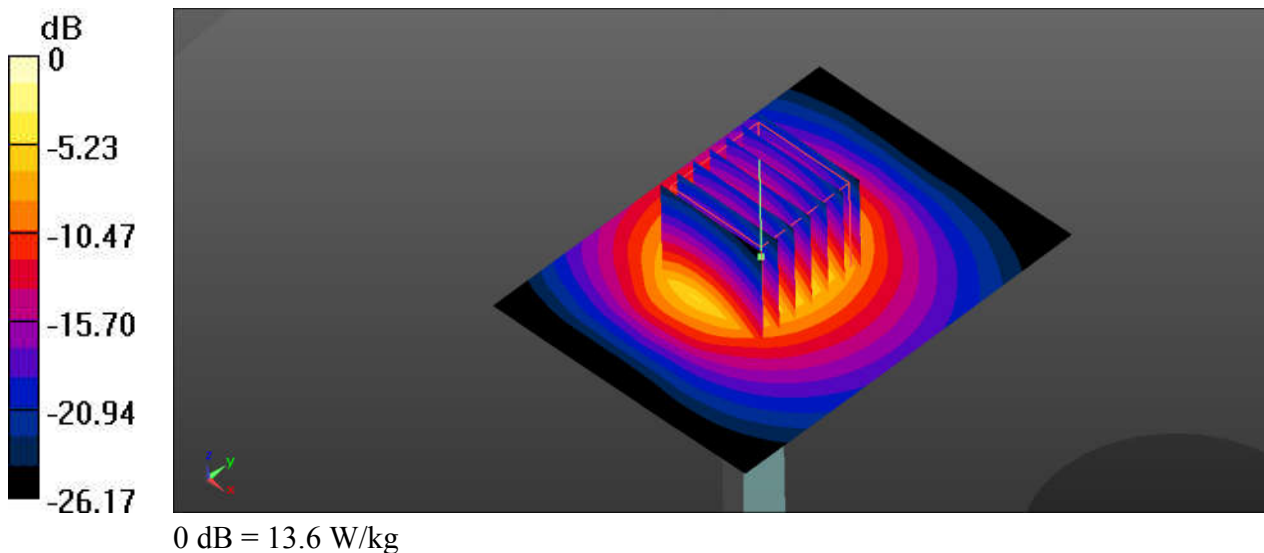

## System Check\_Head\_3700MHz

**DUT: D3700V2-SN:1008**


Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1  
Medium: HSL\_3700\_190405 Medium parameters used:  $f = 3700$  MHz;  $\sigma = 3.054$  S/m;  $\epsilon_r = 38.374$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.67, 6.67, 6.67); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 12.9 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 43.99 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 18.5 W/kg  
**SAR(1 g) = 6.16 W/kg; SAR(10 g) = 2.27 W/kg**  
Maximum value of SAR (measured) = 12.6 W/kg

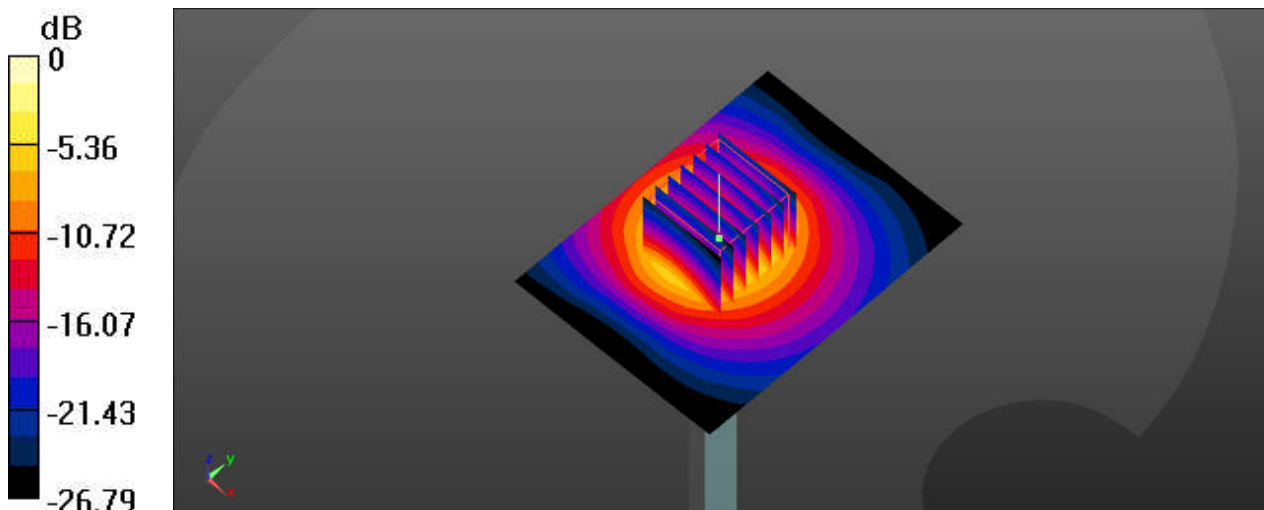

0 dB = 12.9 W/kg

## System Check\_Head\_5250MHz

**DUT: D5GHzV2-SN:1167**


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: HSL\_5250\_190417 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.703$  S/m;  $\epsilon_r = 36.115$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.07, 5.07, 5.07); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 18.0 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 39.24 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 28.5 W/kg  
**SAR(1 g) = 7.34 W/kg; SAR(10 g) = 2.05 W/kg**  
Maximum value of SAR (measured) = 18.2 W/kg

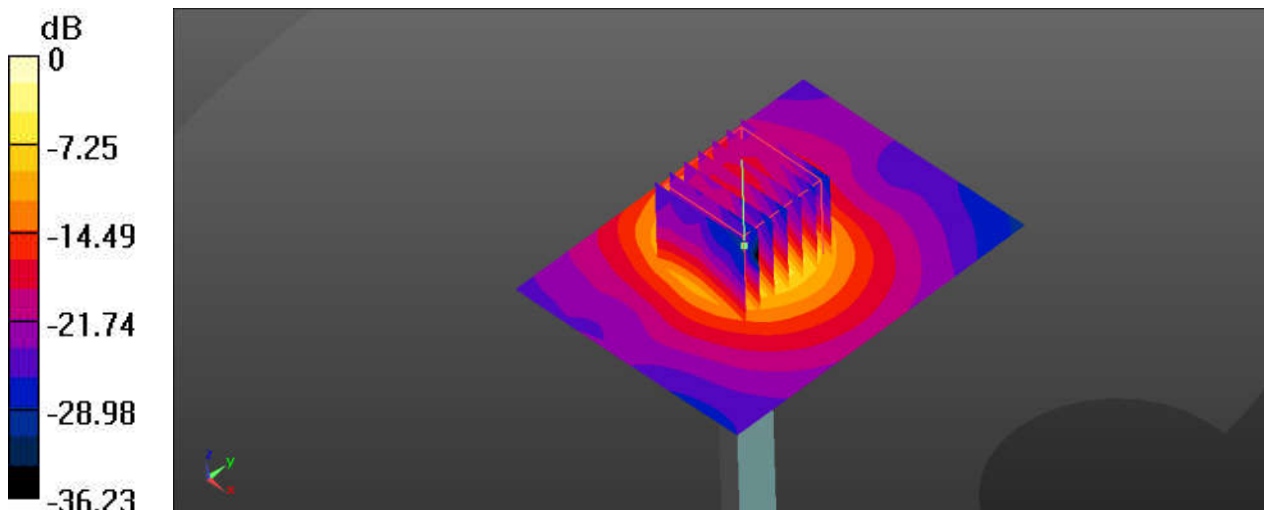

0 dB = 18.2 W/kg

## System Check\_Head\_5600MHz

**DUT: D5GHzV2-SN:1167**


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: HSL\_5600\_190417 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.848$  S/m;  $\epsilon_r = 35.767$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.7, 4.7, 4.7); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 18.0 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 39.20 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 31.0 W/kg  
**SAR(1 g) = 7.34 W/kg; SAR(10 g) = 2.17 W/kg**  
Maximum value of SAR (measured) = 18.6 W/kg

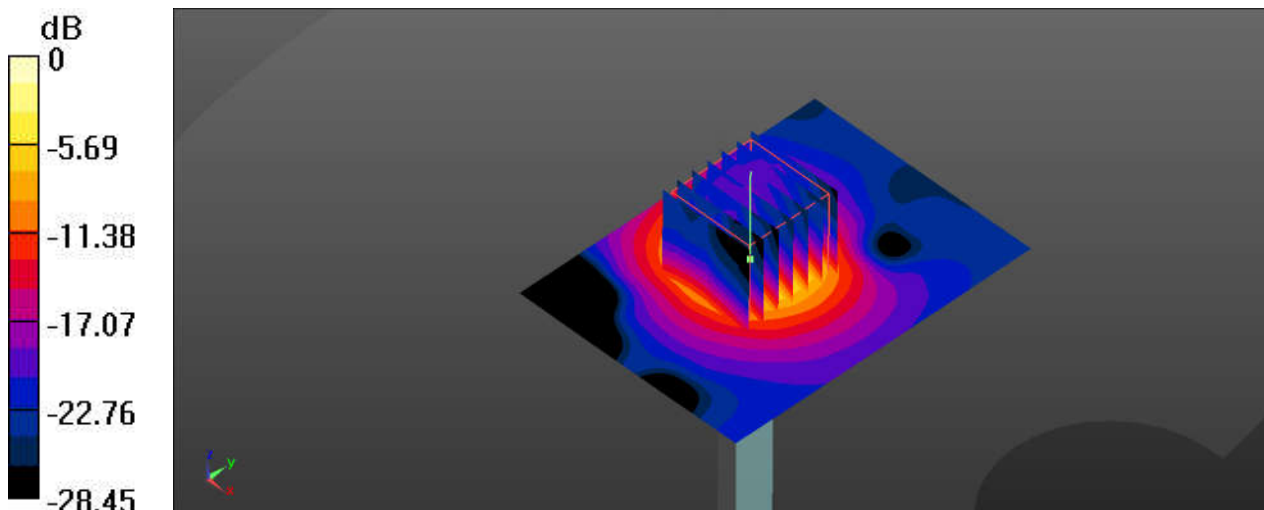

0 dB = 18.6 W/kg

## System Check\_Head\_5750MHz

**DUT: D5GHzV2-SN:1167**


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: HSL\_5750\_190417 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.17$  S/m;  $\epsilon_r = 35.843$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.77, 4.77, 4.77); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 18.2 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 36.65 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 31.2 W/kg  
**SAR(1 g) = 7.07 W/kg; SAR(10 g) = 1.98 W/kg**  
Maximum value of SAR (measured) = 18.3 W/kg

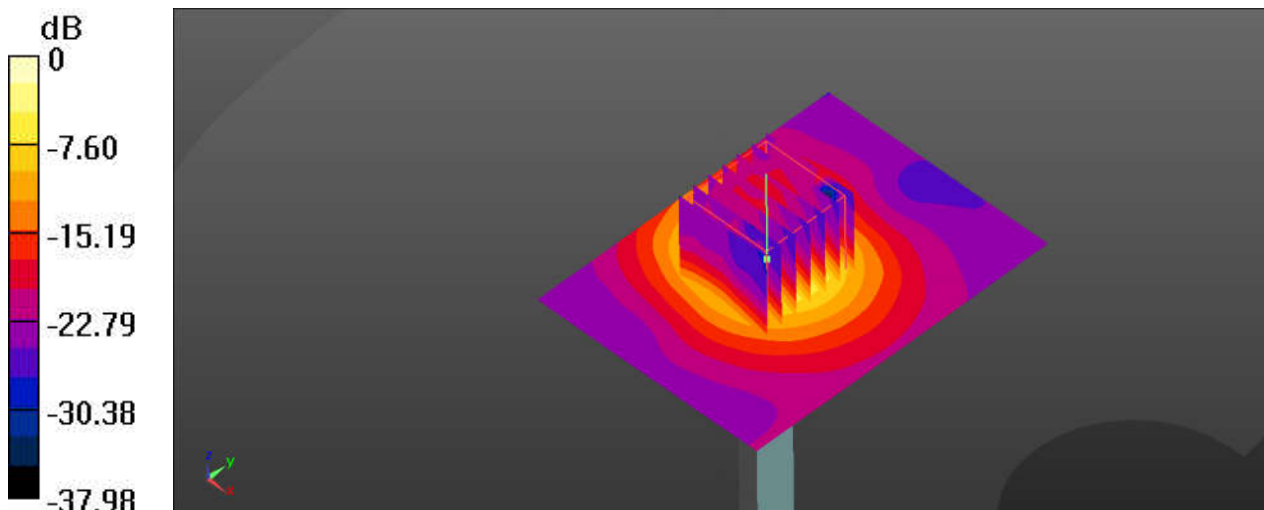

0 dB = 18.3 W/kg



## System Check\_Body\_2450MHz

**DUT: D2450V2-SN:736**


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: MSL\_2450\_190417 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.992$  S/m;  $\epsilon_r = 52.291$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.32, 7.32, 7.32); Calibrated: 2019.03.01
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=250mW/Area Scan (71x81x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 34.4 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 111.1 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 59.3 W/kg  
**SAR(1 g) = 11.8 W/kg; SAR(10 g) = 6.1 W/kg**  
Maximum value of SAR (measured) = 33.3 W/kg

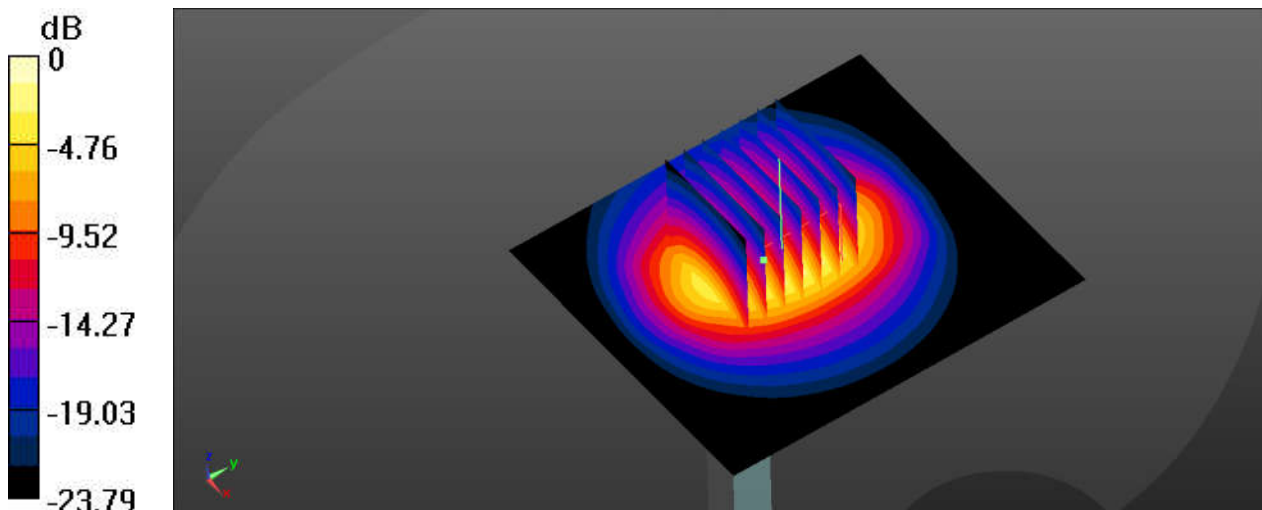

0 dB = 33.3 W/kg

## System Check\_Body\_3500MHz

**DUT: D3500V2-SN:1037**


Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1  
Medium: MSL\_3500\_190407 Medium parameters used:  $f = 3500$  MHz;  $\sigma = 3.319$  S/m;  $\epsilon_r = 51.784$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.57, 6.57, 6.57); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 14.6 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 35.83 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 19.9 W/kg  
**SAR(1 g) = 6.51 W/kg; SAR(10 g) = 2.41 W/kg**  
Maximum value of SAR (measured) = 14.0 W/kg

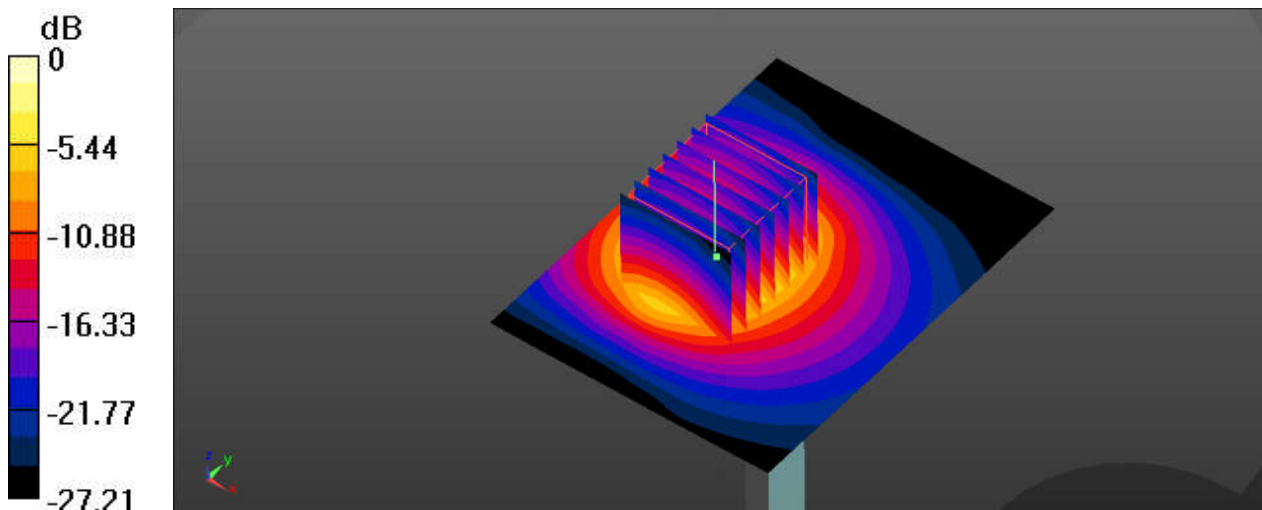

0 dB = 14.0 W/kg

## System Check\_Body\_3700MHz

**DUT: D3700V2-SN:1008**


Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1  
Medium: MSL\_3700\_190407 Medium parameters used:  $f = 3700$  MHz;  $\sigma = 3.524$  S/m;  $\epsilon_r = 51.522$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.37, 6.37, 6.37); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 13.2 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 45.93 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 18.4 W/kg  
**SAR(1 g) = 6.19 W/kg; SAR(10 g) = 2.29 W/kg**  
Maximum value of SAR (measured) = 12.8 W/kg

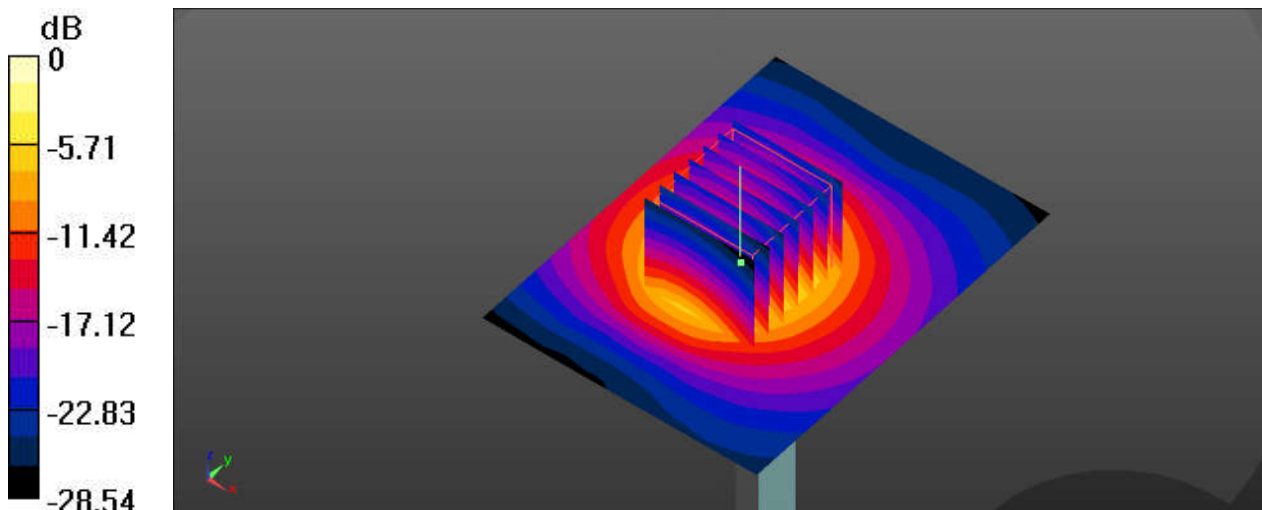

0 dB = 12.8 W/kg

## System Check\_Body\_5250MHz

### DUT: D5GHzV2-SN1167


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: MSL\_5250\_190417 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.276$  S/m;  $\epsilon_r = 50.886$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.46, 4.46, 4.46); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 17.7 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 36.34 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 26.3 W/kg  
**SAR(1 g) = 7.19 W/kg; SAR(10 g) = 2.08 W/kg**  
Maximum value of SAR (measured) = 17.3 W/kg

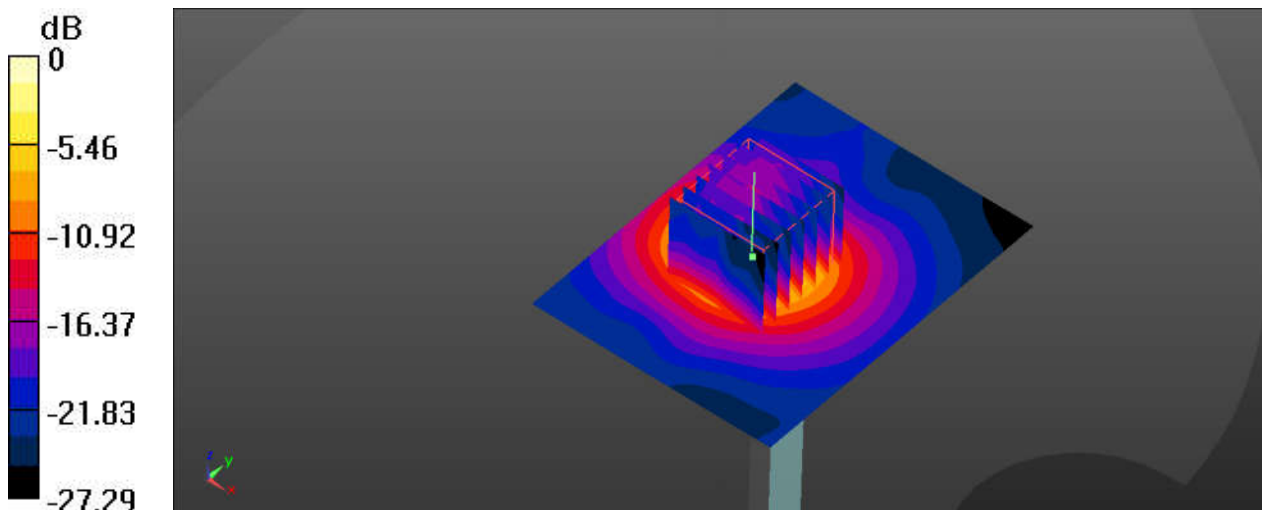

0 dB = 17.3 W/kg

## System Check\_Body\_5600MHz

**DUT: D5GHzV2-SN:1167**


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: MSL\_5600\_190417 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.825$  S/m;  $\epsilon_r = 50.395$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.92, 3.92, 3.92); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 21.2 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 36.95 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 33.9 W/kg  
**SAR(1 g) = 8.34 W/kg; SAR(10 g) = 2.27 W/kg**  
Maximum value of SAR (measured) = 21.0 W/kg

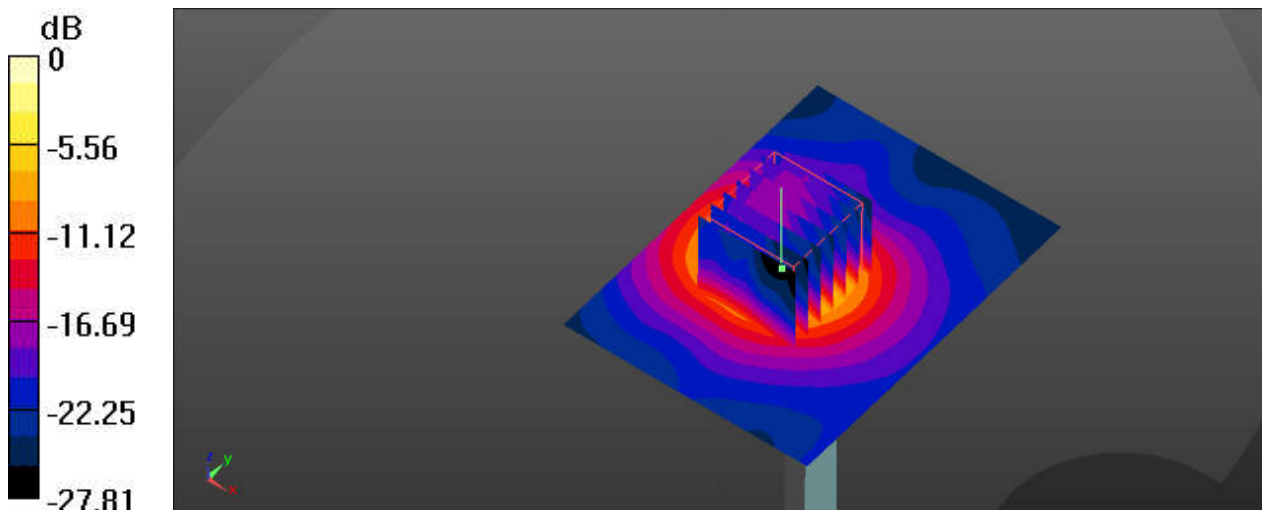

0 dB = 21.0 W/kg

## System Check\_Body\_5750MHz

**DUT: D5GHzV2-SN:1167**


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: MSL\_5750\_190417 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.051$  S/m;  $\epsilon_r = 50.049$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.07, 4.07, 4.07); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 19.6 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 35.25 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 32.1 W/kg  
**SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.2 W/kg**  
Maximum value of SAR (measured) = 19.2 W/kg

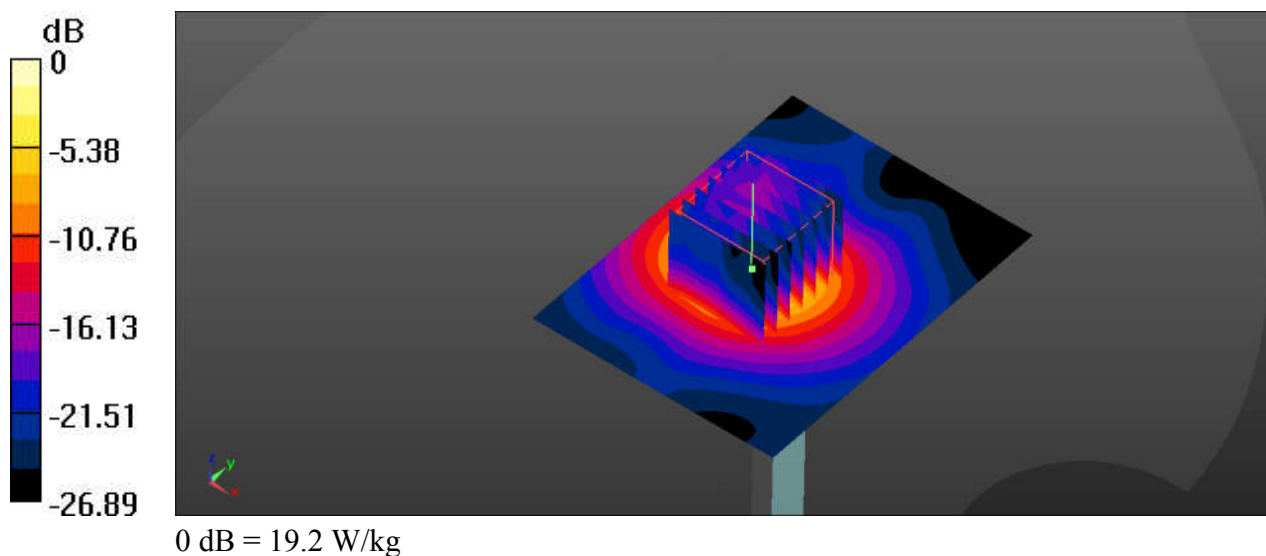

## System Check\_Body\_5750MHz

**DUT: D5GHzV2-SN:1167**


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium: MSL\_5750\_190510 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.050$  S/m;  $\epsilon_r = 50.057$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.07, 4.07, 4.07); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Pin=100mW/Area Scan (61x81x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 19.7 W/kg

**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 35.25 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 32.1 W/kg  
**SAR(1 g) = 7.21 W/kg; SAR(10 g) = 2.05 W/kg**  
Maximum value of SAR (measured) = 19.1 W/kg

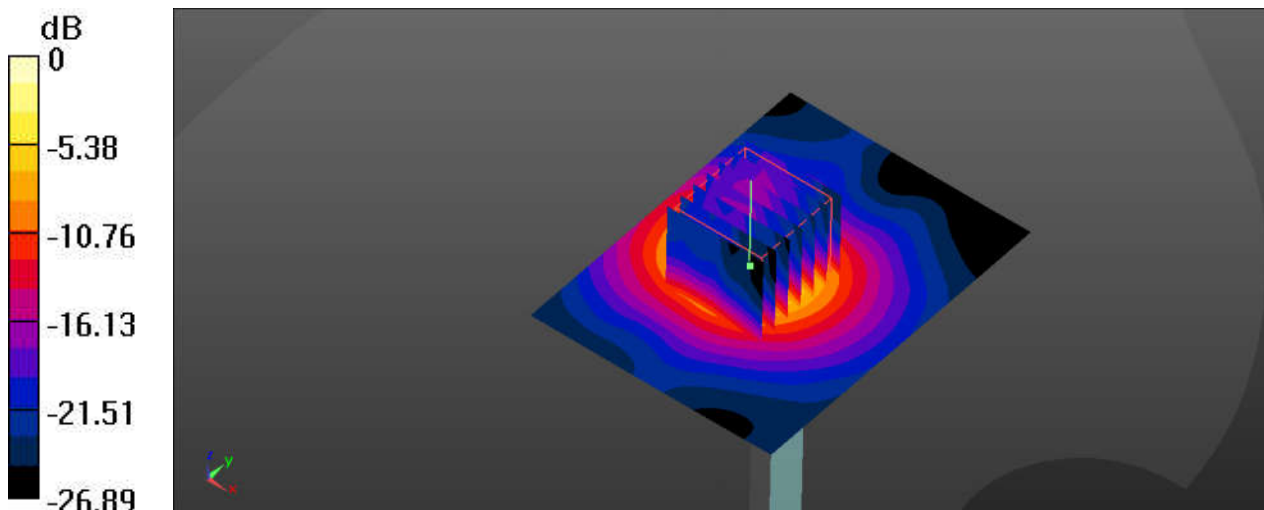

0 dB = 19.1 W/kg



## **Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.



### 01\_LTE Band 48\_20M\_QPSK\_1RB\_0Offset\_face\_25mm\_Ch55340


Communication System: UID 0, LTE (0); Frequency: 3560 MHz; Duty Cycle: 1:1.59  
 Medium: HSL\_3500\_190405 Medium parameters used:  $f = 3560$  MHz;  $\sigma = 2.864$  S/m;  $\epsilon_r = 39.814$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(6.89, 6.89, 6.89); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.12 (7450)

**Ch55340/Area Scan (81x191x1):** Interpolated grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 0.131 W/kg

**Ch55340/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 1.637 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.179 W/kg  
**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.038 W/kg**  
 Maximum value of SAR (measured) = 0.129 W/kg

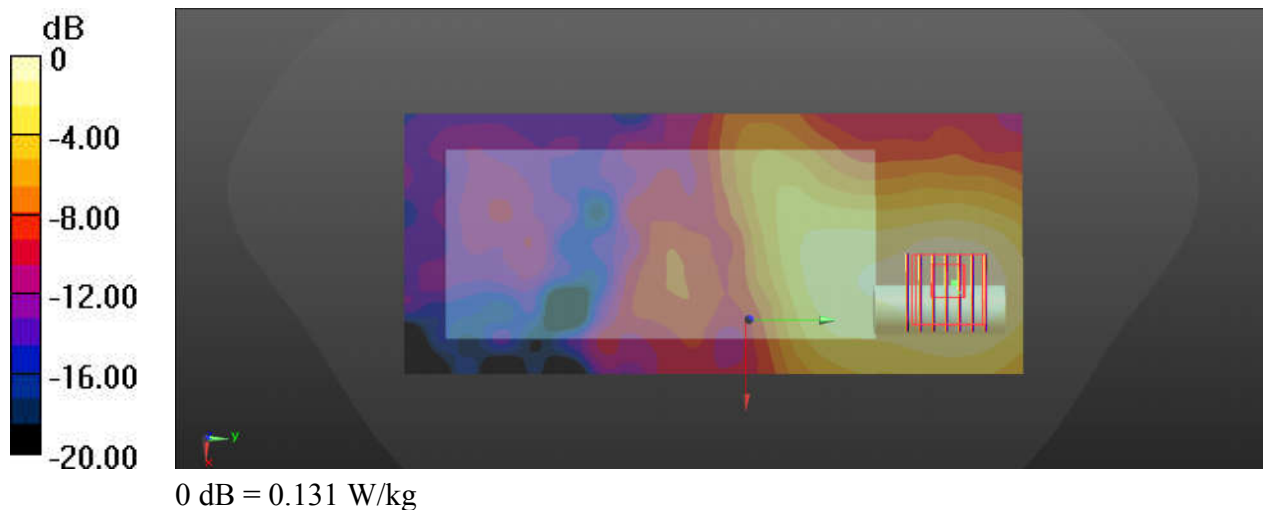

## 02\_WLAN2.4GHz\_802.11b 1Mbps\_face\_25mm\_Ch1


Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: MSL\_2450\_190417 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.947$  S/m;  $\epsilon_r = 52.455$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 2019.03.01
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.12 (7450)

**Ch1/Area Scan (81x141x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.0624 W/kg

**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.576 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.0960 W/kg  
**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.029 W/kg**  
Maximum value of SAR (measured) = 0.0627 W/kg

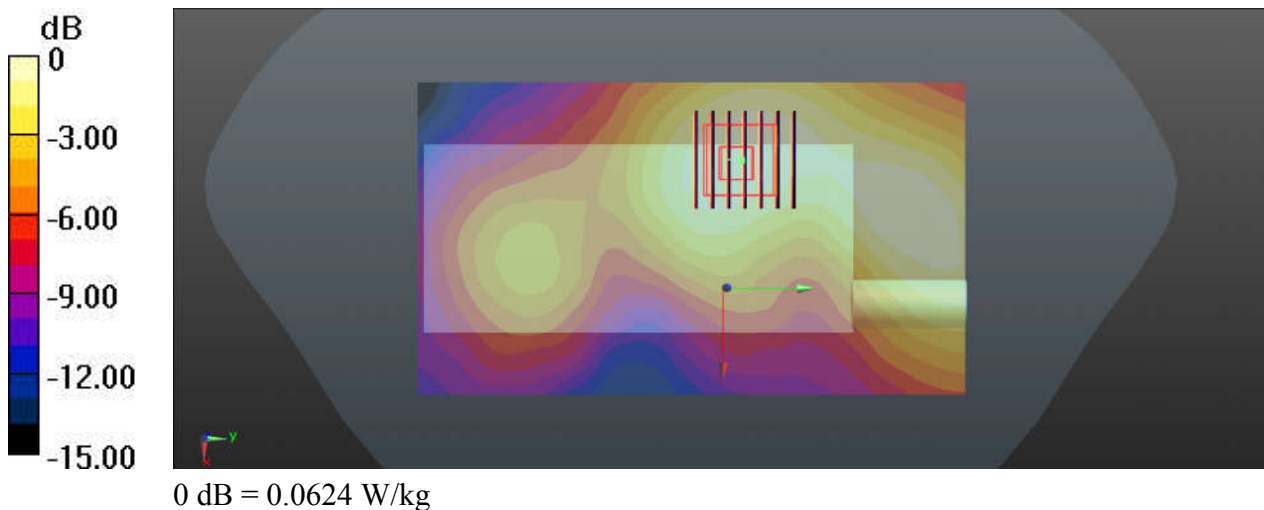

### 03\_WLAN5GHz\_802.11a 6Mbps\_face\_25mm\_Ch52

Communication System: UID 0, WIFI (0); Frequency: 5260 MHz; Duty Cycle: 1:1.053  
Medium: HSL\_5250\_190417 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.718$  S/m;  $\epsilon_r = 36.099$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.07, 5.07, 5.07); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.12 (7450)

#### Ch52/Area Scan (81x151x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.270 W/kg


#### Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.114 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.412 W/kg

**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.270 W/kg

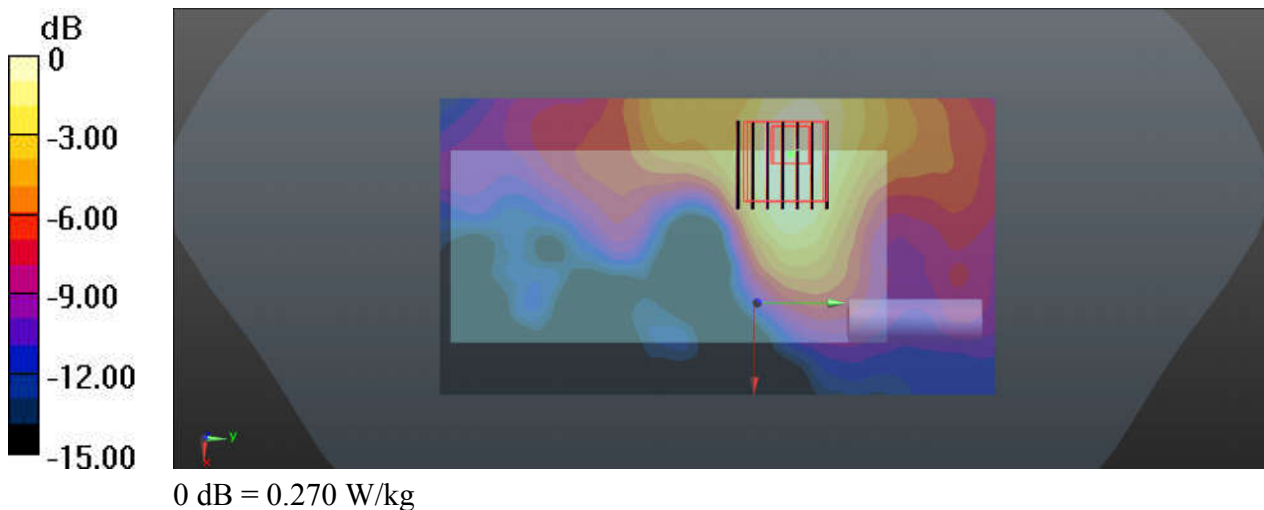

### 04\_WLAN5GHz\_802.11a 6Mbps\_face\_25mm\_Ch124


Communication System: UID 0, WIFI (0); Frequency: 5620 MHz; Duty Cycle: 1:1.053  
 Medium: HSL\_5600\_190417 Medium parameters used:  $f = 5620$  MHz;  $\sigma = 4.867$  S/m;  $\epsilon_r = 35.738$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(4.7, 4.7, 4.7); Calibrated: 2019.03.01;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch124/Area Scan (91x191x1):** Interpolated grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 0.135 W/kg

**Ch124/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 1.643 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 0.201 W/kg  
**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.020 W/kg**  
 Maximum value of SAR (measured) = 0.135 W/kg

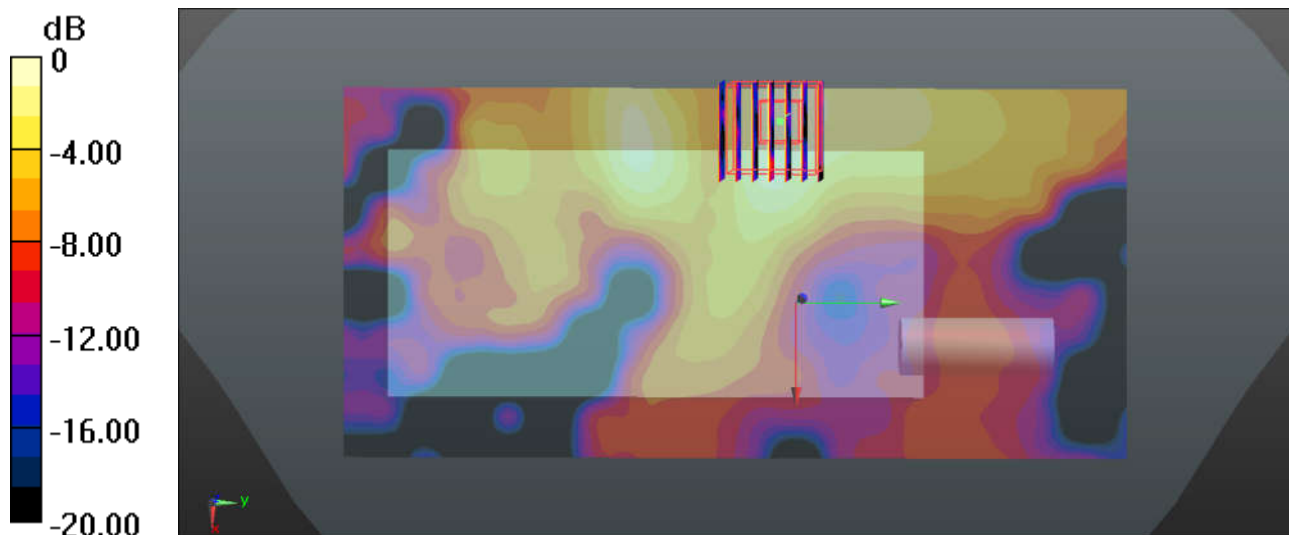

0 dB = 0.135 W/kg

### 05\_WLAN5GHz\_802.11a 6Mbps\_face\_25mm\_Ch157


Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.053  
 Medium: HSL\_5750\_190417 Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.348$  S/m;  $\epsilon_r = 35.489$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.6 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3819; ConvF(4.77, 4.77, 4.77); Calibrated: 2019.03.01;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch157/Area Scan (81x151x1):** Interpolated grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 0.164 W/kg

**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
 Reference Value = 3.747 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.252 W/kg  
**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.024 W/kg**  
 Maximum value of SAR (measured) = 0.151 W/kg

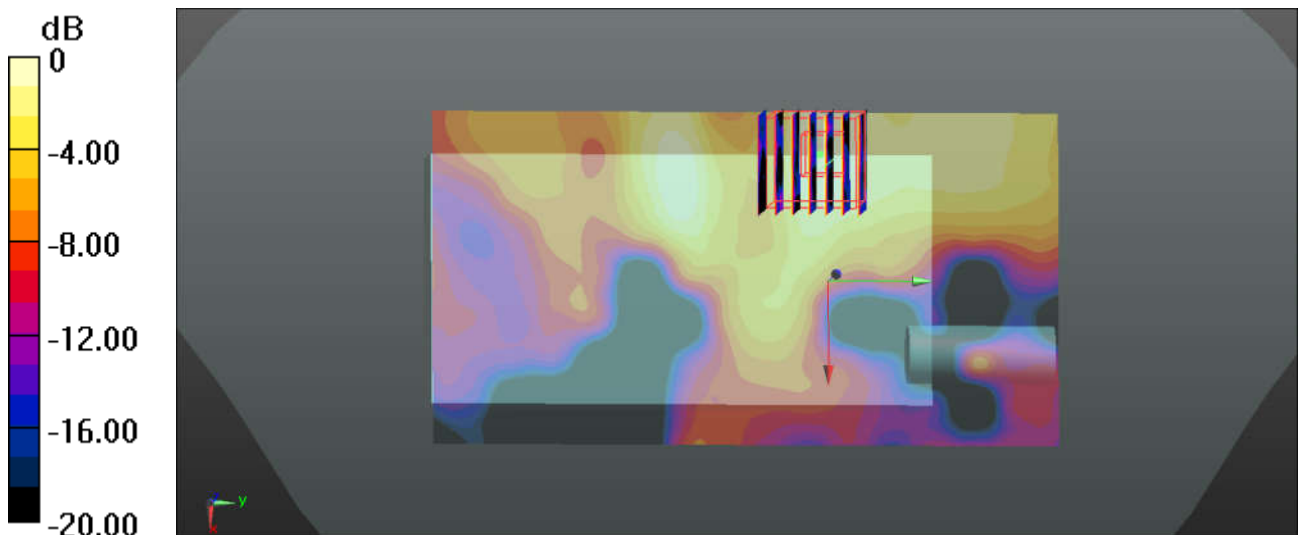

0 dB = 0.164 W/kg

## 06\_LTE Band 48\_20M\_QPSK\_50RB\_0Offset\_Right Side\_10mm\_Ch55340

Communication System: UID 0, LTE (0); Frequency: 3560 MHz; Duty Cycle: 1:1.59

Medium: MSL\_3500\_190407 Medium parameters used:  $f = 3560$  MHz;  $\sigma = 3.38$  S/m;  $\epsilon_r = 51.682$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.57, 6.57, 6.57); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch55340/Area Scan (51x181x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.649 W/kg


**Ch55340/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.698 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.902 W/kg

**SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.149 W/kg**

Maximum value of SAR (measured) = 0.638 W/kg

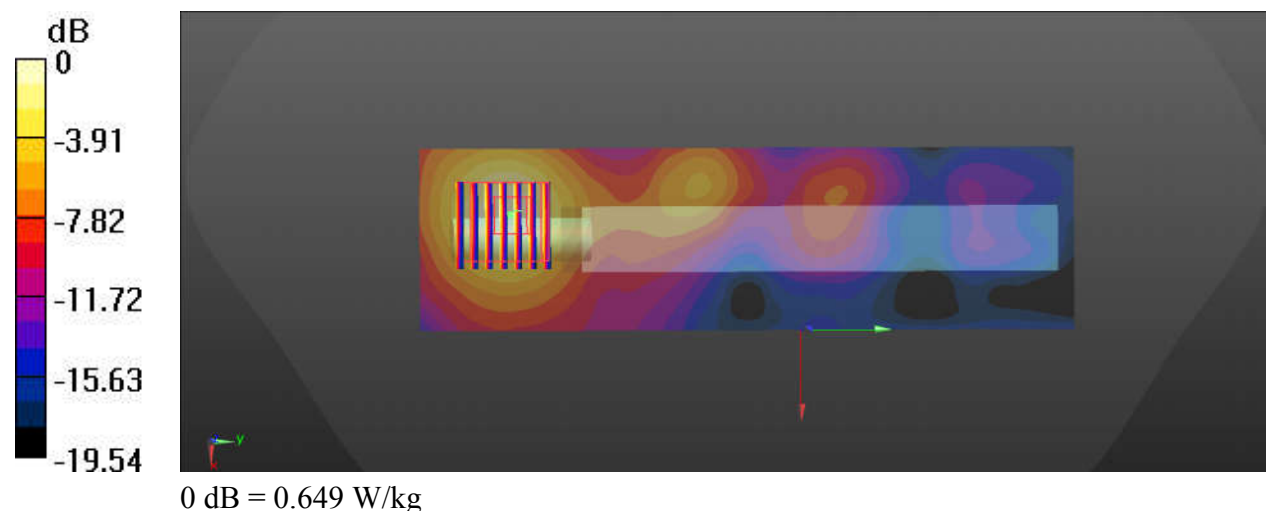

### 07\_WLAN2.4GHz\_802.11b 1Mbps\_Front\_10mm\_Ch1


Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: MSL\_2450\_190417 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.947$  S/m;  $\epsilon_r = 52.455$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.32, 7.32, 7.32); Calibrated: 2019.03.01
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch1/Area Scan (81x141x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.302 W/kg

**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.545 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 0.392 W/kg  
**SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.109 W/kg**  
Maximum value of SAR (measured) = 0.298 W/kg

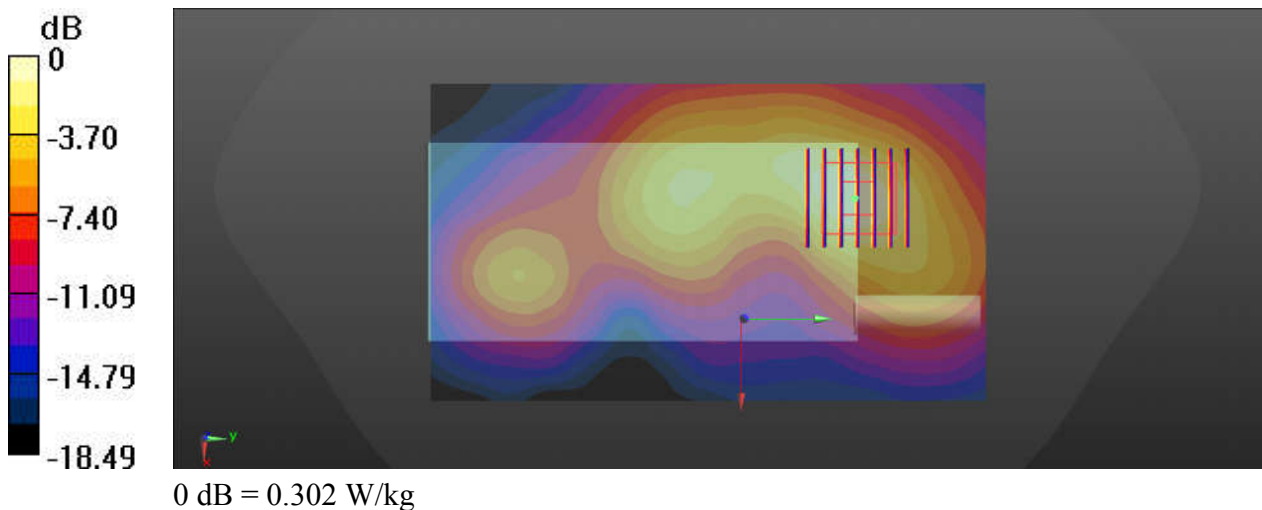

### 08\_WLAN5GHz\_802.11a 6Mbps\_Left Side\_10mm\_Ch44

Communication System: UID 0, WIFI (0); Frequency: 5220 MHz; Duty Cycle: 1:1.053  
Medium: MSL\_5250\_190417 Medium parameters used:  $f = 5220$  MHz;  $\sigma = 5.228$  S/m;  $\epsilon_r = 50.914$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.46, 4.46, 4.46); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

#### Ch44/Area Scan (41x151x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.644 W/kg


#### Ch44/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.367 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.659 W/kg

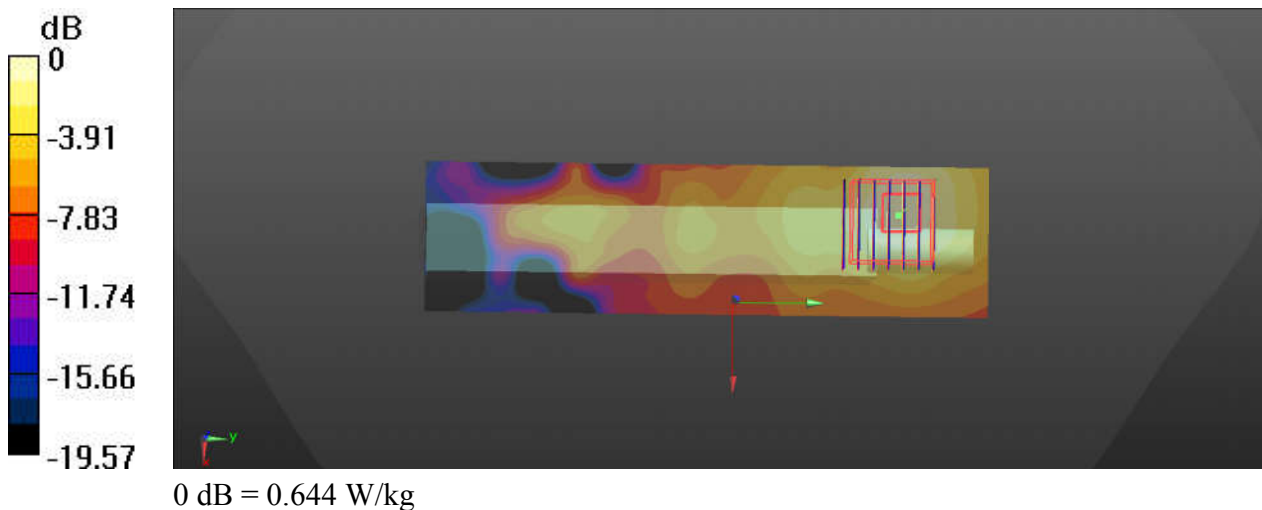



### 09\_WLAN5GHz\_802.11a 6Mbps\_Left Side\_10mm\_Ch157


Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.053  
Medium: MSL\_5750\_190417 Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.097$  S/m;  $\epsilon_r = 49.941$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.07, 4.07, 4.07); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch157/Area Scan (41x151x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.919 W/kg

**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 6.639 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 1.59 W/kg  
**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.152 W/kg**  
Maximum value of SAR (measured) = 0.914 W/kg

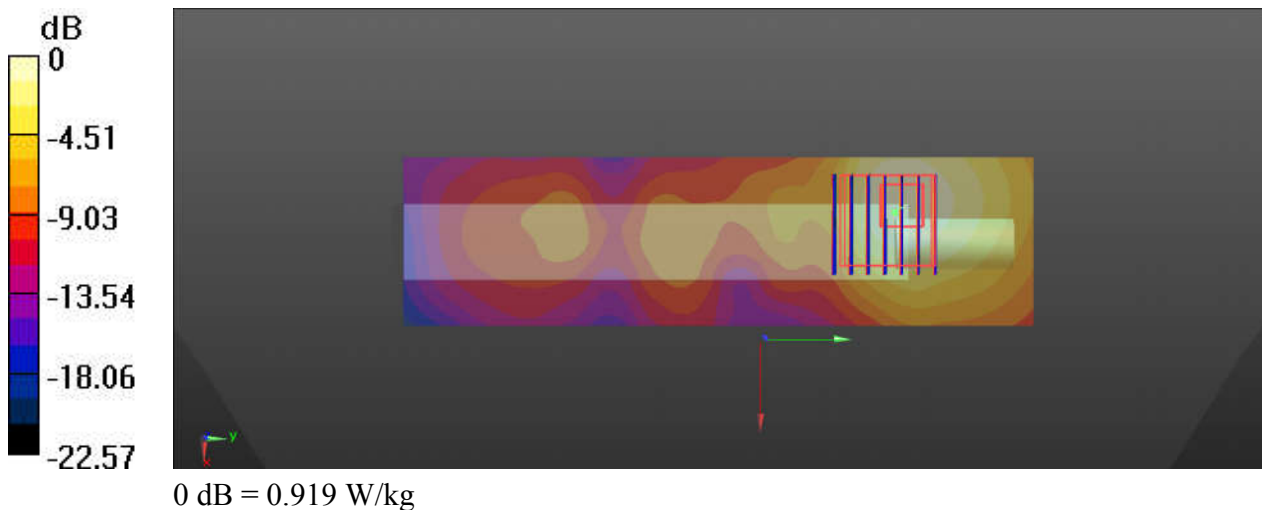

### 10\_LTE Band 48\_20M\_QPSK\_50RB\_0Offset\_Front\_0mm\_Ch55340


Communication System: UID 0, LTE (0); Frequency: 3560 MHz; Duty Cycle: 1:1.59  
Medium: MSL\_3500\_190407 Medium parameters used:  $f = 3560$  MHz;  $\sigma = 3.38$  S/m;  $\epsilon_r = 51.682$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.57, 6.57, 6.57); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch55340/Area Scan (81x191x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.480 W/kg

**Ch55340/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 1.019 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 0.615 W/kg  
**SAR(1 g) = 0.35 W/kg; SAR(10 g) = 0.095 W/kg**  
Maximum value of SAR (measured) = 0.446 W/kg

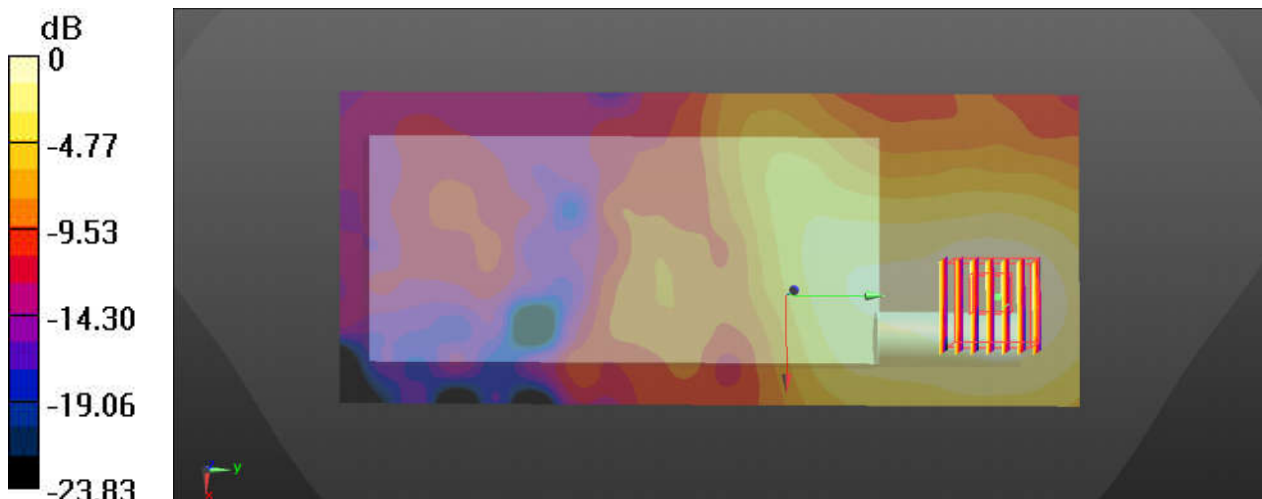

0 dB = 0.446 W/kg

### 11\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_0mm\_Ch1


Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: MSL\_2450\_190417 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.947$  S/m;  $\epsilon_r = 52.455$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.32, 7.32, 7.32); Calibrated: 2019.03.01
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch1/Area Scan (81x141x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 0.0820 W/kg

**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.420 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.106 W/kg  
**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.034 W/kg**  
Maximum value of SAR (measured) = 0.0795 W/kg

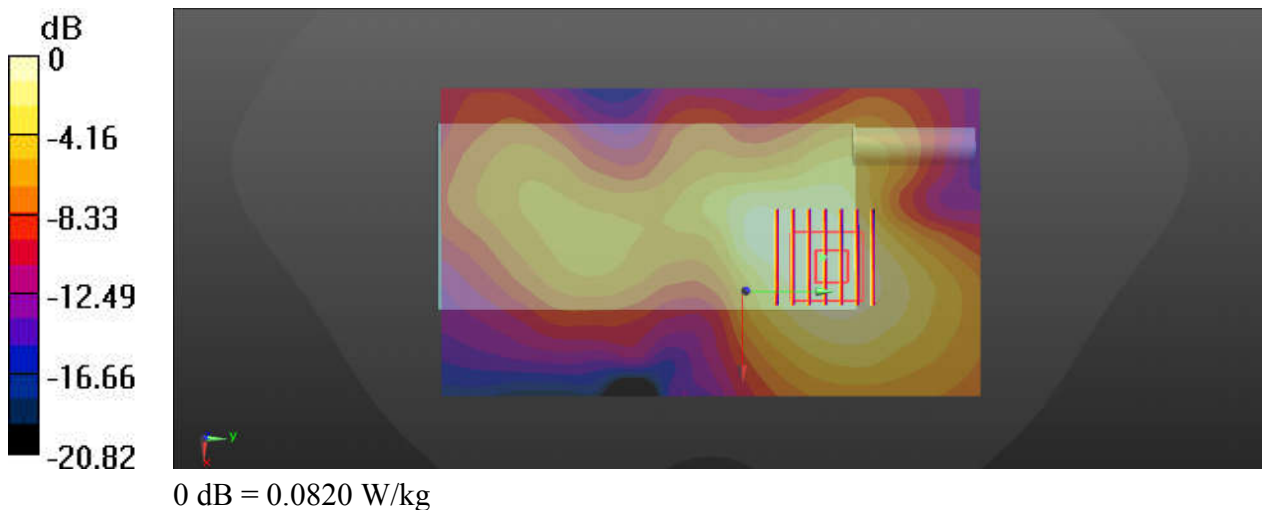

## 12\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch52

Communication System: UID 0, WIFI (0); Frequency: 5260 MHz; Duty Cycle: 1:1.053  
Medium: MSL\_5250\_190417 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 5.295$  S/m;  $\epsilon_r = 50.88$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.46, 4.46, 4.46); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

### Ch52/Area Scan (81x151x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.308 W/kg


### Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.996 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.401 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.302 W/kg

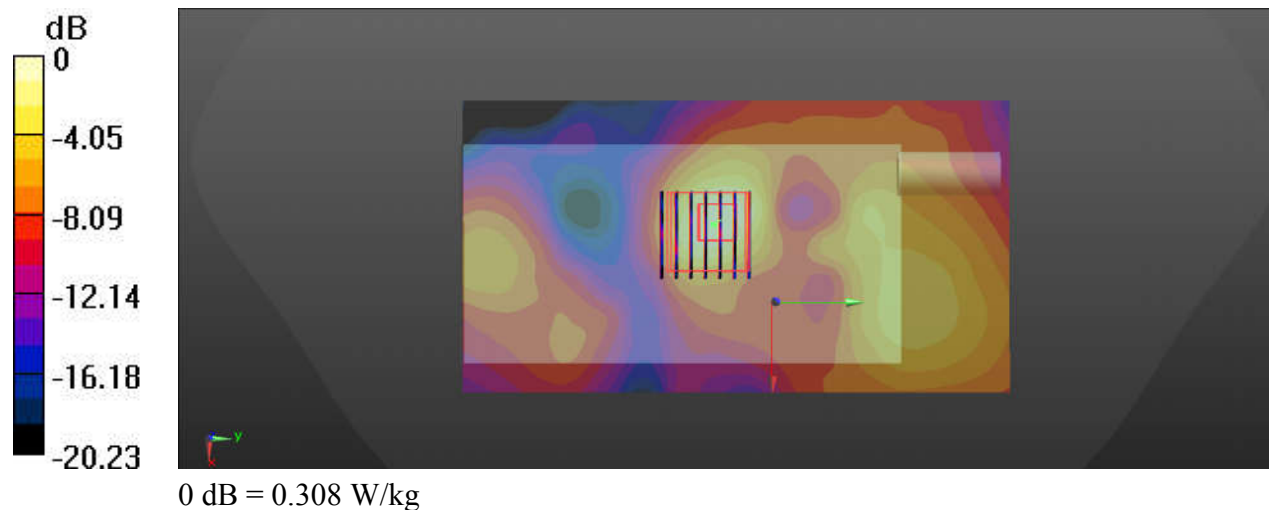

### 13\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch124


Communication System: UID 0, WIFI (0); Frequency: 5620 MHz; Duty Cycle: 1:1.053  
Medium: MSL\_5600\_190417 Medium parameters used:  $f = 5620$  MHz;  $\sigma = 5.851$  S/m;  $\epsilon_r = 50.371$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(3.92, 3.92, 3.92); Calibrated: 2019.01.31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch124/Area Scan (81x161x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.303 W/kg

**Ch124/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 2.595 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 1.05 W/kg  
**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.071 W/kg**  
Maximum value of SAR (measured) = 1.05 W/kg

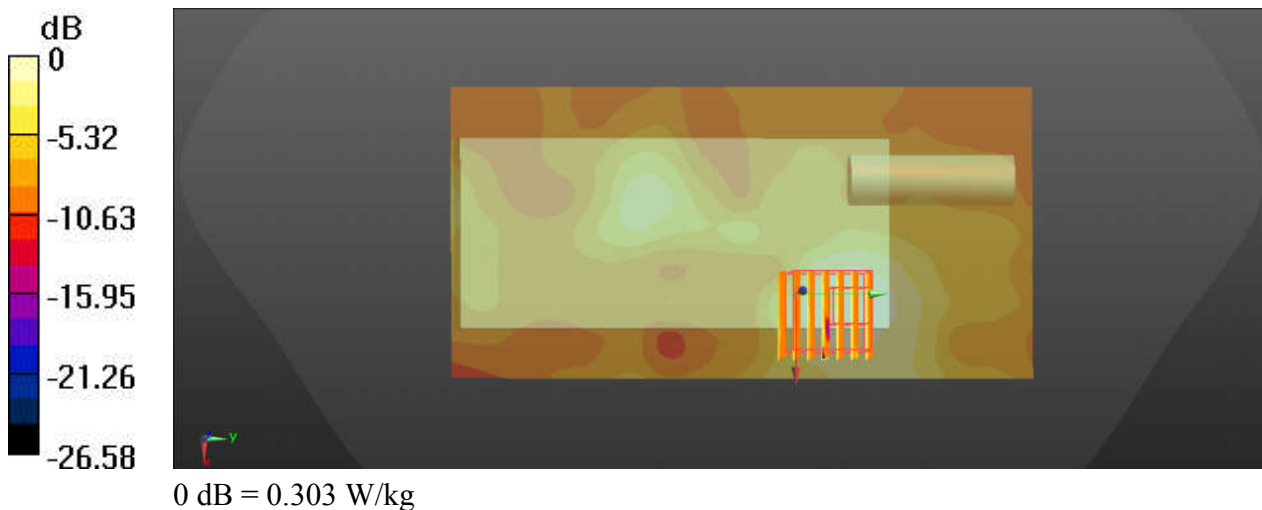

### 14\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch157


Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.053  
Medium: MSL\_5750\_190510 Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.228$  S/m;  $\epsilon_r = 46.763$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.07, 4.07, 4.07); Calibrated: 2019.03.01
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: Twin-SAM1(P1aP2a20); Type: QD 000 P40 CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch157/Area Scan (81x161x1):** Interpolated grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.337 W/kg

**Ch157/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 1.979 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.557 W/kg  
**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.057 W/kg**  
Maximum value of SAR (measured) = 0.299 W/kg

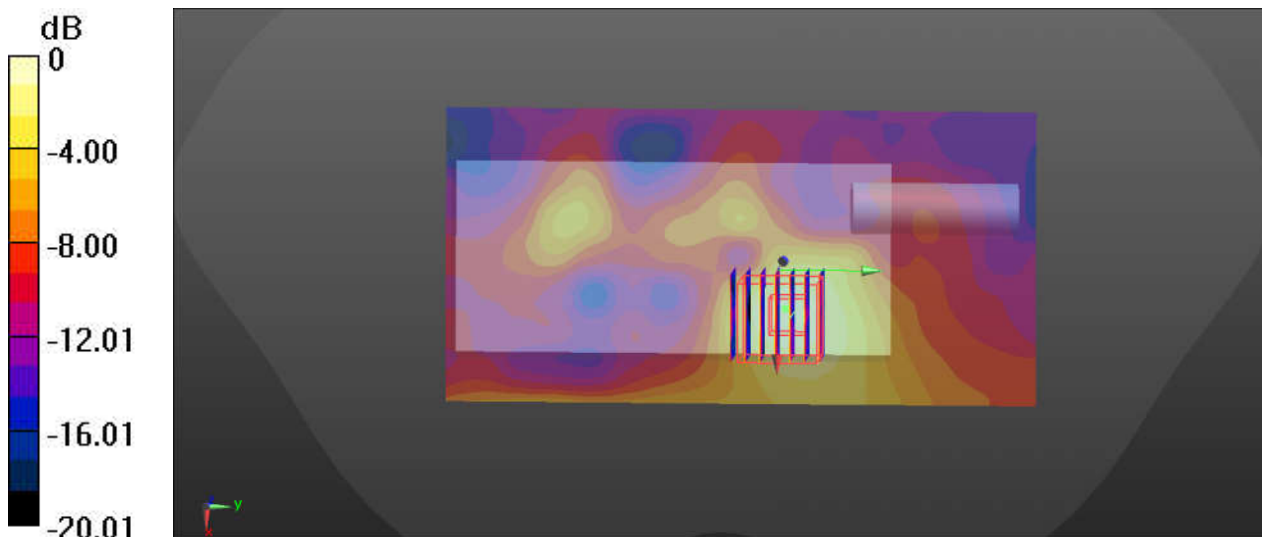

0 dB = 0.337 W/kg

## 15\_Bluetooth\_DH5 1Mbps\_Back\_0mm\_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.3  
 Medium: MSL\_2450\_190417 Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 52.459$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.32, 7.32, 7.32); Calibrated: 2019.03.01
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 2019.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Ch0/Area Scan (81x141x1):** Interpolated grid: dx=12mm, dy=12mm  
 Maximum value of SAR (interpolated) = 0.0169 W/kg

**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 0.9040 V/m; Power Drift = -0.35 dB  
 Peak SAR (extrapolated) = 0.0160 W/kg  
**SAR(1 g) = 0.00831 W/kg; SAR(10 g) = 0.00537 W/kg**  
 Maximum value of SAR (measured) = 0.0119 W/kg

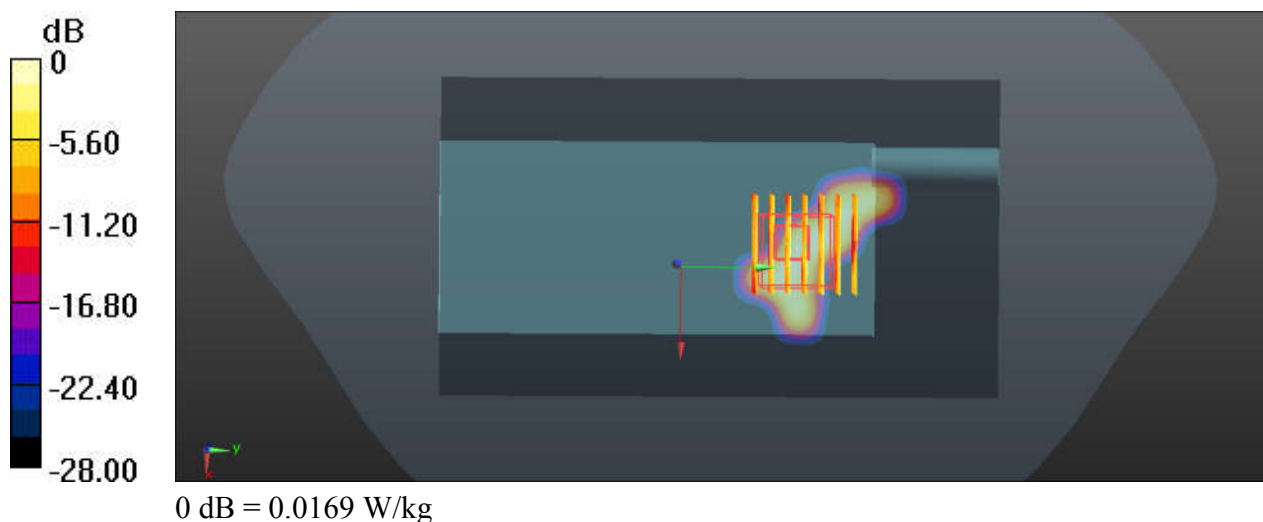



## **Appendix C. DASYS Calibration Certificate**

The DASYS calibration certificates are shown as follows.





In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinatl.com http://www.chinatl.cn

Client **Sporton**

Certificate No: **Z18-60326**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 736**

Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**

Calibration date: **August 31, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|--|-----------------------|
| Power Meter NRVD        | 102083     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Power sensor NRV-Z5     | 100542     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Reference Probe EX3DV4  | SN 7464    | 12-Sep-17(SPEAG,No.EX3-7464_Sep17)       | Sep-18                |
| DAE4                    | SN 1524    | 13-Sep-17(SPEAG,No.DAE4-1524_Sep17)      | Sep-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560)           | Jan-19                |
| NetworkAnalyzer E5071C  | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561)           | Jan-19                |

|                | Name        | Function           |
|----------------|-------------|--------------------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |
| Approved by:   | Qi Dianyuan | SAR Project Leader |

Signature

Issued: September 3, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

#### Glossary:

|       |  |
|-------|--|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### Additional Documentation:

- DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                          |              |
|-------------------------------------|--------------------------|--------------|
| <b>DASY Version</b>                 | DASY52                   | 52.10.1.1476 |
| <b>Extrapolation</b>                | Advanced Extrapolation   |              |
| <b>Phantom</b>                      | Triple Flat Phantom 5.1C |              |
| <b>Distance Dipole Center - TSL</b> | 10 mm                    | with Spacer  |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm        |              |
| <b>Frequency</b>                    | 2450 MHz ± 1 MHz         |              |

### Head TSL parameters

The following parameters and calculations were applied.

|  | Temperature     | Permittivity | Conductivity     |
|--|-----------------|--------------|------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C         | 39.2         | 1.80 mho/m       |
| <b>Measured Head TSL parameters</b>            | (22.0 ± 0.2) °C | 38.8 ± 6 %   | 1.80 mho/m ± 6 % |
| <b>Head TSL temperature change during test</b> | <1.0 °C         | ---          | ---              |

### SAR result with Head TSL

|   |                    |                                   |
|---|--------------------|-----------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>   | Condition          |                                   |
| SAR measured  | 250 mW input power | 13.2 mW / g                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>52.7 mW / g ± 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                   |
| SAR measured  | 250 mW input power | 6.17 mW / g                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>24.6 mW / g ± 18.7 % (k=2)</b> |

### Body TSL parameters

The following parameters and calculations were applied.

|  | Temperature     | Permittivity | Conductivity     |
|--|-----------------|--------------|------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C         | 52.7         | 1.95 mho/m       |
| <b>Measured Body TSL parameters</b>            | (22.0 ± 0.2) °C | 52.3 ± 6 %   | 1.98 mho/m ± 6 % |
| <b>Body TSL temperature change during test</b> | <1.0 °C         | ---          | ---              |

### SAR result with Body TSL

|   |                    |                                   |
|---|--------------------|-----------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>   | Condition          |                                   |
| SAR measured  | 250 mW input power | 13.0 mW / g                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>51.5 mW / g ± 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | Condition          |                                   |
| SAR measured  | 250 mW input power | 6.14 mW / g                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>24.4 mW / g ± 18.7 % (k=2)</b> |



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 53.9Ω+ 2.56jΩ |
| Return Loss                          | - 26.9dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 50.0Ω+ 4.22jΩ |
| Return Loss                          | - 27.5dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.022 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Head TSL**

Date: 08.31.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 736**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.802$  S/m;  $\epsilon_r = 38.84$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.89, 7.89, 7.89) @ 2450 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1524; Calibrated: 9/13/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm**

Reference Value = 100.2 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.6 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.17 W/kg**

Maximum value of SAR (measured) = 22.2 W/kg

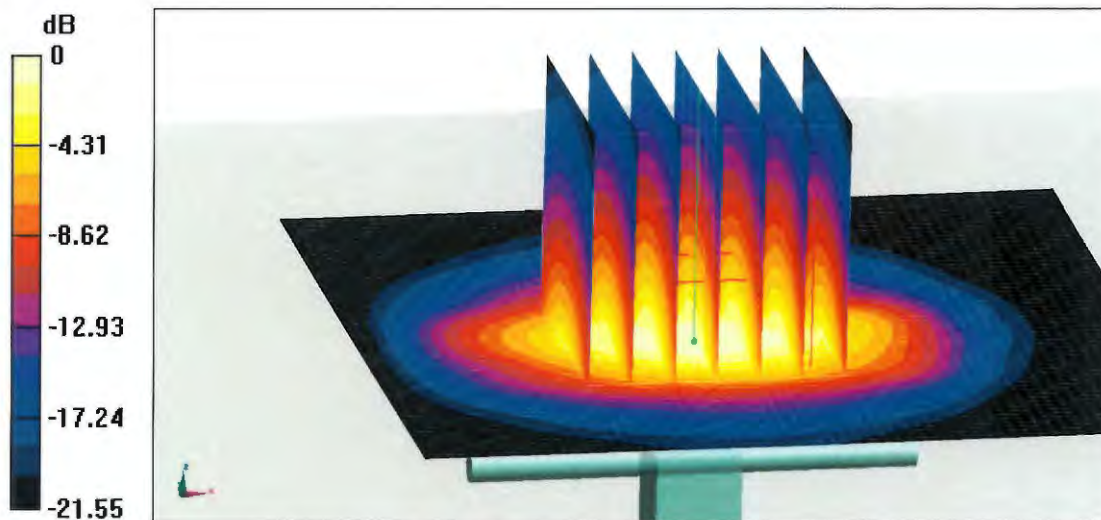

0 dB = 22.2 W/kg = 13.46 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Impedance Measurement Plot for Head TSL





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

**DASY5 Validation Report for Body TSL**

Date: 08.30.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 736**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.982$  S/m;  $\epsilon_r = 52.34$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.09, 8.09, 8.09) @ 2450 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1524; Calibrated: 9/13/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm**

Reference Value = 98.71 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.0 W/kg

**SAR(1 g) = 13 W/kg; SAR(10 g) = 6.14 W/kg**

Maximum value of SAR (measured) = 21.3 W/kg

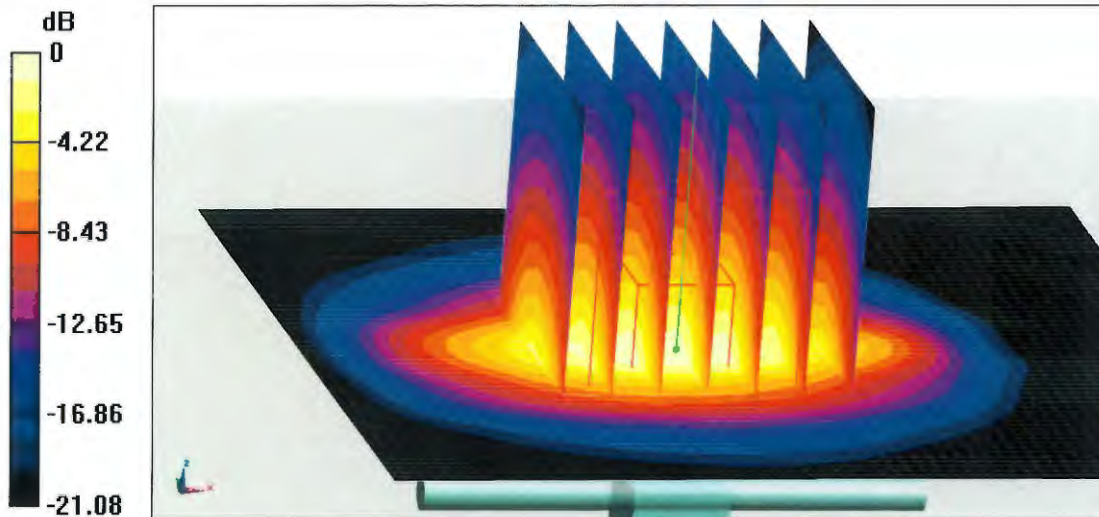

**0 dB = 21.3 W/kg = 13.28 dBW/kg**



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Impedance Measurement Plot for Body TSL

