

<p><b>MOTOROLA PENANG ADV. COMM. LABORATORY</b> Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.</p>	<p><b>FCC / ISED TEST REPORT</b> Report Revision : Rev.A</p>
<p><b>Date/s Tested</b> : 02-May-2024 - 23-July-2024 <b>Report Issue Date</b> : 05-August-2024 <b>Manufacturer/Location</b> : Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia <b>Requestor</b> : CADOGAN SEAN <b>Product Type</b> : Hand-held <b>Product Marketing Name (PMN)</b> : APX N70 <b>Hardware Version Identification Number (HVIN)</b> : H35KET9PW8AN &amp; H35KET9PW8AN-H <b>Frequency Band</b> : 2.402 - 2.480 GHz <b>Max RF Output Power</b> : 5.62 mWatts <b>Applicant Name</b> : Motorola Solutions Inc <b>Applicant Address</b> : Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia <b>FCC Registrations</b> : 461337 <b>ISED Registrations</b> : MY0001 <b>Firmware Version Identification Number (FVIN)</b> : D03.75.58 <b>The equipment was tested accordance to the requirement listed below:</b></p> <p><b>(2.4GHz BT LE )</b> <span style="float: right;"><b>PASS</b></span> <b>47 CFR Part 15C</b> <b>ISED RSS 247 Issue 2</b> <b>February 2017</b></p>	
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>	
<p>Prepared By:  _____ <b>NUR ALIEYA BINTI MAT YUSOFF</b> <b>Test Personnel</b></p>	<p>Approved Signatory: _____ <b>MAHESHVARAN A/L RAJAGOPAL</b> <b>Responsible Engineer</b></p>

## Table of Contents

1.0 General Information .....	3
2.0 Summary of Test Results.....	4
3.0. Measurement Uncertainty .....	4
4.0 Equipment List .....	5
5.0 Test Mode Applicability and Test Channel Detail .....	6
6.0 Transmitter Test Parameters .....	7
6.1 6dB Channel Bandwidth.....	7
6.1.1 Test Setup.....	7
6.1.2 Test Limits: .....	7
6.1.3 Test Data: .....	7
6.2 Conducted RF Output Power.....	10
6.2.1 Test Setup.....	11
6.2.2 Test Limits: .....	11
6.2.3 Test Data: .....	12
6.3 Maximum Peak Power Spectral Density .....	14
6.3.1 Test Setup.....	14
6.3.2 Test Limits: .....	14
6.3.3 Test Result .....	15
6.4 Conducted Spurious Emission.....	16
6.4.1 Test Setup.....	17
6.4.2 Test Limits: .....	17
6.4.3 Test Result .....	17
6.5 Band edge Conducted Spurious Emission.....	20
6.5.1 Test Setup.....	30
6.5.2 Test Limits: .....	30
6.5.3 Test Result .....	31
6.6 Radiated Emission within Restricted Bands.....	33
6.6.1 Test Setup.....	33
6.6.2 Test Limits: .....	34
6.6.3 Test Results:.....	35
6.7 AC Powerline Conducted Emission .....	65
6.7.1 Test Setup.....	65
6.7.2 Test Limits: .....	65
6.7.3 Test Result .....	67

### REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	05-August-2024	Alieya

## 1.0 General Information

### EUT Description:

<b>Technologies</b>	2.4GHz BT LE
<b>TX Frequency range</b>	2402MHz – 2480MHz
<b>Modulation Type</b>	GFSK
<b>Connector type</b>	PROGRAMMING, TEST & ALIGNMENT CABLE
<b>Antenna type</b>	Stamped Metal

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
UL 3650mAH (using RN 2170 Li-Ion cell)	MOTOROLA	PMNN4818A
VHF ¼ wave antenna 136-174MHz	MOTOROLA	AN000414A01
CHARGER, CHGR DEKSTOP SINGLE UNIT IMPRES 2 EXT PS BASE ONLY	MOTOROLA	PMPN4590A
CHARGER DEKSTOP MULTI UNIT IMPRES 2 6 DISPLAY INT PS US	MOTOROLA	PMPN4591A

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

**FCC 47 CFR Part 15 Subpart C**  
**KDB 558074 D01 15.247 Meas Guidance v05**  
**ANSI C63.10-2013**

### Deviation from standard

Not applicable as no deviation from standard test method

### Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

## 2.0 Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (a)(2)	RSS 247 5.2 (a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: BT 4.0 - 1.06 MHz (1M06F1D) BT 5.0 – 2.07 MHz (2M07F1D)	022TAD0722	Alieya
15.247 (b)(3)	RSS 247 5.4 (d)	Conducted RF Output Power (Peak)	Pass	Highest output power: BT 4.0 – 6.752 dBm (4.73 mW) BT 4.0 – 6.964 dBm (4.97 mW)	022TAD0722	Alieya
15.247(e)	RSS 247 5.2 (b)	Maximum Peak Power Spectral Density	Pass	Meet the limit requirement.	022TAD0722	Alieya
15.247 (d)	RSS-247 5.5	Band-Edge Conducted Spurious Emission	Pass	Worst case emission: -51.62 dBm	022TAD0722	Alieya
15.247 (b)	RSS-247 5.5	Conducted Spurious Emission	Pass	Worst case emission: -39.32 dBm	022TAD0722	Alieya
15.205, 15.209, 15.247 (d)	RSS247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: RBE: 40.9894dBuV/m (margin: 13.0106dB) RSE: 52.0700dBuV/m (margin: 1.9300dB), Noise floor	022TAF1508	Nazrin & Rezza
15.207	RSS-Gen 8.8	AC Power Line Conducted Spurious Emission	NA	Meet the limit requirement.	022TAF1508	Alif
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA	NA

## 3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 40GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

#### 4.0 Equipment List

##### Bluetooth ATE # 1 (SW Version: Ate Main\_3.1.12\_R1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92005573	1-April-24	1-April-25
POWER SUPPLY	6652A	3541A02371	18-Jul-23	18-Jul-24
PULSE SENSOR	MA2411B	1726287	22-Aug-23	22-Aug-24
PULSE POWER METER	ML2495A	1845014	16-Aug-23	16-Aug-24
SPECTRUM ANALYZER	E4440A	MY46185415	5-Jan-24	5-Jan-25

##### Radiated Emission Station (SW Version: EMC FCC RE v1.6.5)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	1143	8-Mar-23	8-Mar-25
DRG HORN FREQ.	SAS-571	720	18-Apr-23	18-Apr-25
DC Power Supply	NR973A	MY54180189	30-Aug-23	30-Aug-24
SIGNAL GENERATOR	SMB 100A	182511	04-Sep-21	04-Sep-24
EMI TEST RECEIVER	ESW44	101731	11-Aug-23	11-Aug-24
BILOG ANTENNA	CBL6112B	2950	14-Dec-23	14-Dec-24
BILOG ANTENNA	CBL6112B	2964	25-Sep-23	25-Sep-24
DATA LOGGER THERMOHYGROMETER	SDL500	A.016800	26-Jun-24	26-Jun-25
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	28-Aug-23	28-Aug-24
PREAMPLIFIER	PAM-0118P	574	19-Mar-24	19-Mar-25
LOOP ANTENNA	6502	00208416	26-Oct-23	26-Oct-24
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not required	Not required
SYSTEM CONTROLLER	SC104V	050806-1	Not required	Not required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not required	Not required
ANTENNA POSITIONING TOWER	TLT2	NA	Not required	Not required
PREAMPLIFIER 18-40GHz	Miteq Hi Gain Sucoflex	002	Not required	Not required

##### AC Powerline Station (SW Version: EMC32 Ver.10.60.10)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DATA LOGGER	DSB	16344143	21-Jun-23	21-Jun-24
V-NETWORK 2-LINE	ENV216V	101039	13-Dec-23	13-Dec-24
EMI TEST RECEIVER	ESIB26	100017	4-Dec-23	4-Dec-24
PROGRAMMABLE AC SOURCE	61604	ABR000000926	25-Jul-23	25-Jul-24

## 5.0 Test Mode Applicability and Test Channel Detail

### Radiated Emission Test (Above 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	23.3°C, 68.7% RH

### Radiated Emission Test (Below 1GHz)

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	23.3°C, 68.7% RH

### Power Line Conducted Emission Test

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	NA

### Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	25°C, 54.8%RH

## 6.0 Transmitter Test Parameters

### 6.1 6dB Channel Bandwidth

#### 6.1.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max hold
  - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.


#### 6.1.2 Test Limits:

<b>Normal Condition (25 ° C)</b>
<b>≥500 kHz</b>


#### 6.1.3 Test Data:

##### BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	0.67	1.05	Pass
Bluetooth L.E	GFSK	2440	0.68	1.06	Pass
Bluetooth L.E	GFSK	2480	0.68	1.06	Pass

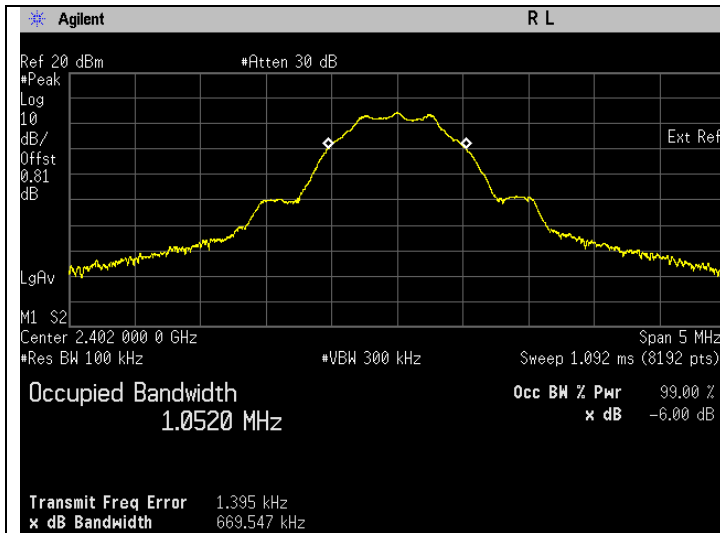


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

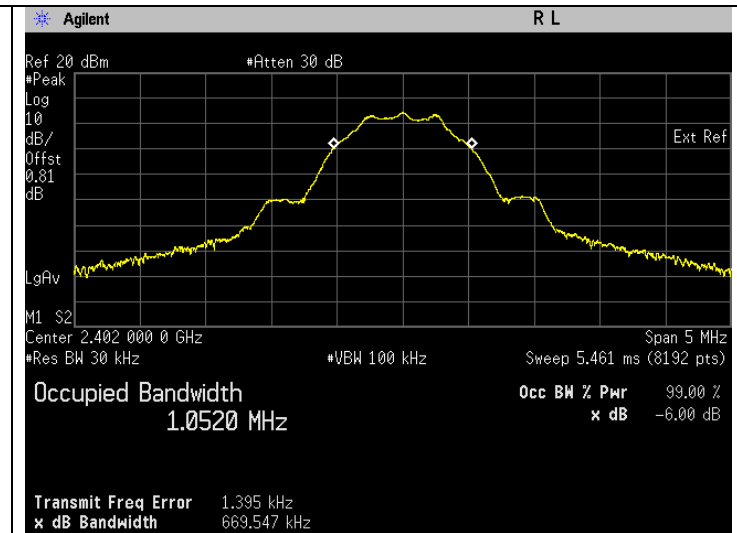


99% Bandwidth. Bluetooth LE Frequency 2402 MHz

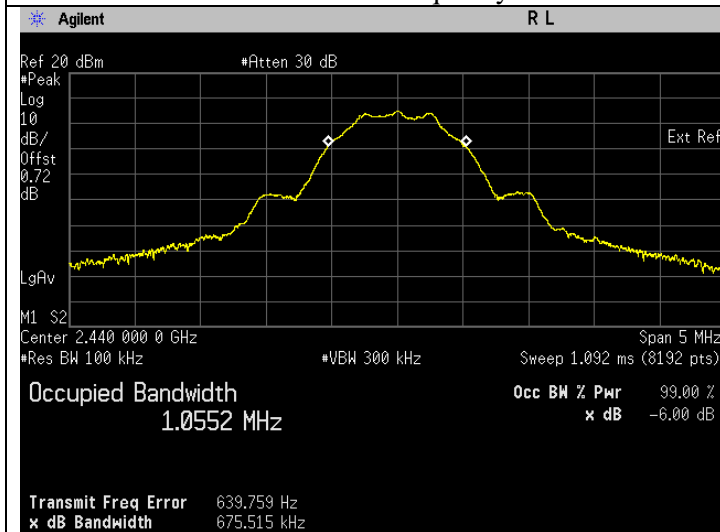


6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

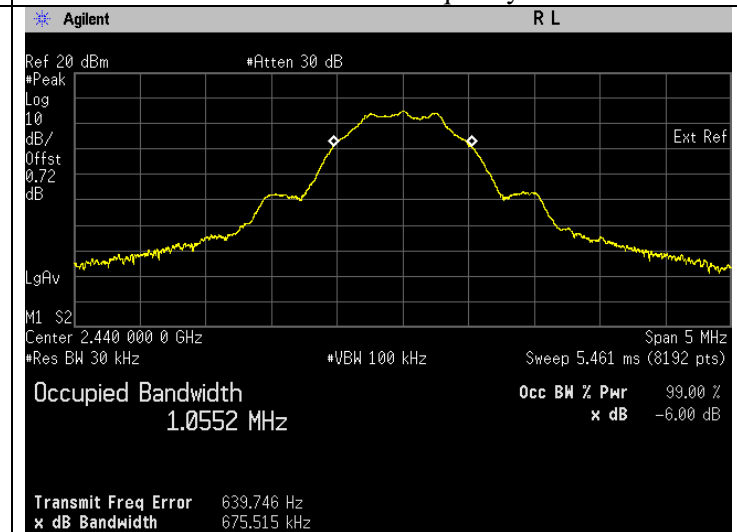

99% Bandwidth. Bluetooth LE Frequency 2440 MHz

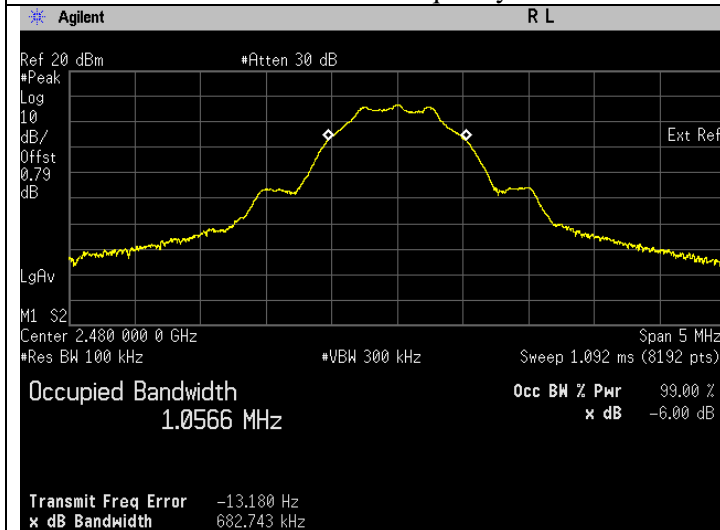

6dB Bandwidth. Bluetooth LE Frequency 2480 MHz

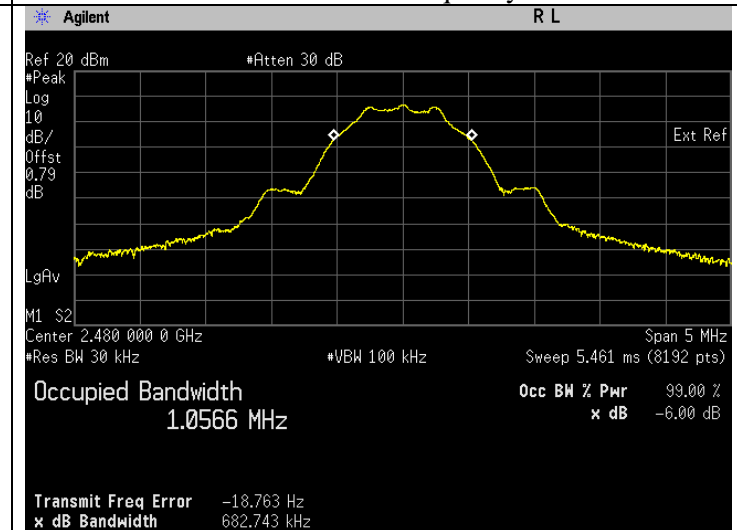


99% Bandwidth. Bluetooth LE Frequency 2480 MHz




**BTLE 2M**

Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2404	1.13	2.07	Pass
Bluetooth L.E	GFSK	2440	1.15	2.06	Pass
Bluetooth L.E	GFSK	2478	1.12	2.07	Pass

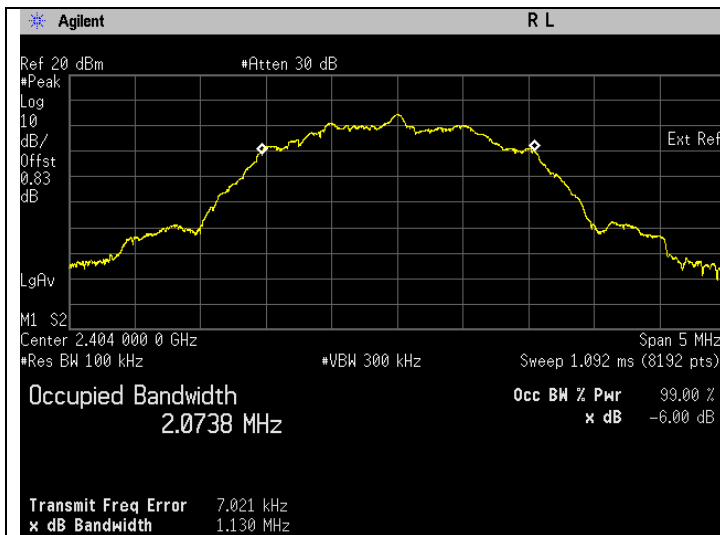


6dB Bandwidth. Bluetooth LE Frequency 2404 MHz

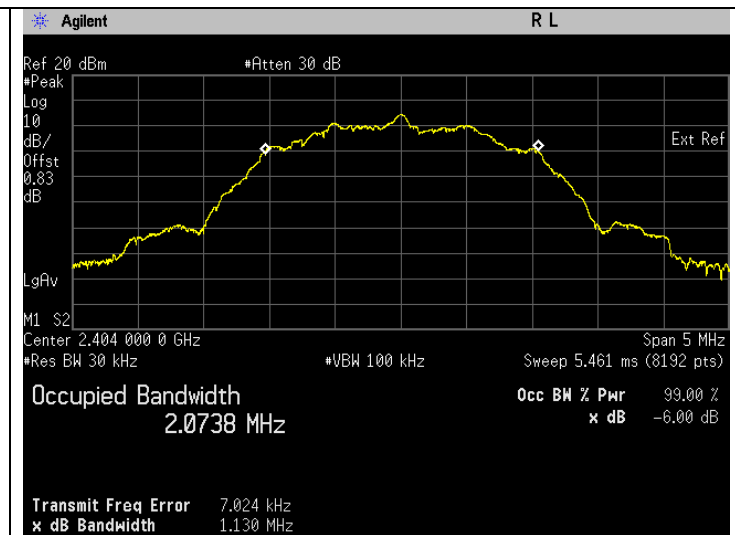



99% Bandwidth. Bluetooth LE Frequency 2404 MHz



6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

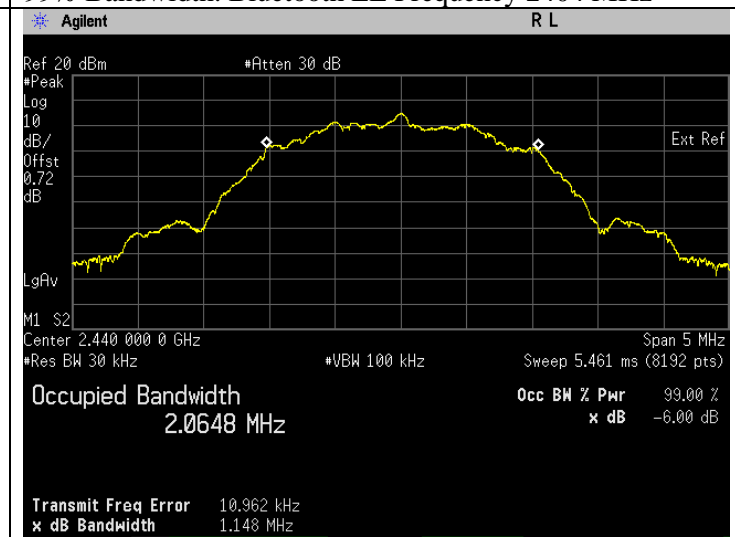


99% Bandwidth. Bluetooth LE Frequency 2440 MHz

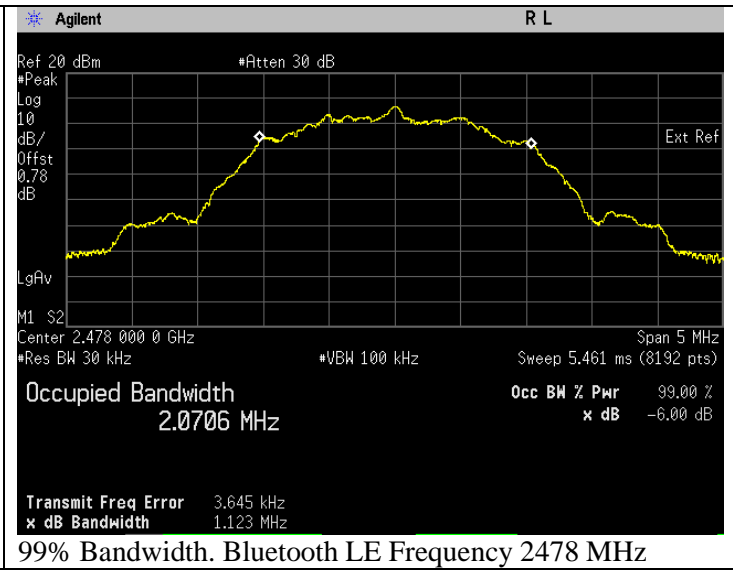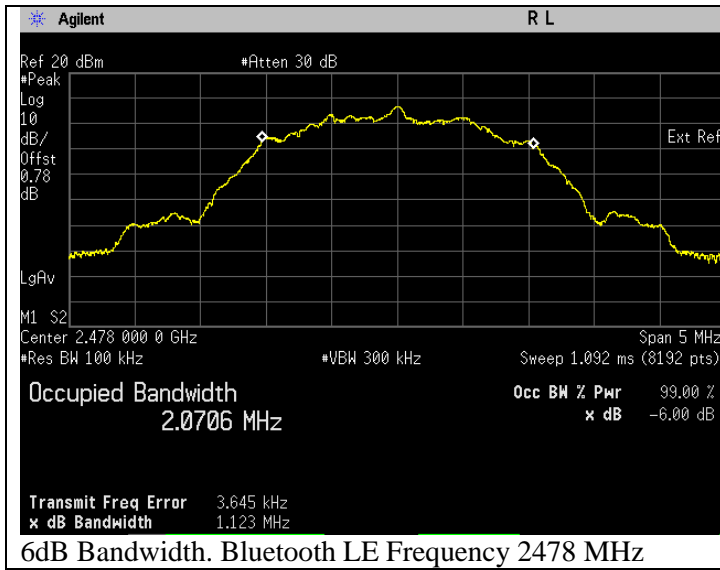

## 6.2 Conducted RF Output Power

### 6.2.1 Test Setup



#### Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
  - a. Set the RBW = 3 MHz.
  - b. Set the VBW = 50 MHz.
  - c. Set the span  $\geq [1.5 \times \text{OBW bandwidth}]$ .
  - d. Detector = Peak
  - e. Sweep time = auto couple.
  - f. Trace mode = max hold.
  - g. Allow trace to fully stabilize.

### 6.2.2 Test Limits:




<b>Normal Condition (25 ° C)</b>
<b><math>\leq 1</math> Watt(30 dBm)</b>

### 6.2.3 Test Data:

Test was conducted with peak power.


#### BTLE 1M

Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	4.451	Pass
Bluetooth L.E	GFSK	2440	5.150	Pass
Bluetooth L.E	GFSK	2480	6.752	Pass

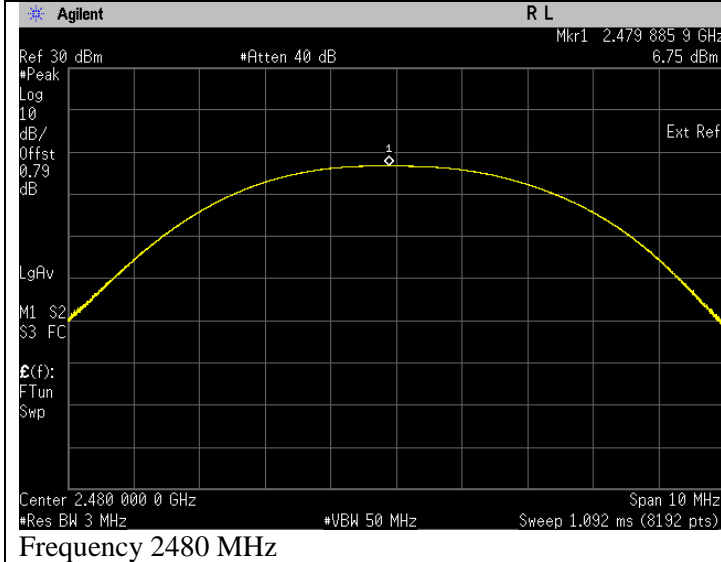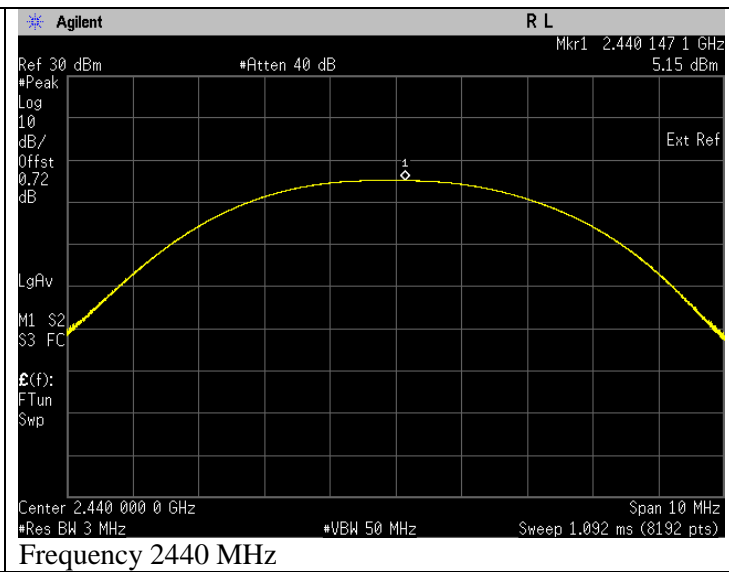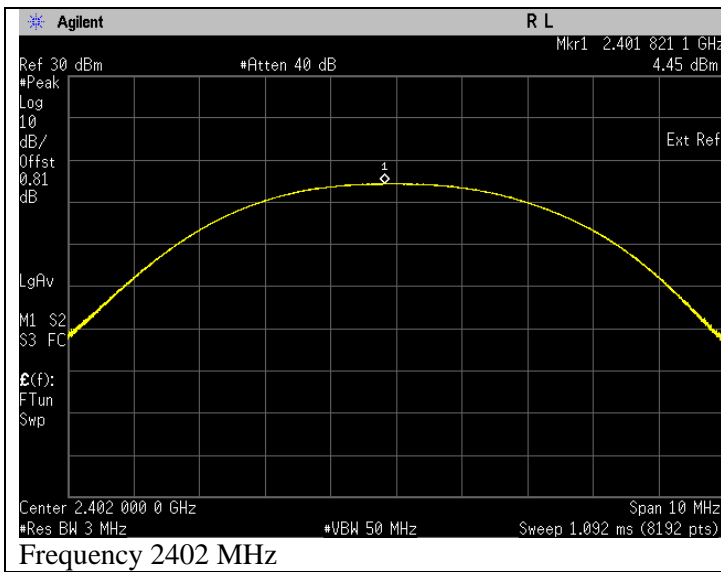


**BTLE 2M**


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2404	4.671	Pass
Bluetooth L.E	GFSK	2440	5.338	Pass
Bluetooth L.E	GFSK	2478	6.964	Pass

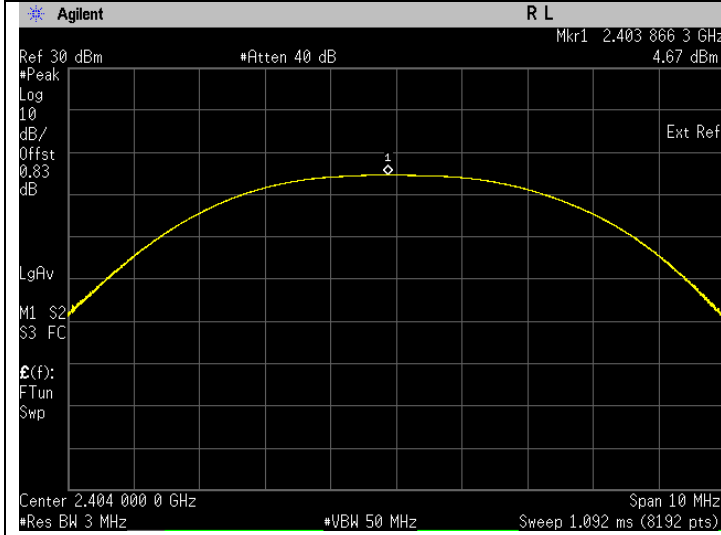

Frequency 2404 MHz

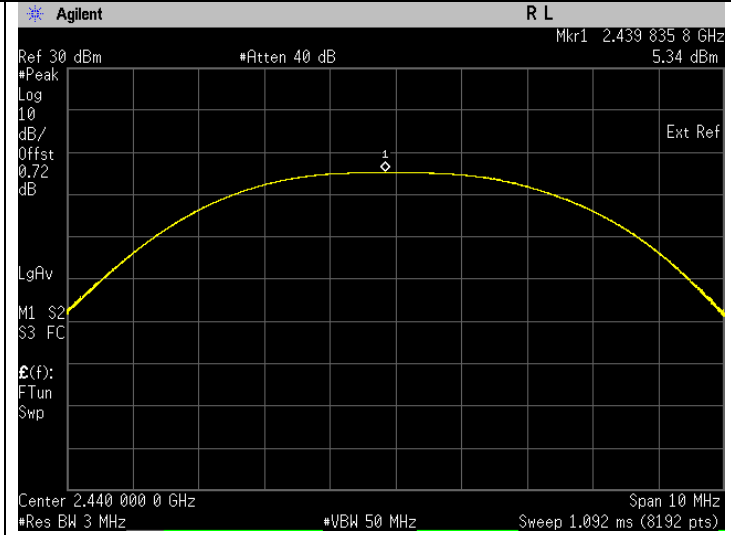


Frequency 2440 MHz

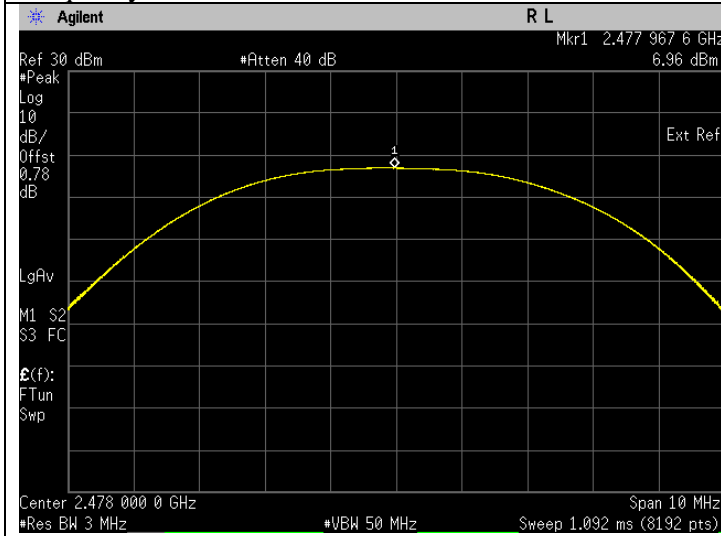

Frequency 2478 MHz

### 6.3 Maximum Peak Power Spectral Density

#### 6.3.1 Test Setup



##### Maximum Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. Set analyzer center frequency to DTS channel center frequency.
  - b. Set the span to 1.5 times the DTS bandwidth.
  - c. Set the RBW to 3 kHz.
  - d. Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e. Detector = peak.
  - f. Sweep time = auto couple.
  - g. Trace mode = max hold.
  - h. Allow trace to fully stabilize.
  - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


#### 6.3.2 Test Limits:

<b>Normal Condition (25 ° C)</b>
<b><math>\leq 8 \text{ dBm/3kHz}</math></b>


### 6.3.3 Test Result

#### BTLE 1M


Test Conditions		Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Power (dBm/3kHz)	Status
Bluetooth L.E.	GFSK	2402	-10.48	Pass
Bluetooth L.E.	GFSK	2440	-9.80	Pass
Bluetooth L.E.	GFSK	2480	-8.01	Pass

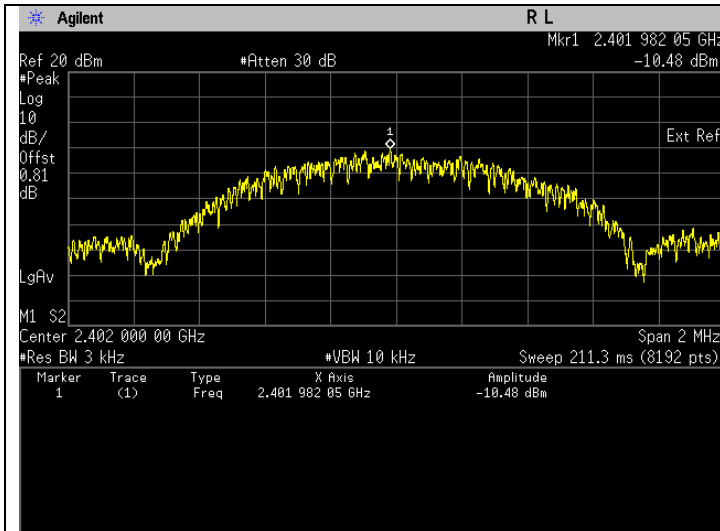

Maximum Power Spectral Density. Bluetooth LE  
 Frequency 2402 MHz

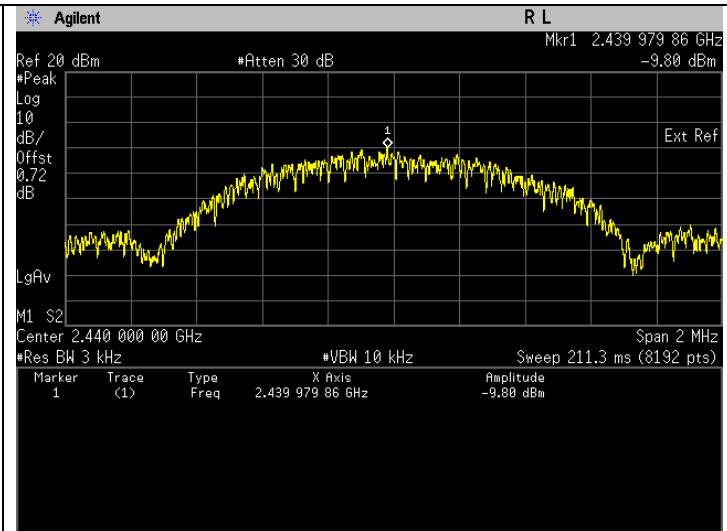


Maximum Power Spectral Density. Bluetooth LE  
 Frequency 2440 MHz

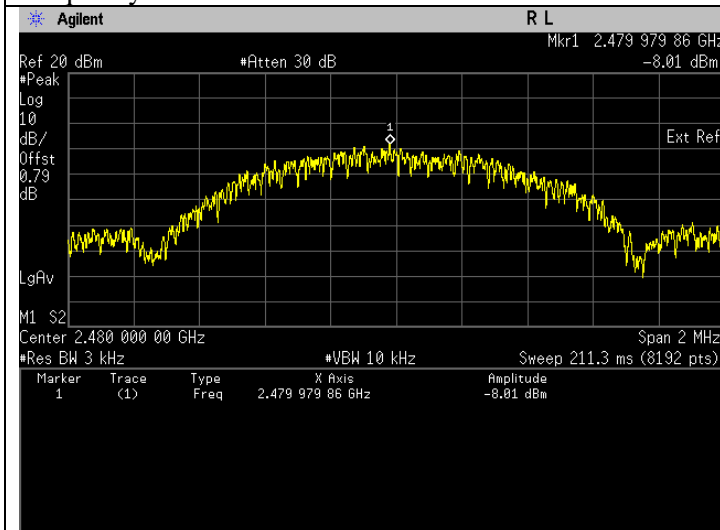


Maximum Power Spectral Density. Bluetooth LE  
 Frequency 2480 MHz

**BTLE 2M**


Test Conditions		Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Power (dBm/3kHz)	Status
Bluetooth L.E.	GFSK	2404	-13.92	Pass
Bluetooth L.E.	GFSK	2440	-13.42	Pass
Bluetooth L.E.	GFSK	2478	-11.59	Pass

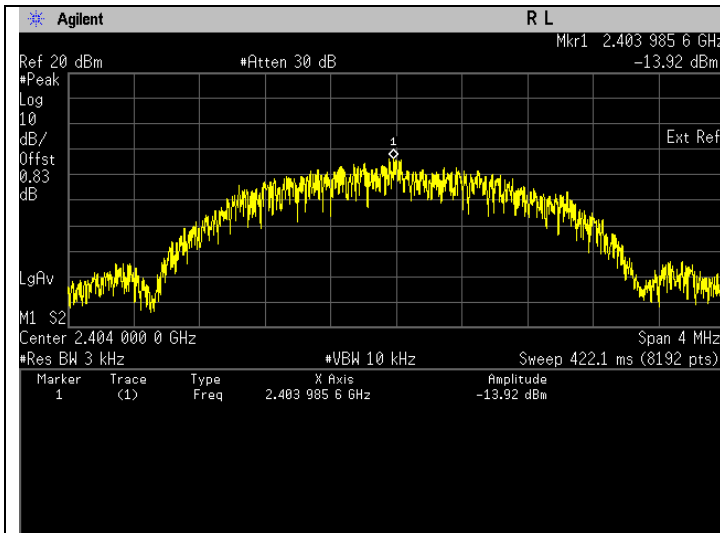

Maximum Power Spectral Density. Bluetooth LE  
 Frequency 2404 MHz

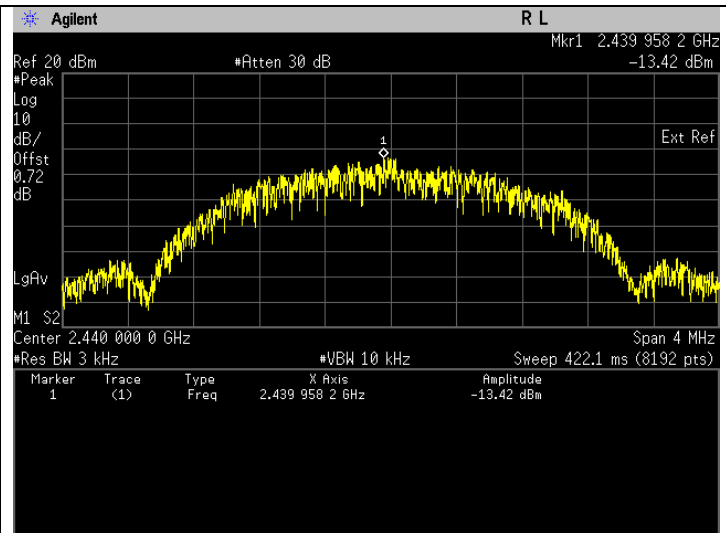

Maximum Power Spectral Density. Bluetooth LE  
 Frequency 2440 MHz

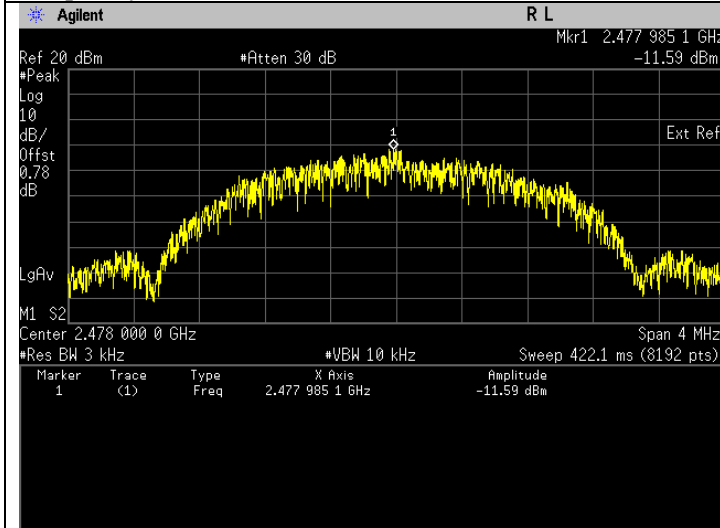


Maximum Power Spectral Density. Bluetooth LE  
 Frequency 2478 MHz



## 6.4 Conducted Spurious Emission

### 6.4.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- 5) Use the peak marker function to measure highest emission and scan up to 10<sup>th</sup> harmonic.


### 6.4.2 Test Limits:

<b>Normal Condition (25 ° C)</b>
<b>Shall be at least 20 dB below max power. (Peak detector)</b>

### 6.4.3 Test Result


#### BTLE 1M

Test Conditions			Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
Bluetooth L.E.	GFSK	2402	24517.00	-41.04	Pass
			24958.00	-41.18	Pass
			24750.00	-41.39	Pass
Bluetooth L.E.	GFSK	2440	24875.00	-39.66	Pass
			24508.00	-40.73	Pass
			24850.00	-41.10	Pass
Bluetooth L.E.	GFSK	2480	24983.00	-41.13	Pass
			24858.00	-41.32	Pass
			24142.00	-41.34	Pass

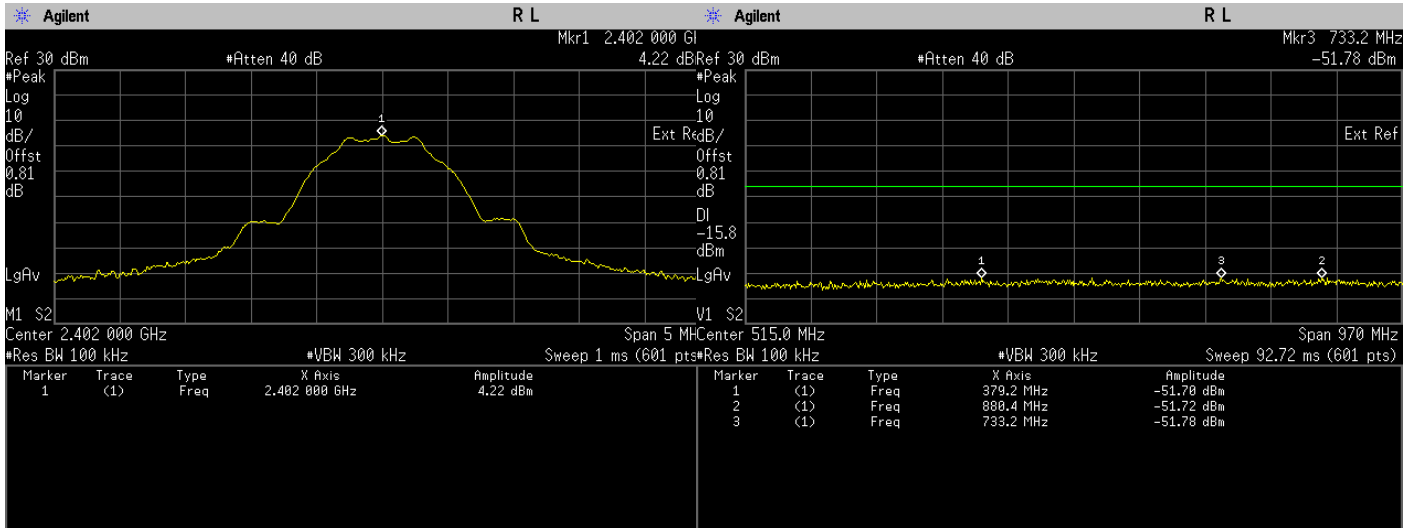


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Reference Level

Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 30 MHz -> 1 GHz

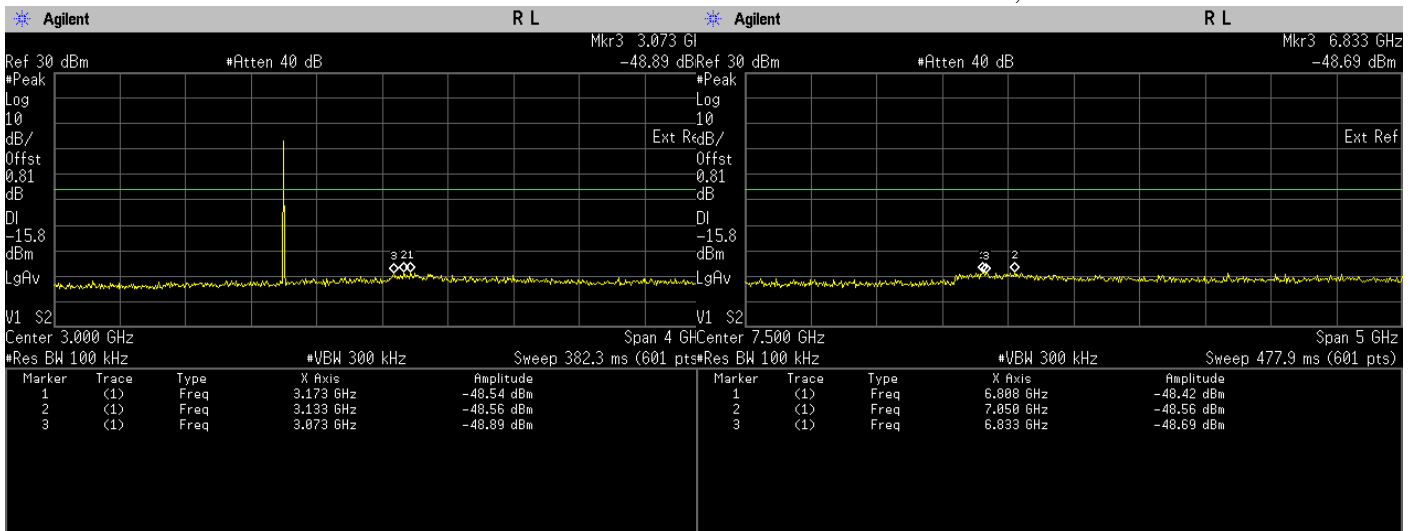


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 1 GHz -> 5 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 5 GHz -> 10 GHz

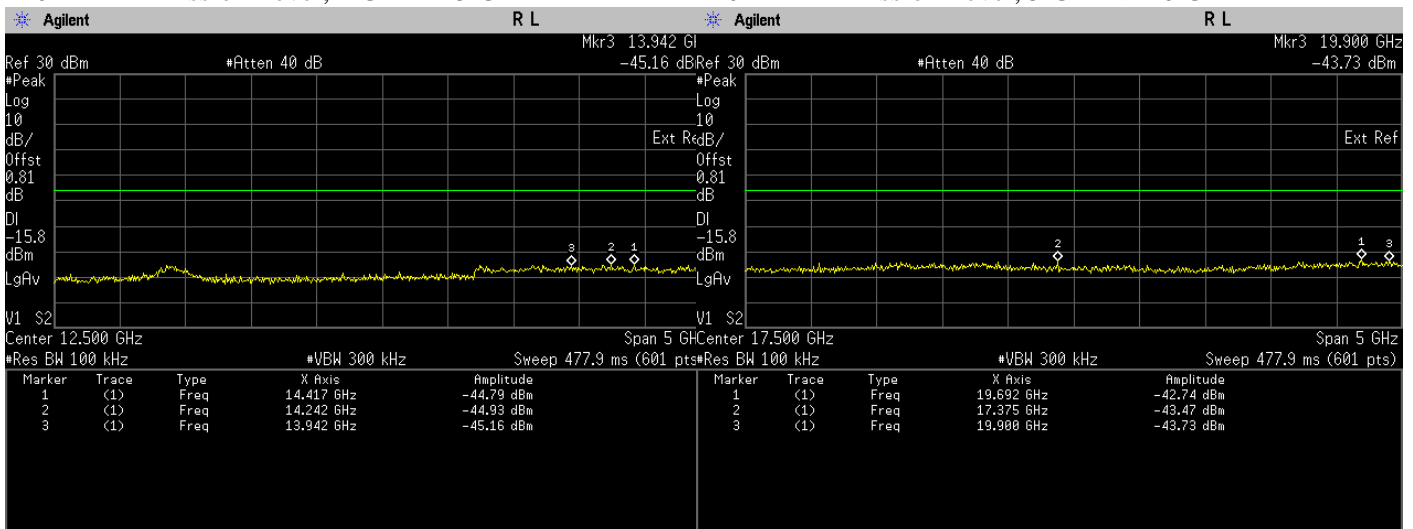


Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 Emission Level, 10 GHz -> 15 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2402 MHz Emission Level, 15 GHz -> 20 GHz

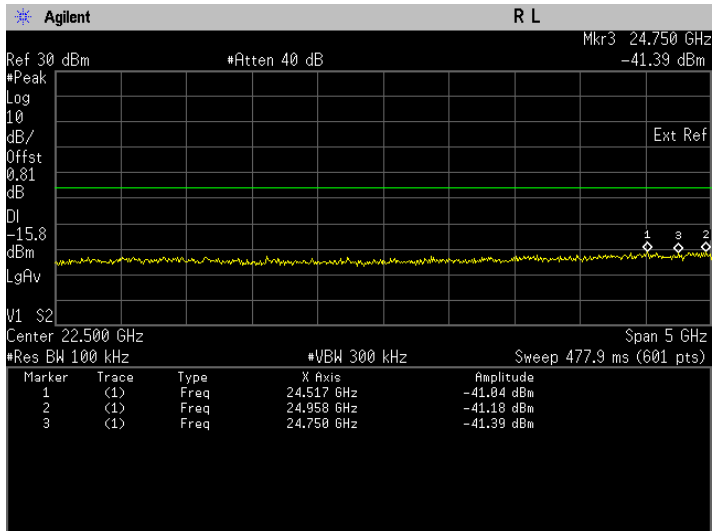


Conducted Emissions(Peak). Bluetooth LE, Frequency  
 2402 MHz Emission Level, 20 GHz -> 25 GHz

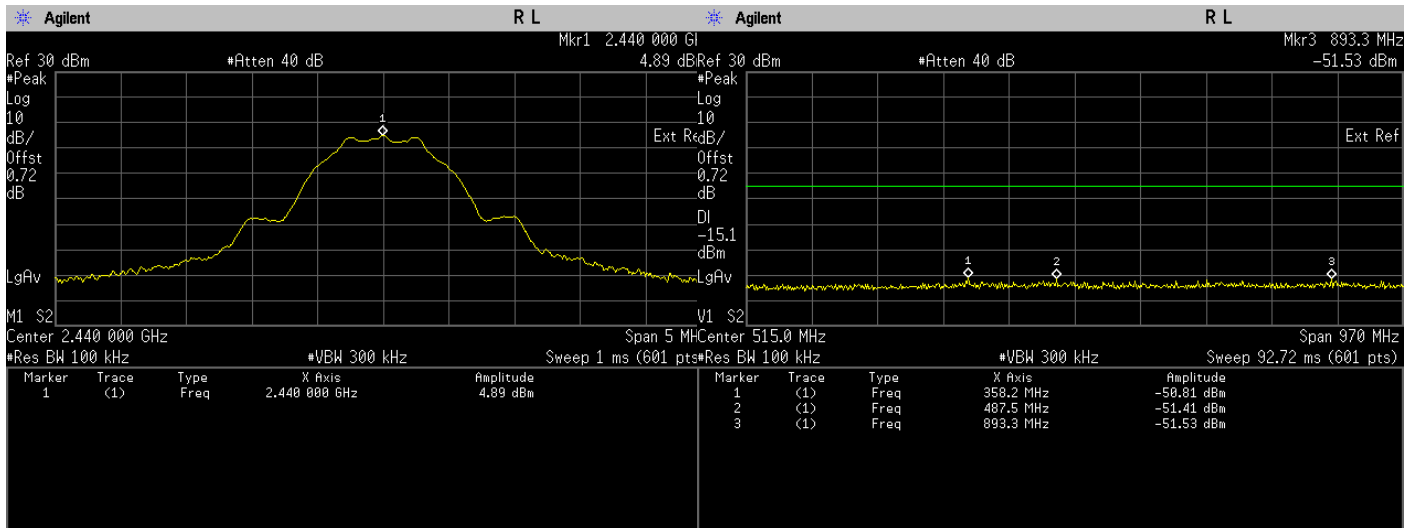


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Reference Level

Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 30 MHz -> 1 GHz

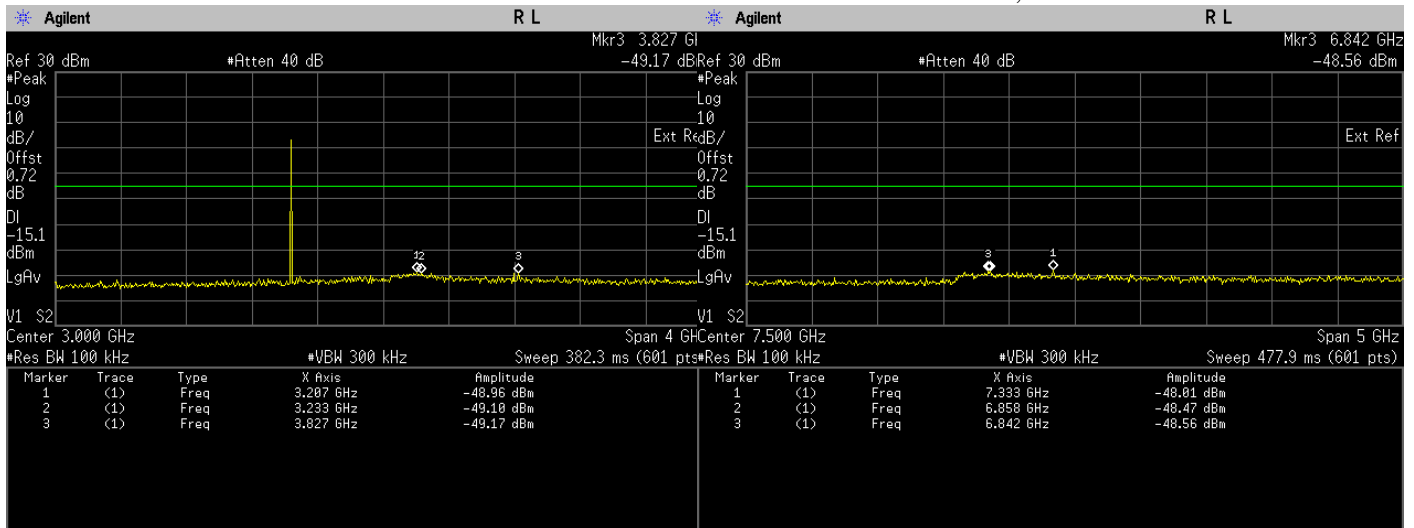


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 1 GHz -> 5 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 5 GHz -> 10 GHz

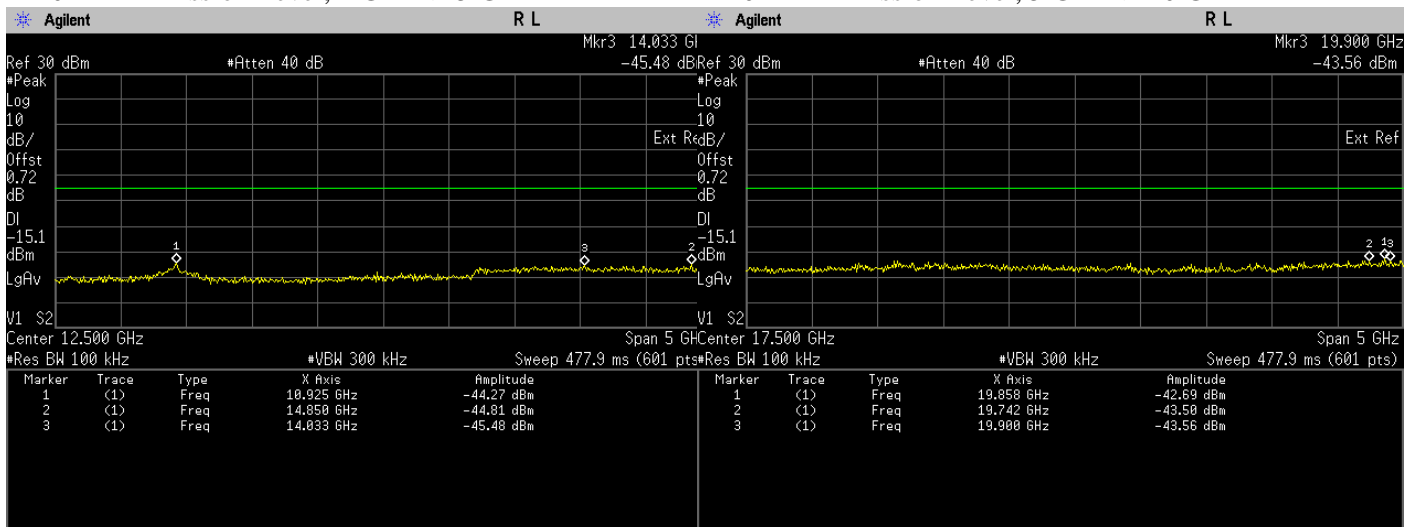


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 10 GHz -> 15 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 15 GHz -> 20 GHz

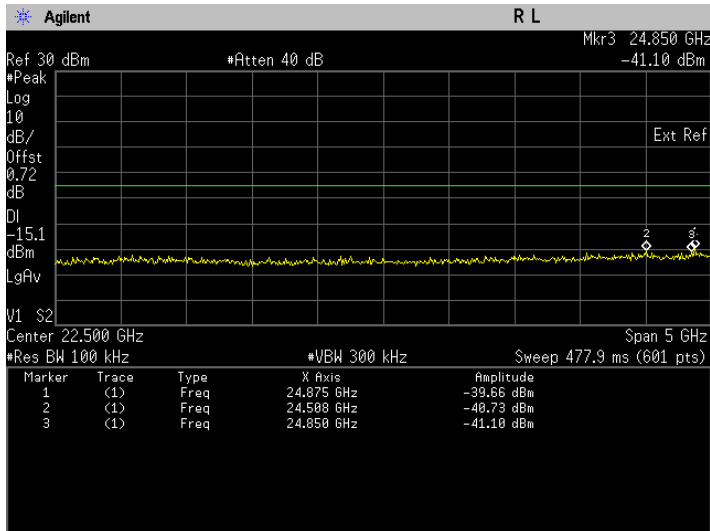


Conducted Emissions(Peak). Bluetooth LE, Frequency  
 2440 MHz Emission Level, 20 GHz -> 25 GHz

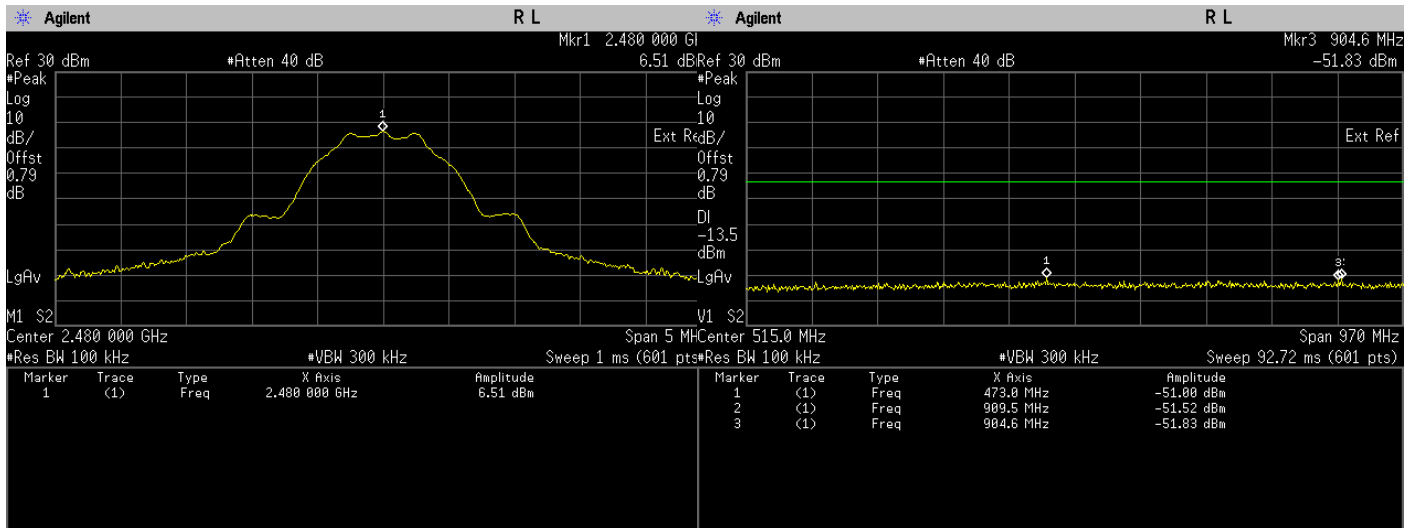


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Reference Level

Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 30 MHz -> 1 GHz

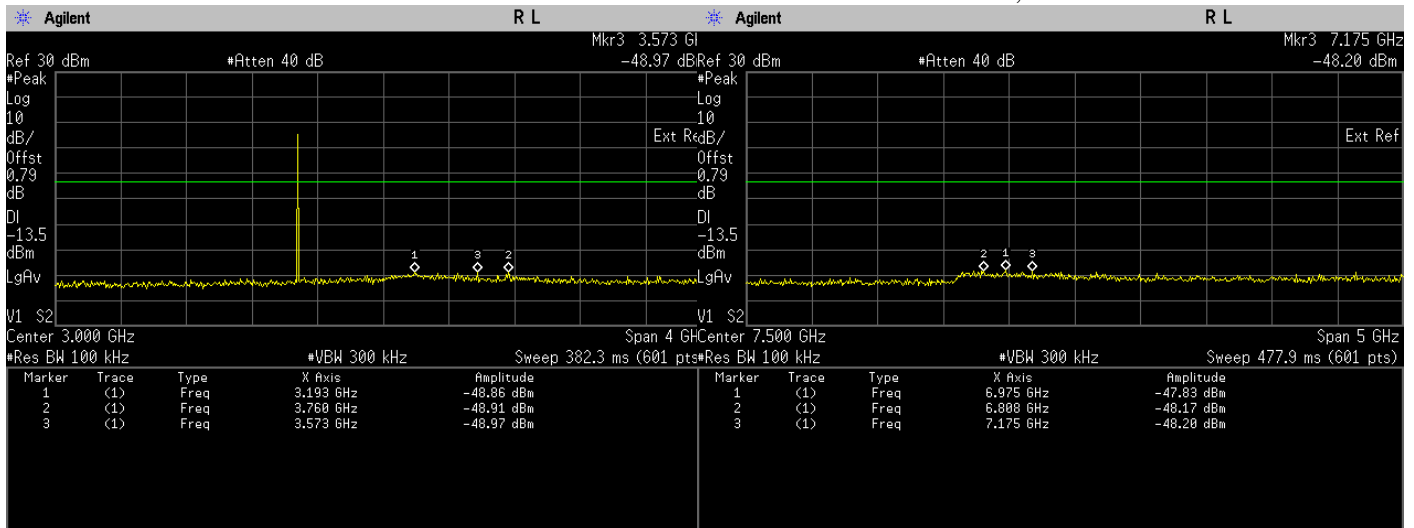


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 1 GHz -> 5 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 5 GHz -> 10 GHz

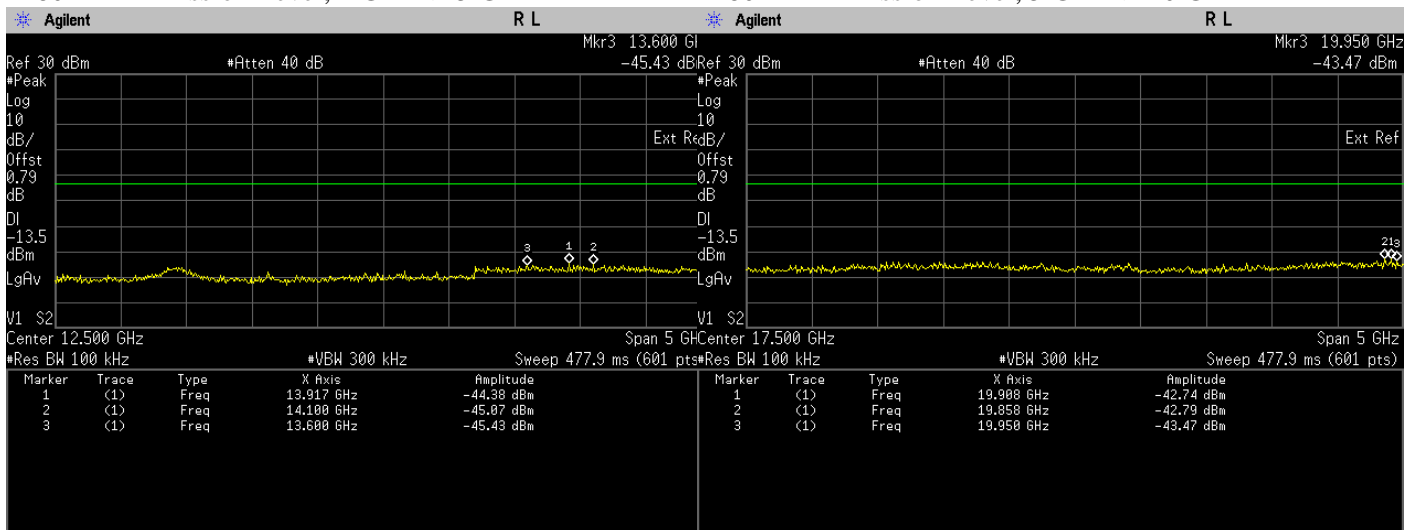

Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 10 GHz -> 15 GHz


Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 15 GHz -> 20 GHz

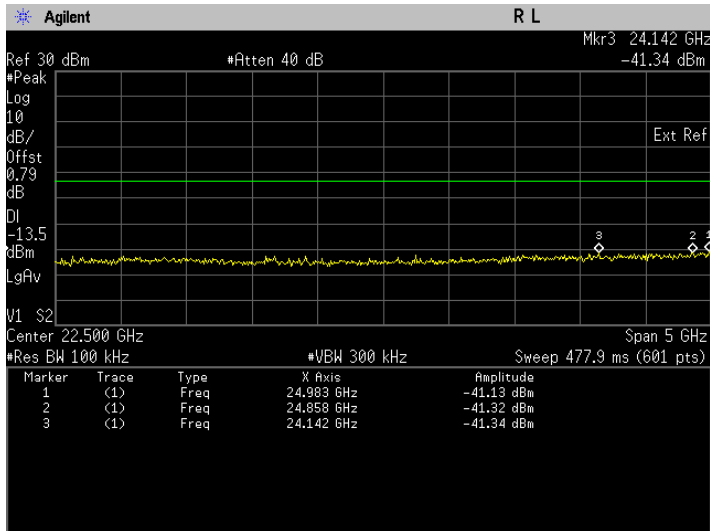

Conducted Emissions(Peak). Bluetooth LE, Frequency 2480 MHz Emission Level, 20 GHz -> 25 GHz


**BTLE 2M**

Test Conditions			Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
Bluetooth L.E.	GFSK	2404	24683.00	-39.32	Pass
			24933.00	-40.48	Pass
			24608.00	-40.58	Pass
Bluetooth L.E.	GFSK	2440	24583.00	-41.24	Pass
			24867.00	-41.26	Pass
			24883.00	-41.33	Pass
Bluetooth L.E.	GFSK	2478	24575.00	-40.28	Pass
			24958.00	-40.81	Pass
			24933.00	-41.08	Pass

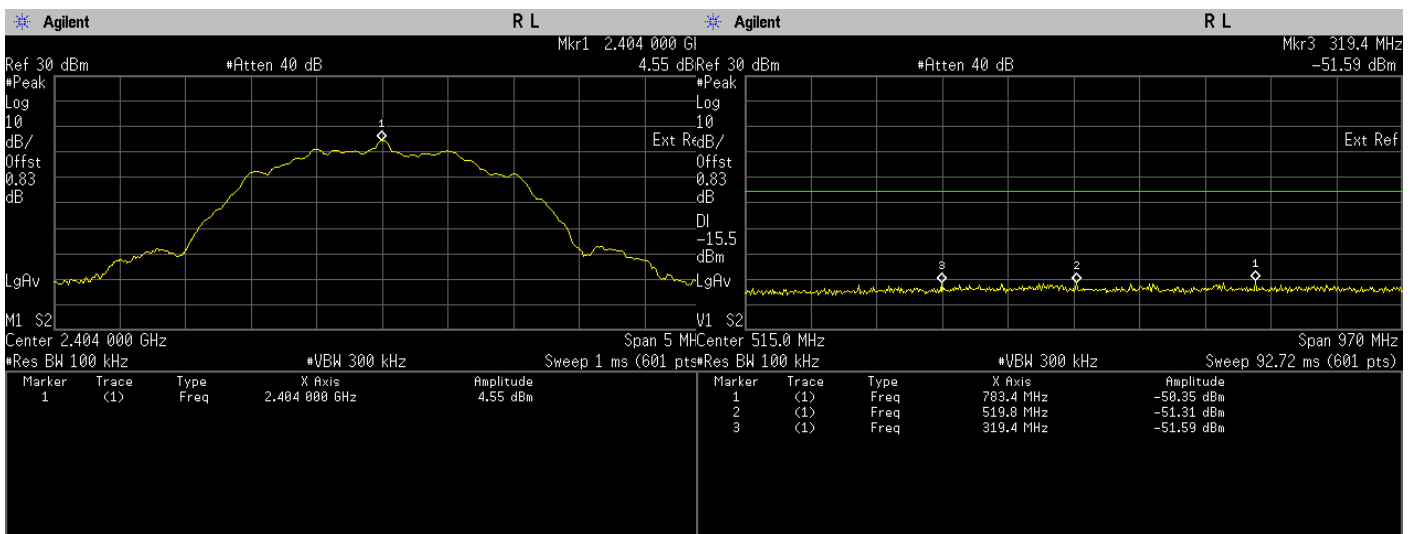

Conducted Emissions(Peak). Bluetooth LE, Frequency 2404 MHz Reference Level


Conducted Emissions(Peak). Bluetooth LE, Frequency 2404 MHz Emission Level, 30 MHz -> 1 GHz

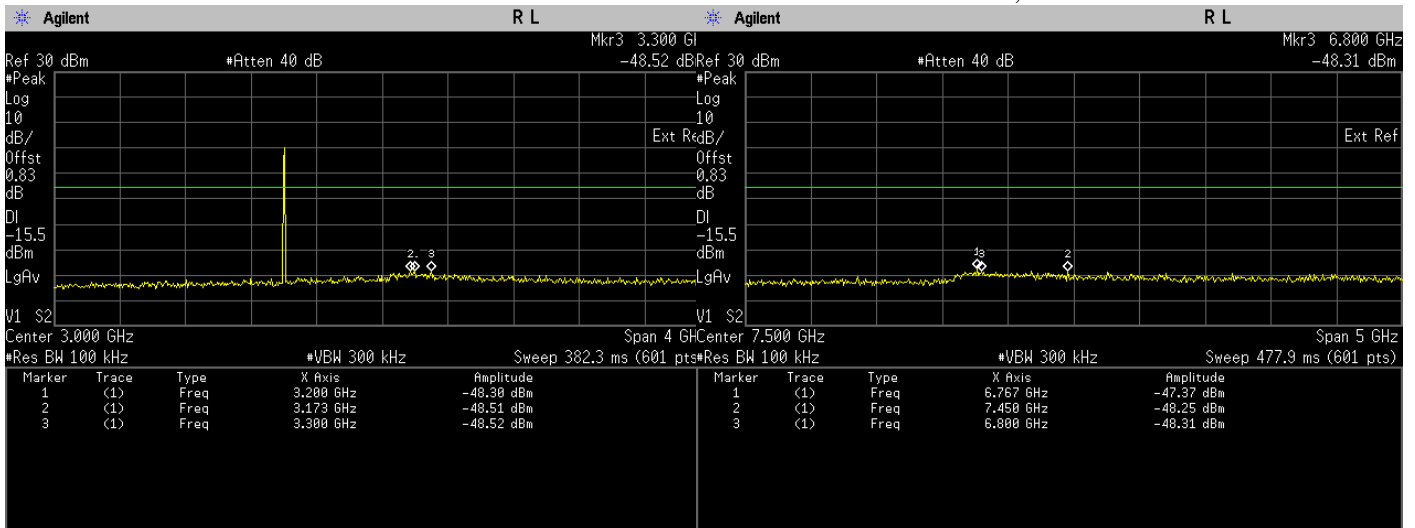

Conducted Emissions(Peak). Bluetooth LE, Frequency 2404 MHz Emission Level, 1 GHz -> 5 GHz


Conducted Emissions(Peak). Bluetooth LE, Frequency 2404 MHz Emission Level, 5 GHz -> 10 GHz



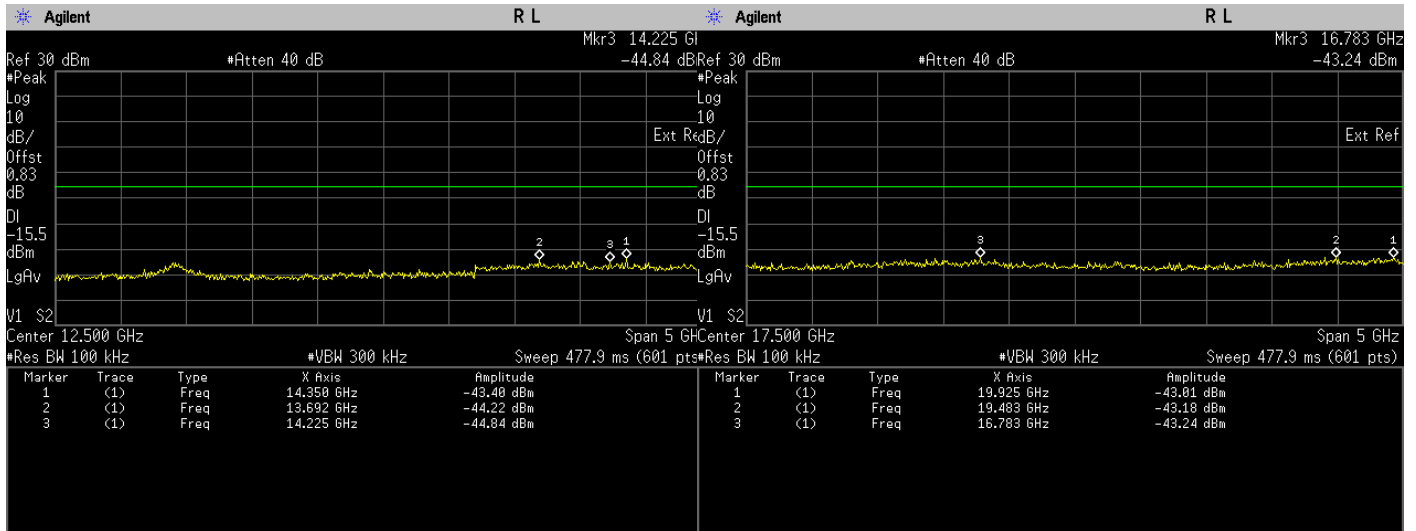


Conducted Emissions(Peak). Bluetooth LE, Frequency 2404 Emission Level, 10 GHz -> 15 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2404 MHz Emission Level, 15 GHz -> 20 GHz

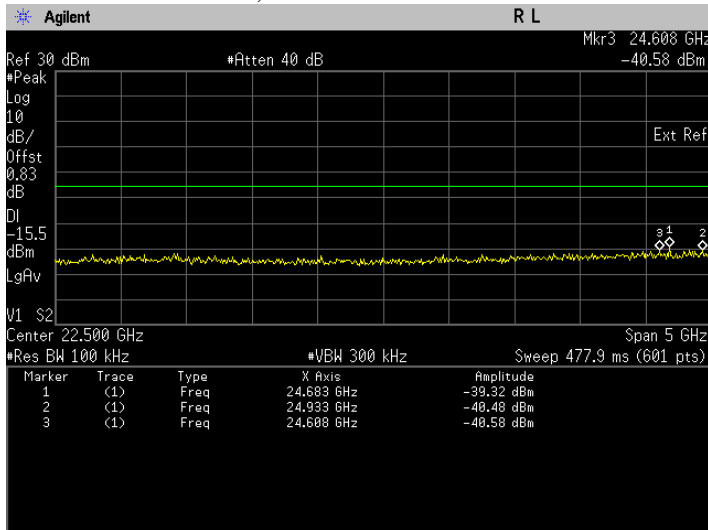


Conducted Emissions(Peak). Bluetooth LE, Frequency 2404 MHz Emission Level, 20 GHz -> 25 GHz

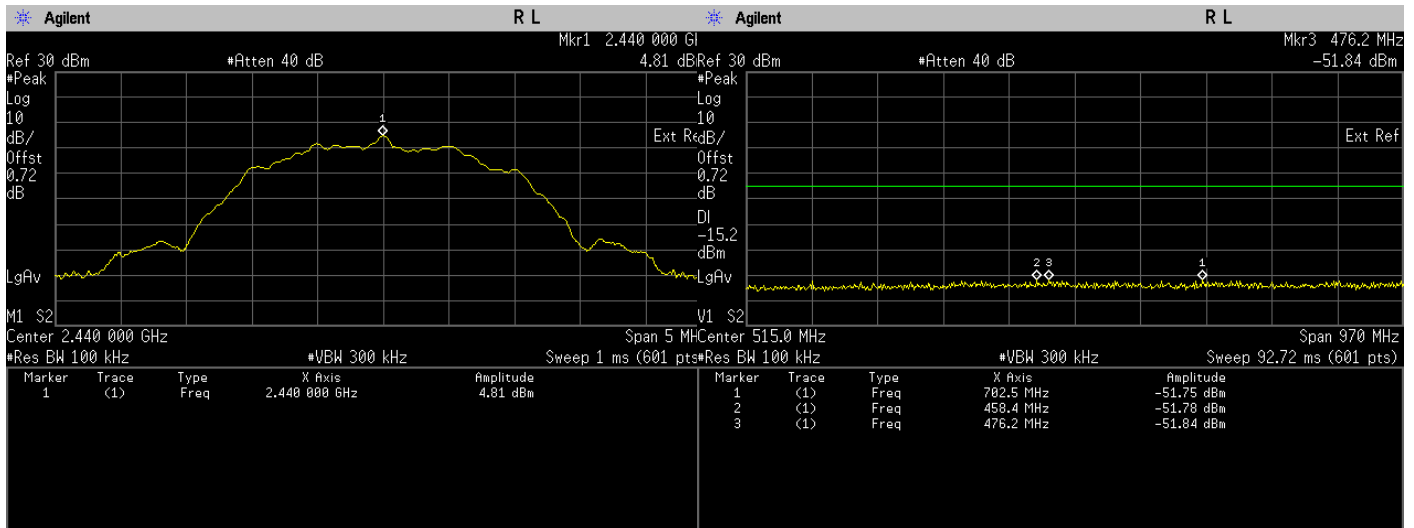


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Reference Level

Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 30 MHz -> 1 GHz

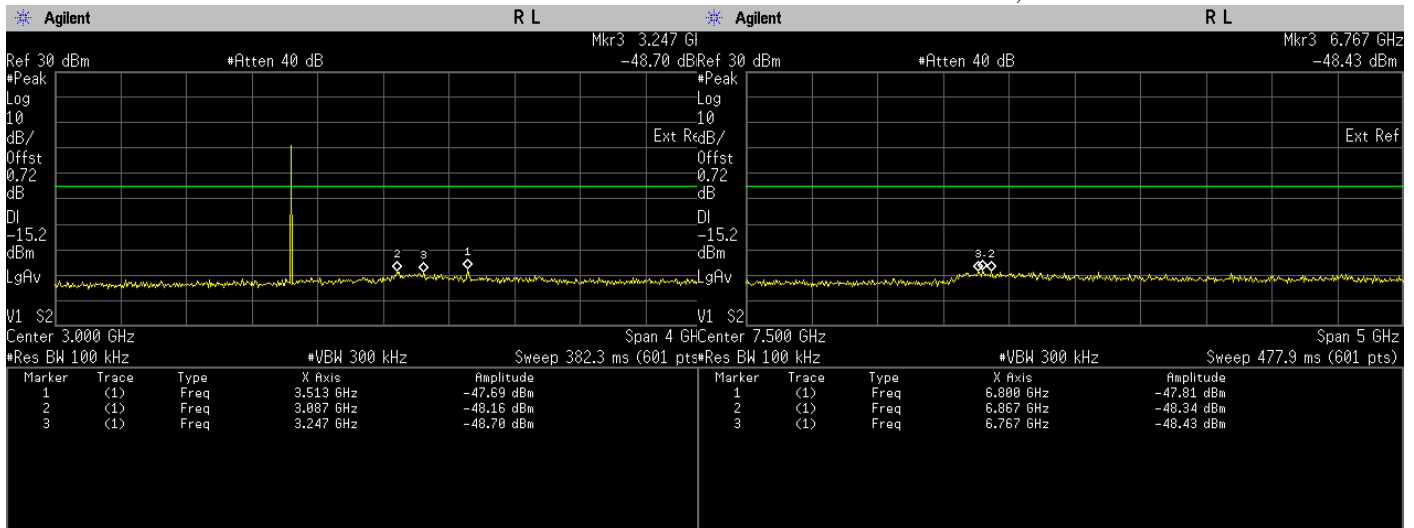


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 1 GHz -> 5 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 5 GHz -> 10 GHz

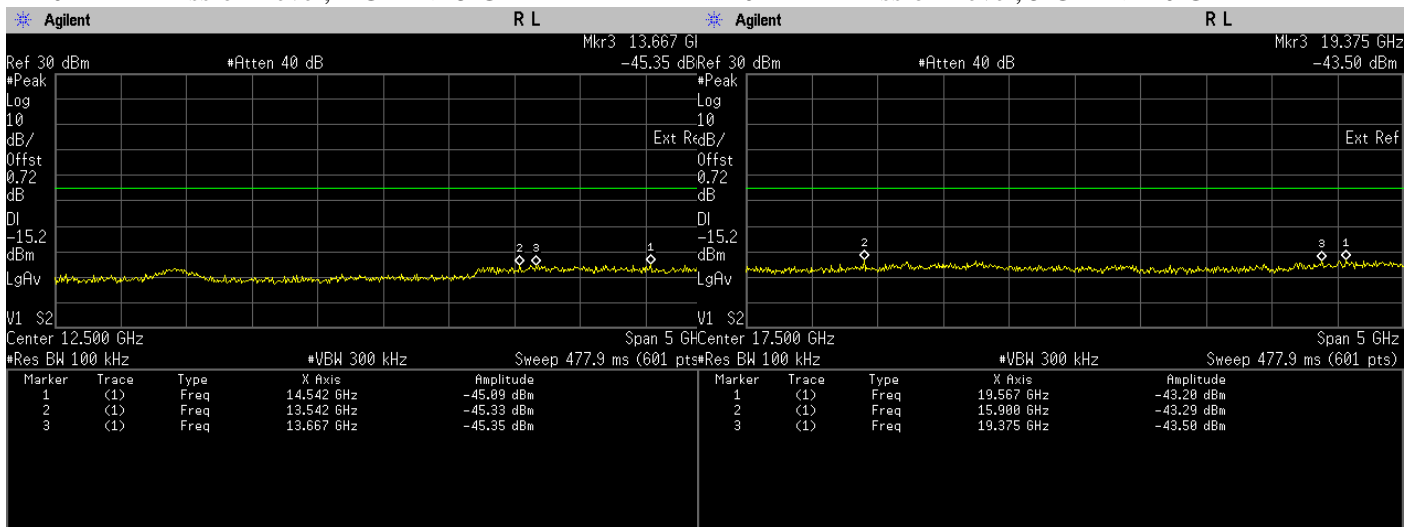


Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 10 GHz -> 15 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2440 MHz Emission Level, 15 GHz -> 20 GHz

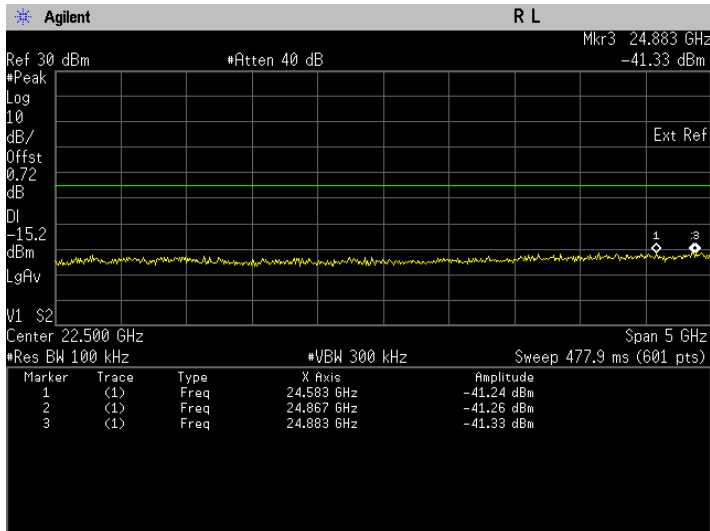


Conducted Emissions(Peak). Bluetooth LE, Frequency  
 2440 MHz Emission Level, 20 GHz -> 25 GHz

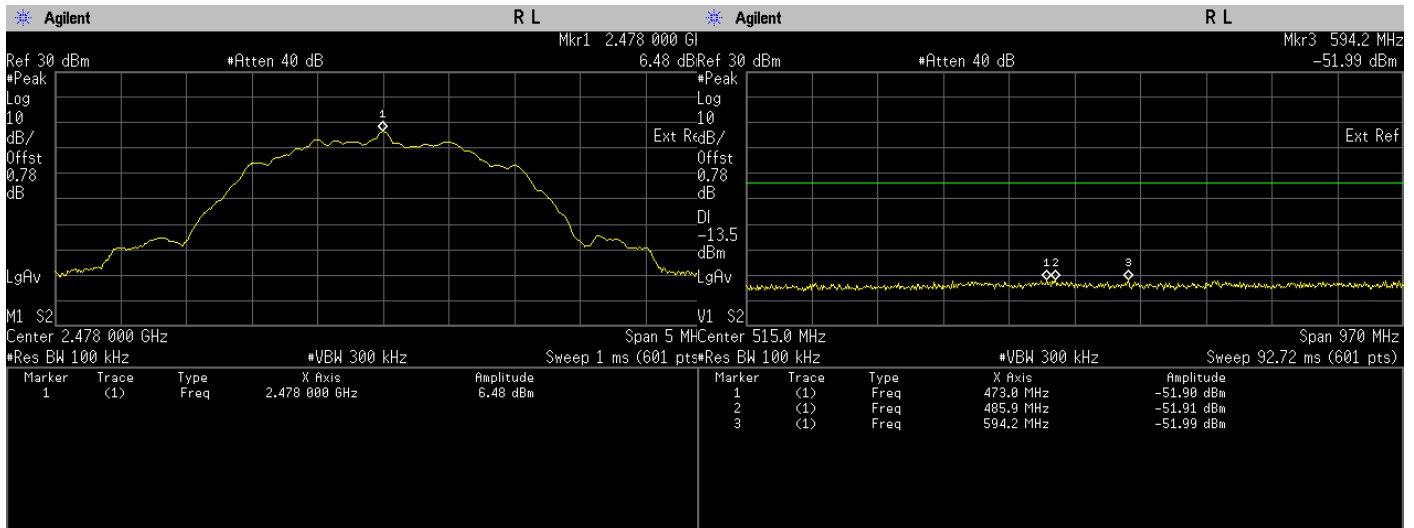


Conducted Emissions(Peak). Bluetooth LE, Frequency 2478 MHz Reference Level

Conducted Emissions(Peak). Bluetooth LE, Frequency 2478 MHz Emission Level, 30 MHz -> 1 GHz

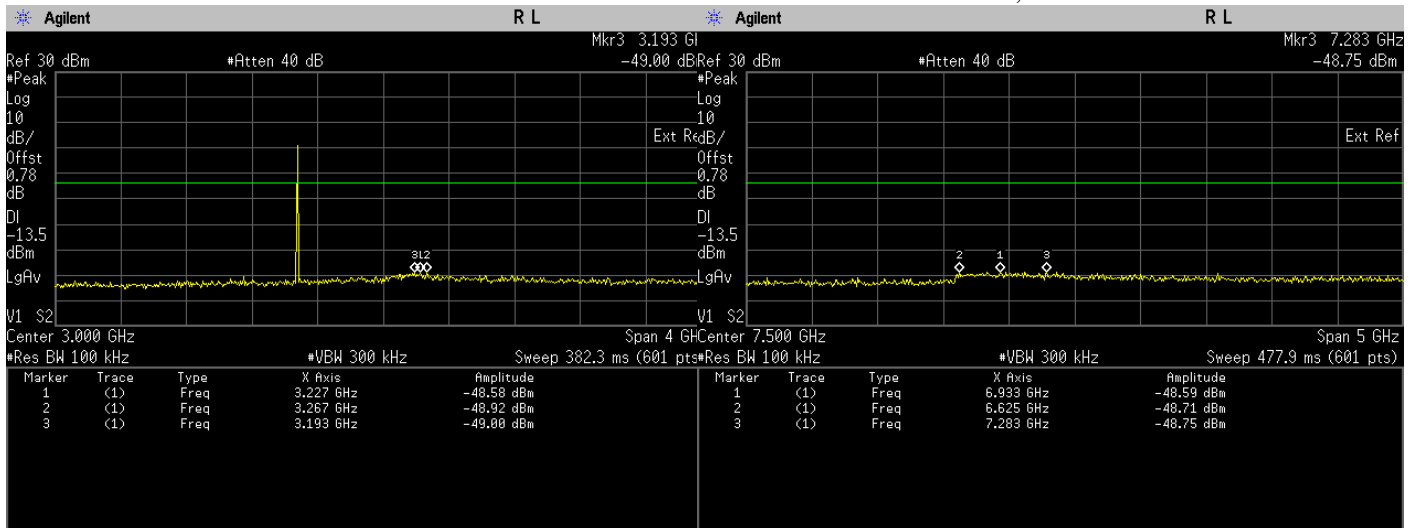


Conducted Emissions(Peak). Bluetooth LE, Frequency 2478 MHz Emission Level, 1 GHz -> 5 GHz

Conducted Emissions(Peak). Bluetooth LE, Frequency 2478 MHz Emission Level, 5 GHz -> 10 GHz

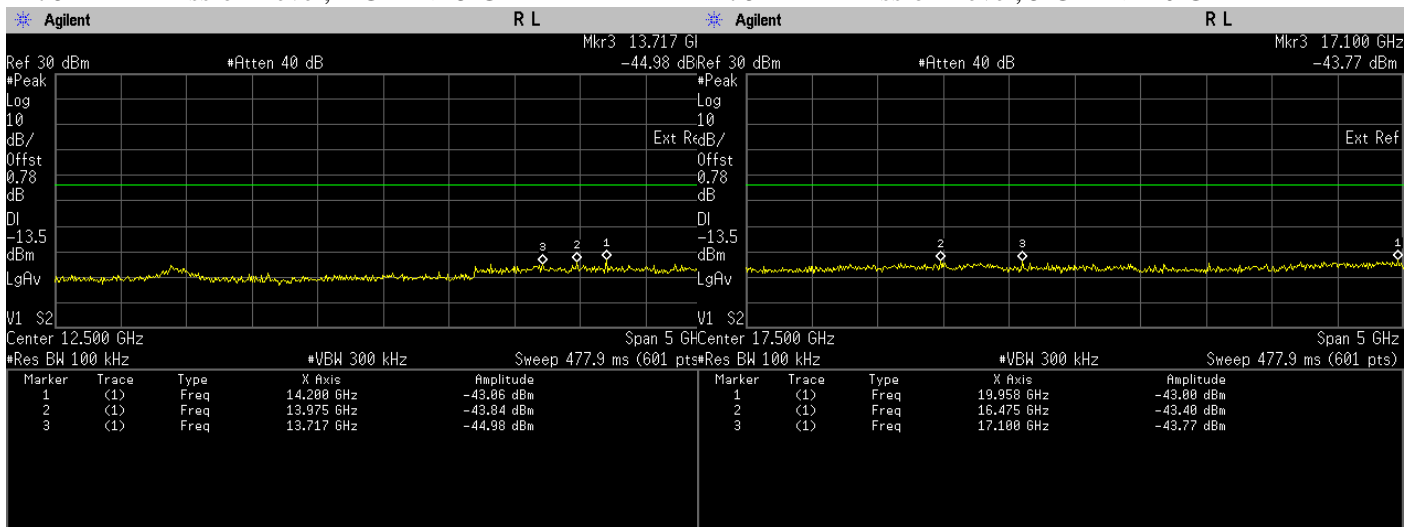

Conducted Emissions(Peak). Bluetooth LE, Frequency 2478 MHz Emission Level, 10 GHz -> 15 GHz


Conducted Emissions(Peak). Bluetooth LE, Frequency 2478 MHz Emission Level, 15 GHz -> 20 GHz

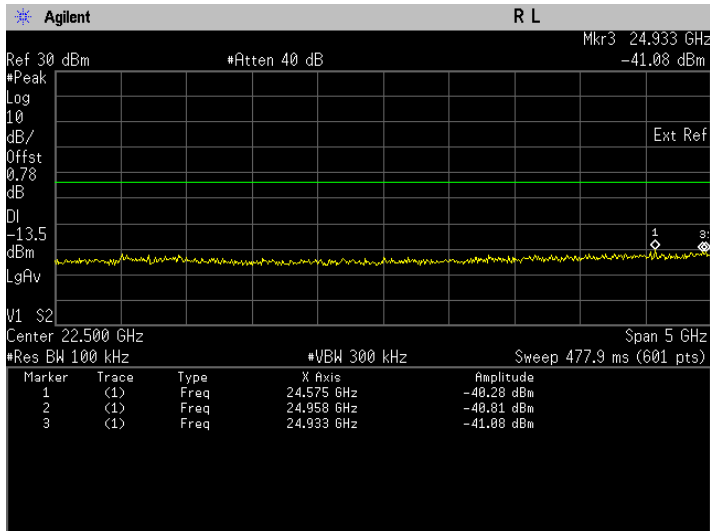

Conducted Emissions(Peak). Bluetooth LE, Frequency  
 2478 MHz Emission Level, 20 GHz -> 25 GHz

## 6.5 Band edge Conducted Spurious Emission

### 6.5.1 Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
  - a. RBW = 100 kHz
  - b. VBW = 300 kHz
  - c. Detector mode = Peak
  - d. Trace = Max Hold
  - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.

### 6.5.2 Test Limits:


<b>Normal Condition (25 ° C)</b>
----------------------------------

<b>Shall be at least 20 dB below max power. (Peak detector)</b>
---


### 6.5.3 Test Result

#### BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
Bluetooth L.E	GFSK	2402	2399.98	-51.62	Pass
Bluetooth L.E	GFSK	2480	2483.55	-57.34	Pass

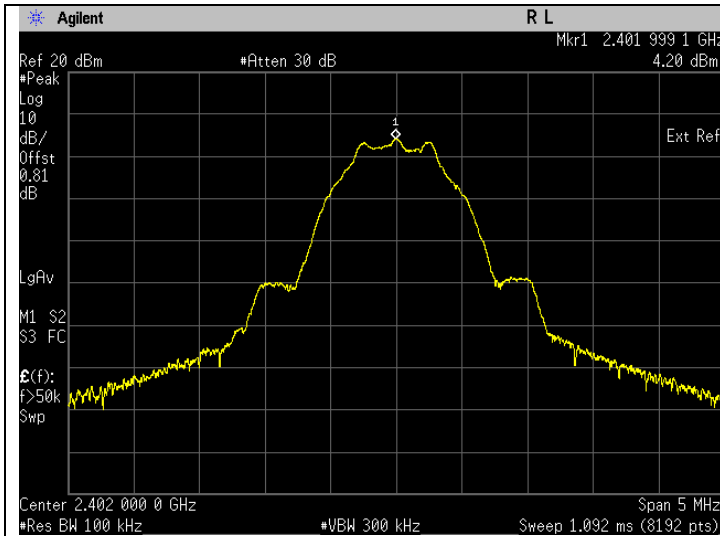


Band Edge(Peak). Bluetooth LE Frequency 2402 MHz  
 Reference Level

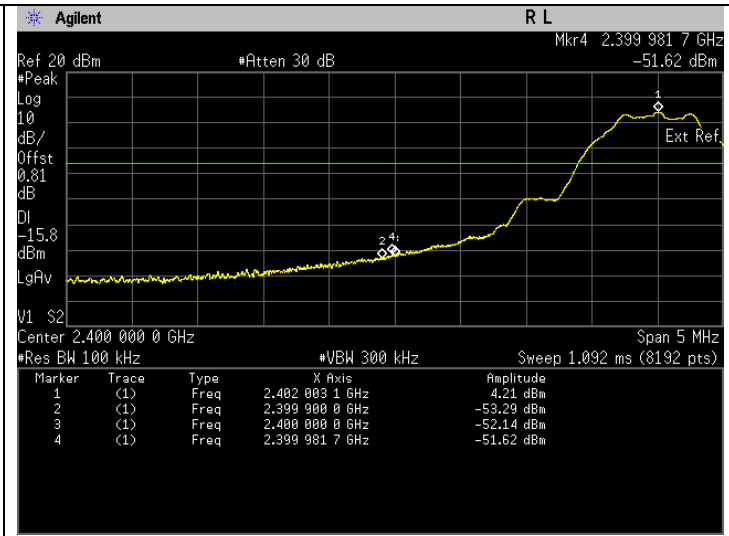

Band Edge(Peak). Bluetooth LE Frequency 2402 MHz  
 Band Edge

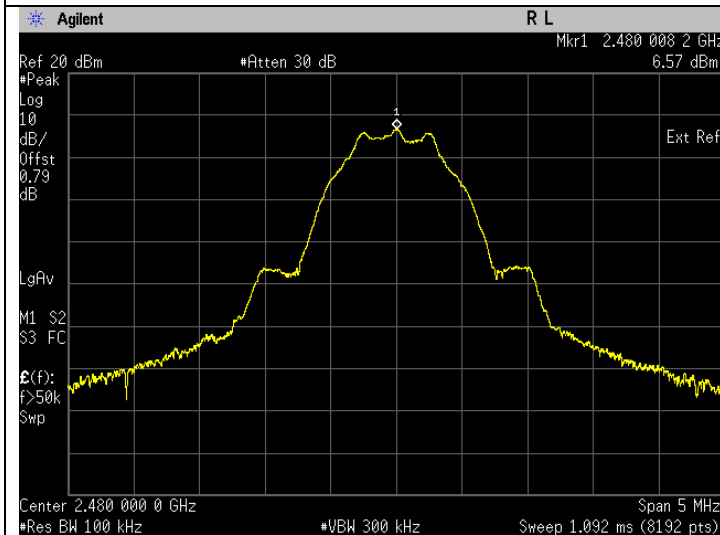


Band Edge(Peak). Bluetooth LE Frequency 2480 MHz  
 Reference Level

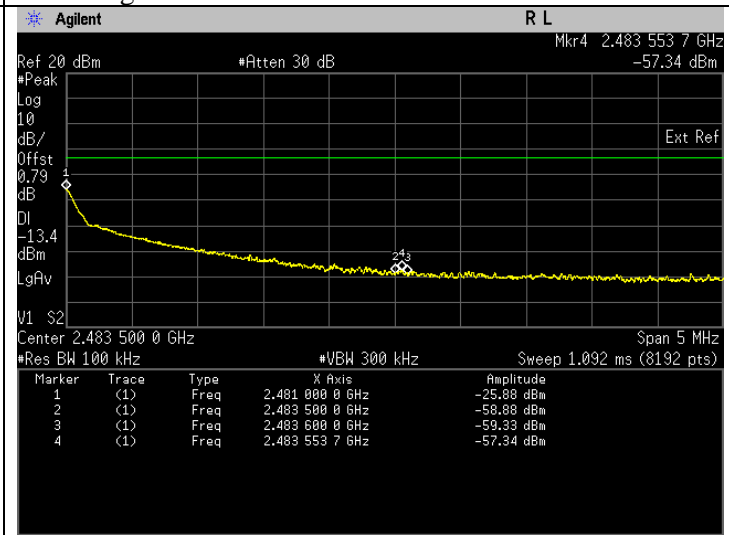


Band Edge(Peak). Bluetooth LE Frequency 2480 MHz  
 Band Edge

**BTLE 2M**


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
Bluetooth L.E	GFSK	2404	2399.95	-59.19	Pass
Bluetooth L.E	GFSK	2478	2483.57	-59.95	Pass

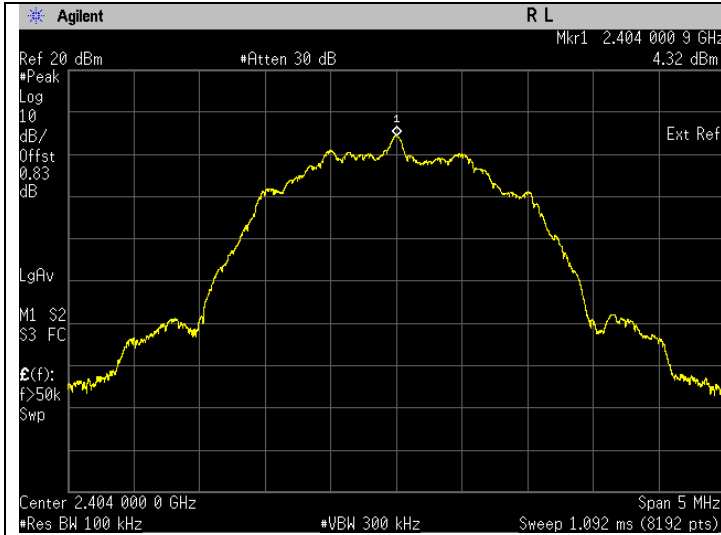


Band Edge(Peak). Bluetooth LE Frequency 2404 MHz  
 Reference Level

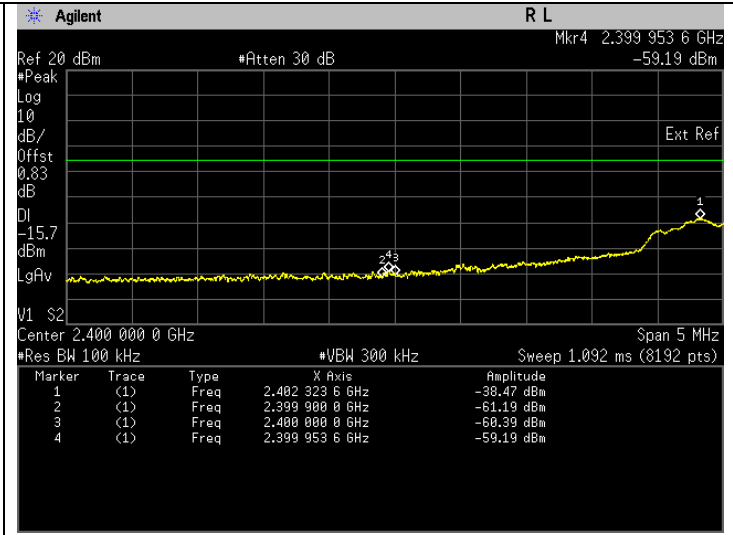

Band Edge(Peak). Bluetooth LE Frequency 2404 MHz  
 Band Edge

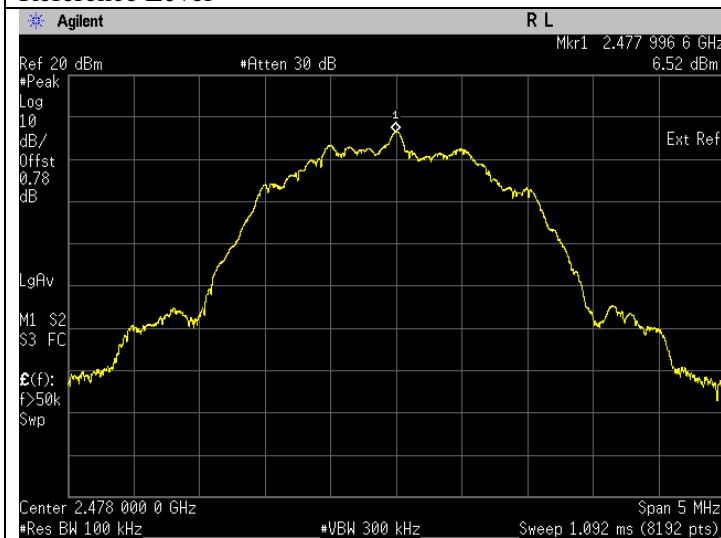

Band Edge(Peak). Bluetooth LE Frequency 2478 MHz  
 Reference Level

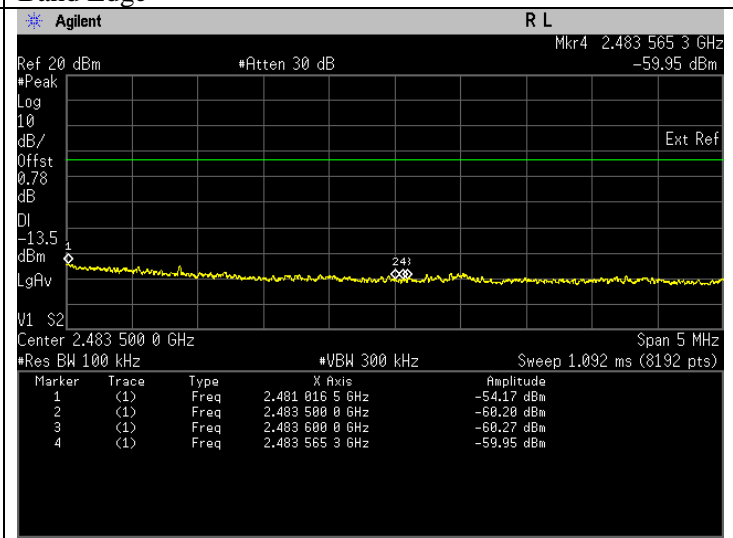


Band Edge(Peak). Bluetooth LE Frequency 2478 MHz  
 Band Edge



## 6.6 Radiated Emission within Restricted Bands

### 6.6.1 Test Setup

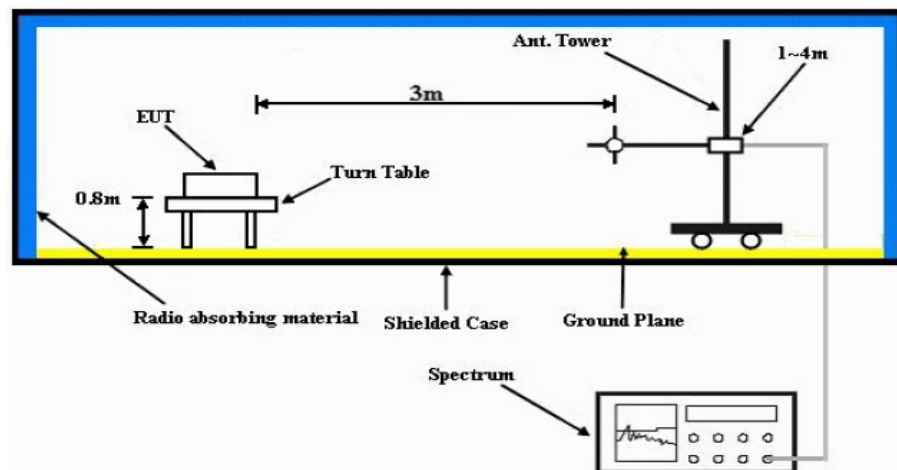

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

#### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

### 6.6.2 Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**NOTE:**

- 1) The lower limit shall apply at the transition frequencies.
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.




**Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot**

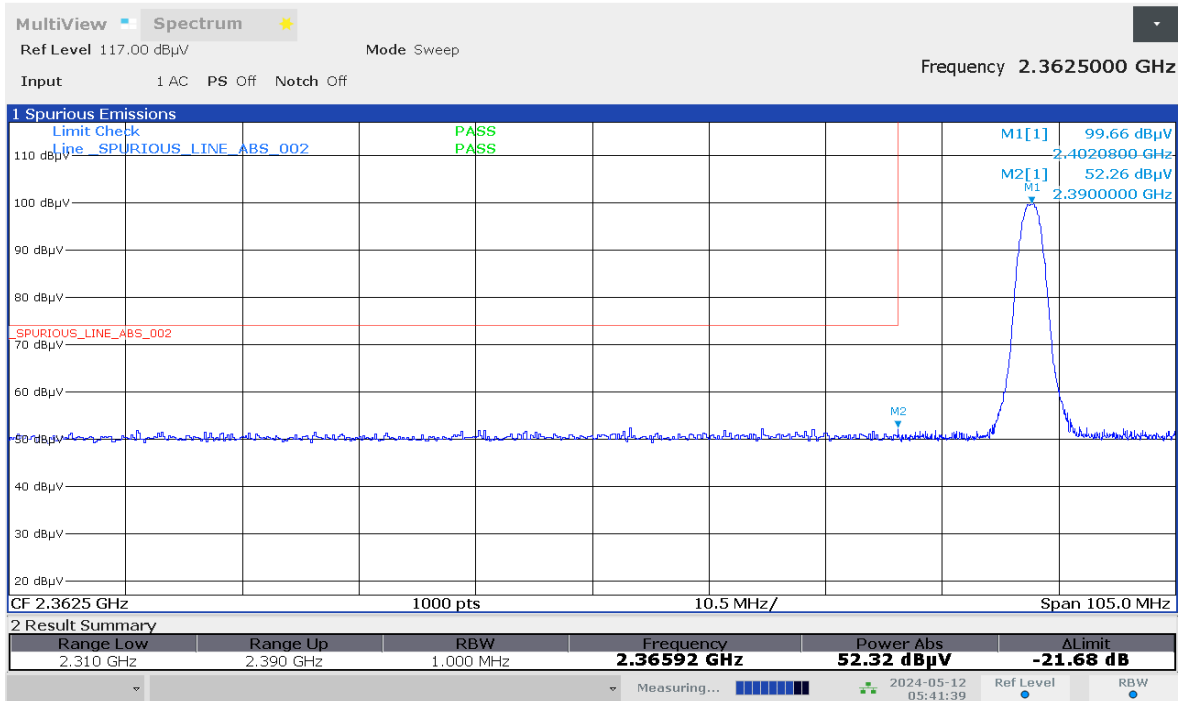


05:41:39 AM 05/12/2024

**Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot**

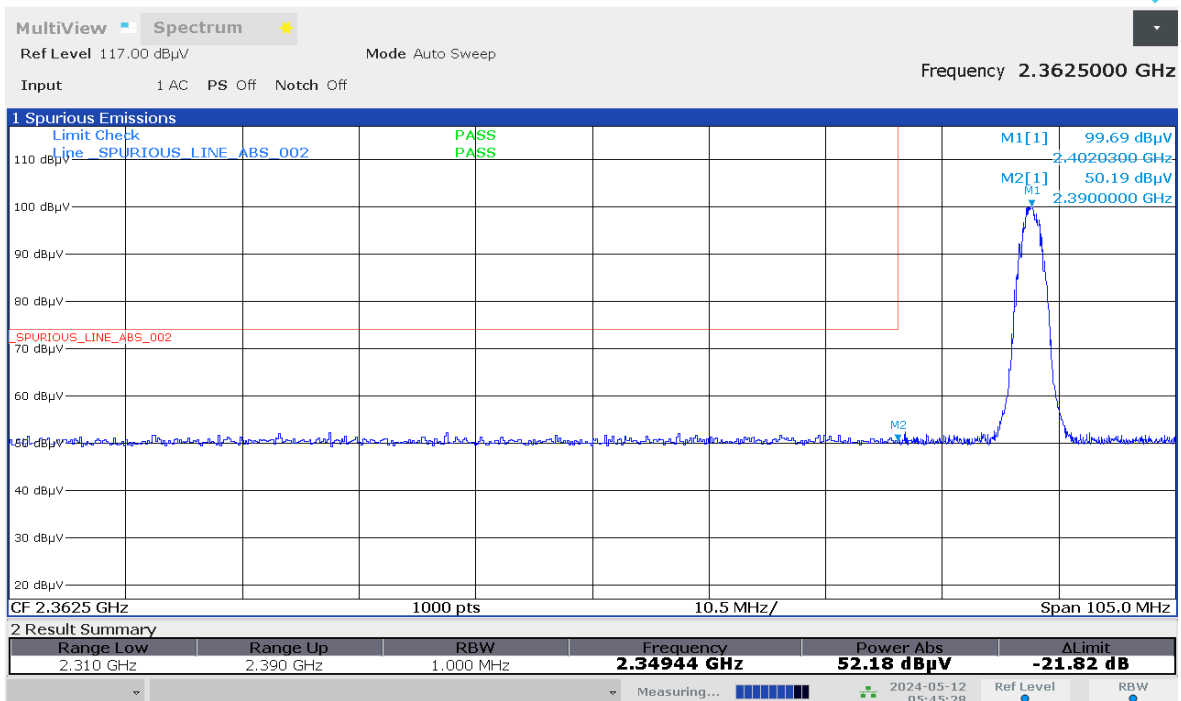

05:45:29 AM 05/12/2024

### Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

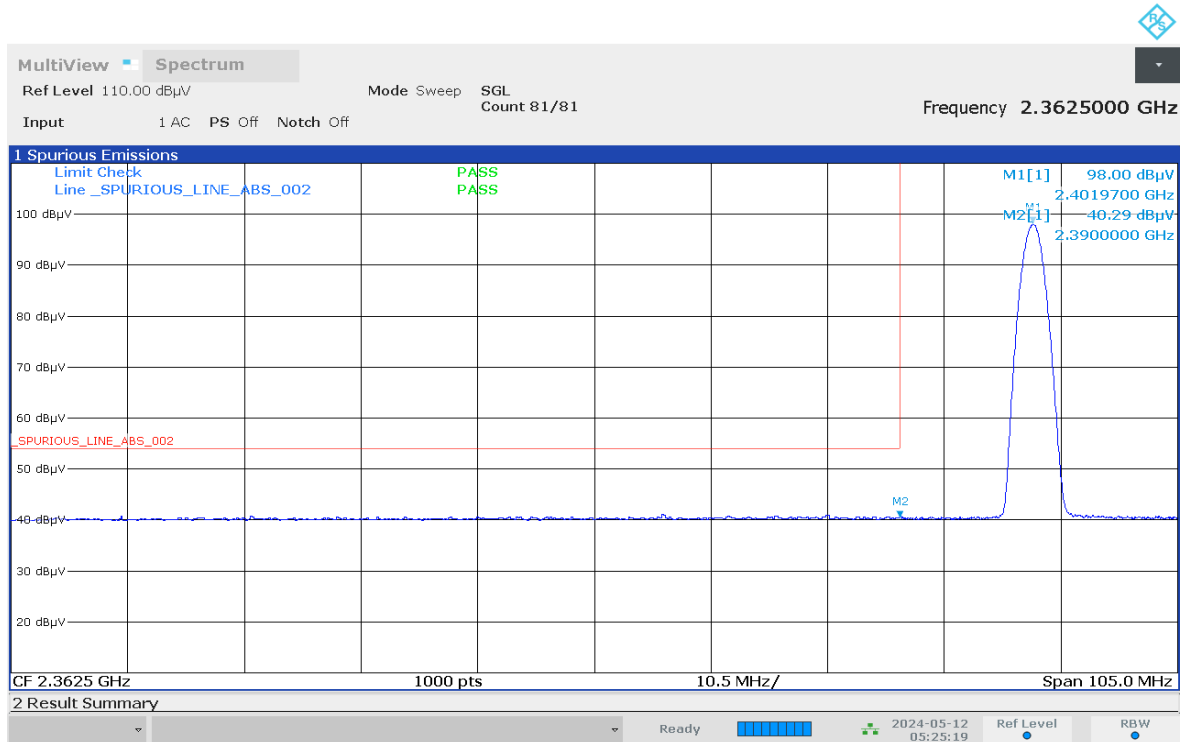

05:25:20 AM 05/12/2024


### Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot



05:29:08 AM 05/12/2024




**Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot**

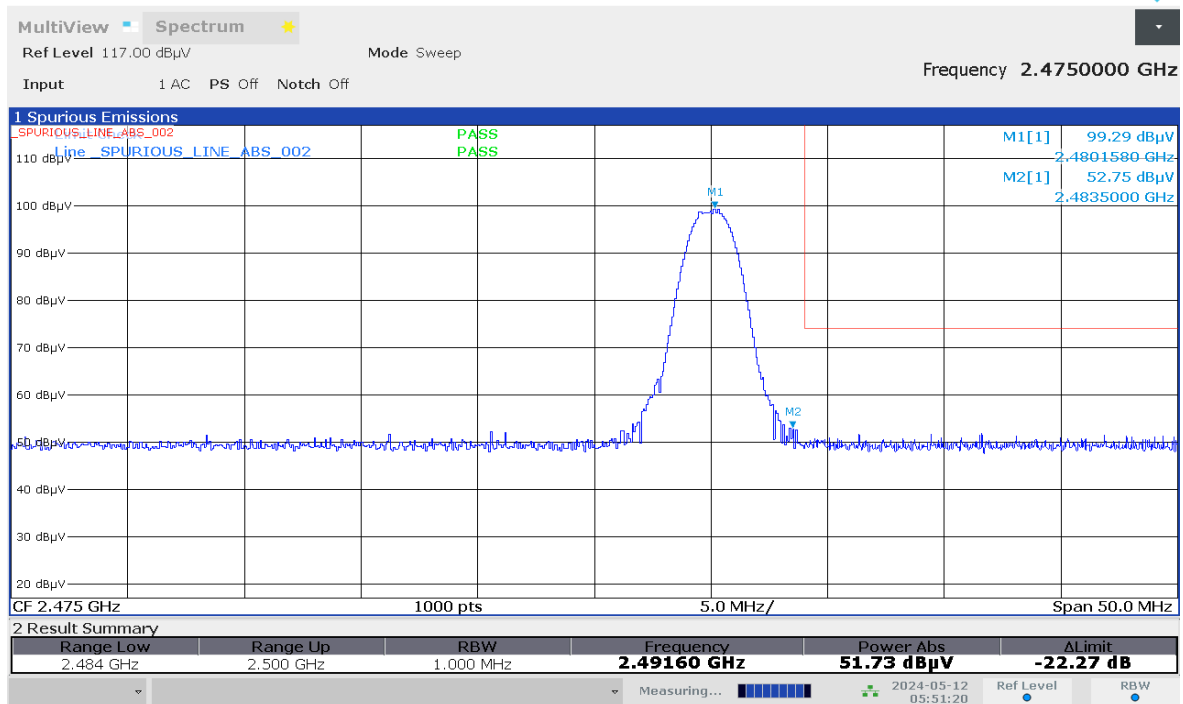


05:51:20 AM 05/12/2024

**Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot**

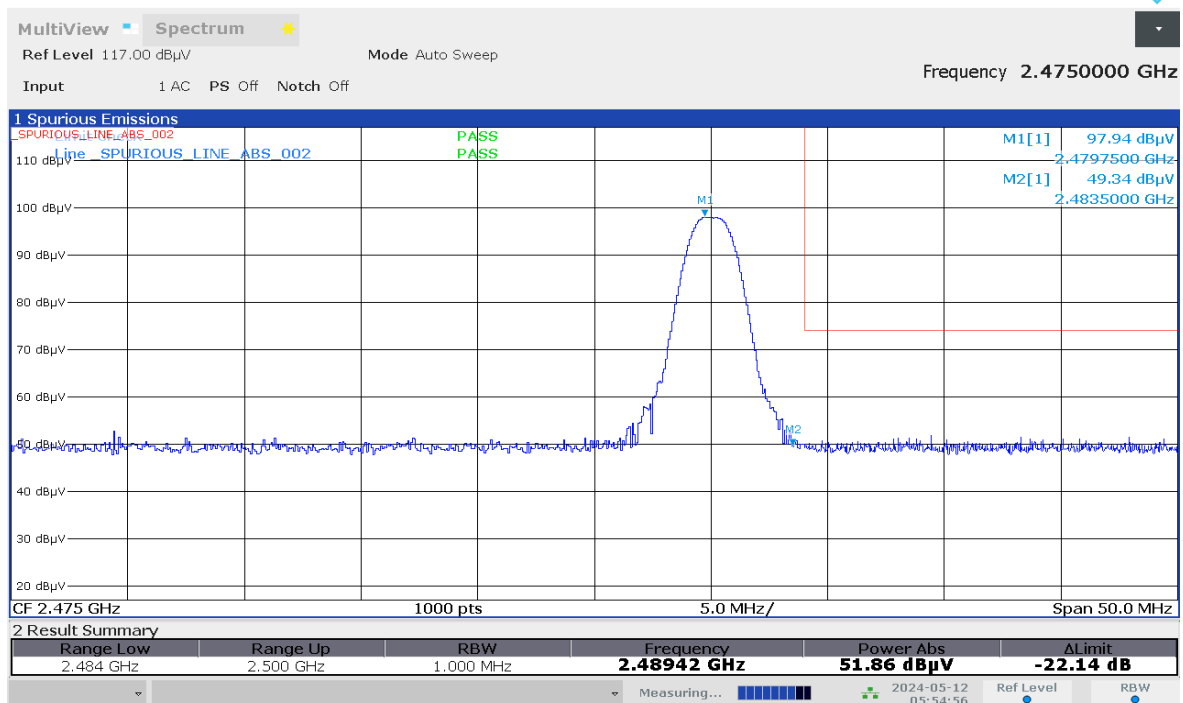


05:54:56 AM 05/12/2024

### Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

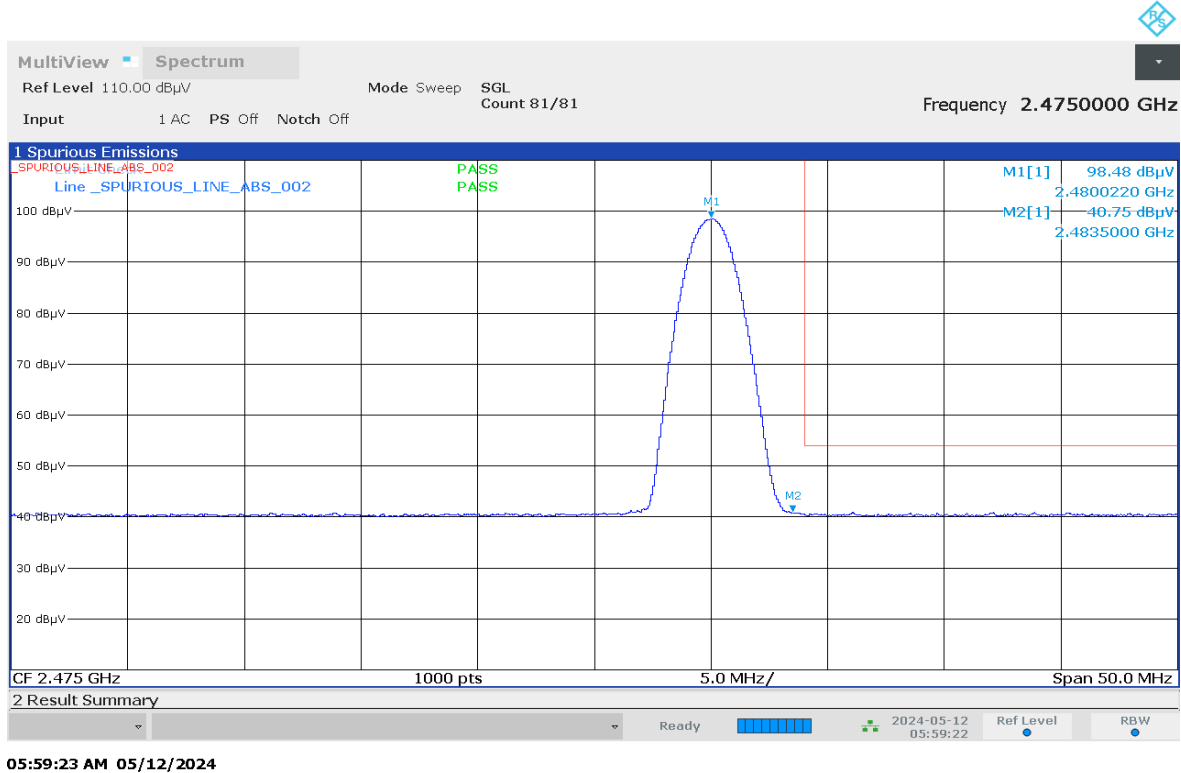


### Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

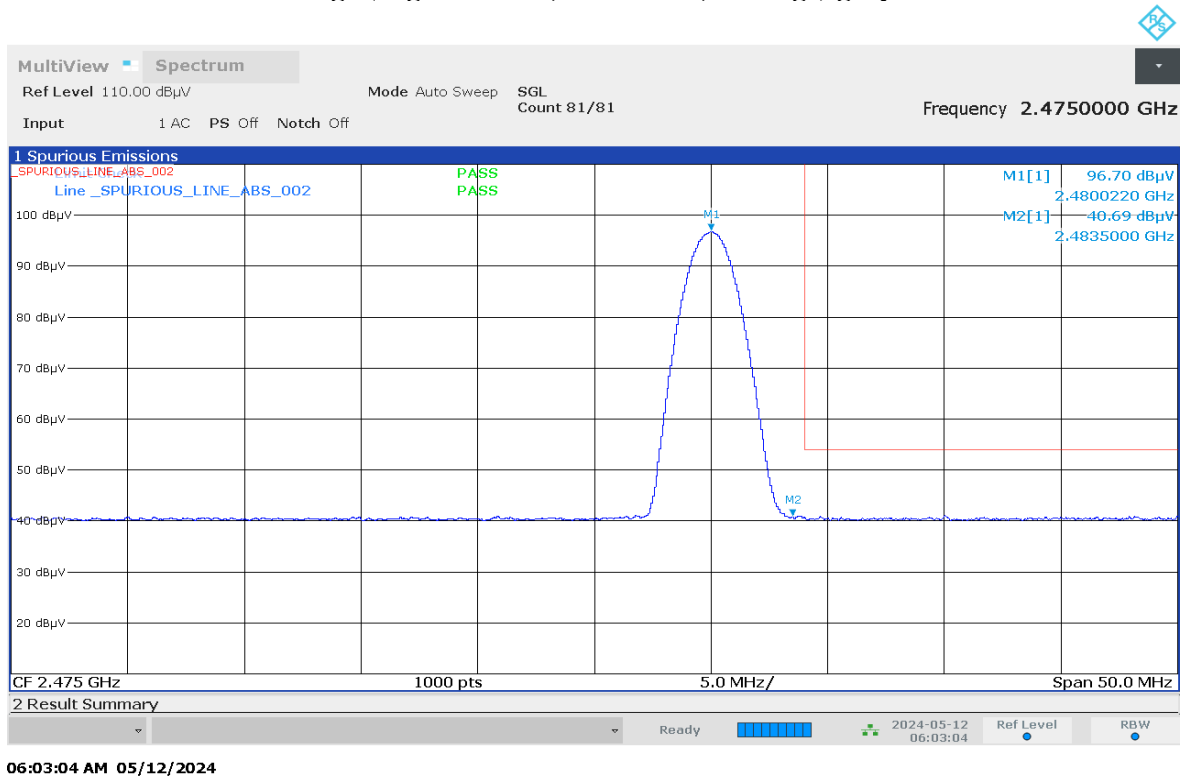






**Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot**

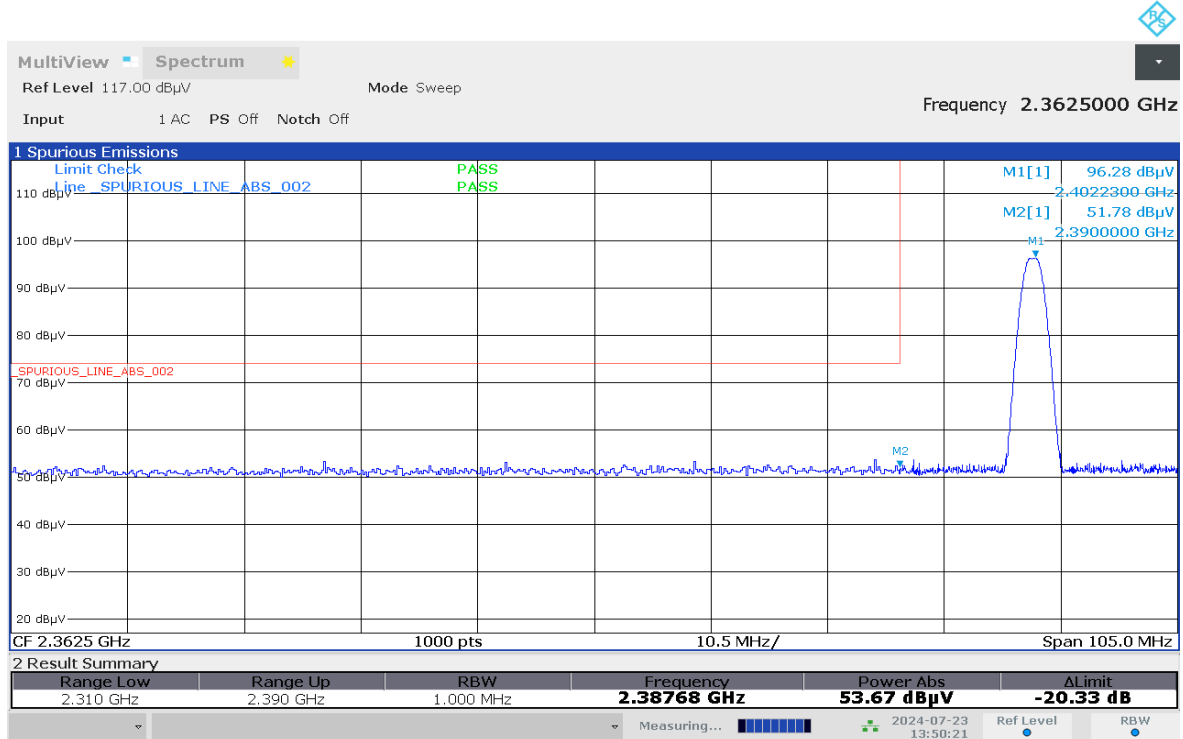


01:50:22 PM 07/23/2024

**Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot**

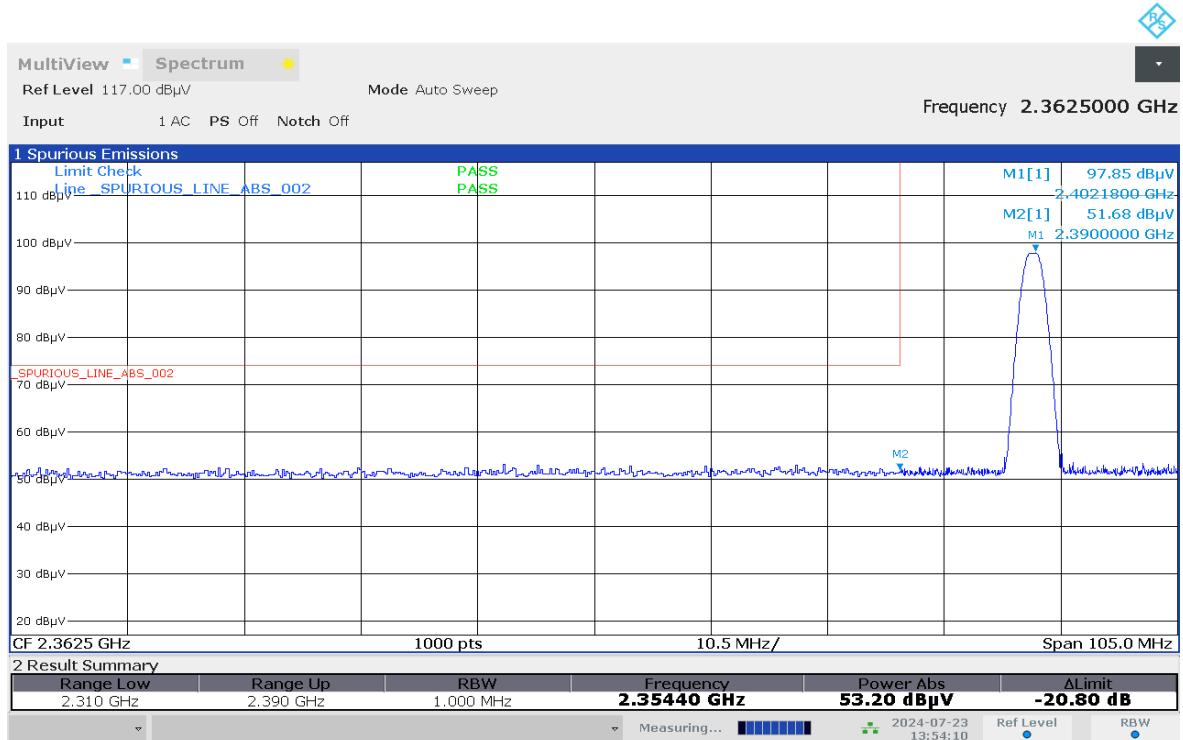


01:54:11 PM 07/23/2024

### Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

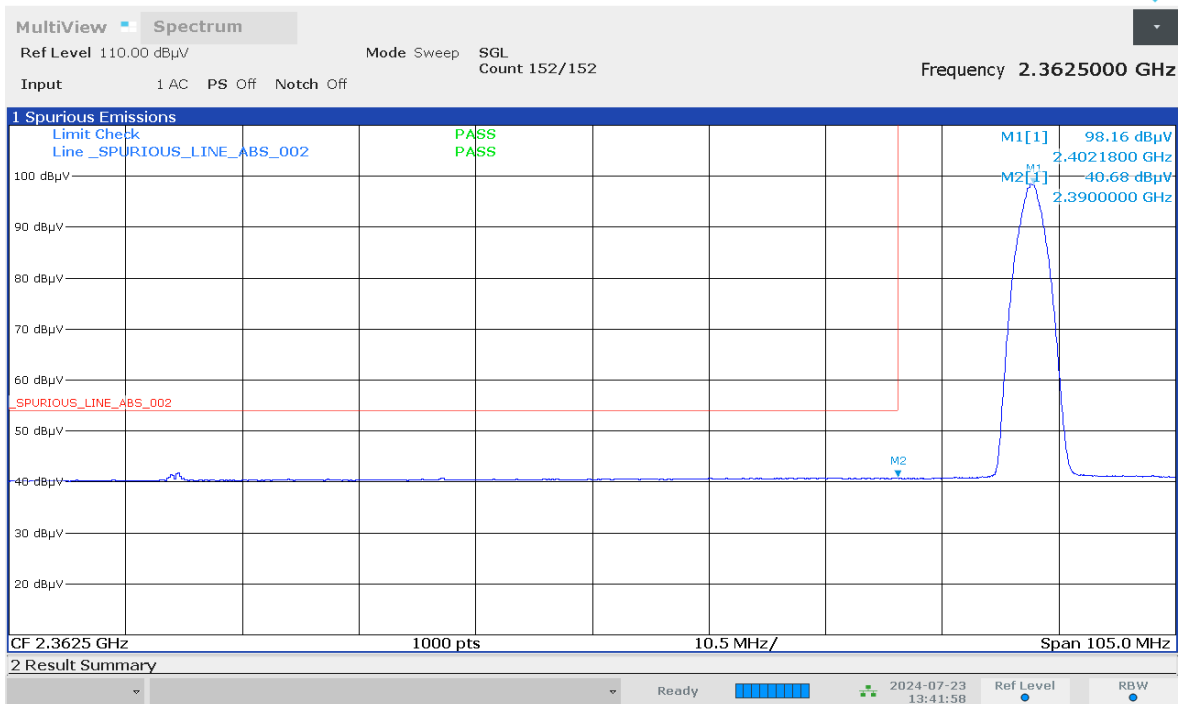

01:41:59 PM 07/23/2024


### Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

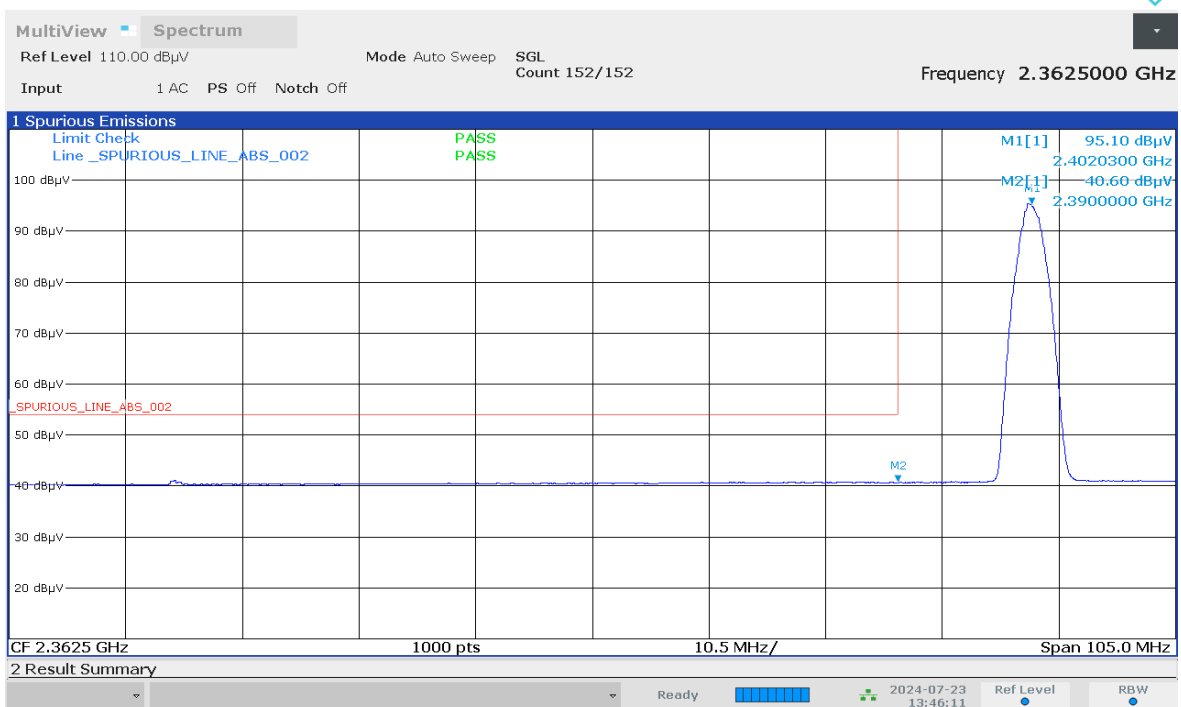

01:46:11 PM 07/23/2024




### Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

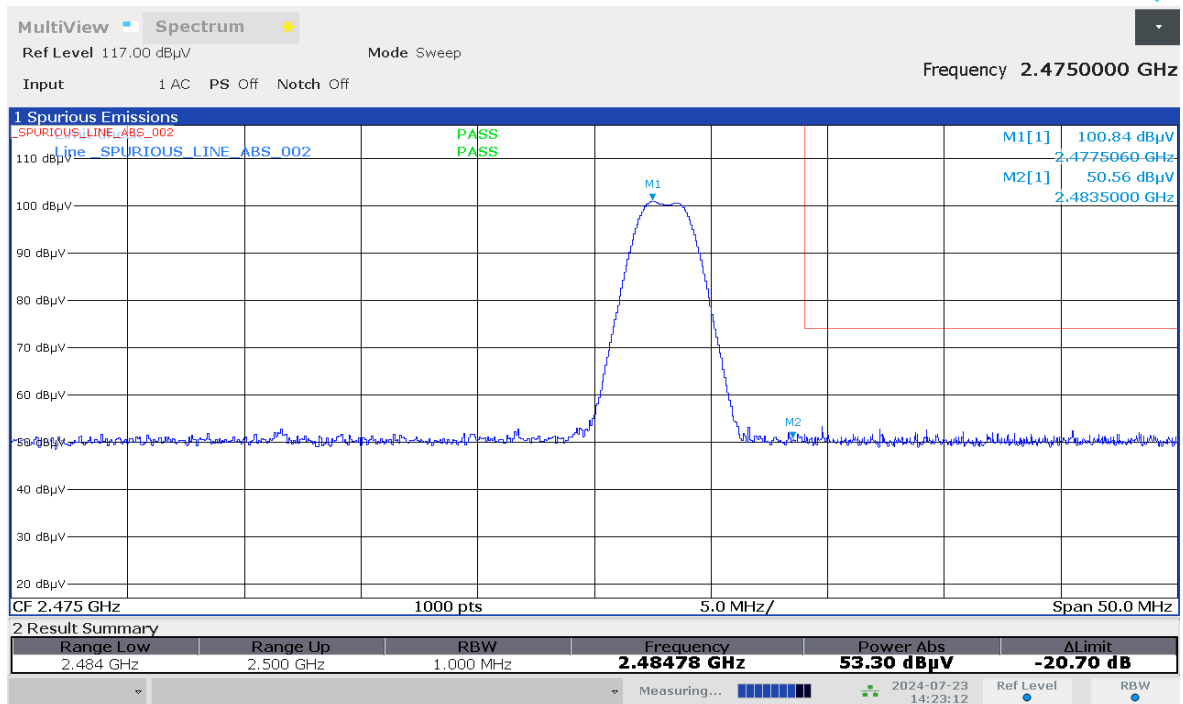


02:23:13 PM 07/23/2024

### Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

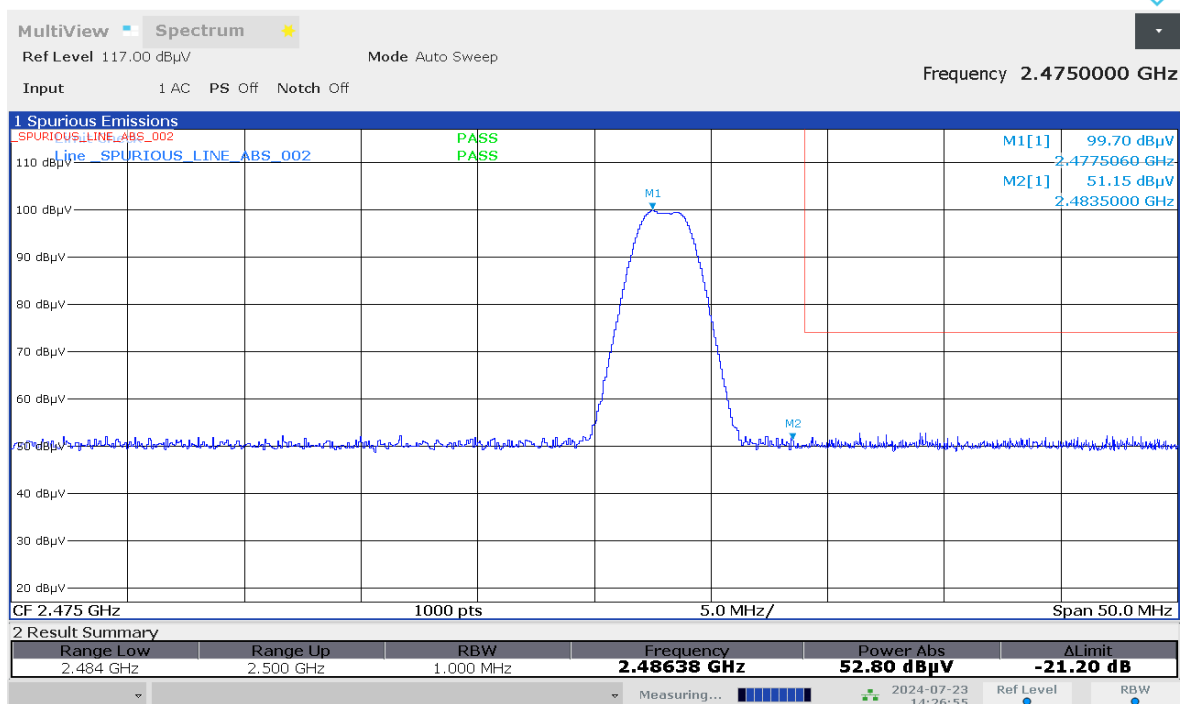


02:26:55 PM 07/23/2024

### Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

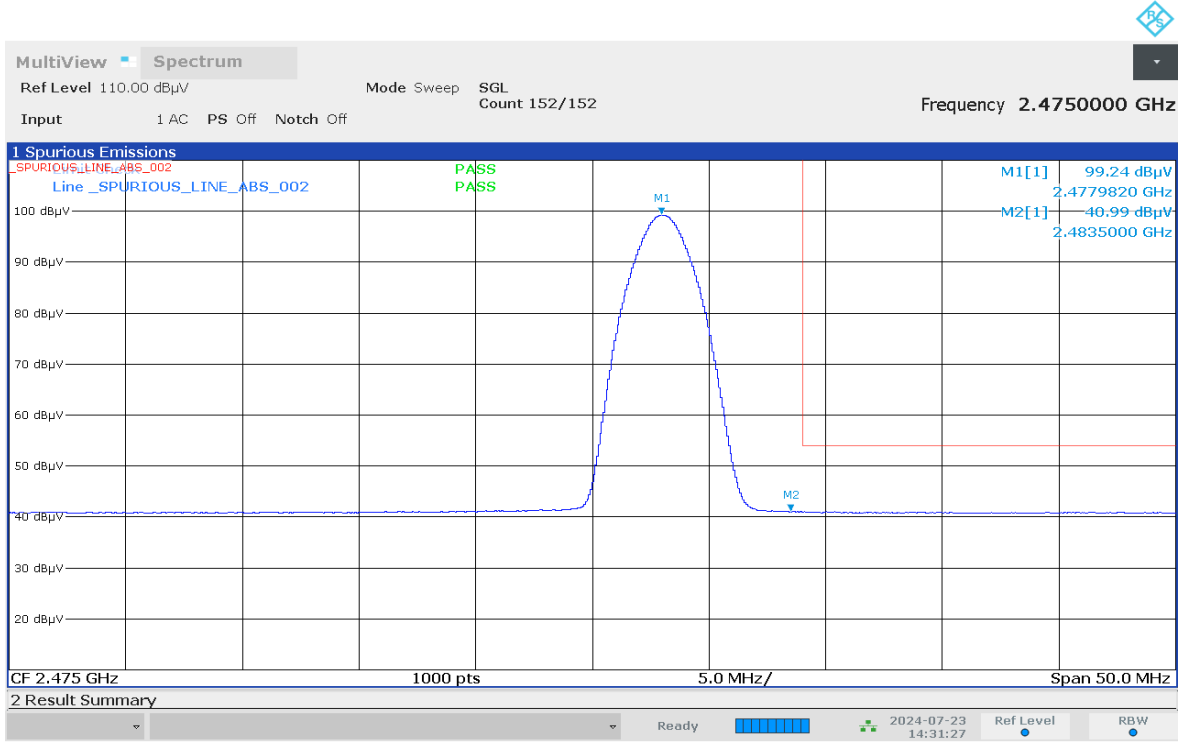

02:31:28 PM 07/23/2024


### Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

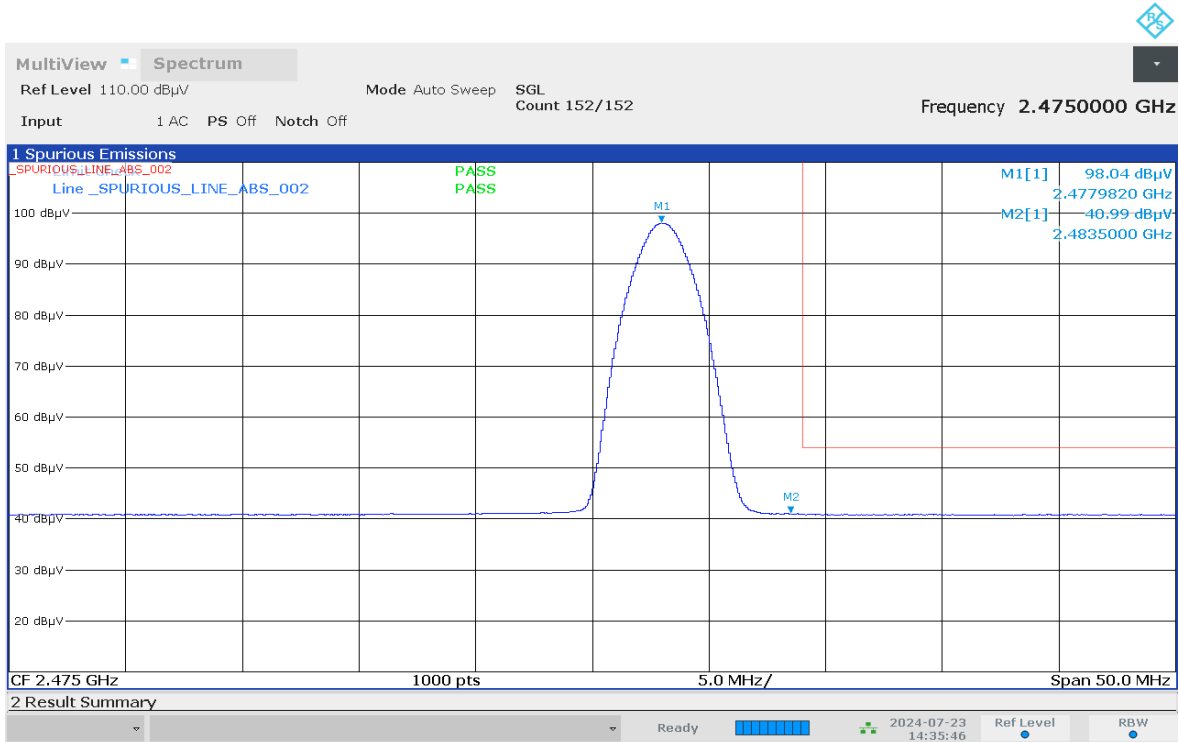


02:35:46 PM 07/23/2024



### VERTICAL, PK

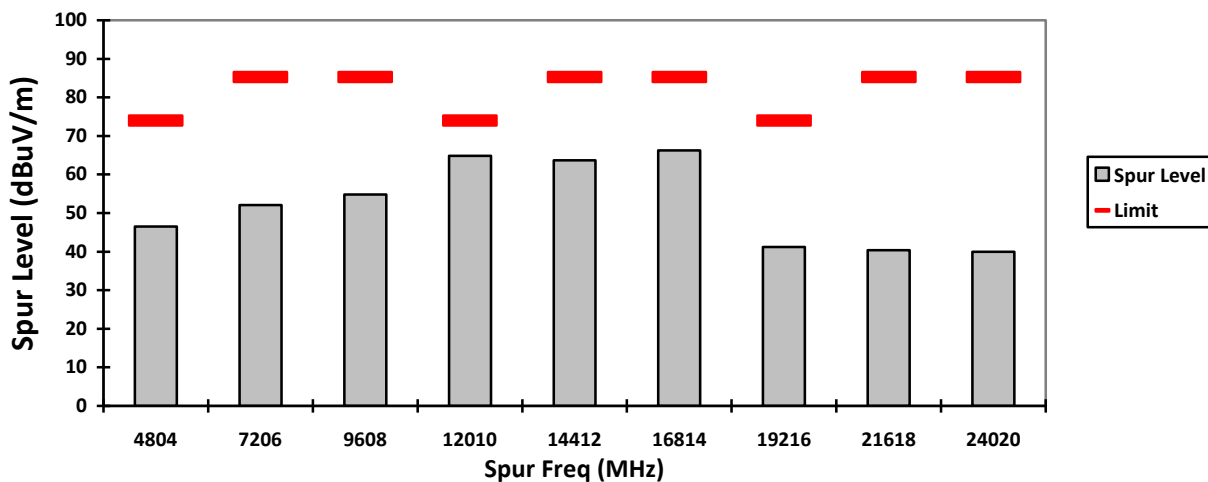


### HORIZONTAL, PK

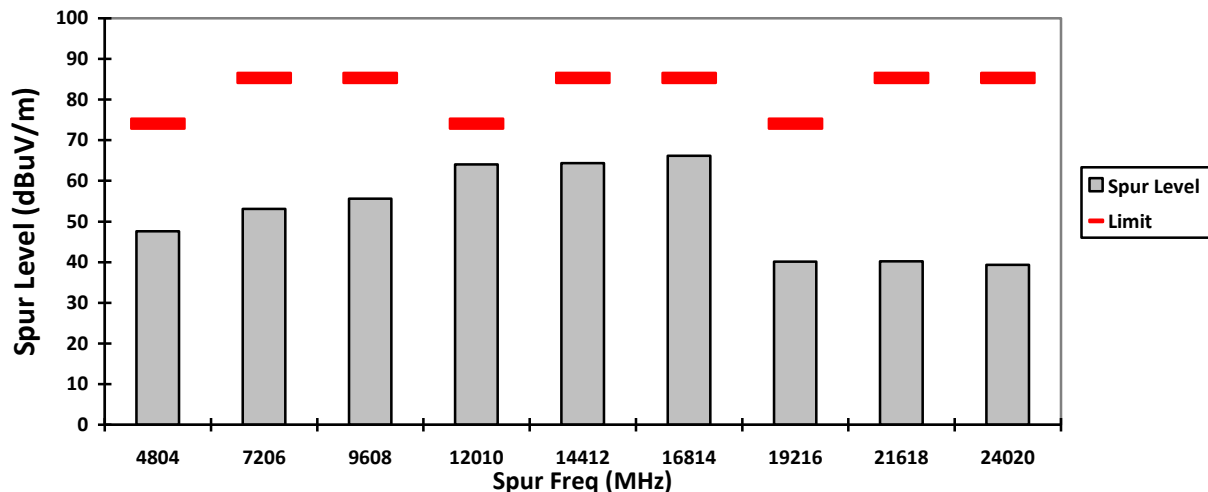




### VERTICAL, AV

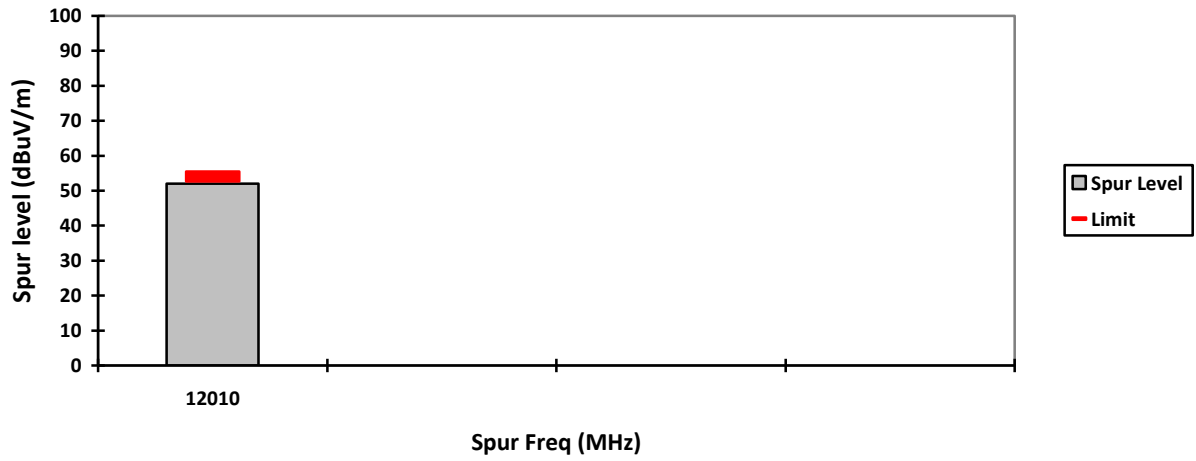


### HORIZONTAL, AV

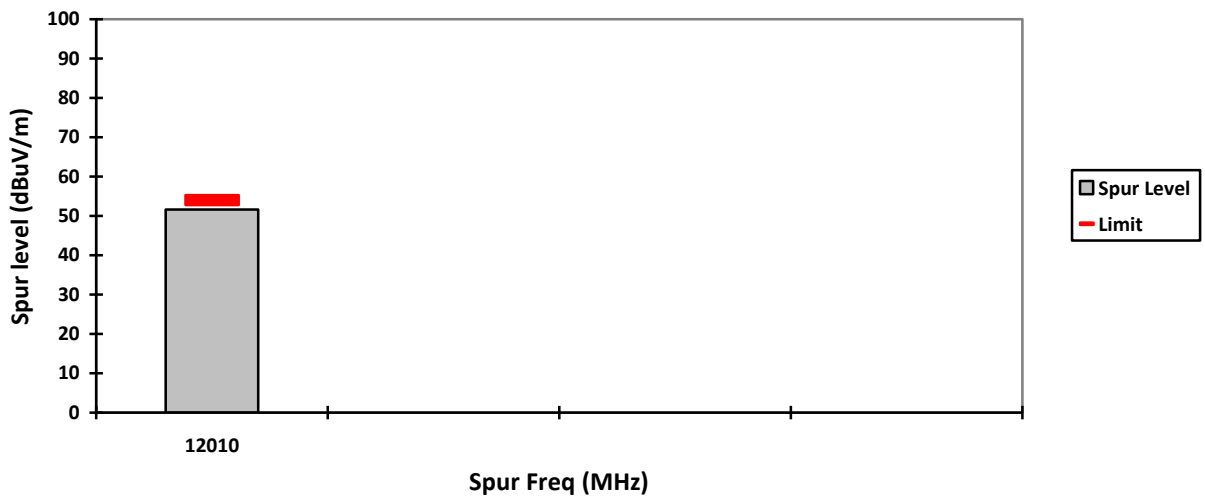





### VERTICAL, PK

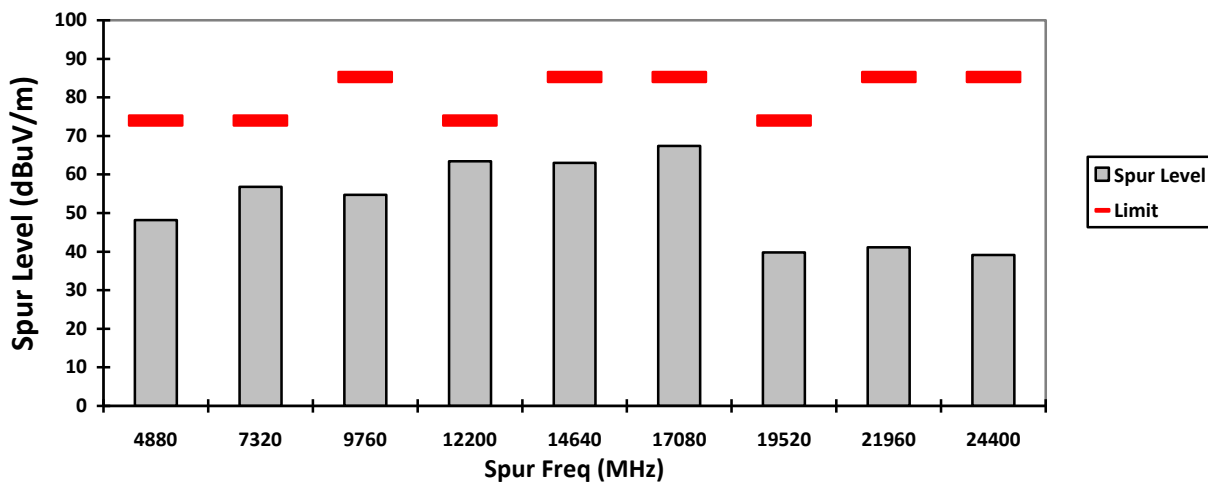


### HORIZONTAL, PK

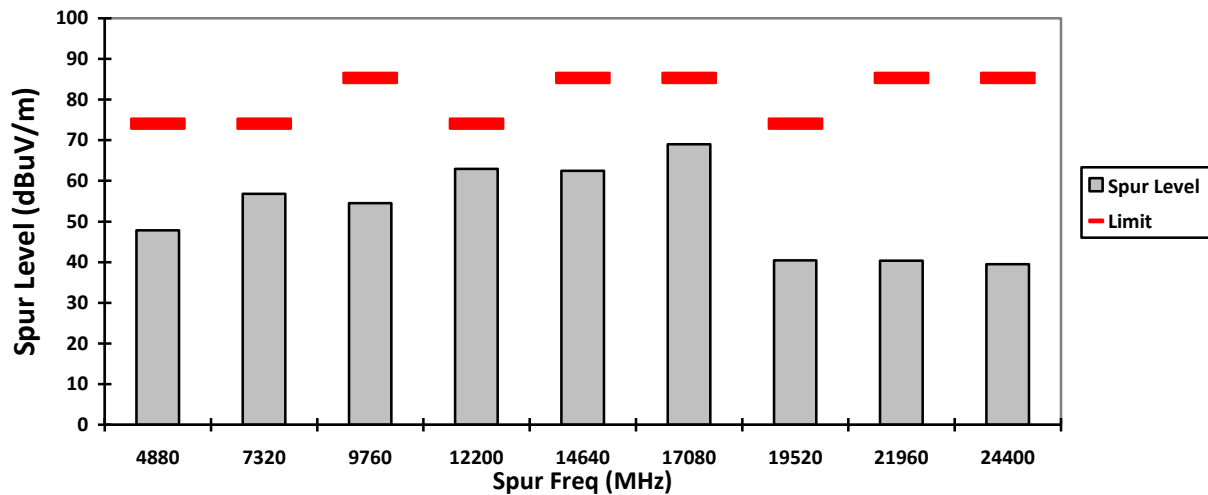

### VERTICAL, AV

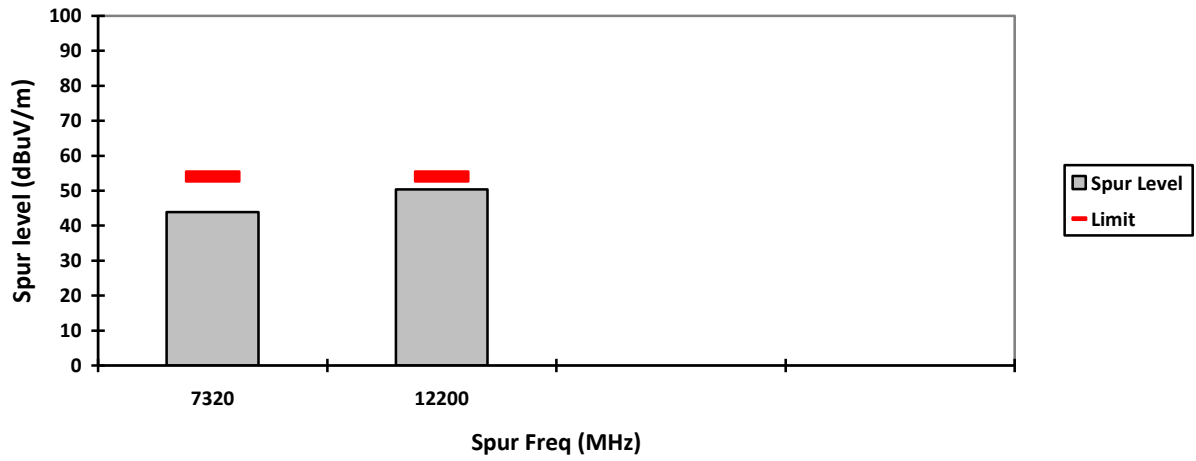


### HORIZONTAL, AV

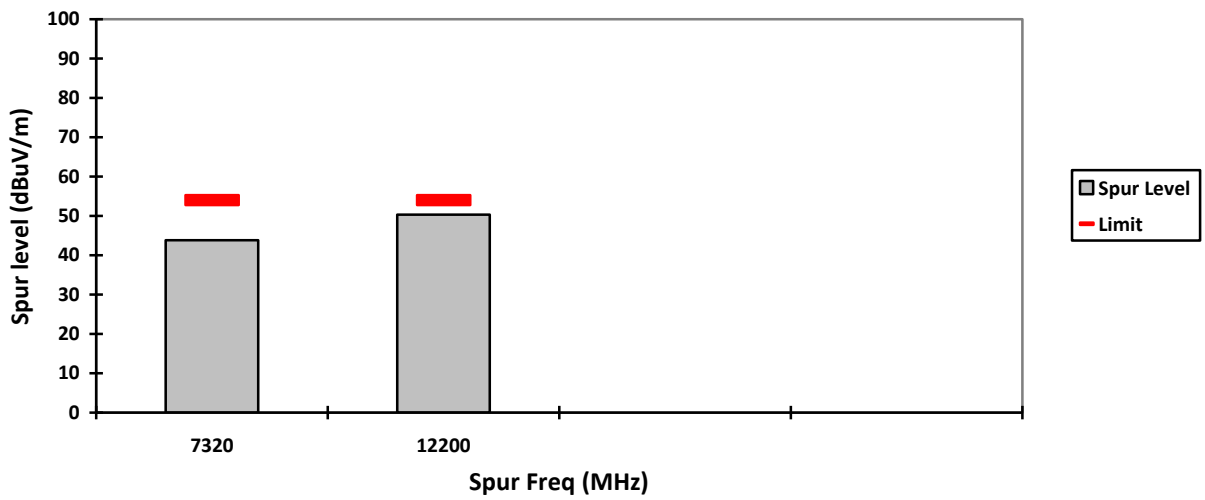





### VERTICAL, PK

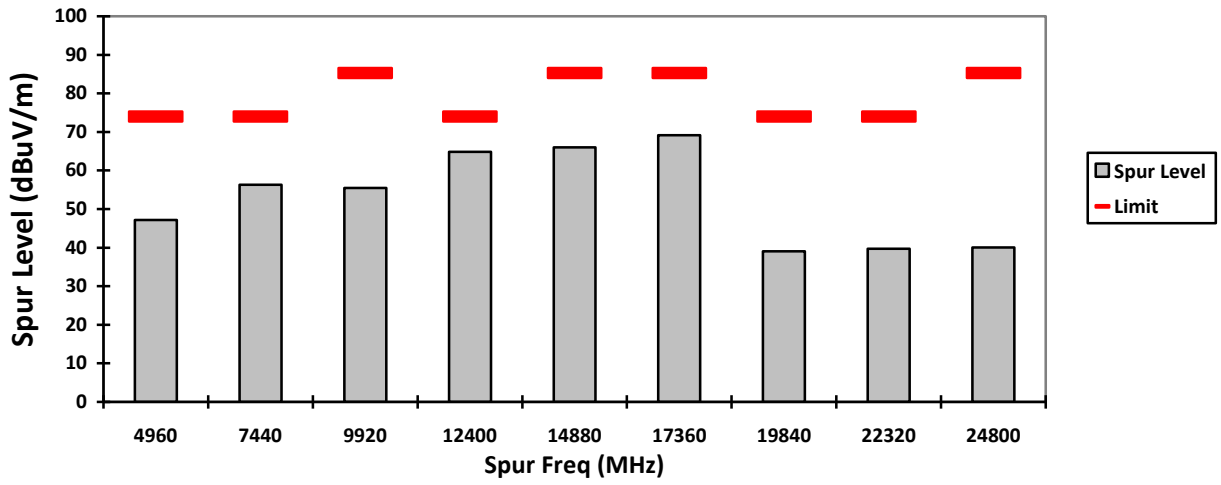


### HORIZONTAL, PK

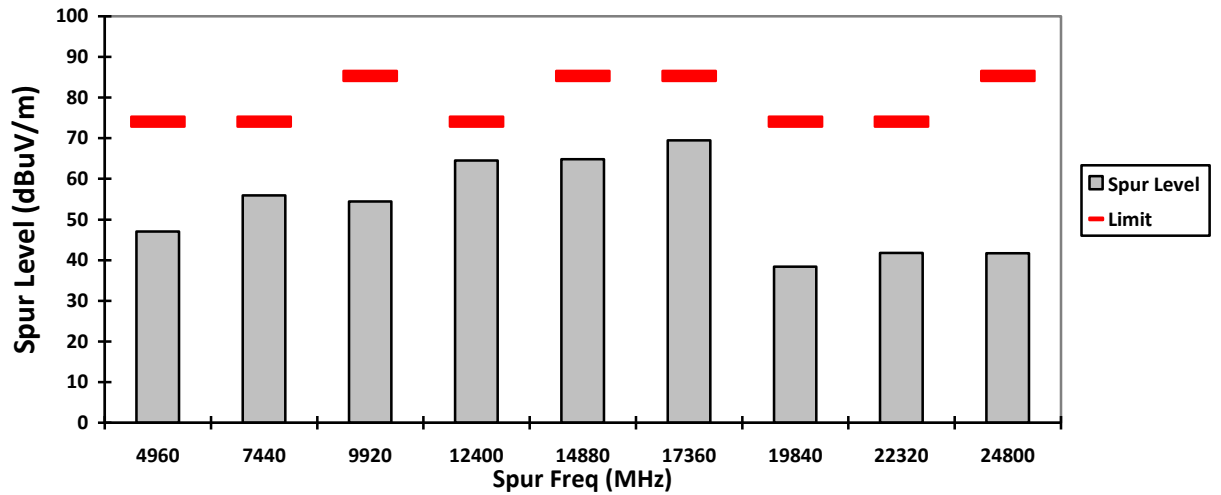

### VERTICAL, AV

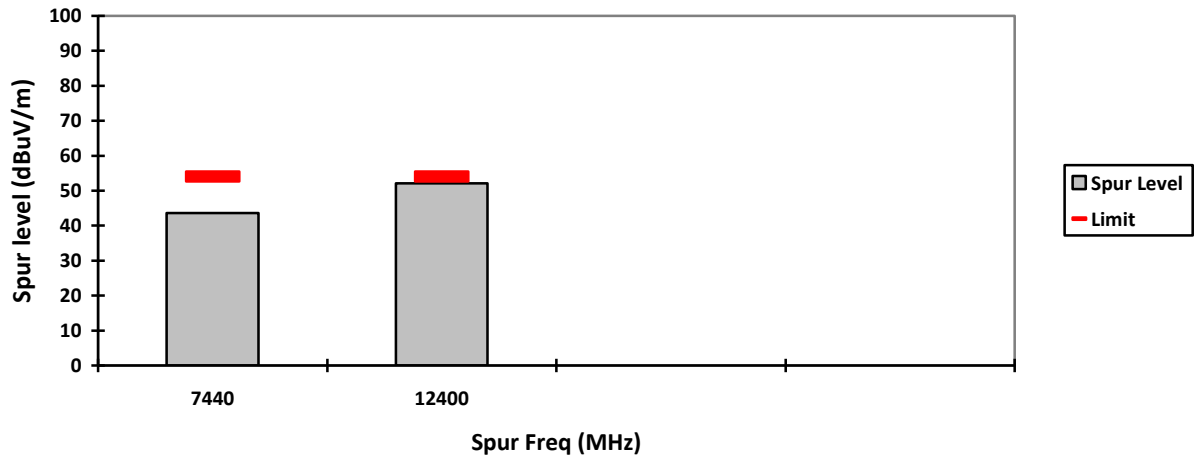


### HORIZONTAL, AV

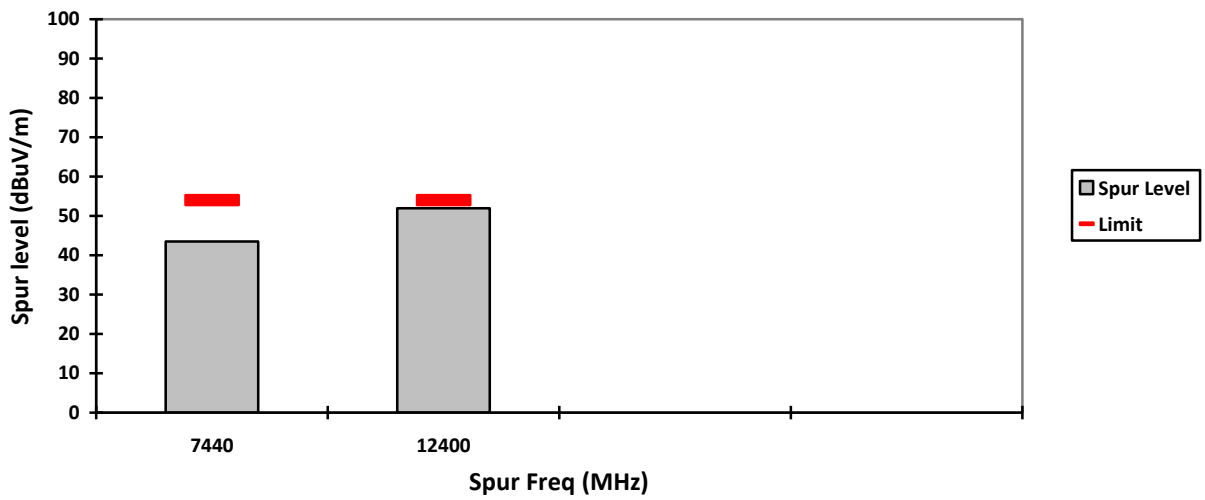







### VERTICAL, PK

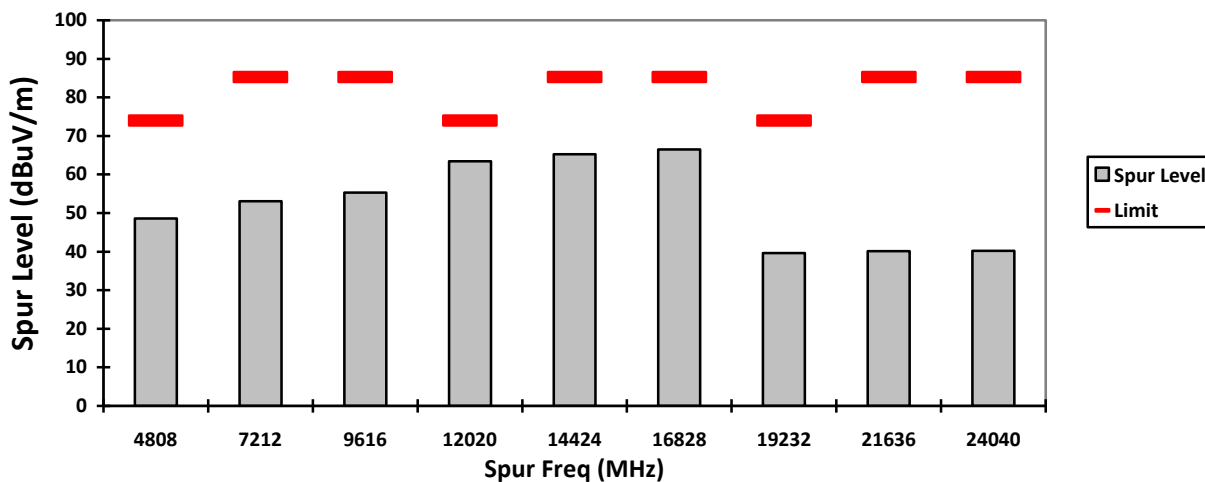


### HORIZONTAL, PK

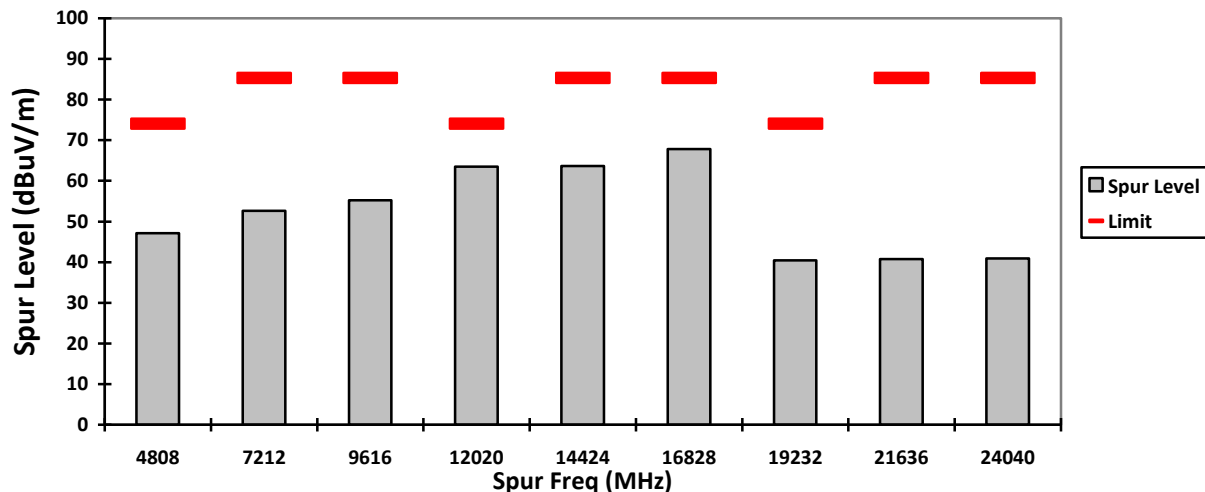

### VERTICAL, AV

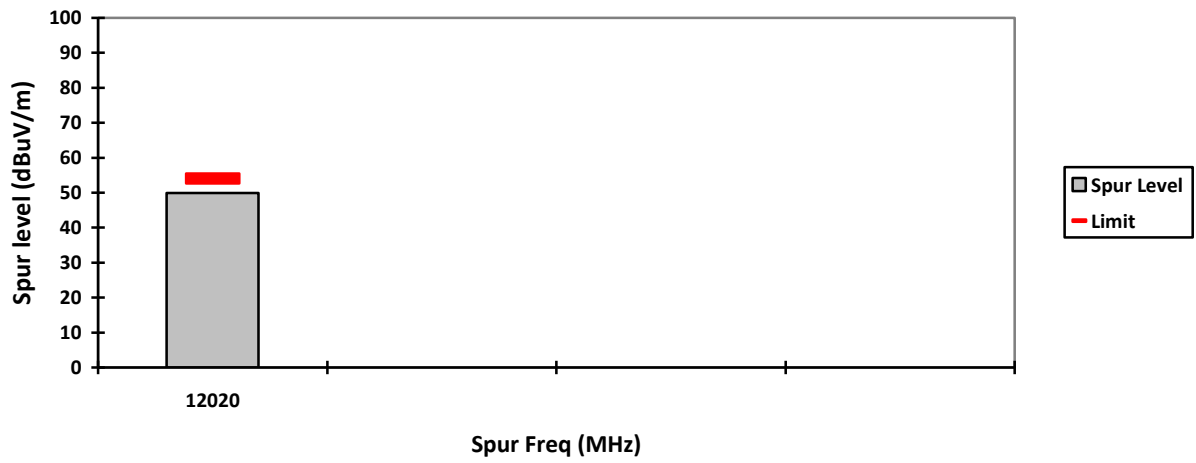


### HORIZONTAL, AV

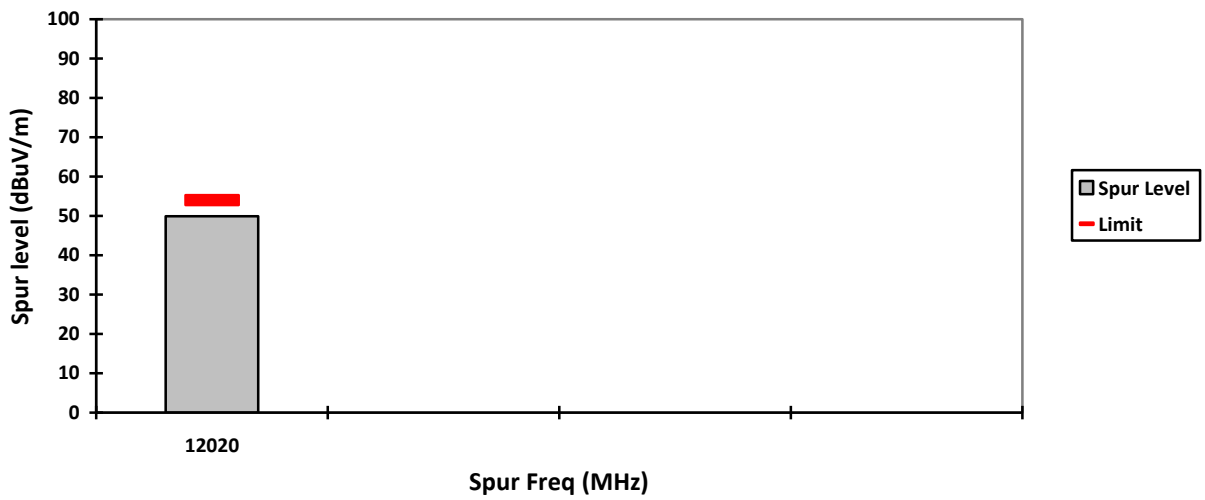





VERTICAL, PK

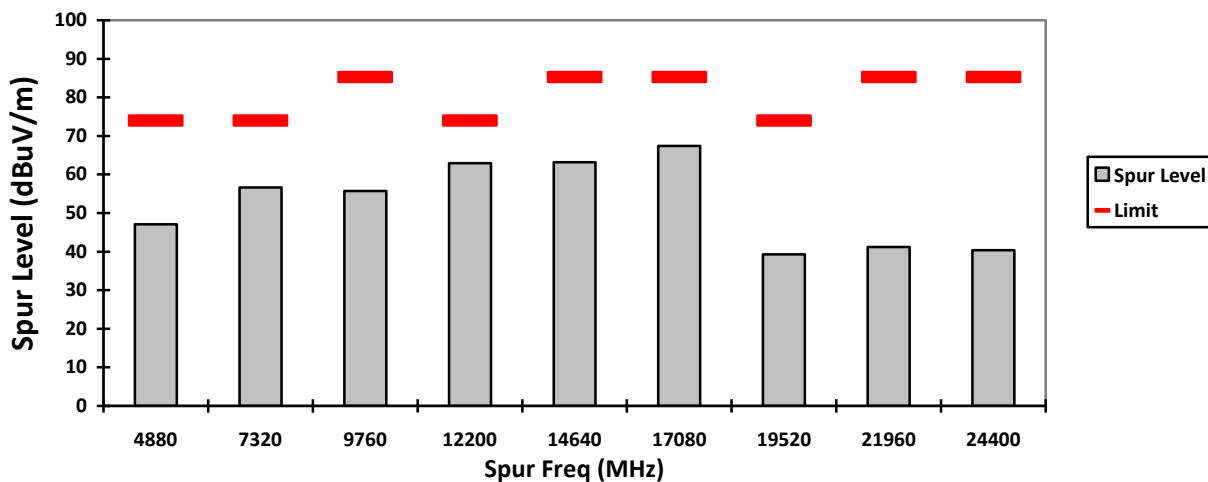


HORIZONTAL, PK

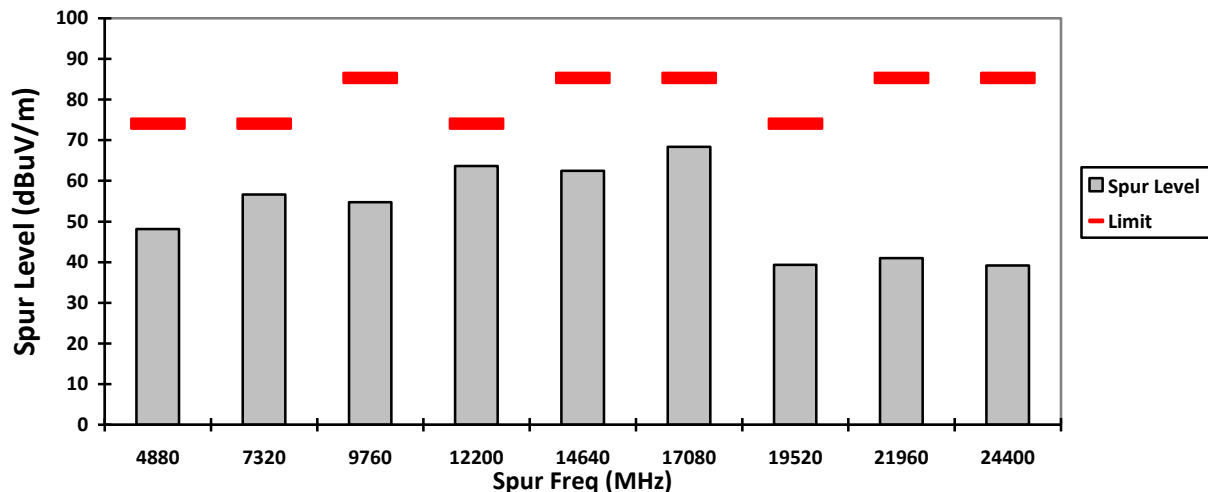

### VERTICAL, AV

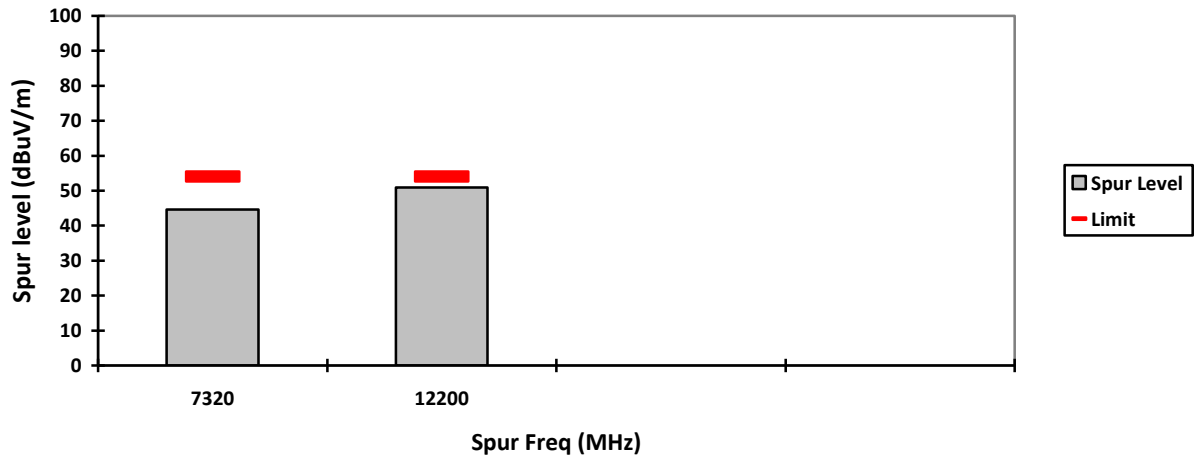


### HORIZONTAL, AV

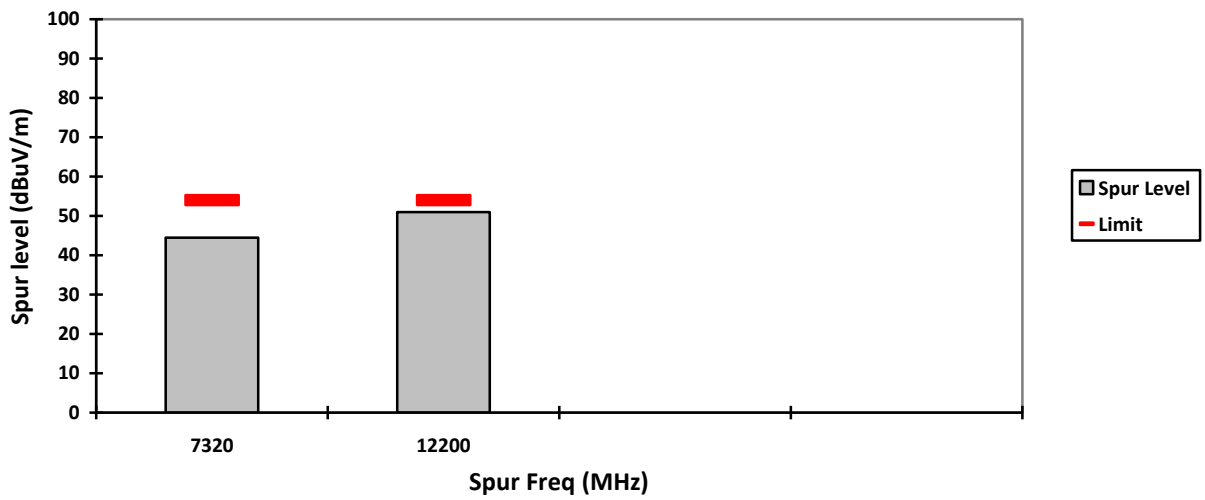





### VERTICAL, PK

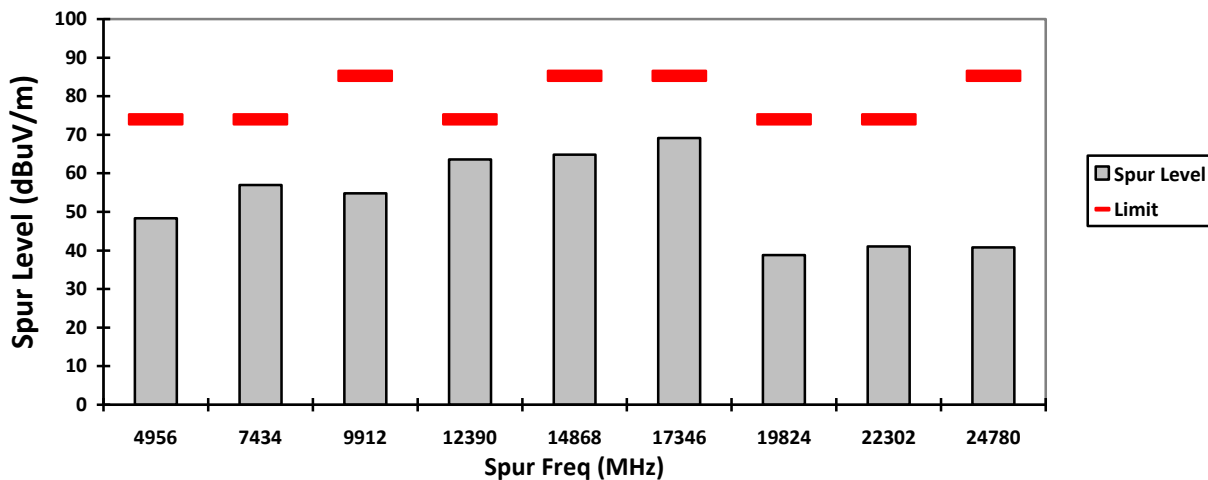


### HORIZONTAL, PK

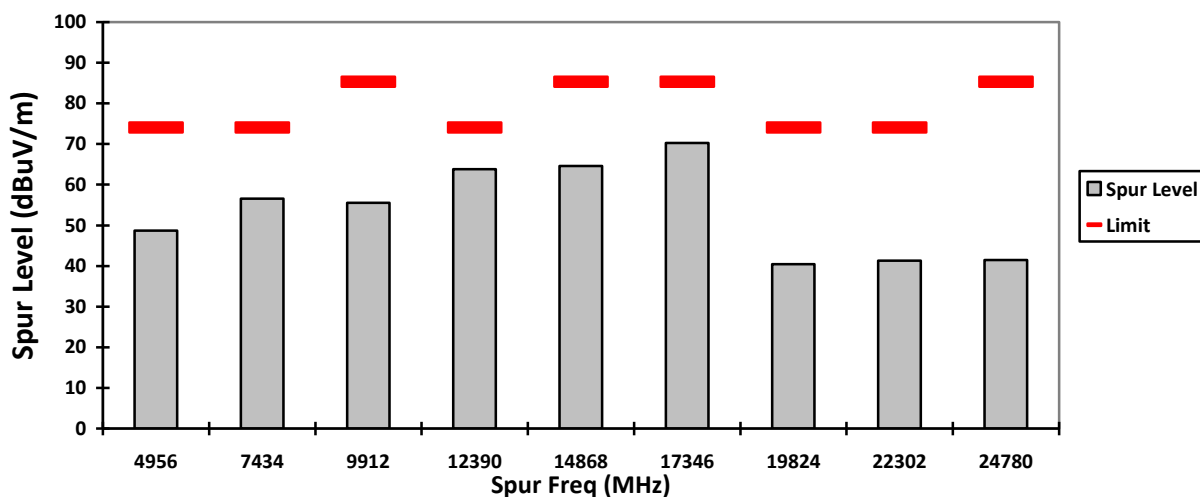

### VERTICAL, AV

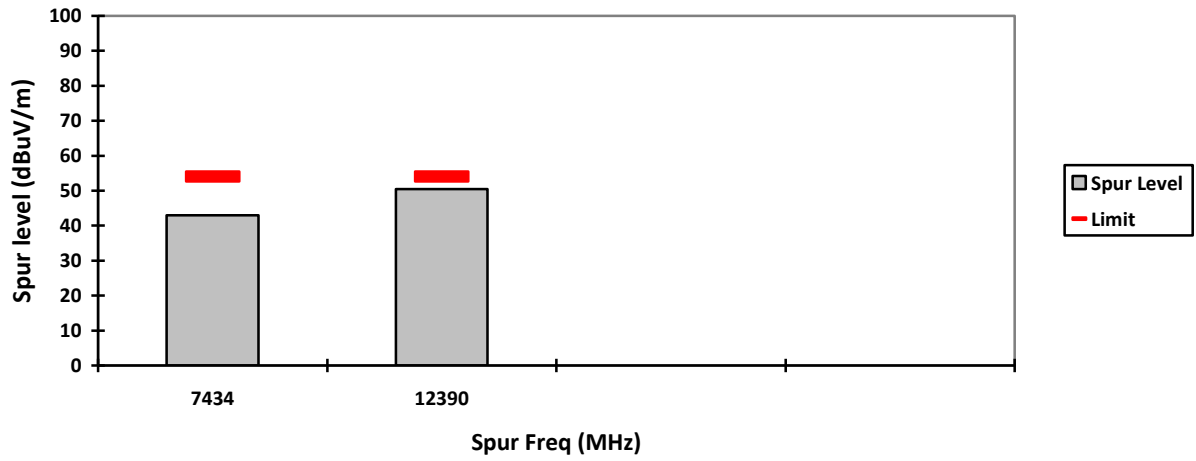


### HORIZONTAL, AV

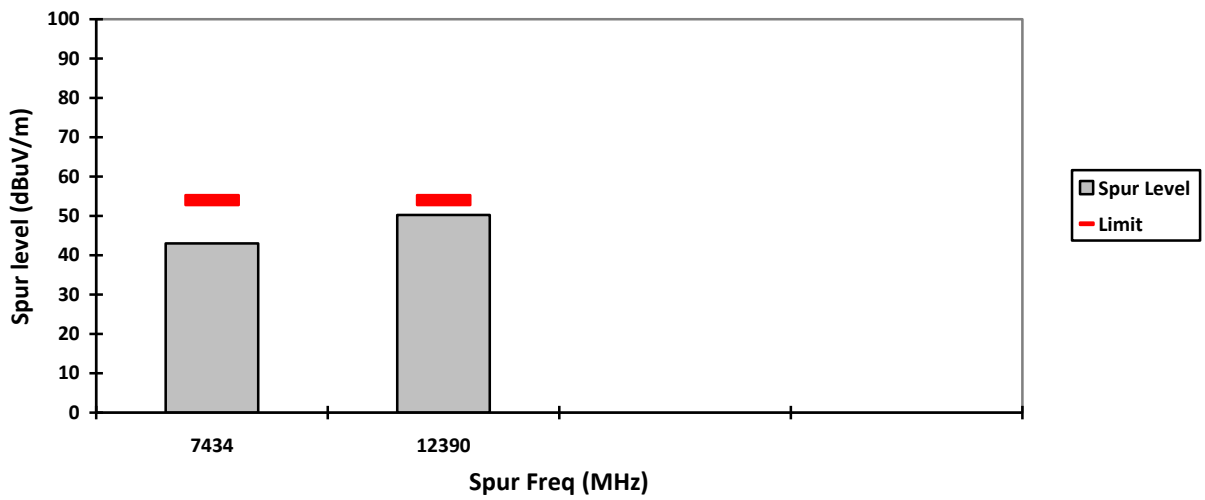



## 6.7 AC Powerline Conducted Emission

### 6.7.1 Test Setup

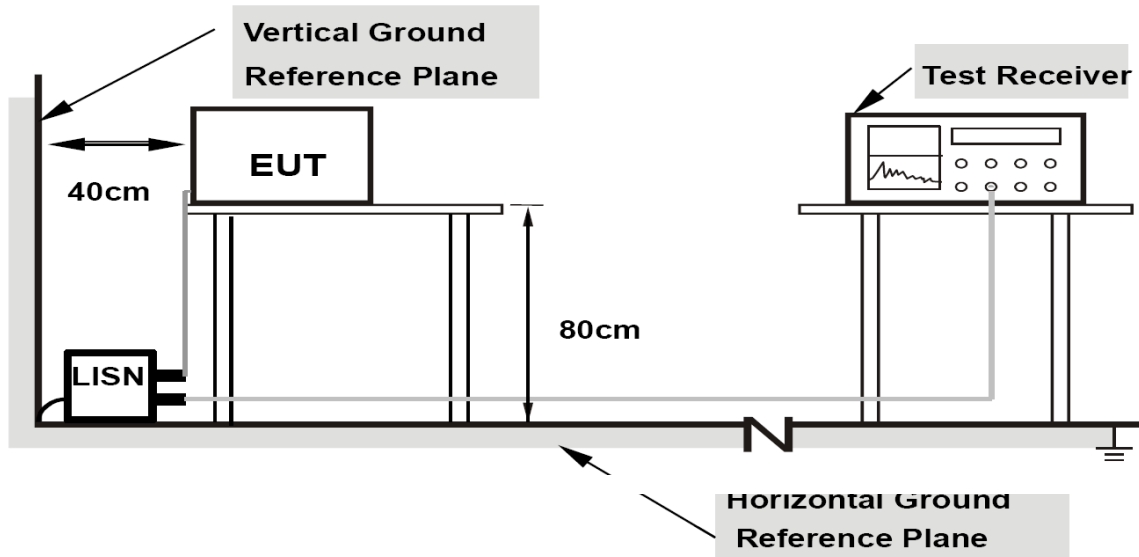

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

### 6.7.2 Test Limits:

**For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.**

**Limits for conducted disturbance at the mains ports of class A ITE**

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

**Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.**

**Limits for conducted disturbance at the mains ports  
of class B ITE**

Frequency range MHz	Limits dB( $\mu$ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50


NOTE 1 The lower limit shall apply at the transition frequencies.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE**

### 6.7.3 Test Result


#### 1) Ambient SUC

Full Spectrum

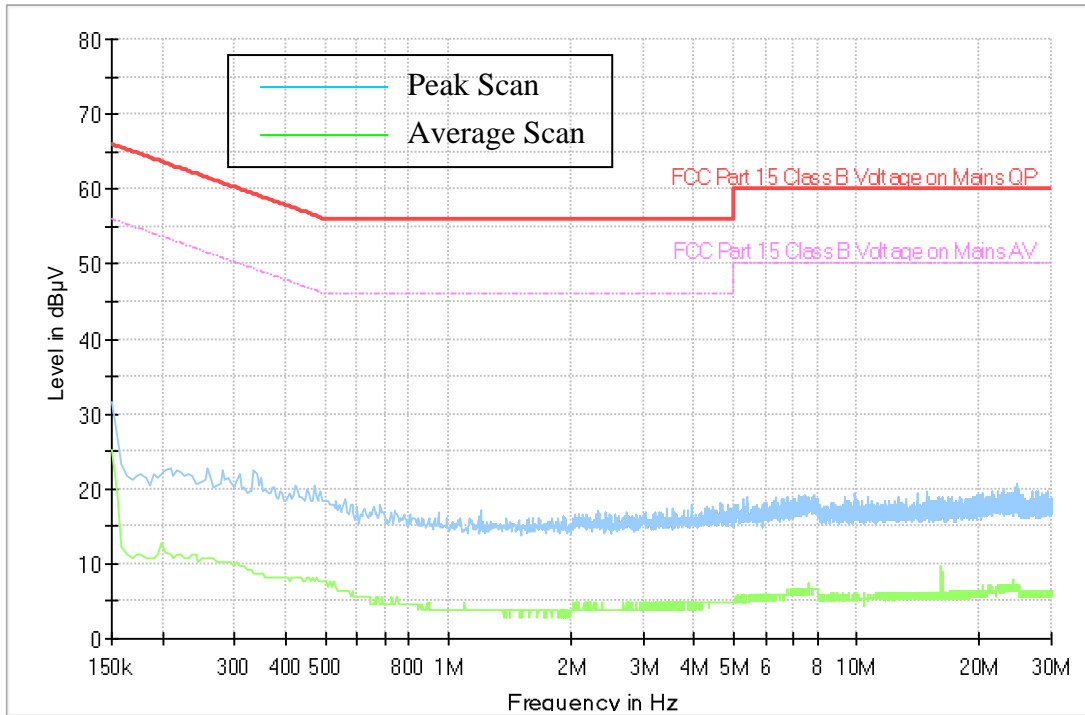

2) Ambient MUC

Full Spectrum

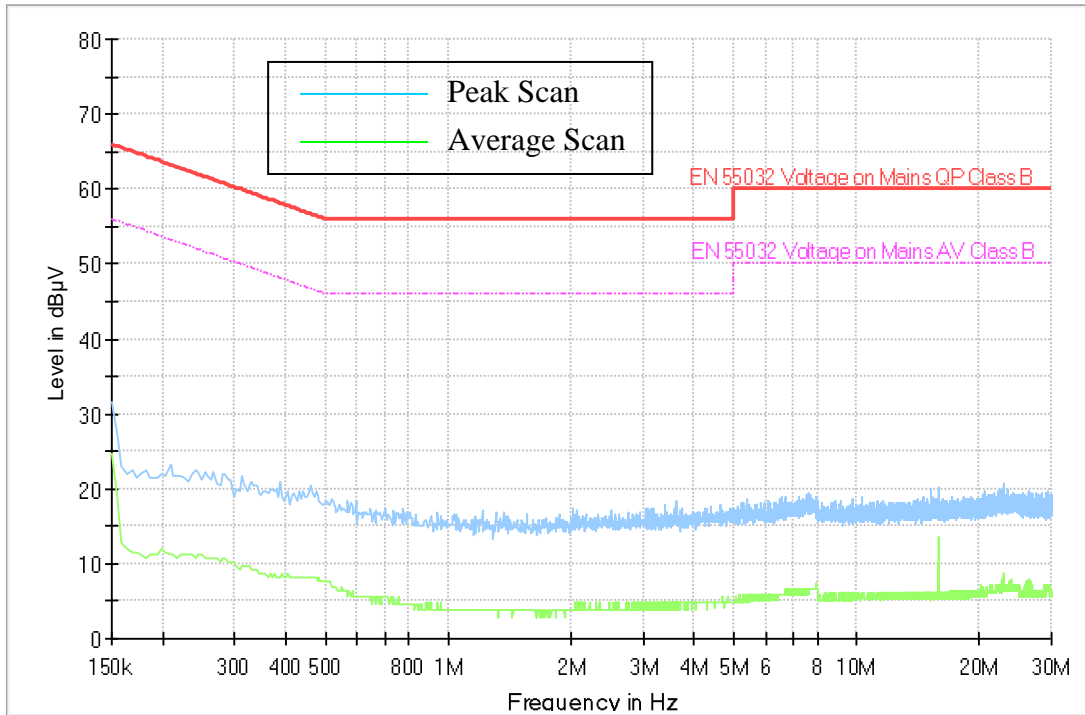


## SUC

### 120 Vac, 60Hz

#### 1) Charger Alone

Full Spectrum

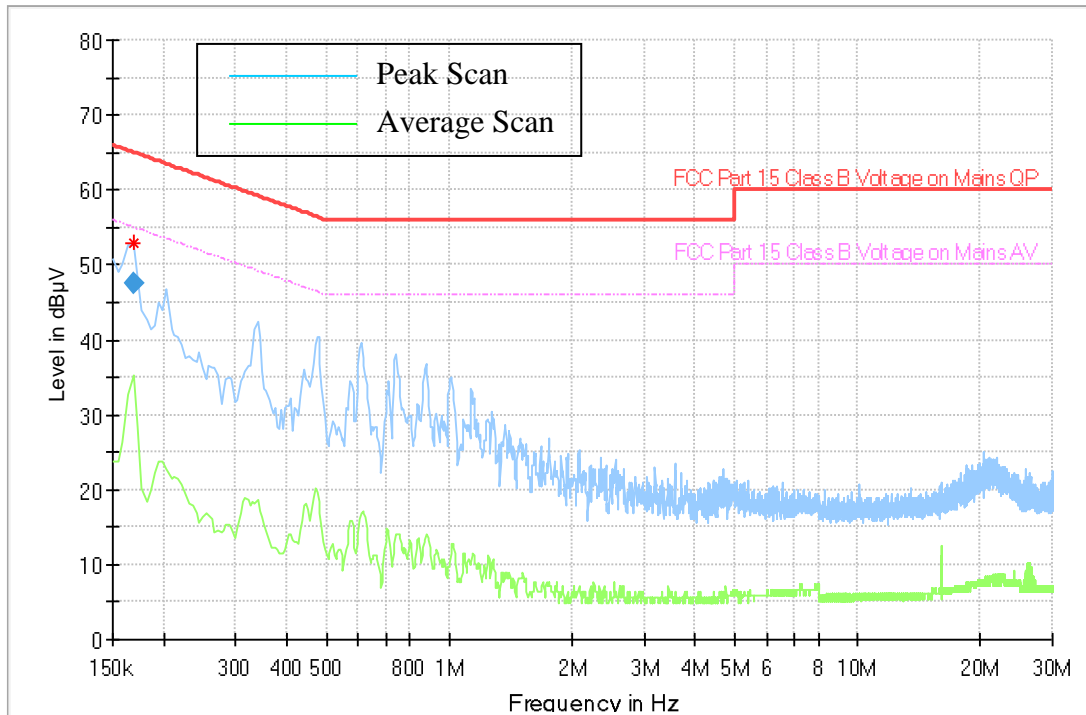


### Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.168000	47.43	---	65.06	17.63	1000.0	9.000	N	ON	10.3	PASS

\* Expanded Uncertainty (U) = +/- 3.48dB

2) Charger + Radio Off

Full Spectrum

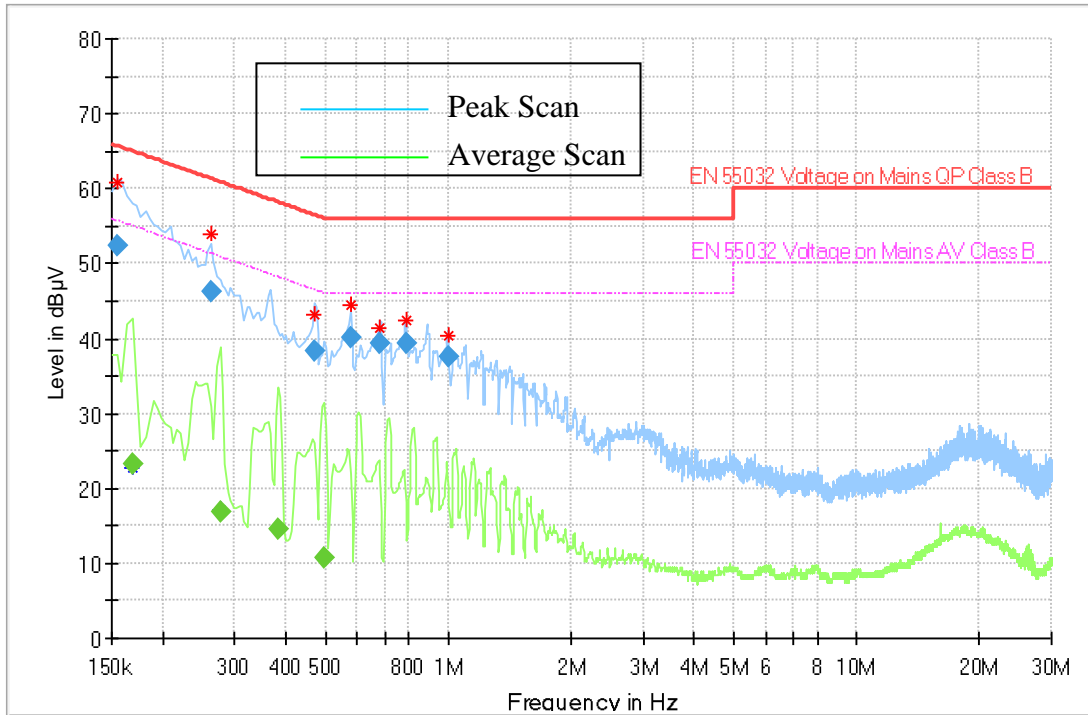


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.154500	52.40	---	65.75	13.36	1000.0	9.000	L1	ON	10.3	PASS
0.168000	---	23.20	55.06	31.86	1000.0	9.000	L1	ON	10.3	PASS
0.262500	46.34	---	61.35	15.02	1000.0	9.000	N	ON	10.3	PASS
0.276000	---	16.75	50.94	34.18	1000.0	9.000	L1	ON	10.3	PASS
0.384000	---	14.54	48.19	33.65	1000.0	9.000	N	ON	10.3	PASS
0.469500	38.37	---	56.52	18.15	1000.0	9.000	N	ON	10.3	PASS
0.496500	---	10.73	46.06	35.33	1000.0	9.000	N	ON	10.3	PASS
0.577500	40.20	---	56.00	15.80	1000.0	9.000	L1	ON	10.3	PASS
0.681000	39.34	---	56.00	16.66	1000.0	9.000	L1	ON	10.3	PASS
0.789000	39.27	---	56.00	16.73	1000.0	9.000	L1	ON	10.3	PASS
1.000500	37.58	---	56.00	18.42	1000.0	9.000	L1	ON	10.3	PASS

\* Expanded Uncertainty (U) = +/- 3.48dB

3) Charger + Radio Standby

Full Spectrum

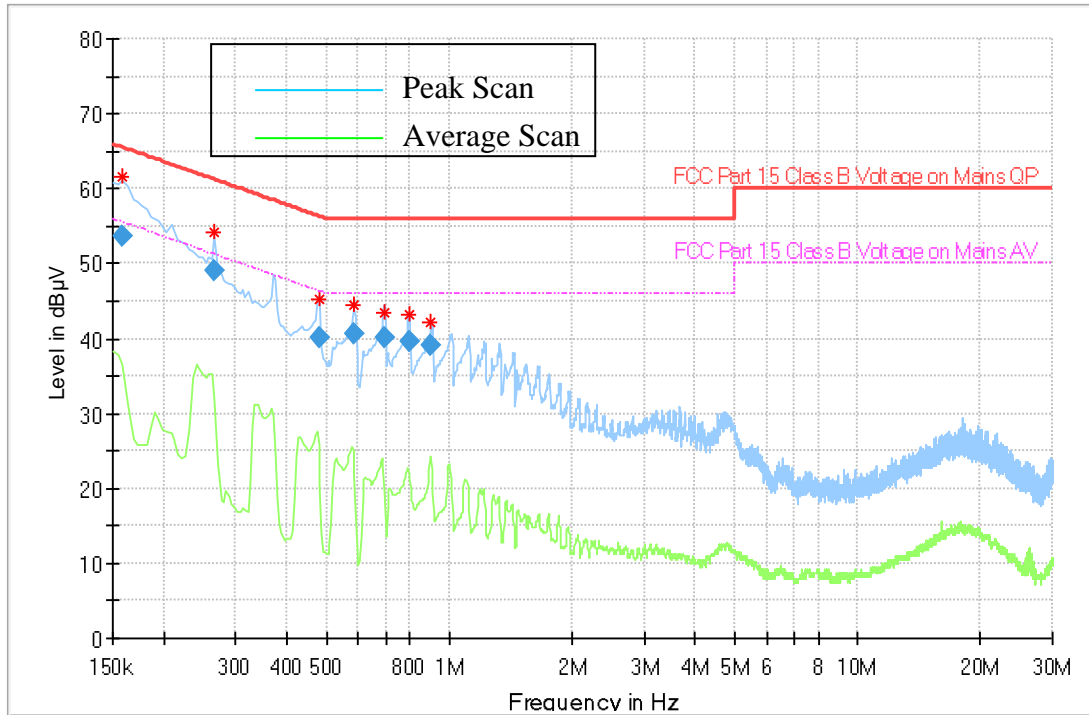


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.159000	53.68	---	65.52	11.84	1000.0	9.000	L1	ON	10.3	PASS
0.267000	48.96	---	61.21	12.25	1000.0	9.000	L1	ON	10.3	PASS
0.483000	40.19	---	56.29	16.10	1000.0	9.000	L1	ON	10.3	PASS
0.582000	40.75	---	56.00	15.25	1000.0	9.000	L1	ON	10.3	PASS
0.694500	40.09	---	56.00	15.91	1000.0	9.000	L1	ON	10.3	PASS
0.802500	39.54	---	56.00	16.46	1000.0	9.000	L1	ON	10.3	PASS
0.901500	39.04	---	56.00	16.97	1000.0	9.000	L1	ON	10.3	PASS

\* Expanded Uncertainty (U) = +/- 3.48dB

4) Charger + Radio TX BT LE 2M (CH:2478)

Full Spectrum

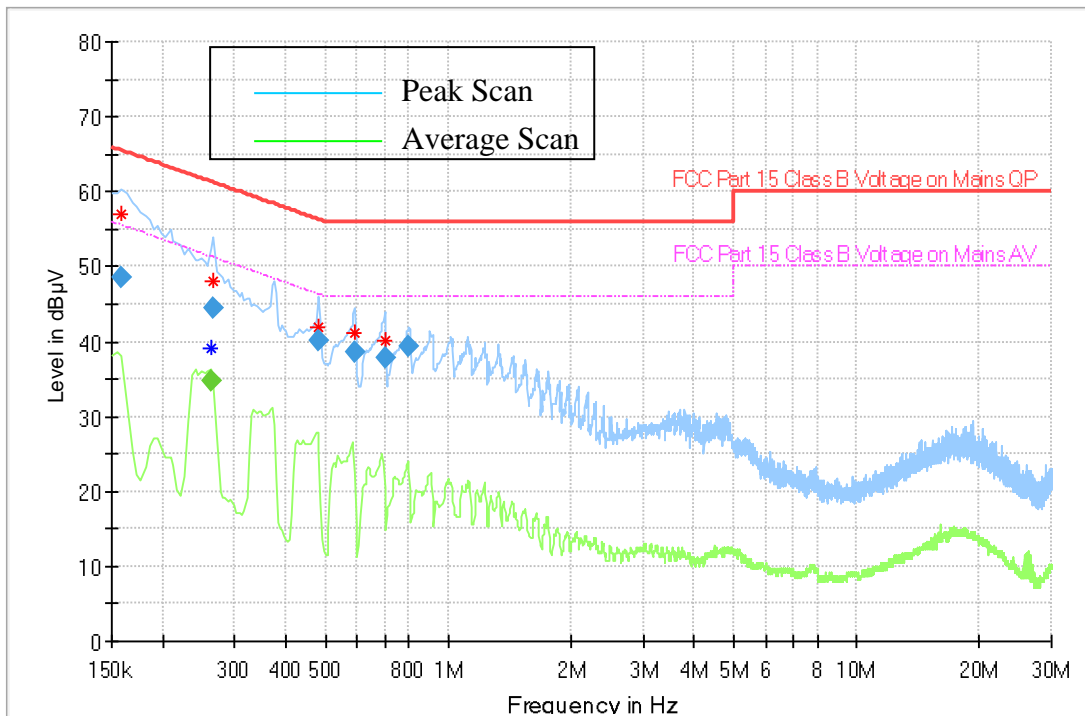

Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.159000	48.66	---	65.52	16.85	1000.0	9.000	N	ON	10.3	PASS
0.262500	---	34.71	51.35	16.65	1000.0	9.000	L1	ON	10.3	PASS
0.267000	44.43	---	61.21	16.78	1000.0	9.000	N	ON	10.3	PASS
0.483000	40.03	---	56.29	16.26	1000.0	9.000	L1	ON	10.3	PASS
0.591000	38.56	---	56.00	17.44	1000.0	9.000	L1	ON	10.3	PASS
0.699000	37.81	---	56.00	18.19	1000.0	9.000	L1	ON	10.3	PASS
0.802500	39.27	---	56.00	16.73	1000.0	9.000	L1	ON	10.3	PASS

\* Expanded Uncertainty (U) = +/- 3.48dB




## MUC

### 120 Vac, 60Hz


#### 5) Charger Alone

Full Spectrum

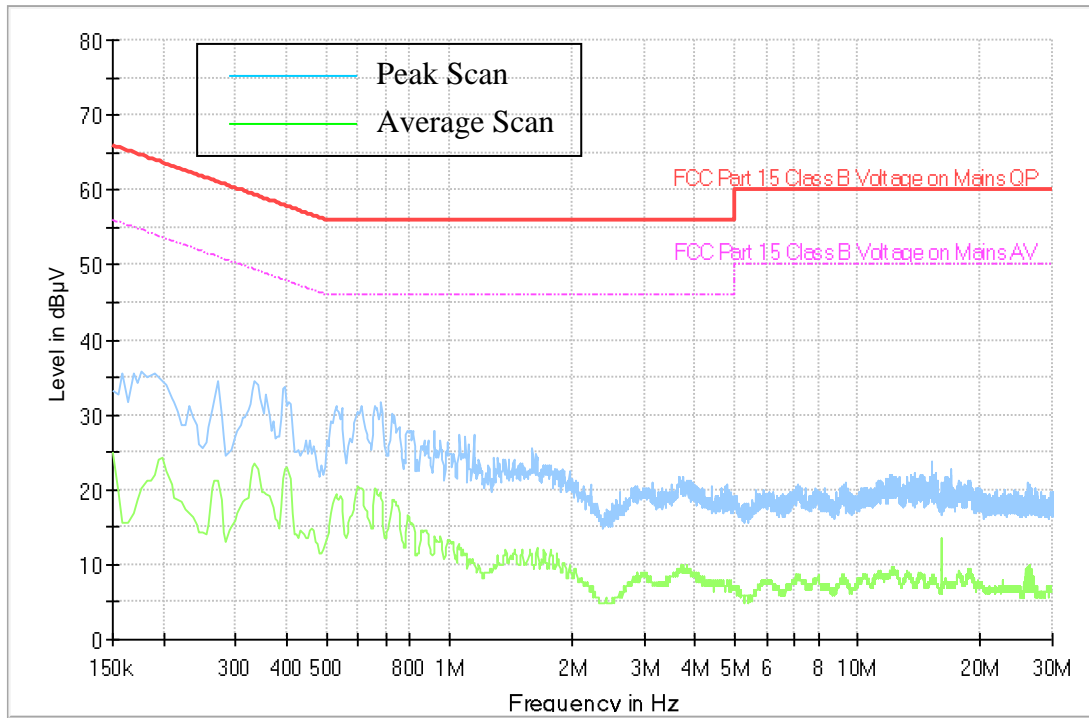

6) Charger + Radio Off

Full Spectrum

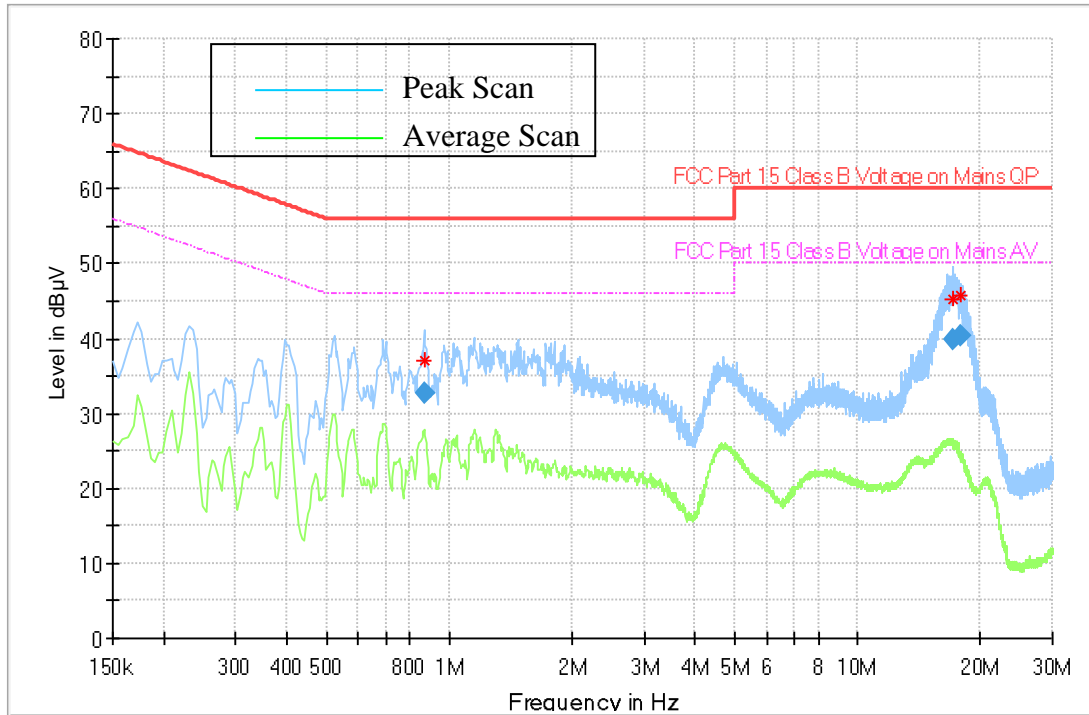


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.870000	32.69	---	56.00	23.31	1000.0	9.000	L1	ON	10.3	PASS
17.079000	39.79	---	60.00	20.21	1000.0	9.000	L1	ON	10.8	PASS
17.790000	40.40	---	60.00	19.60	1000.0	9.000	L1	ON	10.8	PASS

\* Expanded Uncertainty (U) = +/- 3.48dB

7) Charger + Radio Standby

Full Spectrum

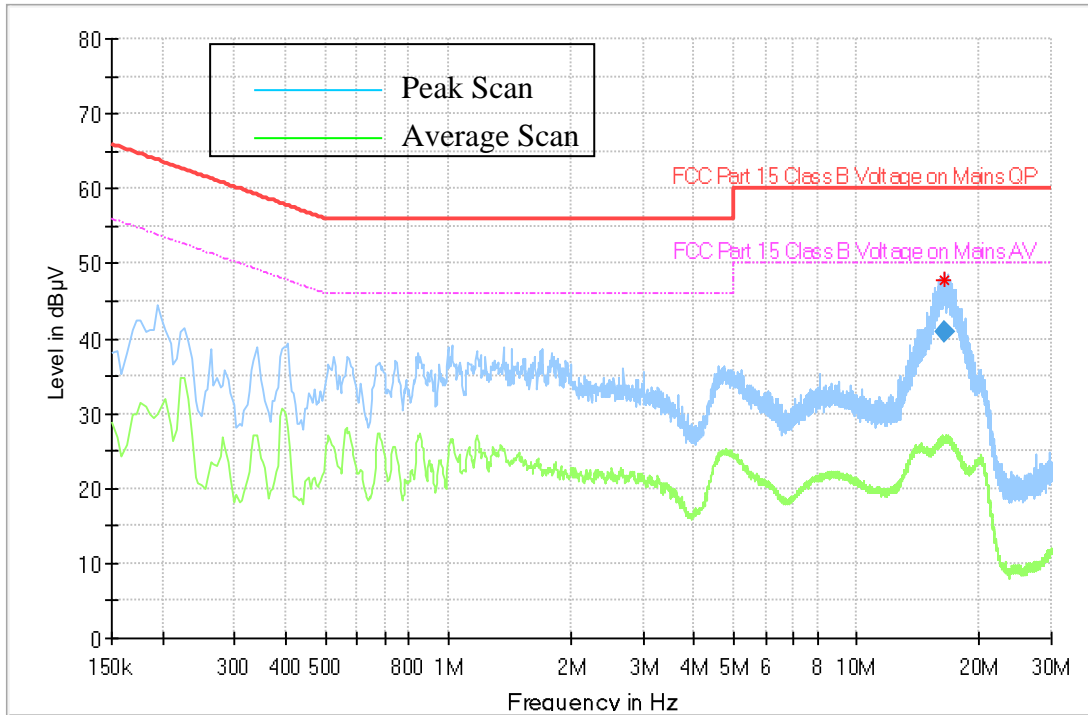


Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
16.480500	40.80	---	60.00	19.20	1000.0	9.000	L1	ON	10.8	PASS

\* Expanded Uncertainty (U) = +/- 3.48dB

8) Charger + Radio TX BT LE 2M (CH:2478)

Full Spectrum

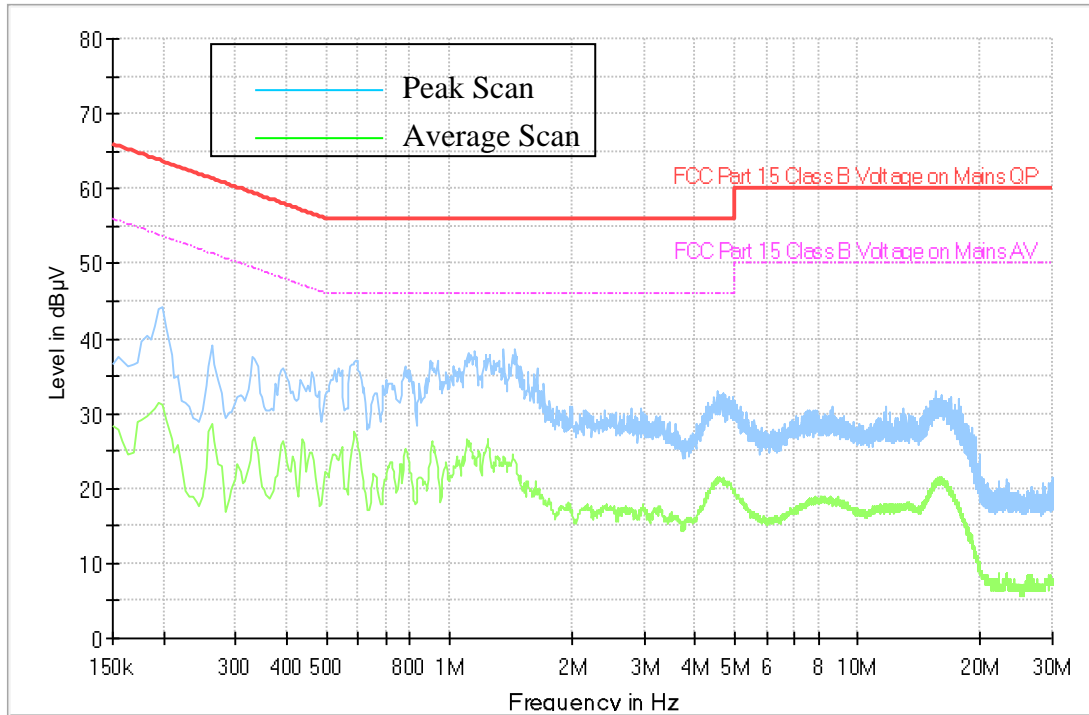

Report Template Document Number : FCD-0069  
Report Template Revision Number : Rev.P

**Report ID: 30468-RF-00010**  
**FCC ID: AZ489FT7149**  
**IC: 109U-89FT7149**

**END OF TEST REPORT**