



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**TEST REPORT**

*For*

**Two Way Portable Radio R7**

**MODEL NUMBER: AAH06UCN9RB1AN (IC Model: PMUF2000ABB)**

**REPORT NUMBER: 4790494290-1-RF-2**

**ISSUE DATE: August 24, 2022**

**FCC ID: AZ489FT7169**

**IC: 109U-89FT7169**

*Prepared for*

**Motorola Solutions, Inc.**

**8000, West Sunrise Blvd., Ft Lauderdale, Florida 33322, United States**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
<u>V0</u>	<u>August 24, 2022</u>	<u>Initial Issue</u>	<u></u>

**Summary of Test Results**

<b>Summary of Test Results</b>			
<b>Test Item</b>	<b>Clause</b>	<b>Limit/Requirement</b>	<b>Result</b>
Antenna Requirement	N/A	FCC 15.203 RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013 Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013 Clause 7.8.5	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
20 dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013 Clause 6.9.2	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
Carrier Hopping Channel Separation	ANSI C63.10-2013 Clause 7.8.2	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
Number of Hopping Frequency	ANSI C63.10-2013 Clause 7.8.3	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
Time of Occupancy (Dwell Time)	ANSI C63.10-2013 Clause 7.8.4	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
Conducted Bandedge and Spurious Emission	ANSI C63.10-2013 Clause 6.10.4 & Clause 7.8.8	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013 Clause 6.3 & 6.5 & 6.6	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C><ISED RSS-247 ISSUE 2> when <Accuracy Method> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>6</b>
<b>2. TEST METHODOLOGY</b> .....	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>CHANNEL LIST</i> .....	9
5.3. <i>MAXIMUM EIRP</i> .....	9
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	10
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	11
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i> .....	12
5.8. <i>SETUP DIAGRAM</i> .....	13
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED</b> .....	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>17</b>
7.1. <i>CONDUCTED OUTPUT POWER</i> .....	17
7.2. <i>20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i> .....	18
7.3. <i>CARRIER HOPPING CHANNEL SEPARATION</i> .....	19
7.4. <i>NUMBER OF HOPPING FREQUENCY</i> .....	21
7.5. <i>TIME OF OCCUPANCY (DWELL TIME)</i> .....	22
7.6. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION</i> .....	24
7.7. <i>DUTY CYCLE</i> .....	26
<b>8. RADIATED TEST RESULTS</b> .....	<b>27</b>
8.1. <i>RESTRICTED BANDEDGE</i> .....	36
8.2. <i>RESTRICTED BANDEDGE WITH CHARGING WORST CASE</i> .....	45
8.3. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i> .....	47
8.4. <i>SPURIOUS EMISSIONS WITH CHARGING WORST CASE(1 GHZ~3 GHZ)</i> .....	53
8.5. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i> .....	55
8.6. <i>SPURIOUS EMISSIONS WITH CHARGING WORST CASE(3 GHZ~18 GHZ)</i> .....	73
8.7. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i> .....	75
8.8. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i> .....	78



8.9.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....	80
8.10.	SPURIOUS EMISSIONS WITH CHARGING WORST CASE(30 MHZ~1 GHZ) .....	82
<b>9.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>84</b>
<b>10.</b>	<b>AC POWER LINE CONDUCTED EMISSION .....</b>	<b>85</b>
<b>11.</b>	<b>TEST DATA .....</b>	<b>88</b>
11.1.	APPENDIX A: 20DB EMISSION BANDWIDTH.....	88
11.1.1.	Test Result.....	88
11.1.2.	Test Graphs .....	89
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	92
11.2.1.	Test Result.....	92
11.2.2.	Test Graphs .....	93
11.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	96
11.3.1.	Test Result.....	96
11.4.	APPENDIX D: CARRIER FREQUENCY SEPARATION.....	97
11.4.1.	Test Result.....	97
11.4.2.	Test Graphs .....	98
11.5.	APPENDIX E: TIME OF OCCUPANCY .....	99
11.5.1.	Test Result.....	99
11.5.2.	Test Graphs .....	100
11.6.	APPENDIX F: NUMBER OF HOPPING CHANNELS .....	103
11.6.1.	Test Result.....	103
11.6.2.	Test Graphs .....	104
11.7.	APPENDIX G: BAND EDGE MEASUREMENTS .....	105
11.7.1.	Test Result.....	105
11.7.2.	Test Graphs .....	106
11.8.	APPENDIX H: CONDUCTED SPURIOUS EMISSION.....	110
11.8.1.	Test Result.....	110
11.8.2.	Test Graphs .....	111
11.9.	APPENDIX I: DUTY CYCLE.....	120
11.9.1.	Test Result.....	120
11.9.2.	Test Graphs .....	121



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Motorola Solutions, Inc.  
Address: 8000, West Sunrise Blvd., Ft Lauderdale, Florida 33322, United States

## Manufacturer Information

Company Name: Motorola Solutions, Inc.  
Address: 8000, West Sunrise Blvd., Ft Lauderdale, Florida 33322, United States

## EUT Information

EUT Name: Two Way Portable Radio R7  
Model: AAH06UCN9RB1AN (IC Model: PMUF2000ABB)  
Brand: Motorola  
Sample Received Date: August 10, 2022  
Sample Status: Normal  
Sample ID: 5225541  
Date of Tested: August 10, 2022 to August 24, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 ISSUE 2	Pass

Prepared By:

Kebo Zhang  
Senior Project Engineer

Checked By:

Denny Huang  
Senior Project Engineer

Approved By:

Stephen Guo  
Operations Manager



## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISED RSS-247 ISSUE 2, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

<p>Accreditation Certificate</p>	<p><b>A2LA (Certificate No.: 4102.01)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Delcaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b>          UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.          Facility Name:          Chamber D, the VCCI registration No. is G-20019 and R-20004          Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
----------------------------------	--

Note1:  
All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People’s Republic of China.

Note2:  
The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note3:  
For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Two Way Portable Radio R7
Model	AAH06UCN9RB1AN (IC Model: PMUF2000ABB)
Frequency Range:	2402 MHz to 2480 MHz
Technology	Bluetooth – BR & EDR
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Firmware Version:	D02.22.02.1009
Test Voltage:	Normal Voltage: DC 7.5 V Battery: PMNN4809A DC 7.7 V, 21.9 Wh PMNN4810A DC 7.2 V, 23.0 Wh

Note: We have pre-test the two battery, only the worst data on PMNN4809A battery usage was recorded in the report.

### 5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

### 5.3. MAXIMUM EIRP

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402 ~ 2480	0-78[79]	10.51	12.54
$\pi/4$ DQPSK	2402 ~ 2480	0-78[79]	11.41	13.44
8DPSK	2402 ~ 2480	0-78[79]	11.60	13.63

#### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK-DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
Π/4DQPSK	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
8DPSK-3DH5	CH 00(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402 MHz, 2441 MHz, 2480 MHz
GFSK-DH5	Hopping	
Π/4DQPSK	Hopping	
8DPSK-3DH5	Hopping	

#### PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
Π/4DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

#### 5.5. THE WORSE CASE POWER SETTING PARAMETER

##### WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	Π/4DQPSK	2Mbit/s
EDR	FHSS	8DPSK	3Mbit/s

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		DutApiSisoACDualIf		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 00	CH 39	CH 78
GFSK	1	10	11	11
Π/4DQPSK	1	12	12	12
8DPSK	1	12	12	12



### 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB Antenna	2.03

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
$\pi/4$ DQPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.



## 5.7. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

### I/O CABLES


Item	Type of cable	Shielded Type	Ferrite Core	Length
1	/	/	/	/

### ACCESSORY


Item	Accessory	Brand Name	Model Name	Description	Remark	Test Voltage
1	Lithium battery	Motorola	PMNN4809A	DC 7.7V / 21.9Wh	/	/
2	Lithium battery	Motorola	PMNN4810A	DC 7.2V / 23.0Wh	/	/
3	Charger	Motorola	PMPN4284A	MUC	PMPN4284A = BASE PMPN4283A + POWER SUPPLY PS000242A01 + LINE CORD	AC 120 V, 60 Hz
4	Two Way Portable Radio R7	Motorola	AAH06UCN9RB1AN (IC Model: PMUF2000ABB)	*2	/	/

### 5.8. SETUP DIAGRAM

Radio Alone

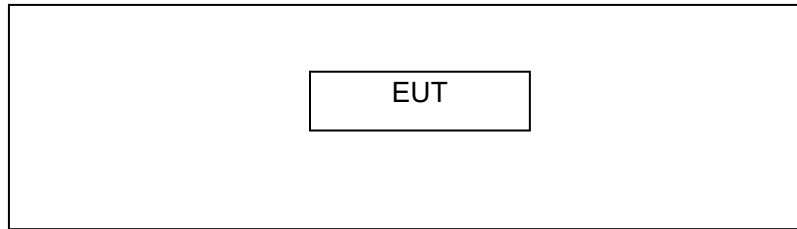

Radio with charger - AC input

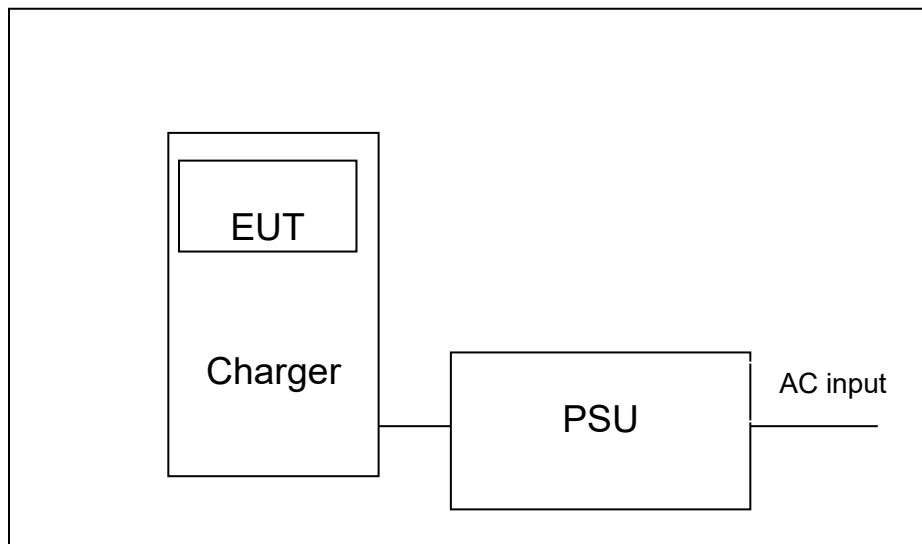

**6. MEASURING EQUIPMENT AND SOFTWARE USED**

<b>R&amp;S TS 8997 Test System</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Apr.02,2022	Apr.01,2023
Vector Signal Generator	R&S	SMBV100A	261637	Oct.30, 2021	Oct.29, 2022
Signal Generator	R&S	SMB100A	178553	Oct.30, 2021	Oct.29, 2022
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022
<b>Software</b>					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
<b>Tonsend RF Test System</b>					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.30, 2021	Oct.29, 2022
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.29, 2021	Sep.28, 2022
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.30, 2021	Oct.29, 2022
DC power supply	Keysight	E3642A	MY55159130	Oct.30, 2021	Oct.29, 2022
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.20,2020	Nov.19,2022
<b>Software</b>					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	



Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV20-5120-5150-	2	Oct.31, 2021	Oct.30, 2022



		5350-5380-60SS			
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCD5-1879-1879.85-1880.15-1881-40SS	1	Oct.31, 2021	Oct.30, 2022
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	1	Oct.31, 2021	Oct.30, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Nov. 4, 2021	Nov. 3, 2022
Barometer	Yiyi	Baro	N/A	Nov. 15, 2021	Nov. 14, 2022



## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30 dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel: 125 mW or 21 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	23.9°C	Relative Humidity	64%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

#### TEST RESULTS

Please refer to section "Test Data" - Appendix C

## 7.2. 20 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

### TEST SETUP

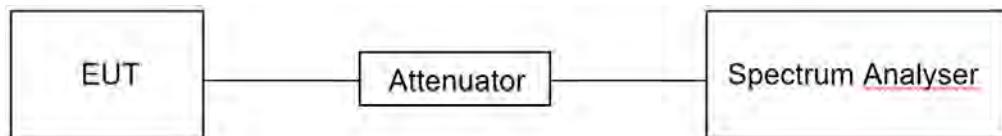

### TEST ENVIRONMENT

Temperature	23.9°C	Relative Humidity	64%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

### 7.3. CARRIER HOPPING CHANNEL SEPARATION

#### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISSED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.  Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

#### TEST SETUP

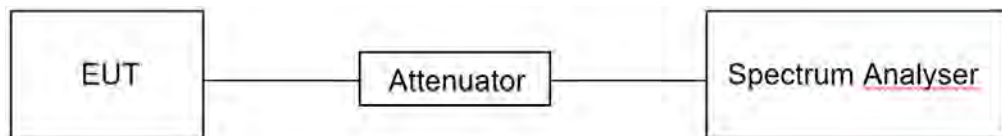



**TEST ENVIRONMENT**

Temperature	23.9°C	Relative Humidity	64%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.4. NUMBER OF HOPPING FREQUENCY

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP

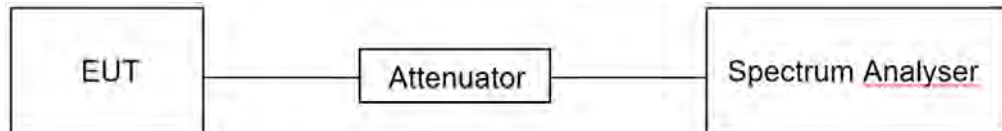

### TEST ENVIRONMENT

Temperature	23.9°C	Relative Humidity	64%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix F

## 7.5. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$


For AFHSS Mode (20 Channel):

DH1/3DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 8 / (\text{channel number})$

DH3/3DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 8 / (\text{channel number})$

DH5/3DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 8 / (\text{channel number})$

### TEST SETUP

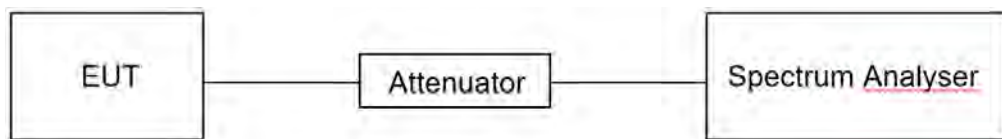



**TEST ENVIRONMENT**

Temperature	23.9°C	Relative Humidity	64%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E

## 7.6. CONDUCTED BANDEGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum

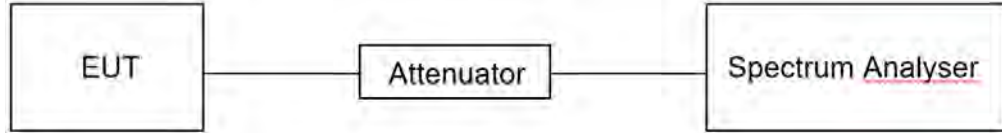

**TEST SETUP****TEST ENVIRONMENT**

Temperature	23.9°C	Relative Humidity	64%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

**TEST RESULTS**

Please refer to section "Test Data" - Appendix G&H

## 7.7. DUTY CYCLE


### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

### TEST SETUP

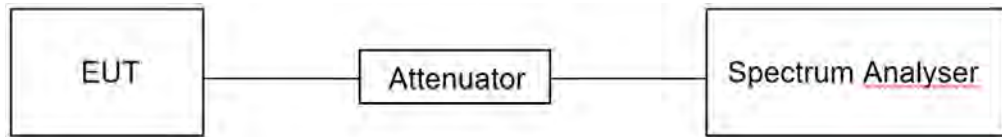

### TEST ENVIRONMENT

Temperature	23.9°C	Relative Humidity	64%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

### TEST RESULTS

Please refer to section "Test Data" - Appendix I

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (uA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	158.7 - 158.9	10.6 - 12.7
3.020 - 3.028	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.877 - 5.883	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2695 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5490	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.



Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.




Above 1 GHz

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.7.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

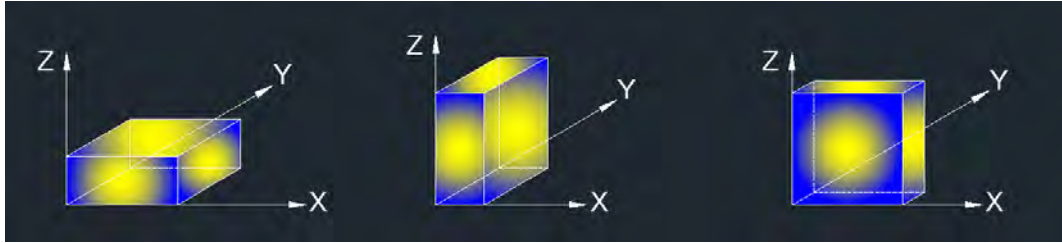

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Band edge note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Horizontal and Vertical have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 1 GHz-3 GHz note:

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.7.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
  8. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 3 GHz-18 GHz note:

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.7.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.





For Radiate Spurious emission 9 kHz-30 MHz note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes and channels have been tested, only the worst data was recorded in the report.


For Radiate Spurious emission 18 GHz-26 GHz note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. All modes and channels have been tested, only the worst data was recorded in the report.


For Radiate Spurious emission 30MHz-1GHz note:

1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
4. All modes and channels have been tested, only the worst data was recorded in the report.


**TEST SETUP**

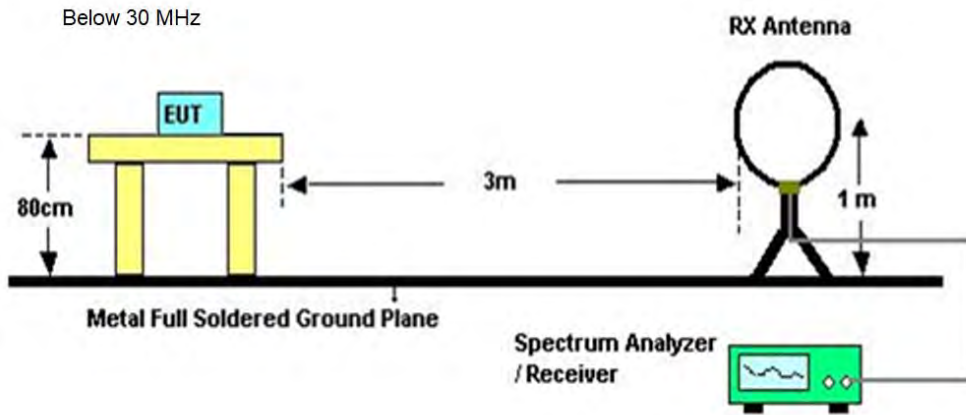

Below 1 GHz and above 30 MHz

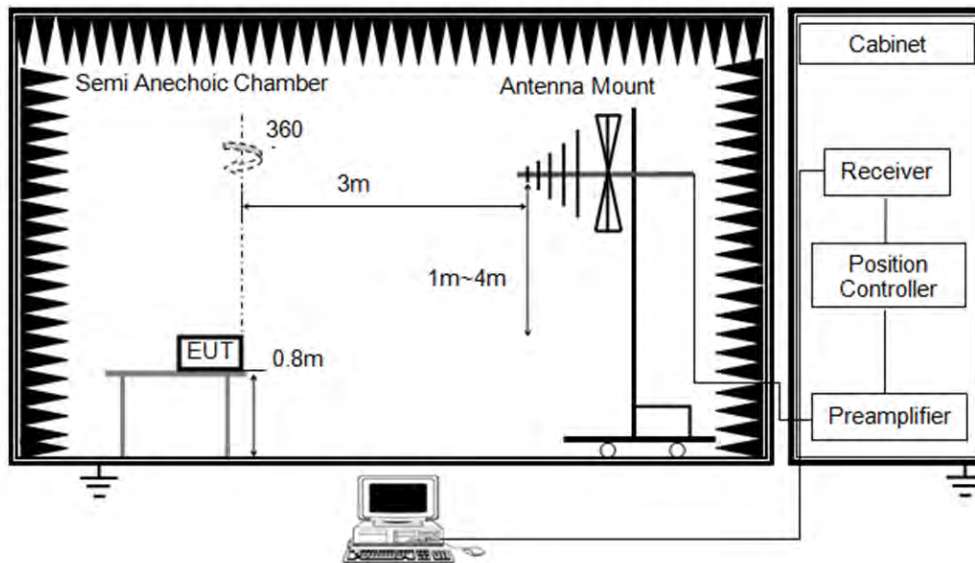

Above 1 GHz

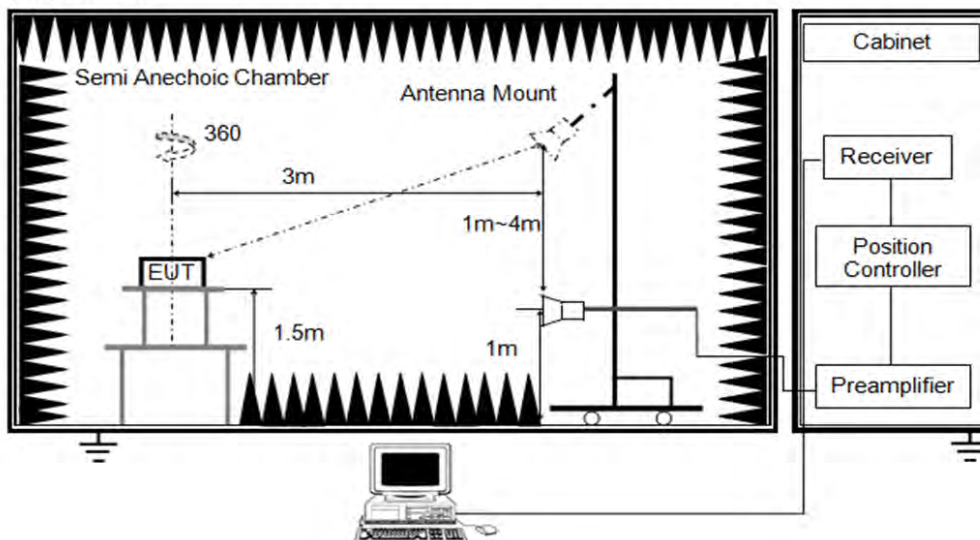



**TEST ENVIRONMENT**


Temperature	25.6°C	Relative Humidity	63%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.5 V

**TEST RESULTS**



### 8.1. RESTRICTED BANDEDGE


Test Mode:	GFSK PK	Channel:	2402
Polarity:	Horizontal		

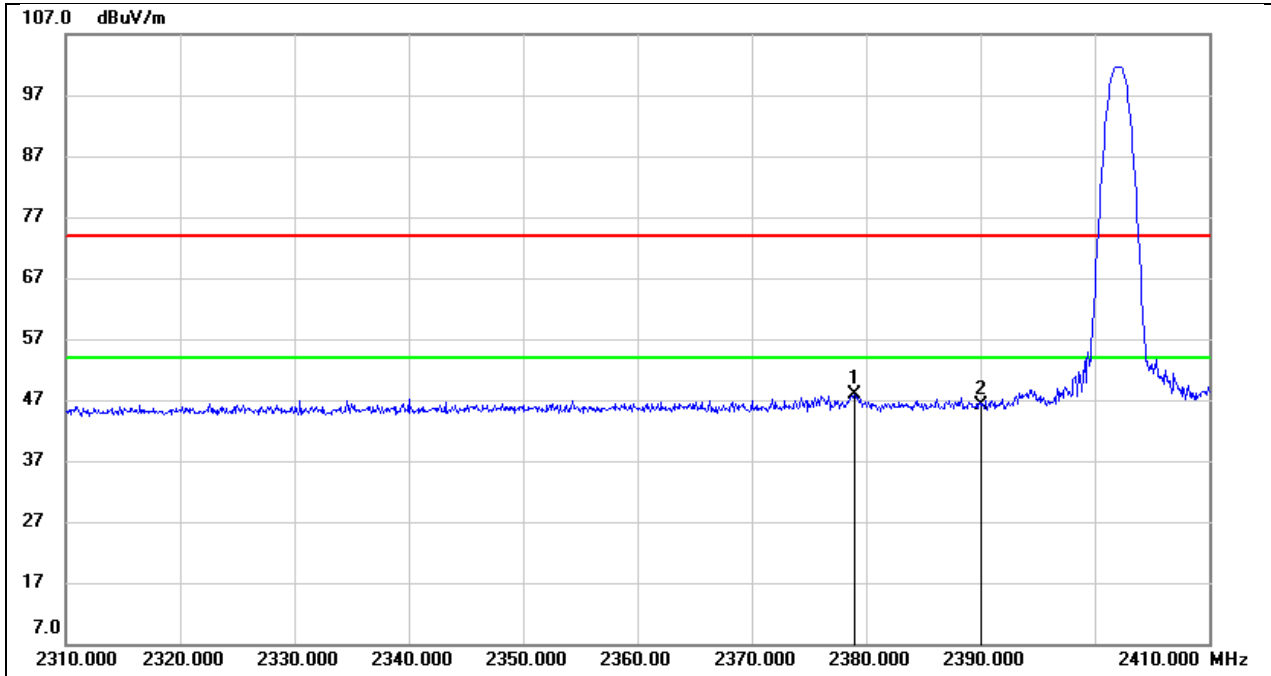

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.000	15.82	32.13	47.95	74.00	-26.05	peak
2	2390.000	13.94	32.16	46.10	74.00	-27.90	peak




Test Mode:	GFSK PK	Channel:	2480
Polarity:	Horizontal		

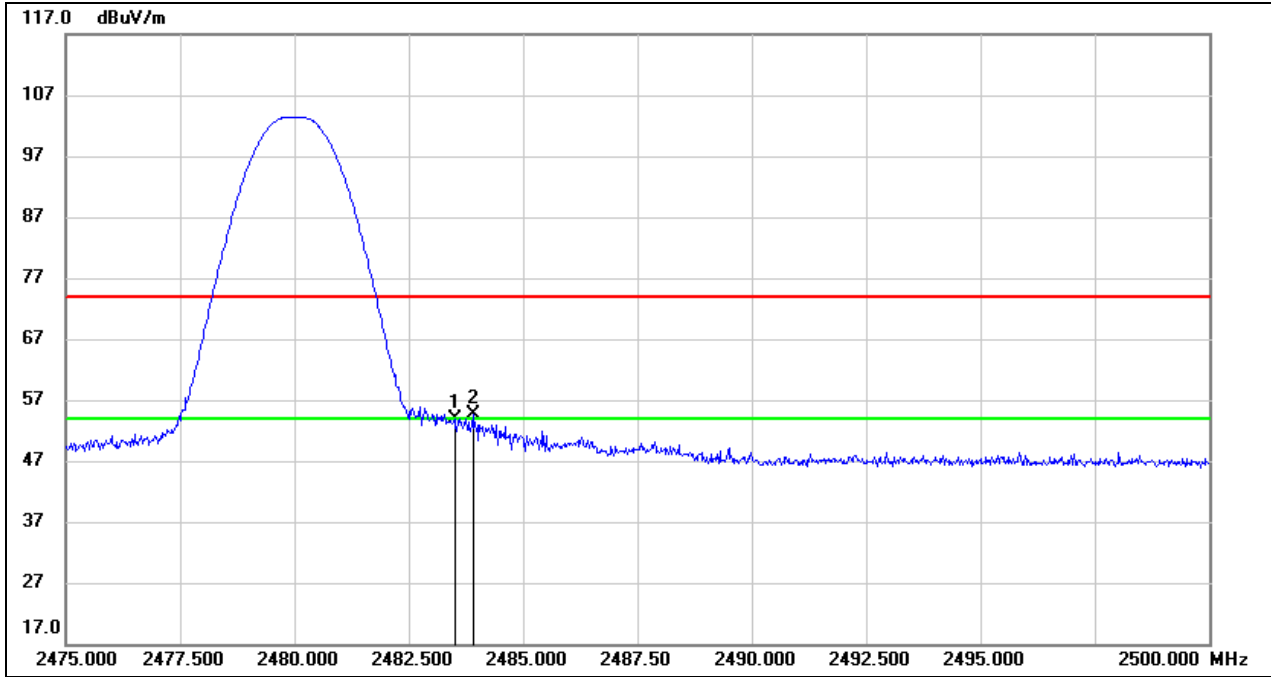

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.33	32.44	53.77	74.00	-20.23	peak
2	2483.900	22.07	32.44	54.51	74.00	-19.49	peak




Test Mode:	GFSK AV	Channel:	2480
Polarity:	Horizontal		

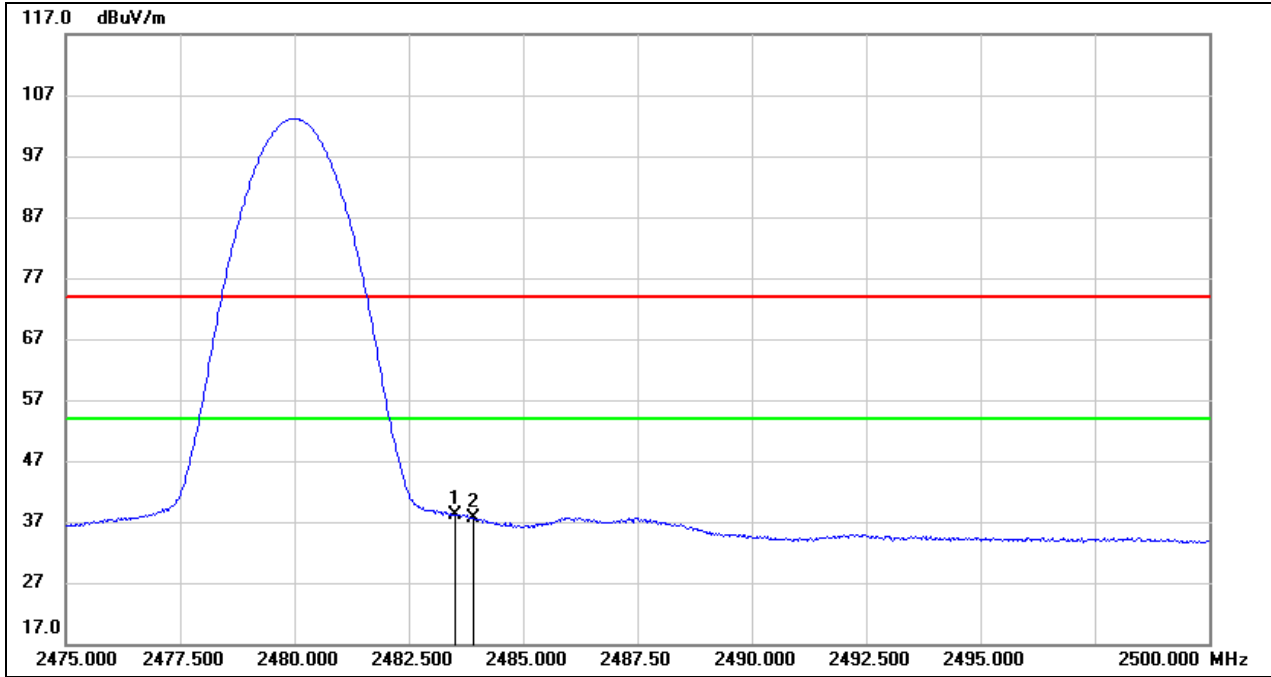

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	5.67	32.44	38.11	54.00	-15.89	AVG
2	2483.900	5.09	32.44	37.53	54.00	-16.47	AVG




Test Mode:	Π/4DQPSK PK	Channel:	2402
Polarity:	Horizontal		

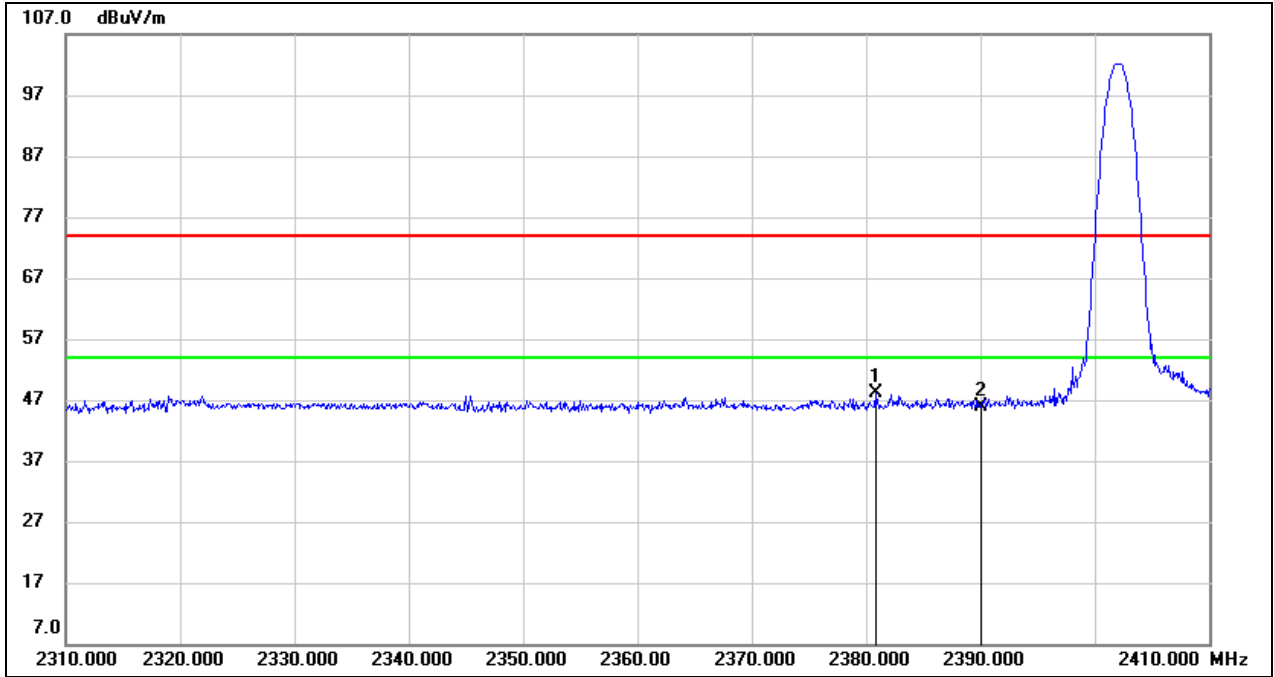

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.800	16.02	32.13	48.15	74.00	-25.85	peak
2	2390.000	13.74	32.16	45.90	74.00	-28.10	peak



Test Mode:	Π/4DQPSK PK	Channel:	2480
Polarity:	Horizontal		

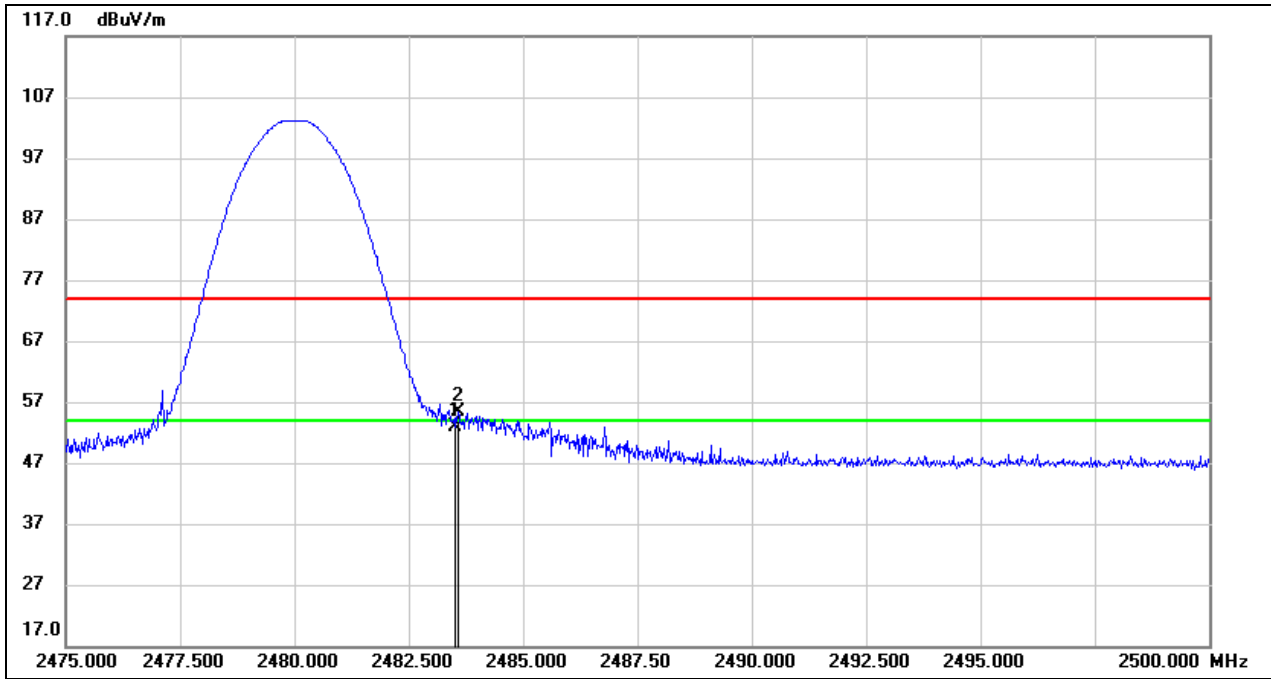


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.38	32.44	52.82	74.00	-21.18	peak
2	2483.575	22.95	32.44	55.39	74.00	-18.61	peak






Test Mode:	Π/4DQPSK AV	Channel:	2480
Polarity:	Horizontal		

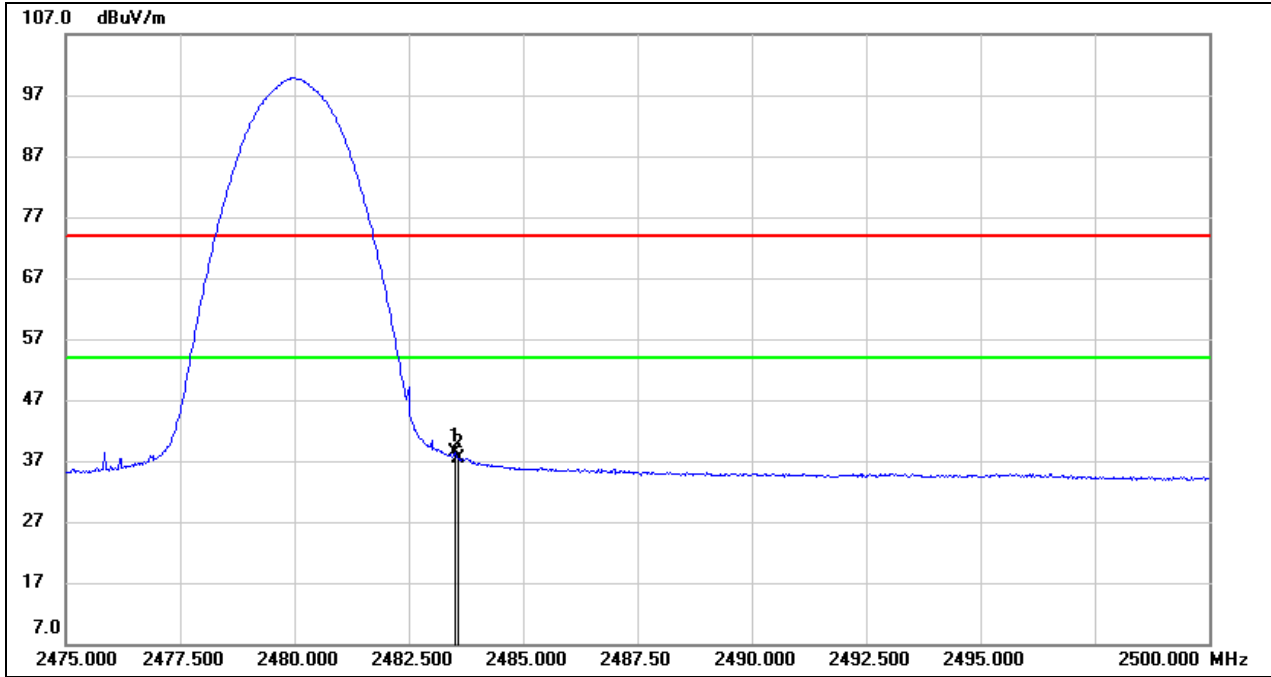

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	5.93	32.44	38.37	54.00	-15.63	AVG
2	2483.575	4.82	32.44	37.26	54.00	-16.74	AVG




Test Mode:	8DPSK PK	Channel:	2402
Polarity:	Horizontal		

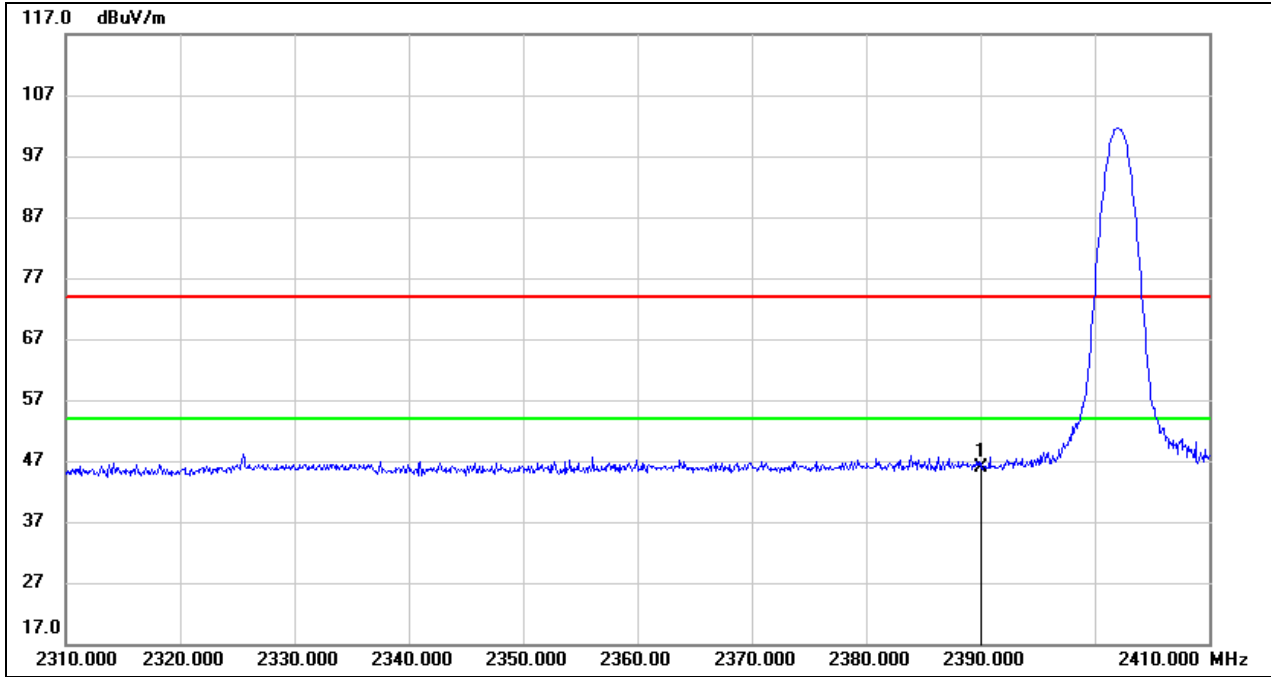

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	13.83	32.16	45.99	74.00	-28.01	peak




Test Mode:	8DPSK PK	Channel:	2480
Polarity:	Horizontal		

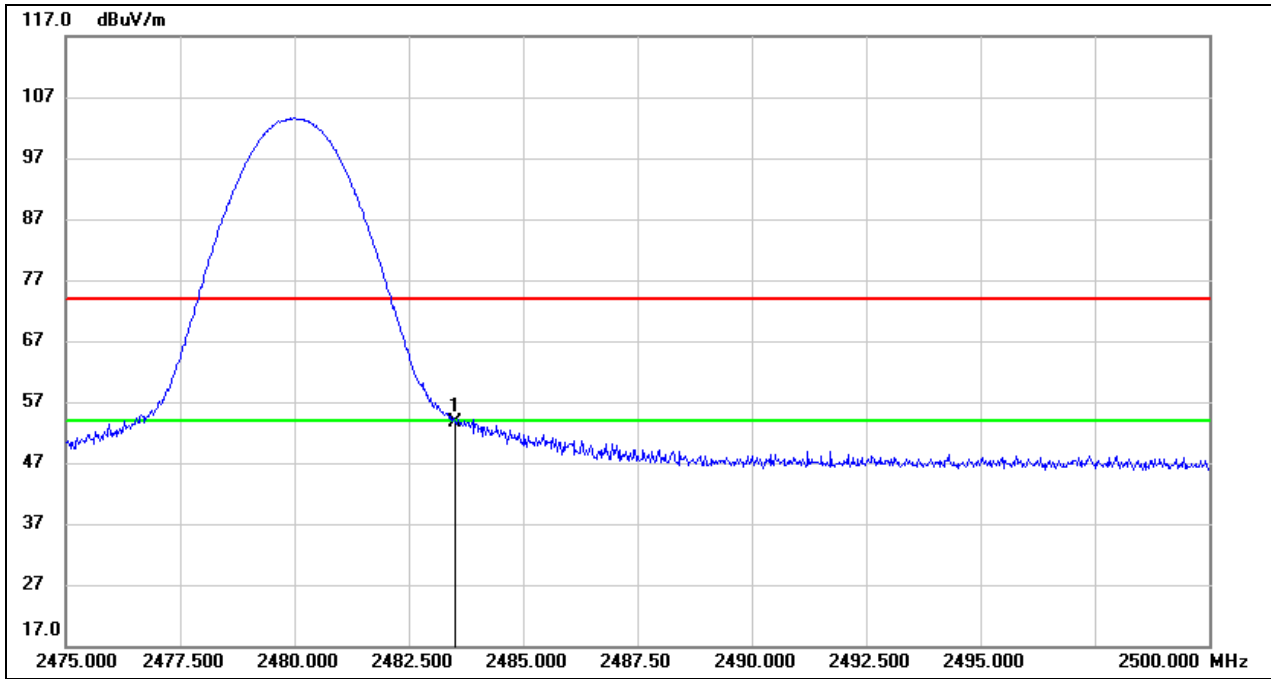

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	21.20	32.44	53.64	74.00	-20.36	peak



Test Mode:	8DPSK AV	Channel:	2480
Polarity:	Horizontal		

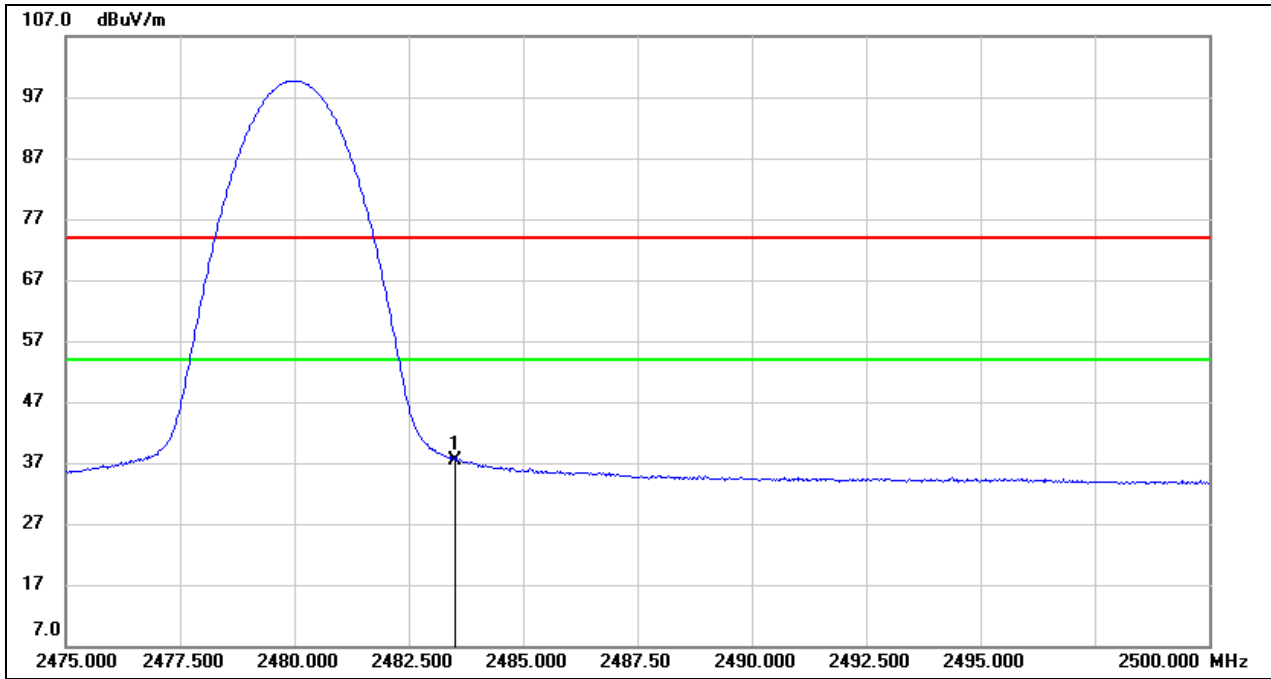


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	4.99	32.44	37.43	54.00	-16.57	AVG



## 8.2. RESTRICTED BANDEDGE WITH CHARGING WORST CASE


Test Mode:	GFSK PK	Channel:	2480
Polarity:	Horizontal	Charger:	PMPN4284A

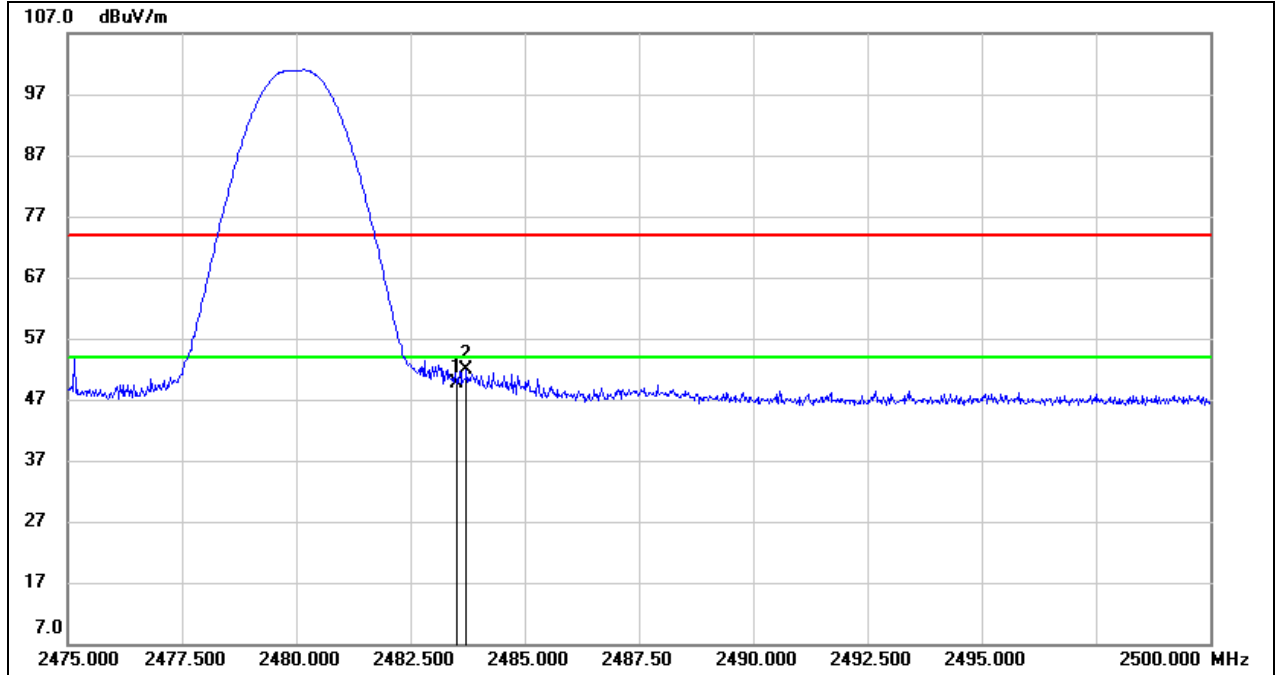

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.23	32.44	49.67	74.00	-24.33	peak
2	2483.725	19.39	32.44	51.83	74.00	-22.17	peak




Test Mode:	GFSK AV	Channel:	2480
Polarity:	Horizontal	Charger:	PMPN4284A

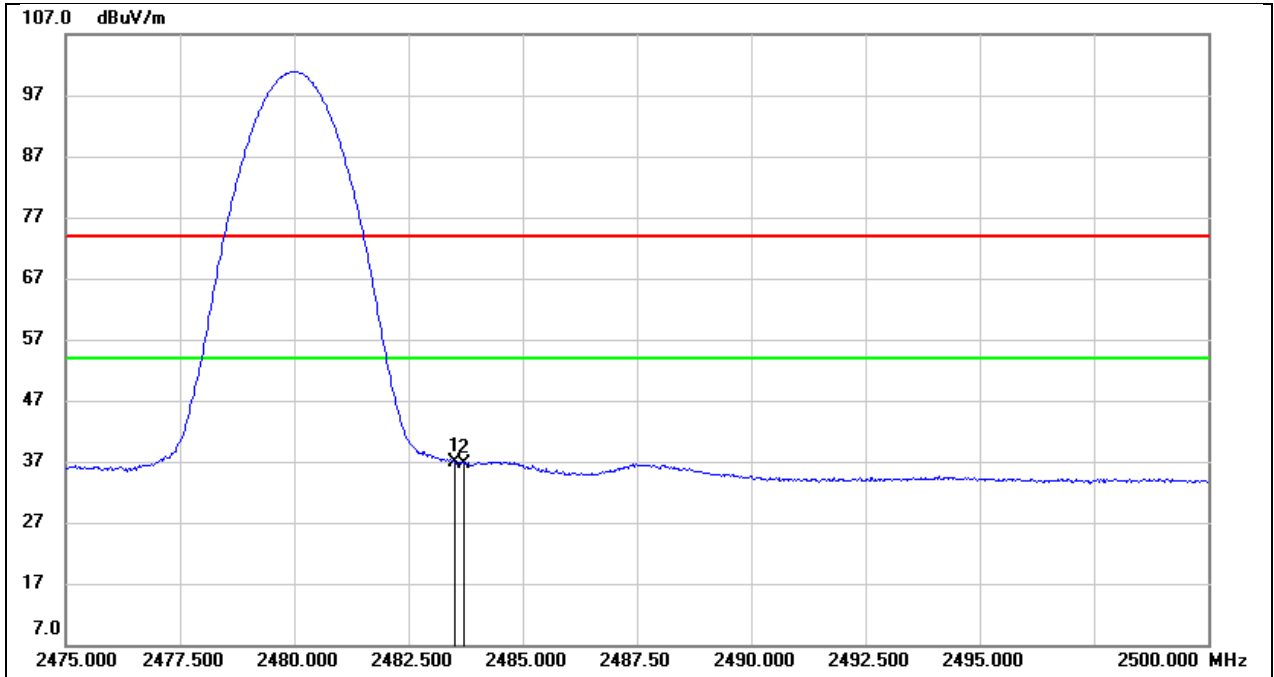

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	4.50	32.44	36.94	54.00	-17.06	AVG
2	2483.725	4.16	32.44	36.60	54.00	-17.40	AVG

**8.3. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)**


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal		

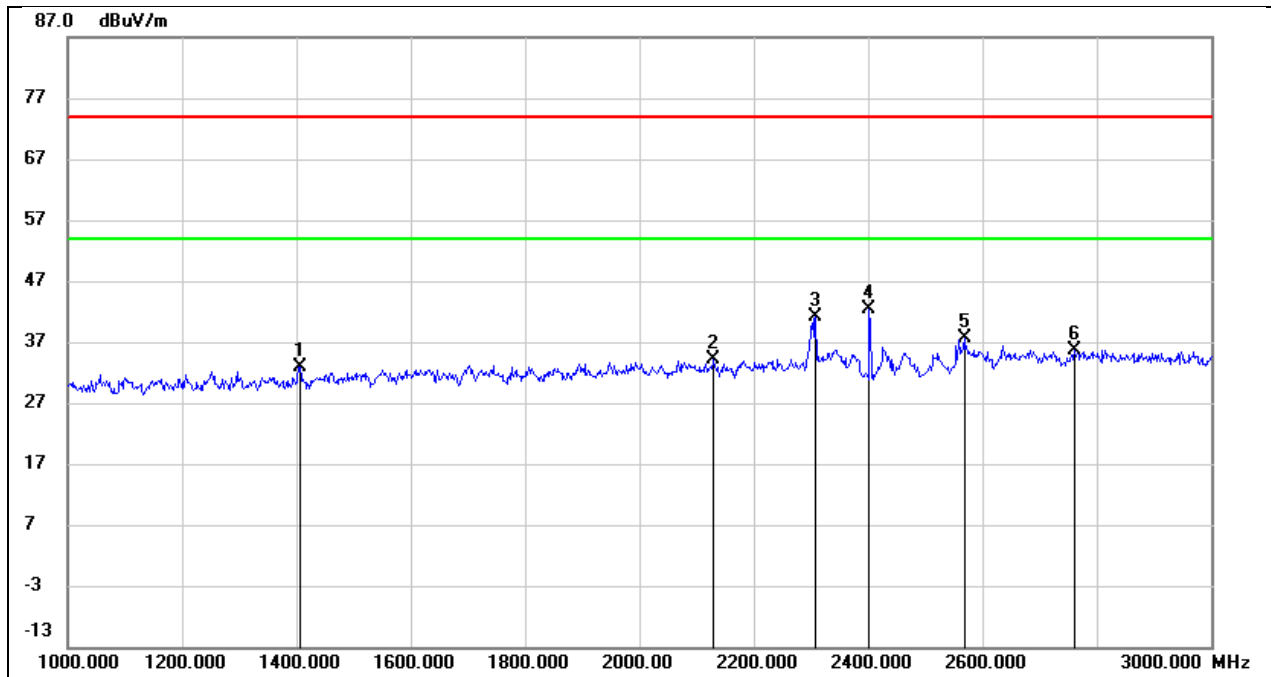

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1406.000	46.03	-13.15	32.88	74.00	-41.12	peak
2	2130.000	44.48	-10.39	34.09	74.00	-39.91	peak
3	2308.000	50.70	-9.47	41.23	74.00	-32.77	peak
4	2402.000	51.41	-8.99	42.42	74.00	-31.58	peak
5	2568.000	45.87	-8.28	37.59	74.00	-36.41	peak
6	2762.000	43.41	-7.70	35.71	74.00	-38.29	peak



Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical		

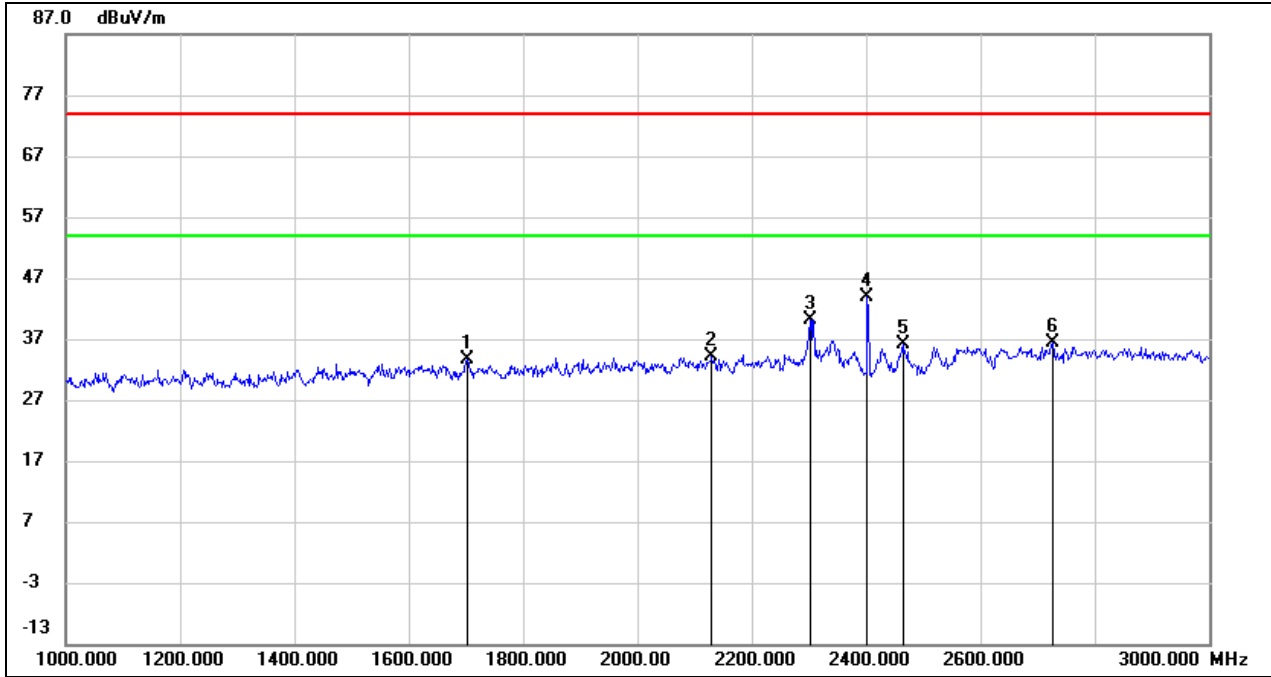


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1702.000	45.64	-12.05	33.59	74.00	-40.41	peak
2	2130.000	44.41	-10.39	34.02	74.00	-39.98	peak
3	2302.000	49.64	-9.50	40.14	74.00	-33.86	peak
4	2402.000	52.93	-8.99	43.94	74.00	-30.06	peak
5	2464.000	44.80	-8.68	36.12	74.00	-37.88	peak
6	2726.000	44.19	-7.80	36.39	74.00	-37.61	peak






Test Mode:	GFSK	Channel:	2441
Polarity:	Horizontal		

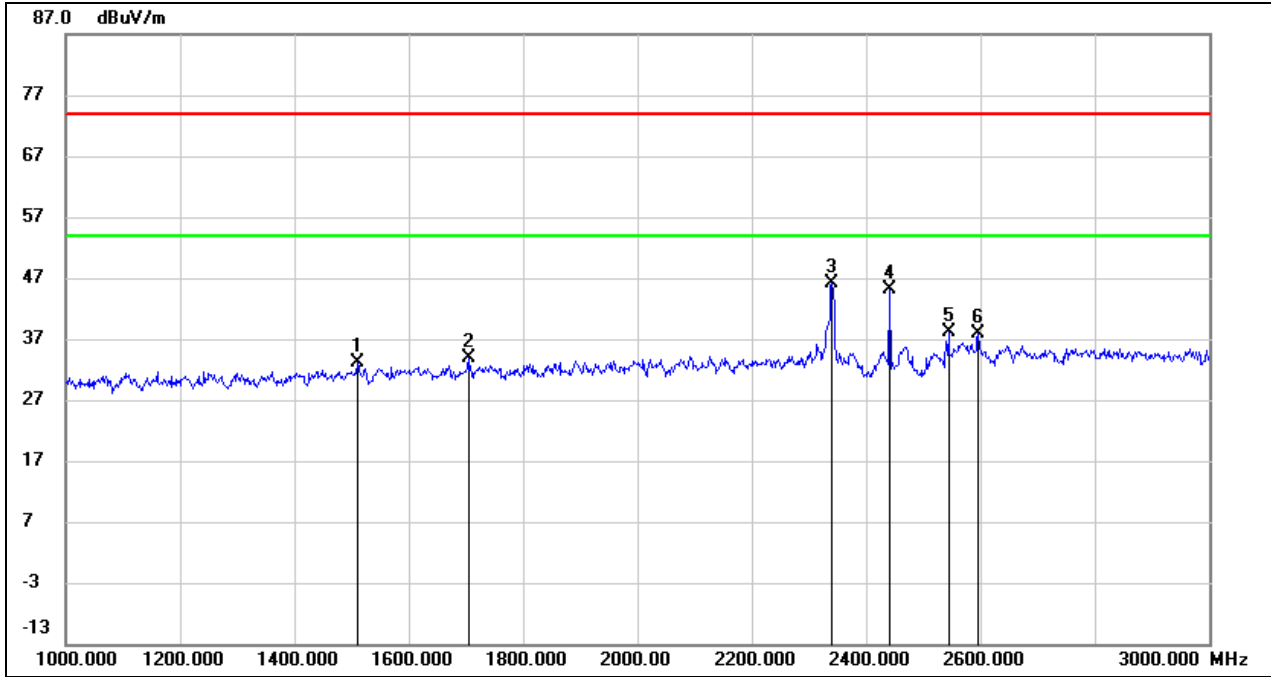

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1510.000	45.81	-12.68	33.13	74.00	-40.87	peak
2	1704.000	45.93	-12.04	33.89	74.00	-40.11	peak
3	2340.000	55.34	-9.31	46.03	74.00	-27.97	peak
4	2441.000	53.94	-8.79	45.15	74.00	-28.85	peak
5	2544.000	46.58	-8.36	38.22	74.00	-35.78	peak
6	2596.000	46.15	-8.20	37.95	74.00	-36.05	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Vertical		

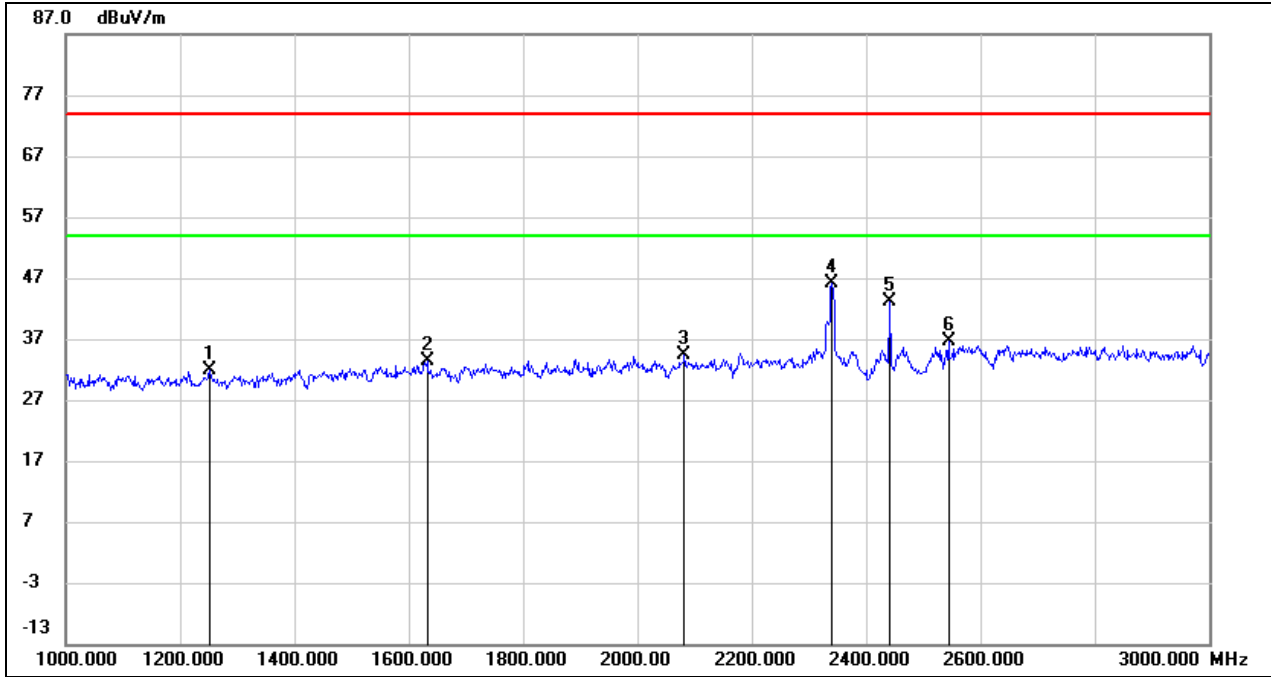

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1252.000	45.66	-13.86	31.80	74.00	-42.20	peak
2	1632.000	45.66	-12.27	33.39	74.00	-40.61	peak
3	2082.000	45.00	-10.64	34.36	74.00	-39.64	peak
4	2340.000	55.33	-9.31	46.02	74.00	-27.98	peak
5	2441.000	52.00	-8.79	43.21	74.00	-30.79	peak
6	2544.000	45.06	-8.36	36.70	74.00	-37.30	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal		

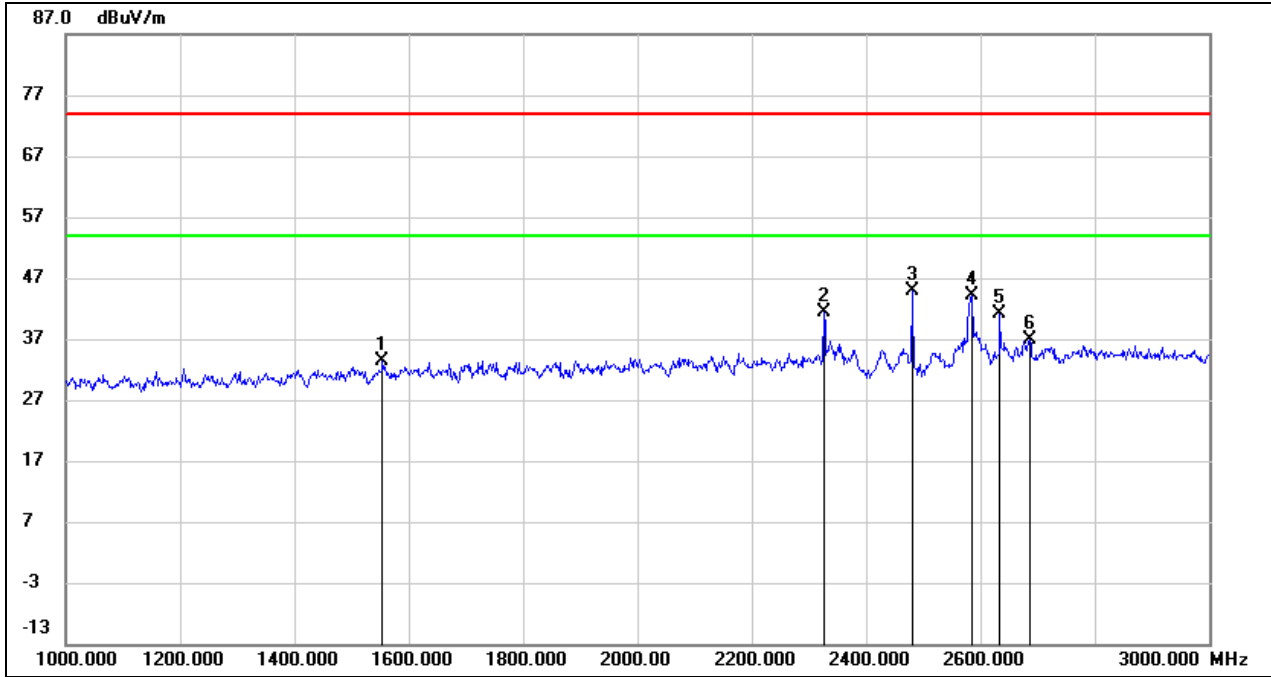

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1554.000	45.83	-12.53	33.30	74.00	-40.70	peak
2	2326.000	50.68	-9.38	41.30	74.00	-32.70	peak
3	2480.000	53.41	-8.59	44.82	74.00	-29.18	peak
4	2586.000	52.31	-8.24	44.07	74.00	-29.93	peak
5	2634.000	49.29	-8.09	41.20	74.00	-32.80	peak
6	2686.000	44.69	-7.93	36.76	74.00	-37.24	peak



Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical		

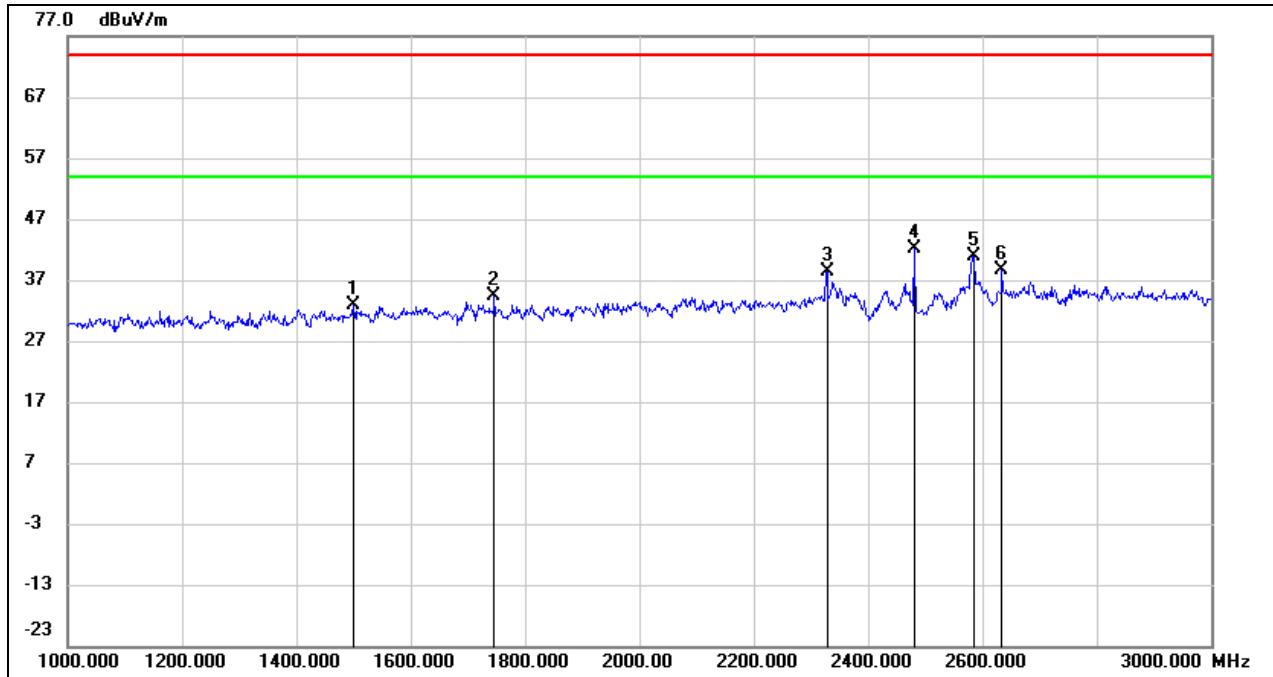


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1500.000	45.58	-12.71	32.87	74.00	-41.13	peak
2	1746.000	46.20	-11.90	34.30	74.00	-39.70	peak
3	2328.000	47.81	-9.38	38.43	74.00	-35.57	peak
4	2480.000	50.81	-8.59	42.22	74.00	-31.78	peak
5	2586.000	49.19	-8.24	40.95	74.00	-33.05	peak
6	2634.000	46.67	-8.09	38.58	74.00	-35.42	peak



### 8.4. SPURIOUS EMISSIONS WITH CHARGING WORST CASE(1 GHZ~3 GHZ)


Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal	Charger:	PMPN4284A

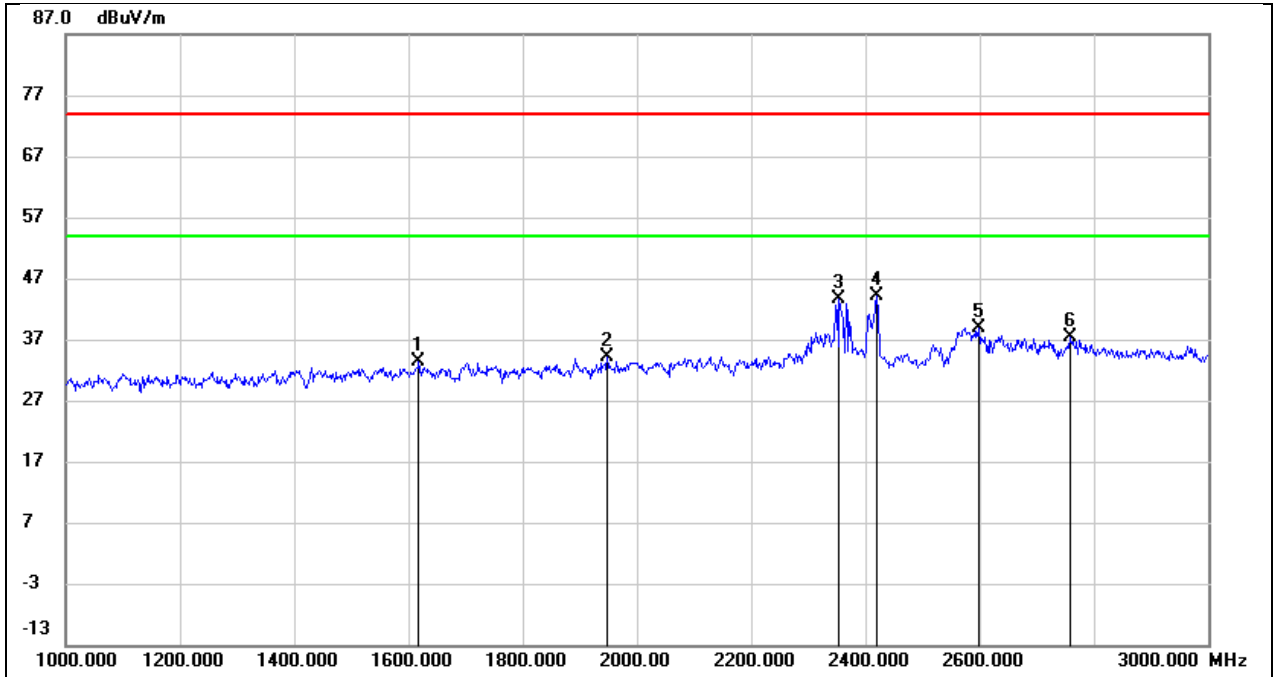

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1618.000	45.69	-12.32	33.37	74.00	-40.63	peak
2	1948.000	45.32	-11.23	34.09	74.00	-39.91	peak
3	2354.000	52.75	-9.24	43.51	74.00	-30.49	peak
4	2420.000	53.09	-8.91	44.18	74.00	-29.82	peak
5	2598.000	47.03	-8.19	38.84	74.00	-35.16	peak
6	2758.000	45.09	-7.72	37.37	74.00	-36.63	peak



Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical	Charger:	PMPN4284A

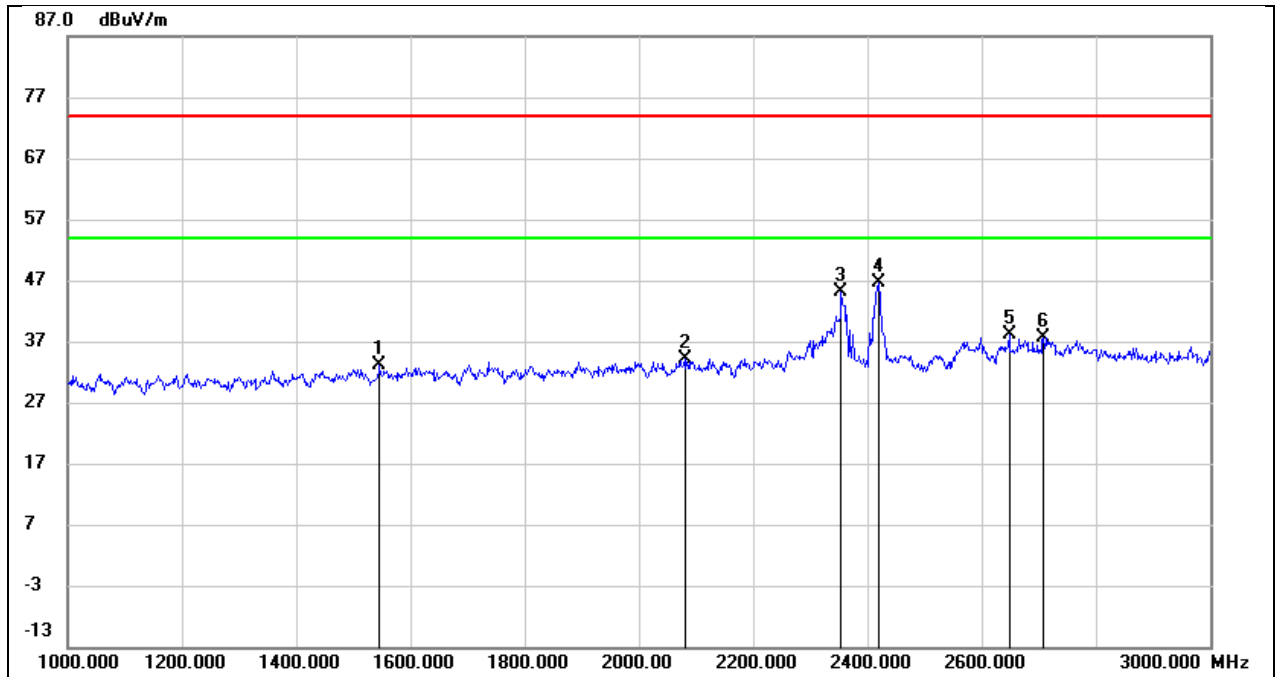


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1546.000	45.60	-12.56	33.04	74.00	-40.96	peak
2	2080.000	44.76	-10.64	34.12	74.00	-39.88	peak
3	2354.000	54.42	-9.24	45.18	74.00	-28.82	peak
4	2420.000	55.55	-8.91	46.64	74.00	-27.36	peak
5	2648.000	46.06	-8.04	38.02	74.00	-35.98	peak
6	2708.000	45.45	-7.86	37.59	74.00	-36.41	peak



### 8.5. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)


Test Mode:	GFSK	Channel:	2402
Polarity:	Horizontal		

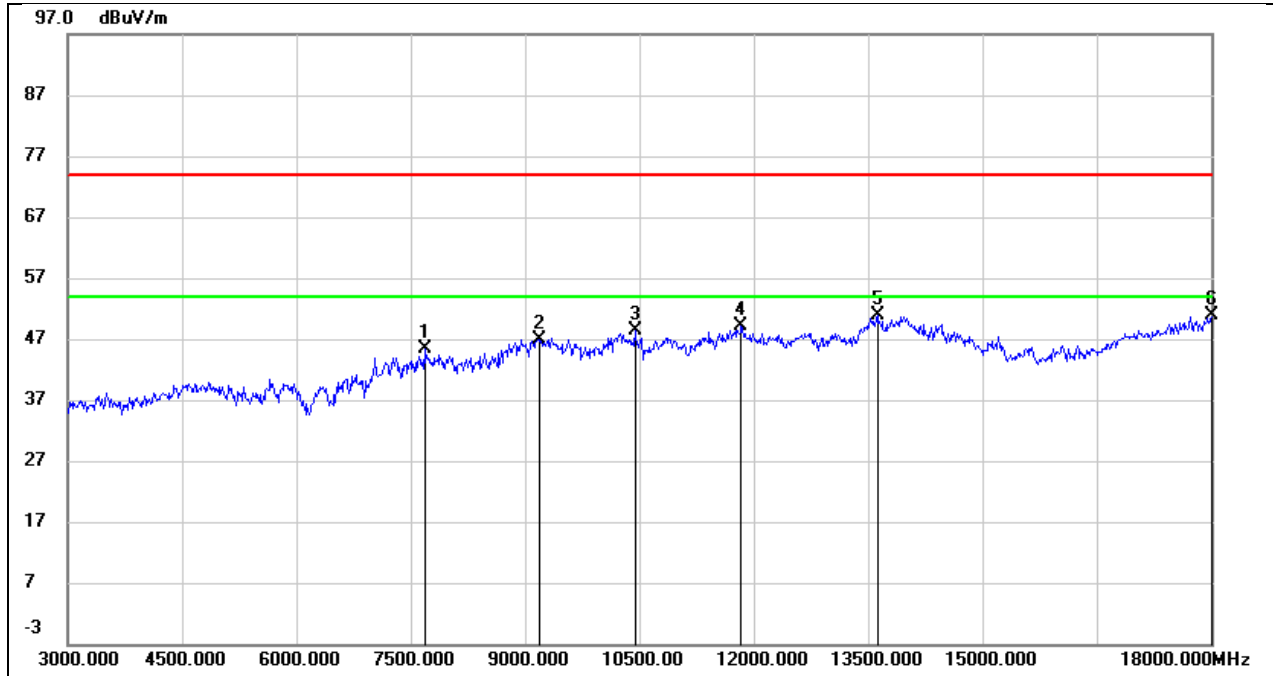

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7680.000	39.09	6.32	45.41	74.00	-28.59	peak
2	9195.000	36.39	10.56	46.95	74.00	-27.05	peak
3	10440.000	35.40	12.87	48.27	74.00	-25.73	peak
4	11835.000	31.58	17.51	49.09	74.00	-24.91	peak
5	13620.000	29.78	21.15	50.93	74.00	-23.07	peak
6	18000.000	25.15	25.69	50.84	74.00	-23.16	peak



Test Mode:	GFSK	Channel:	2402
Polarity:	Vertical		

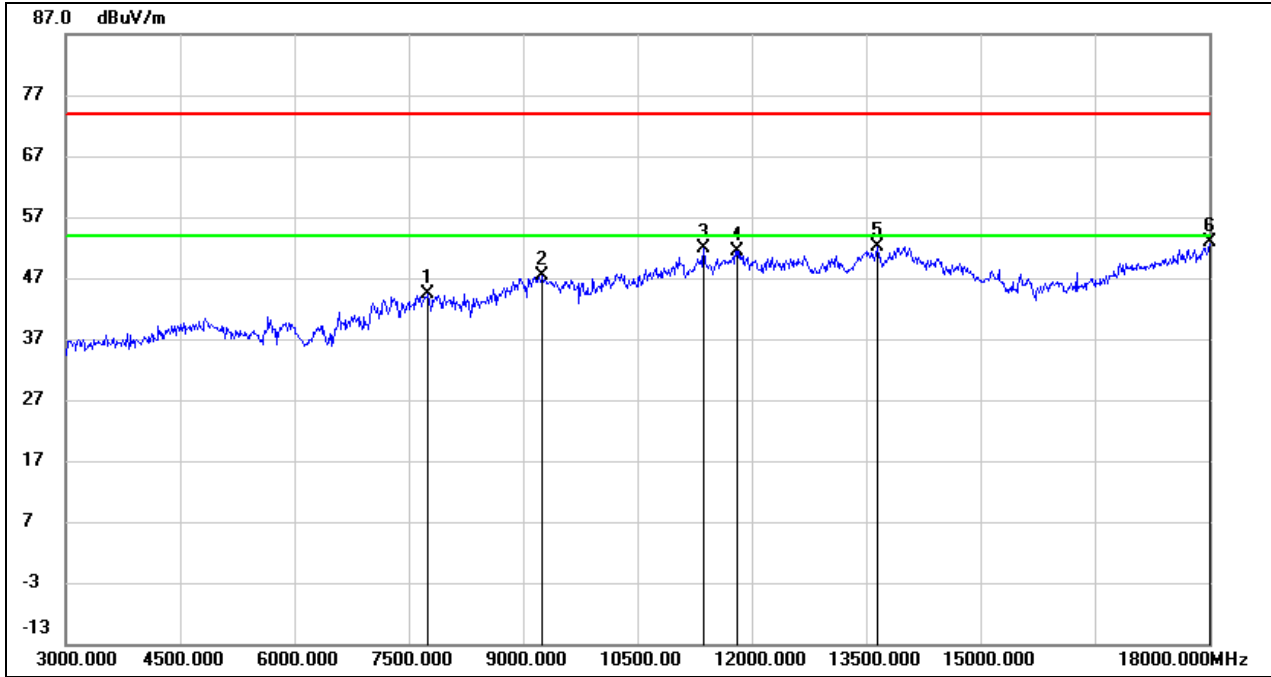


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7755.000	38.00	6.31	44.31	74.00	-29.69	peak
2	9255.000	36.67	10.59	47.26	74.00	-26.74	peak
3	11370.000	35.80	16.12	51.92	74.00	-22.08	peak
4	11805.000	34.01	17.43	51.44	74.00	-22.56	peak
5	13650.000	30.99	21.21	52.20	74.00	-21.80	peak
6	18000.000	27.08	25.69	52.77	74.00	-21.23	peak






Test Mode:	GFSK	Channel:	2441
Polarity:	Horizontal		

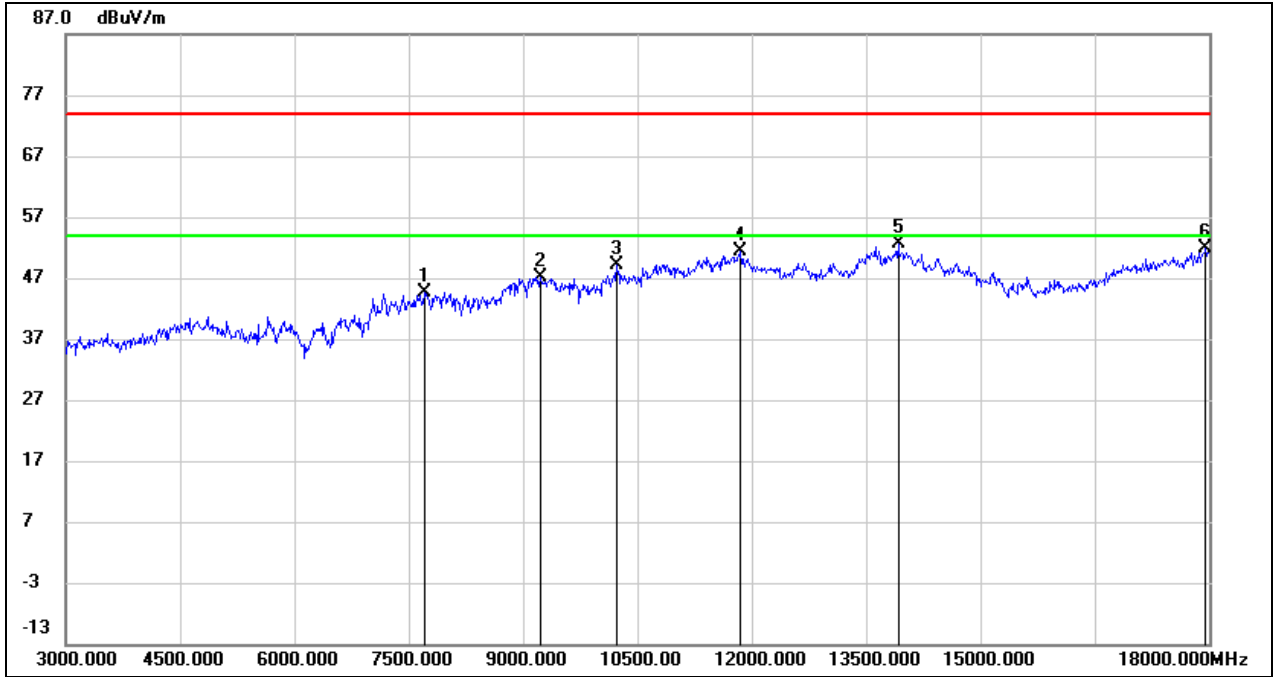

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7710.000	38.24	6.33	44.57	74.00	-29.43	peak
2	9225.000	36.51	10.58	47.09	74.00	-26.91	peak
3	10230.000	36.78	12.46	49.24	74.00	-24.76	peak
4	11850.000	33.89	17.56	51.45	74.00	-22.55	peak
5	13920.000	30.77	21.79	52.56	74.00	-21.44	peak
6	17955.000	26.43	25.42	51.85	74.00	-22.15	peak




Test Mode:	GFSK	Channel:	2441
Polarity:	Vertical		

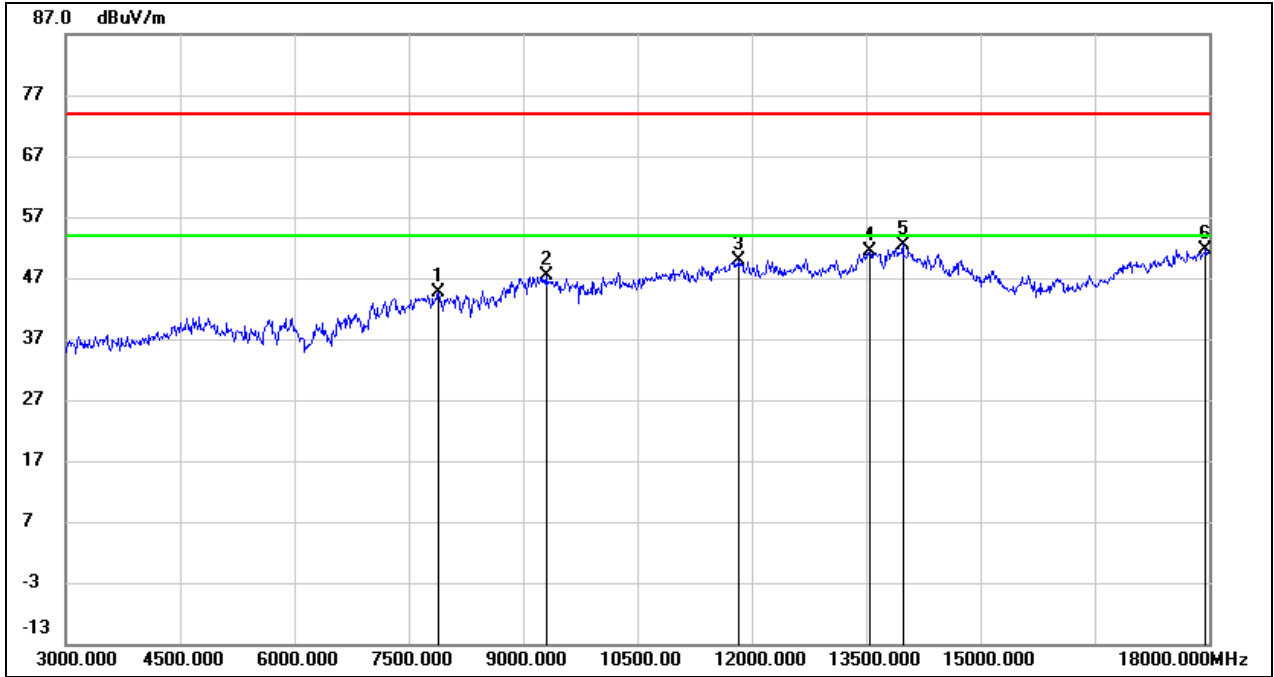

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7890.000	38.34	6.31	44.65	74.00	-29.35	peak
2	9300.000	36.75	10.61	47.36	74.00	-26.64	peak
3	11835.000	32.46	17.51	49.97	74.00	-24.03	peak
4	13545.000	30.27	20.99	51.26	74.00	-22.74	peak
5	13980.000	30.58	21.92	52.50	74.00	-21.50	peak
6	17955.000	26.25	25.42	51.67	74.00	-22.33	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal		

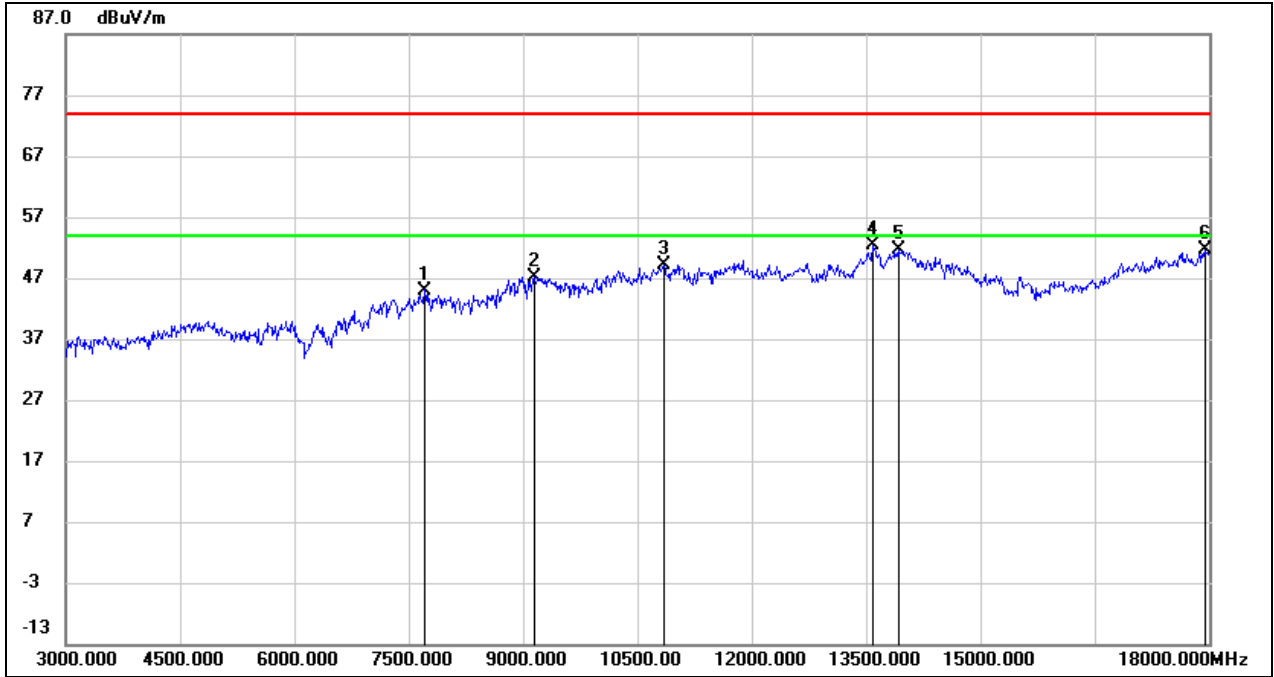

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7710.000	38.67	6.33	45.00	74.00	-29.00	peak
2	9150.000	36.64	10.54	47.18	74.00	-26.82	peak
3	10845.000	34.91	14.21	49.12	74.00	-24.88	peak
4	13590.000	31.33	21.09	52.42	74.00	-21.58	peak
5	13920.000	29.73	21.79	51.52	74.00	-22.48	peak
6	17940.000	26.35	25.34	51.69	74.00	-22.31	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical		

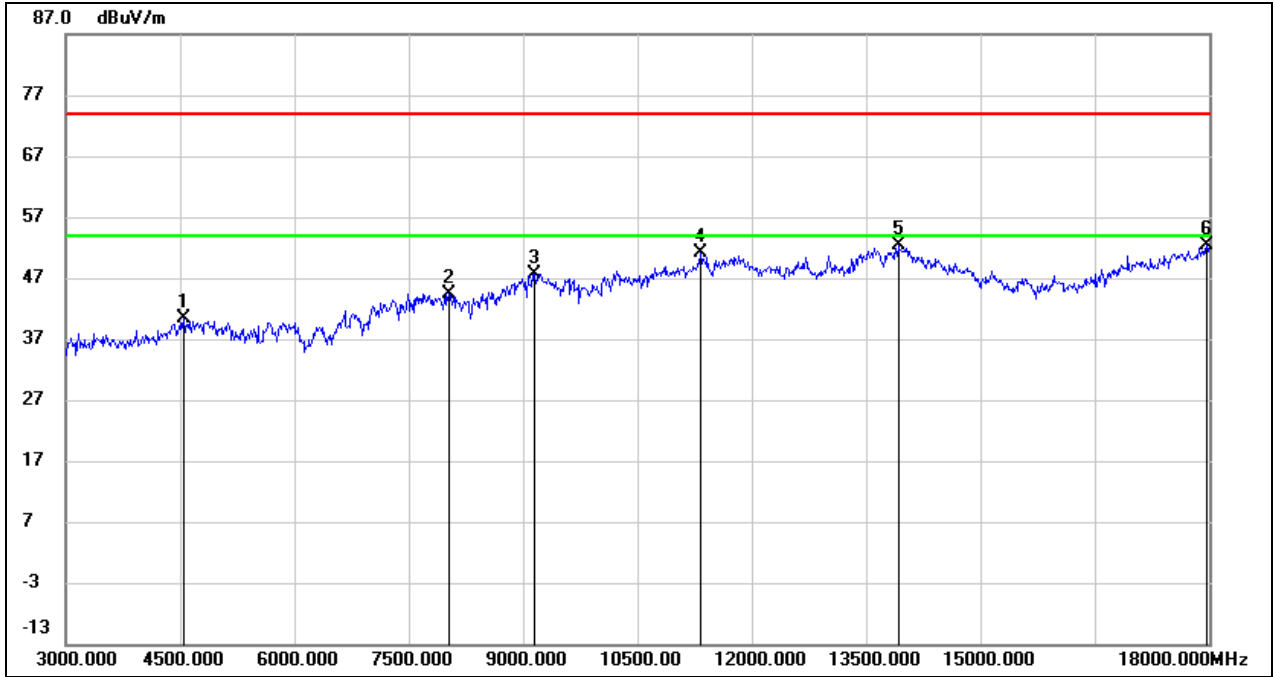

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4545.000	41.63	-1.29	40.34	74.00	-33.66	peak
2	8025.000	38.12	6.34	44.46	74.00	-29.54	peak
3	9150.000	37.17	10.54	47.71	74.00	-26.29	peak
4	11325.000	35.18	15.95	51.13	74.00	-22.87	peak
5	13920.000	30.53	21.79	52.32	74.00	-21.68	peak
6	17970.000	26.86	25.51	52.37	74.00	-21.63	peak




Test Mode:	Π/4DQPSK	Channel:	2402
Polarity:	Horizontal		

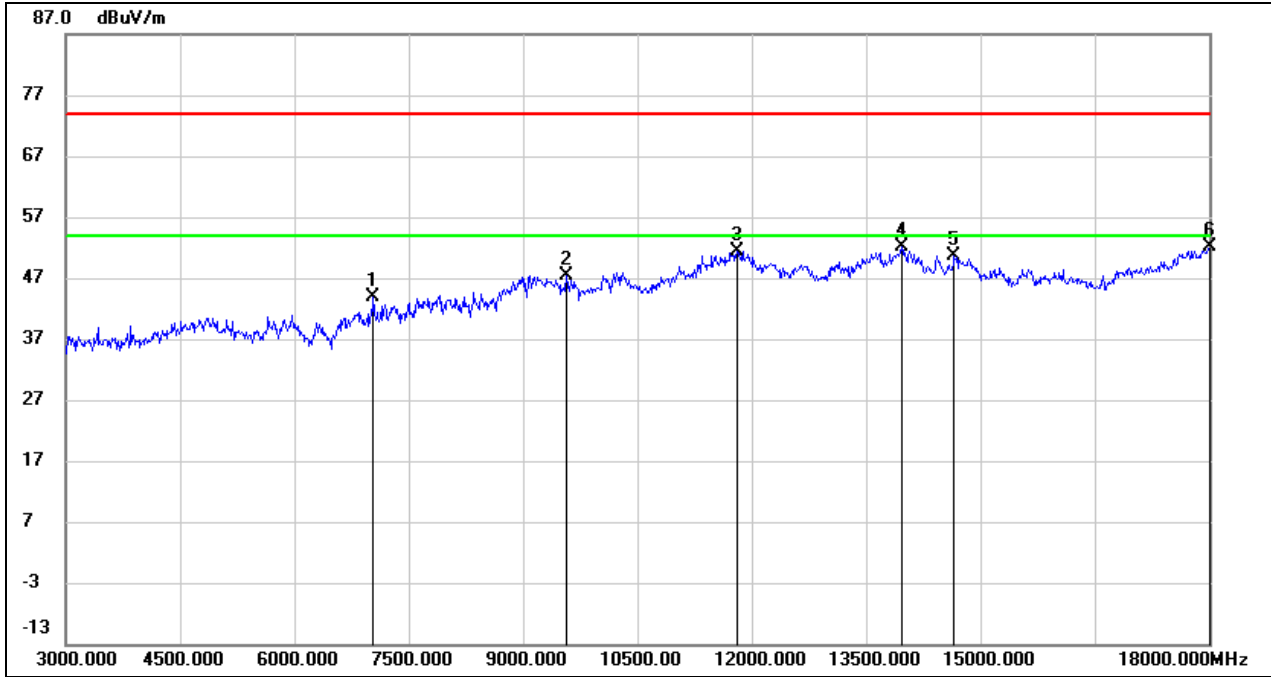

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	37.21	6.67	43.88	74.00	-30.12	peak
2	9570.000	36.58	10.87	47.45	74.00	-26.55	peak
3	11805.000	34.07	17.43	51.50	74.00	-22.50	peak
4	13965.000	30.27	21.89	52.16	74.00	-21.84	peak
5	14655.000	31.36	19.28	50.64	74.00	-23.36	peak
6	18000.000	26.38	25.69	52.07	74.00	-21.93	peak




Test Mode:	Π/4DQPSK	Channel:	2402
Polarity:	Vertical		

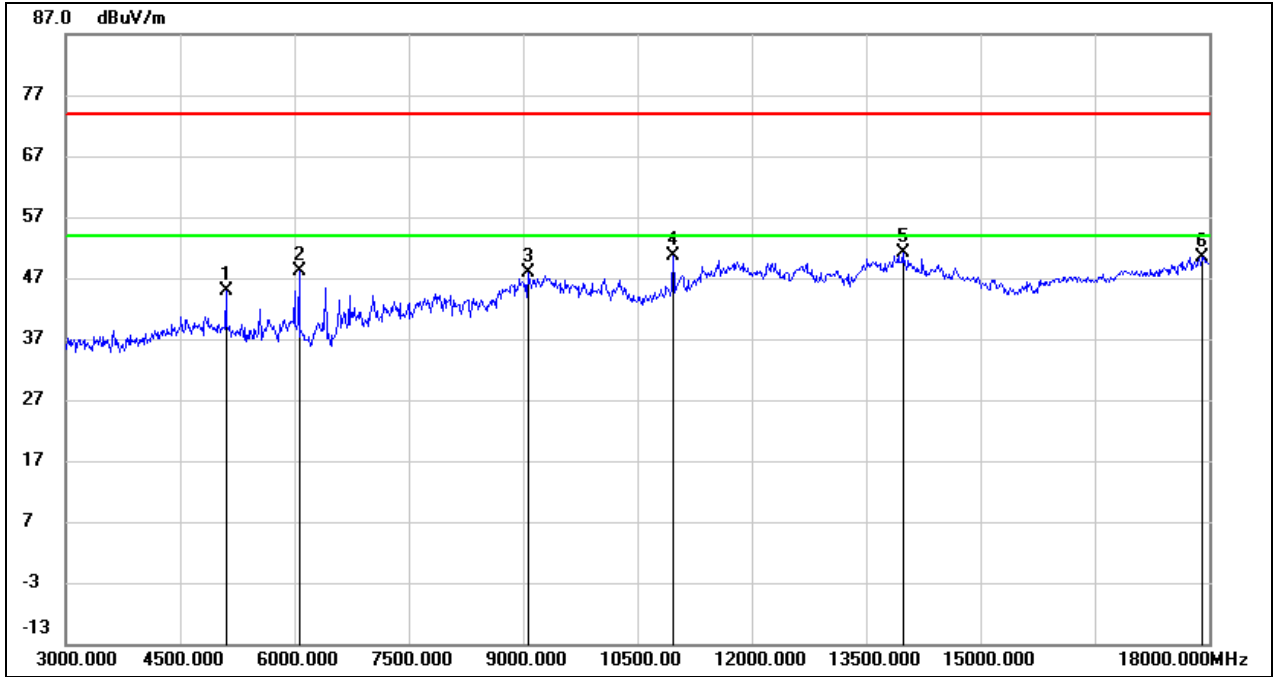

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5100.000	44.33	0.53	44.86	74.00	-29.14	peak
2	6060.000	45.53	2.49	48.02	74.00	-25.98	peak
3	9060.000	37.34	10.51	47.85	74.00	-26.15	peak
4	10965.000	35.99	14.64	50.63	74.00	-23.37	peak
5	13980.000	29.32	21.92	51.24	74.00	-22.76	peak
6	17910.000	25.23	25.16	50.39	74.00	-23.61	peak




Test Mode:	Π/4DQPSK	Channel:	2441
Polarity:	Horizontal		

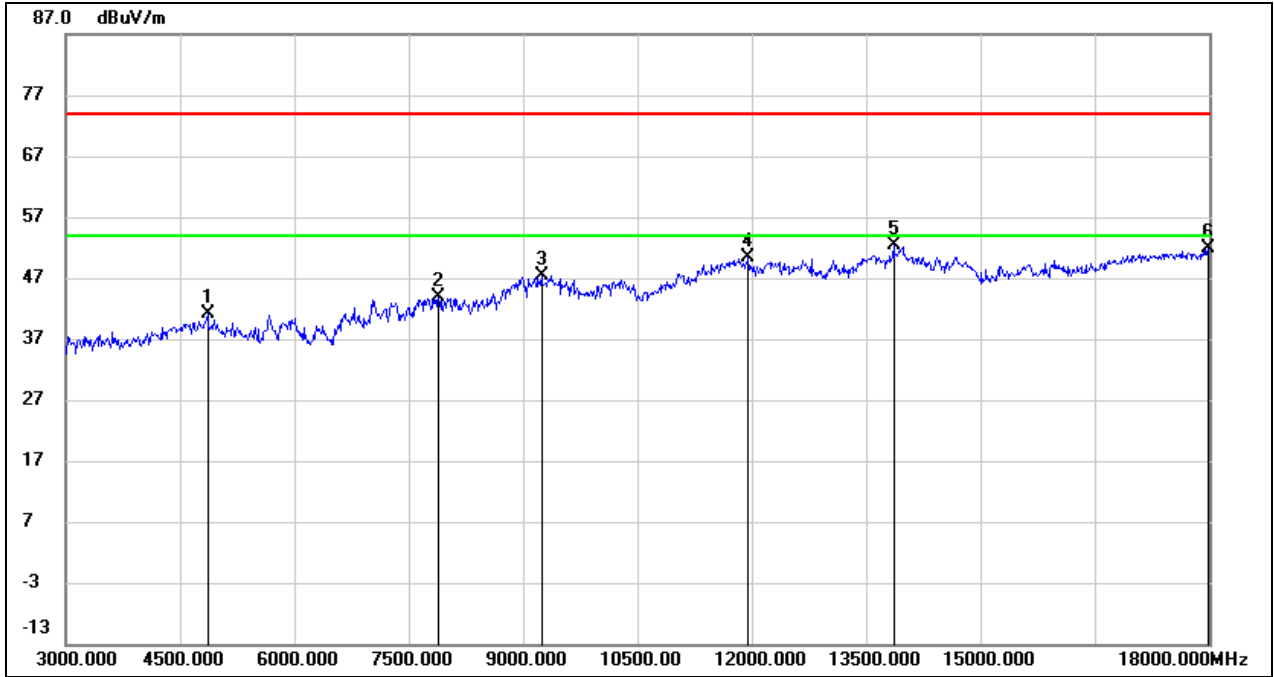

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.20	-0.09	41.11	74.00	-32.89	peak
2	7890.000	37.56	6.31	43.87	74.00	-30.13	peak
3	9240.000	36.86	10.58	47.44	74.00	-26.56	peak
4	11955.000	32.50	17.83	50.33	74.00	-23.67	peak
5	13860.000	30.82	21.67	52.49	74.00	-21.51	peak
6	17985.000	26.28	25.60	51.88	74.00	-22.12	peak



Test Mode:	Π/4DQPSK	Channel:	2441
Polarity:	Vertical		

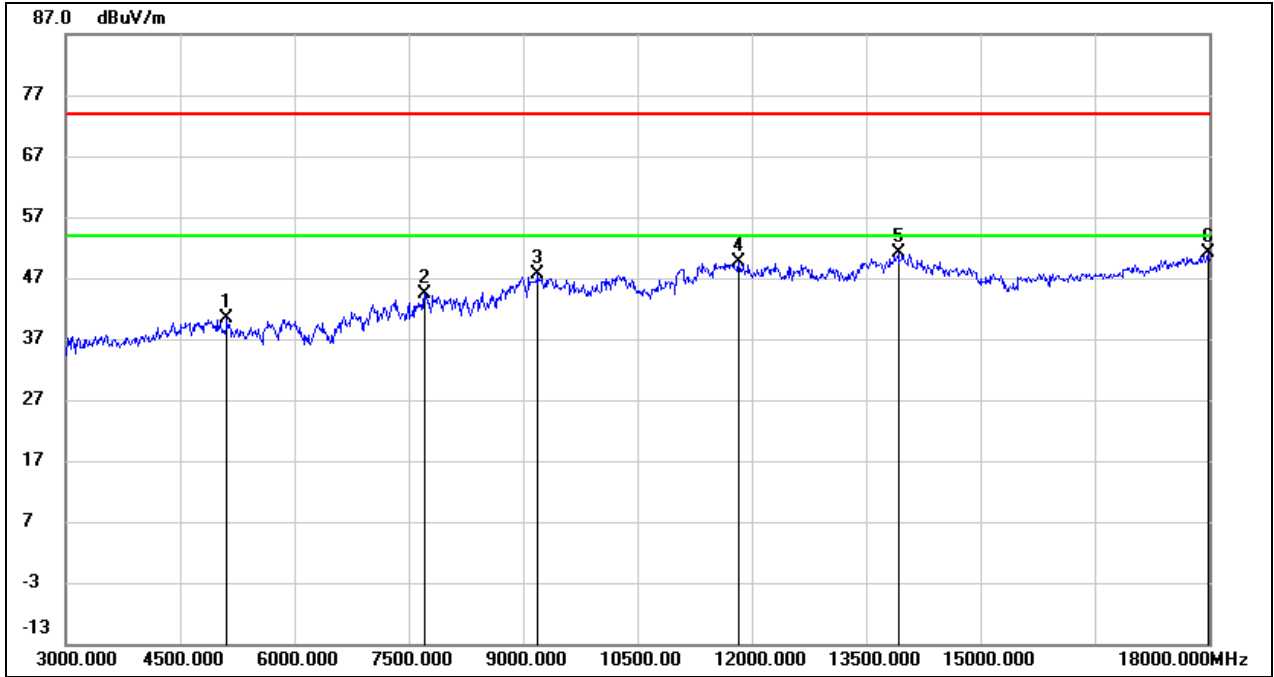


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5115.000	39.88	0.54	40.42	74.00	-33.58	peak
2	7710.000	38.09	6.33	44.42	74.00	-29.58	peak
3	9195.000	37.05	10.56	47.61	74.00	-26.39	peak
4	11835.000	32.21	17.51	49.72	74.00	-24.28	peak
5	13920.000	29.35	21.79	51.14	74.00	-22.86	peak
6	17985.000	25.61	25.60	51.21	74.00	-22.79	peak






Test Mode:	Π/4DQPSK	Channel:	2480
Polarity:	Horizontal		

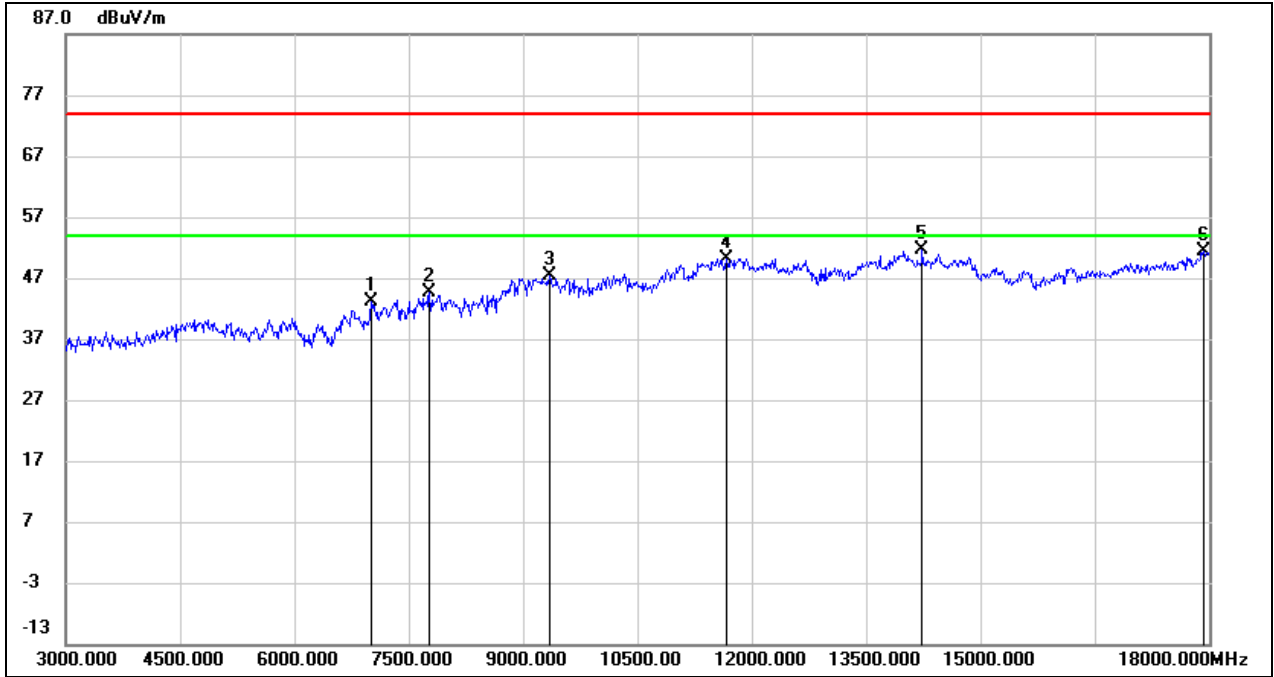

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7005.000	36.48	6.69	43.17	74.00	-30.83	peak
2	7770.000	38.30	6.31	44.61	74.00	-29.39	peak
3	9345.000	36.71	10.63	47.34	74.00	-26.66	peak
4	11670.000	33.16	17.07	50.23	74.00	-23.77	peak
5	14235.000	30.61	20.99	51.60	74.00	-22.40	peak
6	17925.000	26.01	25.25	51.26	74.00	-22.74	peak




Test Mode:	Π/4DQPSK	Channel:	2480
Polarity:	Vertical		

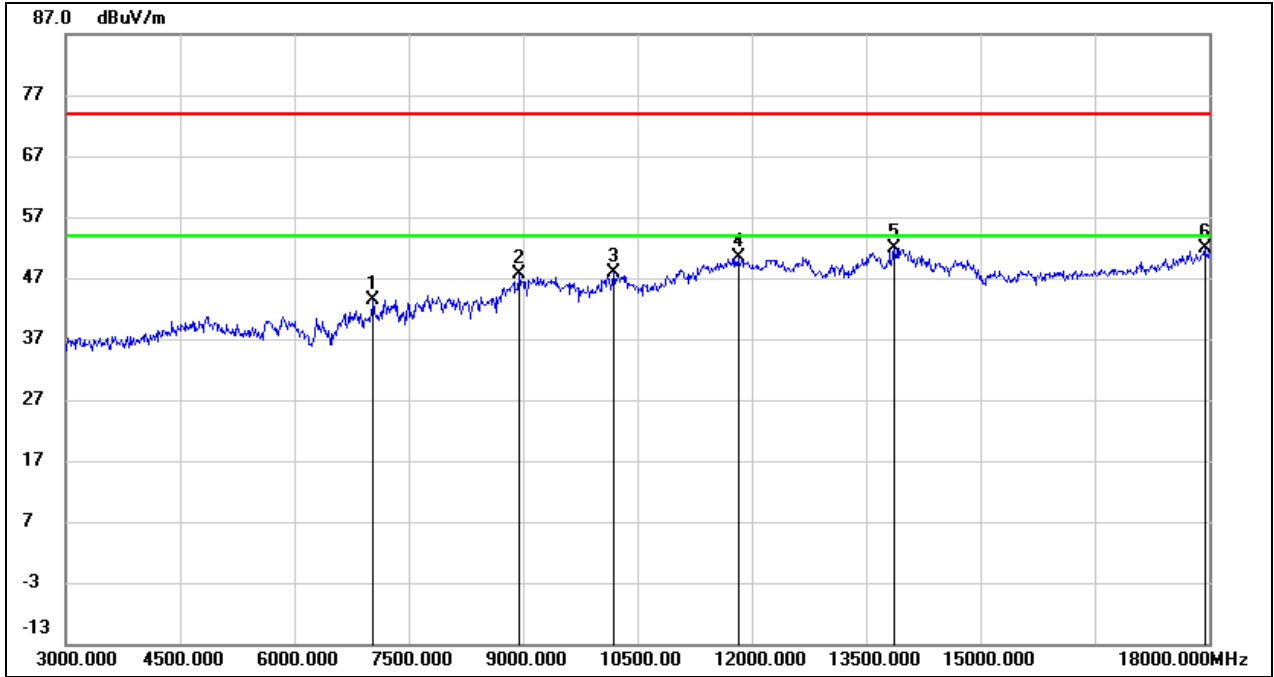

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.80	6.67	43.47	74.00	-30.53	peak
2	8955.000	37.53	10.16	47.69	74.00	-26.31	peak
3	10185.000	35.39	12.38	47.77	74.00	-26.23	peak
4	11820.000	32.97	17.47	50.44	74.00	-23.56	peak
5	13860.000	30.22	21.67	51.89	74.00	-22.11	peak
6	17940.000	26.44	25.34	51.78	74.00	-22.22	peak




Test Mode:	8DPSK	Channel:	2402
Polarity:	Horizontal		

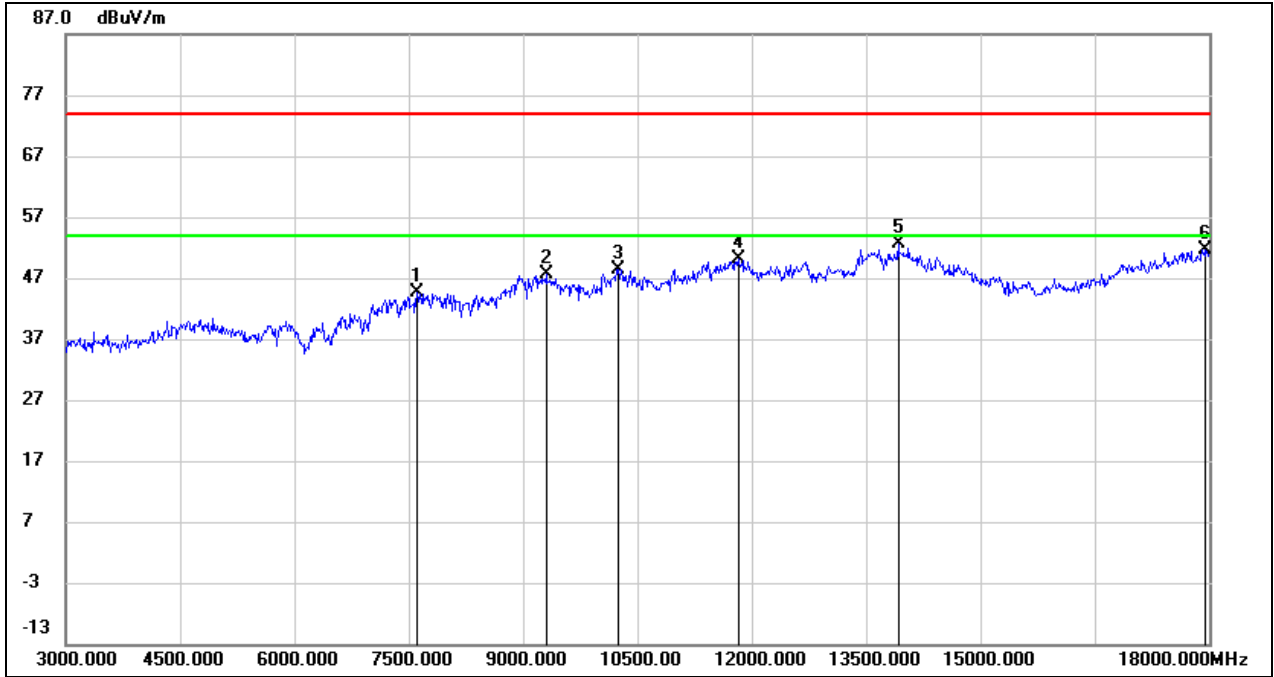

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7605.000	38.25	6.32	44.57	74.00	-29.43	peak
2	9300.000	37.10	10.61	47.71	74.00	-26.29	peak
3	10245.000	35.95	12.48	48.43	74.00	-25.57	peak
4	11820.000	32.56	17.47	50.03	74.00	-23.97	peak
5	13920.000	30.73	21.79	52.52	74.00	-21.48	peak
6	17955.000	26.30	25.42	51.72	74.00	-22.28	peak




Test Mode:	8DPSK	Channel:	2402
Polarity:	Vertical		

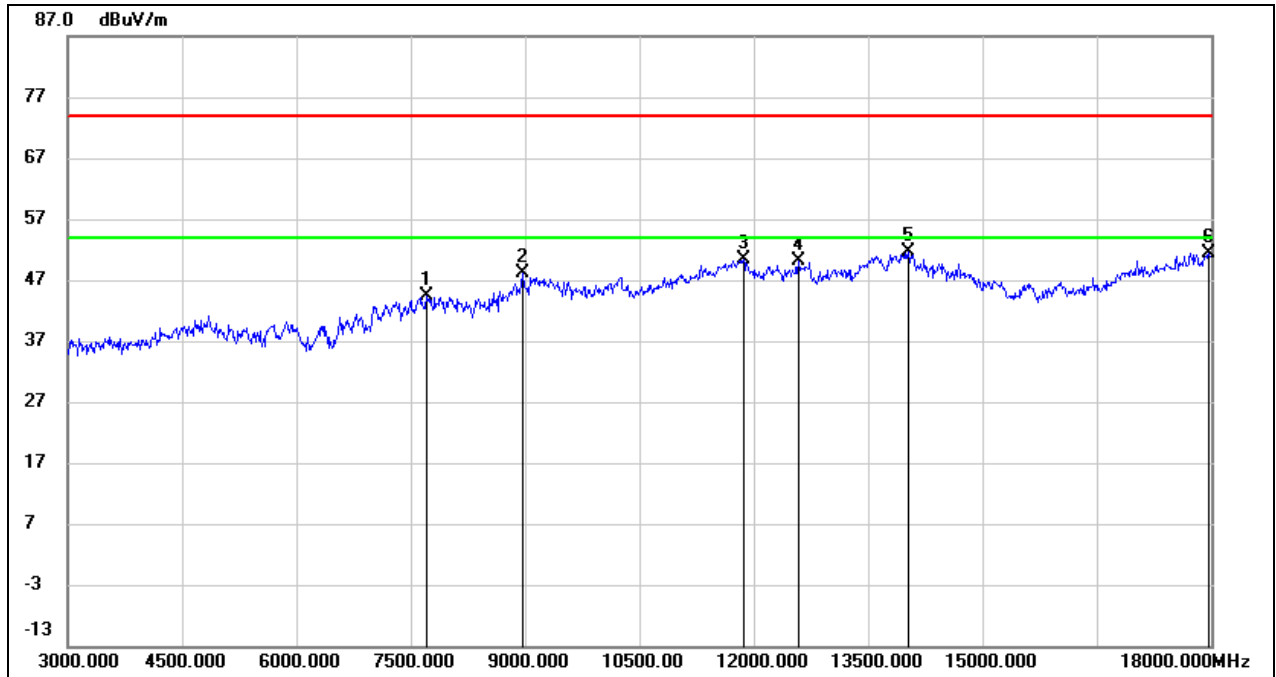

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7710.000	38.01	6.33	44.34	74.00	-29.66	peak
2	8970.000	37.89	10.26	48.15	74.00	-25.85	peak
3	11865.000	32.70	17.59	50.29	74.00	-23.71	peak
4	12585.000	32.30	17.78	50.08	74.00	-23.92	peak
5	14025.000	29.77	21.86	51.63	74.00	-22.37	peak
6	17970.000	25.94	25.51	51.45	74.00	-22.55	peak




Test Mode:	8DPSK	Channel:	2441
Polarity:	Horizontal		

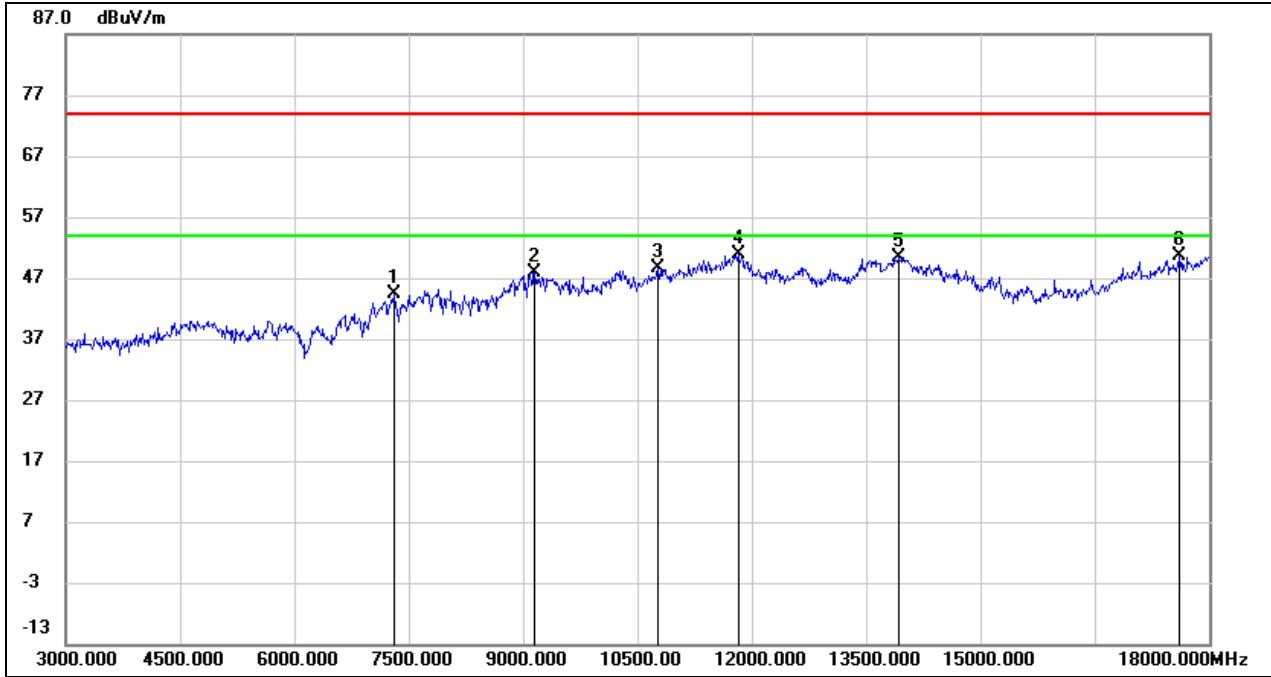

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	37.86	6.47	44.33	74.00	-29.67	peak
2	9150.000	37.40	10.54	47.94	74.00	-26.06	peak
3	10770.000	34.59	13.95	48.54	74.00	-25.46	peak
4	11820.000	33.39	17.47	50.86	74.00	-23.14	peak
5	13935.000	28.67	21.82	50.49	74.00	-23.51	peak
6	17610.000	27.13	23.38	50.51	74.00	-23.49	peak




Test Mode:	8DPSK	Channel:	2441
Polarity:	Vertical		

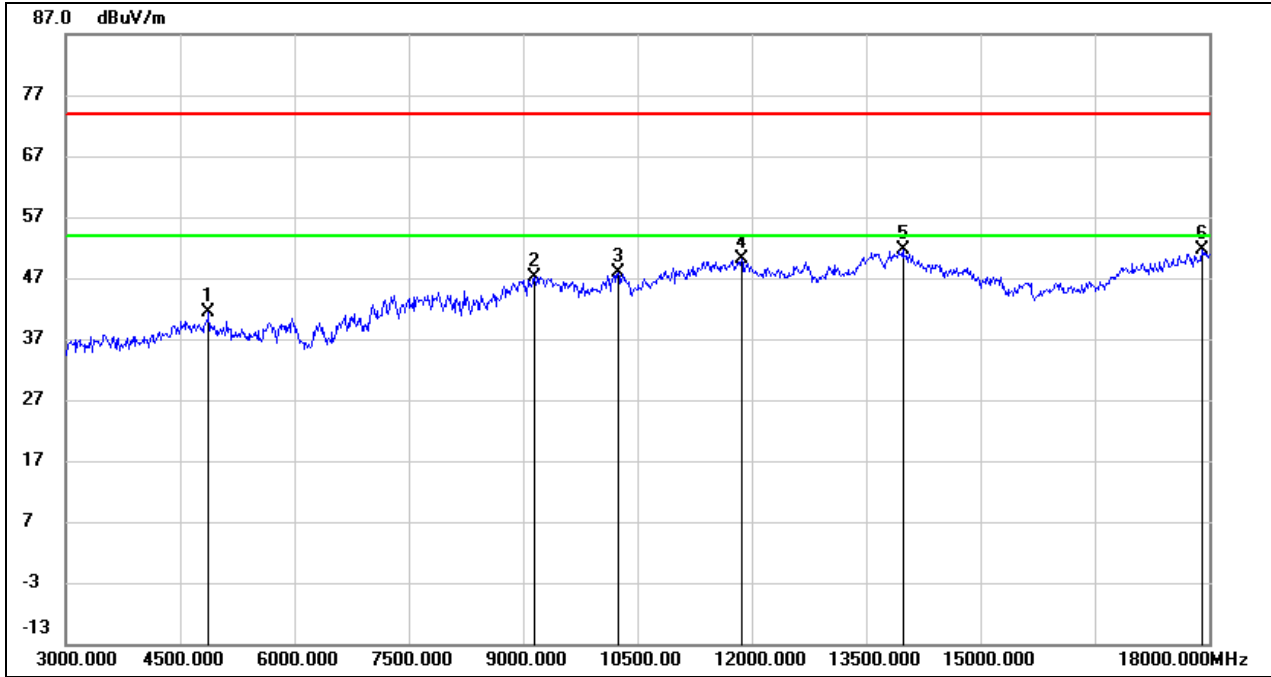

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.35	-0.03	41.32	74.00	-32.68	peak
2	9150.000	36.69	10.54	47.23	74.00	-26.77	peak
3	10245.000	35.36	12.48	47.84	74.00	-26.16	peak
4	11865.000	32.52	17.59	50.11	74.00	-23.89	peak
5	13980.000	29.71	21.92	51.63	74.00	-22.37	peak
6	17910.000	26.50	25.16	51.66	74.00	-22.34	peak




Test Mode:	8DPSK	Channel:	2480
Polarity:	Horizontal		

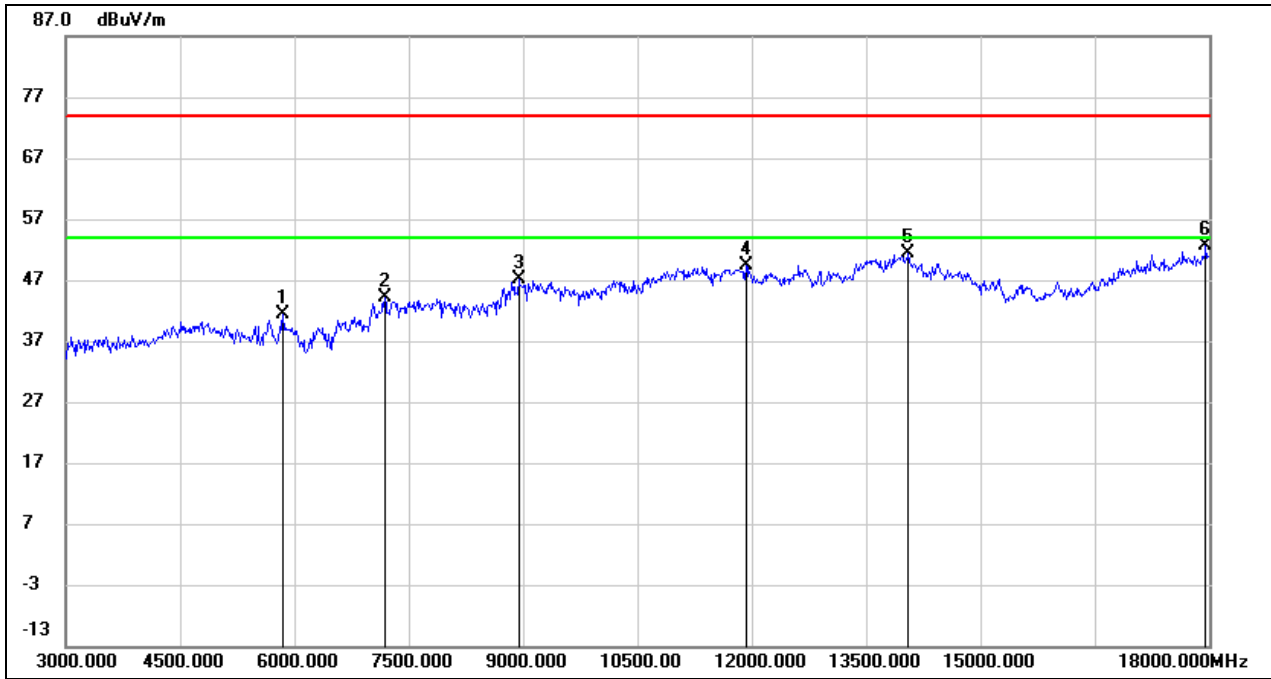

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	39.54	1.82	41.36	74.00	-32.64	peak
2	7185.000	37.51	6.55	44.06	74.00	-29.94	peak
3	8940.000	36.99	10.04	47.03	74.00	-26.97	peak
4	11925.000	31.69	17.75	49.44	74.00	-24.56	peak
5	14055.000	29.54	21.73	51.27	74.00	-22.73	peak
6	17955.000	27.17	25.42	52.59	74.00	-21.41	peak



Test Mode:	8DPSK	Channel:	2480
Polarity:	Vertical		

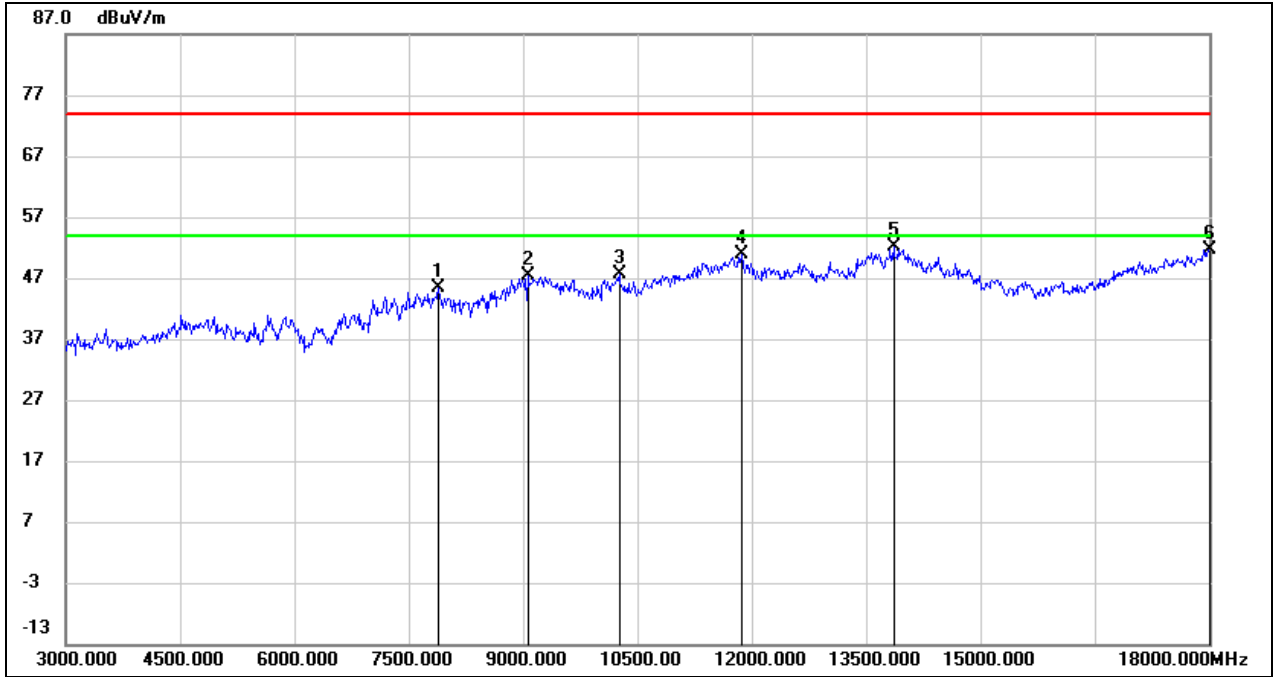


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7890.000	39.01	6.31	45.32	74.00	-28.68	peak
2	9060.000	36.90	10.51	47.41	74.00	-26.59	peak
3	10260.000	35.02	12.52	47.54	74.00	-26.46	peak
4	11865.000	33.35	17.59	50.94	74.00	-23.06	peak
5	13860.000	30.43	21.67	52.10	74.00	-21.90	peak
6	18000.000	25.88	25.69	51.57	74.00	-22.43	peak





### 8.6. SPURIOUS EMISSIONS WITH CHARGING WORST CASE(3 GHZ~18 GHZ)


Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal	Charger:	PMPN4284A

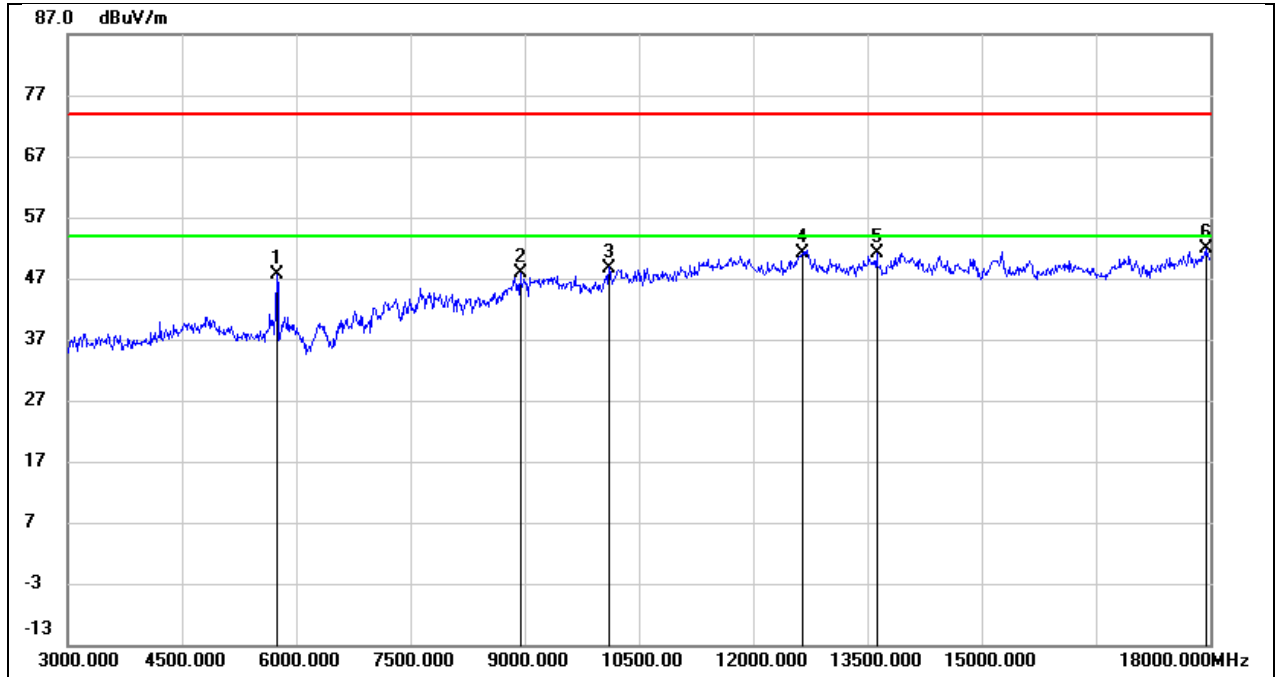

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5745.000	46.11	1.54	47.65	74.00	-26.35	peak
2	8940.000	37.73	10.04	47.77	74.00	-26.23	peak
3	10110.000	36.53	12.22	48.75	74.00	-25.25	peak
4	12645.000	33.16	17.92	51.08	74.00	-22.92	peak
5	13620.000	30.00	21.15	51.15	74.00	-22.85	peak
6	17940.000	26.60	25.34	51.94	74.00	-22.06	peak



Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical	Charger:	PMPN4284A

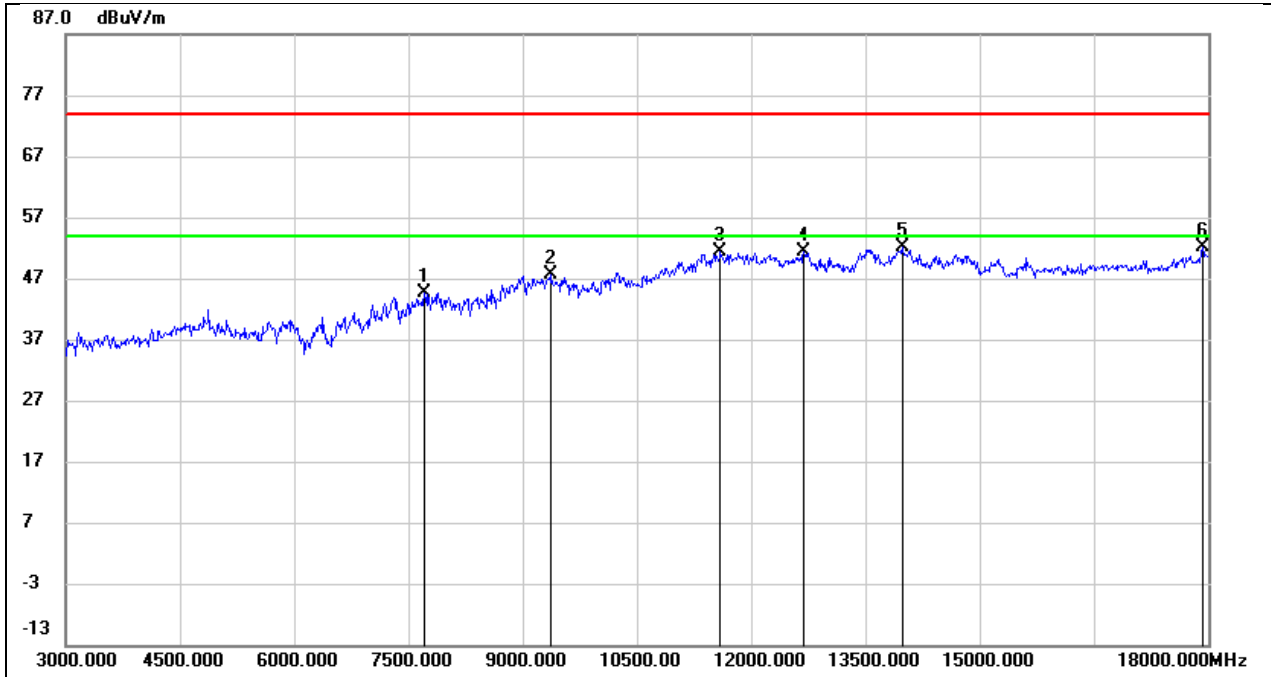


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7710.000	38.26	6.33	44.59	74.00	-29.41	peak
2	9375.000	36.94	10.64	47.58	74.00	-26.42	peak
3	11595.000	34.41	16.86	51.27	74.00	-22.73	peak
4	12690.000	33.30	18.02	51.32	74.00	-22.68	peak
5	13980.000	30.26	21.92	52.18	74.00	-21.82	peak
6	17925.000	26.83	25.25	52.08	74.00	-21.92	peak



### 8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)


Test Mode:	GFSK	Channel:	2480
Polarity:	FACE ON TO THE EUT		

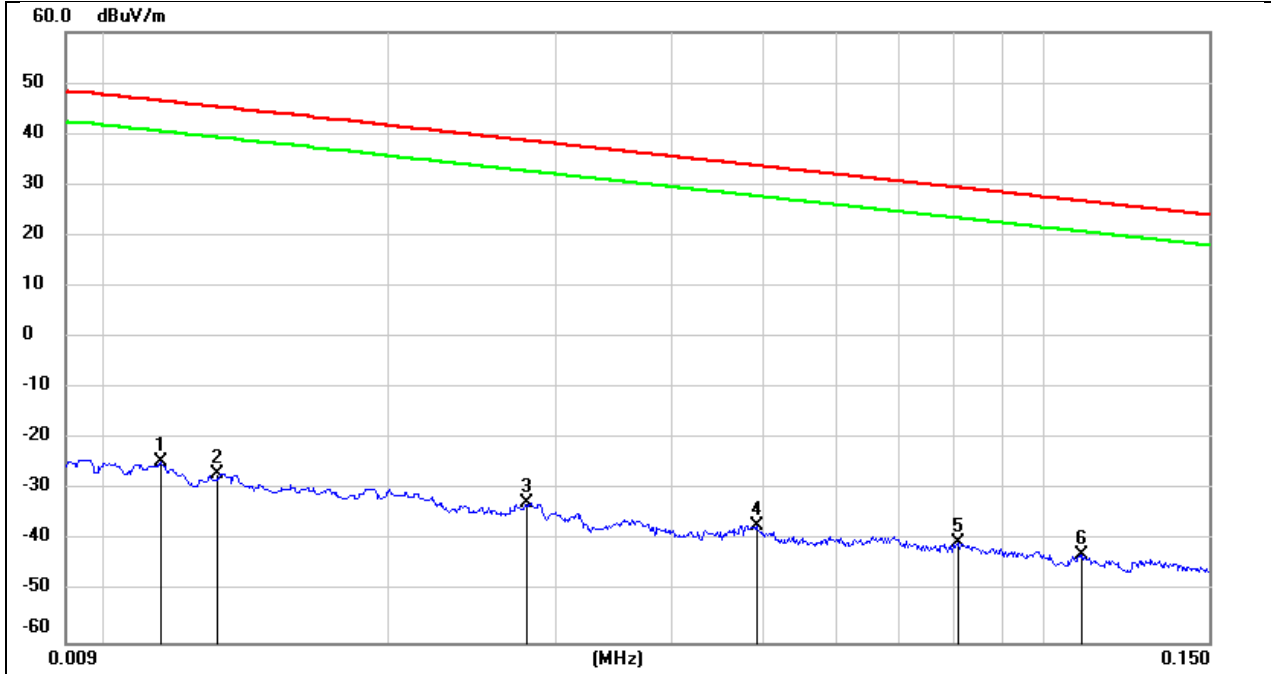

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0114	76.88	-101.40	-24.52	46.46	-76.02	-5.04	-70.98	peak
2	0.0131	74.47	-101.38	-26.91	45.25	-78.41	-6.25	-72.16	peak
3	0.0280	68.79	-101.38	-32.59	38.66	-84.09	-12.84	-71.25	peak
4	0.0492	64.55	-101.47	-36.92	33.76	-88.42	-17.74	-70.68	peak
5	0.0806	61.18	-101.63	-40.45	29.47	-91.95	-22.03	-69.92	peak
6	0.1100	58.92	-101.77	-42.85	26.78	-94.35	-24.72	-69.63	peak




Test Mode:	GFSK	Channel:	2480
Polarity:	FACE ON TO THE EUT		

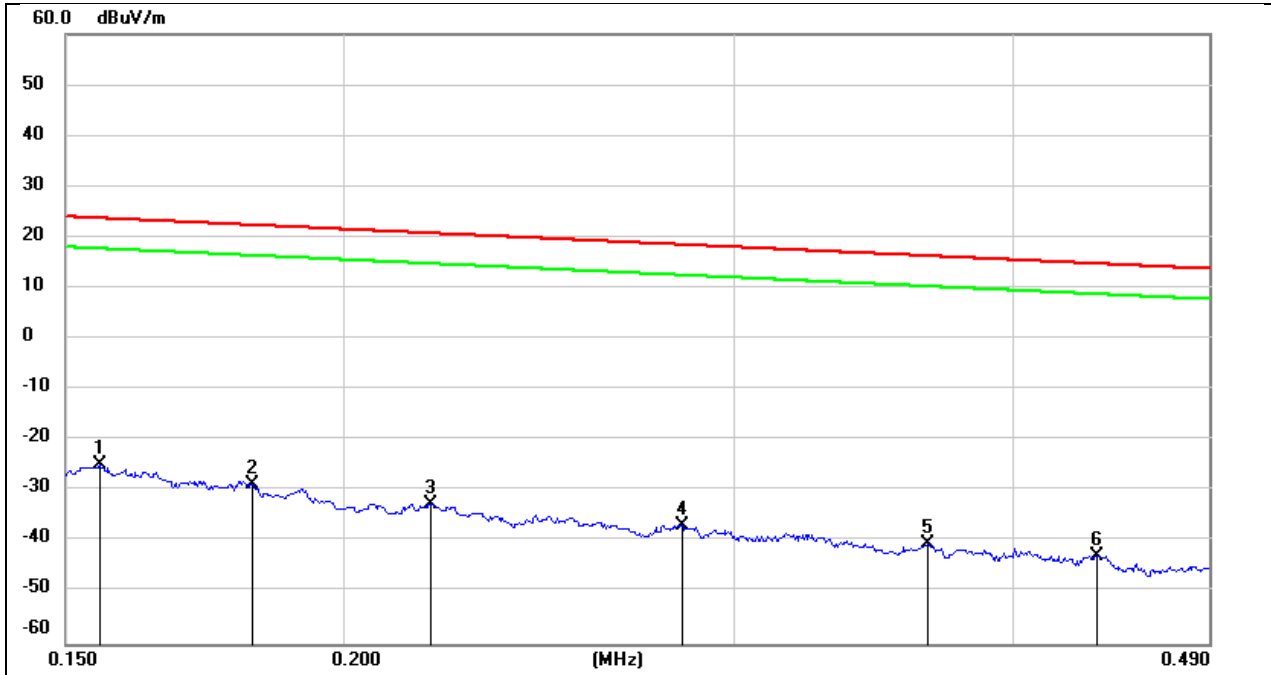

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	76.77	-101.65	-24.88	23.77	-76.38	-27.73	-48.65	peak
2	0.1819	72.99	-101.68	-28.69	22.41	-80.19	-29.09	-51.10	peak
3	0.2190	69.27	-101.75	-32.48	20.79	-83.98	-30.71	-53.27	peak
4	0.2837	65.22	-101.83	-36.61	18.54	-88.11	-32.96	-55.15	peak
5	0.3662	61.58	-101.93	-40.35	16.33	-91.85	-35.17	-56.68	peak
6	0.4364	59.36	-101.99	-42.63	14.80	-94.13	-36.70	-57.43	peak



Test Mode:	GFSK	Channel:	2480
Polarity:	FACE ON TO THE EUT		

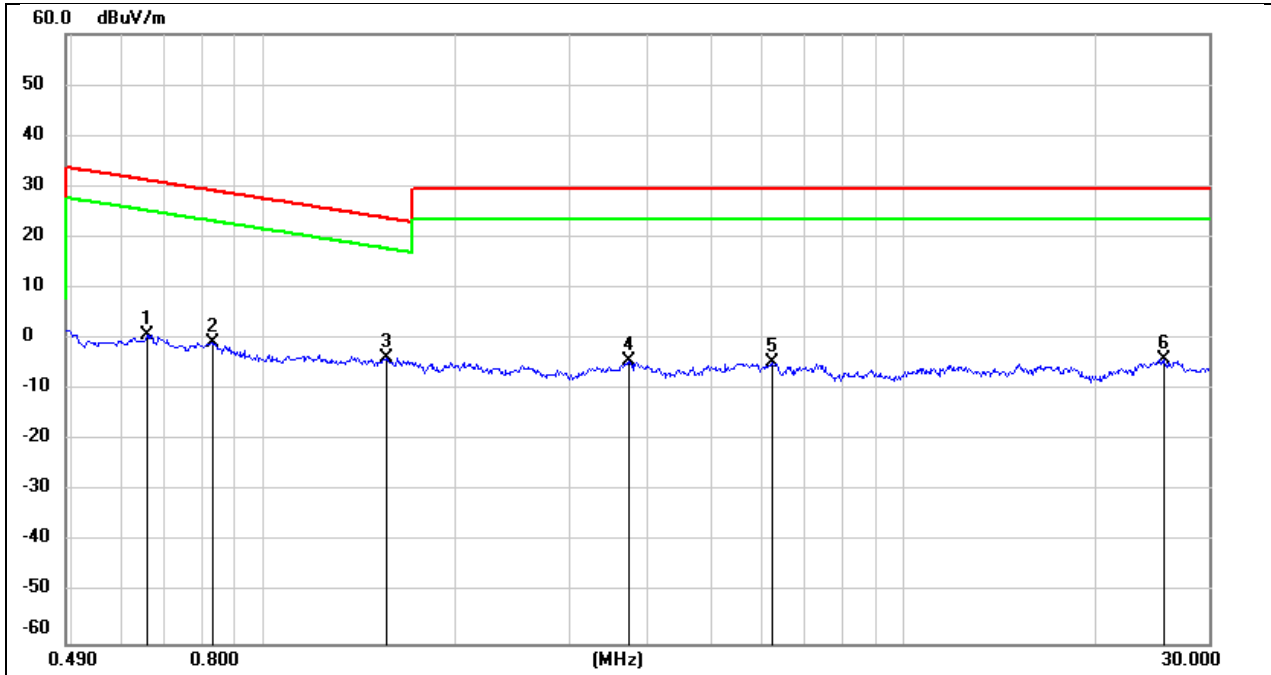


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6561	62.93	-62.10	0.83	31.26	-50.67	-20.24	-30.43	peak
2	0.8296	61.44	-62.17	-0.73	29.23	-52.23	-22.27	-29.96	peak
3	1.5564	58.18	-62.02	-3.84	23.76	-55.34	-27.74	-27.60	peak
4	3.7100	57.20	-61.41	-4.21	29.54	-55.71	-21.96	-33.75	peak
5	6.2445	56.63	-61.32	-4.69	29.54	-56.19	-21.96	-34.23	peak
6	25.4847	56.22	-60.40	-4.18	29.54	-55.68	-21.96	-33.72	peak



### 8.8. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)


Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal		

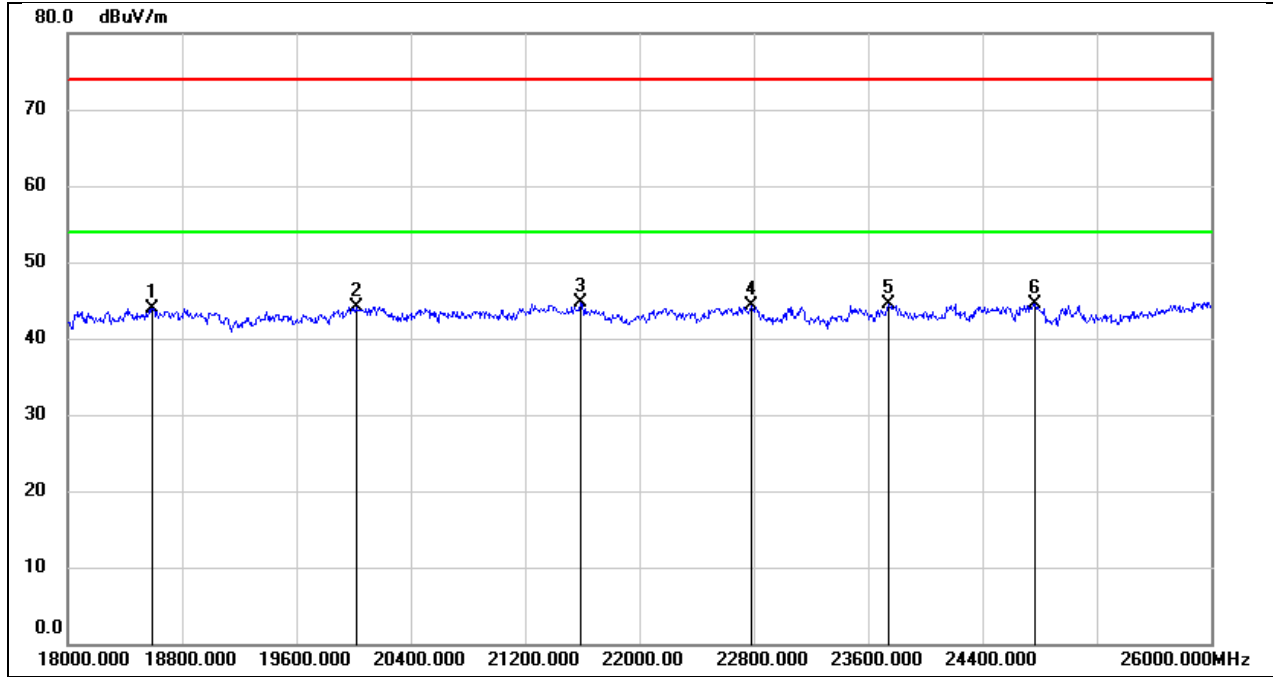

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	49.25	-5.31	43.94	74.00	-30.06	peak
2	20016.000	49.56	-5.47	44.09	74.00	-29.91	peak
3	21584.000	49.19	-4.56	44.63	74.00	-29.37	peak
4	22784.000	47.98	-3.65	44.33	74.00	-29.67	peak
5	23744.000	47.65	-3.20	44.45	74.00	-29.55	peak
6	24768.000	46.86	-2.31	44.55	74.00	-29.45	peak



Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical		

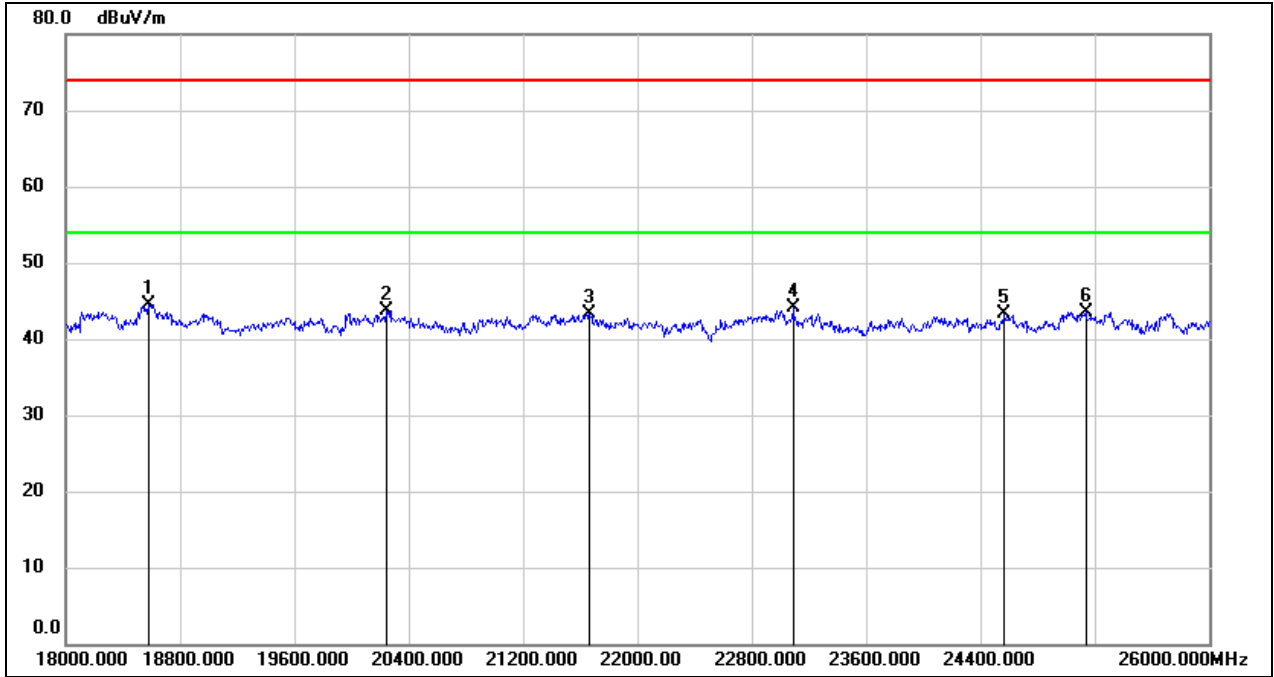


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18576.000	49.79	-5.30	44.49	74.00	-29.51	peak
2	20240.000	49.32	-5.61	43.71	74.00	-30.29	peak
3	21664.000	47.73	-4.45	43.28	74.00	-30.72	peak
4	23088.000	47.52	-3.41	44.11	74.00	-29.89	peak
5	24568.000	45.60	-2.33	43.27	74.00	-30.73	peak
6	25136.000	45.42	-1.87	43.55	74.00	-30.45	peak



### 8.9. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal		

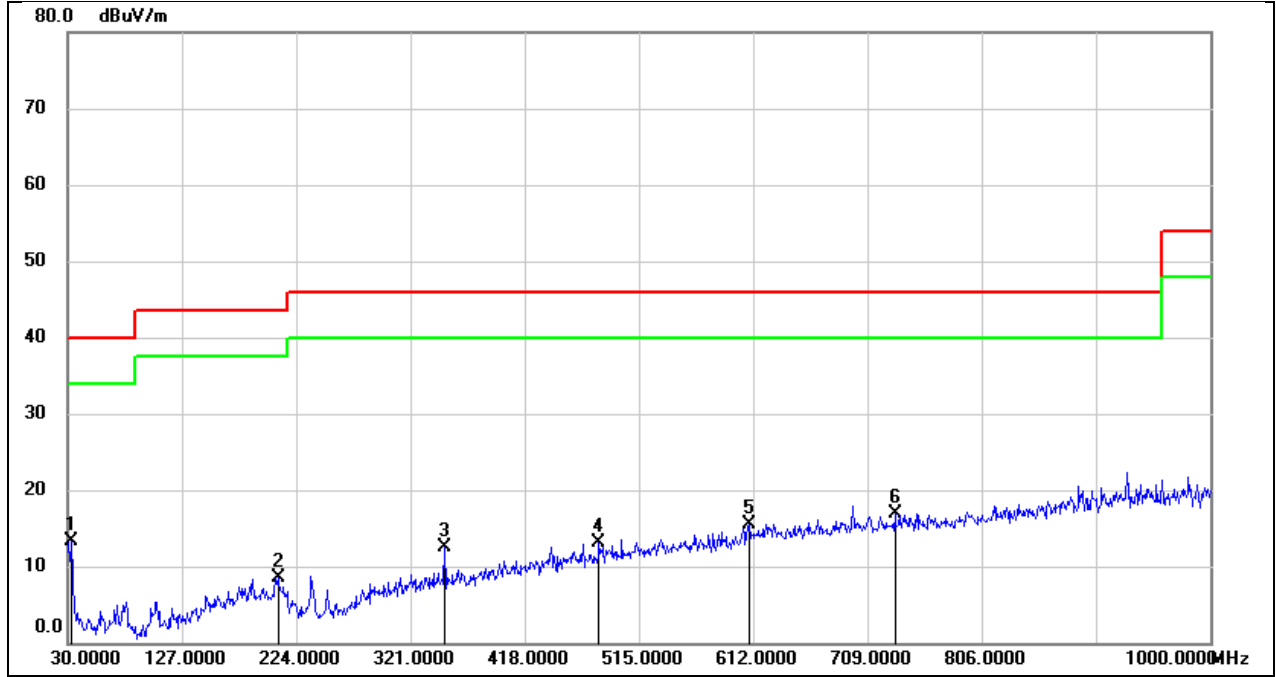


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	32.45	-19.22	13.23	40.00	-26.77	QP
2	208.4800	25.67	-17.14	8.53	43.50	-34.97	QP
3	350.1000	26.83	-14.32	12.51	46.00	-33.49	QP
4	481.0500	24.93	-11.78	13.15	46.00	-32.85	QP
5	609.0900	24.97	-9.41	15.56	46.00	-30.44	QP
6	732.2800	25.03	-8.08	16.95	46.00	-29.05	QP





Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical		

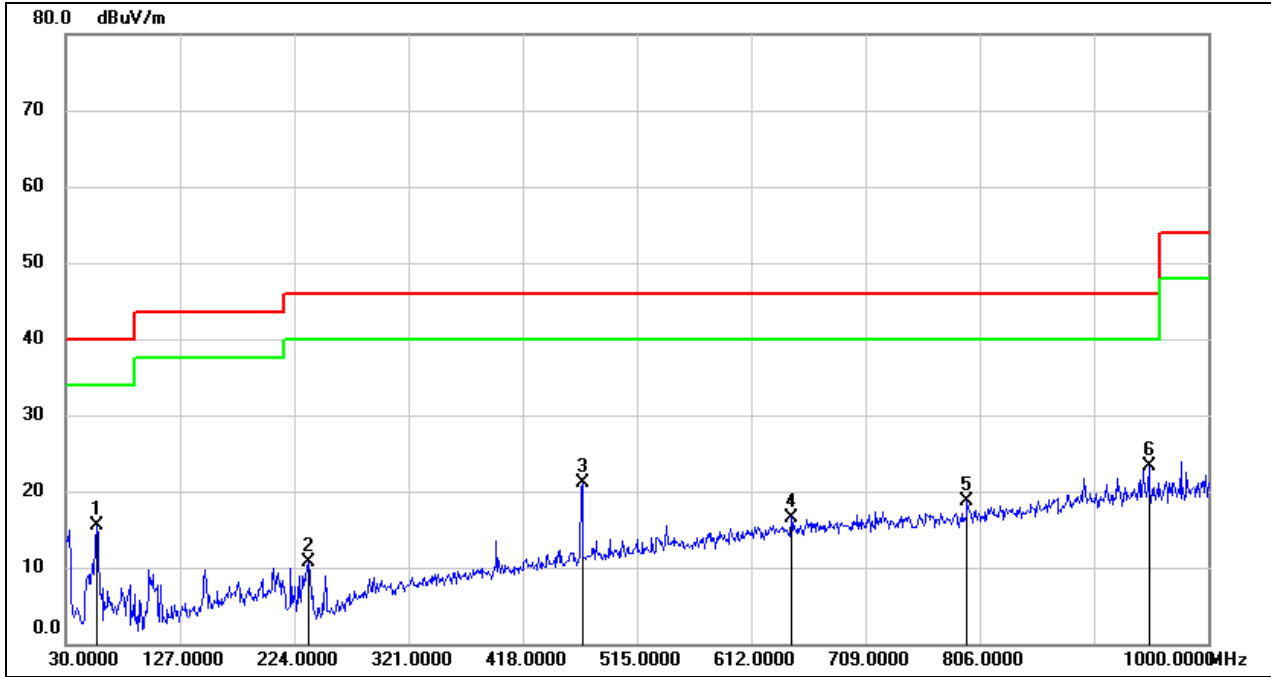


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	56.1900	36.14	-20.61	15.53	40.00	-24.47	QP
2	235.6400	29.73	-18.96	10.77	46.00	-35.23	QP
3	468.4400	33.18	-12.04	21.14	46.00	-24.86	QP
4	645.9500	25.65	-9.05	16.60	46.00	-29.40	QP
5	795.3300	26.05	-7.36	18.69	46.00	-27.31	QP
6	949.5600	27.77	-4.41	23.36	46.00	-22.64	QP



### 8.10. SPURIOUS EMISSIONS WITH CHARGING WORST CASE(30 MHZ~1 GHZ)


Test Mode:	GFSK	Channel:	2480
Polarity:	Horizontal	Charger:	PMPN4284A

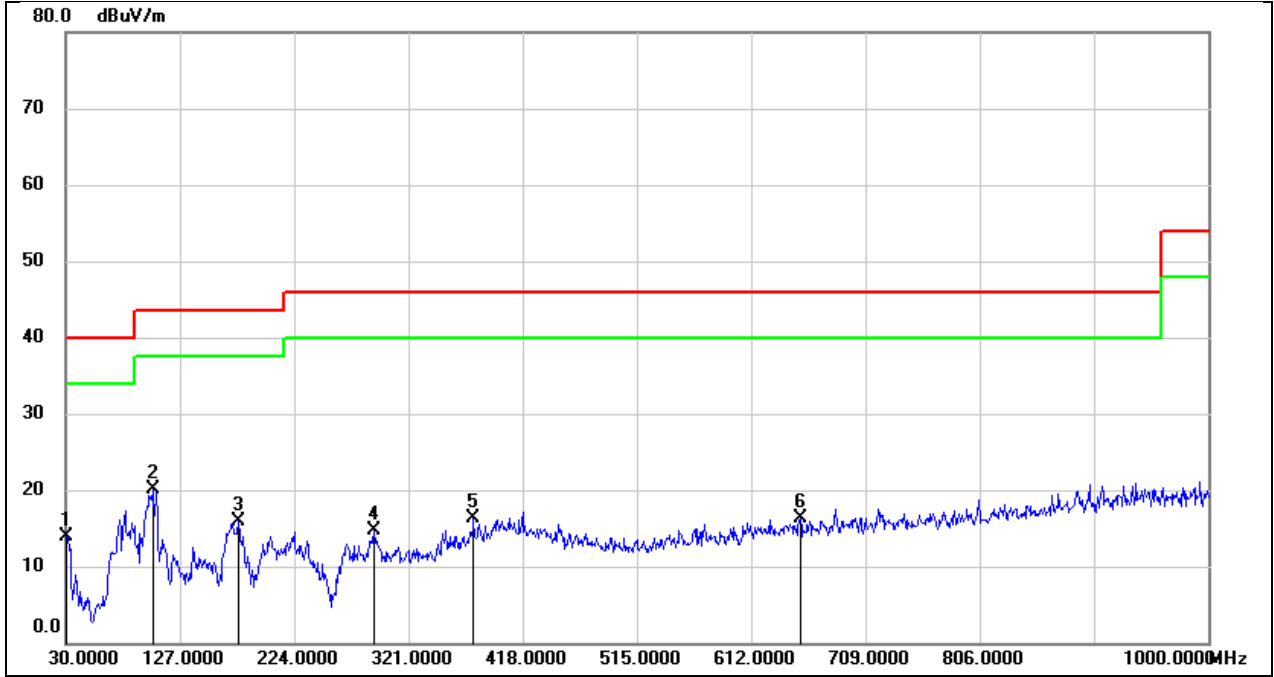

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	33.01	-19.04	13.97	40.00	-26.03	QP
2	103.7200	40.91	-20.84	20.07	43.50	-23.43	QP
3	176.4700	32.98	-17.02	15.96	43.50	-27.54	QP
4	291.9000	30.43	-15.80	14.63	46.00	-31.37	QP
5	376.2900	30.16	-13.77	16.39	46.00	-29.61	QP
6	653.7100	25.16	-8.92	16.24	46.00	-29.76	QP



Test Mode:	GFSK	Channel:	2480
Polarity:	Vertical	Charger:	PMPN4284A

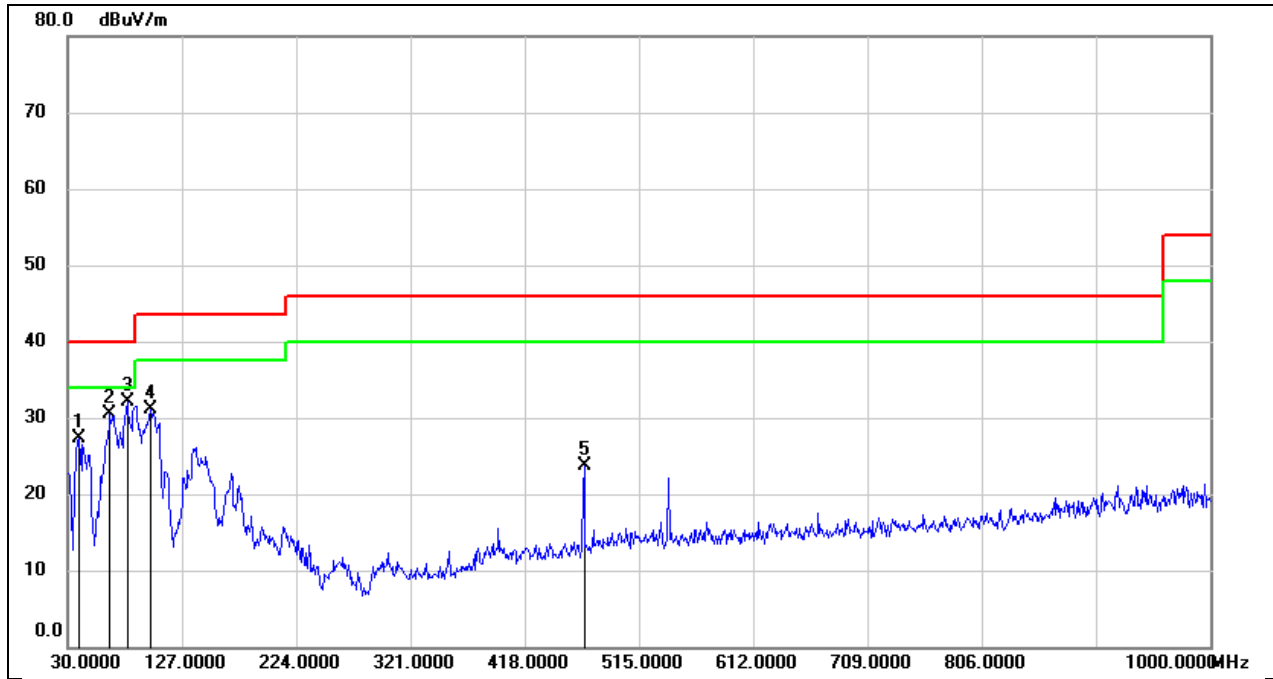

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	47.30	-19.96	27.34	40.00	-12.66	QP
2	65.8900	51.05	-20.55	30.50	40.00	-9.50	QP
3	80.4400	53.48	-21.38	32.10	40.00	-7.90	QP
4	100.8100	52.19	-21.08	31.11	43.50	-12.39	QP
5	468.4400	35.81	-12.04	23.77	46.00	-22.23	QP



## 9. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Complies

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE


#### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

#### TEST SETUP

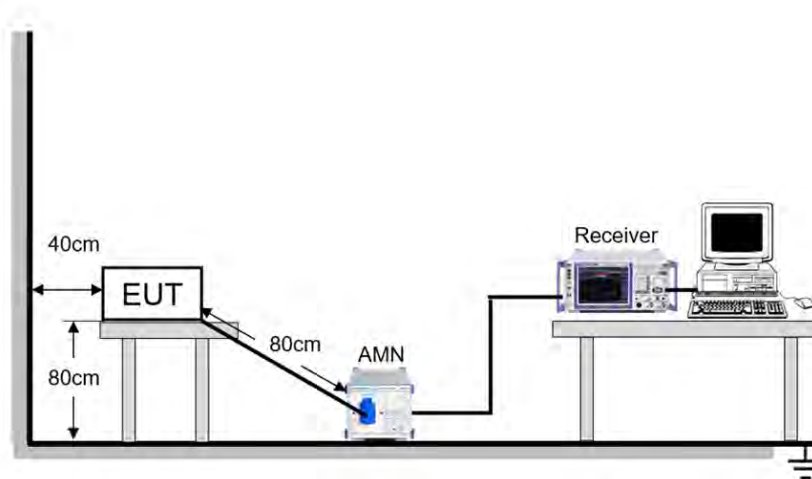




**TEST ENVIRONMENT**

Temperature	23.8°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Test Mode:	GFSK	Channel:	2480
Line:	Line		

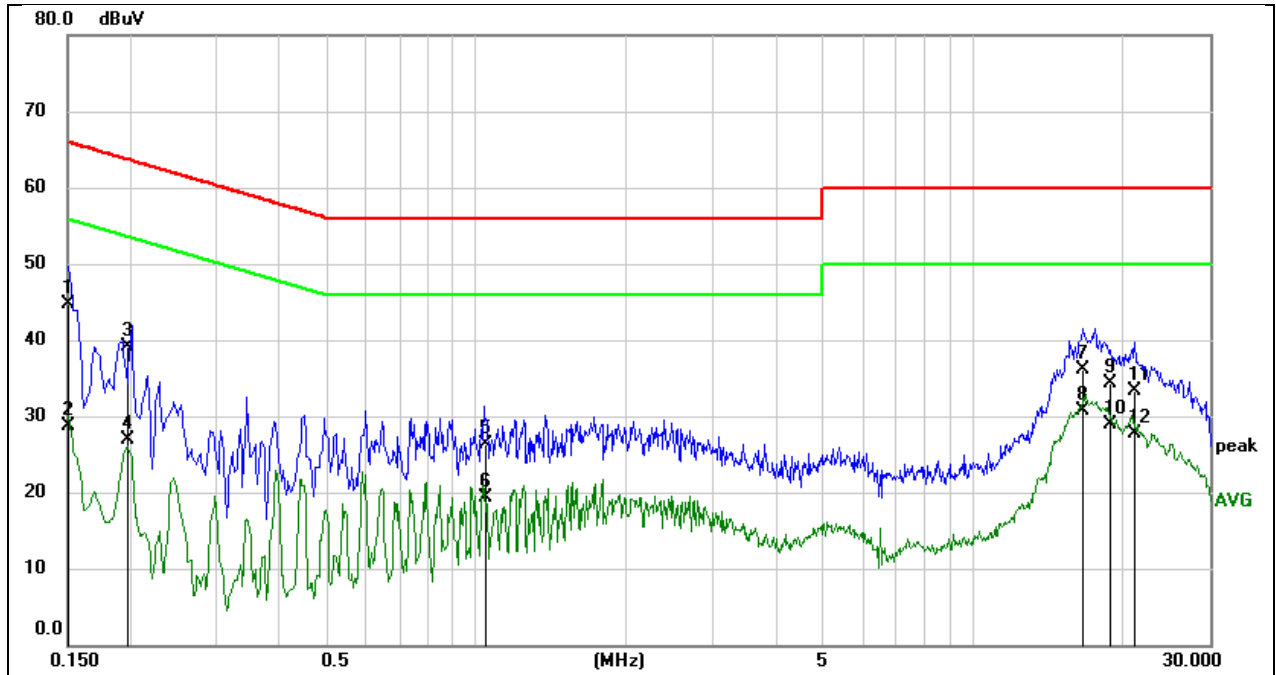

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	35.21	9.49	44.70	66.00	-21.30	QP
2	0.1500	19.12	9.49	28.61	56.00	-27.39	AVG
3	0.1985	29.46	9.59	39.05	63.67	-24.62	QP
4	0.1985	17.23	9.59	26.82	53.67	-26.85	AVG
5	1.0392	16.80	9.51	26.31	56.00	-29.69	QP
6	1.0392	9.71	9.51	19.22	46.00	-26.78	AVG
7	16.7362	26.45	9.67	36.12	60.00	-23.88	QP
8	16.7362	21.06	9.67	30.73	50.00	-19.27	AVG
9	18.7904	24.61	9.72	34.33	60.00	-25.67	QP
10	18.7904	19.28	9.72	29.00	50.00	-21.00	AVG
11	21.1679	23.50	9.75	33.25	60.00	-26.75	QP
12	21.1679	17.94	9.75	27.69	50.00	-22.31	AVG


Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



Test Mode:	GFSK	Channel:	2480
Line:	Neutral		

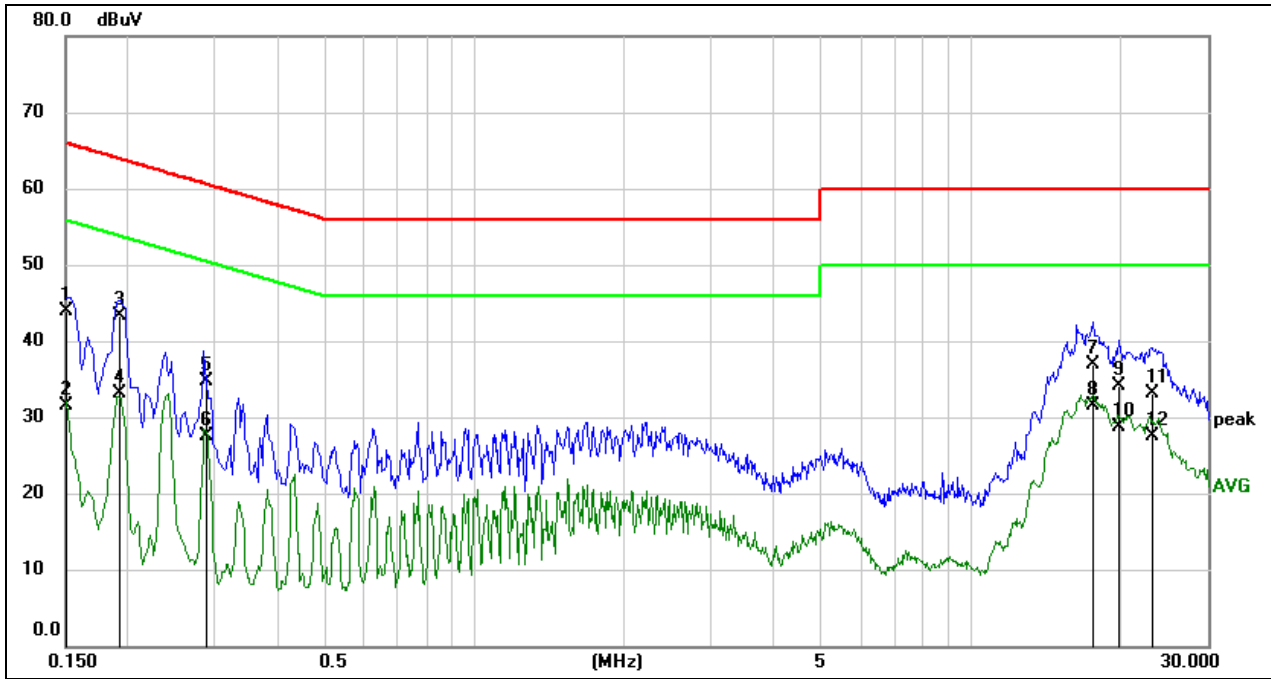

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	34.51	9.49	44.00	66.00	-22.00	QP
2	0.1500	21.99	9.49	31.48	56.00	-24.52	AVG
3	0.1920	33.79	9.57	43.36	63.95	-20.59	QP
4	0.1920	23.59	9.57	33.16	53.95	-20.79	AVG
5	0.2881	25.06	9.56	34.62	60.58	-25.96	QP
6	0.2881	17.97	9.56	27.53	50.58	-23.05	AVG
7	17.5355	27.14	9.69	36.83	60.00	-23.17	QP
8	17.5355	21.78	9.69	31.47	50.00	-18.53	AVG
9	19.8653	24.32	9.74	34.06	60.00	-25.94	QP
10	19.8653	18.94	9.74	28.68	50.00	-21.32	AVG
11	23.1757	23.32	9.75	33.07	60.00	-26.93	QP
12	23.1757	17.67	9.75	27.42	50.00	-22.58	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.



## 11. TEST DATA

### 11.1. APPENDIX A: 20DB EMISSION BANDWIDTH


#### 11.1.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.94	2401.54	2402.47	PASS
		2441	0.94	2440.53	2441.48	PASS
		2480	0.94	2479.53	2480.47	PASS
2DH5	Ant1	2402	1.32	2401.34	2402.65	PASS
		2441	1.32	2440.34	2441.65	PASS
		2480	1.32	2479.34	2480.65	PASS
3DH5	Ant1	2402	1.28	2401.35	2402.63	PASS
		2441	1.28	2440.35	2441.63	PASS
		2480	1.28	2479.35	2480.63	PASS







### 11.1.2. Test Graphs

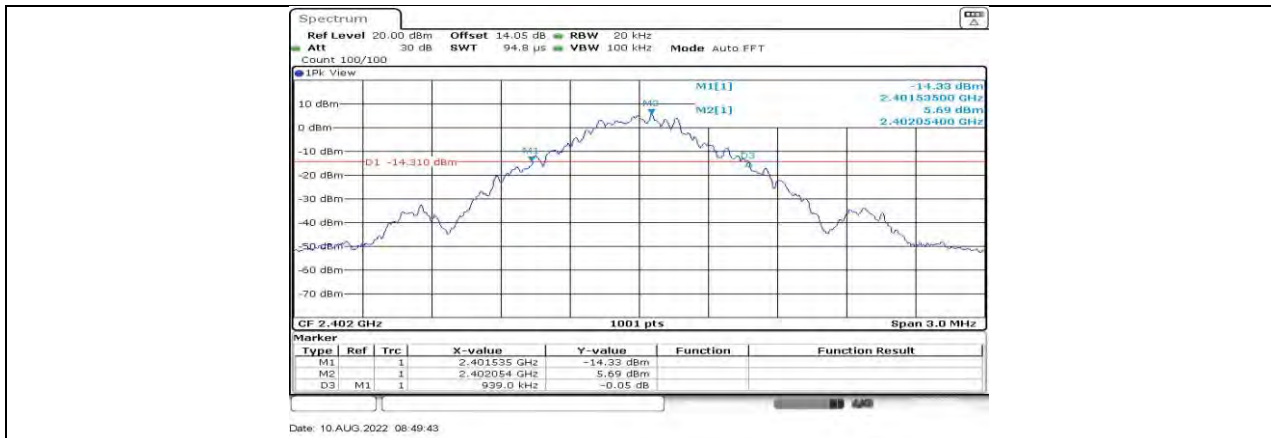


DH5 Ant1\_2402

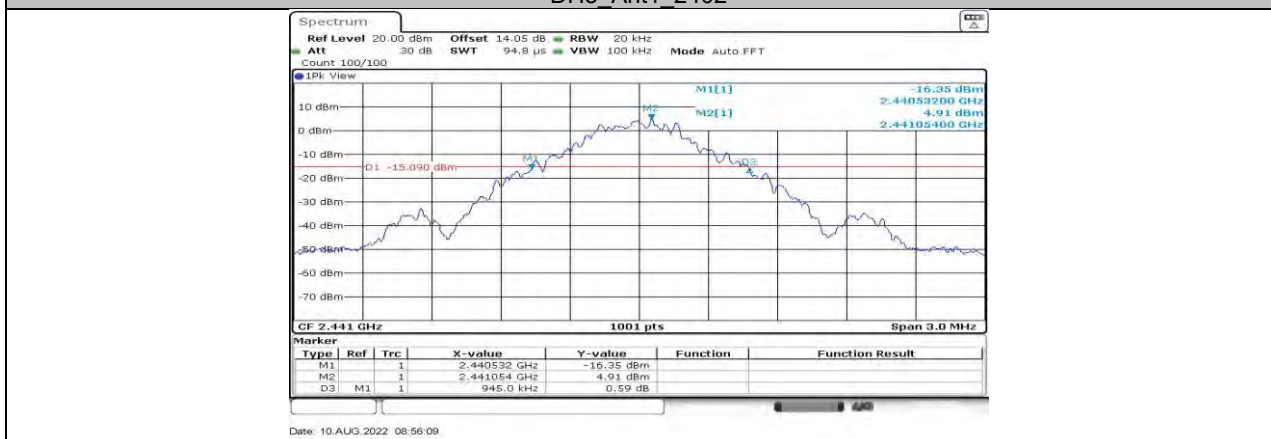


DH5 Ant1\_2441

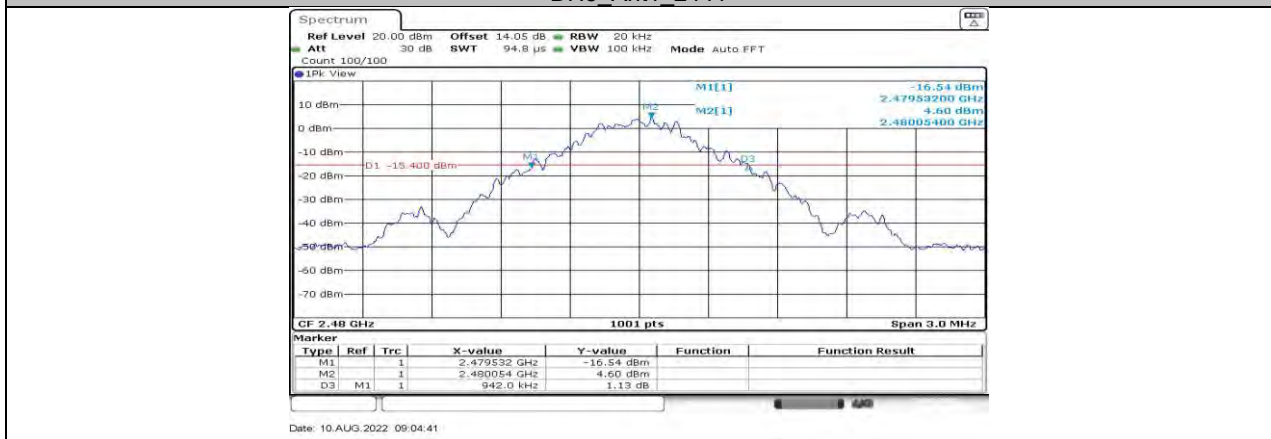


DH5 Ant1\_2480

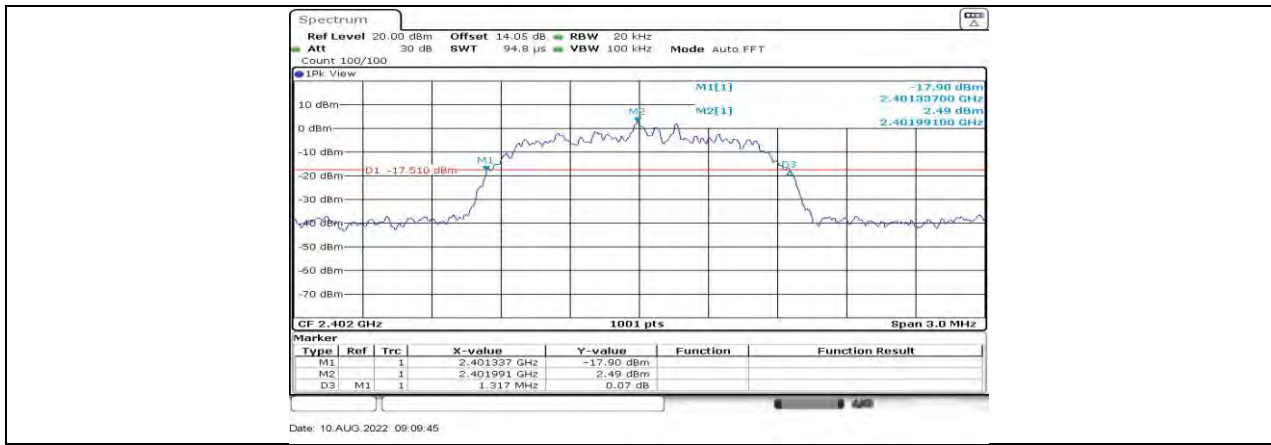



2DH5 Ant1\_2402

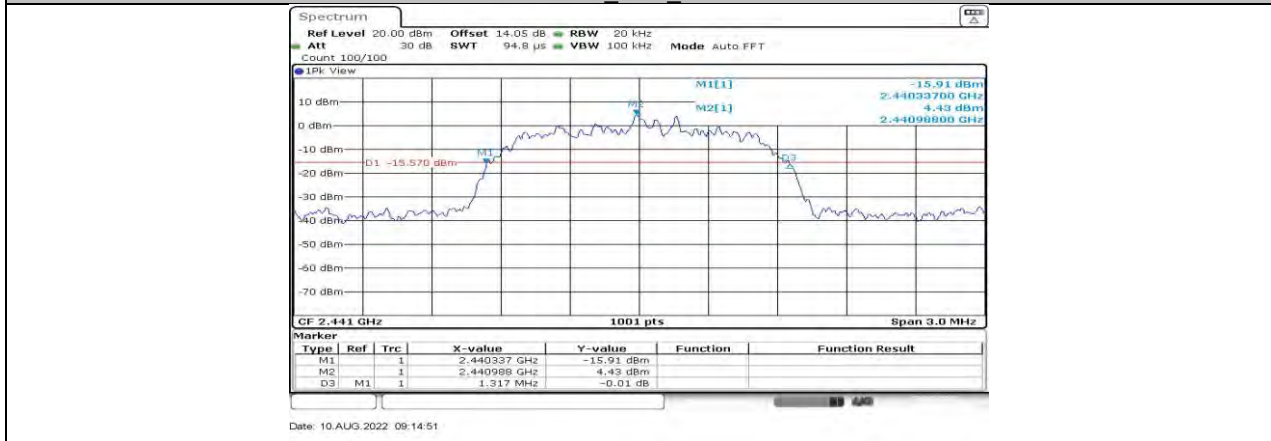

2DH5 Ant1\_2441

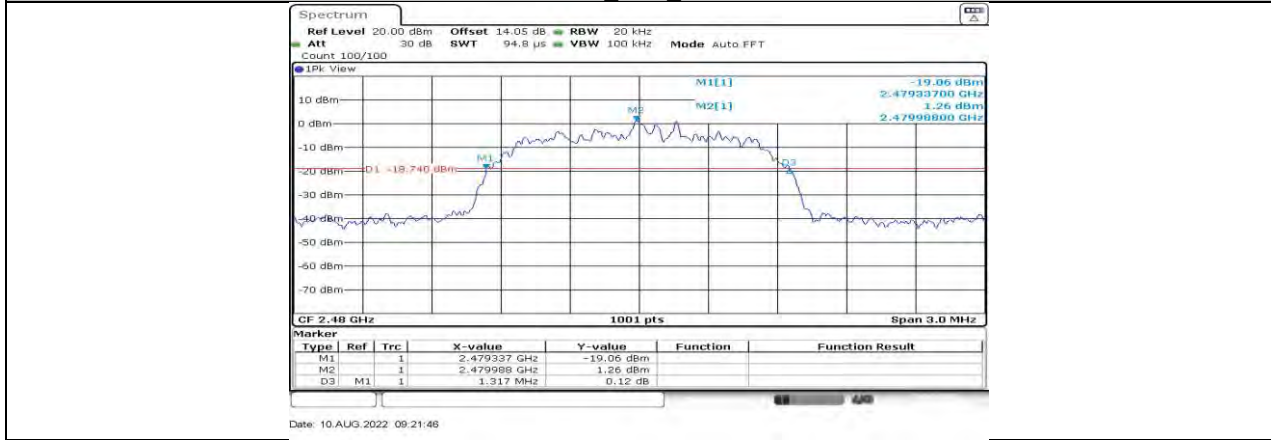

2DH5 Ant1\_2480

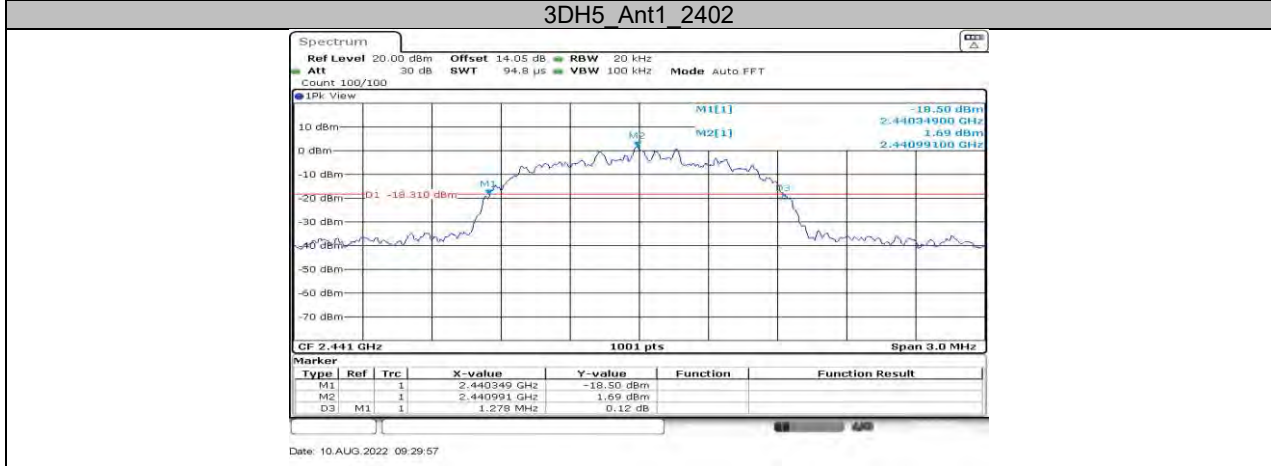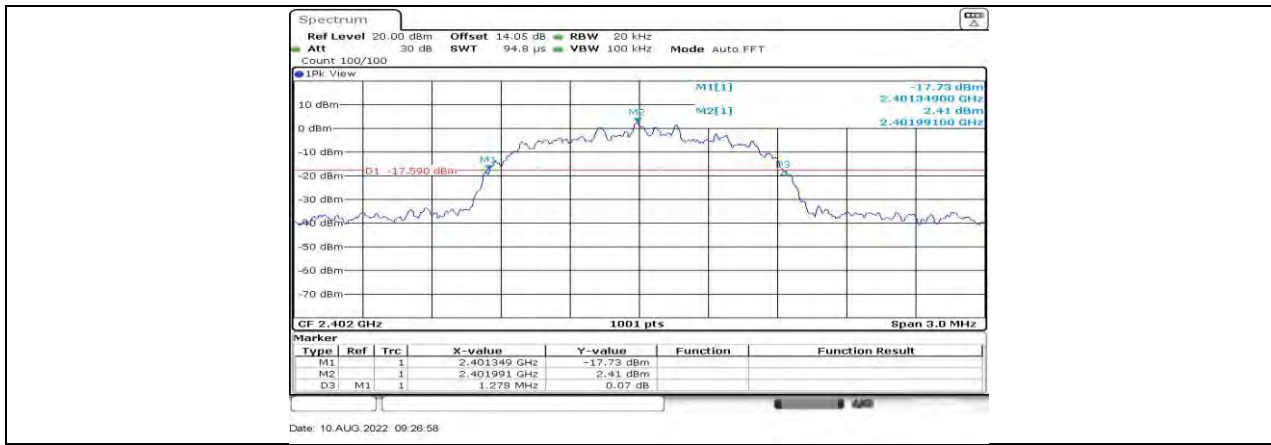

**3DH5 Ant1\_2480**




## 11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH


### 11.2.1. Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.863	2401.562	2402.426	PASS
		2441	0.869	2440.559	2441.429	PASS
		2480	0.866	2479.559	2480.426	PASS
2DH5	Ant1	2402	1.175	2401.407	2402.581	PASS
		2441	1.175	2440.407	2441.581	PASS
		2480	1.175	2479.407	2480.581	PASS
3DH5	Ant1	2402	1.172	2401.410	2402.581	PASS
		2441	1.172	2440.410	2441.581	PASS
		2480	1.172	2479.410	2480.581	PASS


### 11.2.2. Test Graphs

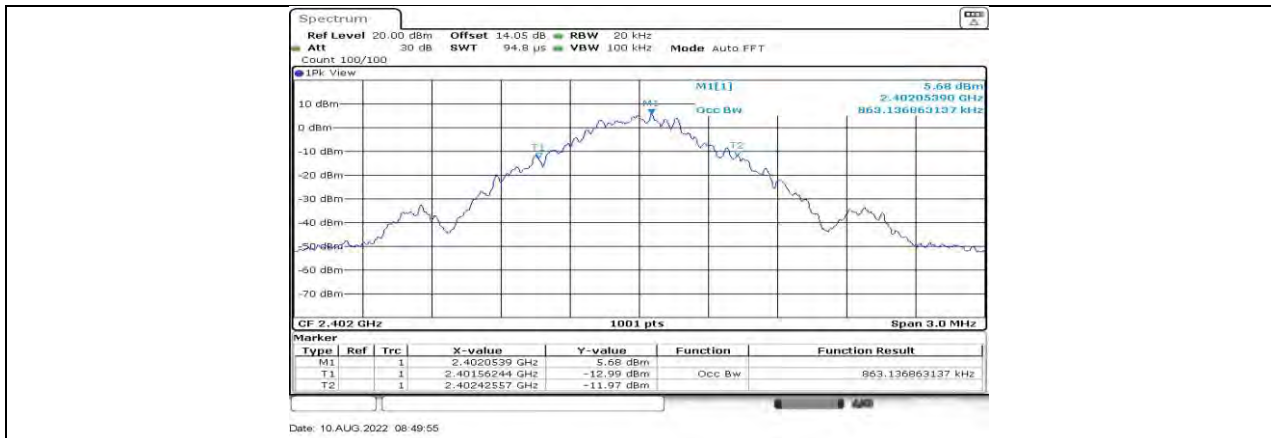


DH5 Ant1\_2402

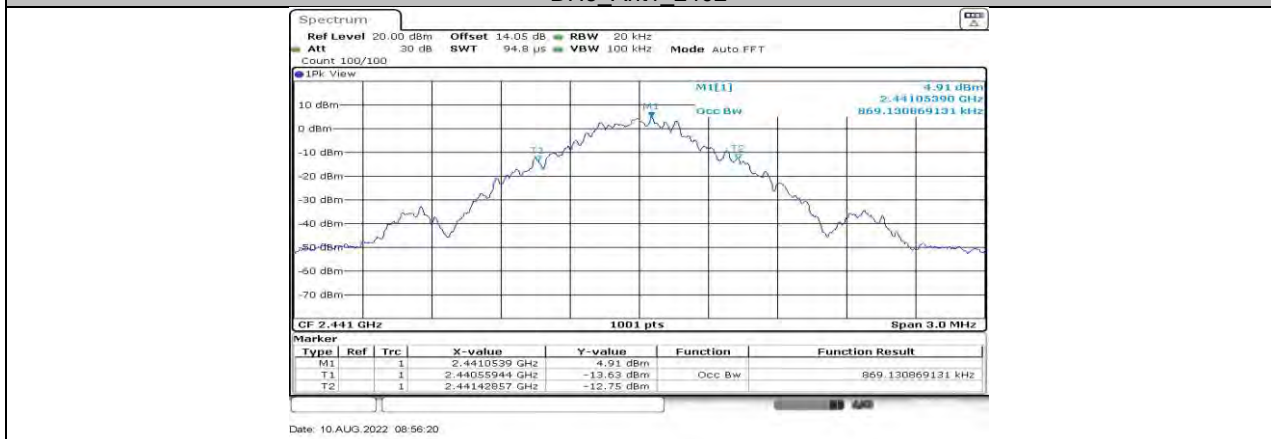


DH5 Ant1\_2441

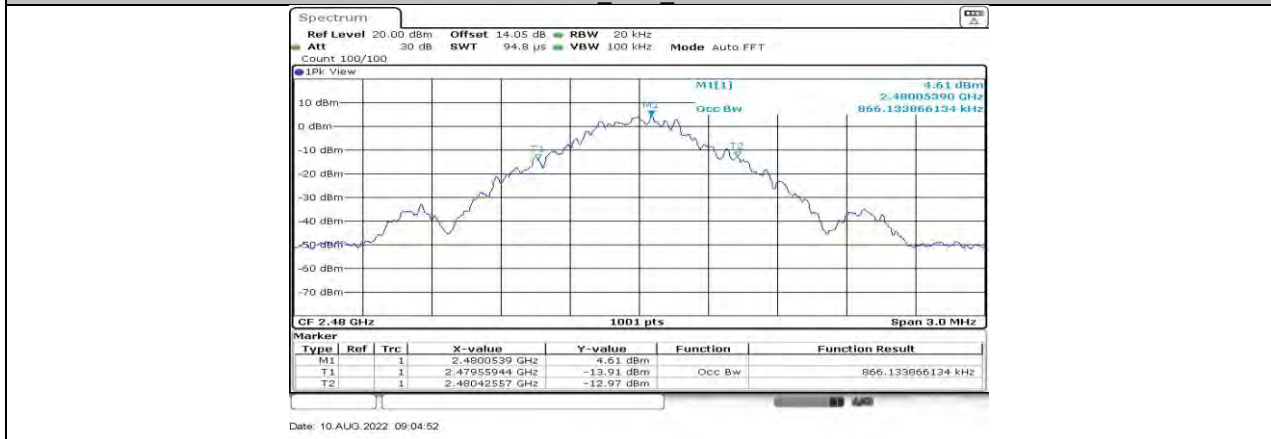


DH5 Ant1\_2480

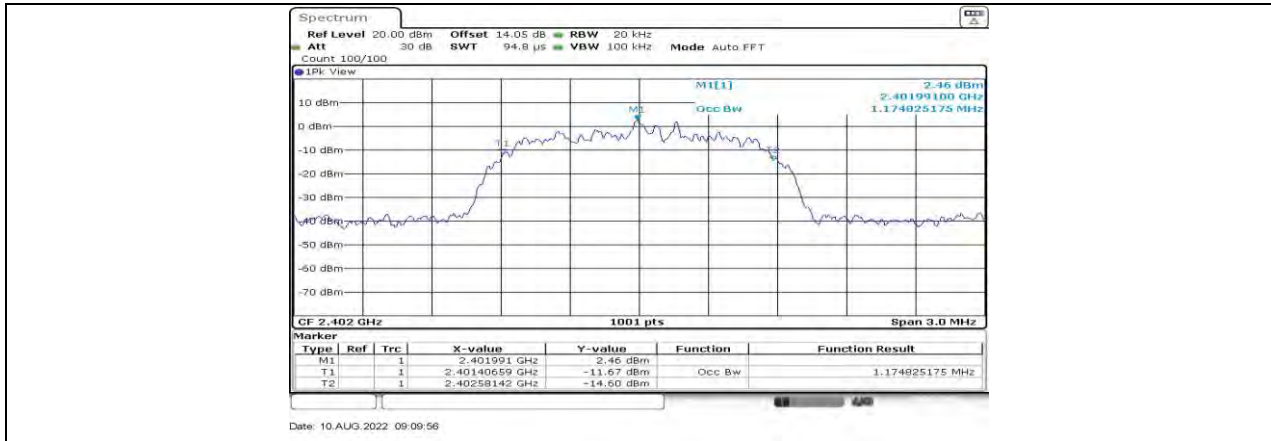


2DH5 Ant1\_2402

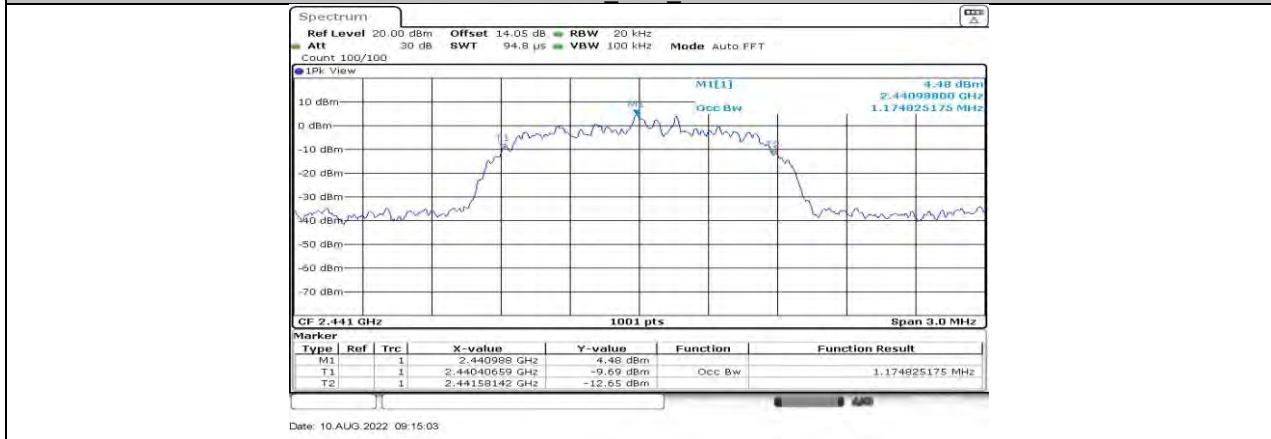


2DH5 Ant1\_2441

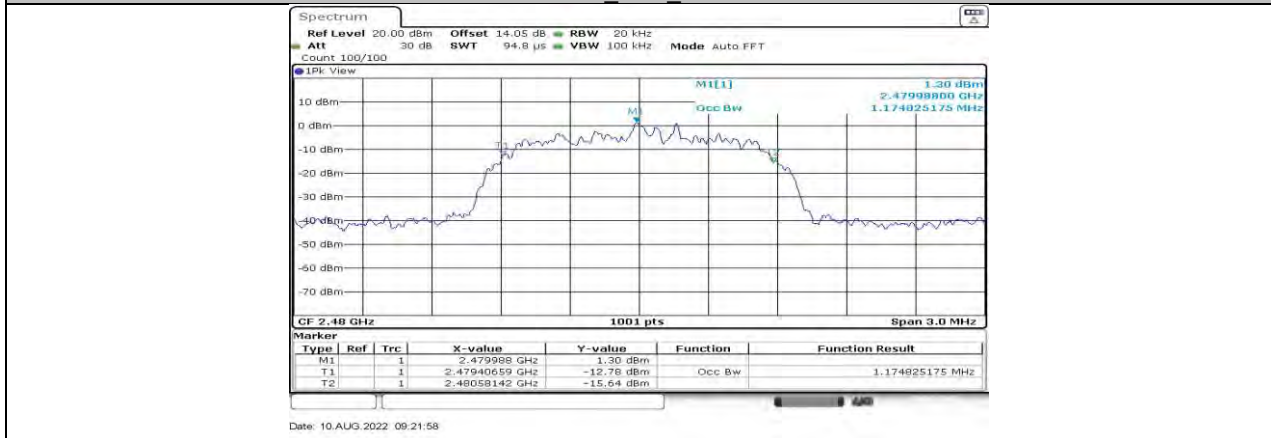

2DH5 Ant1\_2480

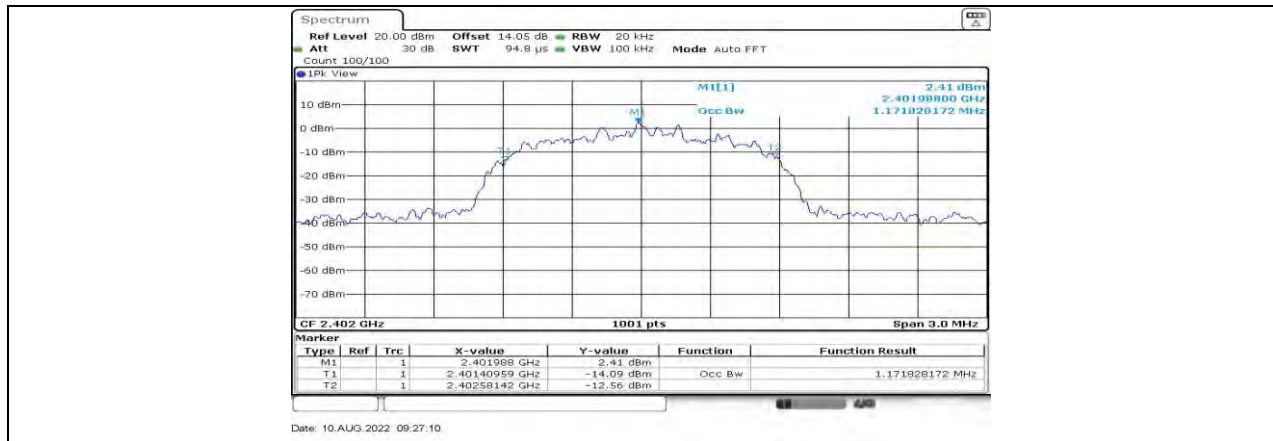

3DH5 Ant1\_2402

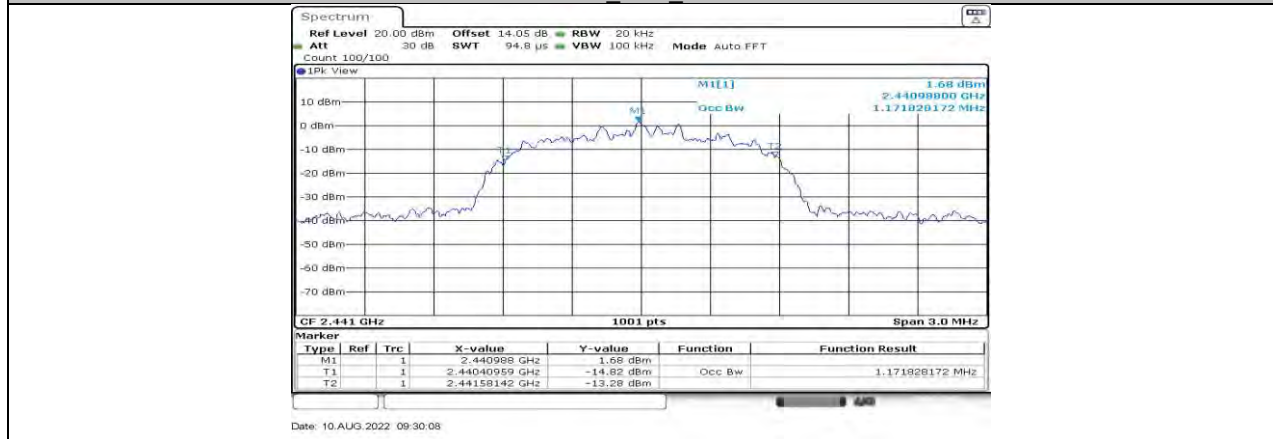

3DH5 Ant1\_2441



3DH5 Ant1\_2480



### 11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

#### 11.3.1. Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	10.13	≤30	PASS
		2441	10.51	≤30	PASS
		2480	10.26	≤30	PASS
2DH5	Ant1	2402	11.41	≤20.97	PASS
		2441	10.66	≤20.97	PASS
		2480	10.43	≤20.97	PASS
3DH5	Ant1	2402	11.60	≤20.97	PASS
		2441	10.89	≤20.97	PASS
		2480	10.67	≤20.97	PASS






## 11.4. APPENDIX D: CARRIER FREQUENCY SEPARATION

### 11.4.1. Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.000	≥0.940	PASS
2DH5	Ant1	Hop	1.003	≥0.880	PASS
3DH5	Ant1	Hop	1.003	≥0.853	PASS


### 11.4.2. Test Graphs

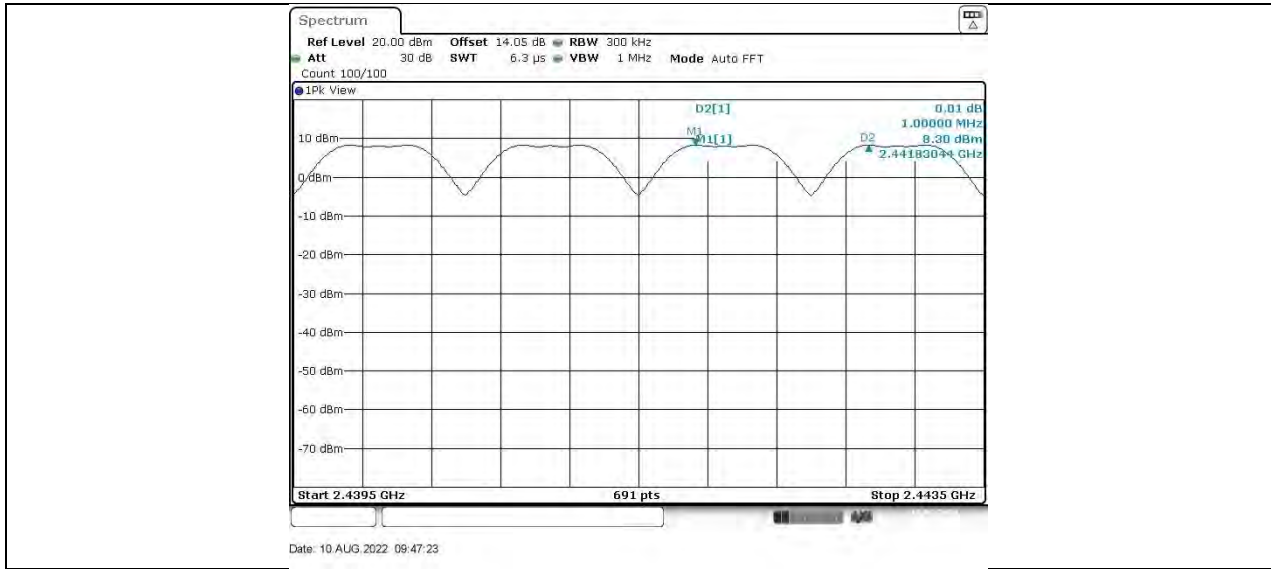

DH5 Ant1 Hop



2DH5 Ant1 Hop

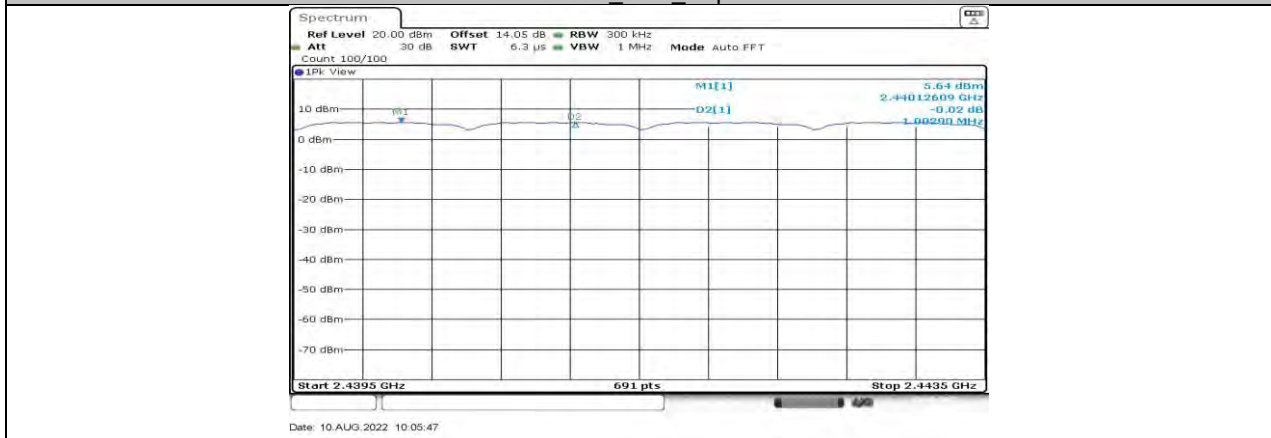

3DH5 Ant1 Hop




## 11.5. APPENDIX E: TIME OF OCCUPANCY


### 11.5.1. Test Result

FHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	0.122	<=0.4	PASS
DH3	Ant1	Hop	1.63	0.261	<=0.4	PASS
DH5	Ant1	Hop	2.87	0.306	<=0.4	PASS
2DH1	Ant1	Hop	0.38	0.041	<=0.4	PASS
2DH3	Ant1	Hop	1.63	0.174	<=0.4	PASS
2DH5	Ant1	Hop	2.87	0.306	<=0.4	PASS
3DH1	Ant1	Hop	0.38	0.122	<=0.4	PASS
3DH3	Ant1	Hop	1.63	0.261	<=0.4	PASS
3DH5	Ant1	Hop	2.87	0.306	<=0.4	PASS


AFHSS Mode						
Test Mode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	0.061	<=0.4	PASS
DH3	Ant1	Hop	1.63	0.130	<=0.4	PASS
DH5	Ant1	Hop	2.87	0.153	<=0.4	PASS
2DH1	Ant1	Hop	0.38	0.020	<=0.4	PASS
2DH3	Ant1	Hop	1.63	0.087	<=0.4	PASS
2DH5	Ant1	Hop	2.87	0.153	<=0.4	PASS
3DH1	Ant1	Hop	0.38	0.061	<=0.4	PASS
3DH3	Ant1	Hop	1.63	0.130	<=0.4	PASS
3DH5	Ant1	Hop	2.87	0.153	<=0.4	PASS

### 11.5.2. Test Graphs

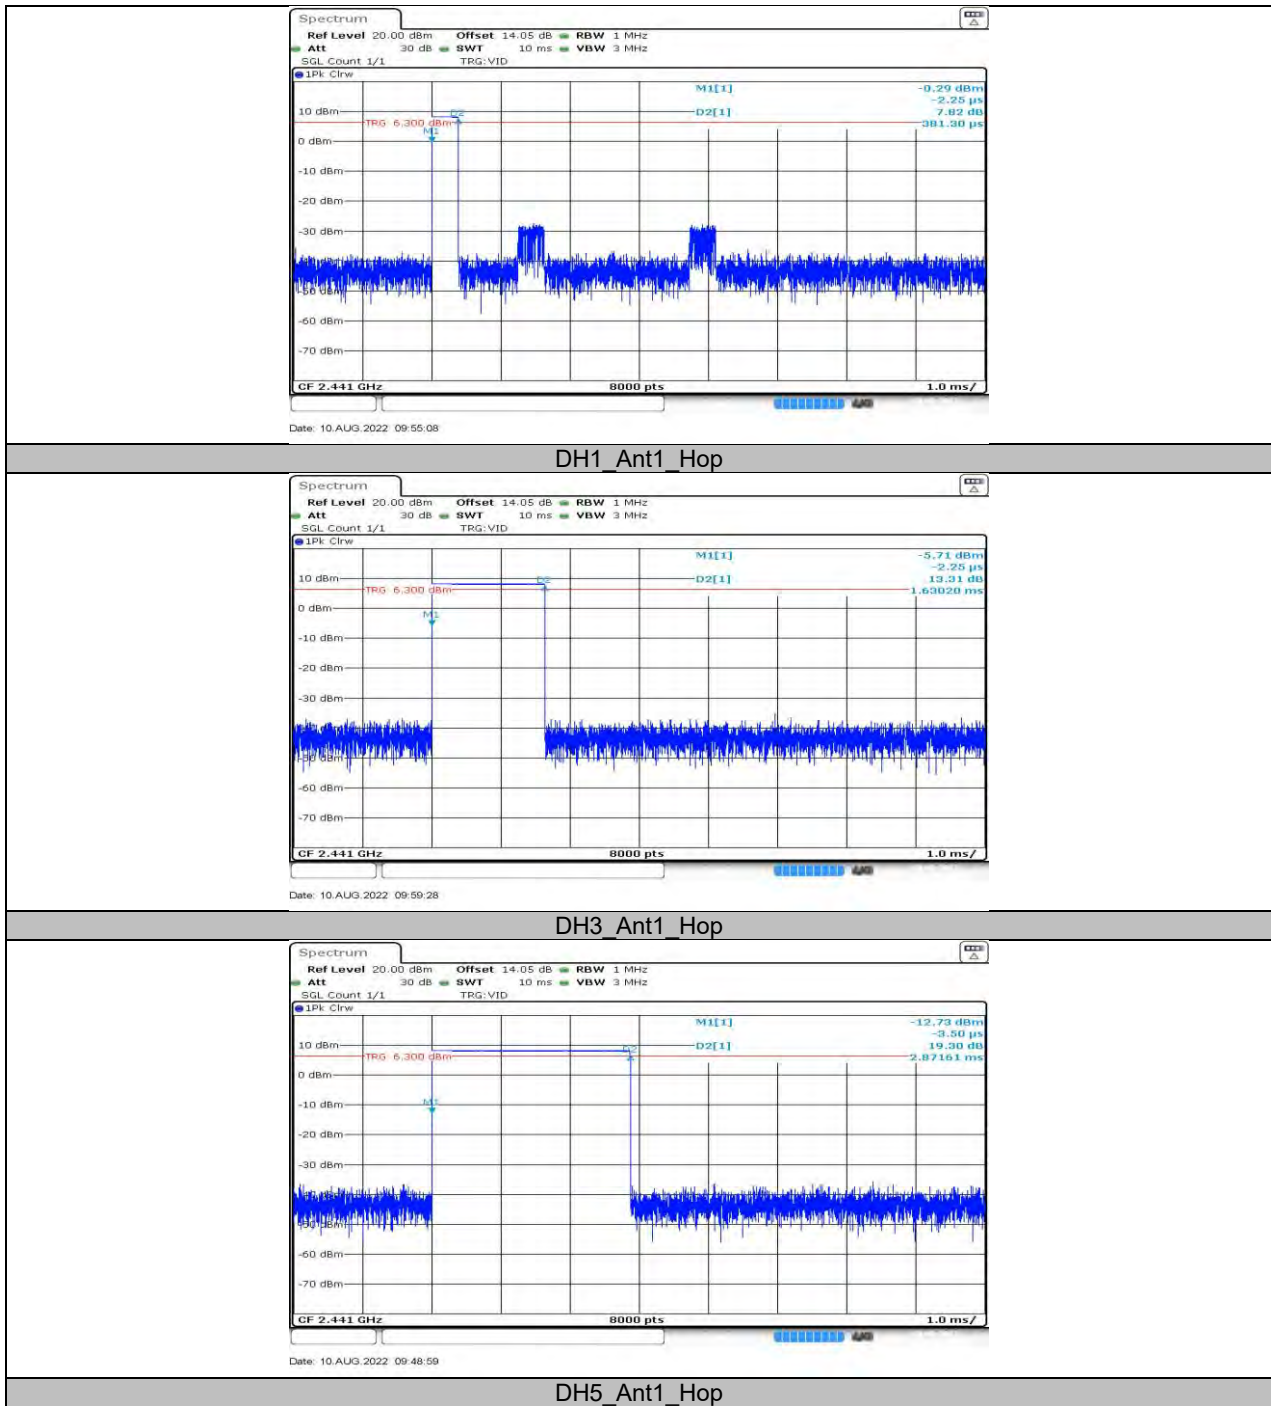


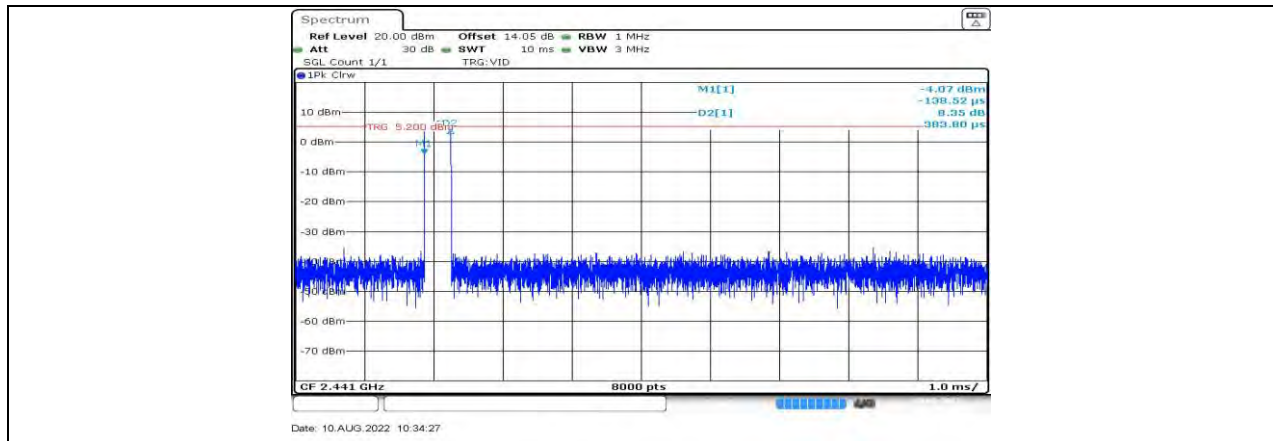


2DH1\_Ant1\_Hop

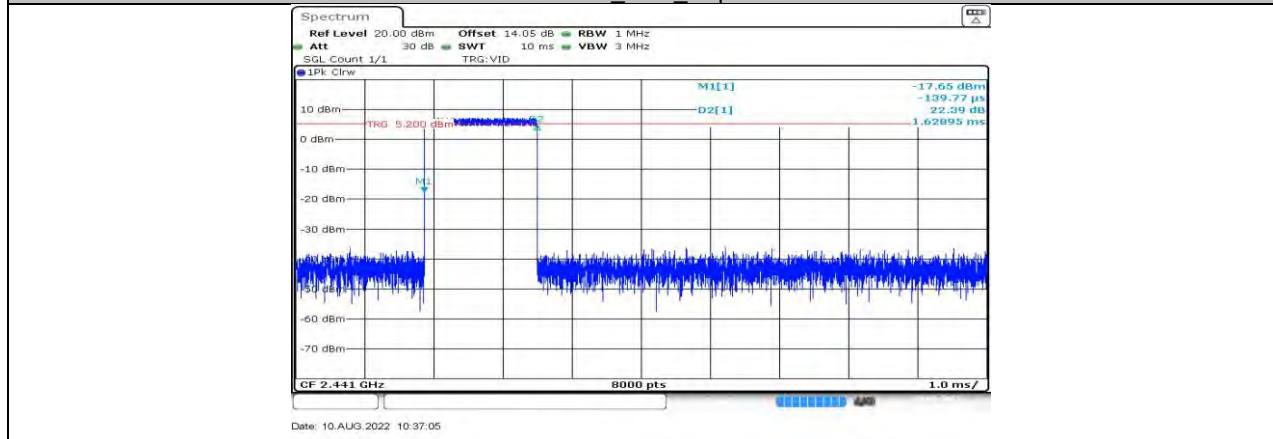


2DH3\_Ant1\_Hop

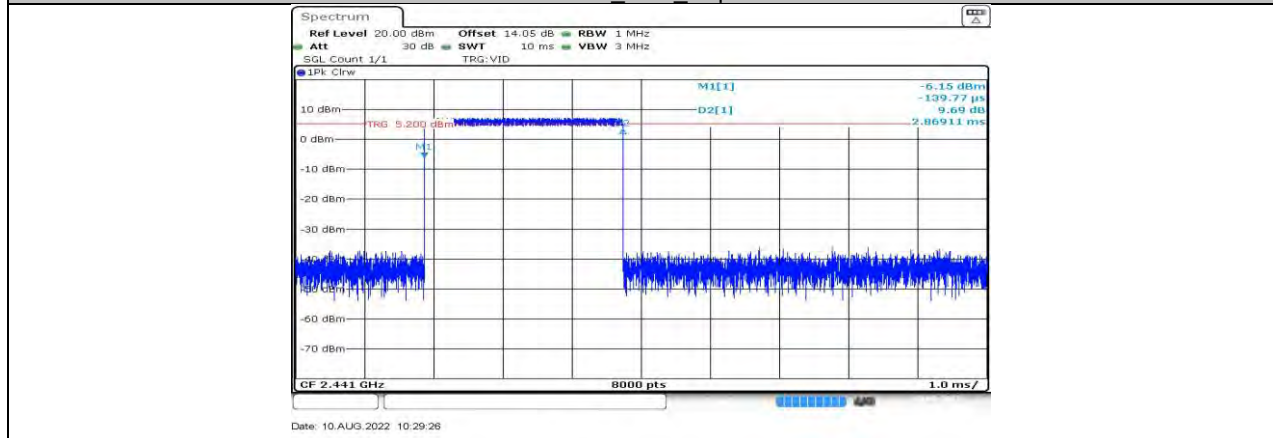


2DH5\_Ant1\_Hop

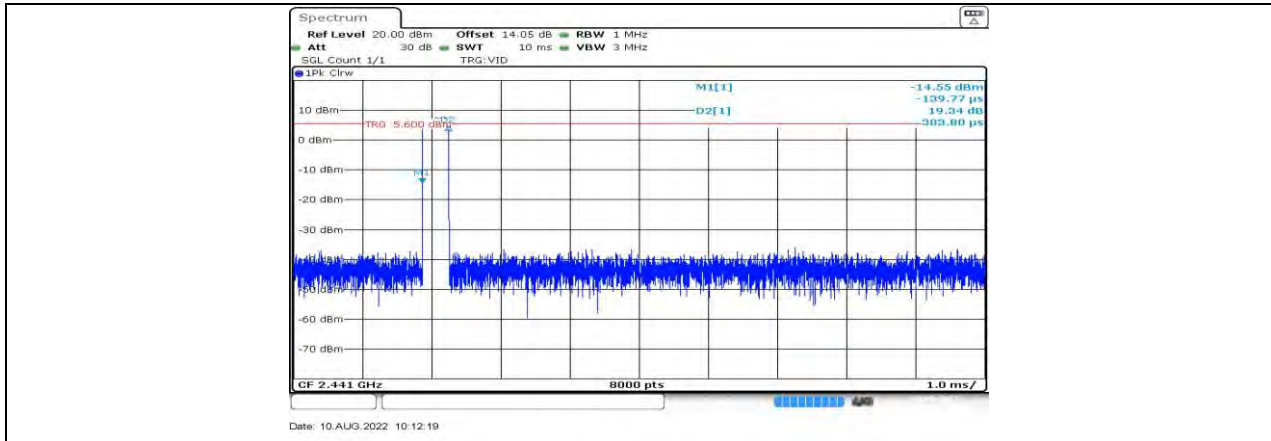

3DH1\_Ant1\_Hop

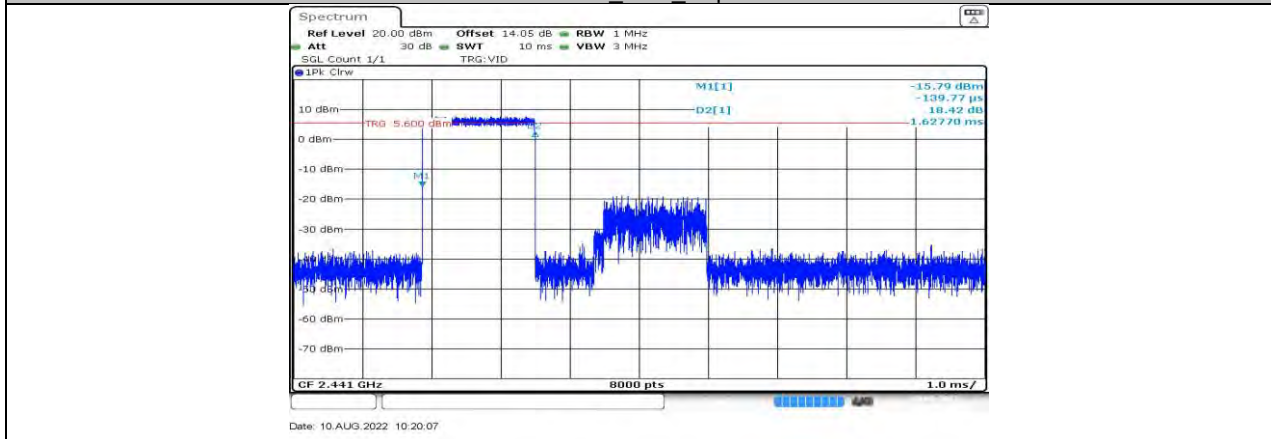

3DH3\_Ant1\_Hop

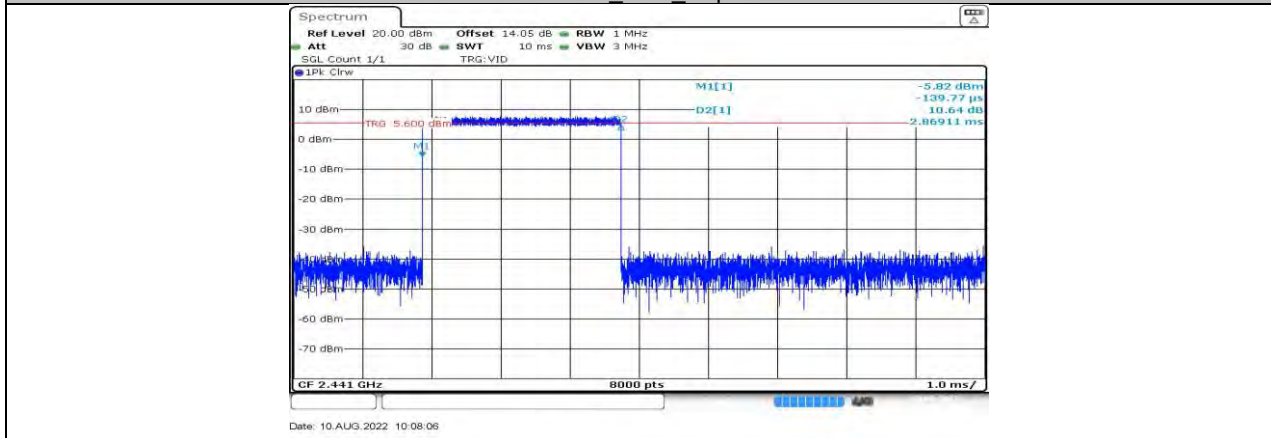

3DH5\_Ant1\_Hop



## 11.6. APPENDIX F: NUMBER OF HOPPING CHANNELS

### 11.6.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

### 11.6.2. Test Graphs








## 11.7. APPENDIX G: BAND EDGE MEASUREMENTS

### 11.7.1. Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	9.12	-45.23	≤-10.88	PASS
		High	2480	8.00	-43.46	≤-12	PASS
		Low	Hop_2402	8.28	-43.82	≤-11.72	PASS
		High	Hop_2480	7.93	-42.81	≤-12.07	PASS
2DH5	Ant1	Low	2402	5.93	-44.59	≤-14.07	PASS
		High	2480	5.06	-43.05	≤-14.94	PASS
		Low	Hop_2402	3.29	-44.84	≤-16.71	PASS
		High	Hop_2480	4.62	-44.06	≤-15.38	PASS
3DH5	Ant1	Low	2402	6.41	-43.35	≤-13.59	PASS
		High	2480	5.24	-43.61	≤-14.76	PASS
		Low	Hop_2402	4.41	-44.9	≤-15.59	PASS
		High	Hop_2480	5.11	-44.03	≤-14.89	PASS

### 11.7.2. Test Graphs




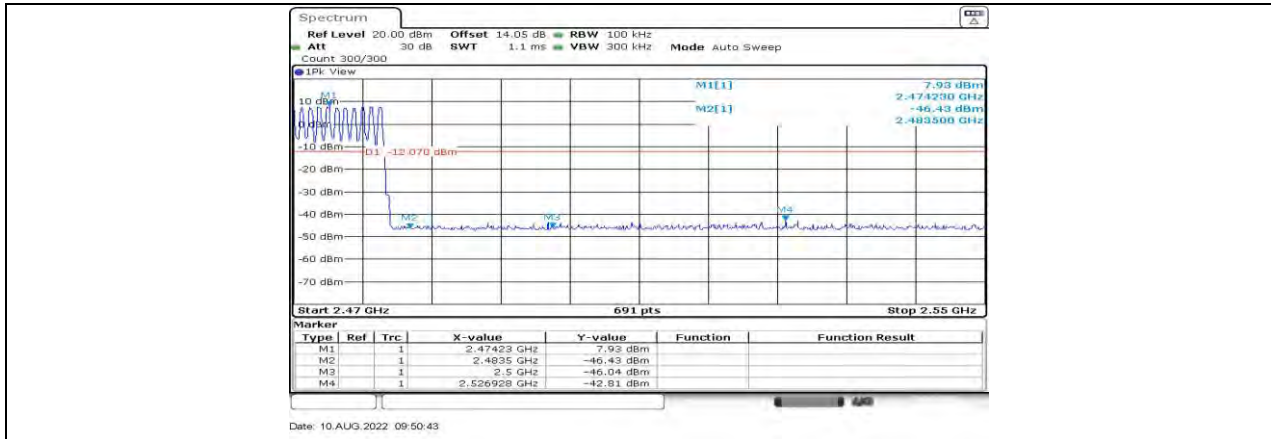


DH5 Ant1 High Hop 2480

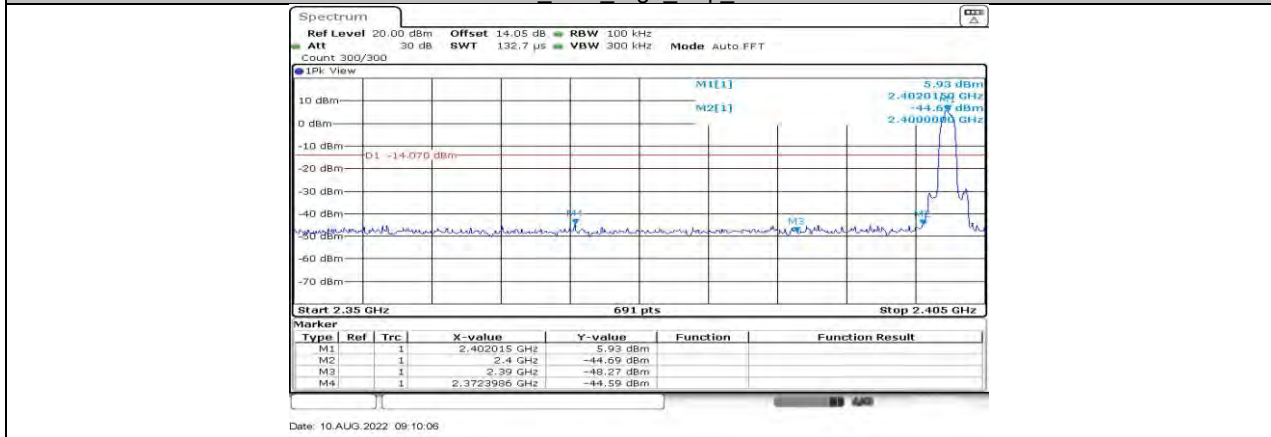


2DH5 Ant1 Low 2402

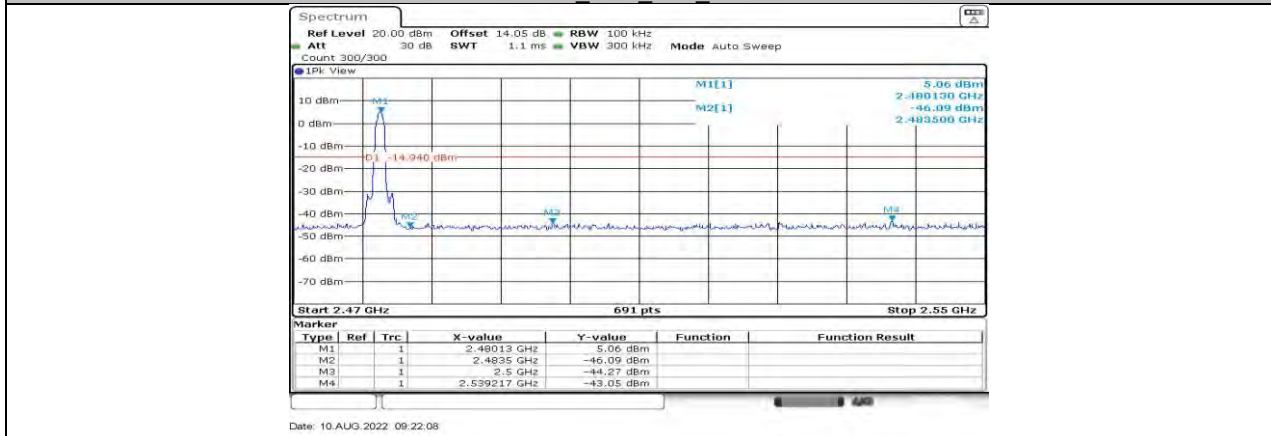


2DH5 Ant1 High 2480

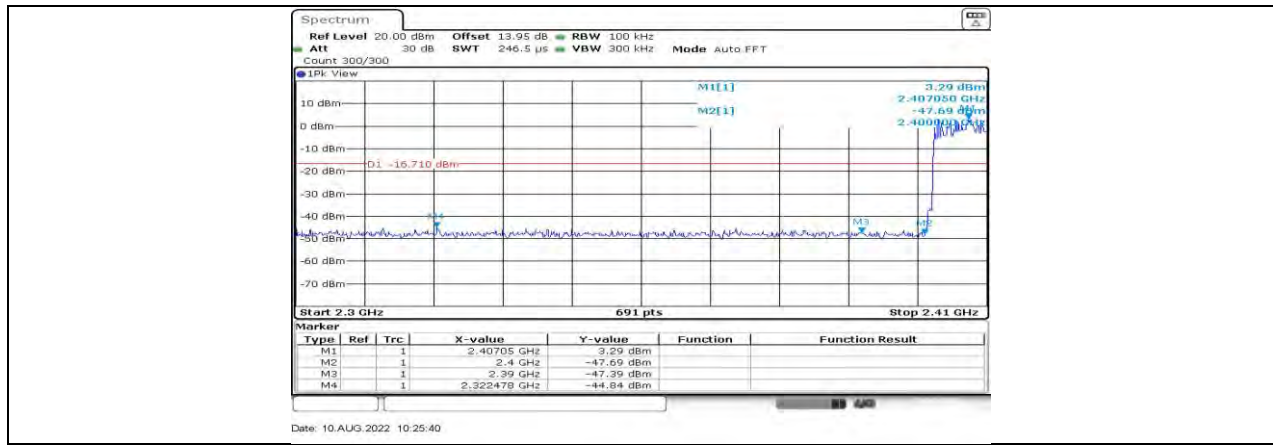


2DH5 Ant1 Low Hop 2402

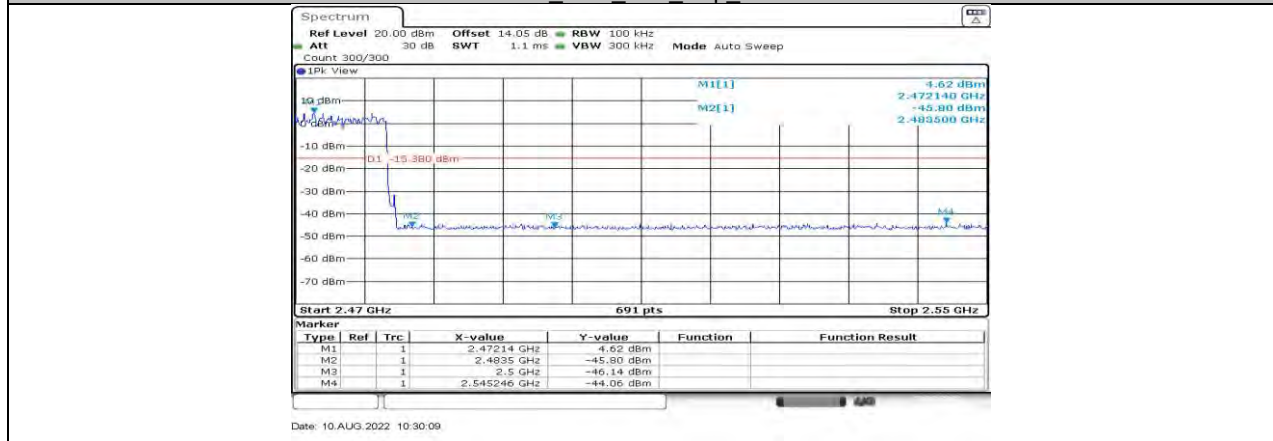


2DH5 Ant1 High Hop 2480

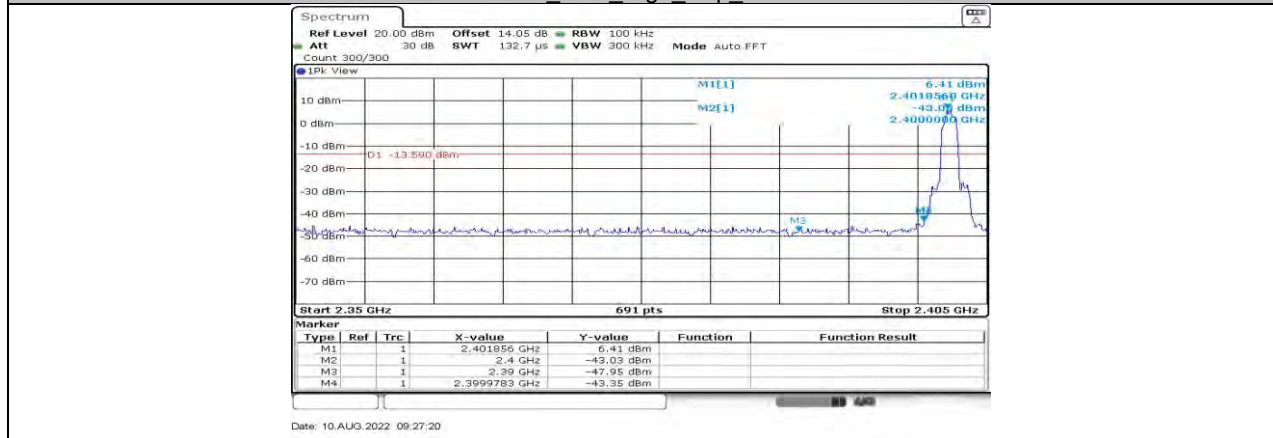


3DH5 Ant1 Low 2402

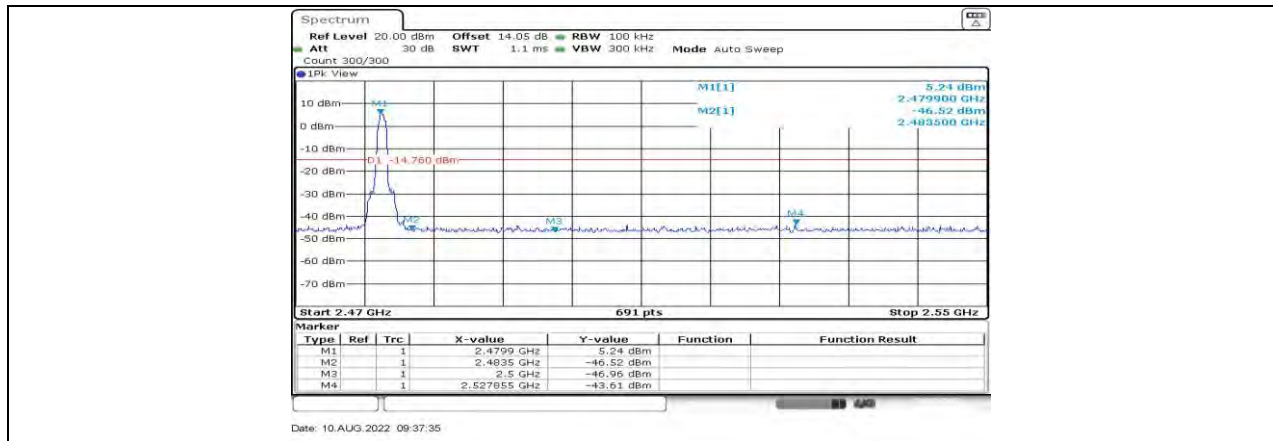

3DH5 Ant1 High 2480

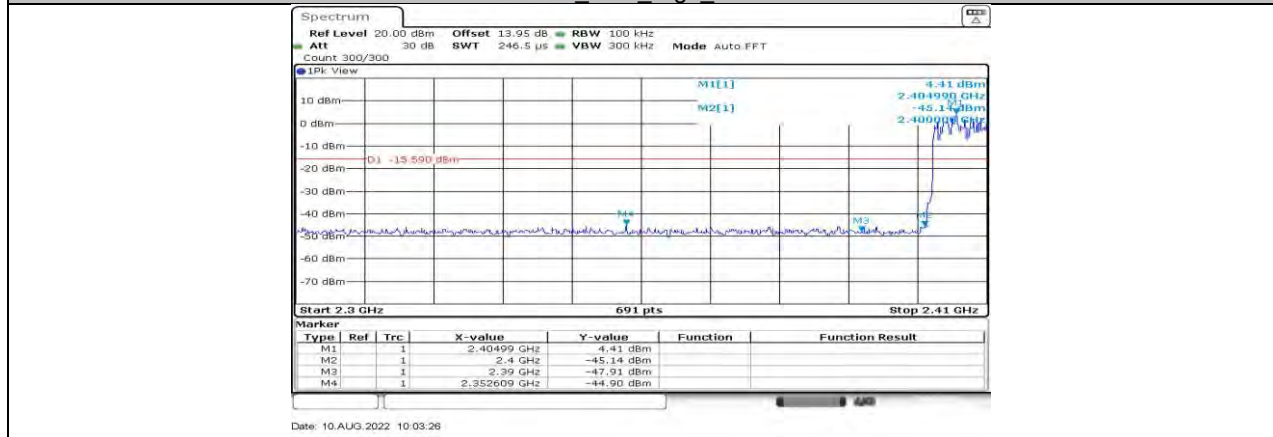

3DH5 Ant1 Low Hop 2402

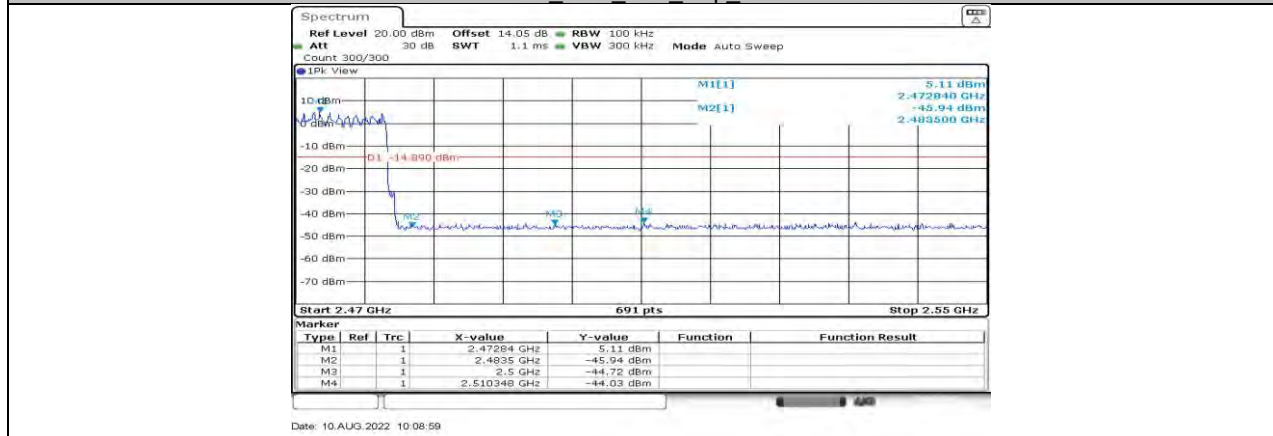



3DH5 Ant1 High Hop 2480

**11.8. APPENDIX H: CONDUCTED SPURIOUS EMISSION****11.8.1. Test Result**


Test Mode	Antenna	Channel	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	9.12	---	PASS
			30~1000	-53.65	≤-10.88	PASS
			1000~26500	-47.01	≤-10.88	PASS
		2441	Reference	8.35	---	PASS
			30~1000	-53.05	≤-11.65	PASS
			1000~26500	-47.28	≤-11.65	PASS
		2480	Reference	8.05	---	PASS
			30~1000	-53.79	≤-11.95	PASS
			1000~26500	-46.36	≤-11.95	PASS
2DH5	Ant1	2402	Reference	6.32	---	PASS
			30~1000	-53.22	≤-13.68	PASS
			1000~26500	-48.16	≤-13.68	PASS
		2441	Reference	8.32	---	PASS
			30~1000	-53.83	≤-11.68	PASS
			1000~26500	-48.73	≤-11.68	PASS
		2480	Reference	5.24	---	PASS
			30~1000	-53.95	≤-14.76	PASS
			1000~26500	-48.57	≤-14.76	PASS
3DH5	Ant1	2402	Reference	6.42	---	PASS
			30~1000	-53.67	≤-13.58	PASS
			1000~26500	-48.44	≤-13.58	PASS
		2441	Reference	5.65	---	PASS
			30~1000	-53.74	≤-14.35	PASS
			1000~26500	-48.33	≤-14.35	PASS
		2480	Reference	5.33	---	PASS
			30~1000	-54.15	≤-14.67	PASS
			1000~26500	-49.32	≤-14.67	PASS

### 11.8.2. Test Graphs

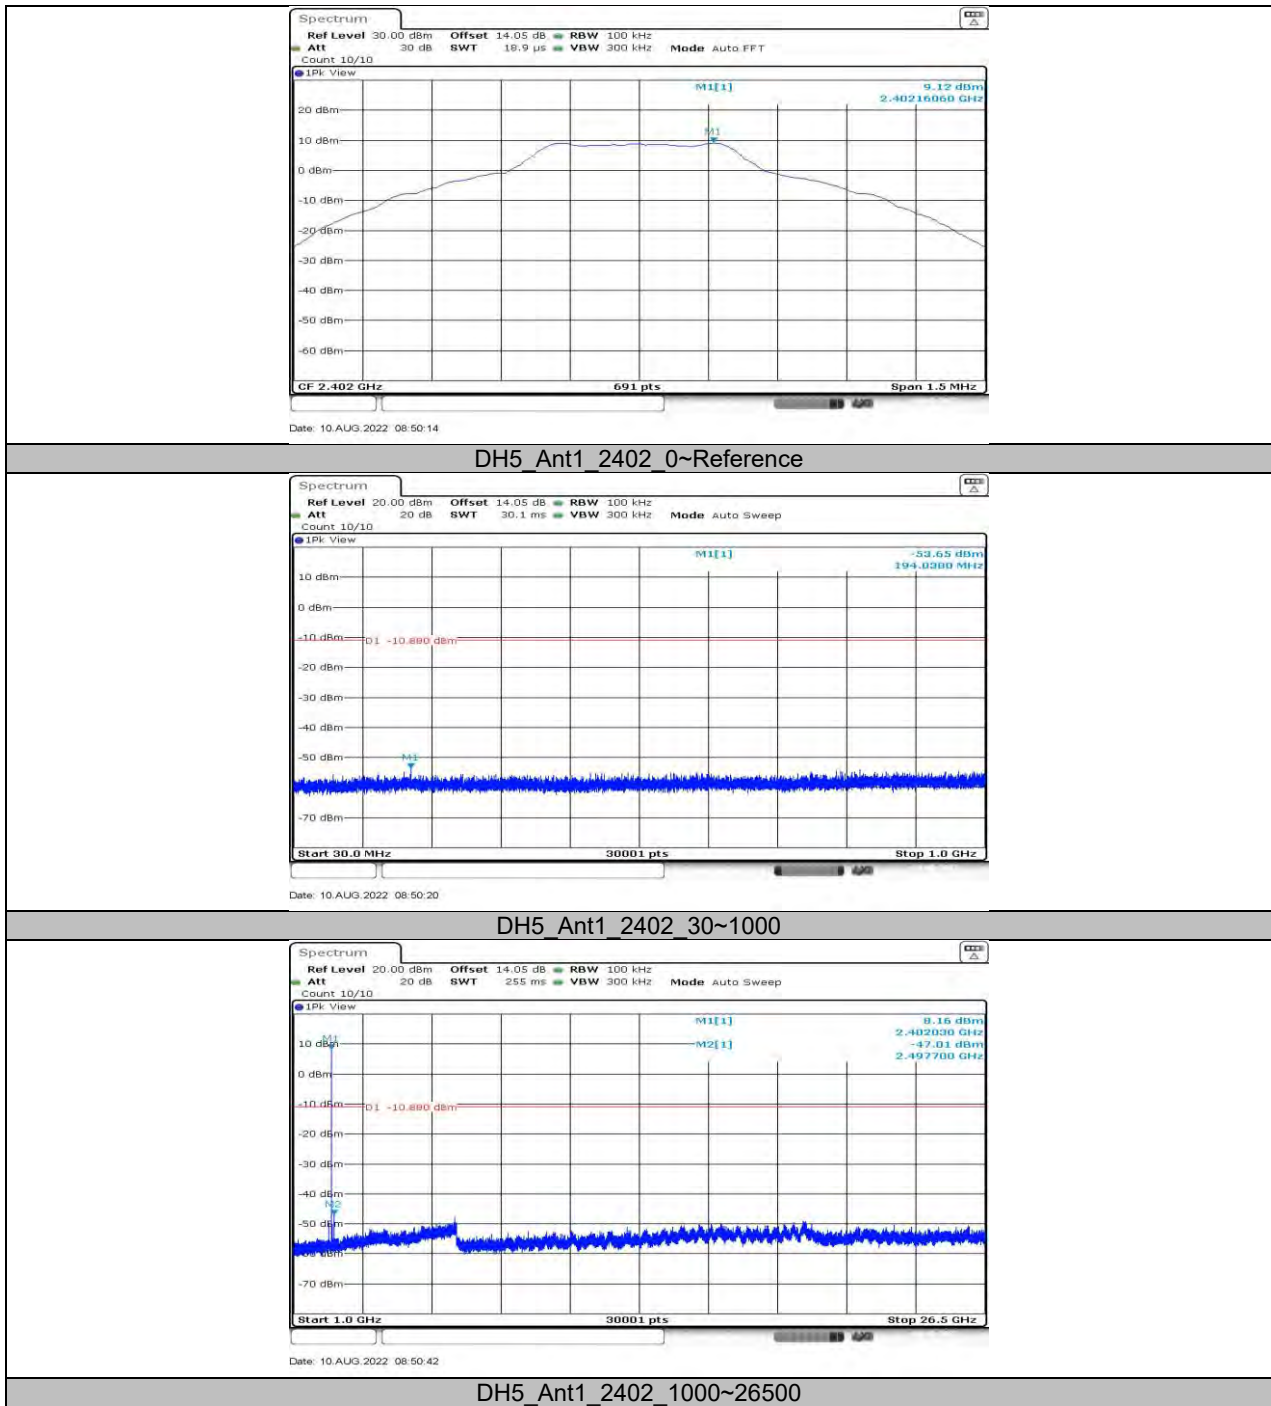


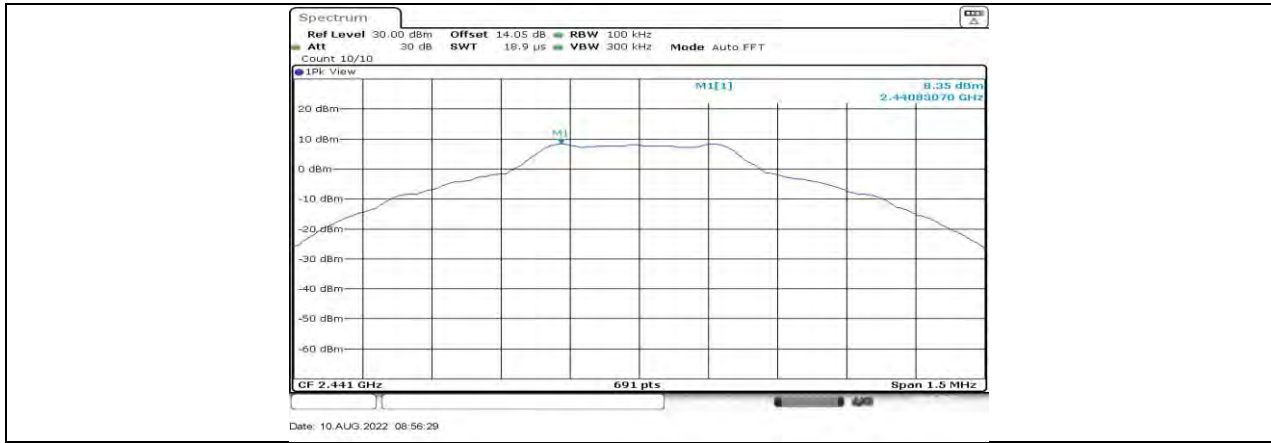

DH5 Ant1 2441 0~Reference

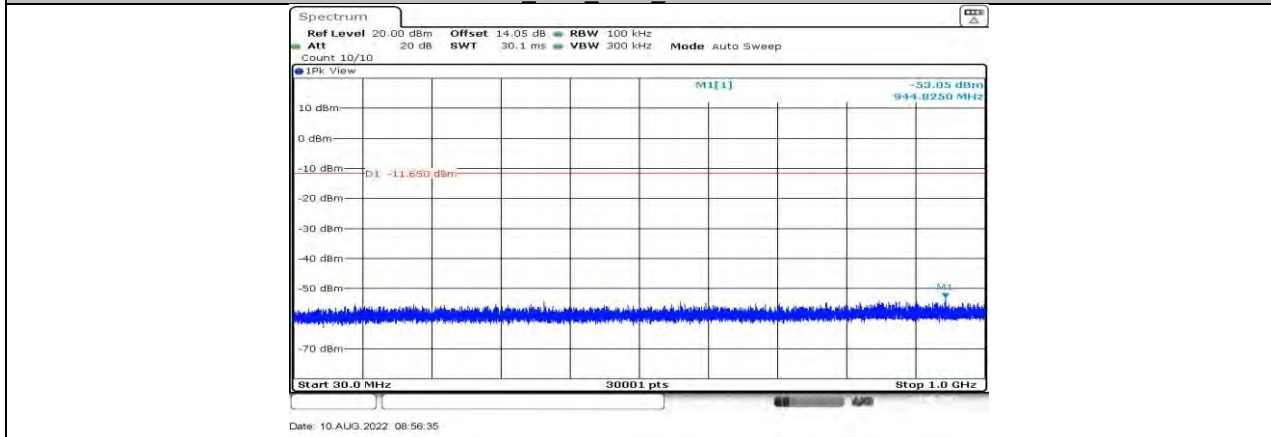


DH5 Ant1 2441 30~1000

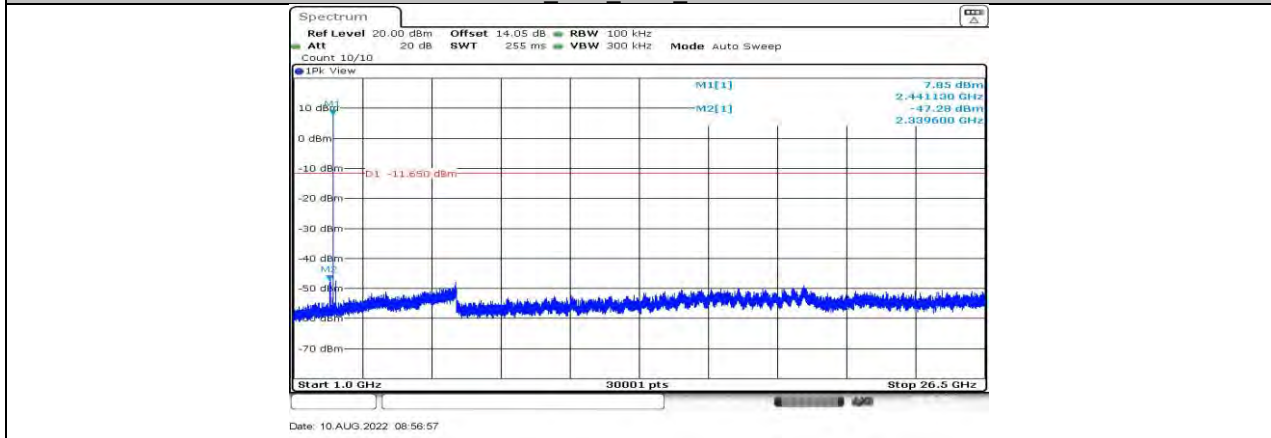


DH5 Ant1 2441 1000~26500




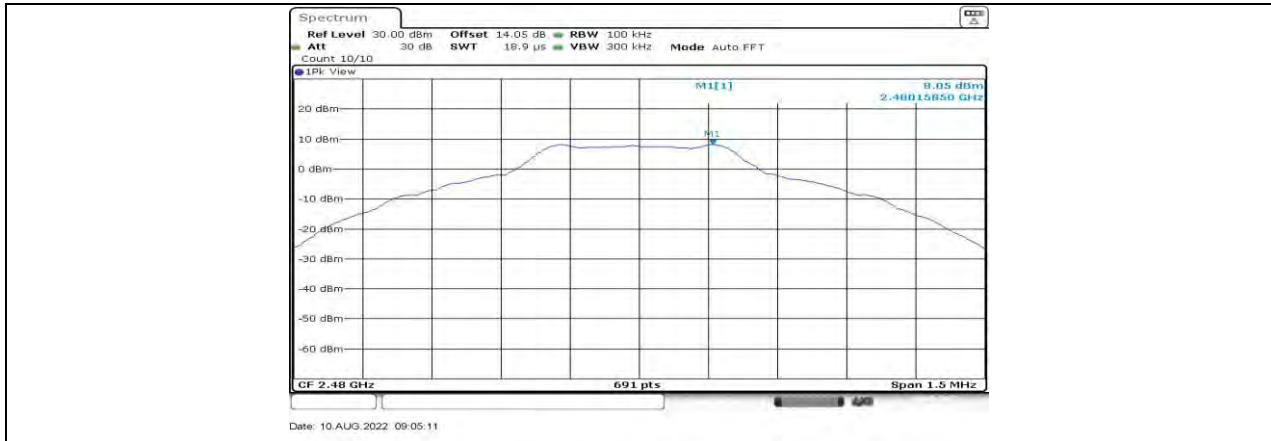


DH5 Ant1 2480 0~Reference

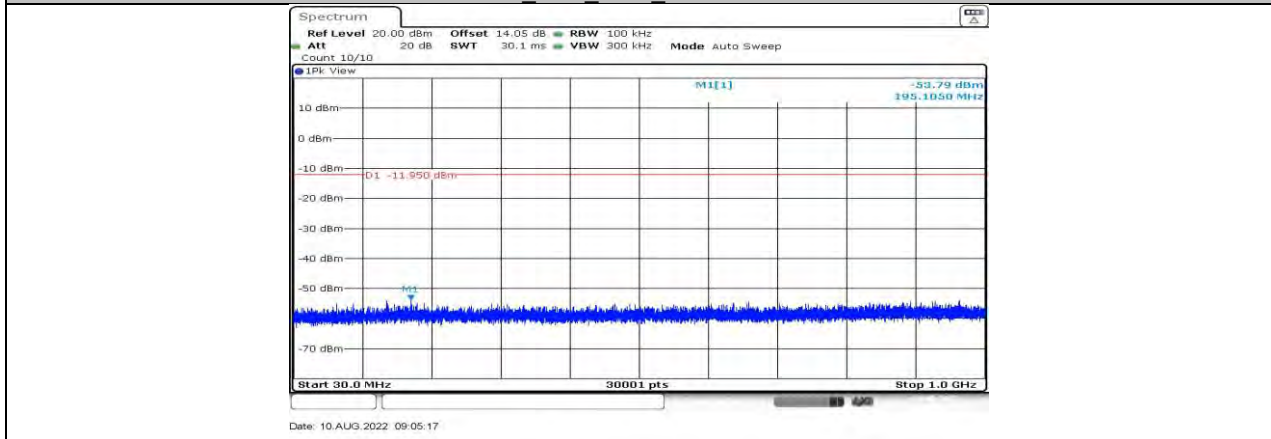


DH5 Ant1 2480 30~1000

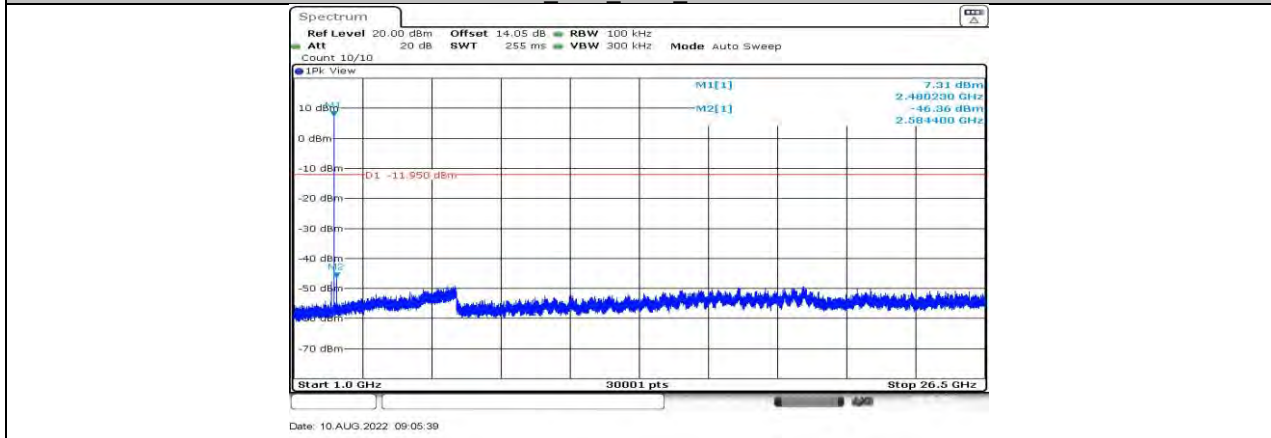


DH5 Ant1 2480 1000~26500

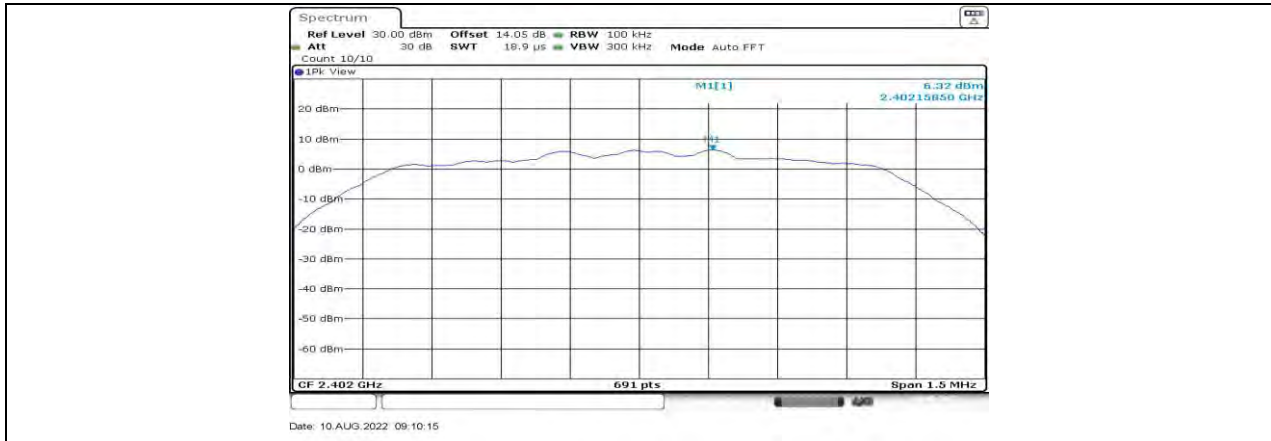


2DH5\_Ant1\_2402\_0~Reference

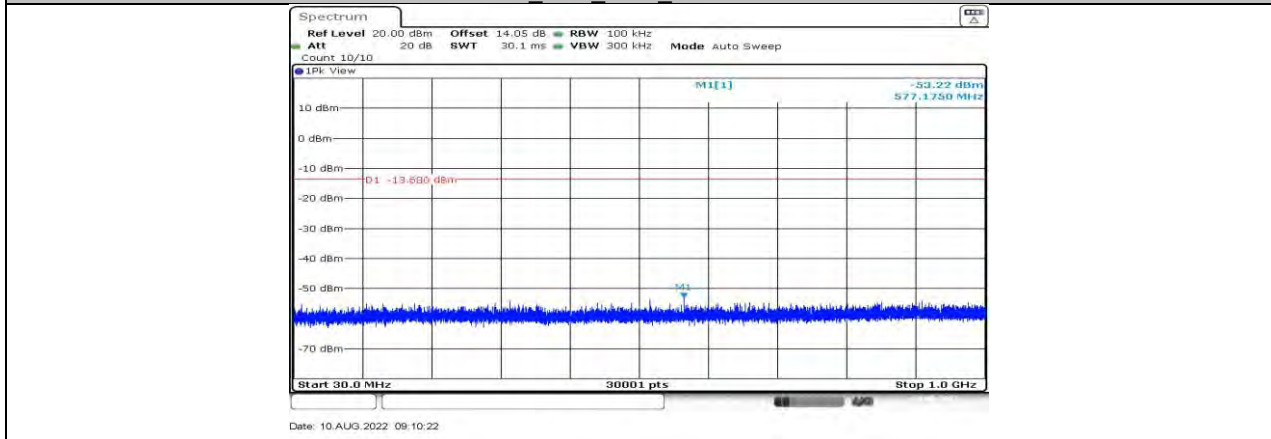


2DH5\_Ant1\_2402\_30~1000

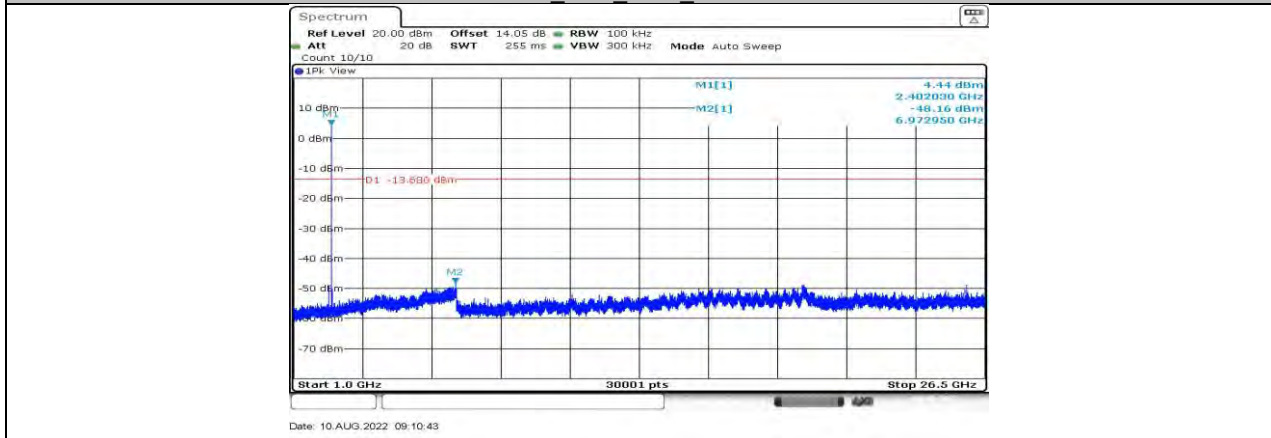


2DH5\_Ant1\_2402\_1000~26500

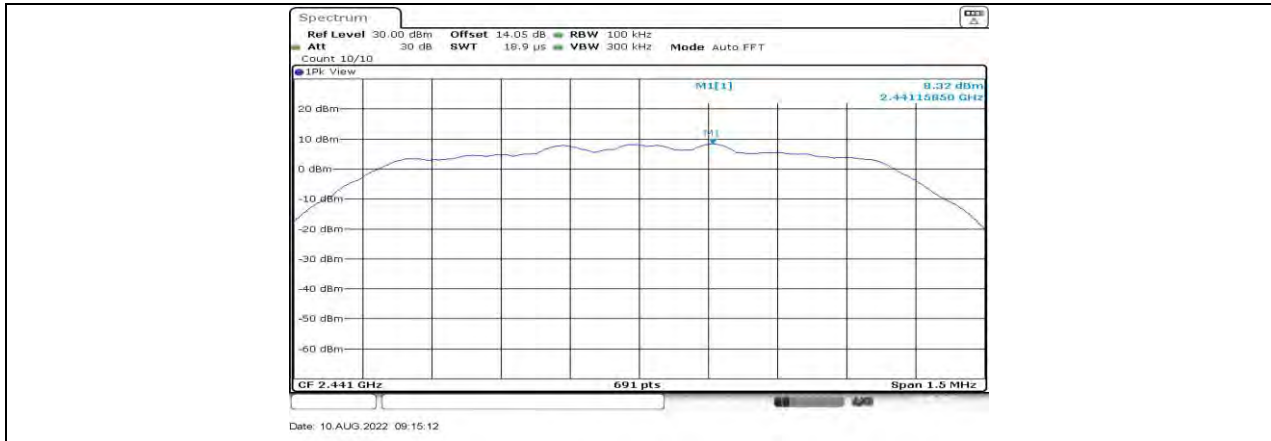


2DH5\_Ant1\_2441\_0~Reference

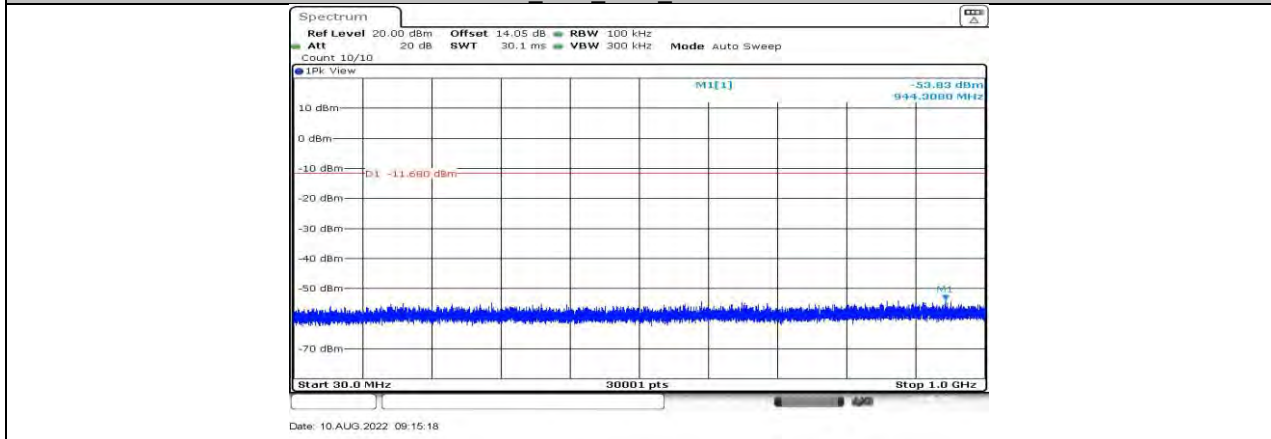


2DH5\_Ant1\_2441\_30~1000

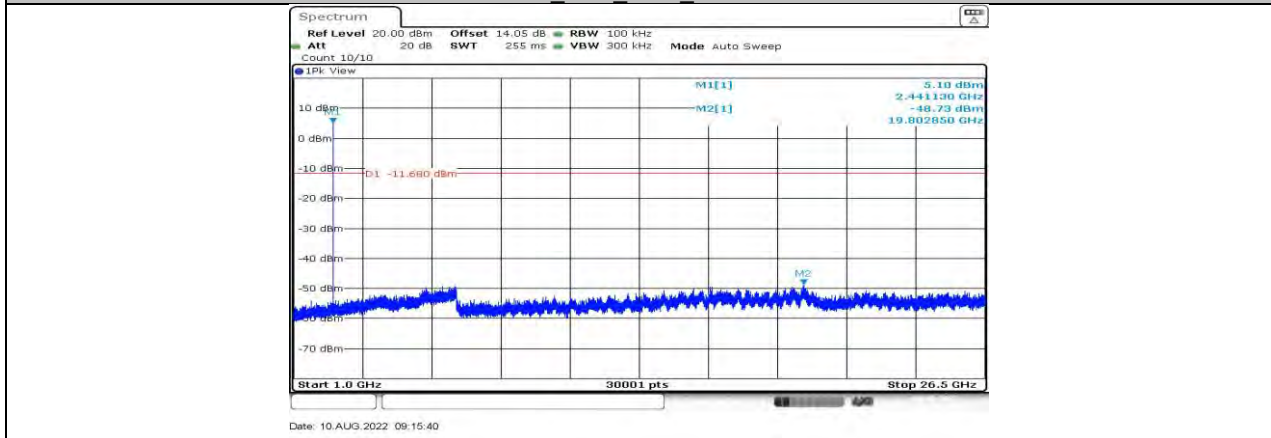


2DH5\_Ant1\_2441\_1000~26500

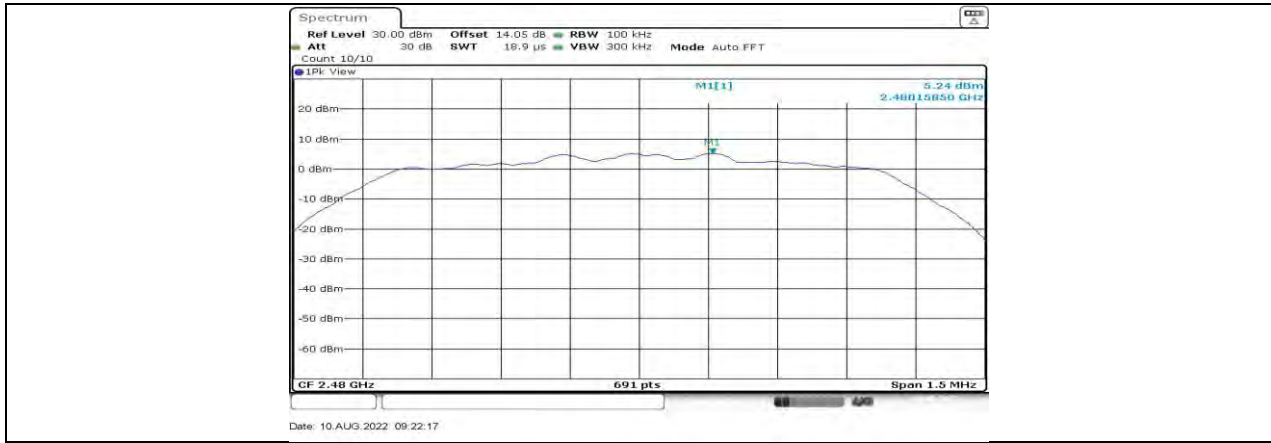


2DH5\_Ant1\_2480\_0~Reference

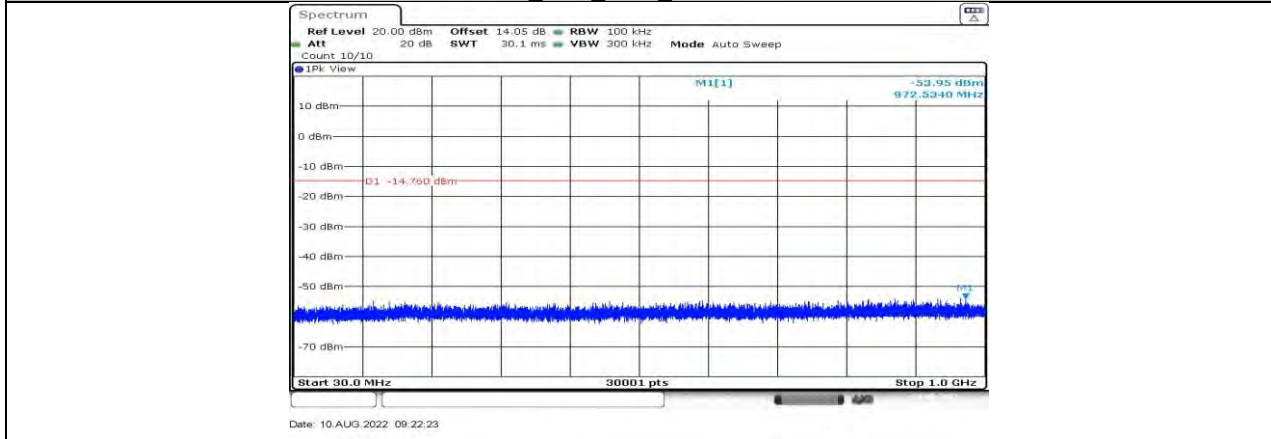


2DH5\_Ant1\_2480\_30~1000

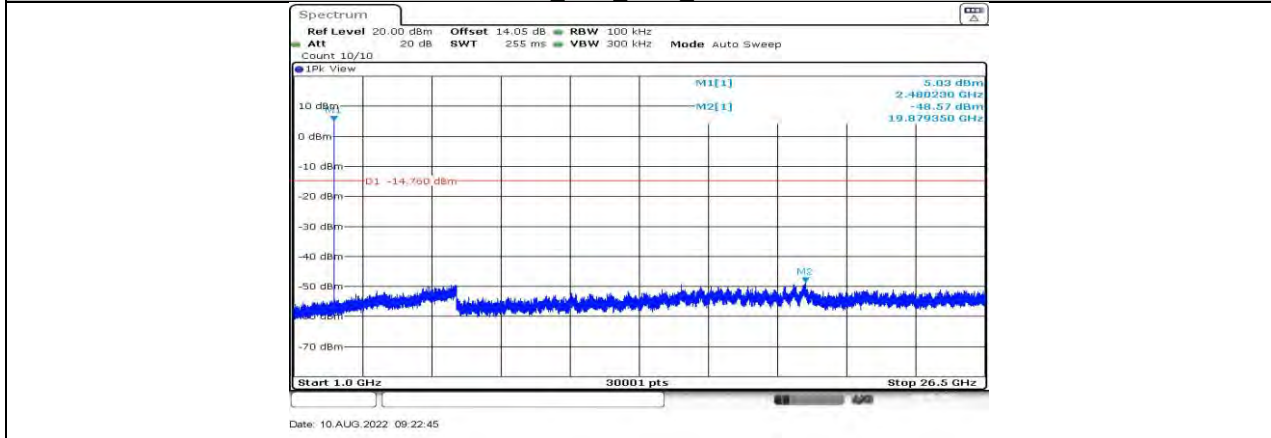


2DH5\_Ant1\_2480\_1000~26500

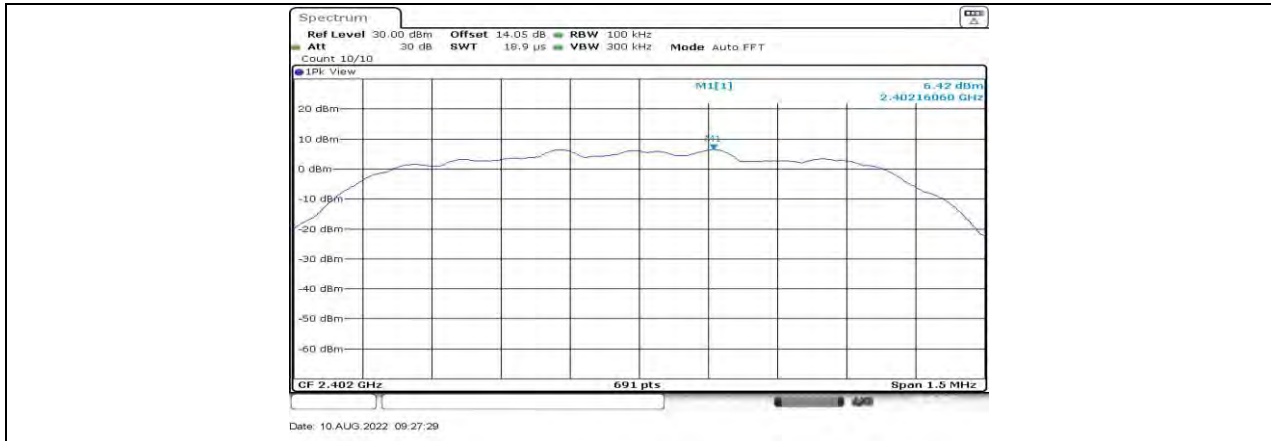


3DH5\_Ant1\_2402\_0~Reference

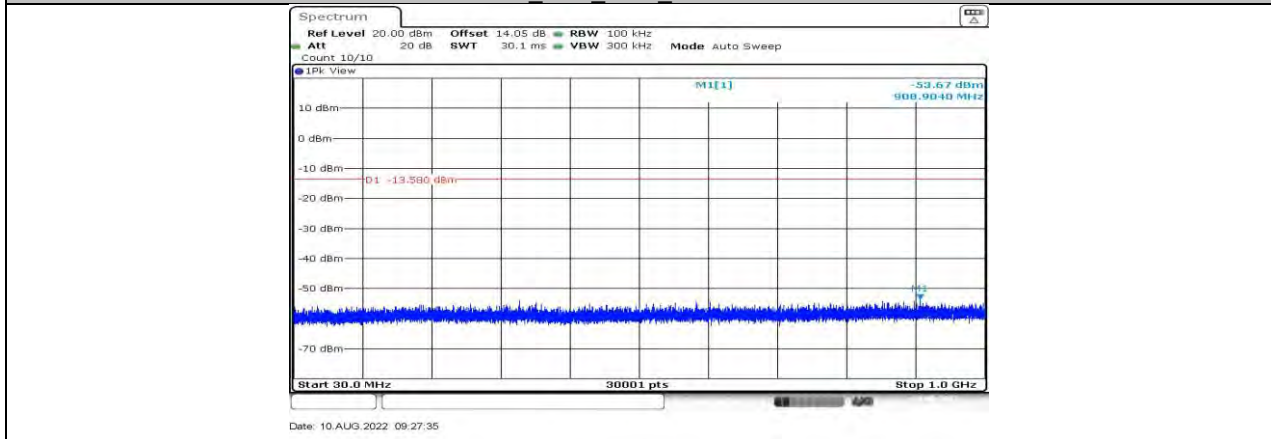


3DH5\_Ant1\_2402\_30~1000

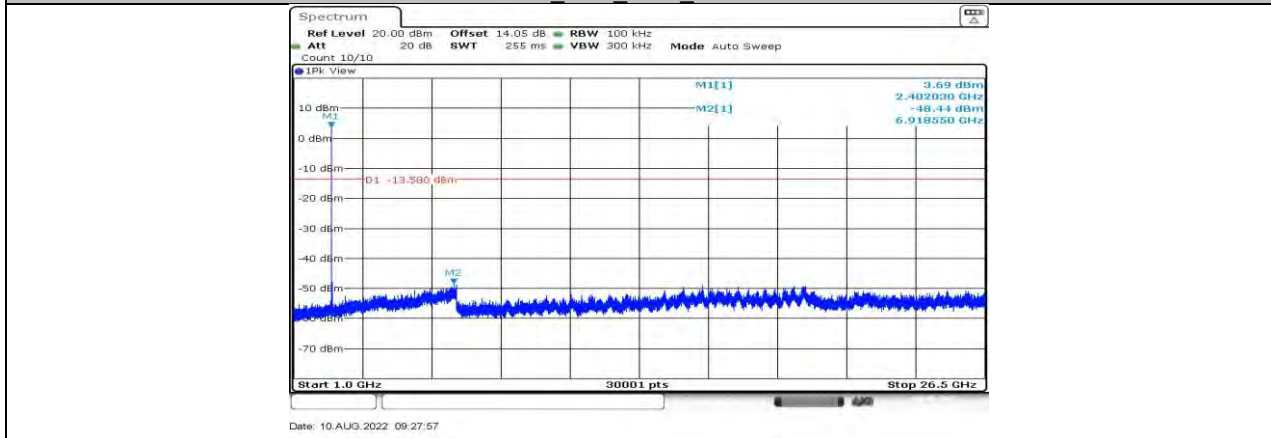


3DH5\_Ant1\_2402\_1000~26500

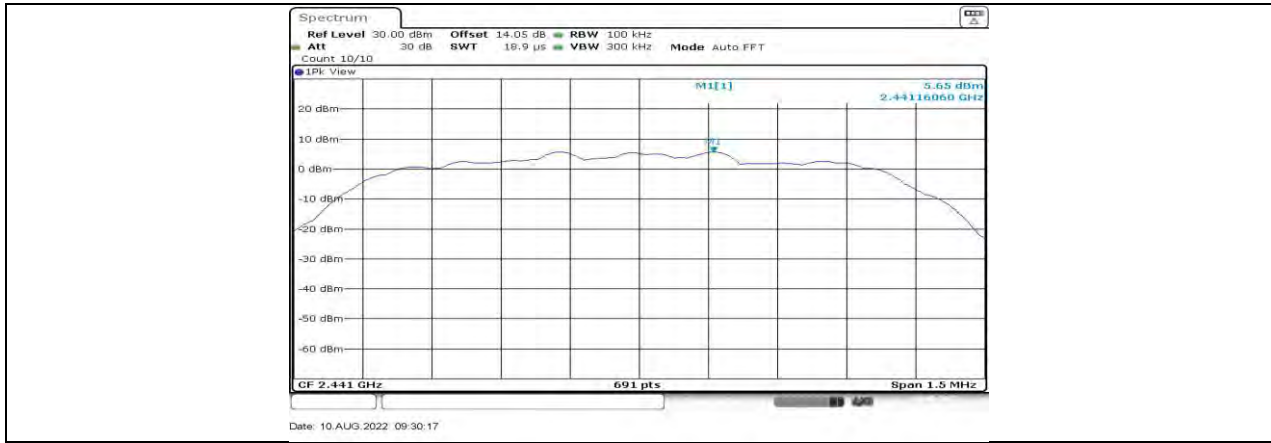


3DH5\_Ant1\_2441\_0~Reference

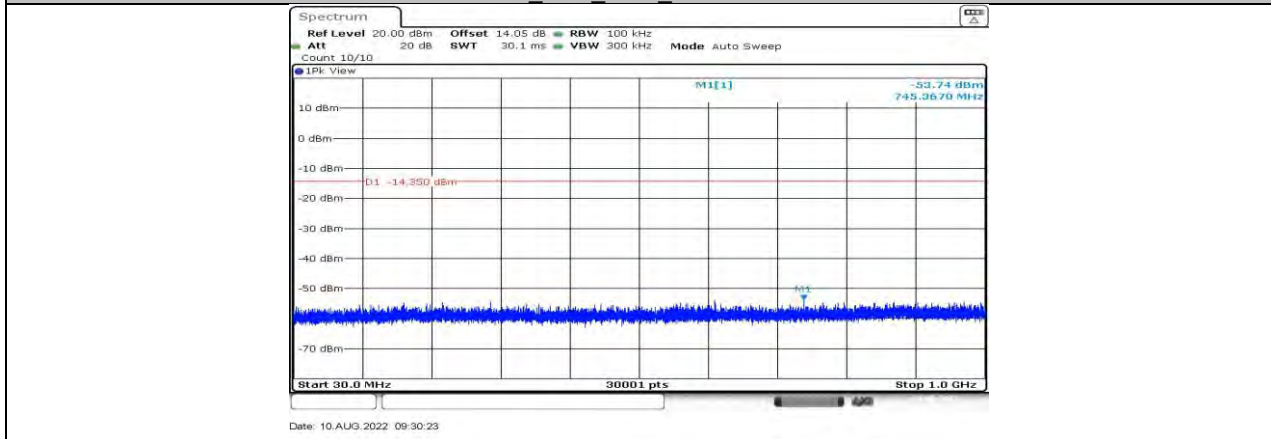


3DH5\_Ant1\_2441\_30~100

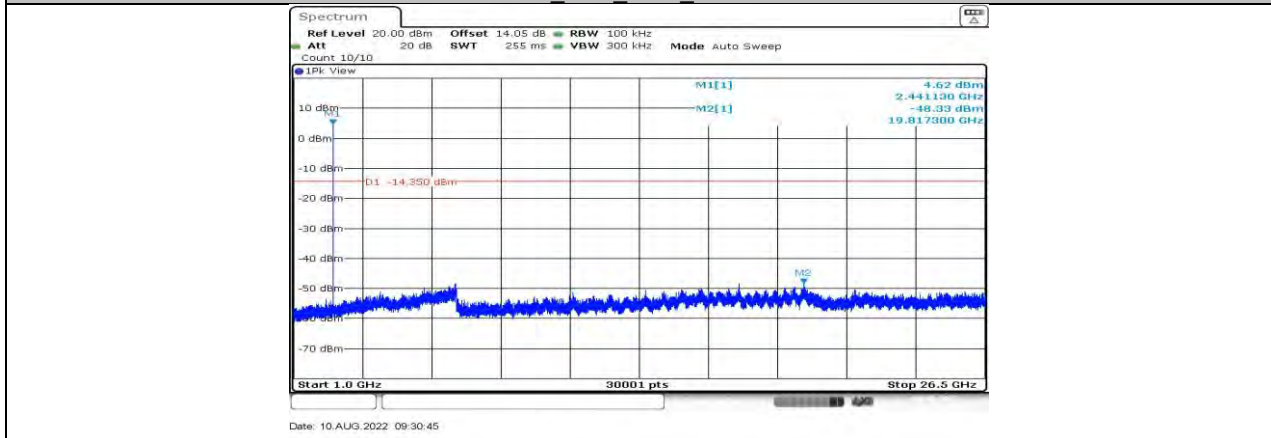


3DH5\_Ant1\_2441\_1000~26500

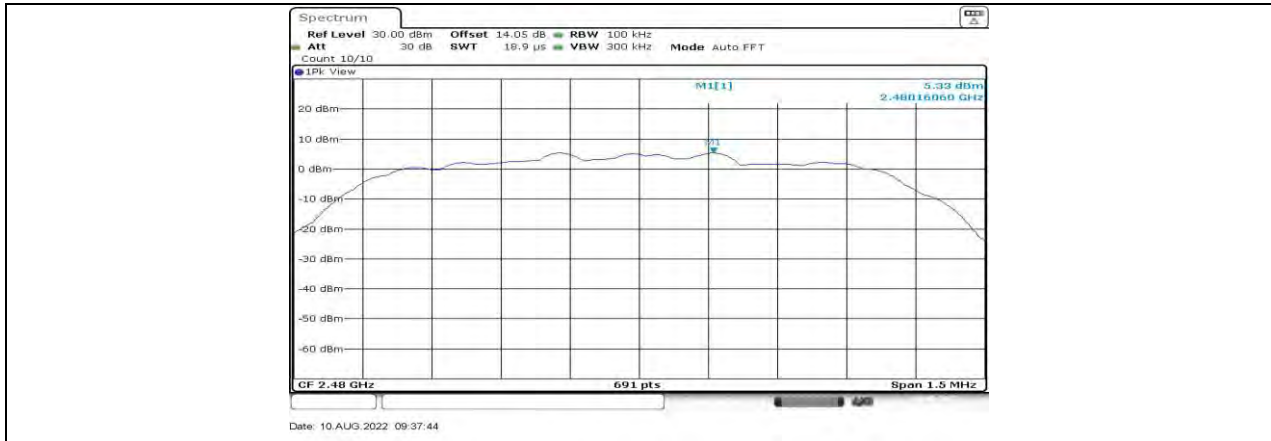

3DH5 Ant1 2480 0~Reference

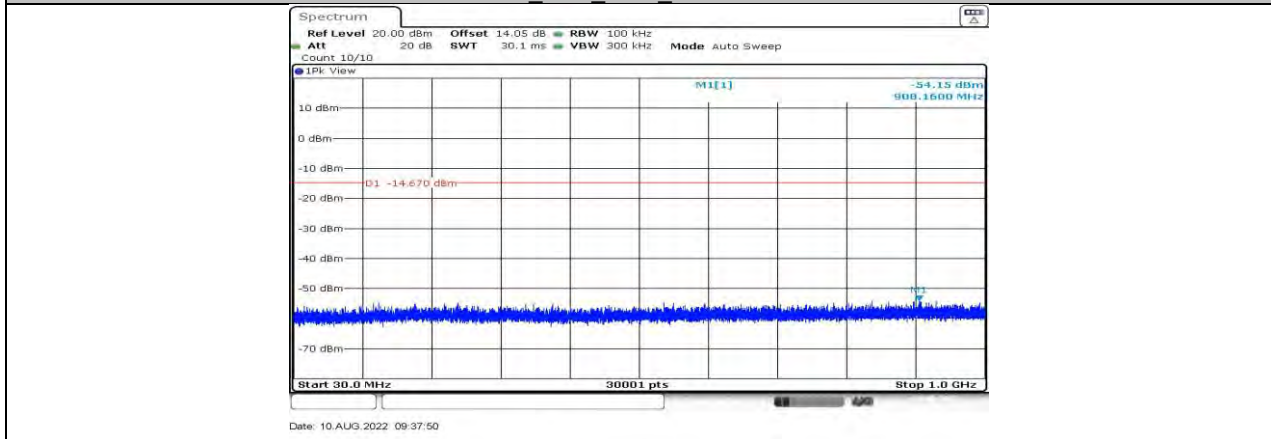

3DH5 Ant1 2480 30~1000

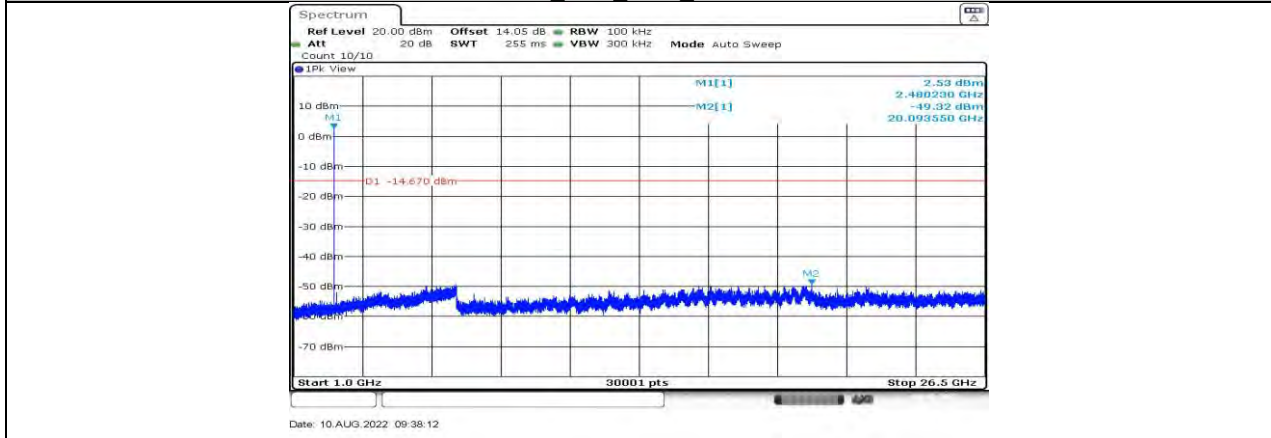

3DH5 Ant1 2480 1000~26500



## 11.9. APPENDIX I: DUTY CYCLE

### 11.9.1. Test Result

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
DH5	2.87	3.72	0.7715	77.15	1.13	0.35	0.5
2DH5	2.87	3.73	0.7694	76.94	1.14	0.35	0.5
3DH5	2.87	3.73	0.7694	76.94	1.14	0.35	0.5

Note:

Duty Cycle Correction Factor= $10\log(1/x)$ .


Where: x is Duty Cycle (Linear)

Where: T is On Time


If that calculated VBW is not available on the analyzer then the next higher value should be used.




### 11.9.2. Test Graphs

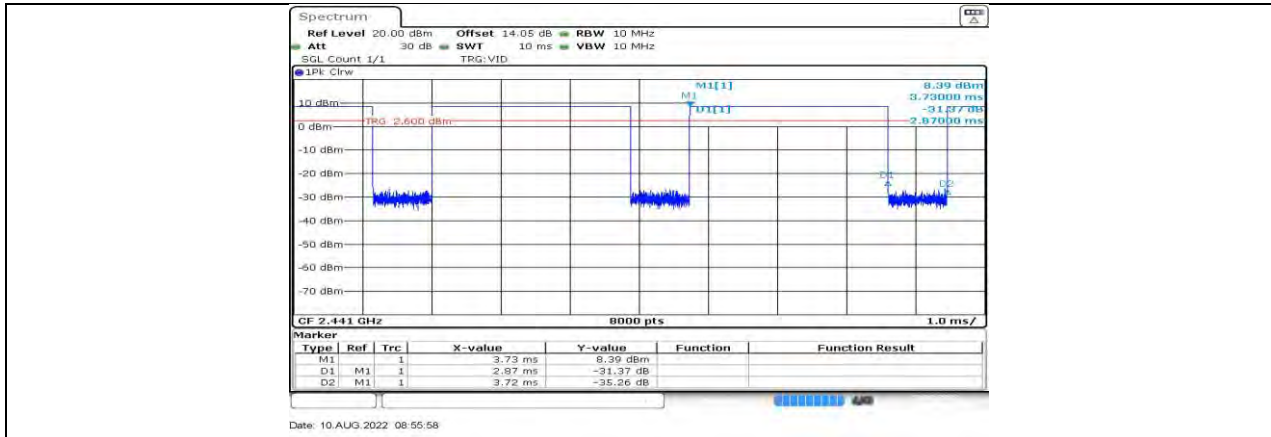

DH5\_Ant1\_2441

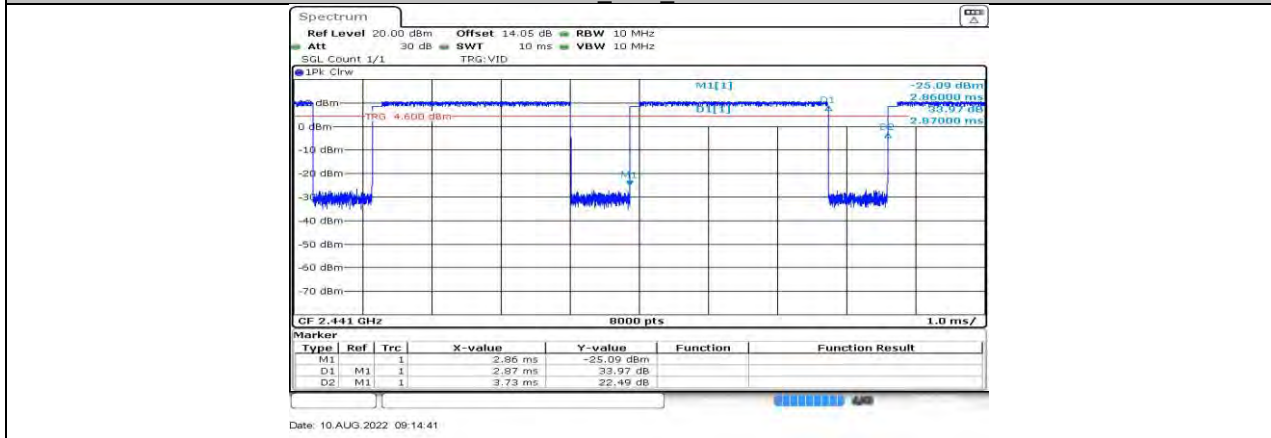

2DH5\_Ant1\_2441

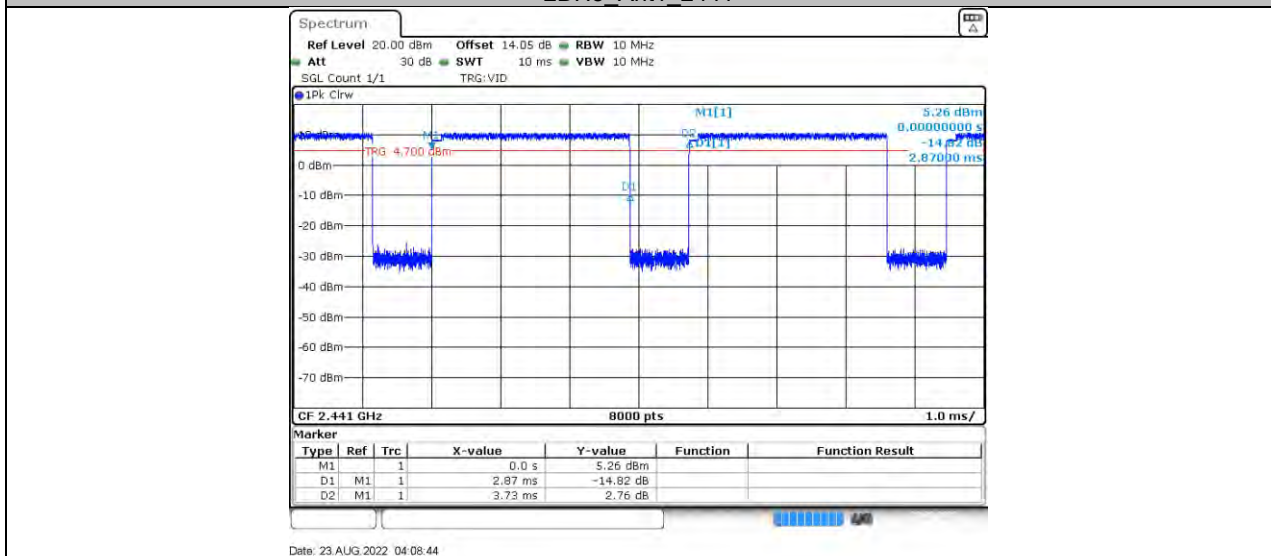

3DH5\_Ant1\_2441

**END OF REPORT**