

	    <p>CERTIFICATE 2518.08</p> <p>MS ISO/IEC 17025 TESTING SAMM NO. 0825</p>																																							
<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn Bhd, Plot 2A Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC Part 15 Subpart E, 15.407</p> <p>Report Revision : Rev.A Report ID : 18807-RF-00057 Service Request ID : 18807</p>																																							
<table border="0"> <tr> <td>Date/s Tested</td> <td>: 21-May-2020</td> <td rowspan="10">  </td> </tr> <tr> <td>Manufacturer/Location</td> <td>: Motorola Solutions Malaysia Sdn Bhd</td> </tr> <tr> <td>Manufacturer Address</td> <td>: Plot 2A Medan Bayan Lepas, Mukim 12 SWD 11900 Bayan Lepas, Penang, Malaysia</td> </tr> <tr> <td>Requestor</td> <td>: TANG, GARY</td> </tr> <tr> <td>Product Type</td> <td>: Mobile</td> </tr> <tr> <td>Tested Basic Function</td> <td>: Transmit / Receive</td> </tr> <tr> <td>External Model Name (PMN)</td> <td>: APX6500</td> </tr> <tr> <td>Sales Model Number (HVIN)</td> <td>: M25QSS9PW1BN</td> </tr> <tr> <td>Frequency Band</td> <td>: 5180-5320MHz; 5500-5825MHz</td> </tr> <tr> <td>Max RF Output Power</td> <td>: 802.11a, 802.11 n20 - 15.84mW</td> </tr> <tr> <td>Applicant Name</td> <td>: Motorola Solutions Inc</td> <td></td> </tr> <tr> <td>Applicant Address</td> <td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td> <td></td> </tr> <tr> <td>FCC Registrations</td> <td>: 461337</td> <td></td> </tr> <tr> <td>ISED Registrations</td> <td>: MY0001</td> <td></td> </tr> <tr> <td>Firmware Version (FVIN)</td> <td>: D20.75.20</td> <td></td> </tr> </table> <p>The equipment was tested to the standard(s) listed below with the following result :</p> <table border="0"> <tr> <td>-</td> <td>FCC Part 15 Subpart E 15.407 ISED RSS-247, Issue 2 Section 6.3</td> <td>PASS</td> </tr> </table>		Date/s Tested	: 21-May-2020		Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd	Manufacturer Address	: Plot 2A Medan Bayan Lepas, Mukim 12 SWD 11900 Bayan Lepas, Penang, Malaysia	Requestor	: TANG, GARY	Product Type	: Mobile	Tested Basic Function	: Transmit / Receive	External Model Name (PMN)	: APX6500	Sales Model Number (HVIN)	: M25QSS9PW1BN	Frequency Band	: 5180-5320MHz; 5500-5825MHz	Max RF Output Power	: 802.11a, 802.11 n20 - 15.84mW	Applicant Name	: Motorola Solutions Inc		Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322		FCC Registrations	: 461337		ISED Registrations	: MY0001		Firmware Version (FVIN)	: D20.75.20		-	FCC Part 15 Subpart E 15.407 ISED RSS-247, Issue 2 Section 6.3	PASS
Date/s Tested	: 21-May-2020																																							
Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd																																							
Manufacturer Address	: Plot 2A Medan Bayan Lepas, Mukim 12 SWD 11900 Bayan Lepas, Penang, Malaysia																																							
Requestor	: TANG, GARY																																							
Product Type	: Mobile																																							
Tested Basic Function	: Transmit / Receive																																							
External Model Name (PMN)	: APX6500																																							
Sales Model Number (HVIN)	: M25QSS9PW1BN																																							
Frequency Band	: 5180-5320MHz; 5500-5825MHz																																							
Max RF Output Power	: 802.11a, 802.11 n20 - 15.84mW																																							
Applicant Name	: Motorola Solutions Inc																																							
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																							
FCC Registrations	: 461337																																							
ISED Registrations	: MY0001																																							
Firmware Version (FVIN)	: D20.75.20																																							
-	FCC Part 15 Subpart E 15.407 ISED RSS-247, Issue 2 Section 6.3	PASS																																						
<p>This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.</p>																																								
<table border="0"> <tr> <td>Prepared By:</td> <td>Approved By:</td> </tr> <tr> <td>  <hr/> Gan Boon Teong Technician </td> <td>  <hr/> Vincent Foong Chuen Kit Deputy Technical Manager </td> </tr> </table>			Prepared By:	Approved By:	 <hr/> Gan Boon Teong Technician	 <hr/> Vincent Foong Chuen Kit Deputy Technical Manager																																		
Prepared By:	Approved By:																																							
 <hr/> Gan Boon Teong Technician	 <hr/> Vincent Foong Chuen Kit Deputy Technical Manager																																							

TABLE OF CONTENTS

1. Introduction and Overview	3
2. Test Laboratory Status.....	3
3. Test Environmental Conditions.....	3
3.1. Temperature and Humidity.....	3
3.2. Tolerance	3
3.3. Measurement Uncertainty	3
4. Test Results Summary	3
5. Technical Data of Device Under Test.....	4
5.1. Operating Frequency Bands and Mode of EUT	4
5.2. List of antennas and their corresponding gains	4
5.3. Modifications and deviation from standard	4
5.4. EUT Maximum Output Power	4
5.5. Channel loading messages or sequences	5
5.6. Transmit Power Control (TPC).....	5
5.7. Time required for master or client device to complete power cycle.....	5
5.8. System Architecture	5
5.9. Master device identification.....	5
6. Test setup and list of equipment.....	5
6.1. Setup block diagram.....	5
6.2. List of Equipment	6
6.3. Test Setup Photos.....	6
7. Test Requirements	7
7.1. DFS Requirements / Limits.....	7
7.2. DFS Detection Threshold	7
8. Test Procedure and Test Data	8
8.1. Test Method.....	8
8.2. Test Data.....	8

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial report	21-MAY-2020	Vincent Foong

1. Introduction and Overview

This report details the utilization, technical data of device under test, test equipment, and test results of the measurements performed at the Motorola Penang Advanced Communication Laboratory in accordance to the standards specified on page 1.

This test report is only valid in its original form.

The test results herein refer only to the tested sample. Motorola Penang Advanced Communication Laboratory is not responsible for any generalizations or conclusions drawn from these test results and concerning further samples.

2. Test Laboratory Status

Motorola Penang Advanced Communication Laboratory is an ISO/IEC17025:2005 accredited laboratory. The laboratory was accredited by SAMM, with SAMM Cert No #0825

3. Test Environmental Conditions

3.1. Temperature and Humidity

Ambient Temperature	Rel. Air Humidity
15 °C to 35 °C	20 %RH to 75%RH

3.2. Tolerance

Chamber Temperature Tolerance	Chamber Humidity Tolerance
± 0.3 °c	± 3 %

3.3. Measurement Uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96

4. Test Results Summary

The table below summarizes the test results for the test completed. For detailed test data, refer to section 7.

Section	Test Parameters	Results
7.1.1	FCC Part 15.407 / RSS-247 Non Occupancy Period	PASS
7.1.2	FCC Part 15.407 / RSS-247 Channel Move Time	PASS
7.1.3	FCC Part 15.407 / RSS-247 Channel Closing Transmission Time	PASS

NOTE:

NA → Not Applicable

5. Technical Data of Device Under Test

5.1. Operating Frequency Bands and Mode of EUT

Operational Mode	Operating Frequency Range	
	5250-5350MHz	5470-5725MHz
Client without radar detection and ad hoc function	Yes	Yes

5.2. List of antennas and their corresponding gains

Antenna #	Type	Frequency Range	Max Gain (dBi)
AN000163A02	GPS/WiFi Antenna	4900-5900MHz	5.25
AN000163A05	BT/WIFI/GPS ANTENNA	4900-5900MHz	1.6
PMAN5101A	Glass mount	4900-5900MHz	0.2

5.3. Modifications and deviation from standard

There is no deviation between the test carried out compared to the standard test method

5.4. EUT Maximum Output Power

802.11a

Antenna #	Frequency Range	Output Power (dBm)	Max EIRP including duty cycle correction
1	5250-5350MHz	11.588	16.838
1	5470-5725MHz	10.15	15.400

802.11n (20MHz)

Antenna #	Frequency Range	Output Power (dBm)	Max EIRP including duty cycle correction
1	5250-5350MHz	11.435	16.685
1	5470-5725MHz	10.276	15.526

5.5. Channel loading messages or sequences

Channel loading was achieved by using iPerf software to control throughput.

5.6. Transmit Power Control (TPC)

U-NII devices operating in the 5.25-5.35GHz band and the 5.47-5.725GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6dB below the EIRP value of 30dBm. A TPC mechanism is not required for systems with an EIRP of less than 500mW.

Maximum EIRP for this device is 16.838 dBm which is 48.28 mW, therefore TPC is not required.

5.7. Time required for master or client device to complete power cycle

The master device took 1 minute and 15 seconds to complete its power cycle. The client device does not have radar detection and therefore its power on time is not applicable.

5.8. System Architecture


The EUT utilizes IP based system architecture

5.9. Master device identification

The DFS compliant master device used for testing was a Linksys WRT3200ACM with serial number 19810625700081, and FCC ID Q87-WRT3200ACM and IC ID 3839A-WRT3200ACM

6. Test setup and list of equipment


6.1. Setup block diagram

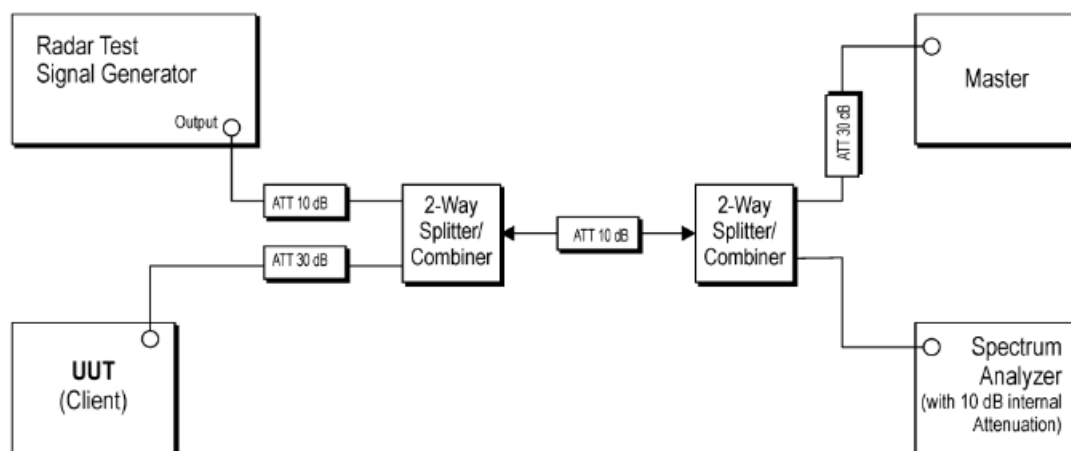

6.2. List of Equipment

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
SIGNAL GENERATOR	SMB100A	177677	12-Jul-17	12-Jul-20
SIGNAL ANALYZER	FSV	101515	22-Jul-19	22-Jul-20
BASIC 8-CHANNEL SWITCH MODULE	OSP-B157W8	101073	29-May-19	29-May-21
VECTOR SIGNAL GENERATOR	SMBV100A	261962	29-Apr-19	29-Apr-21
POWER SUPPLY (0-20V / 0-30A, 200W)	6033A	2934A04716	14-Jan-19	14-Jan-21

6.3. Test Setup Photos

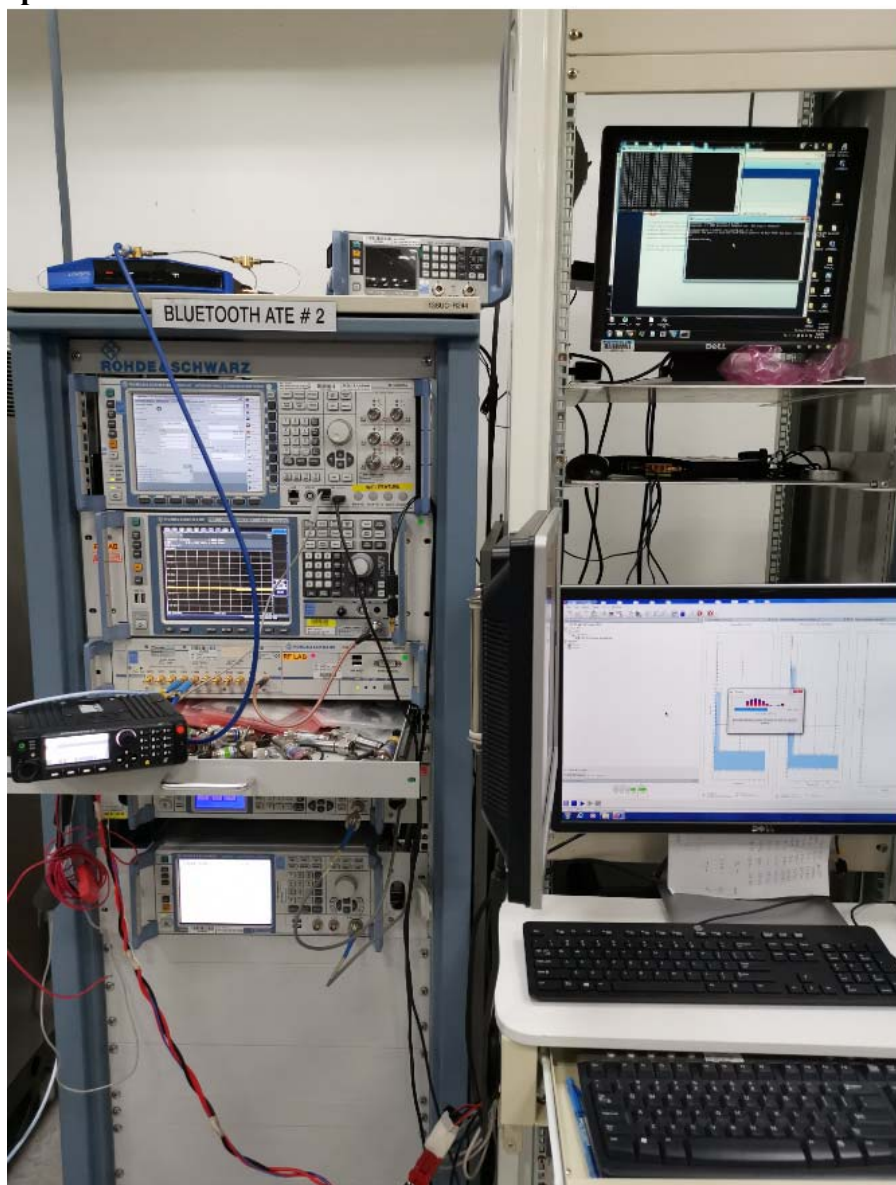

7. Test Requirements

7.1. DFS Requirements / Limits

Requirement	Limit
Channel Move Time	10 seconds
Channel Closing Transmission Time	200ms + an aggregate 60ms over following 10 seconds
Non-Occupancy Period	30 minutes

7.2. DFS Detection Threshold


The calibrated conducted DFS detection threshold level was set at -63 dBm. This level exceeds the specification for the stipulated detection level of -64dBm and ensures there is margin to the limit to ensure successful detection.

8. Test Procedure and Test Data

8.1. Test Method


DFS testing was performed using the conducted test methods defined in 905462 D02 UNII DFS Compliance Procedures New Rules v02. The devices was a client only device without radar detection capability. The Rohde & Schwarz TS8997 test system in conjunction with WMS32 software was used for the automation of the testing.

8.2. Test Data

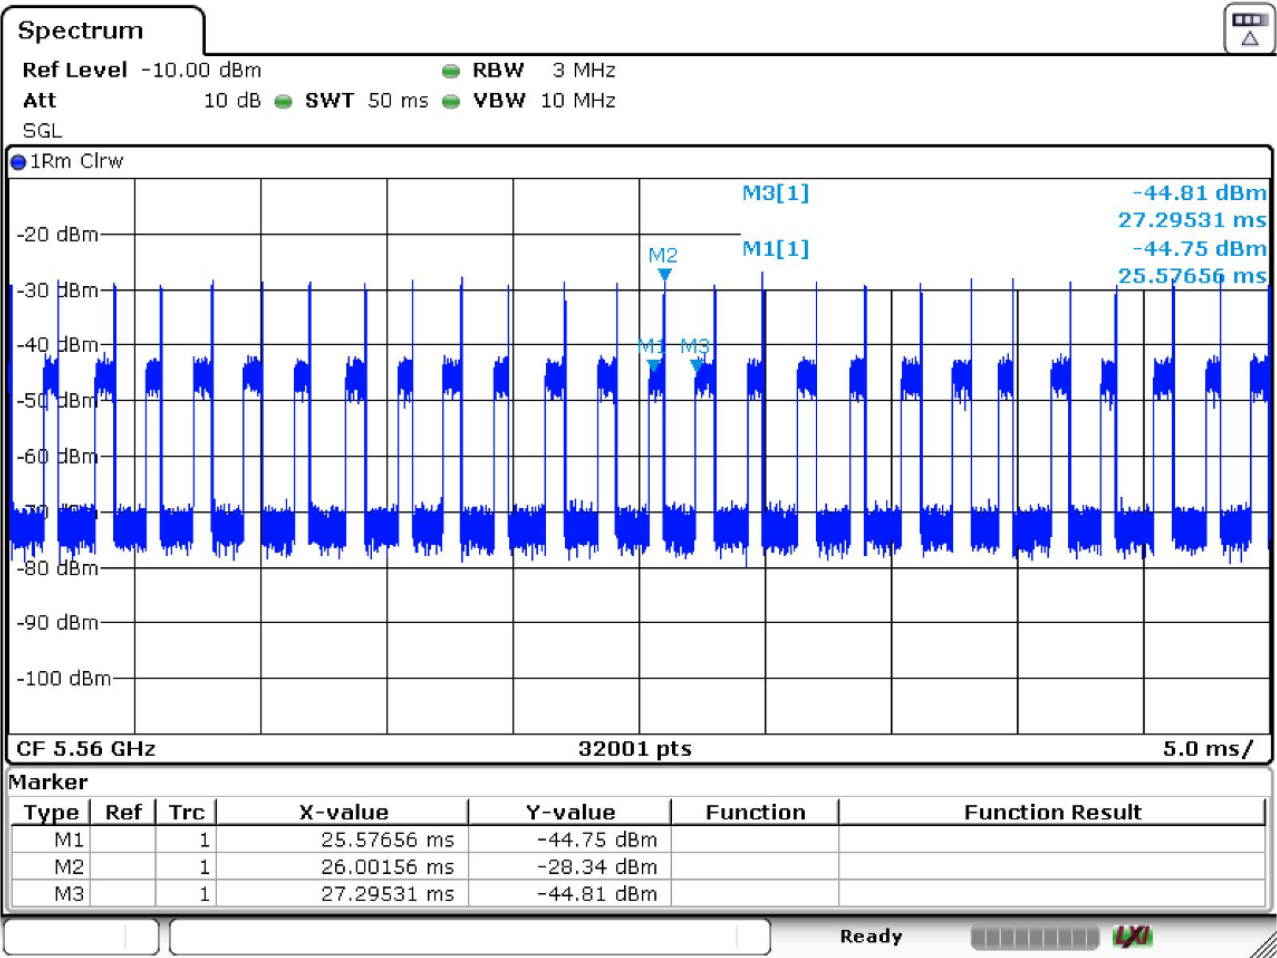

The resulting plot data was extracted and post processed, giving a duty cycle of 34.18%.


DFS Detection Threshold

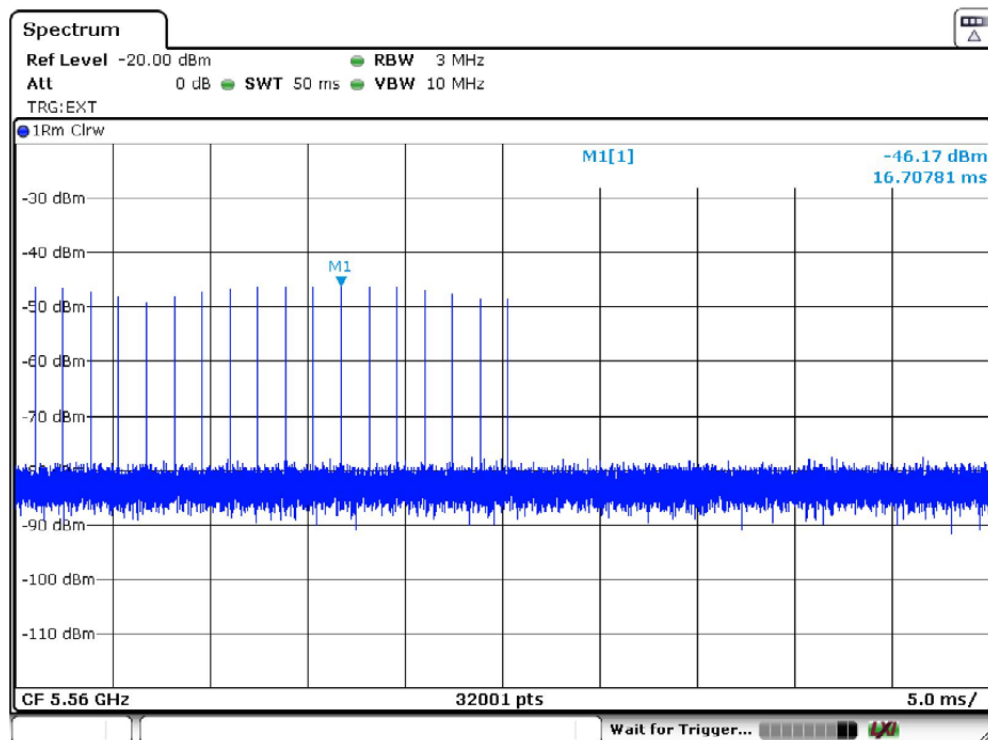

Peak of -46.17dBm, with losses at combiners factoring antenna gain to be 15.81dB, therefore level going into antenna port is -61.98dBm which exceeds threshold level of -64dBm for successful detection.


Channel Move and Closing Time

Channel Move Time first 200ms

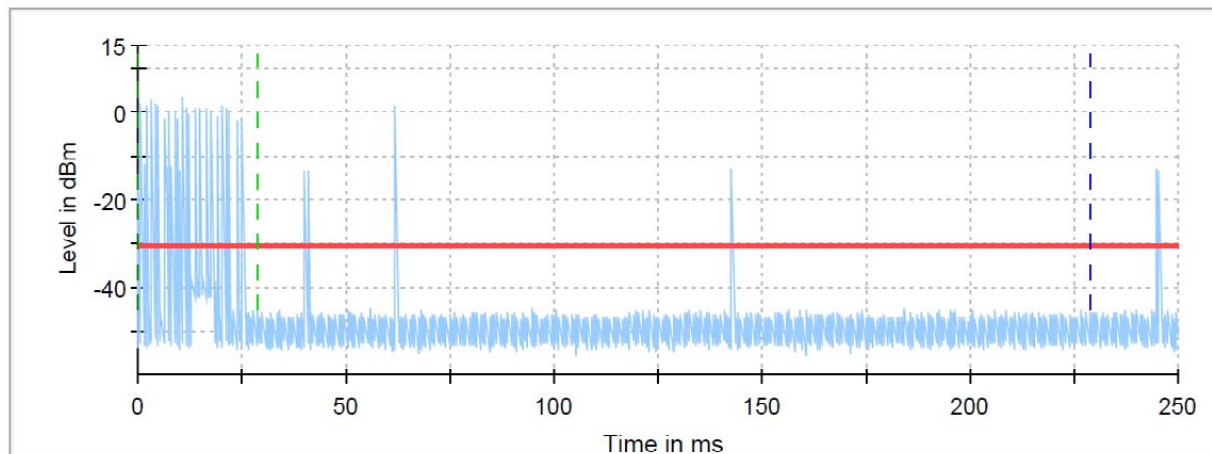

— Channel Move Time first 200ms
 - - - Start of Radar
 — Threshold
 - - - Trigger at end of Radar

Channel Move Time

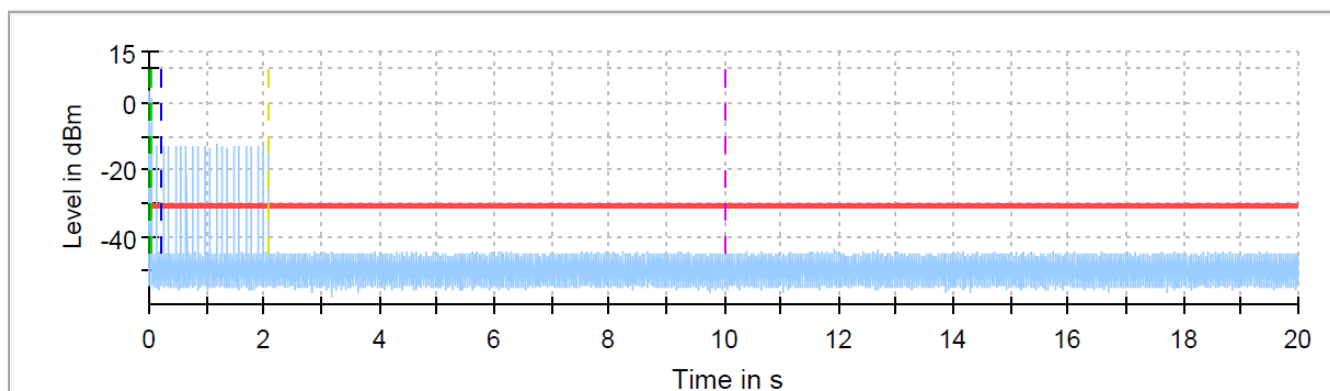

— Channel Move Time
 — Threshold
 - - - Start of Radar
 - - - Trigger at end of Radar
 - - - First 200ms of Channel Closing Tx Time
 - - - 10sec Channel Move Time Limit
 - - - Last measured edge of Channel Closing Tx Time


Channel Closing and Channel Move Time

Detailed Results

DUT Frequency (MHz)	Radar Type No.	Time duration	No of pulses found	Tx time (ms)	Tx Time Limit (ms)
5560	0	200ms	4	0.92	200
5560	0	remaining 9.8s period	19	7.67	60

Last transmission after injection of radar is 2.06 seconds, therefore meeting channel closing time 10s requirement.

Non-Occupancy Period

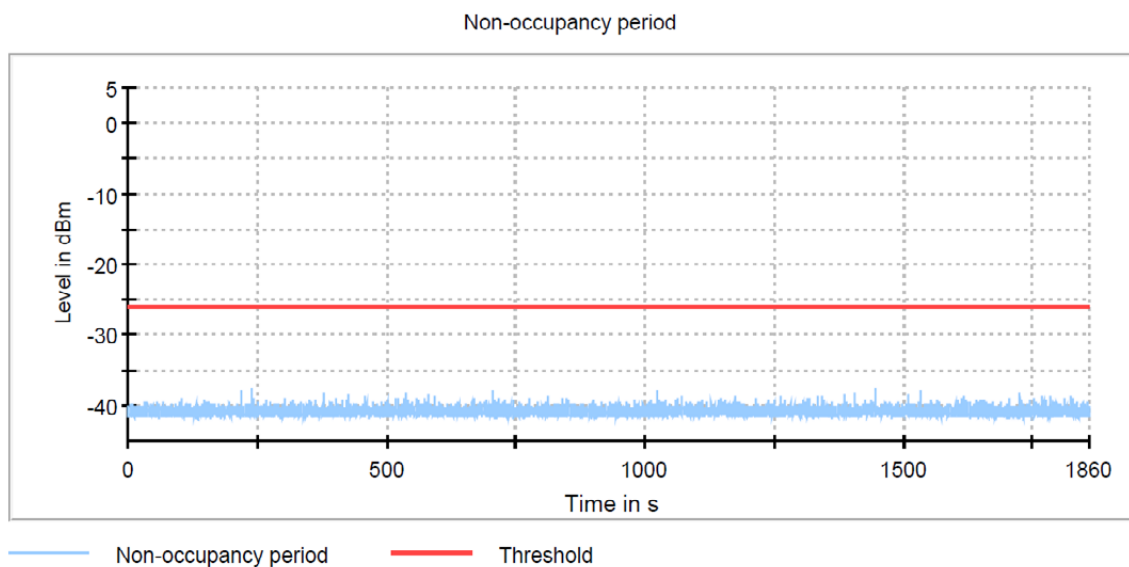

No pulses were detected in the 30 minutes that followed after channel move time, meeting non-occupancy 30 minute requirement.

END OF TEST REPORT