



RADIO TEST REPORT

Test Report No. : 31CE0052-HO-01-A

Applicant : Canon Inc.
Type of Equipment : Wireless Module
Model No. : CH9-1214
FCC ID : AZD215
Test regulation : FCC Part15 Subpart C: 2011
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: May 20 to June 25, 2011

Representative test engineer:

S. Takano

Shinichi Takano
Engineer of WiSE Japan,
UL Verification Service

Approved by :

G. Ishiwata

Go Ishiwata
Manager of WiSE Japan,
UL Verification Service

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".



UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

13-EM-F0429

Contents

	<u>Page</u>
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Conducted emission	10
SECTION 6: Carrier frequency separation	10
SECTION 7: 20dB bandwidth & Occupied bandwidth (99%)	10
SECTION 8: Number of hopping frequency	11
SECTION 9: Dwell time	11
SECTION 10: Maximum peak output power	11
SECTION 11: Spurious emissions (Antenna port conducted)	11
SECTION 12: Radiated emission	12
Contents of appendixes	14
APPENDIX 1: Photographs of test setup	15
APPENDIX 2: Test data	18
APPENDIX 3: Test instruments	59

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 1: Customer information

Company Name : Canon Inc.
Address : 30-2, Shimomaruko, 3-chome, Ohta-ku, Tokyo, 146-8501 Japan
Telephone Number : +81 3 3757 6798
Facsimile Number : +81 3 3757 8431
Contact Person : Kiyoshi Sahoyama

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Wireless Module
Model No. : CH9-1214
Serial No. : Refer to 4.2 in this report.
Rating : DC3.3V
Receipt Date of Sample : May 9, 2011
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

2.2 Product description

Model: CH9-1214 (referred to as the EUT in this report) is a Wireless Module.

General specification

Clock frequency(ies) in the system : 38.4MHz, 32.768kHz

Radio specification

Equipment type : Transceiver
Antenna type : Planar Inverted F Antenna
Antenna connector type : U.FL
Operation temperature range : -20 to +70 deg.C.

Bluetooth

Frequency of operation : 2402-2480MHz
Bandwidth / Channel spacing : 79MHz & 1MHz
Type of modulation : FHSS
Antenna gain with cable loss : 1.95dBi
ITU code : F1D, G1D

Wireless LAN*

Frequency of operation : 2412-2462MHz (IEEE 802.11b, 11g, 11n-HT20)
2422-2452MHz (IEEE 802.11n-HT40)
5180-5320MHz (IEEE 802.11a, 11n-HT20)
5190-5310MHz (IEEE 802.11n-HT40)
5745-5825MHz (IEEE 802.11a, 11n-HT20)
5755-5795MHz (IEEE 802.11n-HT40)

Bandwidth & channel spacing : Bandwidth :
20MHz (IEEE 802.11b, 11g, 11a, 11n-HT20), 40MHz (IEEE 802.11n-HT40)
Channel spacing :
5MHz (2.4GHz), 20MHz (5GHz)

Type of modulation : DSSS (IEEE 802.11b)
OFDM (IEEE 802.11a/g/n)

Antenna gain with cable loss : +1.95 dBi (2400/2450/2500MHz)
-1.32 dBi (5160/5250/5340MHz)
-0.43 dBi (5725/5785/5845MHz)

ITU code : D1D, G1D

* Refer to the test report 31CE0052-HO-01-B/C/D for this function.

FCC Part15.31 (e)

The Wireless Module is provided with stable power supply DC 3.3V from the host device and has power supply regulator which provides DC 2.85V and DC 1.8V, therefore, the equipment complies power supply regulation.

FCC Part15.203

The EUT has a unique coupling/antenna connector (U.FL). Therefore the equipment complies with the requirement of 15.203.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2011, final revised on July 8, 2011
and effective August 8, 2011
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

*The revision on July 8, 2011 does not affect the test specification applied to the EUT.

The EUT has been tested for compliance with FCC Part 15 Subpart B: 2011. Refer to the test report 31CE0052-SH-01-B.

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results	
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC Section 15.207	-	N/A	21.2dB Freq.: 0.40233MHz Detector: Quasi-Peak Phase: N Mode: Tx 2441MHz, 3DH5	Complied	
Carrier frequency separation	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A	*See data.	Complied	
20dB bandwidth	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		-	
Number of hopping frequency	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied	
Dwell time	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied	
Maximum peak output power	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (b)(1)	Conducted	N/A		Complied	
Band edge compliance & Spurious emission	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (d) Section15.209	Conducted/ Radiated	N/A		4.1dB Freq.: 12400.000MHz Detector: Average Polarization: Vertical Mode: Tx 2480MHz, 3DH5	Complied
Note: UL Japan's Work Procedures No. 13-EM-W0420 and 13-EM-W0422							

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators, RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	-

Note: UL Japan's EMI Work Procedures No.13-EM-W0420 and 13-EM-W0422.

* Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC ^{*1} /SR ^{*2} (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Conducted emission (AC Mains) AMN/LISN	150kHz-30MHz	3.6 dB	3.6 dB	3.6 dB
Radiated emission (Measurement distance: 3m)	9kHz-30MHz	3.7 dB	3.7 dB	3.6 dB
	30MHz-300MHz	4.9 dB	5.1 dB	5.0 dB
	300MHz-1GHz	5.0 dB	5.2 dB	5.0 dB
	1GHz-13GHz	4.8 dB	4.8 dB	4.9 dB
Radiated emission (Measurement distance: 1m)	13GHz-18GHz	5.6 dB	5.6 dB	5.6 dB
	18GHz-40GHz	4.8 dB	4.3 dB	4.4 dB

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission

Conducted emission test

The data listed in this test report has enough margin, more than site margin.

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Antenna port conducted test

Power Measurement uncertainty above 1GHz for this test was: (±) 1.9dB

Spurious emission (Conducted) Measurement (below 1GHz) uncertainty for this test was: (±) 1.8dB

Spurious emission (Conducted) Measurement (1G-3GHz) uncertainty for this test was: (±) 2.3dB

Spurious emission (Conducted) Measurement (3G-18GHz) uncertainty for this test was: (±) 3.6dB

Spurious emission (Conducted) Measurement (18G-26.5GHz) uncertainty for this test was: (±) 4.0dB

Bandwidth Measurement uncertainty for this test was: (±) 5.4%

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

	FCC Registration No.	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
<input type="checkbox"/> No.1 Semi-anechoic chamber	697847	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input checked="" type="checkbox"/> No.2 Semi-anechoic chamber	697847	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input type="checkbox"/> No.3 Semi-anechoic chamber	697847	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5m
<input type="checkbox"/> No.4 Full-anechoic chamber	-	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
<input type="checkbox"/> No.1 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input checked="" type="checkbox"/> No.2 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.3 shielded room	-	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
<input type="checkbox"/> No.4 shielded room	-	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
<input type="checkbox"/> No.5 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
<input checked="" type="checkbox"/> No.6 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-

3.6 Test setup, Data of test & Test instruments

Refer to Appendix 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing

4.1 Operating mode

The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use.

Test item	Operating mode	Tested frequency
Conducted emission	Transmitting Hopping OFF (DH5/3DH5) Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Carrier frequency separation	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
20dB bandwidth	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Number of hopping frequency	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
Dwell time	Transmitting (Hopping ON), Payload: PRBS9 -DH1, -DH3, -DH5 -3DH1, -3DH3, -3DH5 -Inquiry	-
Maximum peak output power	Transmitting (Hopping OFF), Payload: PRBS9 -DH5, -2DH5, -3DH5	2402MHz, 2441MHz, 2480MHz
Band edge compliance & Spurious emission (Conducted)	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	Band edge compliance: 2402MHz, 2480MHz
(Radiated)	Transmitting (DH5/3DH5), Payload: PRBS9	Spurious emission: 2402MHz, 2441MHz, 2480MHz
99% occupied bandwidth	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	2402MHz, 2441MHz, 2480MHz

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test).

*Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT. However, the limit level 125mWof AFH mode was used for the test.

*EUT has the power settings by the software as follows;

Power settings: 4dBm

Software: Tera Term v4.69

Justification: The system was configured in typical fashion (as customer would normally use it) for testing.

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

4.2 Configuration and peripherals

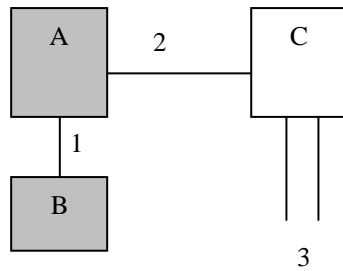

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless Module	CH9-1214	*1)	CANON	EUT
B	Antenna	Dual Band WLAN Antenna Cable Assembly 2011	001	Tyco Electronics	EUT
C	Extender	TSS-T6	-	CANON	-

*1) ES4101: Conducted emission and Radiated emission, ES4006: Other test

List of cables used

No.	Name	Length (m)	Shield (Cable)	Shield (Connector)	Remarks
1	Antenna	0.025	Unshielded	Unshielded	-
2	Jig	0.04	Unshielded	Unshielded	-
3	DC	1.5	Unshielded	Unshielded	+3.3V, G

SECTION 5: Conducted emission

5.1 Operating environment

The test was carried out in No.2 shielded room.

Temperature : Refer to test data (APPENDIX 2)
Humidity : Refer to test data (APPENDIX 2)

5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT was aligned and was flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN and excess AC cable was bundled in center. Photographs of the set up are shown in Appendix 1.

5.3 Test conditions

Frequency range : 0.15 - 30MHz
EUT position : Table top

5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT within a screened room. The EUT was connected to a Line Impedance Stabilization Network (LISN) via DC power supply. An overview sweep with peak detection has been performed. The measurements had been performed with a quasi-peak detector and if required, an average detector. The conducted emission measurements were made with the following detector of the test receiver.

Detector Type : Quasi-Peak/ Average
IF Bandwidth : 9kHz

5.5 Results

Summary of the test results : Pass
Refer to APPENDIX 2

SECTION 6: Carrier frequency separation

Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX 2

SECTION 7: 20dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX 2

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

SECTION 8: Number of hopping frequency

Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 9: Dwell time

Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 10: Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 11: Spurious emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.
(9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=10kHz)

Summary of the test results: Pass

Refer to APPENDIX 2

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 12: Radiated emission

12.1 Operating environment

The test was carried out in No.2 Semi-Anechoic Chamber.

Temperature : See test data (APPENDIX 2)
Humidity : See test data (APPENDIX 2)

12.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

12.3 Test conditions

Frequency range : 30MHz to 26.5GHz
Test distance : 3m (below 13GHz) / 1m (above 13GHz)
EUT position : Table top

12.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m (below 13GHz) / 1m (above 13GHz). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection of the test receiver and Spectrum Analyzer.

Frequency	:	30-1000MHz	1000-26500MHz	
Detection Type	:	Quasi-Peak	Peak	* Average
IF Bandwidth	:	120kHz	RBW:1MHz/VBW:3MHz	RBW:1MHz/VBW:See data

* When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.


* The VBW was based on the inverse of the duty cycle (Refer to Appendix 2).

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Worst position:

	Frequency	Carrier	Spurious			
			30M-1GHz	1-13GHz	13-18GHz	18-26.5GHz
EUT Antenna	Horizontal	Y	X	X	X	X
	Vertical	X	X	X	X	X
Module	Horizontal	X	X	X	X	Z
	Vertical	Z	X	Y	Y	Z

Figure 1. Antenna angle

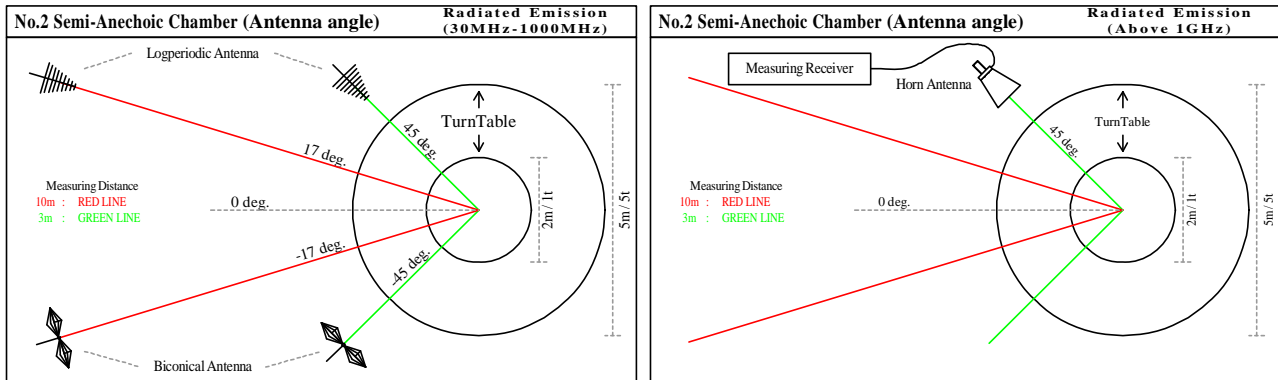

12.5 Band edge

Band edge level at 2400MHz is less than 20dB of peak point of the carrier. Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data.

12.6 Results

Summary of the test results : Pass *No noise was detected above the 6th order harmonics.
Refer to APPENDIX 2

Contents of appendixes

APPENDIX 1: Photographs of test setup

Conducted emission
Radiated emission
Pre-check of the worst position

APPENDIX 2: Test data

Conducted emission
20dB bandwidth and Carrier frequency separation
Number of hopping frequency
Dwell time
Maximum peak output power
Radiated emission
Spurious emission (Antenna port conducted)
99% Occupied bandwidth

APPENDIX 3: Test instruments

Test instruments

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401