

Straubing, 15 December 2003

TEST - REPORT**No. 55503-30810****for****T3PM-FS 75 MHz
R/C Transmitter**

Applicant: Futaba Corporation

Purpose of testing: To show compliance with

- FCC Code of Federal Regulations,
CFR 47, Part 95
- FCC Code of Federal Regulations,
CFR 47, Part 2, Subpart J

Note:

The test data of this report relate only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1.	Administrative Data.....	3
2.	Identification of Test Laboratory.....	4
3.	Summary of Test Results.....	5
4.	Operation Mode of EUT	6
5.	Configuration of EUT and Peripheral Devices.....	7
6.	Measuring Methods	8
6.1.	Maximum Transmitter Power (§95.639)	8
6.2.	Frequency tolerance (§95.623)	10
6.3.	Emission Bandwidth (§95.633).....	12
6.4.	Unwanted Emission 30 MHz - 1 GHz (§95.635, §95.639)	13
7.	Photographs of Test Setups	15
8.	Equipment List.....	17
9.	Referenced Regulations	19
10.	List of Measurements.....	20
11.	Test Results.....	21
12.	Additional Information supplementary to the Test Report.....	32

1. Administrative Data

Equipment Under Test (EUT):	T3PM-FS 75 MHz
Serial number(s):	001
Type of equipment:	R/C Transmitter
Type of emission:	2K50F1D
Parts/accessories:	---
FCC-ID:	AZPT3PM-FSS-75
Applicant: (full address)	Futaba Corporation R/C Engineering Unit 1 1080, Yabutsuka Chosei-son, Chosei-gun, Chiba-ken, 299-4395 Japan
Contract identification:	---
Contact person:	Mr. Fujita
Manufacturer:	Futaba Corporation
<hr/>	
Receipt of EUT:	December 08, 2003
Dates of test:	December 12, 2003
Note:	---
<hr/>	
Responsible for testing:	Martin Steindl
Responsible for test report:	Martin Steindl

2. Identification of Test Laboratory

Test Laboratory:
(full address): Senton GmbH EMI/EMC Test Center
Aeussere Fruehlingstrasse 45
D-94315 Straubing
Germany

Contact person: Mr. Johann Roidt
Communication: Telephone (+49) 0 94 21 / 55 22-0
Fax (+49) 0 94 21 / 55 22-99
eMail: Office@senton.de

FCC registration number: 90926
Industry Canada file number: IC 3050

3. Summary of Test Results

The tested sample complies with the requirements for R/C Transmitters set forth in the

The Code of Federal Regulations 47, Part 95, Subpart C & E

and

The Code of Federal Regulations 47 Part 2, Subpart J.

of the Federal Communication Commission (FCC).



Johann Roidt
Laboratory Manager




Martin Steindl
Test Engineer

4. Operation Mode of EUT

- transmitting continuously¹
- with battery supply nominal 9.6 V DC)²
- antenna extended to maximum³

- operating with $f = 75.710$ MHz

For conducted measurements a dummy load was used as delivered by applicant. A short description of the circuit can be found in the following figure.

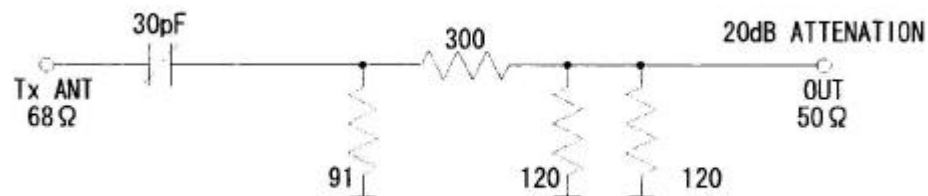

¹ Modulation as indicated on appropriate test record

² For conducted measurements replaced by external DC supply

³ For radiated emissions only

5. Configuration of EUT and Peripheral Devices

EUT is configured as stand-alone device

Configuration of cables of EUT

Not applicable

Configuration of peripheral devices connected to EUT

Not applicable

6. Measuring Methods

6.1. Maximum Transmitter Power (§95.639)

The maximum transmitter power was measured conducted and radiated.

6.1.1. Conducted Maximum Transmitter Power

A spectrum analyzer / EMI test receiver was connected to the output of the transmitter power amplifier (conducted measurement) via dummy load while EUT was operating in transmit mode using the assigned frequency.

The trace mode of the spectrum analyzer was set to max hold with:
 RBW = 100 kHz, VBW = 100 kHz, span = 1 MHz, sweep = 20 ms (auto mode)

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):
 02, 18, 51, 69, 70, 71

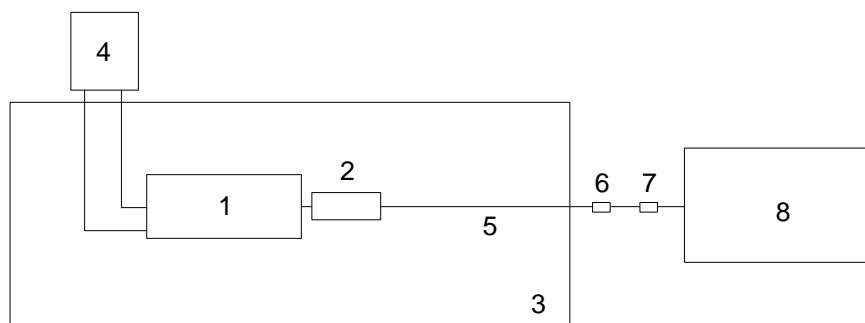


Figure 1: Measurement setup for testing on antenna connector

- | | |
|----------------------------|----------------------------|
| 1 Transmitter (EUT) | 5 Test cable |
| 2 Dummy load | 6 DC-block |
| 3 Wooden table | 7 Attenuator |
| 4 DC power supply | 8 Spectrum analyzer |

6.1.2. Radiated Maximum Transmitter Power

Radiated Maximum Transmitter Power was measured with detector-function of the spectrum analyzer set to positive peak and trace mode max hold:

RBW = 100 kHz, VBW = 100 kHz, span = 1 MHz, sweep = 15 s

For measurement setup and procedure see section "Unwanted Emission 30 MHz - 1 GHz (§95.635, §95.639)" on Page 13.

6.2. Frequency tolerance (§95.623)

6.2.1. Frequency stability vs. temperature

The frequency stability vs. temperature was measured with a spectrum analyzer connected to the output of the transmitter power amplifier (conducted measurement) via dummy load while EUT was operating in transmit mode using the assigned frequency.

The trace mode of the spectrum analyzer was set to write with frequency count mode activated:

RBW = 100 Hz, VBW = 100 Hz, span = 20 kHz, sweep = 1.5 s (auto mode)

See figure 2 for the measurement setup.

Test equipment used (see equipment list for details):
 02, 18, 51, 54, 69, 70, 71

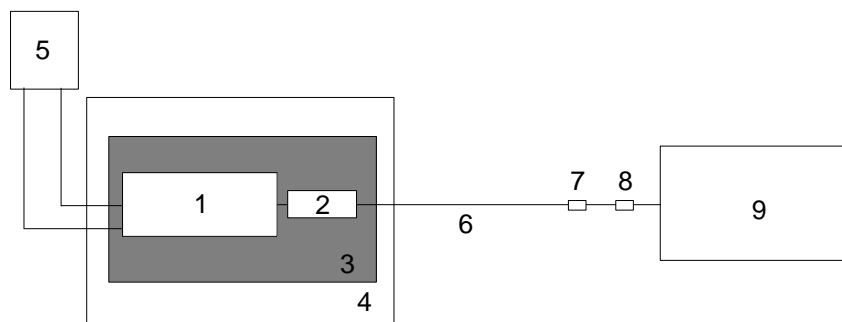


Figure 2: Measurement setup for testing within temperature test chamber

- | | |
|----------------------------|---------------------|
| 1 Transmitter (EUT) | 6 Test cable |
| 2 Dummy load | 7 DC-block |
| 3 Wooden support | 8 Attenuator |
| 4 Temperature test chamber | 9 Spectrum analyzer |
| 5 DC power supply | |

6.2.2. Frequency stability vs. supply voltage

The frequency stability vs. supply voltage was measured with a spectrum analyzer connected to the output of the transmitter power amplifier (conducted measurement) via dummy load while EUT was operating in transmit mode using the assigned frequency.

The trace mode of the spectrum analyzer was set to write with frequency count mode activated:

RBW = 100 Hz, VBW = 100 Hz, span = 20 kHz, sweep = 1.5 s (auto mode)

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):
02, 18, 51, 69, 70, 71

6.3. Emission Bandwidth (§95.633)

The emission bandwidth was measured as occupied bandwidth with a spectrum analyzer connected to the output of the transmitter power amplifier (conducted measurement) via dummy load while EUT was operating in transmit mode using the assigned frequency.

The occupied bandwidth measurement was performed referring to 99% of total power: The trace mode of the spectrum analyzer was set to max hold with RBW = 30 Hz, VBW = 30 Hz, span = 40 kHz, sweep = 90 s

See figure 1 for the measurement setup.

Test equipment used (see equipment list for details):
02, 18, 51, 69, 70, 71

6.4. Unwanted Emission 30 MHz - 1 GHz (§95.635, §95.639)

Radiated emissions were measured over the frequency range from 30 MHz to 1 GHz. For final testing the detector-function of the spectrum analyzer was set to positive peak and trace mode max hold:

RBW = 3 kHz, VBW = 10 kHz, span = 20 kHz, sweep = 10 s

Measurements were made in both the horizontal and vertical planes of polarization. The scans were taken in a fully-anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. During the tests the EUT was rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

Final testing was performed referring to substitution method as described in TIA/EIA-603, section 2.2.12 ("Radiated Spurious Emissions").

See figure 3 for the measurement setup.

Test equipment used (see equipment list for details):

01, 06, 12, 15, 38, 39, 40, 41, 55, 58, 61, 64, 66

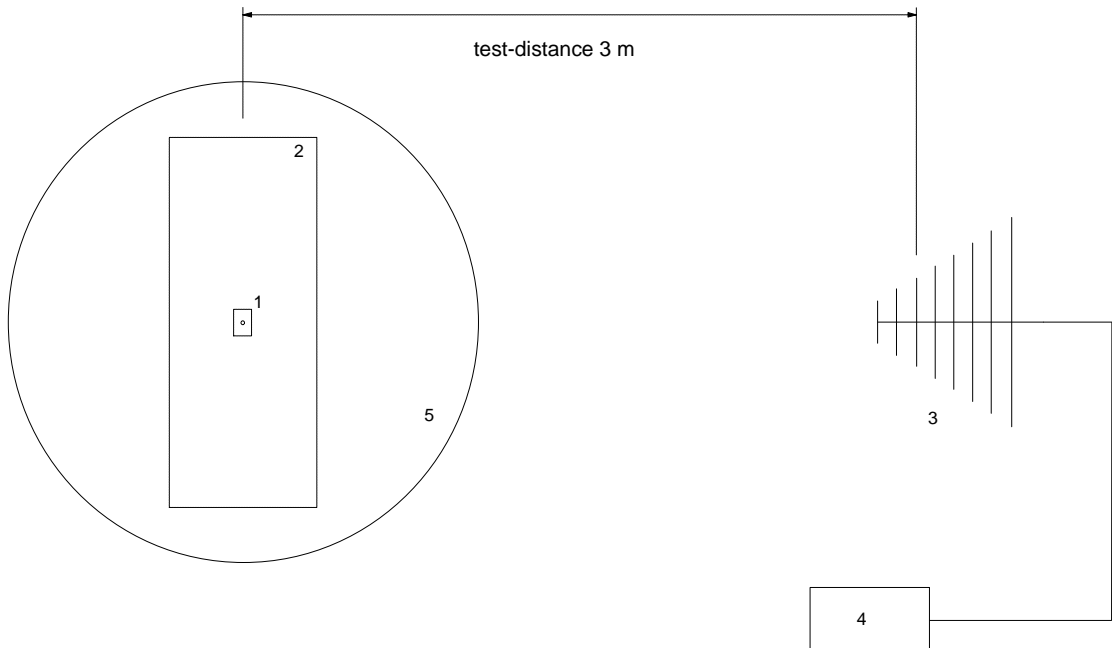


Figure 3: Measurement setup for radiated emission test

- 1 Transmitter (EUT)
- 2 Wooden table

- 3 Measurement antenna
- 4 Test receiver
- 5 Turn table

7. Photographs of Test Setups

Test setup unwanted radiation 30 MHz - 1 GHz



Test setup unwanted radiation 30 MHz - 1 GHz (continued)



8. Equipment List

To facilitate reference to test equipment used for related tests, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory.

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	R 3271	05050023	Advantest
02	EMI Test Receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
03	Test Receiver	ESH 3	880112/032	Rohde & Schwarz
04	Test Receiver	ESHS 10	860043/016	Rohde & Schwarz
05	Test Receiver	ESV	881414/009	Rohde & Schwarz
06	Test Receiver	ESVP	881120/024	Rohde & Schwarz
07	Audio Analyzer	UPA	862954	Rohde & Schwarz
08	Power Meter	NRVS	836856/015	Rohde & Schwarz
09	Power Sensor	NRV-Z52	837901/030	Rohde & Schwarz
10	Power Sensor	NRV-Z4	863828/015	Rohde & Schwarz
11	Preamplifier	ESV-Z3	860907/004	Rohde & Schwarz
12	Preamplifier	R14601		Advantest
13	Preamplifier	ACX/080-3030	32640	CTT
14	Preamplifier	ACO/180-3530	32641	CTT
15	Signal generator	SMY 01	830694/001	Rohde & Schwarz
16	Signal Generator	HP 8673 D	2930A00966	Hewlett Packard
17	Waveform Generator	HP 33120 A	US34005375	Hewlett Packard
18	Attenuator 20 dB	4776-20	9503	Narda
19	Attenuator 10 dB	4776-10	9412	Narda
20	Pulse Limiter	ESH 3-Z2	1144	Rohde & Schwarz
21	Pulse Limiter	11947 A	3107A00566	Hewlett Packard
22	V-Network	ESH 3-Z5	862770/018	Rohde & Schwarz
23	V-Network	ESH 3-Z5	894785/005	Rohde & Schwarz
24	V-Network	ESH 3-Z5	830952/025	Rohde & Schwarz
25	V-Network	ESH 3-Z6	830722/010	Rohde & Schwarz
26	V-Network	NSLK 8127	8127152	Schwarzbeck
27	V-Network	NNLA 8119	8119148	Schwarzbeck
28	V-Network	SE 01	01	Senton
29	T-Network	ESH 3-Z4	890602/011	Rohde & Schwarz
30	T-Network	ESH 3-Z4	890602/012	Rohde & Schwarz
31	High Impedance Probe	TK 9416	01	Schwarzbeck
32	High Impedance Probe	TK 9416	02	Schwarzbeck
33	Current Probe	ESH 2-Z1	863366/18	Rohde & Schwarz
34	Current Probe	ESV-Z1	862553/3	Rohde & Schwarz

No.	Type	Model	Serial Number	Manufacturer
35	Absorbing Clamp	MDS 21	80911	Lüthi
36	Absorbing Clamp	MDS 21	79690	Lüthi
37	Loop Antenna	HFH2-Z2	882964/1	Rohde & Schwarz
38	Biconical Antenna	HK 116	842204/001	Rohde & Schwarz
39	Biconical Antenna	HK 116	836239/02	Rohde & Schwarz
40	Log. Periodic Antenna	HL 223	841516/023	Rohde & Schwarz
41	Log. Periodic Antenna	HL 223	834408/12	Rohde & Schwarz
42	Horn Antenna	3115	9508-4553	Emco
43	Horn Antenna	3160-03	9112-1003	Emco
44	Horn Antenna	3160-04	9112-1001	Emco
45	Horn Antenna	3160-05	9112-1001	Emco
46	Horn Antenna	3160-06	9112-1001	Emco
47	Horn Antenna	3160-07	9112-1008	Emco
48	Horn Antenna	3160-08	9112-1002	Emco
49	Horn Antenna	3160-09	9403-1025	Emco
50	Digital multimeter	199	463386	Keithley
51	DC Power Supply	NGSM 32/10	203	Rohde & Schwarz
52	DC Power Supply	NGB	2455	Rohde & Schwarz
53	DC Power Supply	NGA	386	Rohde & Schwarz
54	Temperature Test Chamber	HT4010	07065550	Heraeus
55	Cable	RG214	1309	Senton
56	Cable	200CM_001	1357	Rosenberger
57	Cable	150CM_001	1479	Rosenberger
58	Cable Set EG1	RG214	1189 - 1191	Senton
59	Cable Set Cabine 1	RG214		Senton
60	Cable Set Cabine 2	RG214		Senton
61	Cable Set Cabine 3	RG214		Senton
62	Shielded Room	No. 1	1451	Senton
63	Shielded Room	No. 2	1452	Senton
64	Semi-anechoic Chamber	No. 3	1453	Siemens
65	Shielded Room	No. 4	1454	Euroshield
66	Open Area Test Site	EG 1		Senton
67	Cable for Antenna Connector			Lucent Technologies
68	DC Block 0.01-18GHz		8037	Inmet Corp.
69	High pass filter			Lucent Technologies
69	DC Block	7006	A2798	Weinschel Corp.
70	Cable for Antenna Connector			Senton
71	Dummy load			Futaba Corporation

9. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency Allocations And Radio Treaty Matters, General Rules And Regulations) of the Federal Communication Commission (FCC)	October 1, 1999
<input type="checkbox"/>	CFR 47 Part 15 Subpart A	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	October 1, 1999
<input type="checkbox"/>	CFR 47 Part 15 Subpart B	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	October 1, 1999
<input type="checkbox"/>	CFR 47 Part 15 Subpart C	Code of Federal Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	October 1, 1999
<input checked="" type="checkbox"/>	CFR 47 Part 95 Subpart C/E	Code of Federal Regulations Part 95 (Personal Radio Services), Subpart C/E (Radio Control(R/C) Radio Service) of the Federal Communication Commission (FCC)	October 1, 1998
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
<input type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 2 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	February 24, 1996
<input checked="" type="checkbox"/>	TIA/EIA-603	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	February, 1993
<input checked="" type="checkbox"/>	TIA/EIA-603-1	Addendum to TIA/EIA-603	March 4, 1998

10. List of Measurements

CFR 47 Part 95 Subpart C / E CFR 47 Part 2 Subpart J			
Section(s):	Test	Page	Result
§95.639	Maximum transmitter power	22-23	Passed
§95.623	Frequency tolerance	24-25	Passed
§95.633	Emission bandwidth	26-28	Passed
§95.635	Unwanted radiation 30 MHz - 1 GHz	29-31	Passed

11. Test Results

MAXIMUM TRANSMITTER POWER - CONDUCTED**Section 95.639b3**

EUT: T3PM-FS 75 MHz
Serial number: 001
Applicant: Futaba Corporation
Mode: - transmitting continuously (TX mode)
- operating with $f = 75.710$ MHz
Date of test: 12 December 2003
Operator: Martin Steindl

Test conditions:

Temperature: +20°C
Nominal supply voltage: 9.6 V DC

Specifications:

Voltage range: ± 15 % of nominal supply voltage

Supply voltage (V)	Modulation Mode	Transmitter power (dBm)	Transmitter power (W)	Limit (W)
8.16	PPM	21.29	0.135	0.750
9.60	PPM	21.89	0.155	0.750
11.04	PPM	22.33	0.171	0.750
8.16	HRS	21.33	0.136	0.750
9.60	HRS	21.93	0.156	0.750
11.04	HRS	22.36	0.172	0.750

Result: Test passed

MAXIMUM TRANSMITTER POWER - RADIATED SECTION 95.639B3

EUT: T3PM-FS 75 MHz
Serial number: 001
Applicant: Futaba Corporation
Mode: - transmitting continuously (TX mode)
- with modulation
- with supply voltage 9.6 V DC
- antenna extended to maximum
- operating with $f = 75.710$ MHz
Date of test: 15 December 2003
Operator: Martin Steindl

Test conditions:

Temperature: +20°C
Voltage supply: Fully charged batteries (12.0 V DC nominal)

Note 1:

Limit of 28.8 dBm corresponds to 0.75 W.

Note 2:

For calculation of correction factors see tables "Test Site Calibration Data Sheets" (supplied as additional information summarized on page **!Syntaxfehler, !**).

Position of EUT	Antenna polarization	Frequency (MHz)	Reading value (dBm)	Correction factor (dB)	E(l)RP (dBm)	Limit (dBm)	Margin to limit (dB)
vertical, antenna vertical	vertical	75.710	-9.25	26.34	17.09	28.80	-11.71
on right side, antenna horizontal	horizontal	75.710	-9.73	26.13	16.40	28.80	-12.40
on rear side, antenna horizontal	horizontal	75.710	-10.25	26.13	15.88	28.80	-12.92

Result: Test passed

FREQUENCY STABILITY VS. TEMPERATURE

Section 95.623c

EUT: T3PM-FS 75 MHz
Serial number: 001
Applicant: Futaba Corporation
Mode: - transmitting continuously (TX mode)
- without modulation
- operating with $f = 75.710$ MHz
Date of test: December 12, 2003
Operator: Martin Steindl


Test conditions:

Temperature: see table below
Supply voltage: 9.6 V DC

Specifications:

Frequency tolerance: ± 0.002 % of nominal carrier frequency
Temperature range: -30 to +50°C

Temperature (°C)	Nominal Frequency (MHz)	Frequency Measured (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (%)	Limit (%)
-30	75,710000	75,709090	-910	-0,001202	0,002
-20	75,710000	75,709620	-380	-0,000502	0,002
-10	75,710000	75,709950	-50	-0,000066	0,002
0	75,710000	75,710100	100	0,000132	0,002
10	75,710000	75,710160	160	0,000211	0,002
20	75,710000	75,710130	130	0,000172	0,002
30	75,710000	75,710050	50	0,000066	0,002
40	75,710000	75,709980	-20	-0,000026	0,002
50	75,710000	75,709970	-30	-0,000040	0,002

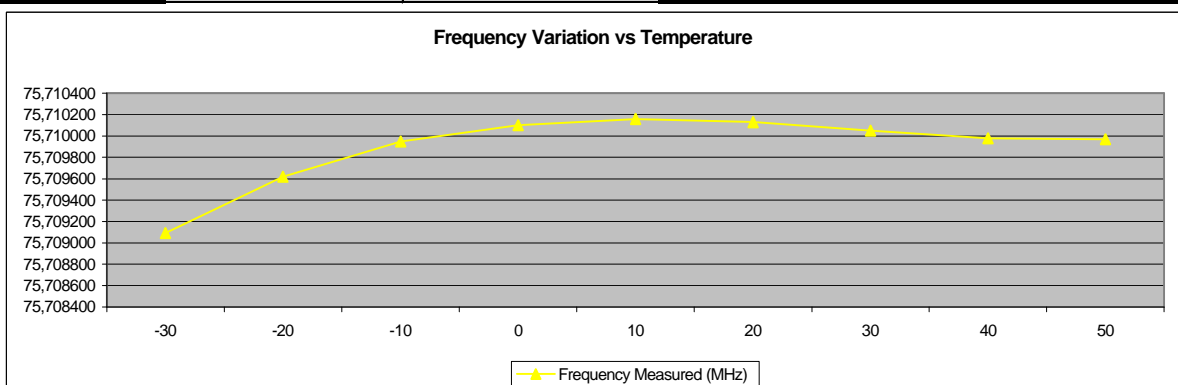

Result: Test passed

FCC-ID: AZPT3PM-FSS-75

Test Report No. 55503-30810

FREQUENCY STABILITY VS. SUPPLY VOLTAGE

Section 95.623c

EUT: T3PM-FS 75 MHz
 Serial number: 001
 Applicant: Futaba Corporation
 Mode: - transmitting continuously (TX mode)
 - without modulation
 - operating with $f = 75.710$ MHz
 Date of test: December 12, 2003
 Operator: Martin Steindl


Test conditions:

Temperature: +20°C
 Nominal supply voltage: 9.6 V DC

Specifications:

Frequency tolerance: ± 0.002 % of nominal carrier frequency
 Voltage range: ± 15 % of nominal supply voltage
 Battery end point: 5.5 V DC

Supply Voltage (V)	Nominal Frequency (MHz)	Frequency Measured (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (%)	Limit (%)
13,8	75,710000	75,710050	50	0,000066	0,002
13,0	75,710000	75,710050	50	0,000066	0,002
12,5	75,710000	75,710050	50	0,000066	0,002
12,0	75,710000	75,710050	50	0,000066	0,002
11,5	75,710000	75,710050	50	0,000066	0,002
11,0	75,710000	75,710060	60	0,000079	0,002
10,2	75,710000	75,710060	60	0,000079	0,002
5,5	75,710000	75,710000	0	0,000000	0,002

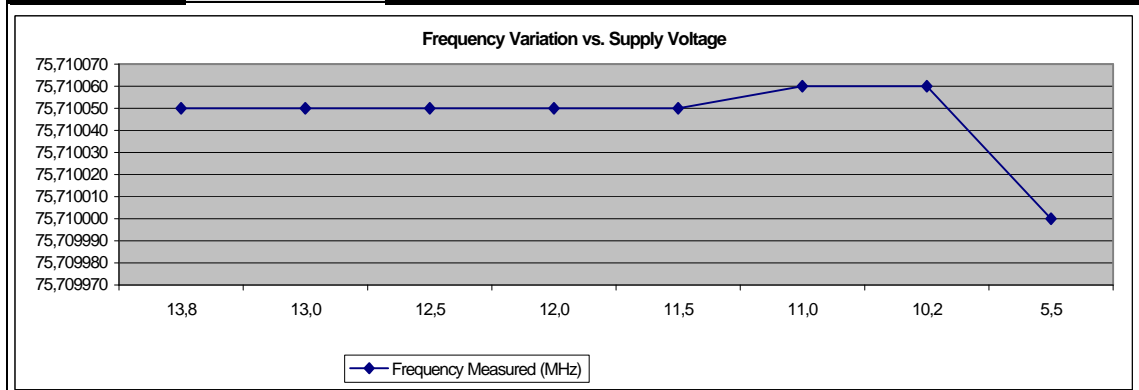

Note: EUT is equipped with a low batt warning indicator - starts at 8.65 V !!

Result: Test passed

EMISSION BANDWIDTH**Section 95.633b**

EUT: T3PM-FS 75 MHz
 Serial number: 001
 Applicant: Futaba Corporation
 Mode: - transmitting continuously (TX mode)
 - with modulation
 - operating with $f = 75.710$ MHz
 Date of test: 12 December 2003
 Operator: Martin Steindl

Test conditions:

Temperature: +20°C
 Supply voltage: 9.6 V DC

Specifications:

Authorized bandwidth: 8 kHz

Note:

Emission bandwidth was measured as occupied bandwidth. For details see plot on following page.

Test procedure	Measured occupied bandwidth (kHz)	Limit (kHz)
TIA/EI-603	2.15	8.00

Result: Test passed

Calculation	$B_n = 2BK$
B = Modulation rate	$B = 1.25$ kHz
K = Overall numerical factor	$K = 1$
	$B_n = 2 \cdot (1.25 \text{ kHz}) \cdot 1 = 2.5$ kHz

Type of Emission = 2K50F1D

EMISSION BANDWIDTH (CONTINUED)


Section 95.633b

Specifications:

Modulation mode: PPM
Authorized bandwidth: 8 kHz
Test procedure: TIA/EIA-603 (99% of total power with RBW as close to, but not less than 1% of the 99% power bandwidth)

Note:

Tested on antenna connector via dummy load

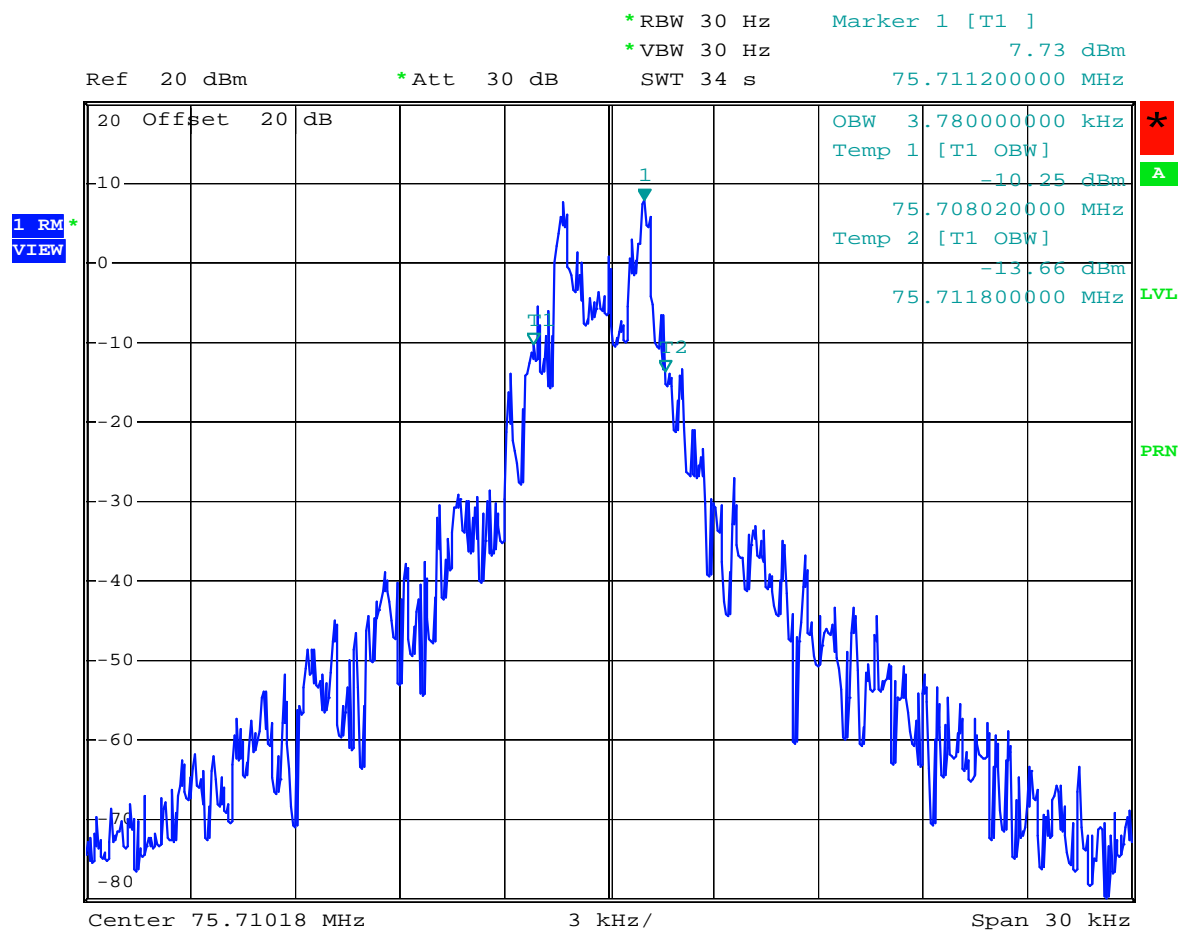

Comment A: Futaba 30803: Occupied Bandwidth
Date: 12.DEC.2003 15:56:07

EMISSION BANDWIDTH (CONTINUED)


Section 95.633b

Specifications:

Modulation mode: HRS
Authorized bandwidth: 8 kHz
Test procedure: TIA/EIA-603 (99% of total power with RBW as close to, but not less than 1% of the 99% power bandwidth)

Note:

Tested on antenna connector via dummy load

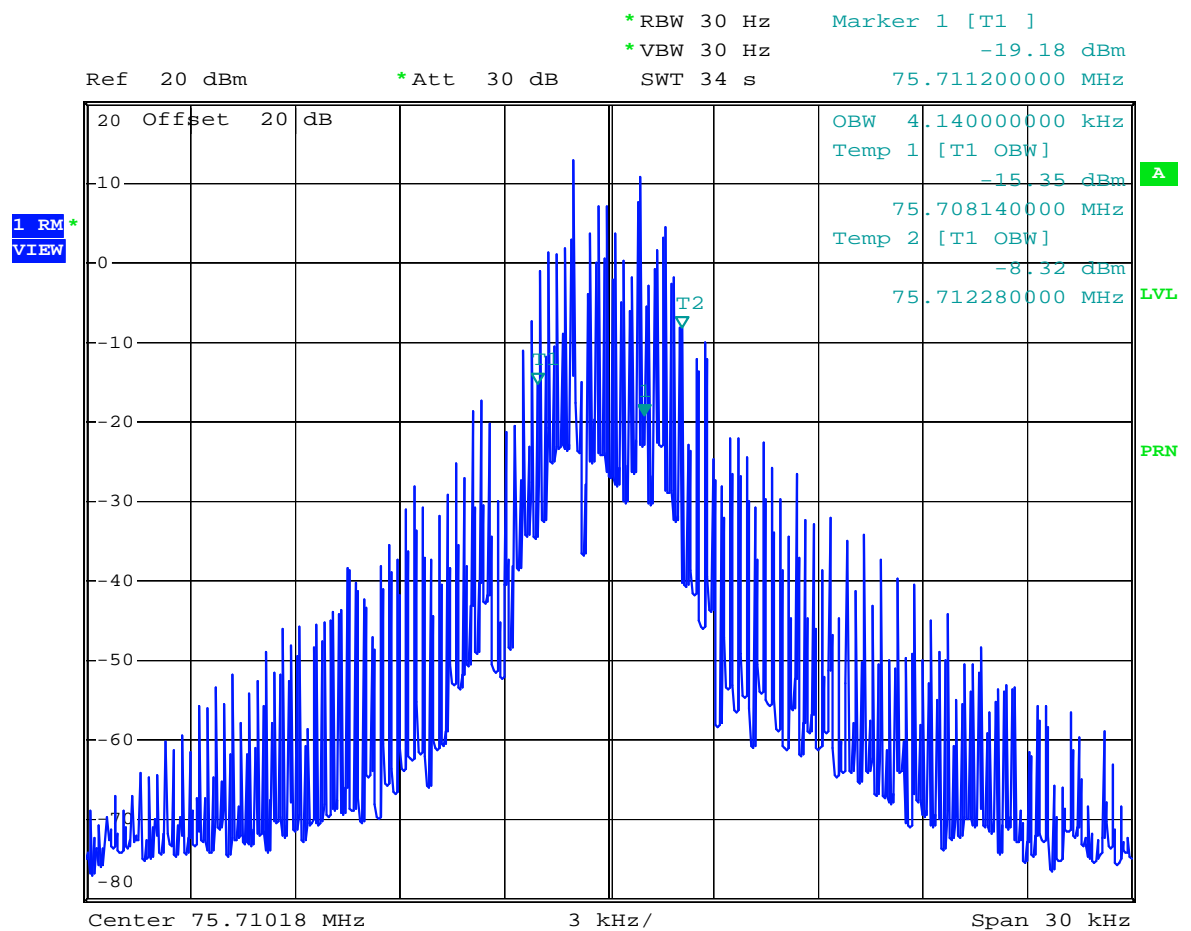

Comment A: Futaba 30803: Occupied Bandwidth
Date: 12.DEC.2003 15:59:03

UNWANTED RADIATION 30 MHz - 1 GHz

Section 95.635

EUT: T3PM-FS 75 MHz
Serial number: 001
Applicant: Futaba Corporation
Mode:
- transmitting continuously (TX mode)
- with modulation
- with supply voltage 9.6 V DC
- antenna extended to maximum
- operating with $f = 75.710$ MHz
- EUT in vertical position, antenna to the top
Date of test: December 12, 2003
Operator: Martin Steindl

Specifications:

Test-distance: 3 meters
Limit: $10 \log(P_{\text{carrier}}) - 56$ dB
with P_{carrier} as the maximum transmitter power limit in W for the unmodulated carrier according to §95.639

Maximum transmitter power (conducted) :	23.6dBm	0.229 Watt
Maximum carrier power (radiated) :	15.07 dBm	0.032 Watt
Calculated limit (referring to TP) :	-26.0 dBm	

Frequency (MHz)	Antenna polarization	Reading value (dBm)	Correction factor (dB)	ERP (dBm)	Limit (dBm)	Margin to limit (dB)
113.400	vertical	-67.0	25.3	-41.7	-26.0	-15.68
151.400	vertical	-63.5	18.9	-44.6	-26.0	-18.60
226.800	vertical	-75.6	20.7	-54.9	-26.0	-28.89
378.800	horizontal	-88.9	29.3	-59.6	-26.0	-33.56
454.000	vertical	-83.2	28.3	-55.0	-26.0	-28.95
530.000	vertical	-87.0	29.6	-57.4	-26.0	-31.40
605.600	vertical	-83.7	32.4	-51.3	-26.0	-25.26

Note: For calculation of correction factors see tables "Test Site Calibration Data Sheets" (supplied as additional information summarized on page **!Syntaxfehler!**!).

Result: Test passed

UNWANTED RADIATION 30 MHz - 1 GHz

Section 95.635

EUT: T3PM-FS 75 MHz
Serial number: 001
Applicant: Futaba Corporation
Mode:
- transmitting continuously (TX mode)
- with modulation
- with supply voltage 9.6 V DC
- antenna extended to maximum
- operating with $f = 75.710$ MHz
- EUT in horizontal position with right side on table
Date of test: December 12, 2003
Operator: Martin Steindl

Specifications:

Test-distance: 3 meters
Limit: $10 \log(P_{\text{carrier}}) - 56$ dB
with P_{carrier} as the maximum transmitter power limit in W for the unmodulated carrier according to §95.639

Maximum transmitter power (conducted) :	23.6dBm	0.229 Watt
Maximum carrier power (radiated) :	15.07 dBm	0.032 Watt
Calculated limit (referring to TP) :	-26.0 dBm	

Frequency (MHz)	Antenna polarization	Reading value (dBm)	Correction factor (dB)	ERP (dBm)	Limit (dBm)	Margin to limit (dB)
113.400	horizontal	-69.2	26.2	-43.0	-26.0	-17.01
151.400	horizontal	-64.3	20.3	-44.0	-26.0	-18.01
226.800	horizontal	-72.5	21.6	-50.9	-26.0	-24.87
454.000	horizontal	-84.7	29.8	-54.8	-26.0	-28.84
605.600	horizontal	-77.9	31.3	-46.6	-26.0	-20.58
681.600	horizontal	-84.7	31.8	-52.9	-26.0	-26.88
757.200	horizontal	-88.1	33.8	-54.4	-26.0	-28.38

Note: For calculation of correction factors see tables "Test Site Calibration Data Sheets" (supplied as additional information summarized on page **!Syntaxfehler!**!).

Result: Test passed

UNWANTED RADIATION 30 MHz - 1 GHz

Section 95.635

EUT: T3PM-FS 75 MHz
 Serial number: 001
 Applicant: Futaba Corporation

Mode:
 - transmitting continuously (TX mode)
 - with modulation
 - with supply voltage 9.6 V DC
 - antenna extended to maximum
 - operating with $f = 75.710$ MHz
 - EUT in horizontal position with rear side on table

Date of test: December 12, 2003
 Operator: Martin Steindl

Specifications:

Test-distance: 3 meters
 Limit: $10 \log(P_{\text{carrier}}) - 56$ dB
 with P_{carrier} as the maximum transmitter power limit in W for the unmodulated carrier according to §95.639

Maximum transmitter power (conducted) :	23.6dBm	0.229 Watt
Maximum carrier power (radiated) :	15.07 dBm	0.032 Watt
Calculated limit (referring to TP) :	-26.0 dBm	

Frequency (MHz)	Antenna polarization	Reading value (dBm)	Correction factor (dB)	ERP (dBm)	Limit (dBm)	Margin to limit (dB)
113.400	horizontal	-69.1	26.3	-42.8	-26.0	-16.75
151.400	horizontal	-65.2	20.3	-45.0	-26.0	-18.98
454.000	horizontal	-83.1	29.8	-53.2	-26.0	-27.24
530.000	horizontal	-84.3	29.8	-54.5	-26.0	-28.50
605.600	horizontal	-78.5	31.3	-47.2	-26.0	-21.20
681.200	horizontal	-81.3	31.8	-49.5	-26.0	-23.48
757.200	horizontal	-86.8	33.8	-53.0	-26.0	-27.04

Note: For calculation of correction factors see tables "Test Site Calibration Data Sheets" (supplied as additional information summarized on page **!Syntaxfehler!**!).

Result: Test passed


12. Additional Information supplementary to the Test Report

Item	Description	No. of Pages
1	Additional Results	12
2	Test Site Calibration Data Sheets	4

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Horizontal Polarization</p> <p>Date of test: Operator: 12/11/2003 M. Steindl</p> <p>Test performed: File name: automatically default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT in vertical position (P1) -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

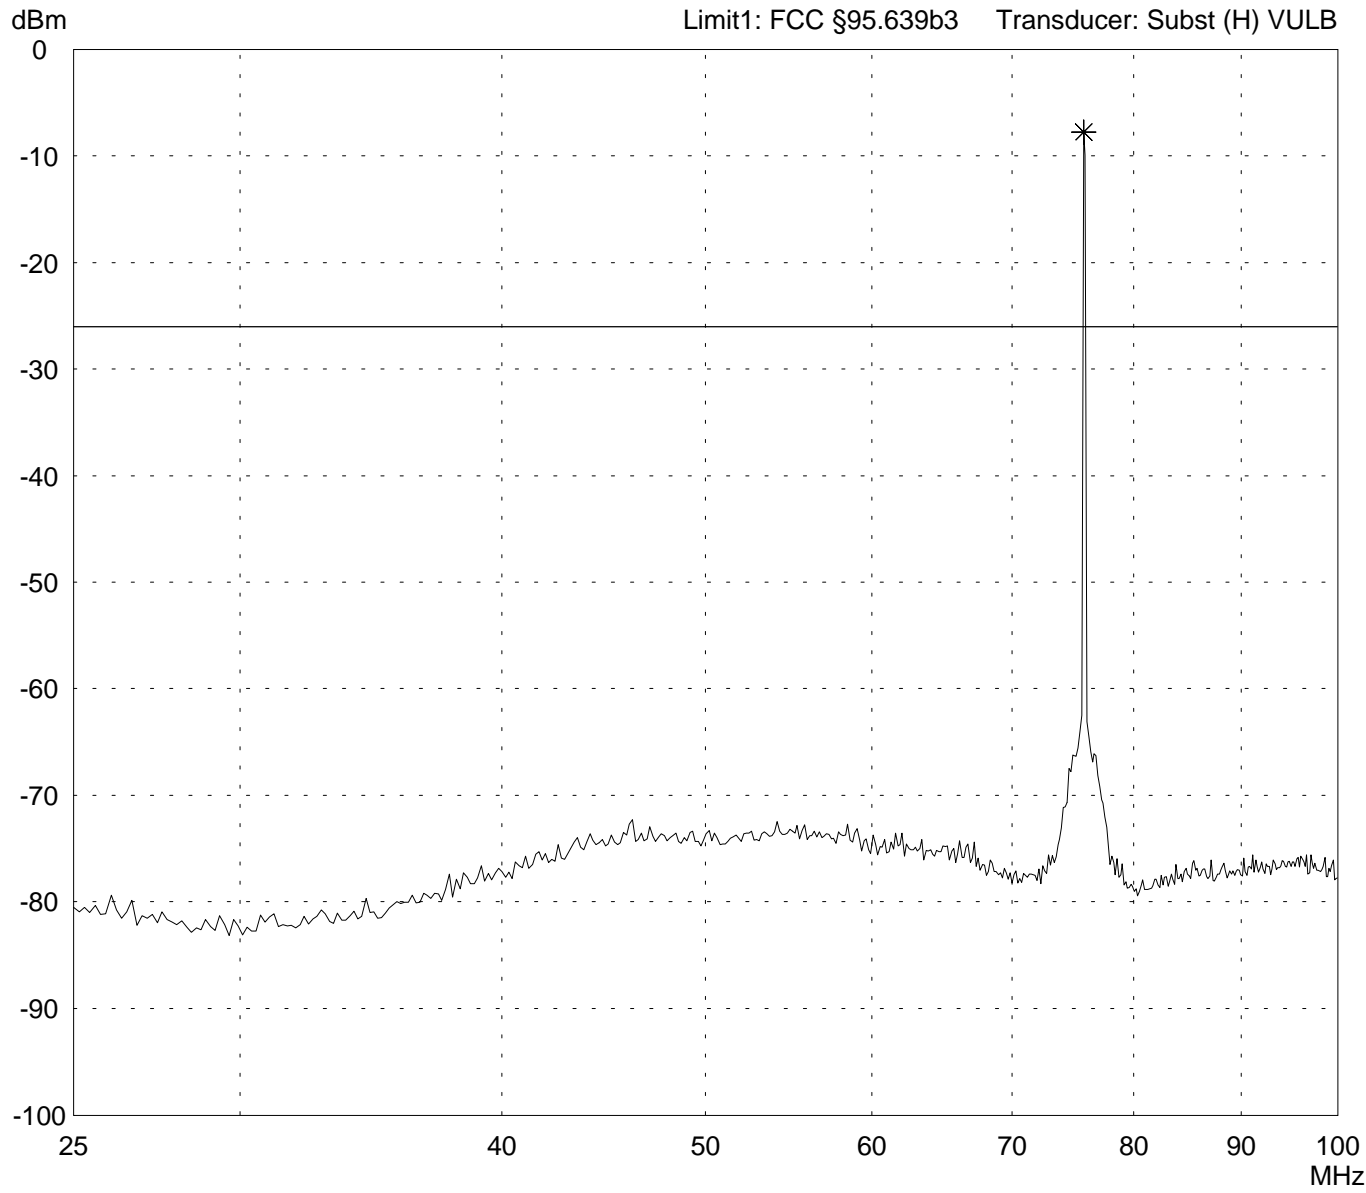


<p>Result: Limit kept (Carrier excluded)</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
---	---

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Vertical Polarization</p> <p>Date of test: 12/11/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT in vertical position (P1) -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

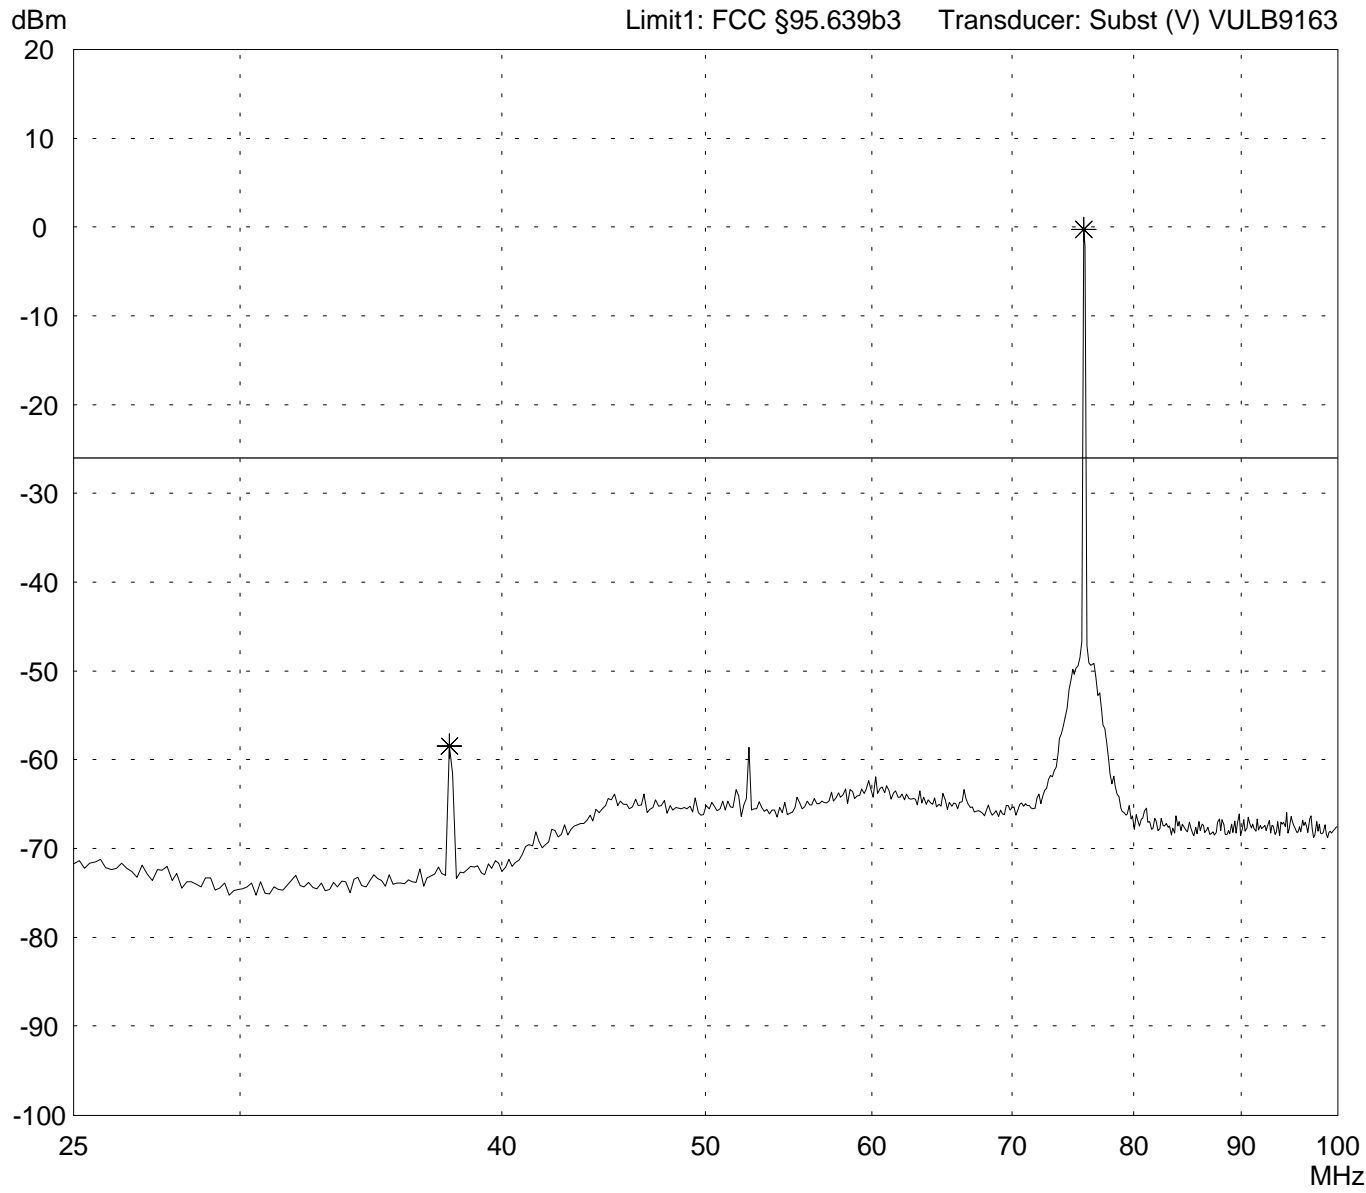


<p>Result: Limit kept (Carrier excluded)</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
---	---

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Horizontal Polarization</p> <p>Date of test: 12/12/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on right side (P2) -
---	---

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

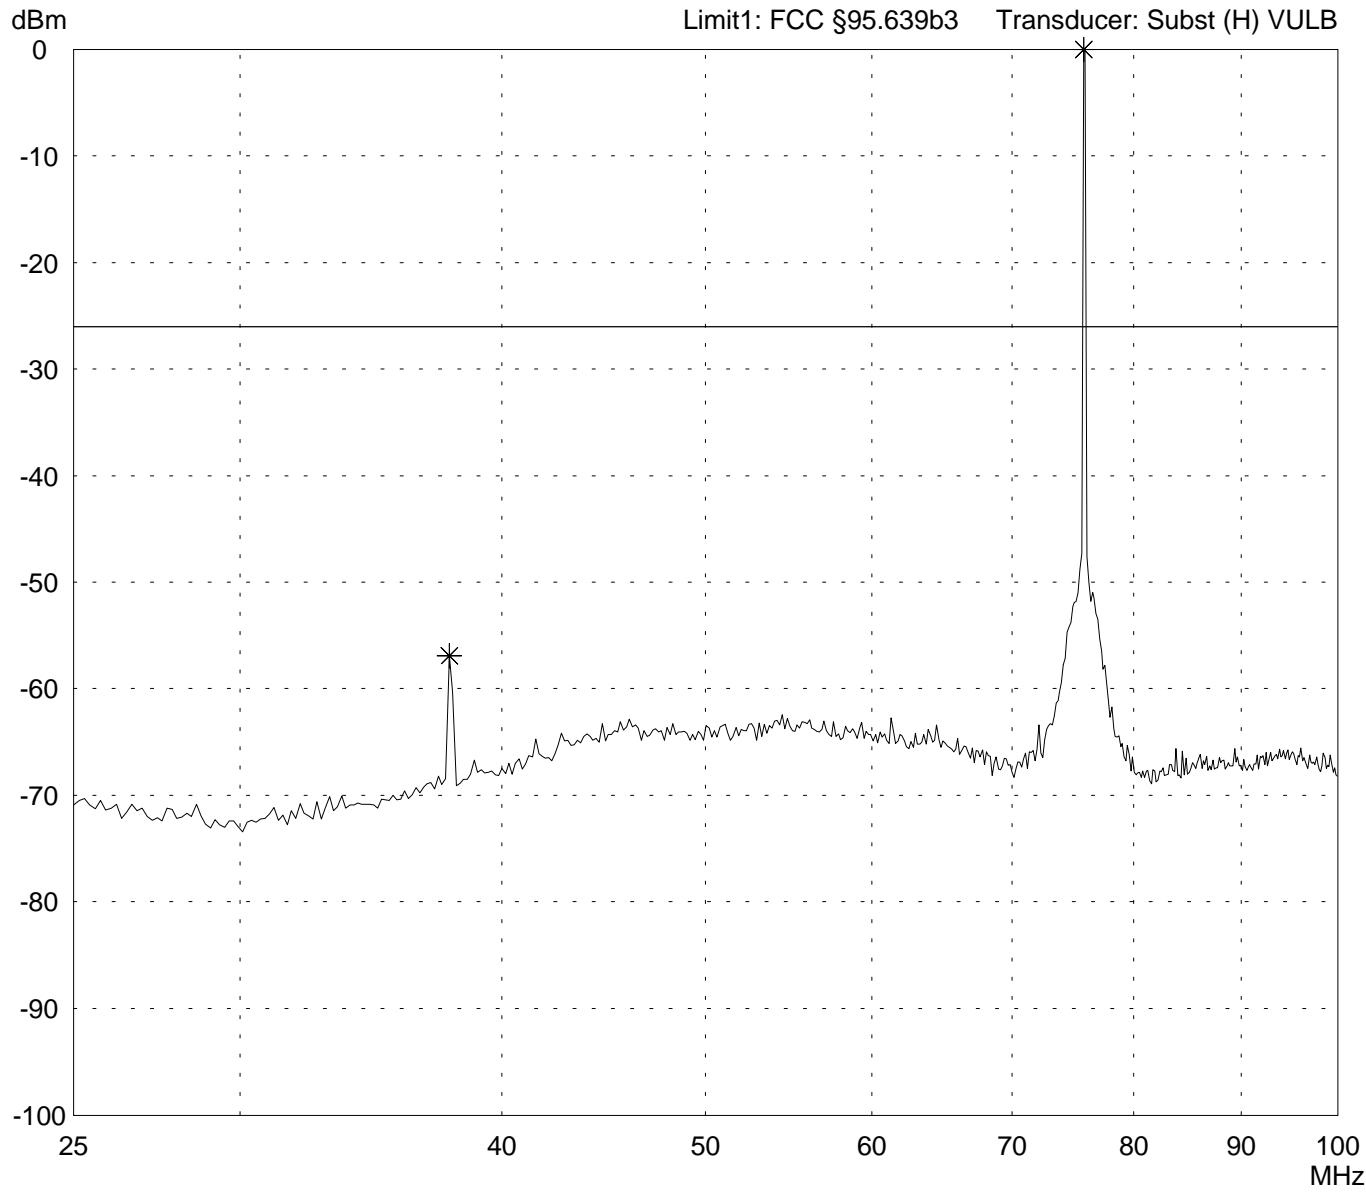


<p>Result: Limit kept (Carrier excluded)</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
---	---

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Vertical Polarization</p> <p>Date of test: Operator: 12/12/2003 M. Steindl</p> <p>Test performed: File name: automatically default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on right side (P2) -
---	---

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

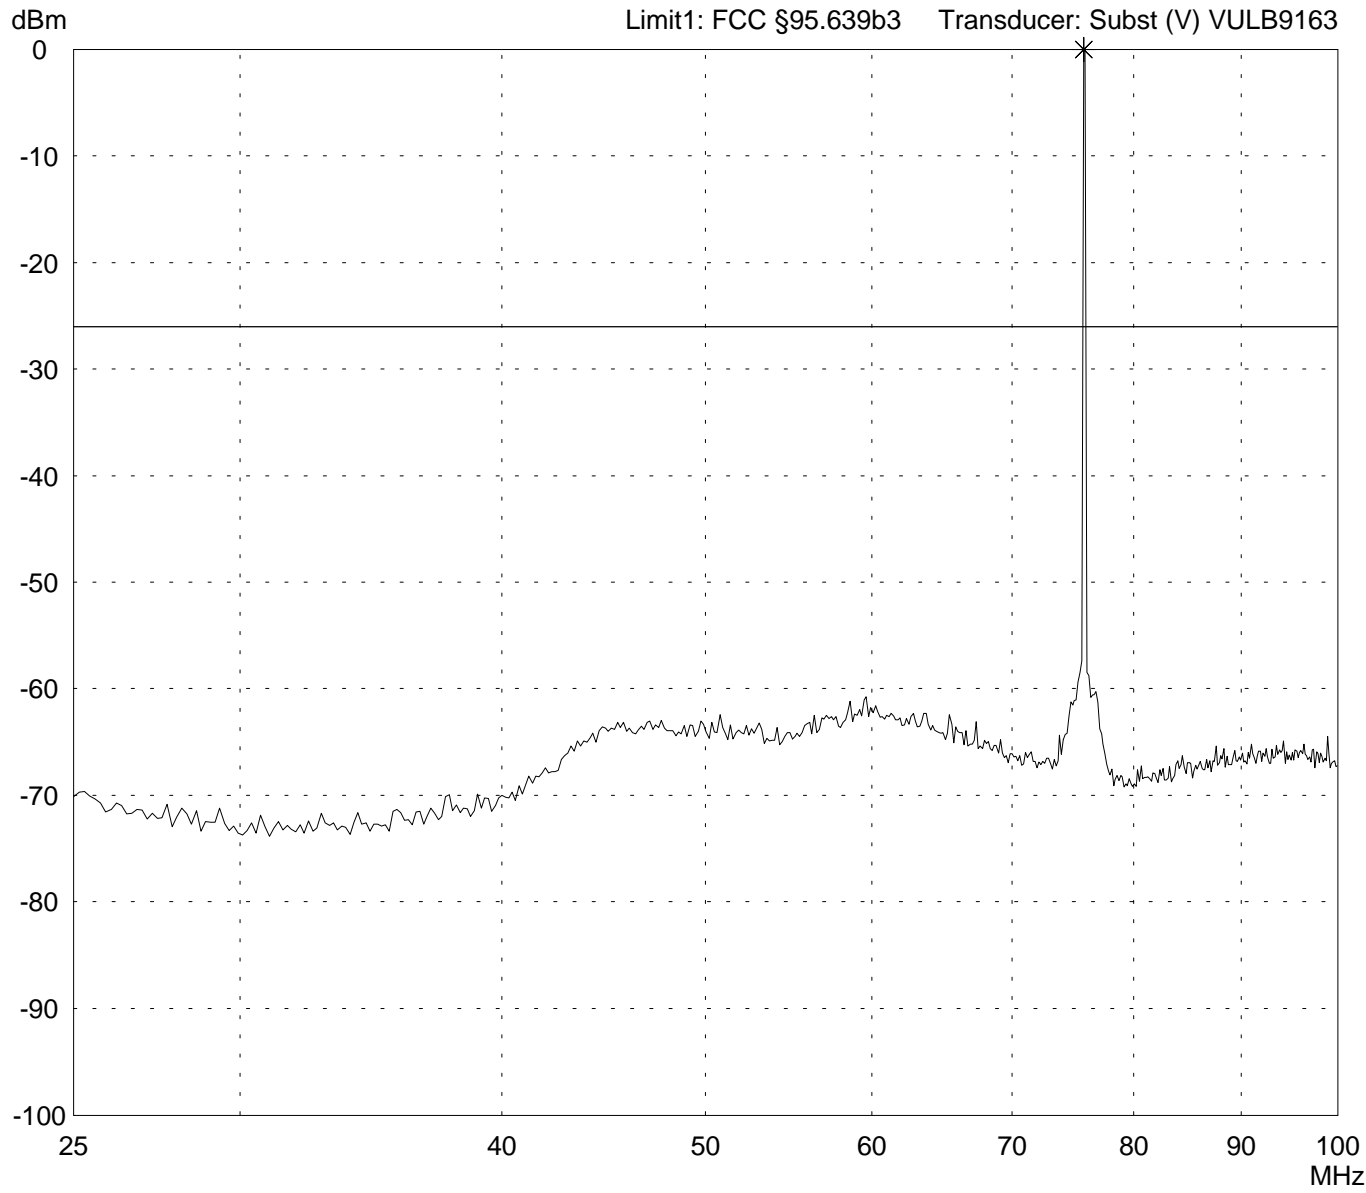


<p>Result: Limit kept (Carrier excluded)</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
---	---

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Horizontal Polarization</p> <p>Date of test: 12/12/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on rear side (P3) -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

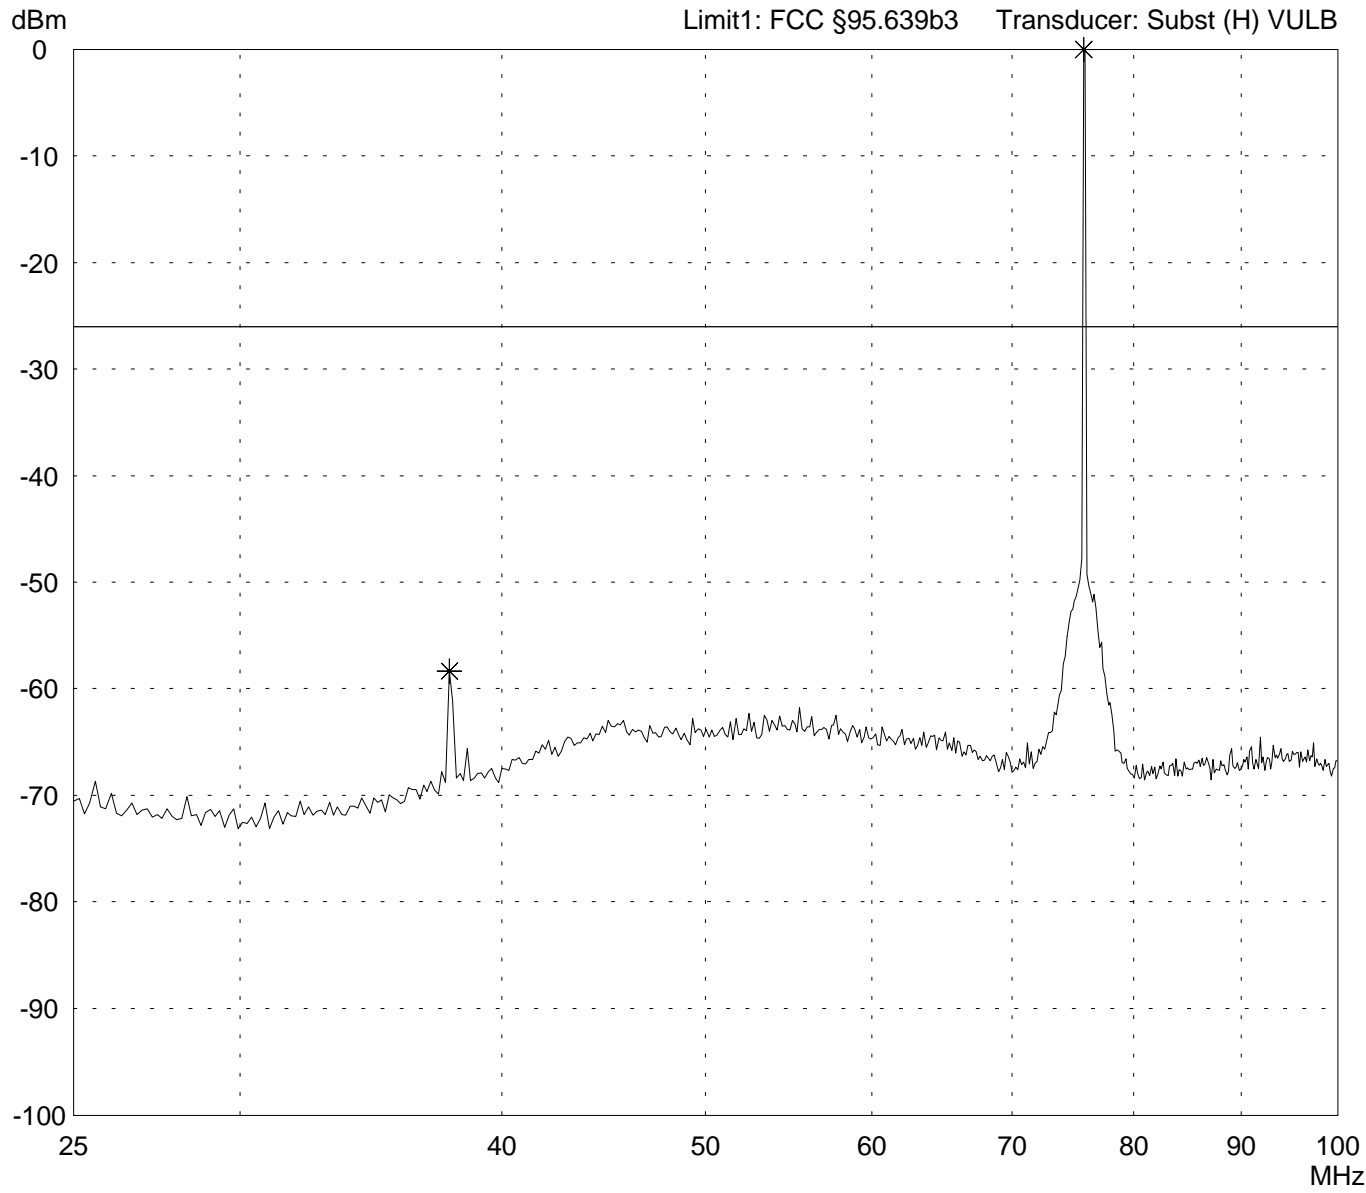


<p>Result: Limit kept (Carrier excluded)</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
---	---

Radiated Power Test 25 MHz - 100 MHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Vertical Polarization</p> <p>Date of test: 12/12/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on rear side (P3) -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

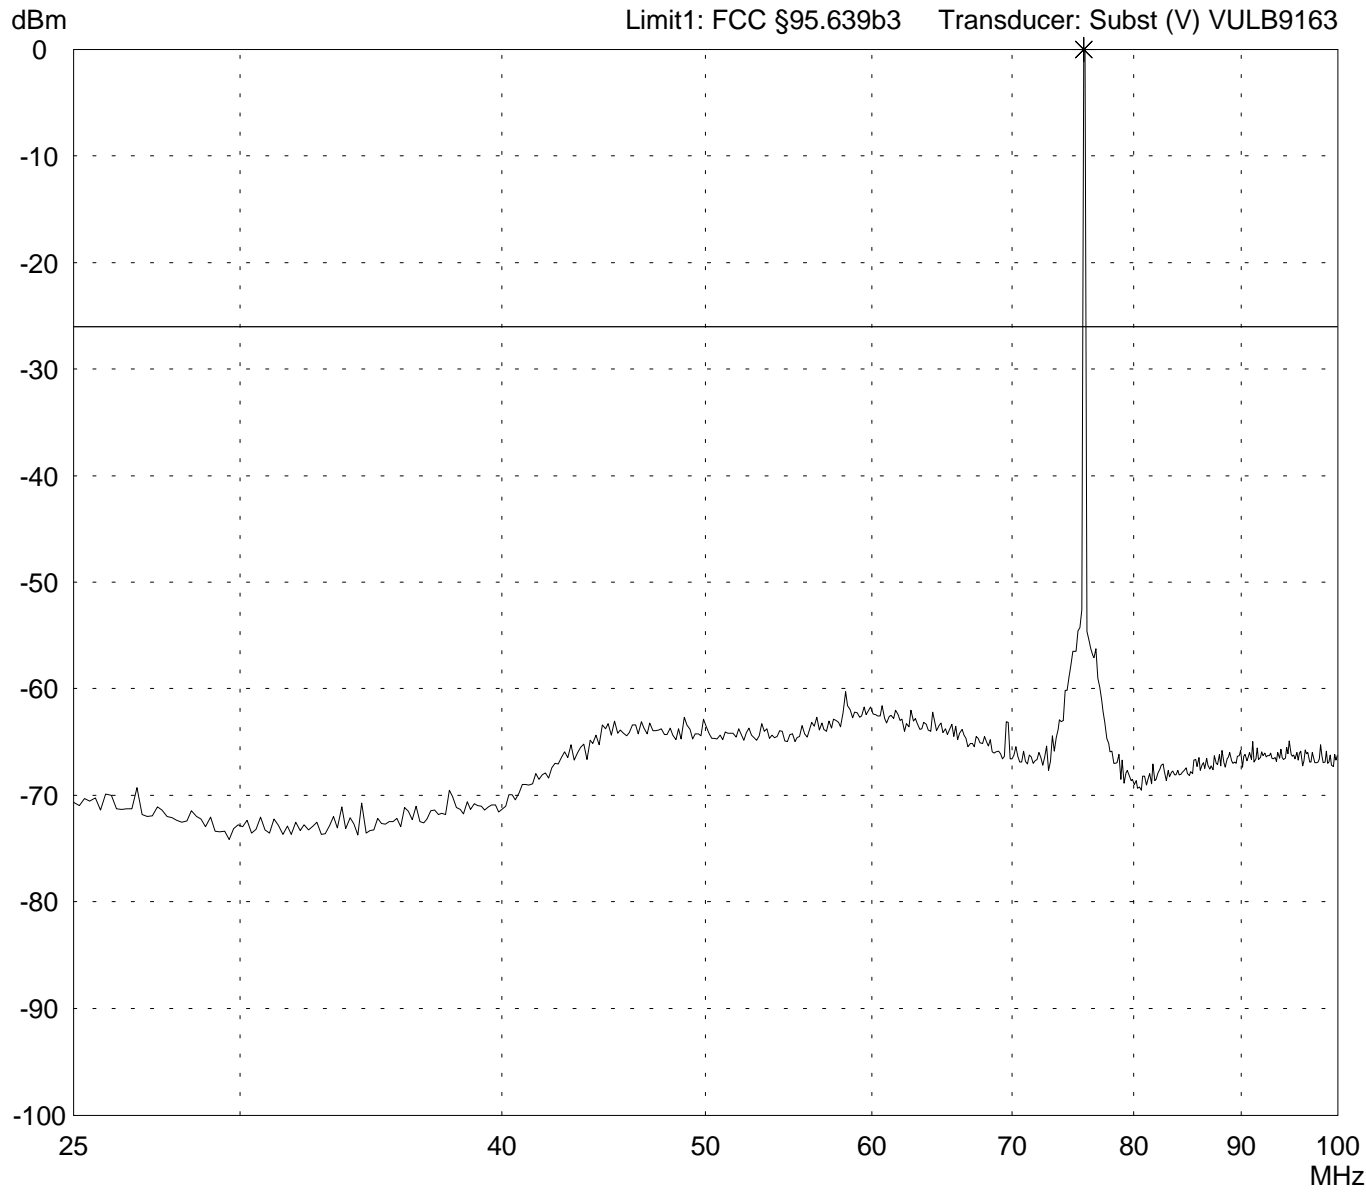


<p>Result: Limit kept (Carrier excluded)</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
---	---

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Horizontal Polarization</p> <p>Date of test: 12/11/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT in vertical position (P1) - Note: With WHKS100-10SS high pass filter -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

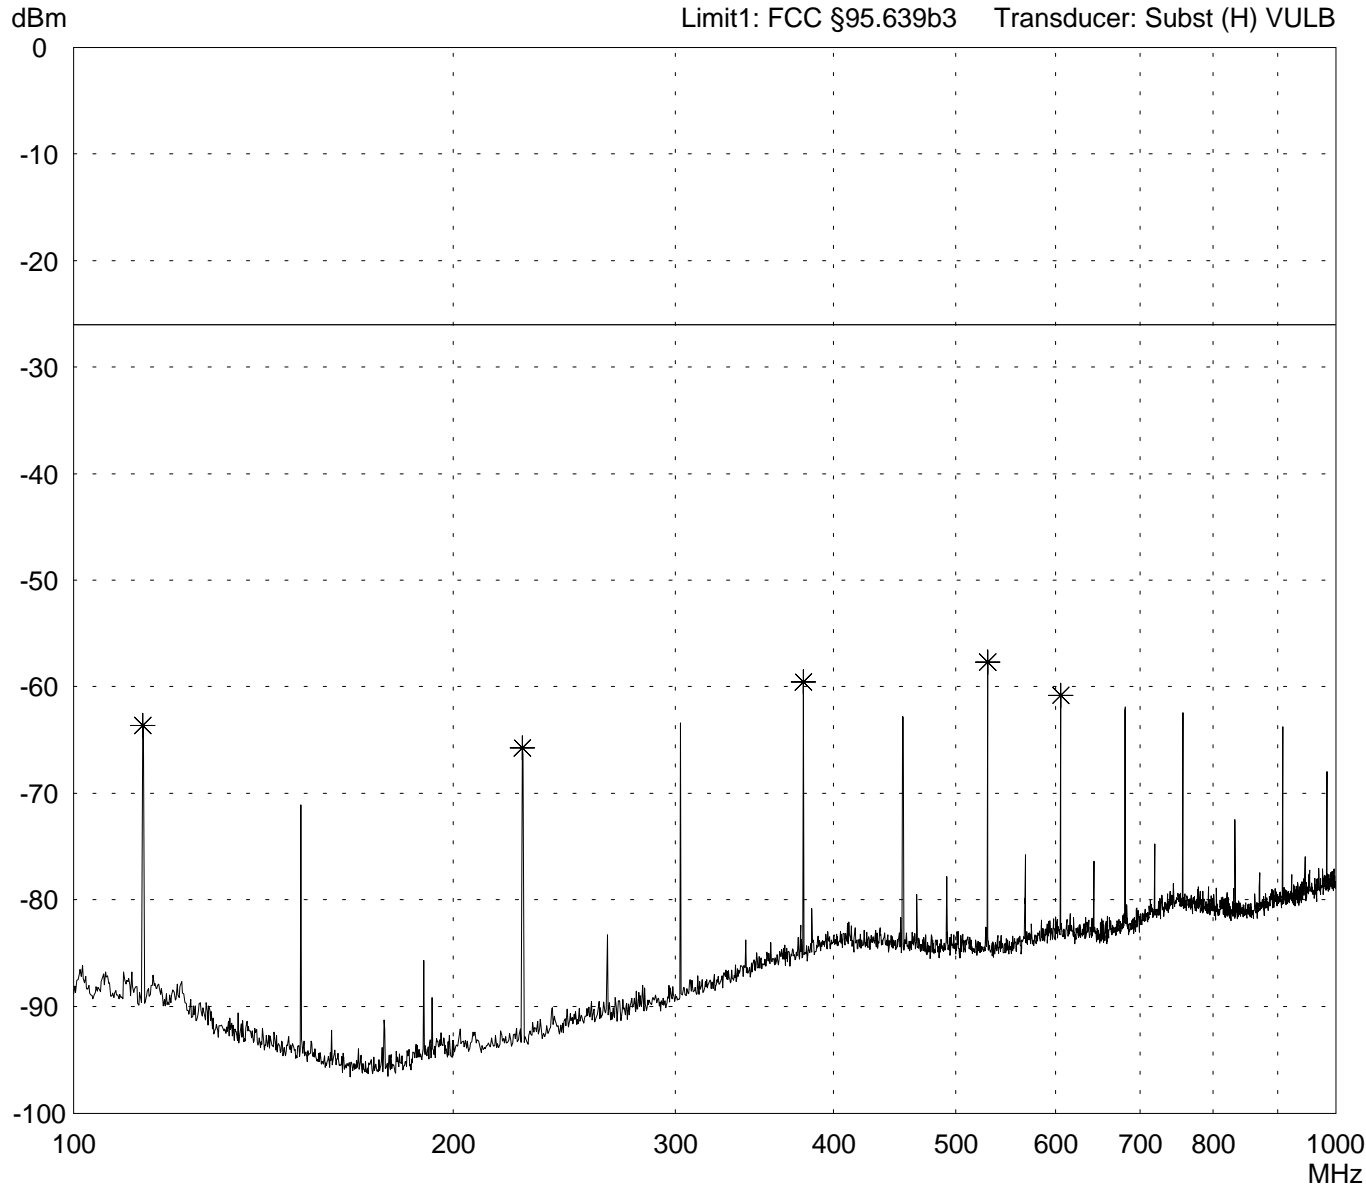


<p>Result: Limit kept</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
--------------------------------------	---

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Vertical Polarization</p> <p>Date of test: 12/11/2003</p> <p>Operator: M. Steindl</p> <p>Test performed: automatically</p> <p>File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT in vertical position (P1) - Note: With WHKS100-10SS high pass filter -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

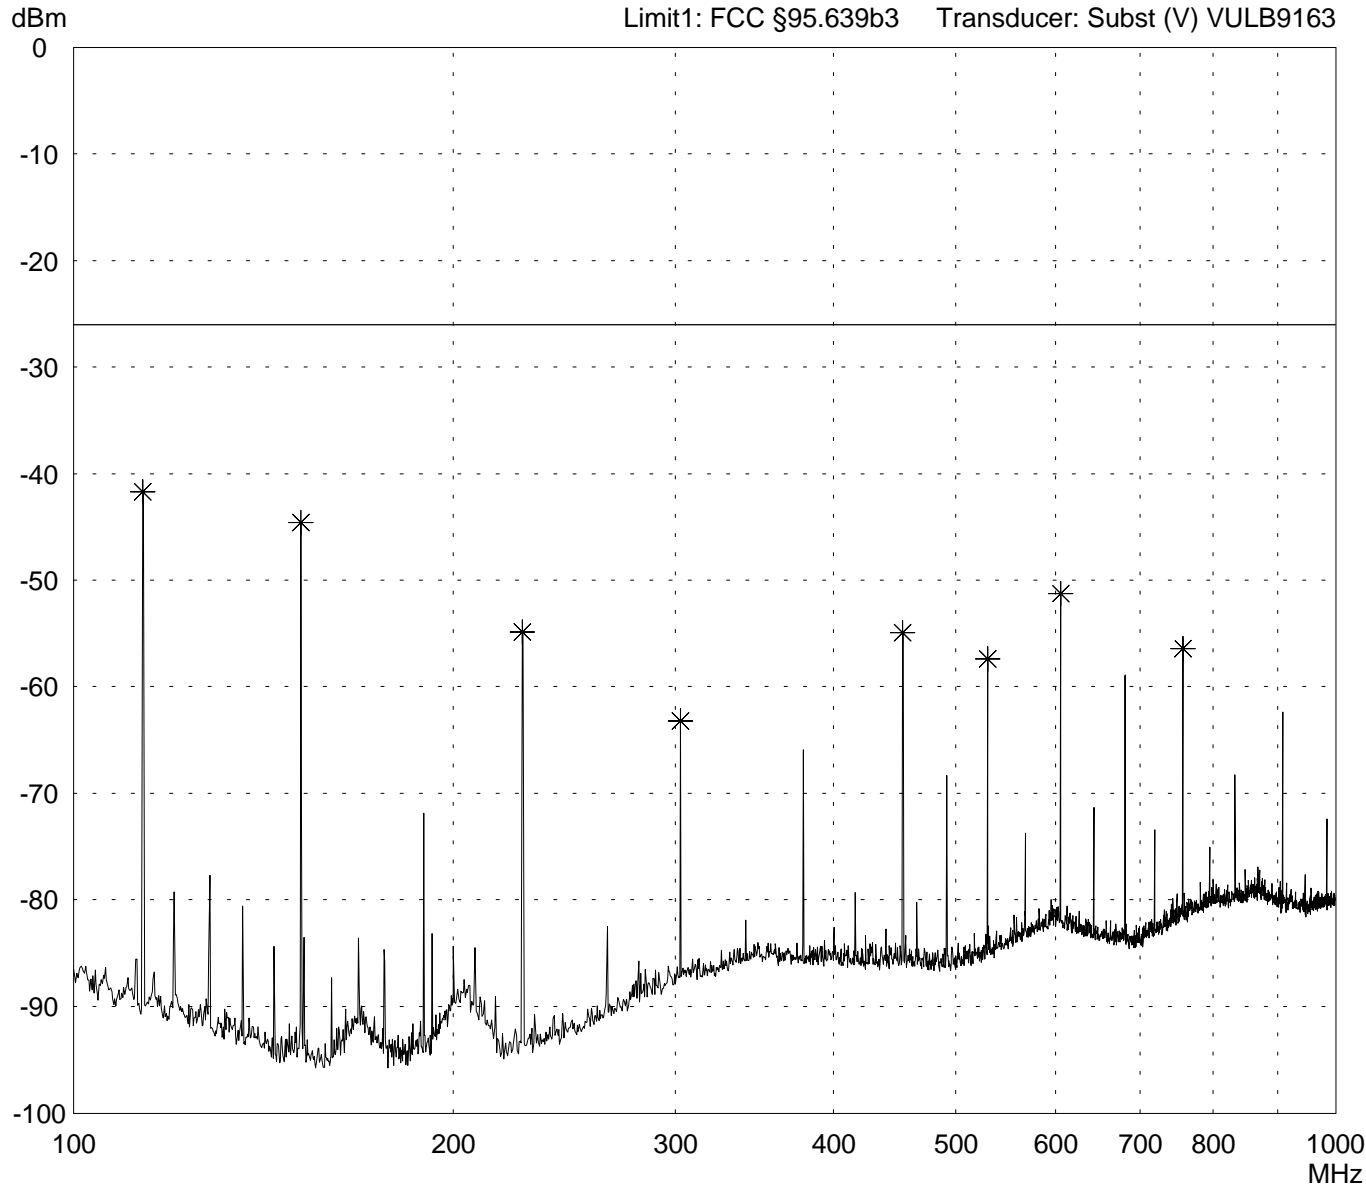


<p>Result: Limit kept</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
--------------------------------------	---

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Horizontal Polarization</p> <p>Date of test: 12/12/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on right side (P2) - Note: With WHKS100-10SS high pass filter -
---	---

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

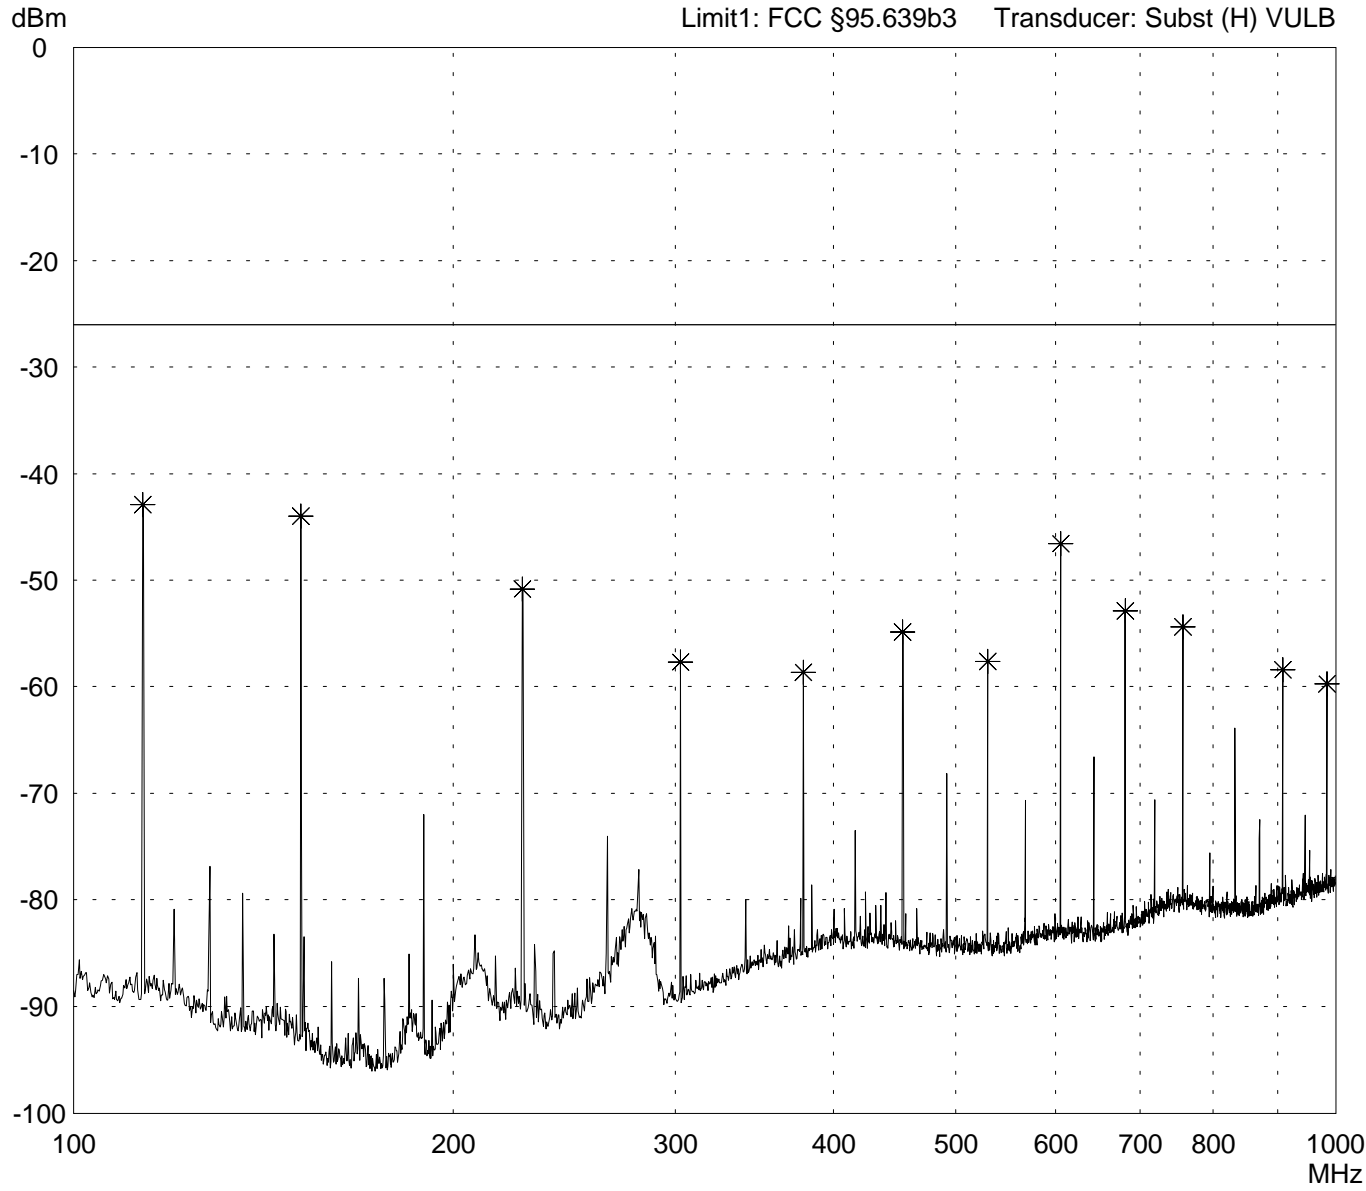


<p>Result: Limit kept</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
--------------------------------------	---

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Vertical Polarization</p> <p>Date of test: 12/12/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on right side (P2) - Note: With WHKS100-10SS high pass filter -
---	---

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

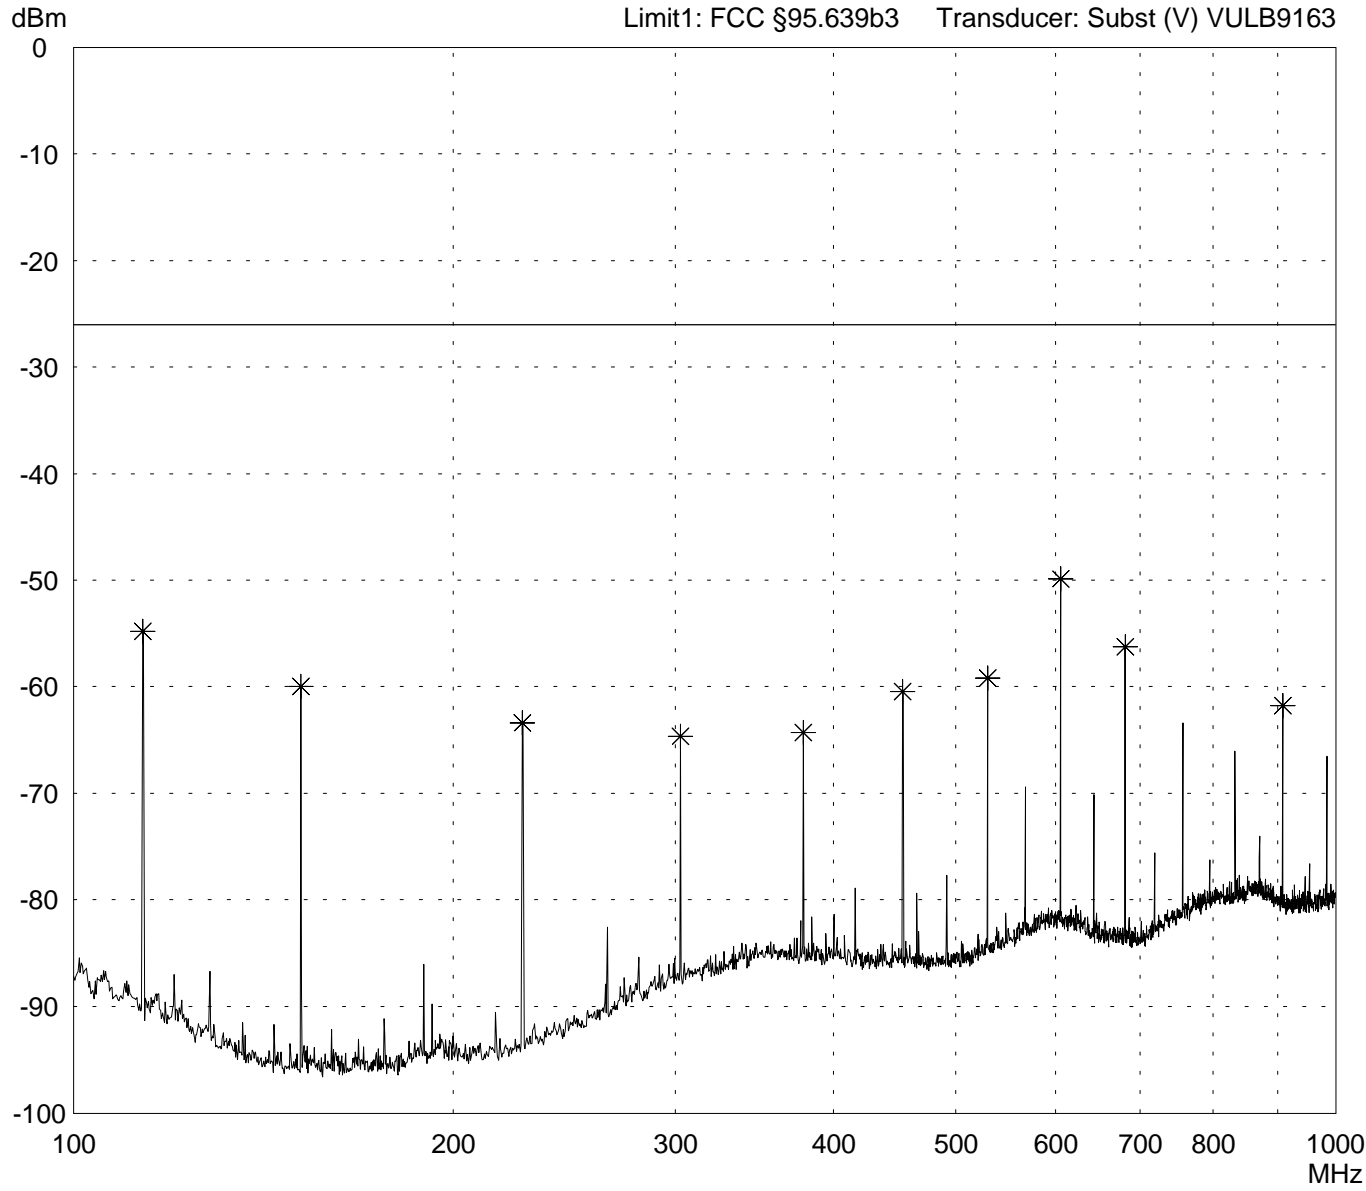


<p>Result: Limit kept</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
--------------------------------------	---

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Horizontal Polarization</p> <p>Date of test: 12/12/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on rear side (P3) - Note: With WHKS100-10SS high pass filter -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

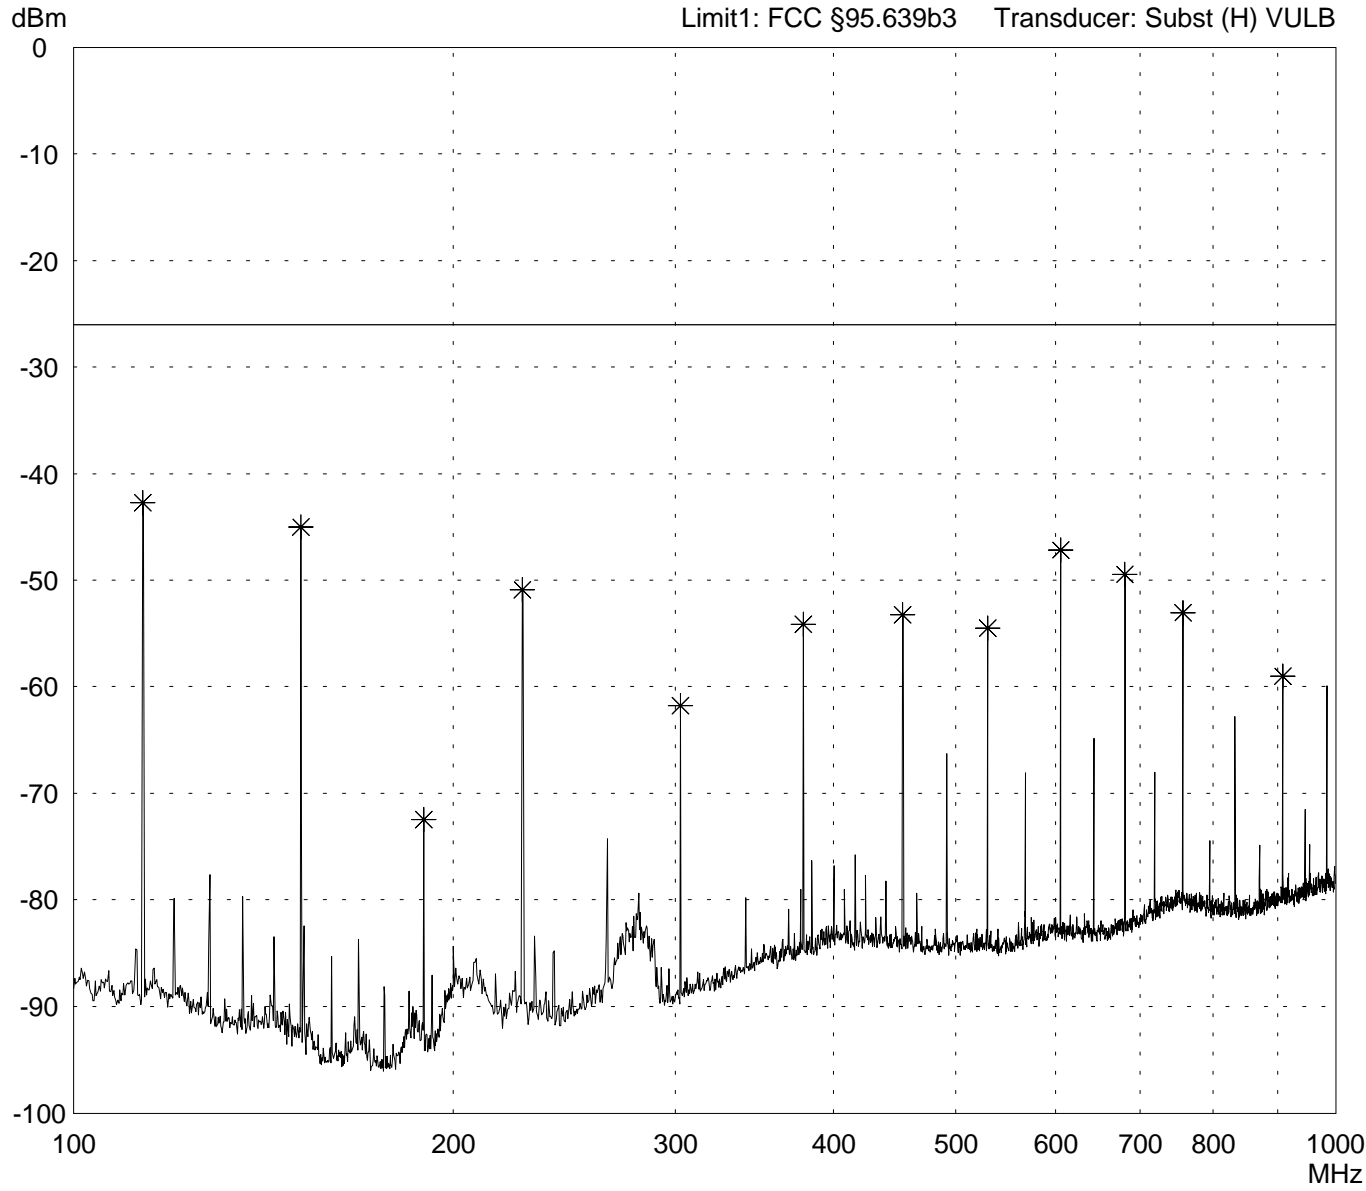


<p>Result: Limit kept</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
--------------------------------------	---

Radiated Power Test 100 MHz - 1 GHz acc. to FCC Part 95 Subpart C/E

<p>Model: T3FM-FS</p> <p>Serial no.: test sample</p> <p>Applicant: Futaba Corporation</p> <p>Test site: Fully anechoic room, cabin no. 2</p> <p>Tested on: Test distance 3 metres Vertical Polarization</p> <p>Date of test: 12/12/2003 Operator: M. Steindl</p> <p>Test performed: automatically File name: default.emi</p>	<p>Comment:</p> <ul style="list-style-type: none"> - TX mode - f = 75.710 MHz (CH 76) - EUT DC powered 12V (8 x 1.5V battery) - EUT on rear side (P3) - Note: With WHKS100-10SS high pass filter -
---	--

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
----------------------------------	--

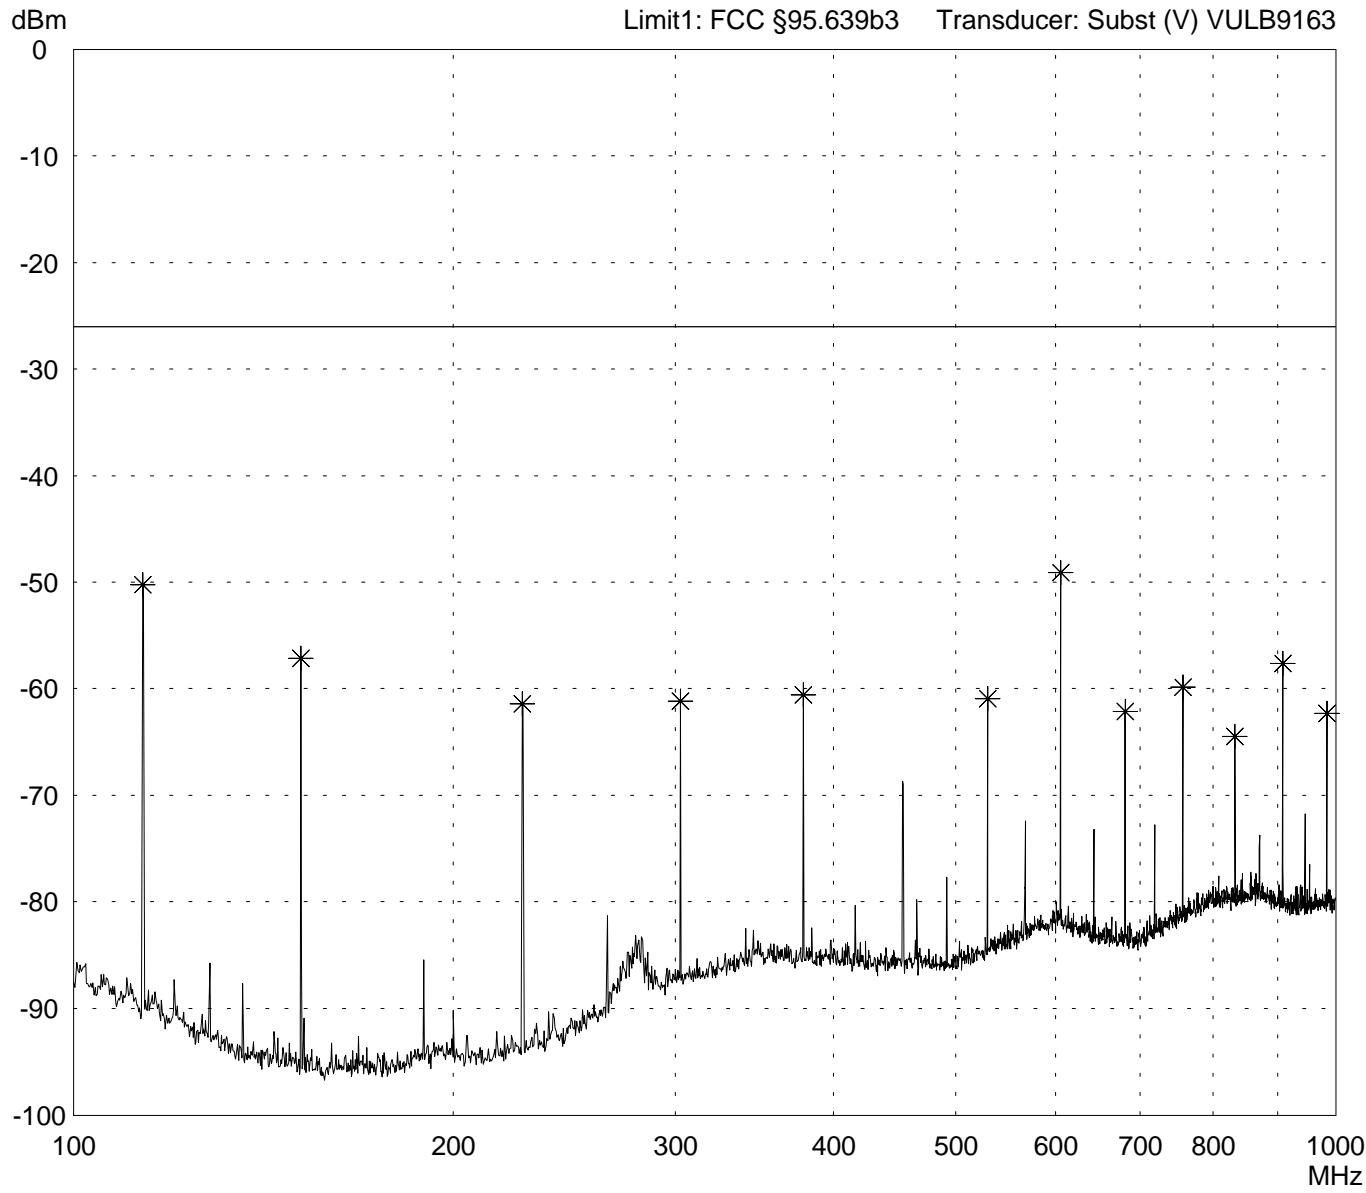

<p>Result: Limit kept</p>	<p>Project file: 55503-30810</p> <p style="text-align: right;">Page of Pages</p>
--------------------------------------	---

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)

Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: horizontal

Frequency [MHz]	Transmit signal P tx [dBm]	TX antenna gain		True transmit signal P true [dBm]	Analyzer reading P site [dBm]	Correction for reading in "dBm" [dB]
		(isotropic) [dBi]	(dipole) [dBd]			
25.0	-1.1	-17.0	-19.2	-20.3	-44.9	25.3
30.0	-1.4	-13.8	-16.0	-17.3	-40.0	23.3
35.0	-1.5	-11.1	-13.3	-14.7	-36.1	22.0
40.0	-1.5	-8.8	-11.0	-12.5	-38.8	27.0
45.0	-1.6	-6.7	-8.9	-10.5	-35.7	25.9
50.0	-1.6	-5.1	-7.3	-8.9	-34.3	26.1
55.0	-1.7	-3.8	-6.0	-7.6	-32.9	25.9
60.0	-1.7	-2.8	-5.0	-6.7	-32.2	26.2
65.0	-1.7	-2.0	-4.2	-5.9	-31.4	26.2
70.0	-1.7	-1.3	-3.5	-5.2	-30.6	26.1
75.0	-1.8	-0.7	-2.9	-4.7	-30.4	26.4
80.0	-1.9	-0.1	-2.3	-4.1	-30.4	26.9
85.0	-1.9	0.2	-2.0	-3.9	-30.3	27.1
90.0	-2.0	0.5	-1.7	-3.6	-29.6	26.6
95.0	-2.0	0.6	-1.6	-3.6	-28.9	26.0
100.0	-2.0	0.7	-1.5	-3.5	-28.2	25.3
110.0	-2.1	0.9	-1.3	-3.3	-27.9	25.2
120.0	-2.1	1.0	-1.2	-3.3	-27.4	24.8
130.0	-2.2	1.1	-1.1	-3.3	-27.2	24.6
140.0	-2.3	1.4	-0.8	-3.0	-26.3	23.9
150.0	-2.3	1.8	-0.4	-2.7	-25.6	23.6
160.0	-2.4	1.9	-0.3	-2.6	-25.4	23.4
170.0	-2.4	2.0	-0.2	-2.6	-25.3	23.4
180.0	-2.5	2.1	0.0	-2.5	-25.6	23.7
190.0	-2.6	2.3	0.2	-2.4	-26.4	24.6
200.0	-2.6	2.3	0.2	-2.4	-27.8	26.0
200.1	-2.3	6.5	4.4	2.0	-19.4	22.0
220.0	-2.6	6.9	4.8	2.1	-19.6	22.4
240.0	-2.7	7.0	4.9	2.1	-20.5	23.3
260.0	-2.8	7.1	5.0	2.2	-21.5	24.4
280.0	-2.9	7.3	5.1	2.2	-22.9	25.7

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)

Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: horizontal

Frequency [MHz]	Transmit signal P tx [dBm]	TX antenna gain		True transmit signal P true [dBm]	Analyzer reading P site [dBm]	Correction for reading in "dBm" [dB]
		(isotropic) [dBi]	(dipole) [dBd]			
300.0	-3.0	7.2	5.1	2.1	-23.0	25.7
325.0	-3.0	7.2	5.1	2.0	-23.9	26.6
350.0	-3.2	7.1	5.0	1.8	-25.7	28.2
375.0	-3.2	7.2	5.1	1.8	-26.2	28.7
400.0	-3.1	6.8	4.7	1.6	-27.8	30.0
425.0	-3.4	6.7	4.6	1.1	-29.1	30.9
433.9	-3.4	6.8	4.7	1.3	-29.8	31.7
450.0	-3.4	7.0	4.9	1.4	-30.6	32.6
475.0	-3.6	6.9	4.8	1.2	-30.1	32.0
500.0	-3.7	7.0	4.9	1.2	-30.2	32.1
550.0	-3.8	7.5	5.4	1.6	-29.3	31.6
600.0	-3.7	7.0	4.9	1.1	-28.9	30.7
650.0	-4.0	6.9	4.8	0.8	-30.3	31.7
700.0	-4.2	6.5	4.4	0.2	-33.0	33.9
750.0	-4.2	7.2	5.1	0.8	-34.6	36.1
800.0	-4.3	7.1	5.0	0.7	-34.3	35.7
850.0	-4.6	6.7	4.6	0.0	-33.2	33.8
867.8	-4.4	6.6	4.5	0.0	-32.9	33.7
900.0	-4.6	7.0	4.9	0.3	-33.1	34.1
950.0	-4.6	7.7	5.6	0.9	-34.4	36.0
1000.0	-4.7	7.0	4.9	0.2	-36.9	37.8
1000.1	-4.6	4.3		-0.3	-36.8	37.2
1500.0	-5.6	6.9		1.3	-41.1	43.2
2000.0	-6.2	7.1		0.9	-42.7	44.4
2500.0	-6.6	7.6		1.0	-46.0	47.8
3000.0	-6.8	7.7		0.9	-47.9	49.7
3500.0	-7.6	7.8		0.2	-49.4	50.5
4000.0	-8.2	7.9		-0.3	-53.7	54.3
4500.0	-9.0	9.0		0.0	-55.3	56.4
5000.0	-9.5	8.9		-0.6	-55.5	55.9

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)

Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: vertical

Frequency [MHz]	Transmit signal ¹ P tx [dBm]	TX antenna gain		True transmit signal P true [dBm]	Analyzer reading P site [dBm]	Correction for reading in "dBm" [dB]
		(isotropic) [dBi]	(dipole) [dBd]			
25.0	-1.1	-17.0	-19.2	-20.3	-43.4	23.8
30.0	-1.4	-13.8	-16.0	-17.3	-38.6	21.9
35.0	-1.5	-11.1	-13.3	-14.7	-34.9	20.8
40.0	-1.5	-8.8	-11.0	-12.5	-34.3	22.5
45.0	-1.6	-6.7	-8.9	-10.5	-37.0	27.1
50.0	-1.6	-5.1	-7.3	-8.9	-34.3	26.1
55.0	-1.7	-3.8	-6.0	-7.6	-32.7	25.7
60.0	-1.7	-2.8	-5.0	-6.7	-32.5	26.4
65.0	-1.7	-2.0	-4.2	-5.9	-31.3	26.1
70.0	-1.7	-1.3	-3.5	-5.2	-30.6	26.1
75.0	-1.8	-0.7	-2.9	-4.7	-29.9	25.9
80.0	-1.9	-0.1	-2.3	-4.1	-29.9	26.5
85.0	-1.9	0.2	-2.0	-3.9	-30.5	27.2
90.0	-2.0	0.5	-1.7	-3.6	-30.3	27.3
95.0	-2.0	0.6	-1.6	-3.6	-29.0	26.1
100.0	-2.0	0.7	-1.5	-3.5	-28.3	25.5
110.0	-2.1	0.9	-1.3	-3.3	-27.9	25.2
120.0	-2.1	1.0	-1.2	-3.3	-28.2	25.5
130.0	-2.2	1.1	-1.1	-3.3	-27.0	24.3
140.0	-2.3	1.4	-0.8	-3.0	-25.8	23.4
150.0	-2.3	1.8	-0.4	-2.7	-25.1	23.1
160.0	-2.4	1.9	-0.3	-2.6	-25.1	23.1
170.0	-2.4	2.0	-0.2	-2.6	-25.0	23.1
180.0	-2.5	2.1	0.0	-2.5	-25.1	23.2
190.0	-2.6	2.3	0.2	-2.4	-25.5	23.7
200.0	-2.6	2.3	0.2	-2.4	-26.9	25.2
200.1	-2.3	6.5	4.4	2.0	-18.4	21.1
220.0	-2.6	6.9	4.8	2.1	-18.7	21.5
240.0	-2.7	7.0	4.9	2.1	-20.0	22.8
260.0	-2.8	7.1	5.0	2.2	-21.4	24.3
280.0	-2.9	7.3	5.1	2.2	-23.7	26.6

Test Site Calibration 25 MHz - 5 GHz for ERP Measurements (Substitution Method)

Test site: Semi-anechoic room, cabin no. 2
 Test distance: Standard position [m]: 3
 Date: 07/15/2002
 Operator: R. Heller
 Transmit antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. A-1261
 Log.-per. antenna HL 223, Rohde & Schwarz, inv.-no. A-1262
 Horn antenna EMCO 3115, EMCO, inv.-no. B-1516
 Receiving antennae: Biconical antenna HK 116, Rohde & Schwarz, inv.-no. C-1560
 Log.-per. antenna 3147, EMCO, inv.-no. A-1009
 Signal source: Tracking generator of ESMI, Rohde & Schwarz, inv.-no. A-1569,
 connected to transmit antenna via cables inv.-no. 1683, port 2 of AP 1
 and 1592, nominal power at signal generator set to 0 dBm
 Receiving cables: Inv.-no. 1657, 1681 and 1592
 Test receiver: ESMI, Rohde & Schwarz, inv.-no. A-1569
 Antenna heights: TX antenna (h1): 1.5 metre
 RX antenna (h2): 1.5 metre
 Antenna position: TX antenna: center of turn table
 Polarization: vertical

Frequency [MHz]	Transmit signal ¹ P tx [dBm]	TX antenna gain		True transmit signal P true [dBm]	Analyzer reading P site [dBm]	Correction for reading in "dBm" [dB]
		(isotropic) [dBi]	(dipole) [dBd]			
300.0	-3.0	7.2	5.1	2.1	-25.3	28.0
325.0	-3.0	7.2	5.1	2.0	-26.7	29.3
350.0	-3.2	7.1	5.0	1.8	-28.2	30.7
375.0	-3.2	7.2	5.1	1.8	-27.9	30.4
400.0	-3.1	6.8	4.7	1.6	-28.3	30.5
425.0	-3.4	6.7	4.6	1.1	-28.2	30.0
433.9	-3.4	6.8	4.7	1.3	-28.6	30.6
450.0	-3.4	7.0	4.9	1.4	-28.8	30.9
475.0	-3.6	6.9	4.8	1.2	-28.1	30.0
500.0	-3.7	7.0	4.9	1.2	-28.2	30.0
550.0	-3.8	7.5	5.4	1.6	-29.5	31.7
600.0	-3.7	7.0	4.9	1.1	-31.6	33.4
650.0	-4.0	6.9	4.8	0.8	-32.4	33.8
700.0	-4.2	6.5	4.4	0.2	-32.2	33.1
750.0	-4.2	7.2	5.1	0.8	-31.3	32.8
800.0	-4.3	7.1	5.0	0.7	-34.4	35.7
850.0	-4.6	6.7	4.6	0.0	-36.3	36.9
867.8	-4.4	6.6	4.5	0.0	-36.3	37.1
900.0	-4.6	7.0	4.9	0.3	-35.7	36.6
950.0	-4.6	7.7	5.6	0.9	-34.9	36.5
1000.0	-4.7	7.0	4.9	0.2	-34.7	35.6
1000.1	-4.6	4.3		-0.3	-36.3	36.7
1500.0	-5.6	6.9		1.3	-39.1	41.2
2000.0	-6.2	7.1		0.9	-44.3	46.1
2500.0	-6.6	7.6		1.0	-45.1	46.9
3000.0	-6.8	7.7		0.9	-46.5	48.3
3500.0	-7.6	7.8		0.2	-50.3	51.4
4000.0	-8.2	7.9		-0.3	-52.8	53.4
4500.0	-9.0	9.0		0.0	-55.9	57.0
5000.0	-9.5	8.9		-0.6	-54.7	55.1