

**HYAK LABORATORIES, INC.**

7011 CALAMO STREET, SUITE 107

SPRINGFIELD, VIRGINIA 22150

(703) 451-1188

FAX (703) 644-7492

**ENGINEERING STATEMENT**

**IN REGARD TO MEASUREMENTS ON**

**AUTO PAGE, INC.**

**FCC ID: B23AT68**

**MODEL AT-68**

**A. INTRODUCTION**

Hyak Laboratories Inc. has been authorized by Auto Page, Inc. to perform measurements on a Model AT-68 R/C transmitter to determine compliance with FCC Rules, Subpart C, Para. 15.201.

The transmitter is a low powered device designed for remote control of automobile security systems. It operates at a nominal 433.9 MHz frequency. The transmitter, constructed on an etched circuit card, is powered by a 12 volt battery.

The AT-68, operates under manual control since transmission only occurs when the unit is keyed. The provisions of 15.231(a)(1) are met since transmission ceases within 5 seconds of the user manually releasing the push button.

**B. DESCRIPTION OF MEASUREMENT FACILITIES**

A description of the Hyak Laboratories Inc. radiation test facility is a matter of record with the FCC. The facility was accepted for radiation measurements on October 1, 1976, and is currently listed as an acceptable site.

**C. DESCRIPTION OF MEASUREMENT PROCEDURE: RADIATED MEASUREMENTS**

Measurements of transmitter radiation field strength were made using ANSI C64.3 (1992) as the test procedure. Measurements were made with 3 meter spacing between the transmitter under test and the test equipment antenna.

A fresh 12 volt battery was installed.

## C. DESCRIPTION OF MEASUREMENT PROCEDURE: (Continued)

The transmitter under test was placed on a rotatable table approximately 80 cm in height.

Measurement of field strength was made through use of HP 8596E and Tektronix 494P spectrum analyzer in conjunction with a HP 8447D and Avantek wide band, low noise preamplifiers; and an Advantest R3361A spectrum analyzer with quasi-peak detector.

Above 1 GHz the 494P spectrum analyzer, a peak responding device, was used with Avantek amplifiers.

Eaton 96005 or Emco 3104C calibrated antennas were used as the test antennas in the 25-1000 MHz range. Polarad CA-L and CA-S calibrated horn antennas were used between 1 and 4.4 GHz.

An analysis of time domain measurements (see plots in Figures 1, 2, and 3) was made to determine average field intensity of the fundamental and any harmonics outside of forbidden bands. Sample calculations are included in Figure 4.

Based on time domain observations, and using the procedures of Figure 4, a correction factor for a nominal 100 mS averaging interval was computed.

Data for radiated emissions in Table 1 includes this correction factor. For emissions that fell in forbidden bands below 1 GHz the CISPR quasi-peak detector was used.

For each spurious emission identified between 30 the tenth harmonic the test assembly was rotated for maximum pickup, the test antenna varied in elevation and the test antenna polarization shifted between horizontal to vertical in order to maximize observed signals.

The measurement procedure included recording the worst-case field strength for receiving antenna polarization, test antenna height variation from 3 feet to 10 feet, test sample rotation, and placing the test sample on each of its major planes.

The spectrum was checked from 30 to 4400 MHz. All emissions not reported were more than 20 dB below the permitted level or below FCC limits but in the ambient/system noise floor. Tabulation of the measurements are shown in Table 1.

Specific forbidden band scans were made per Paragraph 15.205 and 15.209.

## SAMPLE COMPUTATIONS

Using the time domain plots of Figures 1 through 3, maximum "on" time over any 100 mS interval is:

"On" Pulses:

Short (0.9 mS) x 32 = 28.8  
Long (1.9 mS) x 9 = 17.1

Total 45.9

Duty Cycle: 45.9/100 = 0.46

20 Log 0.46 = -6.8 dB

SAMPLE COMPUTATIONS  
FCC ID: B23AT68

FIGURE 4

TABLE 1

RADIATED FIELD INTENSITY  
 Measured at 3 meters  
 15.231(b)

Frequency (MHz)	Meter <sup>1</sup> Reading (dBm)	Antenna Factor (dB)	Field <sup>2</sup> Intensity uV/m @ 3m	Calc. Field <sup>3</sup> Intensity uV/m @ 3m	FCC Limit uV/m @ 3m	dB to Limit
433.910	-41.6	17.0	13182.6	6025.6	10996.3	- 5.2
867.820	-68.0	22.4	1774.9	537.0	1099.6	- 6.2
1301.722	-73.2	22.7	668.3	305.5	500.0	- 4.3
1735.630	-69.2	24.1	1244.5	568.9	1099.6	- 5.7
2169.556	-76.0	25.5	668.3	305.5	1099.6	-11.1
2603.460	-69.9	24.1	1148.2	524.8	1099.6	- 6.4
3037.382	-72.4	24.8	933.3	426.6	1099.6	- 8.2
3471.292	-73.2	25.4	912.0	416.9	1099.6	- 8.4
3905.190	-81.2	25.6	371.5	169.8	500.0	- 9.4
4339.100	-74.2	25.7	841.4	384.6	500.0	- 2.3

Note 1: Peak detector reading without averaging.

Note 2:  $uV/m = \text{Log}^{-1} \frac{dBu/m}{20}$

$$dBu = dBm + \text{antenna factor} + 107$$

Note 3: Field Intensity calculated from peak value and -6.8 dB peak/average factor.

\*Forbidden Band

All other emissions to the tenth harmonic were below FCC limits.

(Unit was measured on 3 major planes)

RADIATED FIELD INTENSITY  
 FCC ID: B23AT68

TABLE 1

**D. REPORT OF RADIATED MEASUREMENTS**

Table 1 lists the frequency and amplitude of all signals observed from 30 to the 10th harmonic that were within 20 dB of the limits of FCC Rules. The averaging factor is included as noted.

**E. FORBIDDEN BAND MEASUREMENTS**

Any spurious signals from the transmitter that fell in a forbidden band are identified in Table 1. All forbidden bands, per Paragraph 15.205, from 73 MHz to 4.4 GHz were searched and any applicable emissions above noise or interference levels are shown in Table 1.

**F. OCCUPIED BANDWIDTH**

A plot of occupied bandwidth is shown in Figure 5. The device meets bandwidth restriction of Paragraph 15.231(c); 20 dB points are less than 30 kHz with worst-case modulation. (Limit is 0.25% of 433.9 MHz or 1.08 MHz).

**G. POWER LINE CONDUCTED MEASUREMENTS**

AC line conducted spurious measurements were not made since the device does not use the public power supply system.

**H. EXHIBITS**

Label; Exhibit 1.

Photographs; Exhibit 2.

Schematic Diagrams; Exhibit 3.

User Instructions; Exhibit 4.

Block Diagram; Exhibit 5.

Circuit Description; Exhibit 6.

**I. STATEMENT**


Technical test data are from tests performed by me or under my supervision. My qualifications are a matter of record with the Federal Communications Commission. I personally attest to the accuracy of the test data submitted as a part of this engineering statement.



---

Rowland S. Johnson

Dated: December 11, 1998

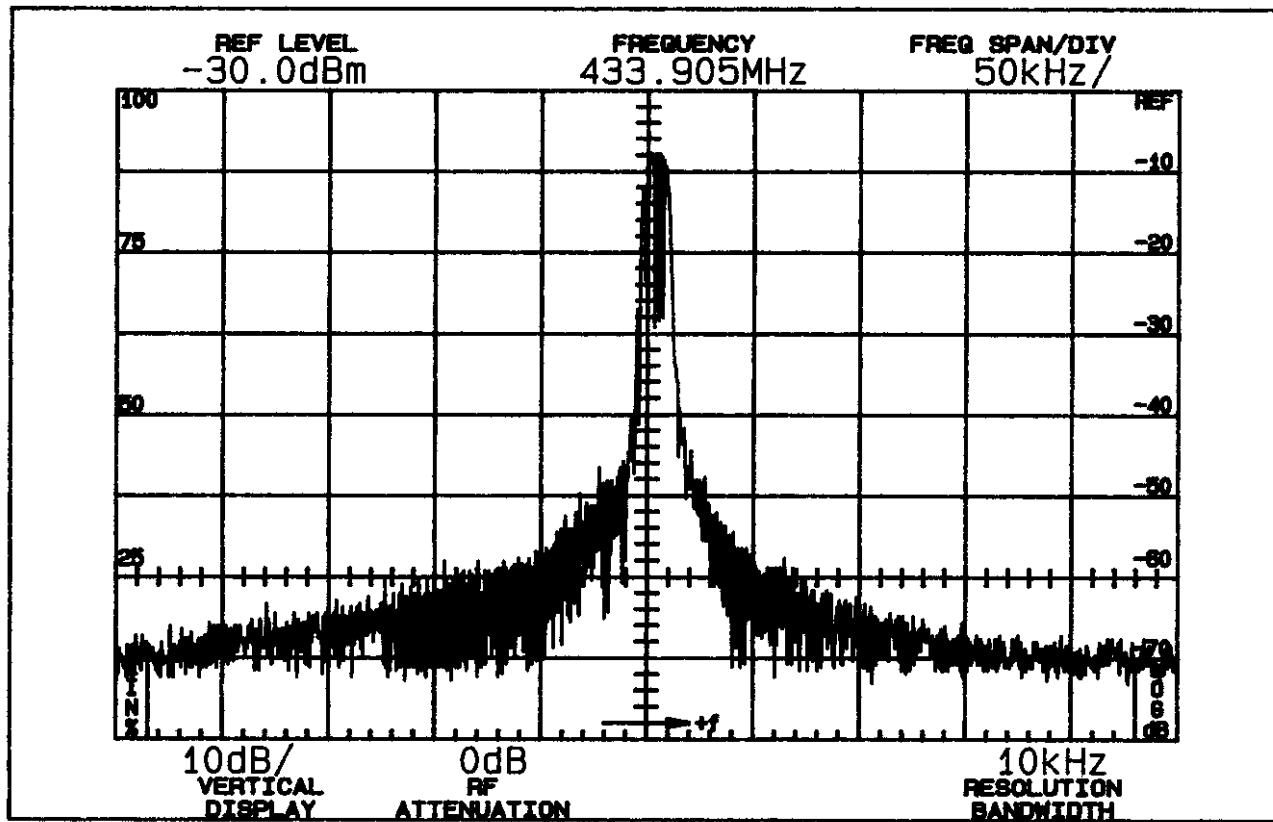

Center Frequency 433.9 MHz

Horizontal: 50 kHz  
Vertical: 10 dB/Div.  
Resolution: 10 kHz


No video filtering.

OCCUPIED BANDWIDTH  
FCC ID: B23AT68

FIGURE 5

**LIST OF EXHIBITS**

- 1. FCC ID LABEL**
- 2. PHOTOGRAPHS**
- 3. SCHEMATIC DIAGRAM**
- 4. USER INSTRUCTIONS**
- 5. BLOCK DIAGRAM & CIRCUIT DESCRIPTION**

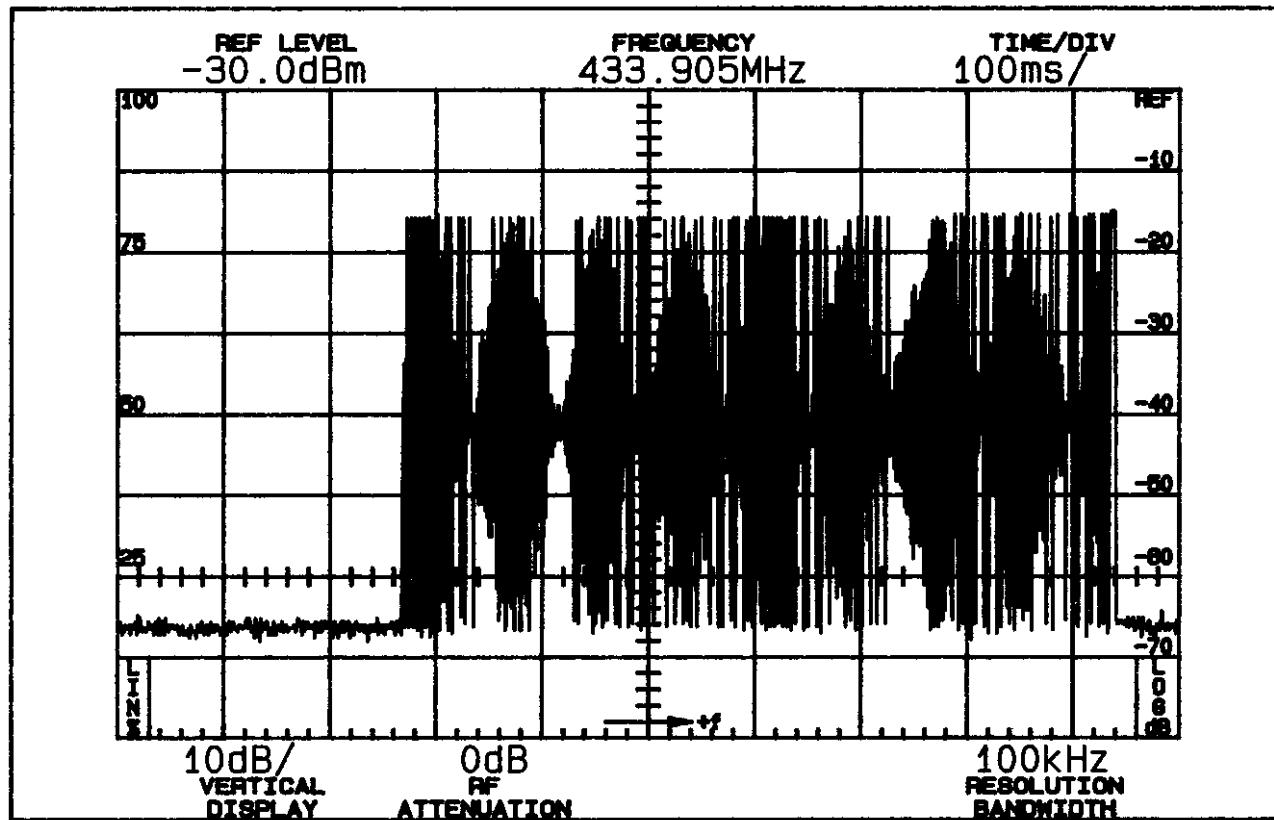


## MULTIPLE WORD TRANSMISSION

Horizontal: 100 milliseconds/Div  
Vertical: 10 dB/Div.  
Resolution: 100 kHz

(Time domain)

PULSE CHARACTERISTICS  
FCC ID: B23AT68

FIGURE 1

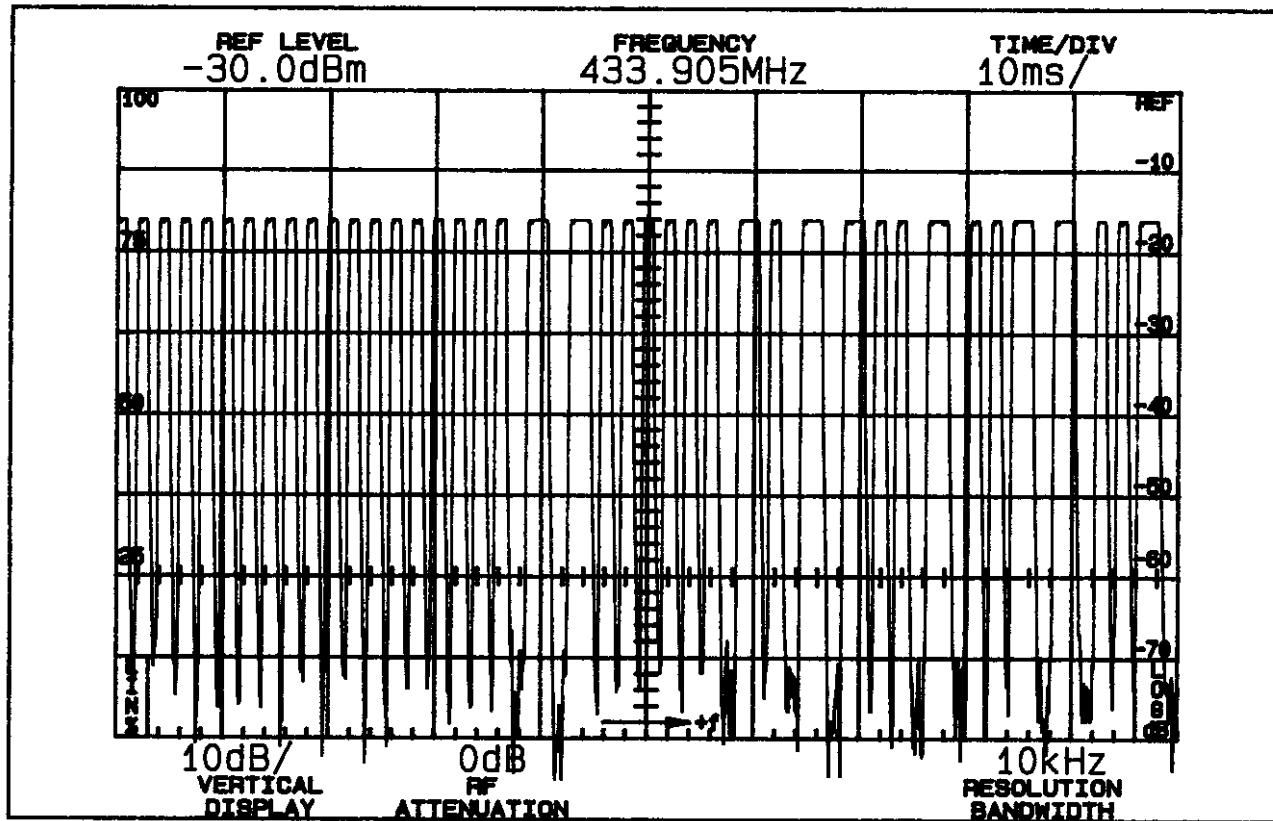


## SINGLE WORD TRANSMISSION

Horizontal: 10 mS/Div.  
Vertical: 10 dB/Div.  
Resolution: 10 kHz

(Time domain)

PULSE CHARACTERISTICS  
FCC ID: B23AT68

FIGURE 2

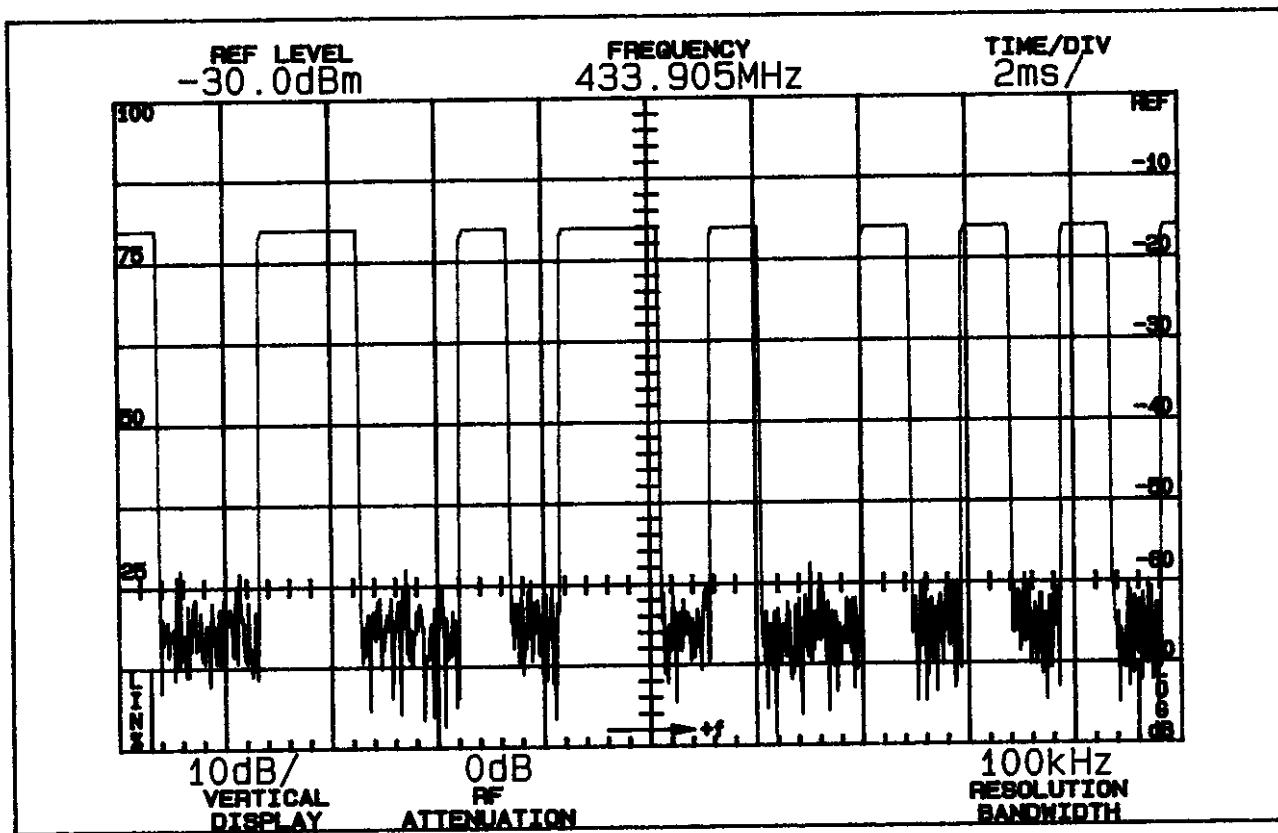

## BIT DETAIL

Horizontal: 2 mS/Div.  
 Vertical: 10 dB/Div.  
 Resolution: 10 kHz

(Time domain)

PULSE CHARACTERISTICS  
 FCC ID: B23AT68

FIGURE 3