



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
Mobile Point of Sale Terminal

**FCC ID: B32V240M2G
Model Name: V240m 2G**

**Report Number: 11859411-S1V2
Issue Date: 12/19/2017**

Prepared for
**VERIFONE INC
1400 WEST STANDFORD RANCH RD, SUITE 200
ROCKLIN, CA, 95765 USA**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	10/10/2017	Initial Issue	--
V2	12/19/2017	Sec. 6.1: Updated Sec. 4.3, 7, 8, 10: Updated to include additional testing Appendix A, B, C, F: Updated	Kenneth Mak

Table of Contents

1. Attestation of Test Results 5

2. Test Specification, Methods and Procedures..... 6

3. Facilities and Accreditation 6

4. SAR Measurement System & Test Equipment 7

 4.1. SAR Measurement System..... 7

 4.2. SAR Scan Procedures 8

 4.3. Test Equipment..... 10

5. Measurement Uncertainty..... 11

6. Device Under Test (DUT) Information 12

 6.1. DUT Description 12

 6.2. Wireless Technologies..... 12

 6.3. Maximum Output Power from Tune-up Procedure 12

7. RF Exposure Conditions (Test Configurations) 13

 7.1. Standalone SAR Test Exclusion Considerations..... 13

 7.2. Required Test Configurations 13

8. Dielectric Property Measurements & System Check 14

 8.1. Dielectric Property Measurements 14

 8.2. System Check..... 16

9. Conducted Output Power Measurements..... 17

 9.1. GSM 17

10. Measured and Reported (Scaled) SAR Results..... 18

 10.1. GSM 850 Measured SAR Results 18

 10.2. GSM 1900 Measured SAR Results 18

11. SAR Measurement Variability..... 19

12. Simultaneous Transmission SAR Analysis..... 19

Appendixes 20

 11859411-S1V2 SAR_App A Setup Photos 20

 11859411-S1V2 SAR_App B System Check Plots 20

 11859411-S1V2 SAR_App C Highest Test Plots..... 20

 11859411-S1V1 SAR_App D Tissue Ingredients..... 20

 11859411-S1V1 SAR_App E Probe Cal. Certificates 20



 11859411-S1V2 SAR_App F Dipole Cal. Certificates..... 20

1. Attestation of Test Results

Applicant Name	Verifone Inc			
FCC ID	B32V240M2G			
Model Name	V240m 2G			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average(1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCB	DTS	NII	DSS
Extremity	2.775	N/A	N/A	N/A
Date Tested	9/12/2017 to 9/14/2017; 12/13/2017 to 12/15/2017			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By: 	Prepared By: 
Devin Chang Senior Engineer UL Verification Services Inc.	Kenneth C. Mak Engineer UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

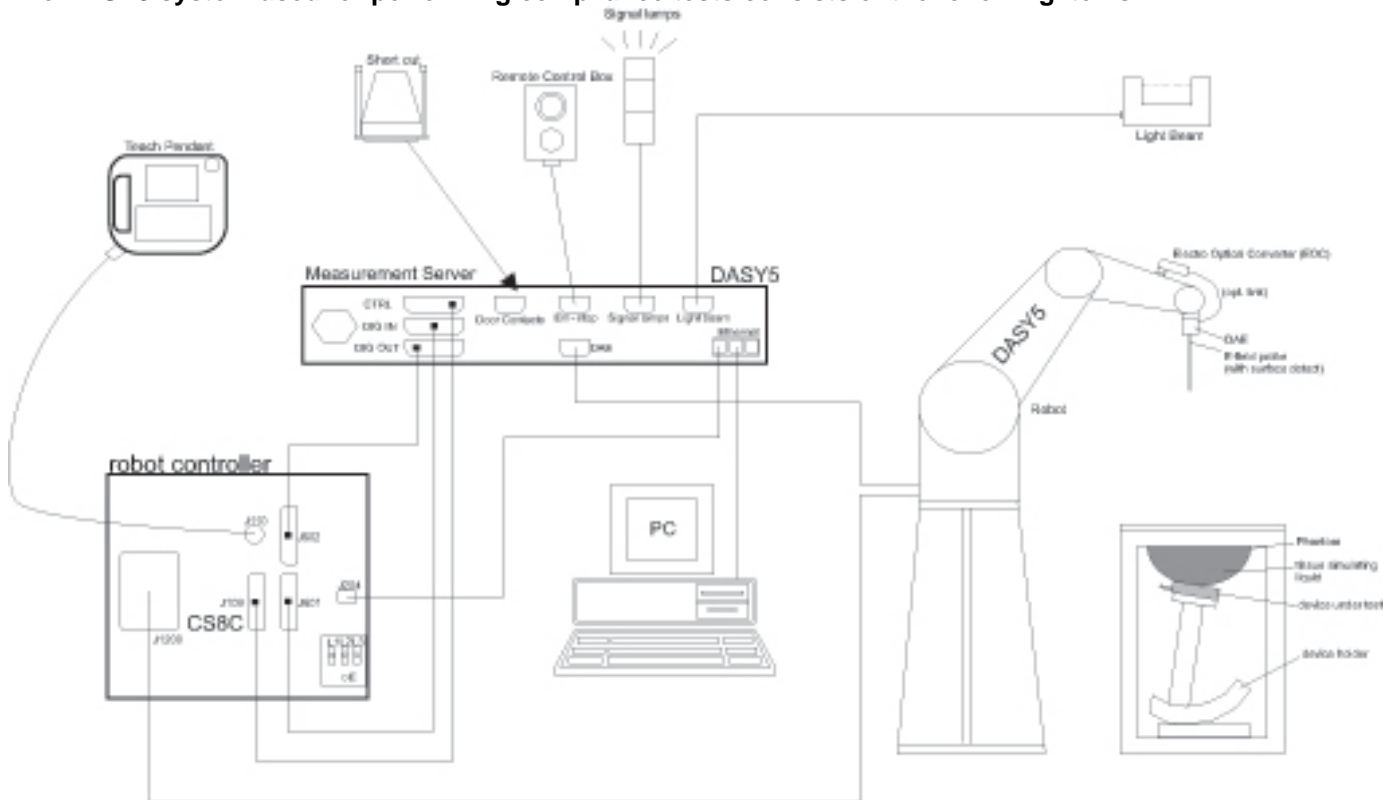

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
PNA Network Analyzer	Keysight	N5227A	US51270480	7/27/2018
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/8/2017
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/8/2017
Thermometer	Control Company	Traceable	170064398	1/30/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140630	5/16/2018
Power Meter	HP	437B	3125U12345	8/10/2018
Power Meter	HP	437B	3125U09516	9/27/2017
Power Sensor	HP	8481A	2349A36506	9/29/2017
Power Sensor*	HP	8481A	2702A76223	9/14/2017
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	Xantrex	XHR 60-18	227519	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	7463	7/5/2018
E-Field Probe (SAR Lab B)	SPEAG	EX3DV4	7335	3/15/2018
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1434	4/19/2018
Data Acquisition Electronics (SAR Lab B)	SPEAG	DAE4	1257	9/15/2017
System Validation Dipole	SPEAG	D835V2	4d117	5/22/2018
System Validation Dipole	SPEAG	D1900V2	5d163	9/19/2017

Other

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	T1526	147543	5/2/2018
Base Station Simulator	R & S	CMW500	T958	134855	6/12/2018

Note:

*Equipment not used past calibration date

Additional Testing (12/13/2017 to 12/15/2017):**Dielectric Property Measurements**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	9/15/2018
Dielectric Probe kit	SPEAG	DAK-3.5	1103	2/16/2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	2/16/2018
Thermometer	Traceable Calibration Control Co.	4242	150378159	5/26/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140610	5/31/2018
Power Meter	Keysight	N1912A	MY55196008	5/12/2018
Power Sensor	Agilent	N1921A	MY52260009	1/5/2018
Power Sensor	Agilent	N1921A	MY52270022	12/17/2017
DC Power Supply	BK PRECISION	1611	215-02292	N/A
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Directional coupler	Werlatone	C8060-102	2149	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	7463	7/5/2018
E-Field Probe (SAR Lab B)	SPEAG	EX3DV4	7335	3/15/2018
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1434	4/19/2018
Data Acquisition Electronics (SAR Lab B)	SPEAG	DAE4	1380	7/24/2018
System Validation Dipole	SPEAG	D835V2	4d117	5/22/2018
System Validation Dipole	SPEAG	D1900V2	5d043	11/22/2018

Other

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	T1526	147543	5/2/2018
Base Station Simulator	R & S	CMW500	T948	135393	5/15/2018

Note:

*Equipment not used past calibration date

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width x Height): 162.9 mm x 75.3 mm x 53.4 mm Overall Diagonal: 140.32 mm Display Diagonal: 89.65 mm		
Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover		
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.7Vdc, 9.1Wh		
Test sample information	S/N	IMEI	Notes
	313-856-052	356496045461324	SAR Conducted unit
	313-857-195	356496045460540	SAR Radiated unit
Hardware Version	DVT 2		
Software Version	VOS2 30640XXX		

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	GPRS (GMSK)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - 1 Up, 4 Down <input checked="" type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input type="checkbox"/> Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% GPRS: 1 Slot: 12.5% 2 Slots: 25%
	Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			

6.3. Maximum Output Power from Tune-up Procedure

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)	
			Tune-up Limit	Frame Power
GSM850	Voice/GPRS	1	33.0	23.97
	GPRS	2	32.5	26.48
GSM1900	Voice/GPRS	1	30.7	21.67
	GPRS	2	30.2	24.18

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WWAN

Antennas < 50mm to adjacent edges

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)							Calculated Threshold Value						
			dBm	mW	Rear Flat	Rear Slant	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear Flat	Rear Slant	Edge 1	Edge 2	Edge 3	Edge 4	Front
Cellular	GPRS 2 Slots	848.8	32.50	445	5.00	5.00	142.63	4.00	3.30	21.21	10.00	82	82	> 50 mm	82	82	19.5	41
Cellular	GPRS 2 Slots	1909.8	30.20	262	5.00	5.00	142.63	4.00	3.30	21.21	10.00	72.4	72.4	> 50 mm	72.4	72.4	17.2	36.2

Note(s):

According to KDB 447498, if the calculated threshold value is >7.5 , then SAR testing is required.

Antennas > 50mm to adjacent edges

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)							Calculated Threshold Value						
			dBm	mW	Rear Flat	Rear Slant	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear Flat	Rear Slant	Edge 1	Edge 2	Edge 3	Edge 4	Front
Cellular	GPRS 2 Slots	848.8	32.50	445	5.00	5.00	142.63	4.00	3.30	21.21	10.00	< 50 mm	< 50 mm	687 mW -EXEMPT-	< 50 mm	< 50 mm	< 50 mm	< 50 mm
Cellular	GPRS 2 Slots	1909.8	30.20	262	5.00	5.00	142.63	4.00	3.30	21.21	10.00	< 50 mm	< 50 mm	1034.8 mW -EXEMPT-	< 50 mm	< 50 mm	< 50 mm	< 50 mm

Note(s):

According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Rear Flat	Rear Slant	Front	Edge 1	Edge 2	Edge 3	Edge 4
				(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)
GSM850 Full Power	Yes	Yes	Yes	No	Yes	Yes	Yes
GSM1900 Full Power	Yes	Yes	Yes	No	Yes	Yes	Yes

Note(s):

Yes = Testing is required.
No = Testing is not required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
A	9/12/2017	835	Body	835	55.63	55.20	0.78	1.00	0.97	3.40
				805	56.06	55.33	1.31	0.98	0.97	1.80
				905	55.36	55.00	0.65	1.09	1.05	3.85
B	9/12/2017	1900	Body	1900	51.36	53.30	-3.64	1.60	1.52	5.46
				1850	51.48	53.30	-3.41	1.55	1.52	2.04
				1920	51.28	53.30	-3.79	1.62	1.52	6.58

Additional Testing (12/13/2017 to 12/15/2017):

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
A	12/13/2017	835	Body	835	55.39	55.20	0.34	1.00	0.97	3.51
				805	55.74	55.33	0.73	0.97	0.97	0.77
				905	54.47	55.00	-0.96	1.07	1.05	2.04
B	12/12/2017	1900	Body	1900	51.45	53.30	-3.47	1.55	1.52	1.97
				1850	51.65	53.30	-3.10	1.51	1.52	-0.86
				1920	51.40	53.30	-3.56	1.57	1.52	3.36

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
A	9/12/2017	Body	D835V2 SN:4d117	5/22/2018	1.010	10.10	10.39	-2.79	0.667	6.67	6.76	-1.33	1,2
B	9/12/2017	Body	D1900V2 SN:5d163	9/19/2017	4.100	41.00	39.60	3.54	2.090	20.90	21.00	-0.48	3,4

Additional Testing (12/13/2017 to 12/15/2017):

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
A	12/13/2017	Body	D835V2 SN:4d117	5/22/2018	1.010	10.10	10.39	-2.79	0.667	6.67	6.76	-1.33	5,6
B	12/13/2017	Body	D1900V2 SN:5d043	11/22/2018	4.380	43.80	41.00	6.83	2.290	22.90	20.90	9.57	7,8

9. Conducted Output Power Measurements

9.1. GSM

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Measured Max Pwr	
						Burst (dBm)	Frame (dBm)
850	GPRS (GMSK)	CS1	1	128	824.2	32.3	23.3
				190	836.6	32.2	23.2
				251	848.8	32.2	23.2
			2	128	824.2	32.3	26.3
				190	836.6	32.2	26.2
				251	848.8	32.2	26.2

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots, based on the Tune-up Procedure. Refer to §6.3.

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Measured Max. Pwr	
						Burst (dBm)	Frame (dBm)
1900	GPRS (GMSK)	CS1	1	512	1850.2	30.0	21.0
				661	1880.0	30.1	21.1
				810	1909.8	30.1	21.1
			2	512	1850.2	30.0	24.0
				661	1880.0	30.1	24.1
				810	1909.8	30.1	24.1

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 2 time slots, based on the Tune-up Procedure. Refer to §6.3.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

10.1. GSM 850 Measured SAR Results

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Extremity	GPRS 2 Slots	0	Rear Flat	128	824.2	32.5	32.3	1.580	1.654	1
				190	836.6	32.5	32.2	1.870	2.004	
				251	848.8	32.5	32.2	1.790	1.918	
			Rear Slant	190	836.6	32.5	32.2	1.810	1.939	
			Front	190	836.6	32.5	32.2	0.399	0.428	
			Edge 2	190	836.6	32.5	32.2	0.643	0.689	
			Edge 3	190	836.6	32.5	32.2	1.130	1.211	
			Edge 4	190	836.6	32.5	32.2	0.284	0.304	

10.2. GSM 1900 Measured SAR Results

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Extremity	GPRS 2 Slots	0	Rear Flat	512	1850.2	30.2	30.0	2.650	2.775	2
				661	1880.0	30.2	30.1	2.350	2.405	
				810	1909.8	30.2	30.1	1.850	1.893	
			Rear Slant	512	1850.2	30.2	30.0	2.210	2.314	
				661	1880.0	30.2	30.1	2.130	2.180	
				810	1909.8	30.2	30.1	2.160	2.210	
			Front	661	1880.0	30.2	30.1	0.682	0.698	
			Edge 2	661	1880.0	30.2	30.1	1.910	1.954	
			Edge 3	661	1880.0	30.2	30.1	0.970	0.993	
			Edge 4	661	1880.0	30.2	30.1	0.241	0.247	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
850	GSM 850	Extremity	Rear Flat	No	1.870	N/A	N/A
1900	GSM 1900	Extremity	Rear Flat	Yes	2.650	2.530	1.05

12. Simultaneous Transmission SAR Analysis

This device does not support Simultaneous Transmission.

Appendixes

Refer to separated files for the following appendixes.

11859411-S1V2 SAR_App A Setup Photos

11859411-S1V2 SAR_App B System Check Plots

11859411-S1V2 SAR_App C Highest Test Plots

11859411-S1V1 SAR_App D Tissue Ingredients

11859411-S1V1 SAR_App E Probe Cal. Certificates

11859411-S1V2 SAR_App F Dipole Cal. Certificates

END OF REPORT