



# FCC RADIO TEST REPORT

**FCC ID** : B32V240MPLUS  
**Equipment** : Point of sale Terminal  
**Brand Name** : Verifone  
**Model Name** : V240m Plus 3GBWC  
**Applicant** : Verifone, Inc.  
1400 West Stanford Ranch Road,  
Suite 200, Rocklin CA 95765 USA  
**Manufacturer** : Inventec Applicanes (Pudong) Corp.  
789 Pu Xing Road Shanghai 201114  
China P.R.C.  
**Standard** : FCC Part 15 Subpart E §15.407

The product was received on May 09, 2018 and testing was started from May 22, 2018 and completed on Jun. 21, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

**SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result .....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency and Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup.....	8
<b>3 Test Result .....</b>	<b>9</b>
3.1 Maximum Conducted Output Power Measurement .....	9
3.2 Unwanted Emissions Measurement .....	11
3.3 Automatically Discontinue Transmission .....	16
3.4 Antenna Requirements .....	17
<b>4 List of Measuring Equipment .....</b>	<b>18</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>19</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. Radiated Spurious Emission</b>	
<b>Appendix C. Radiated Spurious Emission Plots</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.403(i)	26dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Reporting only	-
3.1	15.407(a)	Maximum Conducted Output Power	Pass	-
-	15.407(a)	Power Spectral Density	Not Required	-
3.2	15.407(b)	Unwanted Emissions	Pass	Under limit 5.03 dB at 5145.860 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.3	15.407(c)	Automatically Discontinue Transmission	Pass	-
3.4	15.203 15.407(a)	Antenna Requirement	Pass	-
<b>Remark:</b> 1. Not required means after assessing, test items are not necessary to carry out. 2. This is a variant report by adding camera module. All the test cases were performed on other report. Based on the original report (Report Number.: 11631998-E4V1), the Peak Output Power and Radiated Band Edges and Radiated Spurious Emission test cases were verified.				

**Reviewed by: Joseph Lin**

**Report Producer: Wii Chang**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and RFID

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN: FPC Antenna Bluetooth: FPC Antenna RFID: Loop Antenna

Specification of Accessory		
AC Adapter 1	Brand Name	Verifone
	Manufacturer	PHIHONG
	Model Name	AM11A-050A
	Power Rating	Input:100-240Vac, 0.5A Output: 5V/2.2A, 11W
	Power Cord	1.7meter, non-shielded cable, without ferrite core
AC Adapter 2	Brand Name	Verifone
	Manufacturer	Salcomp
	Model Name	VF0402
	Power Rating	Input:100-240Vac, 0.5A Output: 5V/2.2A, 11W
	Power Cord	1.7meter, non-shielded cable, without ferrite core
AC Adapter 3	Brand Name	Verifone
	Manufacturer	Salcomp
	Model Name	SC1402
	Power Rating	Input:100-240Vac, 0.15A Output: 5V/1A, 5W
	Power Cord	1.7meter, non-shielded cable, without ferrite core
AC Adapter 4	Brand Name	Verifone
	Manufacturer	Leader
	Model Name	MU06-E050100-A1
	Power Rating	Input:100-240Vac, 0.18A Output: 5V/1A, 5W
	Power Cord	1.7meter, non-shielded cable, without ferrite core
Battery	Brand Name	Verifone
	Model Name	BPK474-001

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	-	-		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	-	-		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	-	-	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	-	-	128	5640

**Note:** The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.


## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Ch. #		Band I : 5150-5250 MHz
		802.11n HT40
L	Low	38
M	Middle	-
H	High	-

## 2.3 Connection Diagram of Test System

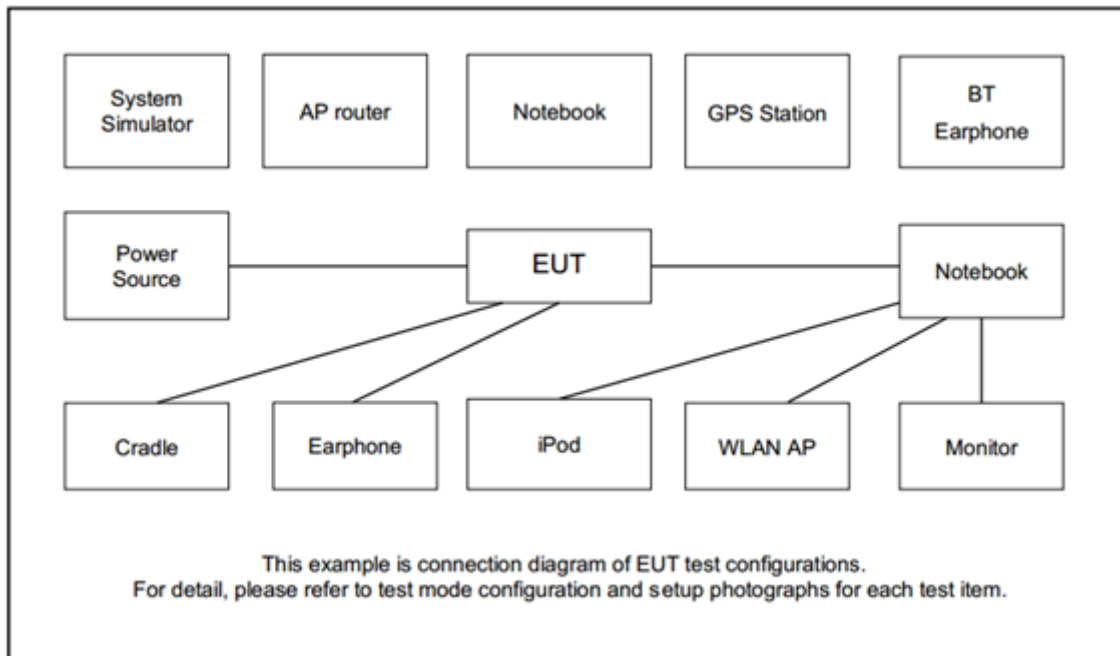

## 2.4 EUT Operation Test Setup

The RF test items, utility "Tera Term Tool" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.





### 3 Test Result

#### 3.1 Maximum Conducted Output Power Measurement

##### 3.1.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

**For the 5.15–5.25 GHz bands:**

- For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

**For the 5.25–5.725 GHz bands:**

- The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.


##### 3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where x is the duty cycle.

### 3.1.4 Test Setup

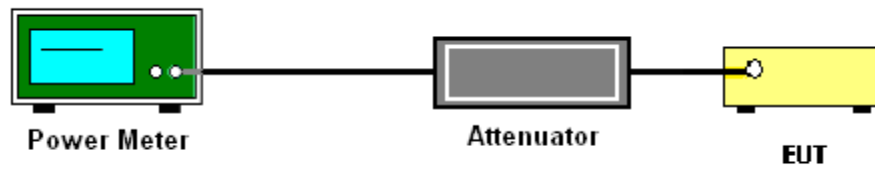

### 3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.<sup>4</sup>

**Note 3:** An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

**Note 4:** Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW ≥ 3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold




(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
  3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
  4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
  5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
  6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
  7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.2.4 Test Setup


For radiated emissions below 30MHz

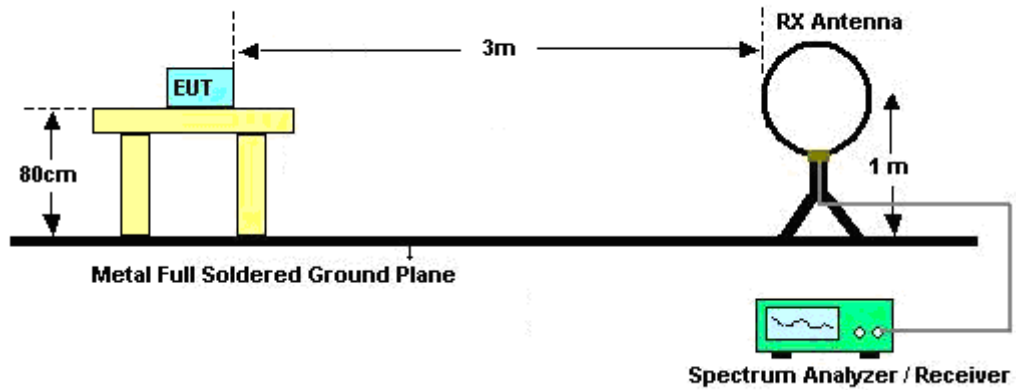

For radiated emissions from 30MHz to 1GHz

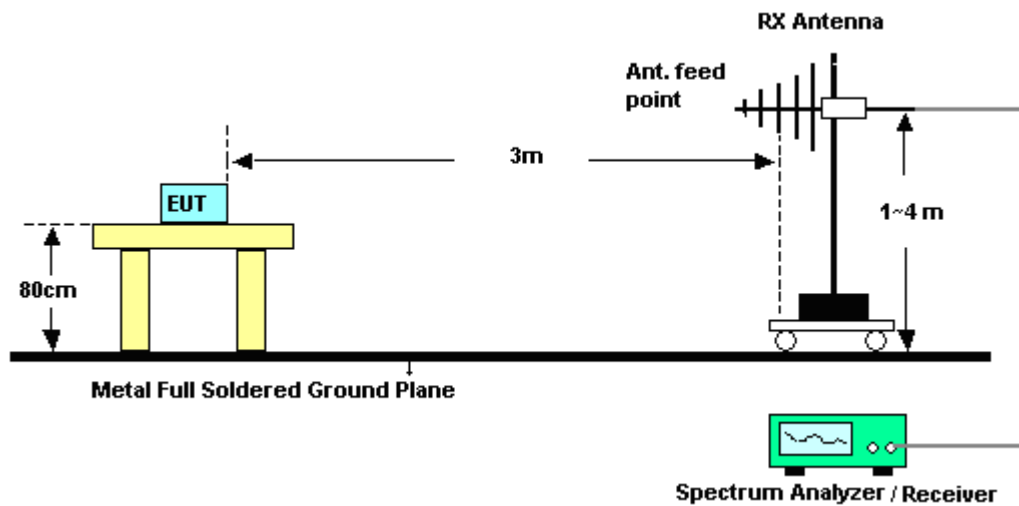

For radiated emissions above 1GHz

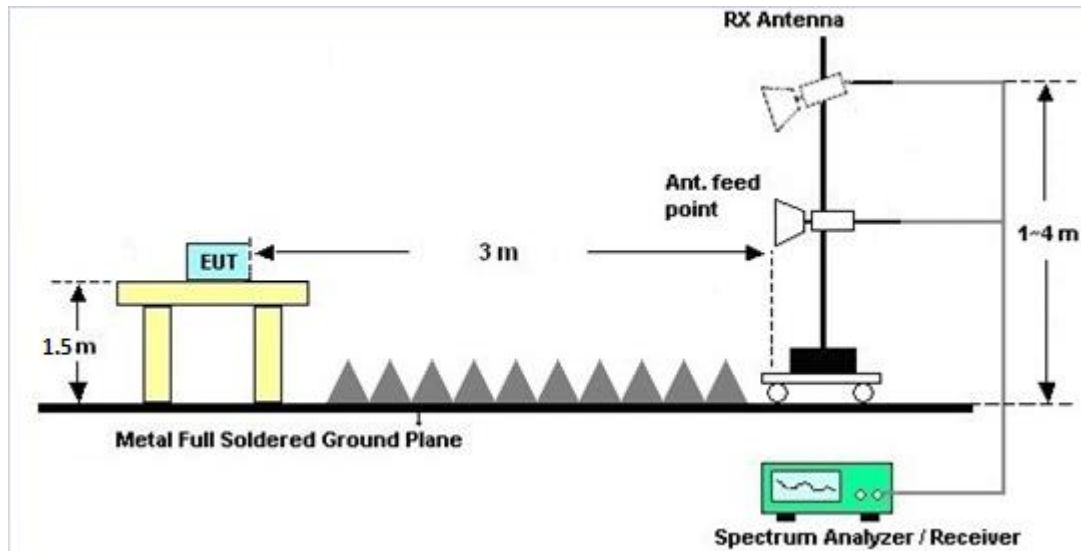

### 3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.2.7 Duty Cycle

Please refer to Appendix D.

### 3.2.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



### **3.3 Automatically Discontinue Transmission**

#### **3.3.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

#### **3.3.2 Measuring Instruments**

See list of measuring equipment of this test report.

#### **3.3.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.





## **3.4 Antenna Requirements**

### **3.4.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.4.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.4.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	May 22, 2018~ Jun. 06, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz z	Sep. 07, 2017	May 22, 2018~ Jun. 06, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	May 22, 2018~ Jun. 06, 2018	Jun. 19, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Mar. 01, 2018	May 22, 2018~ Jun. 06, 2018	Feb. 28, 2019	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Jun. 21, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	Jun. 21, 2018	Aug. 22, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Jun. 21, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 25, 2018	Jun. 21, 2018	Apr. 24, 2019	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~ 26.5GHz	Oct. 30, 2017	Jun. 21, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Apr. 17, 2018	Jun. 21, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jun. 21, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 21, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 21, 2018	Jul. 17, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY532900 53	20Hz to 26.5GHz	Jan. 16, 2018	Jun. 21, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8- 24	N/A	N/A	N/A	Jun. 21, 2018	N/A	Radiation (03CH07-HY)
Amplifier	SONOMA	310N	187231	9kHz~1GHz	Jan. 08, 2018	Jun. 21, 2018	Jan. 07, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Jun. 21, 2018	Nov. 26, 2018	Radiation (03CH07-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.70
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.50
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Allen Lin	Temperature:	21~25	°C
Test Date:	2018/5/22~2018/6/6	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	0.29	-	12.31	-		24.00	-	3.30	-	Pass
11a	6Mbps	1	40	5200	0.29	-	12.25	-		24.00	-	3.30	-	Pass
11a	6Mbps	1	48	5240	0.29	-	12.70	-		24.00	-	3.30	-	Pass
HT20	MCS0	1	36	5180	0.34	-	12.46	-		24.00	-	3.30	-	Pass
HT20	MCS0	1	40	5200	0.34	-	12.41	-		24.00	-	3.30	-	Pass
HT20	MCS0	1	48	5240	0.34	-	12.48	-		24.00	-	3.30	-	Pass
HT40	MCS0	1	38	5190	0.46	-	12.39	-		24.00	-	3.30	-	Pass
HT40	MCS0	1	46	5230	0.46	-	12.48	-		24.00	-	3.30	-	Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band II															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	0.29	-	13.28	-		-	-	2.30	-	26.99	Pass
11a	6Mbps	1	60	5300	0.29	-	13.28	-		-	-	2.30	-	26.99	Pass
11a	6Mbps	1	64	5320	0.29	-	13.29	-		-	-	2.30	-	26.99	Pass
HT20	MCS0	1	52	5260	0.34	-	12.95	-		-	-	2.30	-	26.99	Pass
HT20	MCS0	1	60	5300	0.34	-	12.83	-		-	-	2.30	-	26.99	Pass
HT20	MCS0	1	64	5320	0.34	-	12.48	-		-	-	2.30	-	26.99	Pass
HT40	MCS0	1	54	5270	0.46	-	12.73	-		-	-	2.30	-	26.99	Pass
HT40	MCS0	1	62	5310	0.46	-	12.77	-		-	-	2.30	-	26.99	Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band III															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	0.29	-	13.12	-		-	-	2.10	-	26.99	Pass
11a	6Mbps	1	116	5580	0.29	-	13.11	-		-	-	2.10	-	26.99	Pass
11a	6Mbps	1	140	5700	0.29	-	12.75	-		-	-	2.10	-	26.99	Pass
HT20	MCS0	1	100	5500	0.34	-	12.66	-		-	-	2.10	-	26.99	Pass
HT20	MCS0	1	116	5580	0.34	-	12.44	-		-	-	2.10	-	26.99	Pass
HT20	MCS0	1	140	5700	0.34	-	12.46	-		-	-	2.10	-	26.99	Pass
HT40	MCS0	1	102	5510	0.46	-	12.63	-		-	-	2.10	-	26.99	Pass
HT40	MCS0	1	110	5550	0.46	-	12.62	-		-	-	2.10	-	26.99	Pass
HT40	MCS0	1	134	5670	0.46	-	12.21	-		-	-	2.10	-	26.99	Pass



## Appendix B. Radiated Spurious Emission

Test Engineer :	Nick Yu	Temperature :	22 ~ 24 °C
		Relative Humidity :	51 ~ 53 %

### Band 1 - 5150~5250MHz

#### WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 38 5190MHz		5140.66	58.97	-15.03	74	48.67	34.41	11.03	35.14	219	15	P	H
		5145.86	48.97	-5.03	54	38.67	34.41	11.03	35.14	219	15	A	H
	*	5190	103.83	-	-	93.41	34.46	11.1	35.14	219	15	P	H
	*	5190	95.69	-	-	85.27	34.46	11.1	35.14	219	15	A	H
		5366.48	48.73	-25.27	74	38.03	34.71	11.14	35.15	219	15	P	H
		5381.04	40.56	-13.44	54	29.82	34.74	11.15	35.15	219	15	A	H
		5146.38	60.17	-13.83	74	49.87	34.41	11.03	35.14	100	67	P	V
		5145.34	47.55	-6.45	54	37.25	34.41	11.03	35.14	100	67	A	V
	*	5190	101.27	-	-	90.85	34.46	11.1	35.14	100	67	P	V
	*	5190	92.97	-	-	82.55	34.46	11.1	35.14	100	67	A	V
		5388.32	48.37	-25.63	74	37.63	34.74	11.15	35.15	100	67	P	V
	5446.84	40.28	-13.72	54	29.41	34.83	11.2	35.16	100	67	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 1 5150~5250MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11n HT40 CH 38 5190MHz		10380	45.6	-28.4	74	50.86	37.21	16.85	59.32	100	0	P	H
		15570	49.97	-24.03	74	46.03	40.46	20.07	56.59	100	0	P	H
													H
													H
		10380	46.52	-27.48	74	51.78	37.21	16.85	59.32	100	0	P	V
		15570	48.67	-25.33	74	44.73	40.46	20.07	56.59	100	0	P	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz  
WIFI 802.11n HT40 (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11n HT40 LF		54.03	26.58	-13.42	40	44.43	12.67	1.28	31.8	100	0	P	H	
		79.95	25.36	-14.64	40	42.27	13.19	1.67	31.77			P	H	
		139.89	26.36	-17.14	43.5	38.67	17.43	1.98	31.72			P	H	
		640.2	29.52	-16.48	46	31.07	26.23	4.05	31.83			P	H	
		682.2	31.99	-14.01	46	33.41	26.26	4.16	31.84			P	H	
		949.6	32.26	-13.74	46	27.82	30.33	5.03	30.92			P	H	
														H
														H
														H
														H
														H
														H
			33.51	33.51	-6.49	40	41.56	22.57	1.21	31.83			P	V
			57	34.92	-5.08	40	53.31	12.12	1.28	31.79	100	0	P	V
			72.93	30.04	-9.96	40	47.55	12.59	1.68	31.78			P	V
			447.7	31.74	-14.26	46	37.02	22.95	3.43	31.66			P	V
			860.7	32.19	-13.81	46	29.86	29.03	4.82	31.52			P	V
			954.5	33.33	-12.67	46	28.59	30.59	5.03	30.88			P	V
														V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix C. Radiated Spurious Emission

Test Engineer :	Nick Yu	Temperature :	22 ~ 24 °C
		Relative Humidity :	51 ~ 53 %

### Note symbol



-L	Low channel location
-R	High channel location



Band 1 - 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 2 columns (WIFI, ANT) and 2 rows (Peak, Avg.). It contains spectral analysis plots for 'Horizontal' and 'Fundamental' views, showing Level (dBuV/m) vs Frequency (MHz) with various technical parameters and site information.

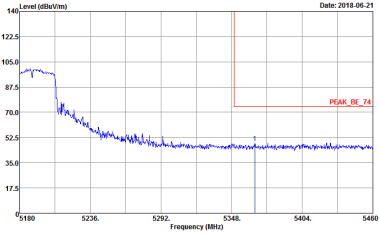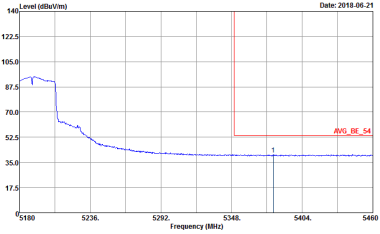



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL            Detector : RBW:1000.000KHz;VBW:3000.000KHz;SWT:Auto            Project : Peak            Mode : 850913            : 1</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL            Detector : RBW:1000.000KHz;VBW:3.000KHz;SWT:Auto            Project : Peak            Mode : 850913            : 1</p>	<p>Left blank</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
1	Vertical	Fundamental
<b>Peak</b>	<p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Project : Peak            Mode : 850913            : 1</p>	<p>Site : 03CH07-HY            Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Project : Peak            Mode : 850913            : 1</p>
<b>Avg.</b>	<p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Project : Peak            Mode : 850913            : 1</p>	<b>Left blank</b>



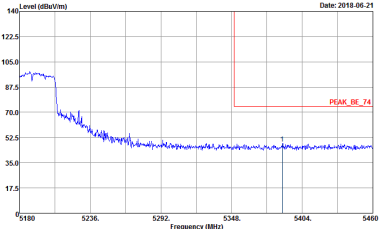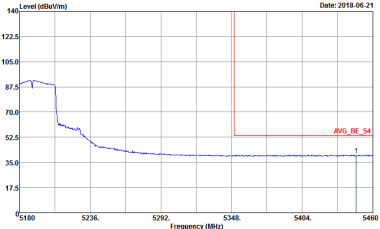

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000KHz;VBW:3000.000KHz;SWT:Auto            Project : Peak            Project : 850913            Mode : 1</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH07-HY            Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000KHz;VBW:3.000KHz;SWT:Auto            Project : Peak            Project : 850913            Mode : 1</p>	<p>Left blank</p>



**Band 1 - 5150~5250MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Band 1 5150~5250MHz Harmonic @ 3m																																																																																																									
ANT	802.11n HT40 CH38 5190MHz																																																																																																									
1	Horizontal	Vertical																																																																																																								
<b>Peak</b>	<p>Site : 03CH07-1HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 850913 Mode : 1</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>DistAttenua</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>A/Pow</th> <th>T/Pov</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>dB</th> <th></th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>45.69</td> <td>-28.40</td> <td>74.00</td> <td>59.86</td> <td>37.21</td> <td>16.21</td> <td>59.32</td> <td>100</td> <td></td> <td></td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>15730.00</td> <td>49.97</td> <td>-24.03</td> <td>74.00</td> <td>46.03</td> <td>40.46</td> <td>19.64</td> <td>54.59</td> <td>100</td> <td></td> <td></td> <td>0 Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	DistAttenua	Cable	Preamp	Loss	Factor	A/Pow	T/Pov	Remark	1	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	dB		dB		1	10380.00	45.69	-28.40	74.00	59.86	37.21	16.21	59.32	100			0 Peak	2	15730.00	49.97	-24.03	74.00	46.03	40.46	19.64	54.59	100			0 Peak	<p>Site : 03CH07-1HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 850913 Mode : 1</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>DistAttenua</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>A/Pow</th> <th>T/Pov</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>dB</th> <th></th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>46.52</td> <td>-27.43</td> <td>74.00</td> <td>51.99</td> <td>37.21</td> <td>16.21</td> <td>59.32</td> <td>100</td> <td></td> <td></td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>15730.00</td> <td>49.97</td> <td>-25.13</td> <td>74.00</td> <td>44.73</td> <td>40.46</td> <td>19.64</td> <td>54.59</td> <td>100</td> <td></td> <td></td> <td>0 Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	DistAttenua	Cable	Preamp	Loss	Factor	A/Pow	T/Pov	Remark	1	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	dB		dB		1	10380.00	46.52	-27.43	74.00	51.99	37.21	16.21	59.32	100			0 Peak	2	15730.00	49.97	-25.13	74.00	44.73	40.46	19.64	54.59	100			0 Peak
	Peak	Freq	Level	Limit	Line	DistAttenua	Cable	Preamp	Loss	Factor	A/Pow	T/Pov	Remark																																																																																													
1	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	dB		dB																																																																																															
1	10380.00	45.69	-28.40	74.00	59.86	37.21	16.21	59.32	100			0 Peak																																																																																														
2	15730.00	49.97	-24.03	74.00	46.03	40.46	19.64	54.59	100			0 Peak																																																																																														
Peak	Freq	Level	Limit	Line	DistAttenua	Cable	Preamp	Loss	Factor	A/Pow	T/Pov	Remark																																																																																														
1	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	dB		dB																																																																																															
1	10380.00	46.52	-27.43	74.00	51.99	37.21	16.21	59.32	100			0 Peak																																																																																														
2	15730.00	49.97	-25.13	74.00	44.73	40.46	19.64	54.59	100			0 Peak																																																																																														




Emission below 1GHz  
5GHz WIFI 802.11n HT40 (LF)

WIFI	5GHz WIFI	
ANT	802.11n HT40 LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-1HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 850913 Mode : 3</p>	<p>Site : 03CH07-1HY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 850913 Mode : 3</p>






802.11n HT20

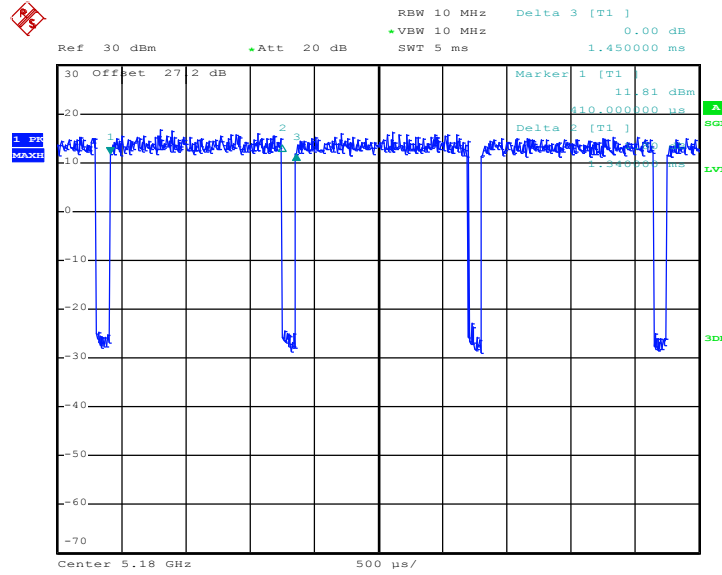

Date: 22.MAY.2018 15:31:22

802.11n HT40

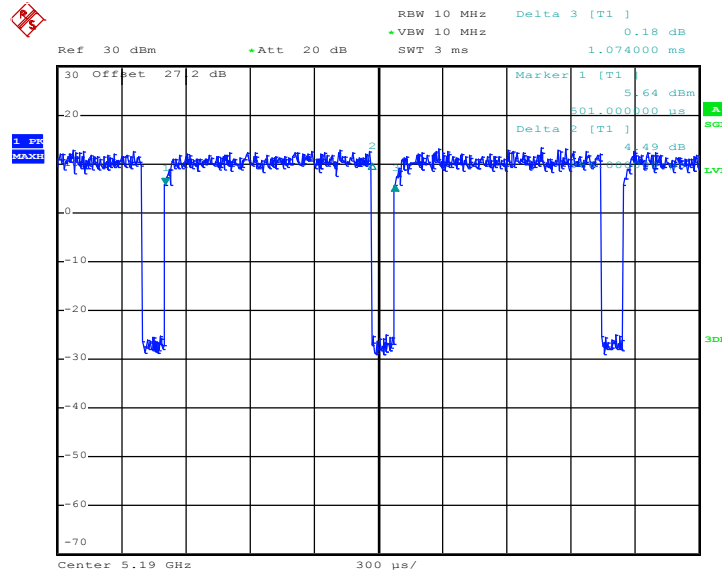

Date: 22.MAY.2018 15:35:26