

VARIANT FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.225

Equipment : **Point of Sale Terminal**
Brand Name : **VeriFone**
Model No. : **VX520 CTLS/VX520**
Filing Type : **Existing Change**
Applicant : **VeriFone Inc.**
1400 West Stanford Ranch Road Suite 200 Rocklin CA
95765 USA
FCC ID : **B32VX520CTLS**
Manufacturer : **1. Inventec Appliances (Pudong) Co., Ltd.**
No. 789, Pu Xing Road, Shanghai, P.R.C.
2. Sanmina-SCI Systems (Kunshan) Co., Ltd.
312, Qingyang South Road, Economics & Technical
Development Zone, Kunshan, Jiangsu Province,
215300, China
Received Date : Oct. 21, 2012
Final Test Date : Jan. 02, 2013

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003 and ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1. SUMMARY OF THE TEST RESULT 2

2. GENERAL INFORMATION..... 3

2.1 Product Details 3

2.2 Accessories 3

2.3 Table for Test Modes 4

2.4 Table for Testing Locations 5

2.5 Table for Supporting Units 5

2.6 Test Configurations 6

3. TEST RESULT 7

3.1 AC Power Line Conducted Emissions Measurement 7

3.2 Field Strength of Fundamental Emissions and Mask Measurement 14

3.3 20dB Spectrum Bandwidth Measurement 20

3.4 Radiated Emissions Measurement 25

3.5 Frequency Stability Measurement 36

3.6 Antenna Requirements 40

4. LIST OF MEASURING EQUIPMENT 41

5. TEST LOCATION..... 42

6. TAF CERTIFICATE OF ACCREDITATION..... 43

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.225

Equipment : **Point of Sale Terminal**

Brand Name : **VeriFone**

Model No. : **VX520 CTLS/VX520**

Applicant : **VeriFone Inc.**

1400 West Stanford Ranch Road Suite 200 Rocklin CA
95765 USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 21, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C					
Part	FCC Rule	IC Rule	Description of Test	Result	Under Limit
3.1	15.207	Gen 7.2.2	AC Power Line Conducted Emissions	Complies	6.10dB at 13.558MHz
3.2	15.225(a)(b)(c)	A2.6	Field Strength of Fundamental Emissions	Complies	49.16dB at 13.560MHz
3.3	2.1049	-	20dB Spectrum Bandwidth	Complies	-
3.4	15.225(d) 15.209	A2.6	Radiated Emissions	Complies	3.50dB at 129.900MHz
3.5	15.225(e)	A2.6	Frequency Stability	Complies	-
3.6	15.203	-	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2. GENERAL INFORMATION

2.1 Product Details

For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	8 Vdc from Adapter 1 9.3 Vdc from Adapter 2 and Adapter 3
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	2.240kHz
Max. Field Strength	74.83dBuV/m
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (Ch. 1)
Antenna	PCB Antenna (Without any antenna connector)

2.2 Accessories

Specification of Accessory		
Adapter 1	Brand Name	VeriFone
	Model Name	Au-79DMu
	Power Rating	I/P: 100-240Vac, 50/60Hz, 0.5A ; O/P:8Vdc, 2.25A
	Power Cord	1.8 meter, non-shielded cable, without ferrite core
Adapter 2	Brand Name	VeriFone
	Model Name	SM09003A
	Power Rating	I/P: 100-240Vac, 50/60Hz, 2A ; O/P:9.3Vdc, 4A
	Power Cord	1.8 meter, non-shielded cable, with ferrite core
Adapter 3	Brand Name	VeriFone
	Model Name	CAE036092
	Power Rating	I/P: 100-240Vac, 50/60Hz, 1.2A ; O/P:9.3Vdc, 4A
	Power Cord	1.8 meter, non-shielded cable, with ferrite core



2.3 Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	CTX	-
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~30MHz	CTX	1
Radiated Emissions 9kHz~10 th Harmonic Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note:

- 1, CTX=continuously transmitting.
- 2, The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.



2.4 Table for Testing Locations

Test Site No.	Site Category	Location
CO05-HY	Conduction	Hwa Ya
TH02-HY	OVEN Room	Hwa Ya
03CH07-HY	SAC	Hwa Ya


Semi Anechoic Chamber (SAC).

2.5 Table for Supporting Units

Support Unit	Manufacturer	Model	FCC ID
Exchange	Sun Moon Star	SMS-4 PLUS	FCC DoC
5-Port Fast Ethernet Switch	D-Link	DES-1005A	FCC DoC
Notebook	DELL	Latitude E6320	FCC DoC
Point of Sale Terminal	VeriFone	VX570	FCC DoC
SD Card	SanDisk	MicroSD HC	N/A
iPod	Apple	A1285	FCC DoC
LCD Monitor	Dell	U2410	FCC DoC
USB Dongle	Kingston	Data Traveler	N/A

2.6 Test Configurations


<AC Conducted Emissions>

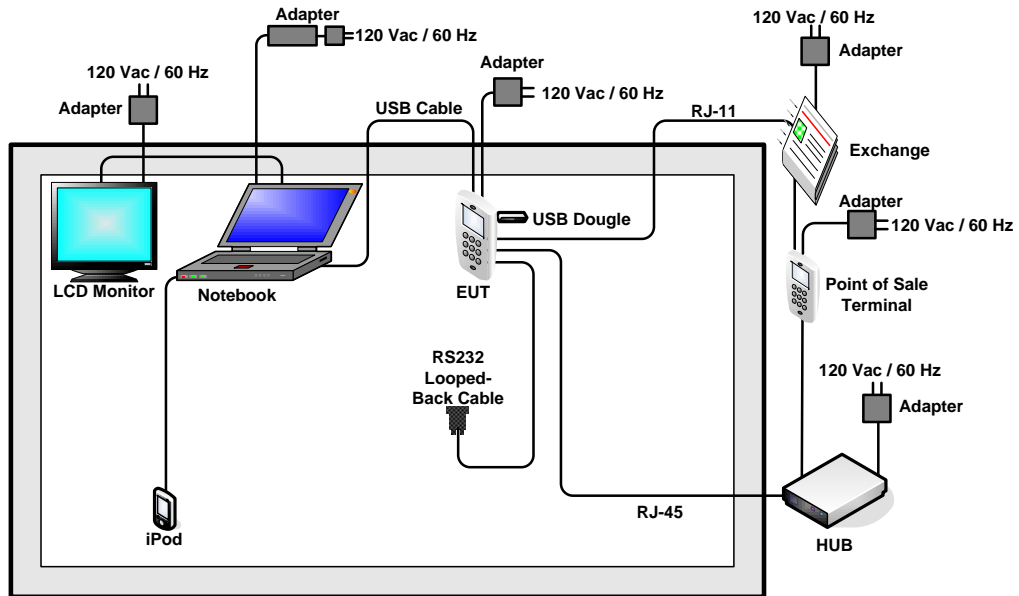

<Fundamental Emissions and Mask Measurement>

For radiated emissions 9kHz~30MHz/

For radiated emissions 30MHz~1GHz

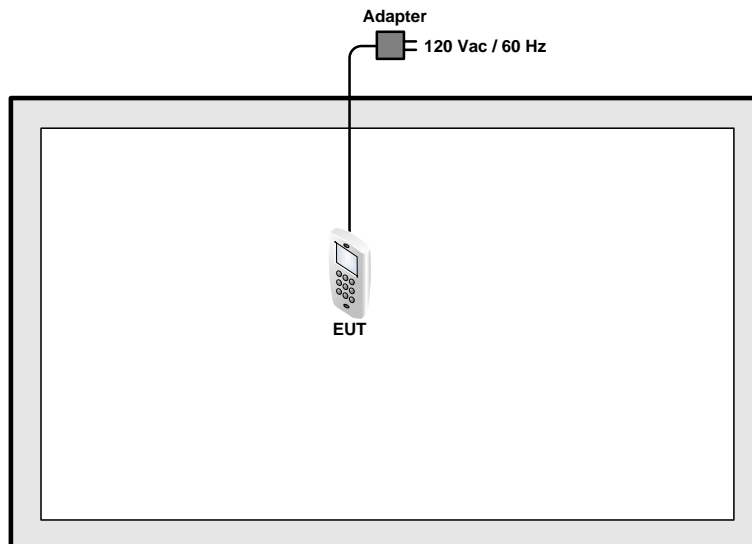

3. TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

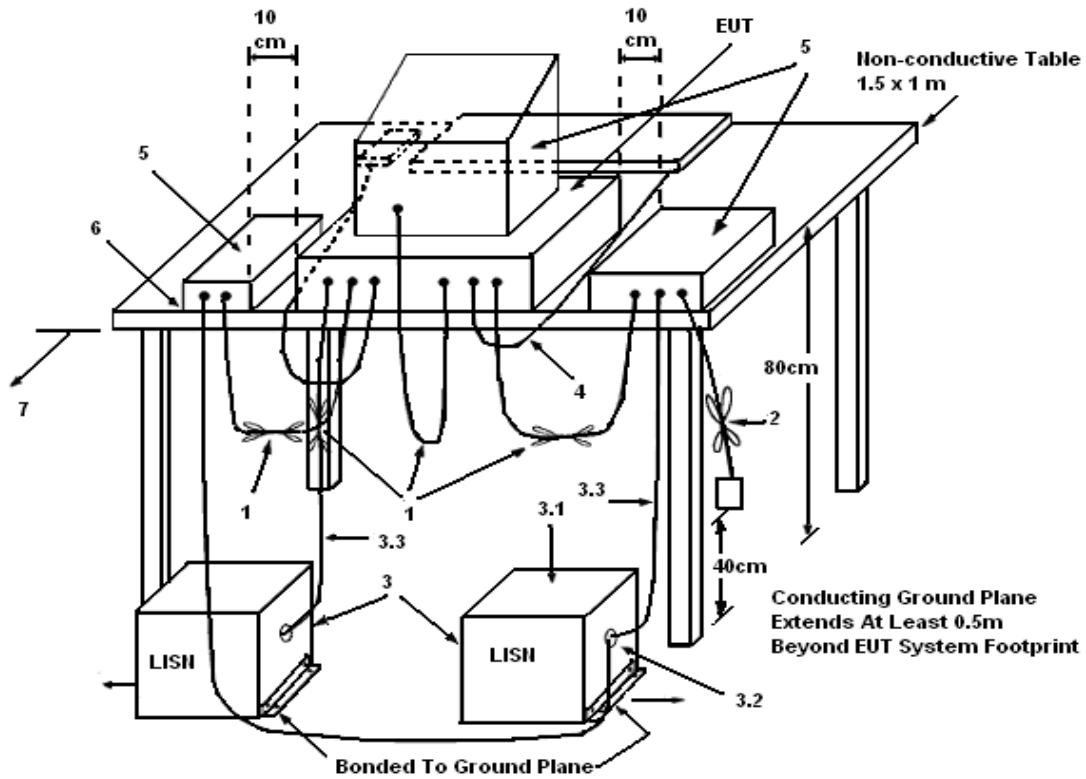

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.



3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in transmitting function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement

Final Test Date	Dec. 12, 2012 ~ Dec. 19, 2012	Test Site No.	CO05-HY
Temperature	20~22°C	Humidity	45~47%
Test Engineer	Slash Huang	Configuration	Transmitting Mode (13.56MHz)
Mode 1	NFC Tx + RJ-45 Idle + RJ-11 Link + Adapter 1 + MSR + Smart Card + Print + USB Dongle + Mini USB Cable Link with Notebook + RS232 Cable		

Line

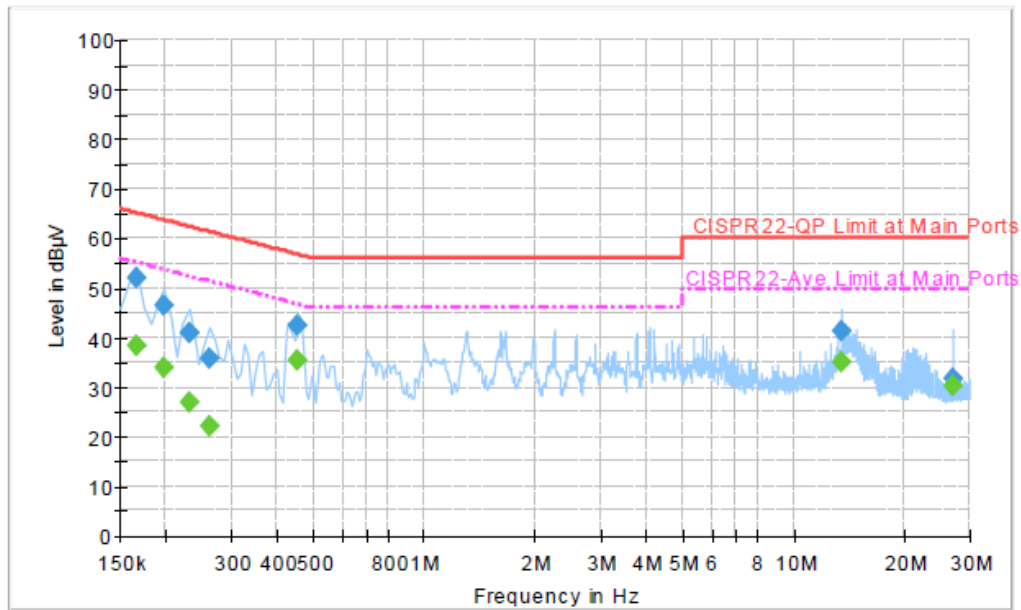


Final Result: Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	51.9	Off	L1	19.4	13.3	65.2
0.198000	46.5	Off	L1	19.4	17.2	63.7
0.230000	41.0	Off	L1	19.5	21.4	62.4
0.262000	35.8	Off	L1	19.4	25.6	61.4
0.454000	42.3	Off	L1	19.4	14.5	56.8
13.558000	41.2	Off	L1	19.8	18.8	60.0
27.118000	31.9	Off	L1	20.0	28.1	60.0

Final Result: Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	38.2	Off	L1	19.4	17.0	55.2
0.198000	33.9	Off	L1	19.4	19.8	53.7
0.230000	27.0	Off	L1	19.5	25.4	52.4
0.262000	22.1	Off	L1	19.4	29.3	51.4
0.454000	35.3	Off	L1	19.4	11.5	46.8
13.558000	35.2	Off	L1	19.8	14.8	50.0
27.118000	30.2	Off	L1	20.0	19.8	50.0

Neutral

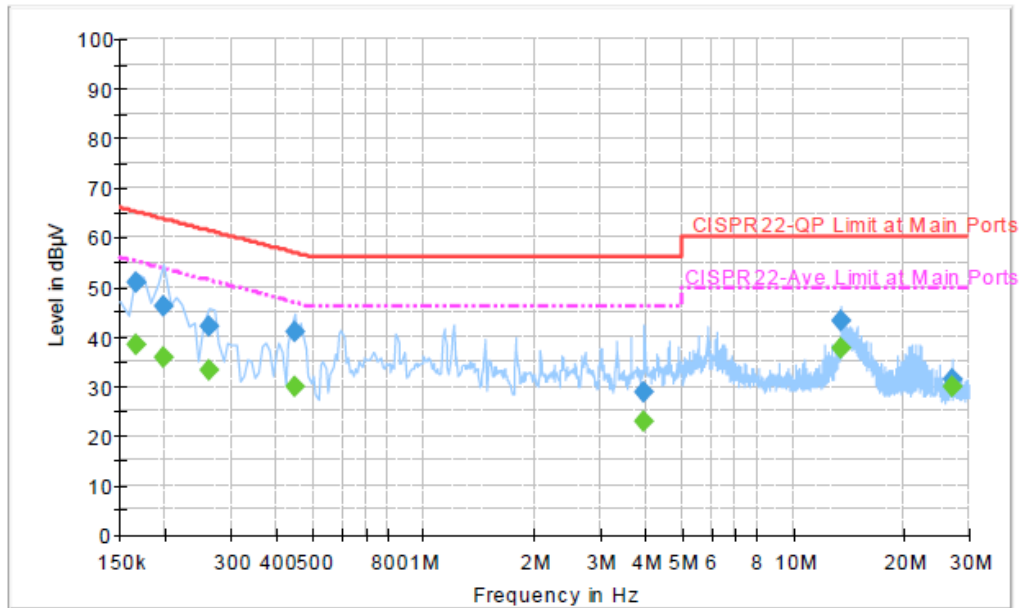

Final Result: Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	50.9	Off	N	19.4	14.3	65.2
0.198000	46.0	Off	N	19.4	17.7	63.7
0.262000	41.9	Off	N	19.5	19.5	61.4
0.446000	40.8	Off	N	19.4	16.1	56.9
3.966000	28.8	Off	N	19.7	27.2	56.0
13.558000	43.0	Off	N	19.9	17.0	60.0
27.118000	31.3	Off	N	20.1	28.7	60.0


Final Result: Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	38.4	Off	N	19.4	16.8	55.2
0.198000	35.9	Off	N	19.4	17.8	53.7
0.262000	33.3	Off	N	19.5	18.1	51.4
0.446000	29.8	Off	N	19.4	17.1	46.9
3.966000	22.8	Off	N	19.7	23.2	46.0
13.558000	37.6	Off	N	19.9	12.4	50.0
27.118000	29.9	Off	N	20.1	20.1	50.0



Final Test Date	Oct. 30, 2012	Test Site No.	CO05-HY
Temperature	20~22°C	Humidity	45~47%
Test Engineer	Slash Huang	Configuration	Transmitting Mode (13.56MHz)
Mode 2	NFC Tx + RJ-45 Idle + RJ-11 Link + Adapter 3 + MSR + Smart Card + Print + USB Dongle + Mini USB Cable Link with Notebook + RS232 Cable		

Line

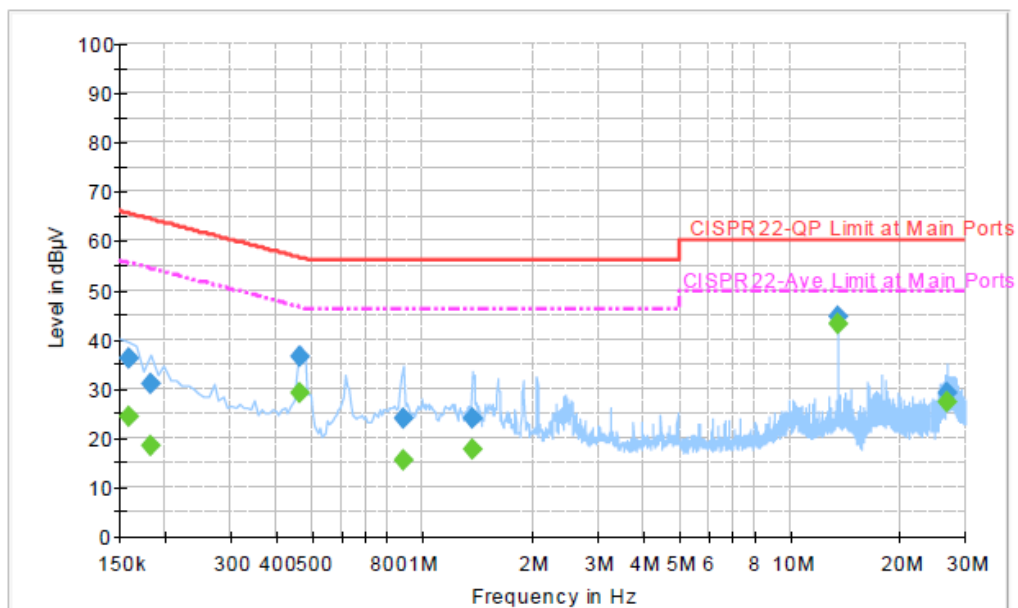


Final Result: Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	36.2	Off	L1	19.4	29.4	65.6
0.182000	31.1	Off	L1	19.4	33.3	64.4
0.462000	36.5	Off	L1	19.4	20.2	56.7
0.886000	24.0	Off	L1	19.4	32.0	56.0
1.366000	24.0	Off	L1	19.4	32.0	56.0
13.558000	44.5	Off	L1	19.6	15.5	60.0
26.638000	29.2	Off	L1	19.7	30.8	60.0

Final Result: Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	24.3	Off	L1	19.4	31.3	55.6
0.182000	18.4	Off	L1	19.4	36.0	54.4
0.462000	29.3	Off	L1	19.4	17.4	46.7
0.886000	15.6	Off	L1	19.4	30.4	46.0
1.366000	17.6	Off	L1	19.4	28.4	46.0
13.558000	43.2	Off	L1	19.6	6.8	50.0
26.638000	27.2	Off	L1	19.7	22.8	50.0

Neutral

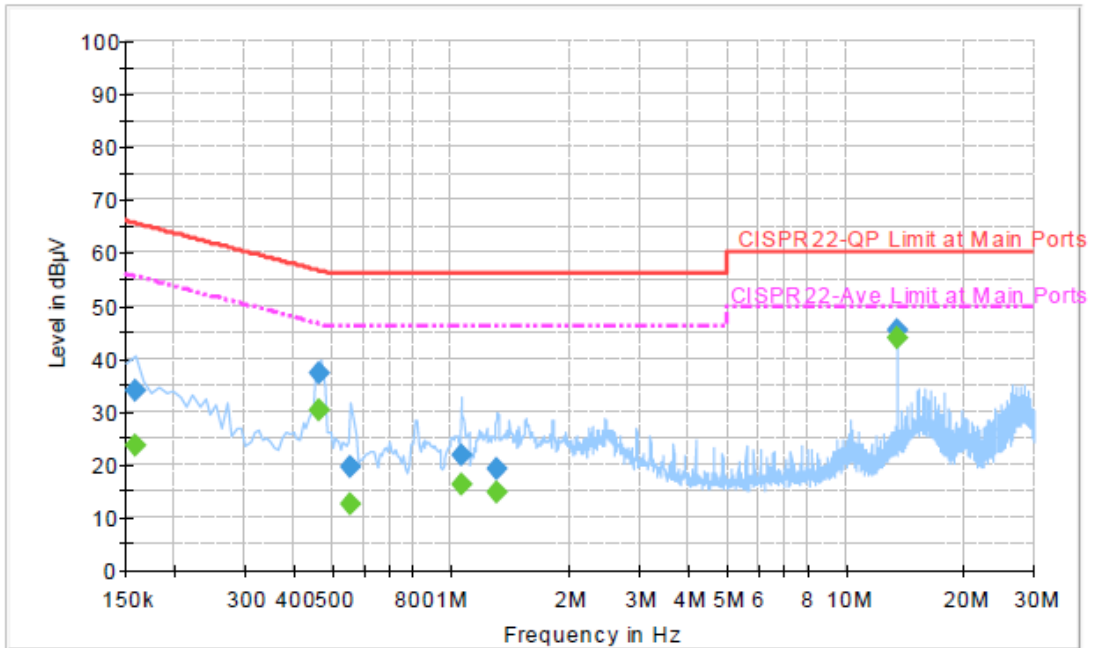

Final Result: Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	33.8	Off	N	19.4	31.8	65.6
0.462000	37.1	Off	N	19.4	19.6	56.7
0.558000	19.7	Off	N	19.4	36.3	56.0
1.062000	21.7	Off	N	19.5	34.3	56.0
1.310000	19.0	Off	N	19.5	37.0	56.0
13.558000	45.4	Off	N	19.7	14.6	60.0

Final Result: Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	23.5	Off	N	19.4	32.1	55.6
0.462000	30.2	Off	N	19.4	16.5	46.7
0.558000	12.6	Off	N	19.4	33.4	46.0
1.062000	16.4	Off	N	19.5	29.6	46.0
1.310000	14.6	Off	N	19.5	31.4	46.0
13.558000	43.9	Off	N	19.7	6.1	50.0

3.2 Field Strength of Fundamental Emissions and Mask Measurement

3.2.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters.

The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dBµV/m) at 10m	Field Strength (dBµV/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask limit:

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength (uV/m) at 30m	Field Strength (dBuV/m) at 30m	Field Strength (dBuV/m) at 10m	Field Strength (dBuV/m) at 3m
	1.705~13.110	30	29.5	48.58	69.5
	13.110~13.410	106	40.5	59.58	80.5
	13.410~13.553	334	50.5	69.58	90.5
	13.553~13.567	15848	84.0	103.08	124.0
	13.567~13.710	334	50.5	69.58	90.5
	13.710~14.010	106	40.5	59.58	80.5
	14.010~30.000	30	29.5	48.58	69.5

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 kHz
Detector	QP

3.2.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz.

3.2.4 Test Setup Layout

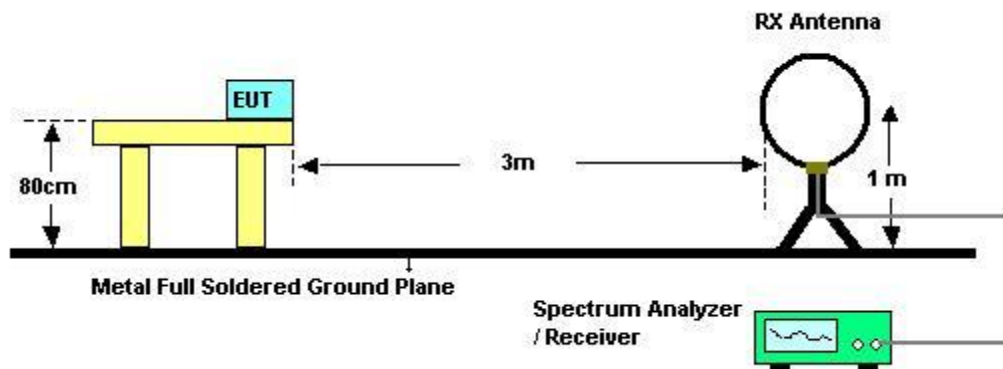

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.



3.2.7 Test Result of Field Strength of Fundamental Emissions

Mode 1 (EUT with Adapter 1):


Final Test Date	Dec. 15, 2012	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	51% ~ 53%
Test Engineer	Marlboro Hsu	Configurations	Ch. 1

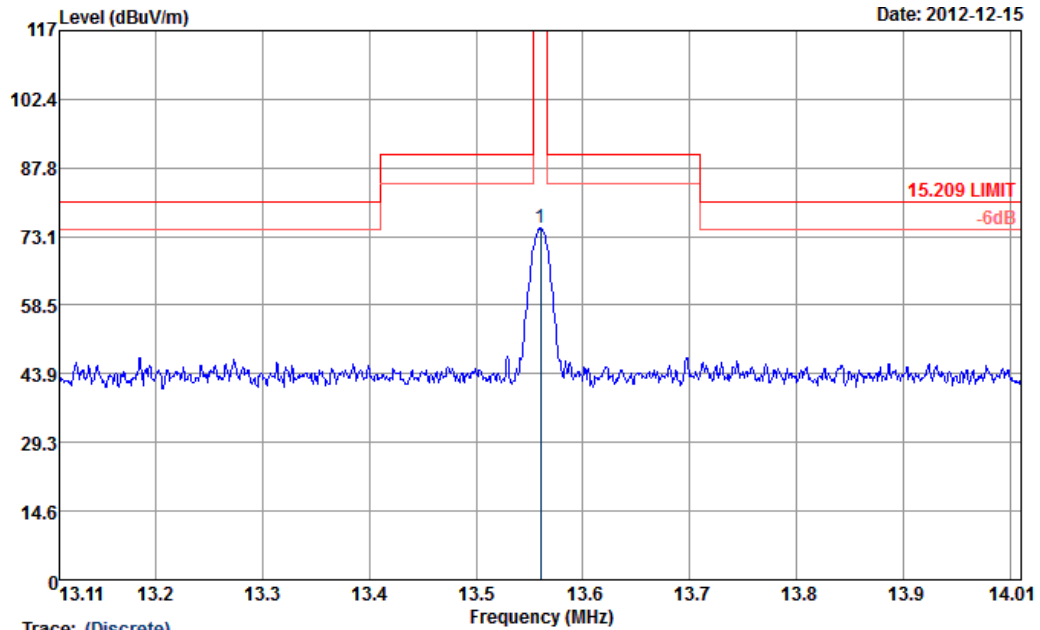

Trace: (Discrete)

Site : 03CH07-HY
 Condition : 15.209 LIMIT 3m NFC FACTOR(120912)-H HORIZONTAL
 Project : FR 202107-01
 Mode : 1

1	13.56	74.83	-49.16	123.99	54.68	19.75	0.40	0.00	100	360	QP
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg		
1	13.56	74.83	-49.16	123.99	54.68	19.75	0.40	0.00	100	360	QP

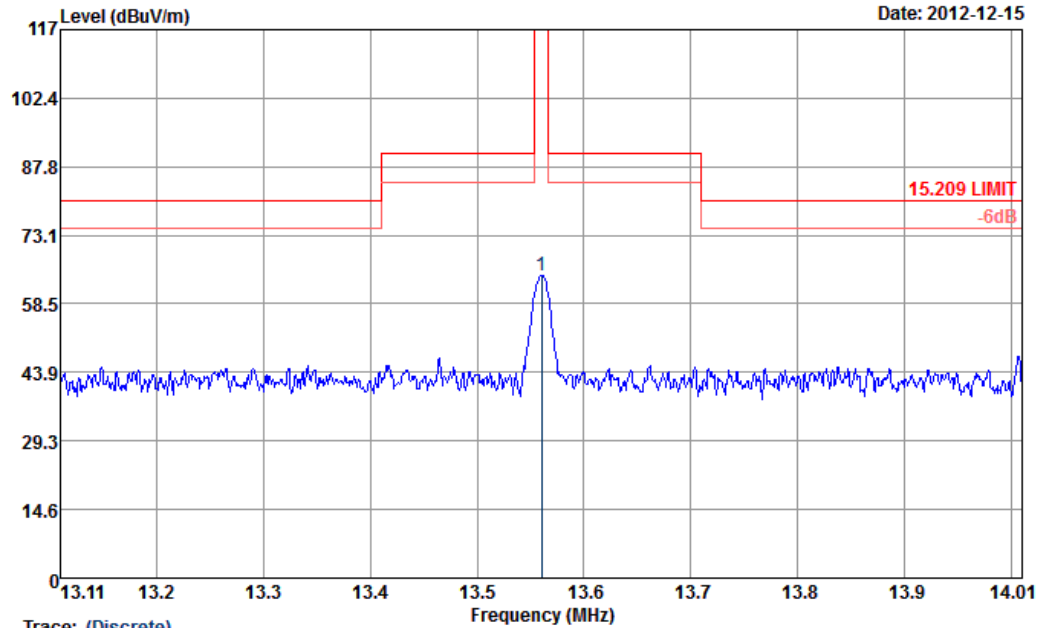

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : 15.209 LIMIT 3m NFC FACTOR(120912)-V VERTICAL
 Project : FR 202107-01
 Mode : 1

Trace	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	13.56	64.51	-59.48	123.99	44.36	19.75	0.40	0.00	100	82 QP

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Measured distance is 3m.

All emissions emit form non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.



Mode 2 (EUT with Adapter 3):


Final Test Date	Dec. 15, 2012	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	51% ~ 53%
Test Engineer	Marlboro Hsu	Configurations	Ch. 1

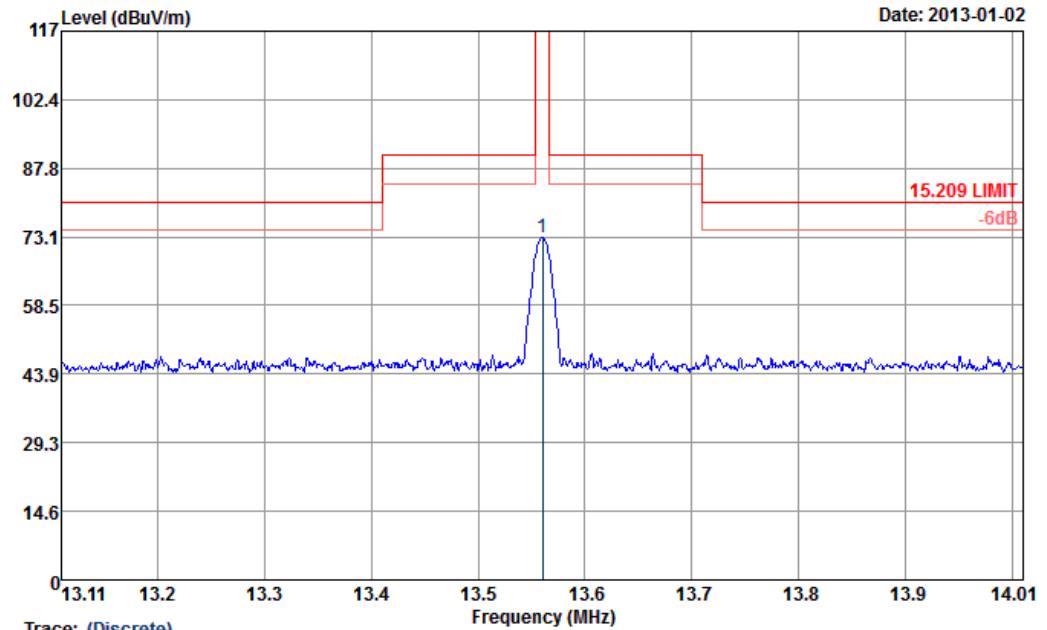

Trace: (Discrete)

Site : 03CH07-HY
 Condition : 15.209 LIMIT 3m NFC FACTOR(120912)-H HORIZONTAL
 Project : FR 202107-01
 Mode : 2

	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
Freq	Level	Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm deg	
1	13.56	72.97	-51.02	123.99	52.82	19.75	0.40	0.00	80 103 QP

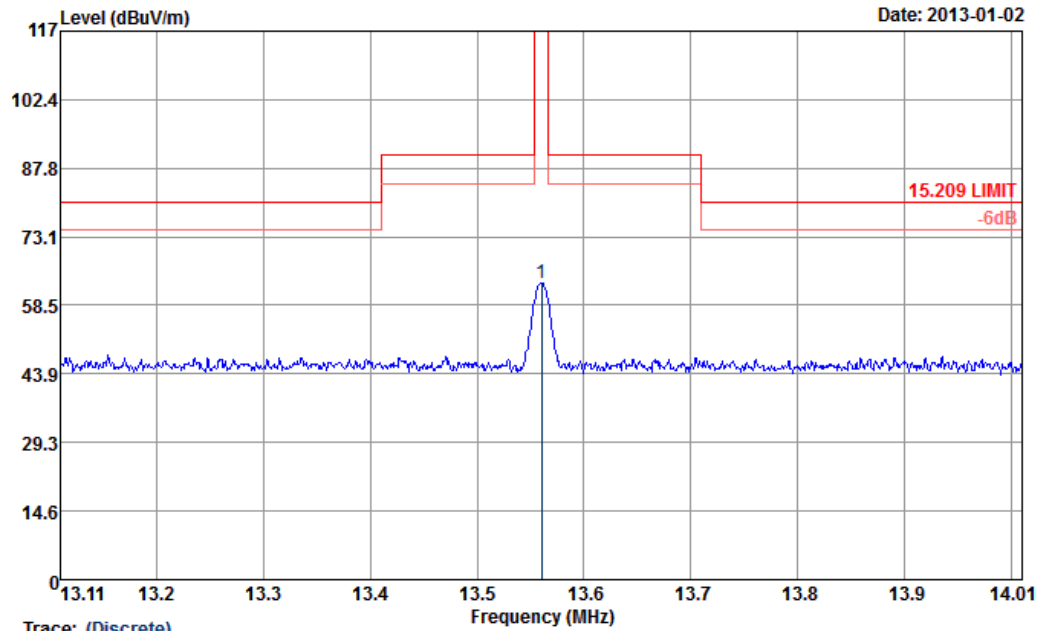

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : 15.209 LIMIT 3m NFC FACTOR(120912)-V VERTICAL
 Project : FR 202107-01
 Mode : 2

Trace	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	13.56	63.25	-60.74	123.99	43.10	19.75	0.40	0.00	80	0	QP

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Measured distance is 3m.

All emissions emit form non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

3.3 20dB Spectrum Bandwidth Measurement

3.3.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	1 kHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

3.3.4 Test Setup Layout

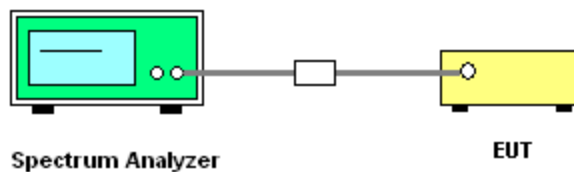

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.




3.3.7 Test Result of 20dB Spectrum Bandwidth

Mode 1 (EUT with Adapter 1):

Final Test Date	Dec. 18, 2012	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) $f_L > 13.553\text{MHz}$	Frequency range (MHz) $f_H < 13.567\text{MHz}$	Test Result
13.56 MHz	2.640	2.240	13.55858	13.56122	Complies


20 dB Bandwidth Plot on 13.56 MHz

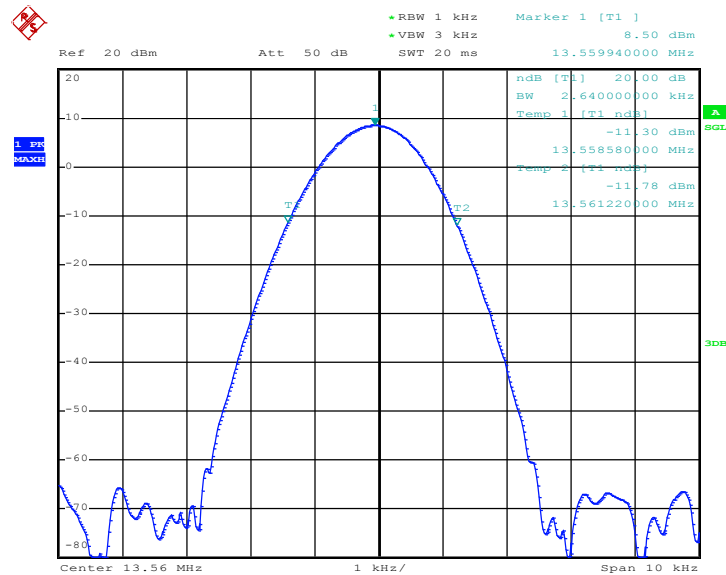

Date: 18.DEC.2012 05:16:31



99% Bandwidth Plot on 13.56 MHz

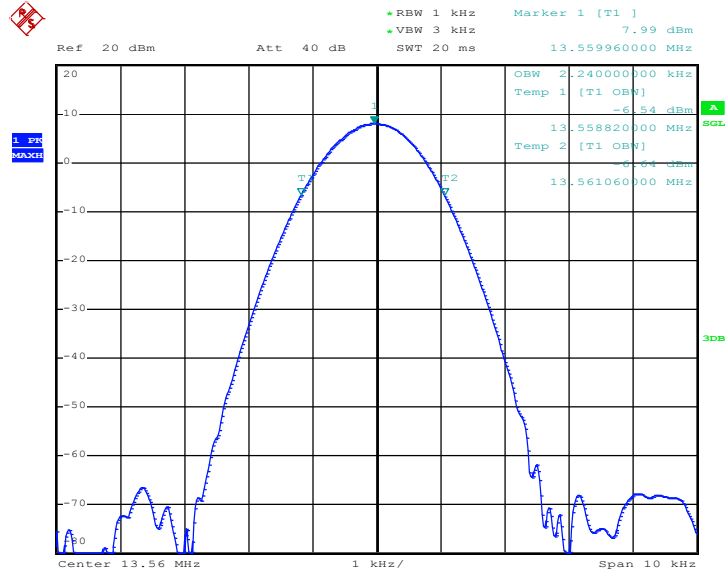

Date: 18.DEC.2012 06:19:08




Mode 2 (EUT with Adapter 3):

Final Test Date	Jan. 02, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) f _L > 13.553MHz	Frequency range (MHz) f _H < 13.567MHz	Test Result
13.56 MHz	2.640	2.260	13.55862	13.56126	Complies


20 dB Bandwidth Plot on 13.56 MHz

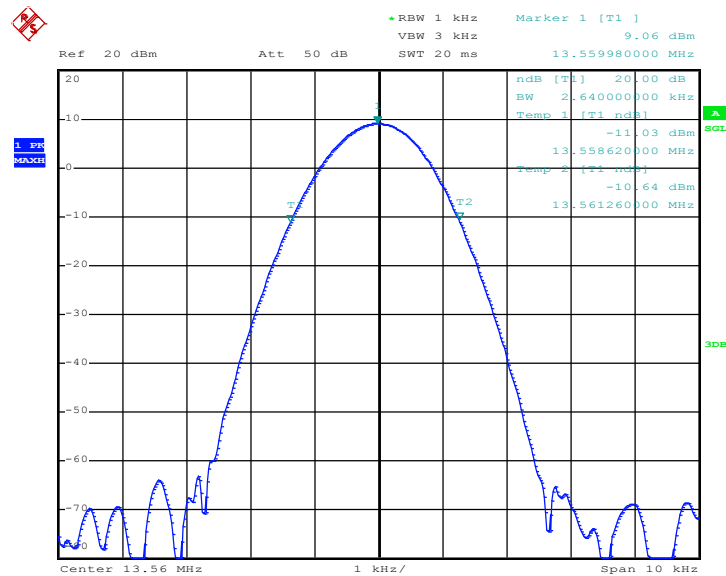

Date: 2.JAN.2013 05:55:09



99% Bandwidth Plot on 13.56 MHz

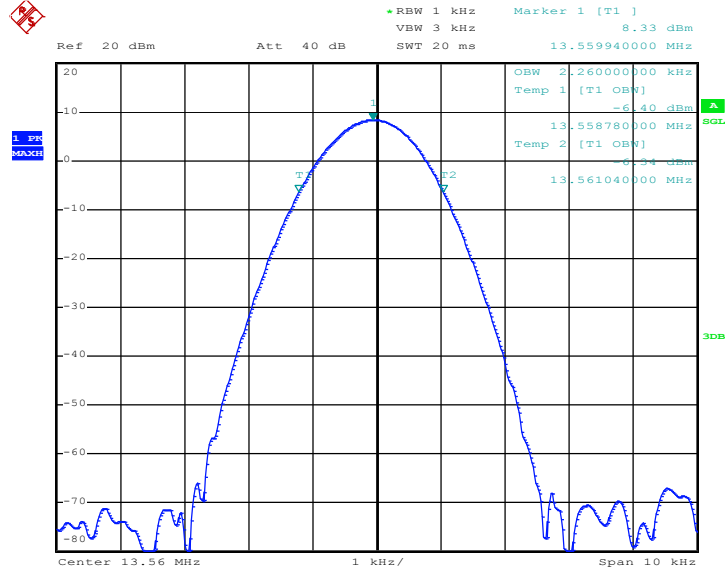

Date: 2.JAN.2013 06:55:55

3.4 Radiated Emissions Measurement

3.4.1 Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions,




and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4 Test Setup Layout

For radiated emissions below 30MHz

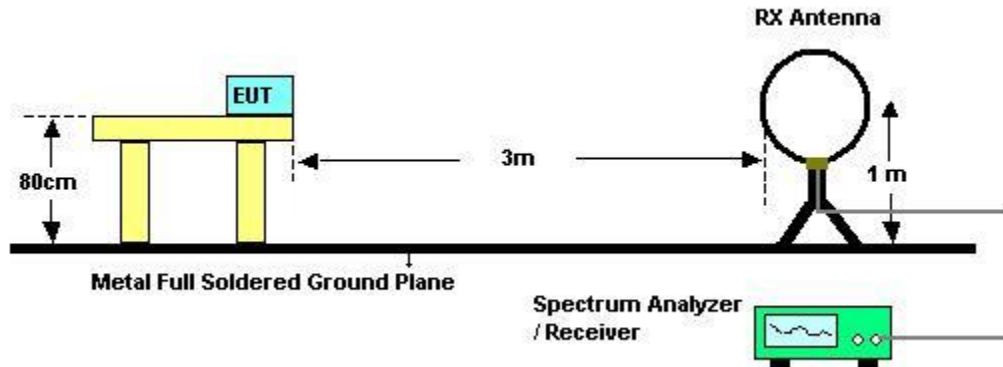

For radiated emissions above 30MHz

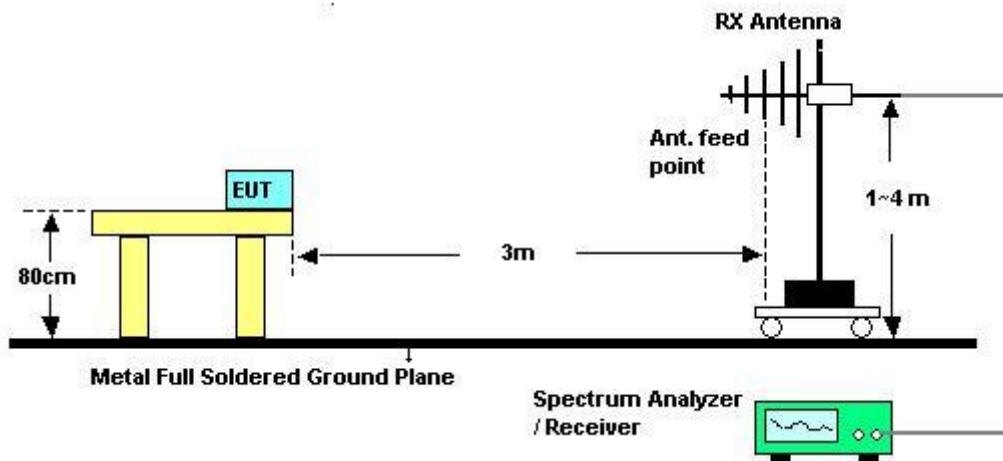

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.




3.4.7 Results of Radiated Emissions (9 kHz~30MHz)

Mode 1 (EUT with Adapter 1):

Final Test Date	Dec. 15, 2012	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	51~53%
Test Engineer	Marlboro Hsu	Configurations	Ch. 1

Horizontal

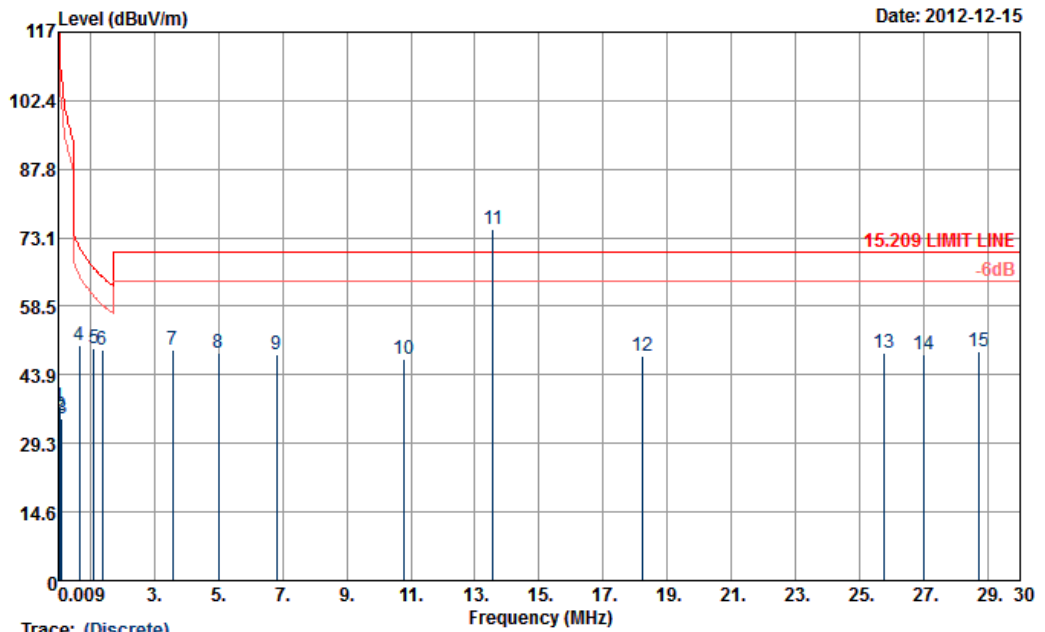


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : 15.209 LIMIT LINE 3m NFC FACTOR(120912)-H HORIZONTAL
 Project : FR 202107-01
 Mode : 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	0.05	37.07	-76.85	113.92	16.61	20.17	0.29	0.00	---	---	QP
2	0.08	35.06	-74.72	109.78	14.66	20.11	0.29	0.00	---	---	QP
3	0.11	34.49	-72.31	106.80	14.13	20.07	0.29	0.00	---	---	QP
4	0.66	50.16	-21.07	71.23	29.86	19.99	0.31	0.00	---	---	QP
5	1.11	49.38	-17.30	66.68	29.07	20.00	0.31	0.00	---	---	QP
6	1.39	49.12	-15.62	64.74	28.80	20.01	0.31	0.00	---	---	QP
7	3.58	49.10	-20.90	70.00	28.73	20.02	0.35	0.00	---	---	QP
8	5.01	48.62	-21.38	70.00	28.30	19.96	0.36	0.00	---	---	QP
9	6.81	48.08	-21.92	70.00	27.85	19.86	0.37	0.00	---	---	QP
10	10.81	47.37	-22.63	70.00	27.21	19.77	0.39	0.00	---	---	QP
11 *	13.56	74.83			54.68	19.75	0.40	0.00	---	---	QP
12	18.23	48.05	-21.95	70.00	27.69	19.94	0.42	0.00	---	---	QP
13	25.77	48.66	-21.34	70.00	27.80	20.39	0.47	0.00	---	---	QP
14	27.00	48.35	-21.65	70.00	27.48	20.39	0.48	0.00	---	---	QP
15	28.71	48.81	-21.19	70.00	28.02	20.28	0.51	0.00	---	---	QP



Vertical

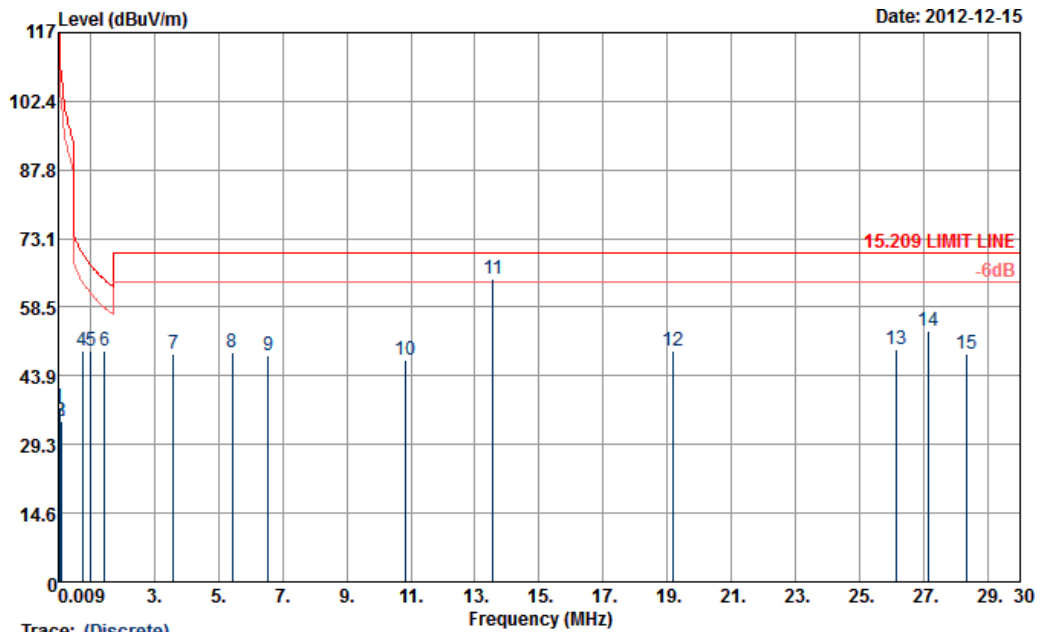

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : 15.209 LIMIT LINE 3m NFC FACTOR(120912)-V VERTICAL
 Project : FR 202107-01
 Mode : 1

	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	0.05	37.13	-76.79	113.92	16.67	20.17	0.29	0.00	---	---	QP
2	0.07	34.27	-76.32	110.59	13.87	20.11	0.29	0.00	---	---	QP
3	0.10	34.24	-73.31	107.55	13.88	20.07	0.29	0.00	---	---	QP
4	0.77	49.12	-20.76	69.88	28.81	20.00	0.31	0.00	---	---	QP
5	1.01	49.17	-18.33	67.50	28.86	20.00	0.31	0.00	---	---	QP
6	1.46	49.07	-15.25	64.32	28.75	20.01	0.31	0.00	---	---	QP
7	3.59	48.44	-21.56	70.00	28.07	20.02	0.35	0.00	---	---	QP
8	5.43	49.00	-21.00	70.00	28.71	19.93	0.36	0.00	---	---	QP
9	6.55	48.24	-21.76	70.00	28.00	19.87	0.37	0.00	---	---	QP
10	10.82	47.24	-22.76	70.00	27.08	19.77	0.39	0.00	---	---	QP
11 !	13.56	64.51			44.36	19.75	0.40	0.00	---	---	QP
12	19.17	49.25	-20.75	70.00	28.78	20.04	0.43	0.00	---	---	QP
13	26.16	49.42	-20.58	70.00	28.55	20.40	0.47	0.00	---	---	QP
14	27.13	53.58	-16.42	70.00	32.72	20.38	0.48	0.00	---	---	QP
15	28.34	48.51	-21.49	70.00	27.70	20.31	0.50	0.00	---	---	QP

Note:

1. Remark 11 is transmitter's fundamental signal.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



Mode 2 (EUT with Adapter 3):

Final Test Date	Jan. 02, 2013	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	51~53%
Test Engineer	Marlboro Hsu	Configurations	Ch. 1

Horizontal

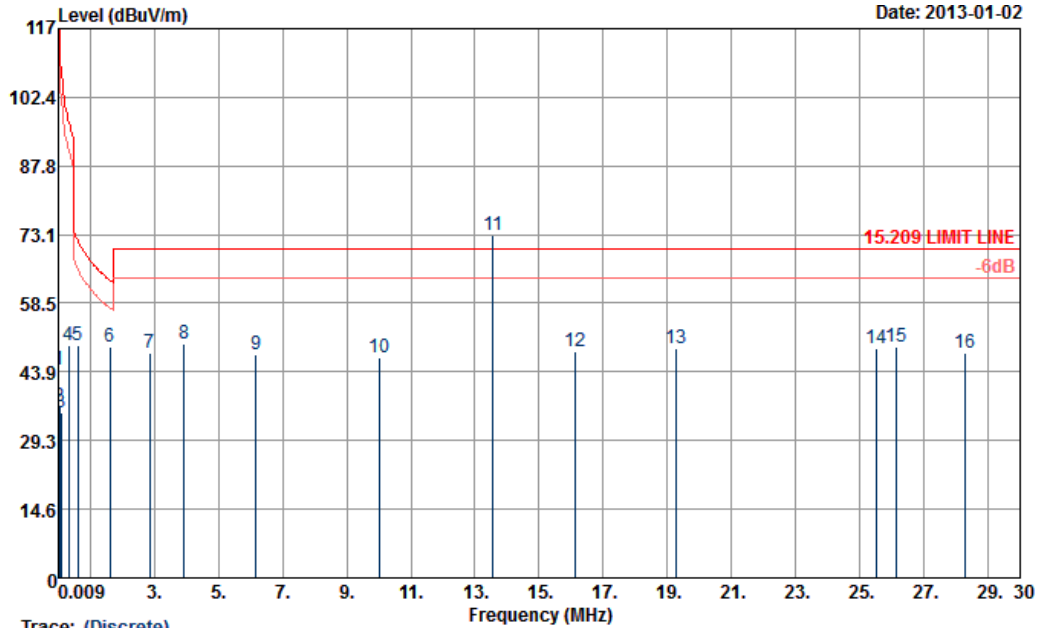


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : 15.209 LIMIT LINE 3m NFC FACTOR(120912)-H HORIZONTAL
 Project : FR 202107-01
 Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	0.02	44.38	-78.11	122.49	23.83	20.26	0.29	0.00	---	QP
2	0.05	36.36	-77.56	113.92	15.90	20.17	0.29	0.00	---	QP
3	0.10	35.34	-72.64	107.98	14.98	20.07	0.29	0.00	---	QP
4	0.32	49.59	-47.81	97.40	29.29	20.01	0.29	0.00	---	QP
5	0.61	49.64	-22.22	71.86	29.34	19.99	0.31	0.00	---	QP
6	1.61	49.26	-14.19	63.45	28.92	20.01	0.33	0.00	80	124 QP
7	2.86	47.97	-22.03	70.00	27.60	20.03	0.34	0.00	---	QP
8	3.93	49.89	-20.11	70.00	29.53	20.01	0.35	0.00	---	QP
9	6.18	47.63	-22.37	70.00	27.37	19.90	0.36	0.00	---	QP
10	10.01	46.84	-23.16	70.00	26.70	19.75	0.39	0.00	---	QP
11 *	13.56	72.97	---	---	52.82	19.75	0.40	0.00	---	QP
12	16.11	48.33	-21.67	70.00	28.13	19.79	0.41	0.00	---	QP
13	19.29	48.80	-21.20	70.00	28.31	20.06	0.43	0.00	---	QP
14	25.54	48.76	-21.24	70.00	27.90	20.39	0.47	0.00	---	QP
15	26.16	49.20	-20.80	70.00	28.33	20.40	0.47	0.00	---	QP
16	28.30	47.81	-22.19	70.00	27.00	20.31	0.50	0.00	---	QP



Vertical

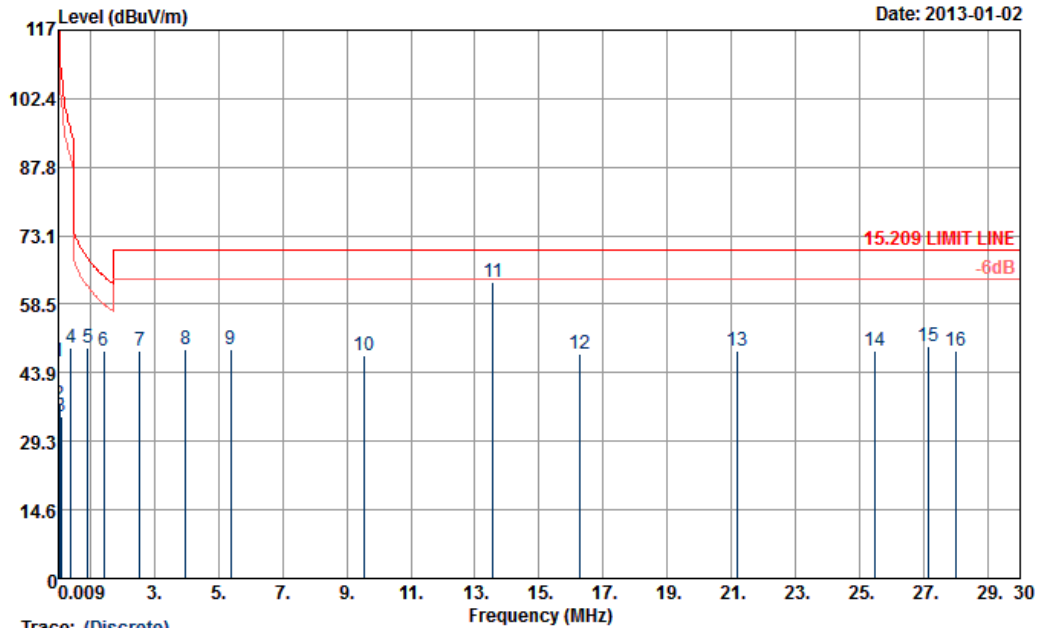

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : 15.209 LIMIT LINE 3m NFC FACTOR(120912)-V VERTICAL
 Project : FR 202107-01
 Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	0.02	46.14	-76.35	122.49	25.59	20.26	0.29	0.00	---	QP
2	0.04	37.27	-79.43	116.70	16.81	20.17	0.29	0.00	---	QP
3	0.09	34.49	-73.58	108.07	14.13	20.07	0.29	0.00	---	QP
4	0.40	49.16	-46.37	95.53	28.87	20.00	0.29	0.00	---	QP
5	0.93	49.08	-19.13	68.21	28.77	20.00	0.31	0.00	---	QP
6	1.42	48.72	-15.84	64.56	28.40	20.01	0.31	0.00	80	41 QP
7	2.54	48.58	-21.42	70.00	28.21	20.03	0.34	0.00	---	QP
8	3.97	48.86	-21.14	70.00	28.50	20.01	0.35	0.00	---	QP
9	5.39	48.75	-21.25	70.00	28.45	19.94	0.36	0.00	---	QP
10	9.55	47.45	-22.55	70.00	27.31	19.75	0.39	0.00	---	QP
11	13.56	63.25			43.10	19.75	0.40	0.00	---	QP
12	16.26	47.91	-22.09	70.00	27.71	19.79	0.41	0.00	---	QP
13	21.18	48.51	-21.49	70.00	27.83	20.25	0.43	0.00	---	QP
14	25.48	48.69	-21.31	70.00	27.86	20.38	0.45	0.00	---	QP
15	27.12	49.67	-20.33	70.00	28.81	20.38	0.48	0.00	---	QP
16	28.00	48.54	-21.46	70.00	27.70	20.34	0.50	0.00	---	QP

Note:

- Remark 11 is transmitter's fundamental signal.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.




3.4.8 Results for Radiated Emissions (30MHz~1GHz)

Mode 1 (EUT with Adapter 1):

Final Test Date	Dec. 15, 2012	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	51~53%
Test Engineer	Marlboro Hsu	Configurations	Ch.1

Horizontal

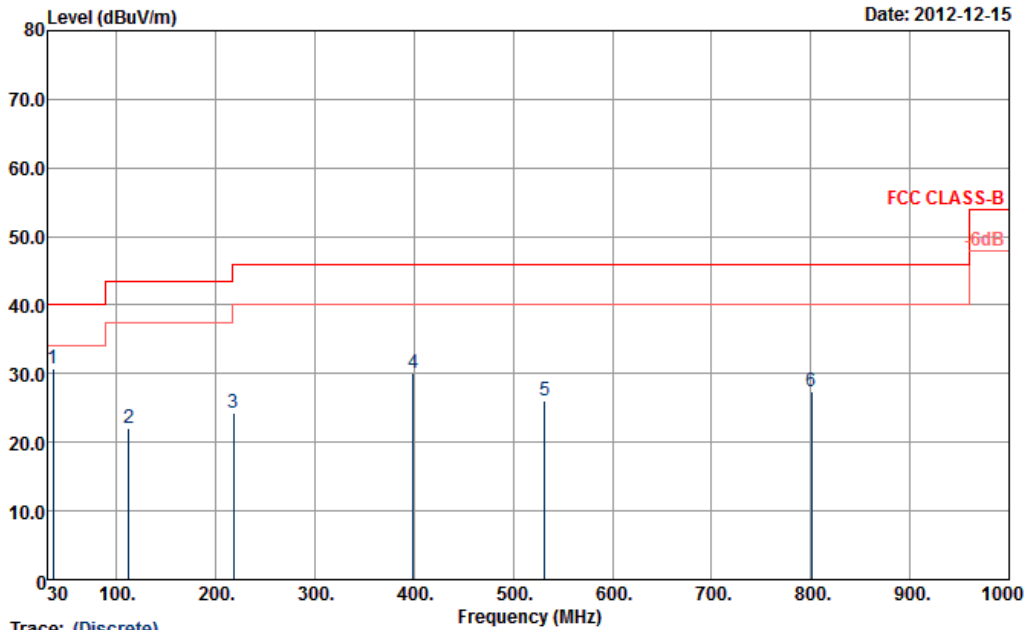


Trace: (Discrete)

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m LF-ANT(111116) HORIZONTAL
 Project : FR 202107-01
 Mode : 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	35.94	30.69	-9.31	40.00	46.14	15.82	0.59	31.86	100	89 QP
2	112.08	22.01	-21.49	43.50	41.69	10.98	1.06	31.72	---	--- QP
3	217.38	24.33	-21.67	46.00	43.90	10.31	1.40	31.28	---	--- QP
4	398.70	30.10	-15.90	46.00	43.50	15.97	2.14	31.51	---	--- QP
5	531.70	26.15	-19.85	46.00	36.14	18.63	2.51	31.13	---	--- QP
6	800.50	27.40	-18.60	46.00	32.32	22.10	3.14	30.16	---	--- QP



Vertical

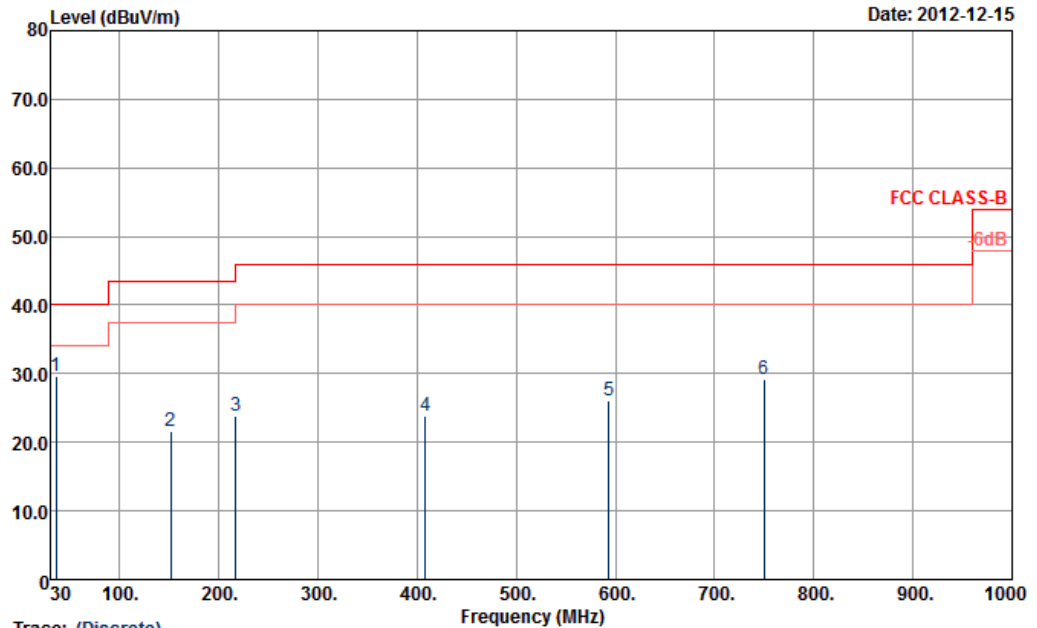

Trace: (Discrete)

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m LF-ANT(111116) VERTICAL
 Project : FR 202107-01
 Mode : 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	35.94	29.60	-10.40	40.00	45.05	15.82	0.59	31.86	100	56 QP
2	151.50	21.71	-21.79	43.50	40.76	11.13	1.21	31.39	---	--- QP
3	217.11	23.91	-22.09	46.00	43.48	10.31	1.40	31.28	---	--- QP
4	408.50	23.88	-22.12	46.00	36.94	16.18	2.17	31.41	---	--- QP
5	593.30	26.01	-19.99	46.00	34.30	19.68	2.67	30.64	---	--- QP
6	750.10	29.24	-16.76	46.00	35.37	21.34	3.06	30.53	---	--- QP

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.



Mode 2 (EUT with Adapter 3):

Final Test Date	Jan. 02, 2013	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	51~53%
Test Engineer	Marlboro Hsu	Configurations	Ch.1

Horizontal

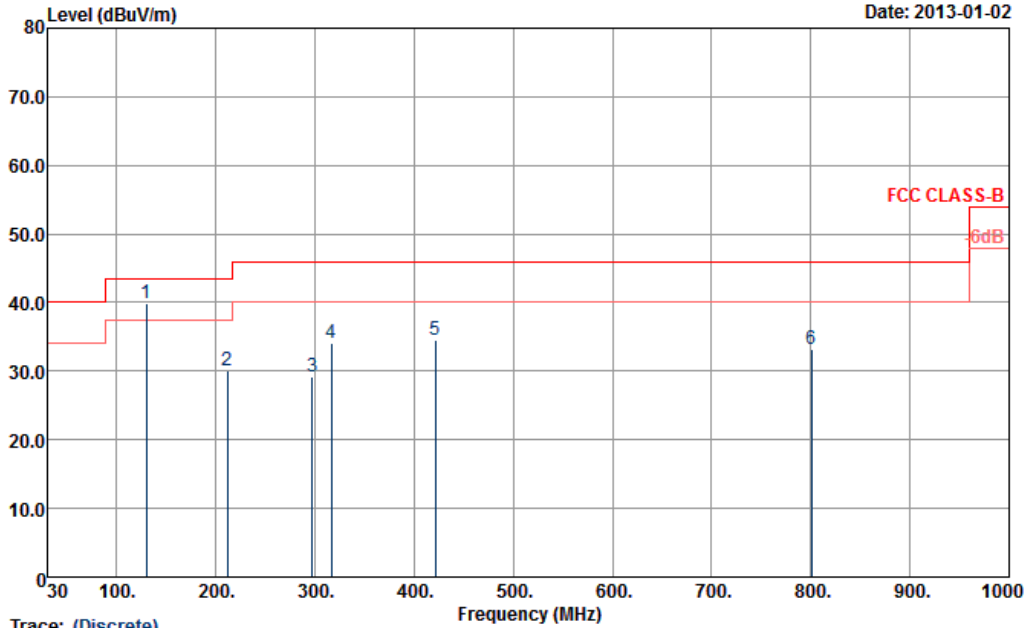


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B 3m LF-ANT(111116) HORIZONTAL
 Project : FR 202107-01
 Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	129.90	40.00	-3.50	43.50	58.82	11.60	1.15	31.57	100	74 QP
2	211.71	30.02	-13.48	43.50	50.12	9.91	1.37	31.38	---	---
3	297.03	29.18	-16.82	46.00	45.49	13.26	1.75	31.32	---	---
4	316.10	34.14	-11.86	46.00	49.74	13.75	1.80	31.15	---	---
5	421.10	34.60	-11.40	46.00	47.19	16.44	2.21	31.24	---	---
6	800.50	33.13	-12.87	46.00	38.05	22.10	3.14	30.16	---	---



Vertical

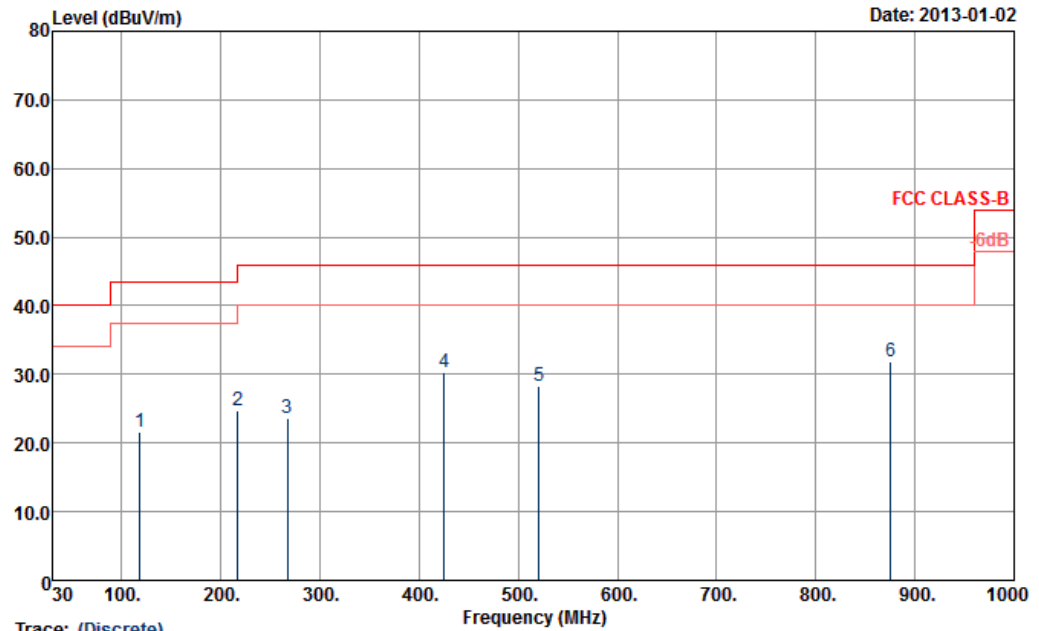

Trace: (Discrete)

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m LF-ANT(111116) VERTICAL
 Project : FR 202107-01
 Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	118.02	21.51	-21.99	43.50	40.55	11.52	1.09	31.65	---	QP
2	216.84	24.72	-21.28	46.00	44.29	10.31	1.40	31.28	---	QP
3	266.79	23.62	-22.38	46.00	40.46	12.83	1.62	31.29	---	QP
4	425.30	30.23	-15.77	46.00	42.67	16.55	2.23	31.22	---	QP
5	520.50	28.37	-17.63	46.00	38.47	18.45	2.49	31.04	---	QP
6	875.40	31.91	-14.09	46.00	36.43	22.86	3.31	30.69	100	6 QP

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.



3.5 Frequency Stability Measurement

3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

3.5.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

3.5.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

3.5.4 Test Setup Layout

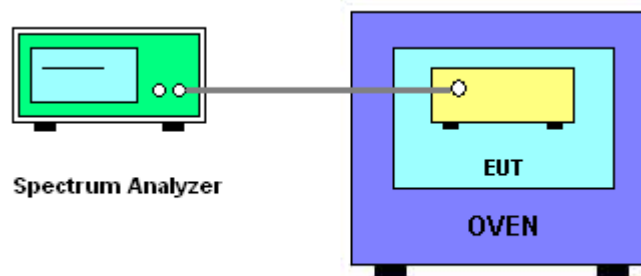

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.



3.5.7 Test Result of Frequency Stability

Mode 1 (EUT with Adapter 1):

Final Test Date	Dec. 18, 2012	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
120	13.55990
102	13.55990
138	13.55990
Max. Deviation (MHz)	13.55990
Max. Deviation (ppm)	-7.3746

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.55990
-10	13.55989
0	13.55988
10	13.55988
20	13.55988
30	13.55988
40	13.55990
50	13.55990
Max. Deviation (MHz)	13.55990
Max. Deviation (ppm)	-7.3746



Mode 2 (EUT with Adapter 3):

Final Test Date	Jan. 02, 2013	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Tommy Lee	Configurations	Ch. 1

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
120	13.55994
102	13.55992
138	13.55993
Max. Deviation (MHz)	13.55994
Max. Deviation (ppm)	-4.4248

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.55989
-10	13.55988
0	13.55990
10	13.55991
20	13.55988
30	13.55995
40	13.55988
50	13.55989
Max. Deviation (MHz)	13.55995
Max. Deviation (ppm)	-3.6873



3.6 Antenna Requirements

3.6.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.6.2 Antenna Connector Construction

Embedded in Antenna.



4. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Oct. 30, 2012 ~ Dec. 19, 2012	Sep. 02, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100081	9KHz ~ 30MHz	Dec. 09, 2011	Oct. 30, 2012 ~ Dec. 08, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100081	9KHz ~ 30MHz	Dec. 12, 2012	Dec. 12, 2012 ~ Dec. 19, 2012	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9KHz ~ 30MHz	Dec. 06, 2011	Oct. 30, 2012 ~ Dec. 05, 2012	Dec. 05, 2012	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9KHz ~ 30MHz	Dec. 06, 2012	Dec. 06, 2012 ~ Dec. 19, 2012	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Oct. 30, 2012 ~ Dec. 19, 2012	N/A	Conduction (CO05-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Dec. 18, 2012 ~ Jan. 02, 2013	Jun. 05, 2013	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 23, 2012	Dec. 18, 2012 ~ Jan. 02, 2013	Jul. 22, 2013	Conducted (TH02-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 06, 2012	Dec. 15, 2012 ~ Jan. 02, 2013	Oct. 05, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Nov. 30, 2012	Dec. 15, 2012 ~ Jan. 02, 2013	Nov. 29, 2013	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz. 32dB.GAIN	Feb. 27, 2012	Dec. 15, 2012 ~ Jan. 02, 2013	Feb. 26, 2013	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Dec. 15, 2012 ~ Jan. 02, 2013	Sep. 02, 2013	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Dec. 15, 2012 ~ Jan. 02, 2013	Jul. 02, 2014	Radiation (03CH07-HY)

5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085
KUNSHAN	ADD : No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL : +86-0512-5790-0158 FAX : +86-0512-5790-0958

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection
Accreditation Program for Telecommunication Equipment Testing Laboratory
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 11, 2011

P1, total 24 pages



Appendix A. Photographs of EUT

Please refer to Sporton report number EP202107-01 as below.