



RADIO TEST REPORT

Test Report No. : 26KE0022-HO-C

Applicant : **BROTHER INDUSTRIES, LTD.**

Type of Equipment : **Facsimile Machine**

Model No. : **FAX-2580C**

FCC ID : **B3Q8CAA20**

Test standard : **FCC Part 15 Subpart C
Section 15.207, Section 15.247: 2006**

Test Result : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.

Date of test:

July 21 to 27, 2006

Tested by:

Y. Yoshida

Yutaka Yoshida
EMC Services


T. Shimada

Takumi Shimada
EMC Services

Approved by :

Hironobu Shimoji

Hironobu Shimoji
Group Leader of
EMC Services

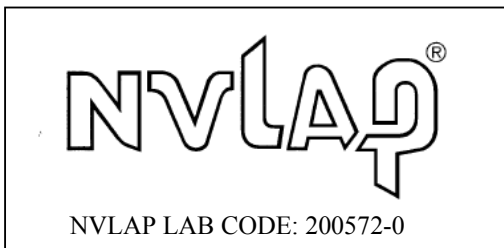

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://ulapex.jp/emc/nvlap.htm>

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

CONTENTS **PAGE**

SECTION 1: Client information 3
SECTION 2: Equipment under test (E.U.T.)..... 3
SECTION 3: Test specification, procedures & results..... 4
SECTION 4: Operation of E.U.T. during testing..... 7
SECTION 5: Conducted Emission..... 9
SECTION 6: Spurious Emission 10
SECTION 7: Bandwidth..... 11
SECTION 8: Maximum Peak Output Power 11
SECTION 9: Carrier Frequency Separation 11
SECTION 10: Number of Hopping Frequency 11
SECTION 11: Dwell time 11
APPENDIX 1: Photographs of test setup 12
 Conducted Emission 12
 Spurious Emission (Radiated) 13
 Worst Case Antenna Position (0deg.:Horizontal / 90deg.:Vertical)..... 14
APPENDIX 2: Data of EMI test..... 15
 Conducted Emission 15
 Carrier Frequency Separation 19
 20dB Bandwidth 21
 Number of Hopping Frequency..... 23
 Dwell time 25
 Maximum Peak Output Power 27
 Radiated Spurious Emission 28
 Conducted Spurious Emission..... 34
APPENDIX 3: Test Instruments 41

SECTION 1: Client information

Company Name	BROTHER INDUSTRIES,LTD.
Brand name	brother
Address	1-1-1, Kawagishi, Mizuho-ku, Nagoya 467-8562, Japan
Telephone Number	+81-52-824-2348
Facsimile Number	+81-52-824-2734
Contact Person	Katsuhiko Sato

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Facsimile Machine
Model No.	:	FAX-2580C
Serial No.	:	0001, 0002
Rating	:	AC100-120V
Country of Manufacture	:	China
Receipt Date of Sample	:	July 18, 2006
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No modification by the test lab.

2.2 Product Description

2.2.1 General Information

Feature of EUT	EUT is a compound device with the function of FAX, Scanner, Copy, Printer, and cordless phone.
Operation Clock	13.824 MHz

2.2.2 Radio Specification

Equipment Type	Transceiver
Frequency band	Low Channel = 5725.809328 MHz High Channel = 5848.889420 MHz
Bandwidth & Channel spacing	Bandwidth: 1MHz Channel spacing: 891.871kHz
Type of Modulation	FHSS
Antenna Type	1/4 lambda dipole antenna (installed outside) *1) Wire antenna (installed inside)
Antenna Connector Type	N/A
Antenna Gain	0.2 dBi (Max) : 1/4 lambda dipole antenna *1) 3.7 dBi (Max) : Wire antenna
Power Supply (inner/to RF Module)	DC +3.3V
Method of Frequency Generation	Synthesizer

*1) This antenna is used in priority to another antenna for this EUT system

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C : 2006
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits : 2006
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz : 2006

FCC 15.31 (e)

This EUT provides stable voltage(DC3.3V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.2 Procedures and results

[FHSS]

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin*0)	Results
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC: Section 15.207	-	N/A	5.7 dB 0.49465MHz, AV, L	Complied
2	Carrier Frequency Separation	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)	Conducted	N/A	See data.	Complied
3	20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)(ii)	Conducted	N/A		Complied
4	Number of Hopping Frequency	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)(ii)	Conducted	N/A		Complied
5	Dwell time	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(a)(1)(ii)	Conducted	N/A		Complied
6	Maximum Peak Output Power	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(b)(1)	Conducted	N/A		Complied
7	Band Edge Compliance	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(d)	Conducted	N/A		Complied
8	Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.247(d)	Conducted/ Radiated	N/A	4.8dB 3359.7MHz, AV Vertical	Complied

Note: UL Apex's EMI Work Procedures No.QPM05 and QPM15.

*0) The result is rounded off to the second decimal place. Therefore, there may be 0.1 difference for the result.

*These tests were also referred to FCC Public Notice DA 00-705 "Guidance on Measurement for Frequency Hopping Spread Spectrum Systems".

*These tests were performed without any deviations from test procedure except for additions or exclusions.

3.3 Additions or deviations to standards

No addition, deviation, nor exclusion has been made from standards.

3.4 Uncertainty

Conducted Emission

The measurement uncertainty (with a 95% confidence level) for this test is ± 2.6 dB.
The data listed in this test report has enough margin, more than the site margin.

Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.59 dB(3m)/ ± 4.58 dB(10m).
The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 4.62 dB(3m)/
 ± 4.60 dB(10m).

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.27 dB.
The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty (with a 95% confidence level) for this test is ± 3.0 dB.

3.5 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	IC4247A	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	655103	IC4247A-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	IC4247A-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	IC4247A-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	-
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 shielded room	-	-	6.0 x 6.0 x 3.9m	N/A	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	N/A	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	N/A	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3 and No.4 semi-anechoic chambers and No.7 shielded room.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The mode used for test : **[For Antenna terminal conducted test]**

-Hopping ON
Communication mode *1)

*1) FAX-2580C communicates with Digital Cordless Handset on wireless.


-Hopping OFF
Transmitting mode
Low Channel (ch 1) : 5725.809328MHz
Mid Channel (ch 71) : 5788.240269MHz
High Channel (ch 139) : 5848.889420MHz

[For Conducted emission test and Radiated emission test]

-Hopping OFF
Transmitting mode
Low Channel (ch 1) : 5725.809328MHz
Mid Channel (ch 71) : 5788.240269MHz
High Channel (ch 139) : 5848.889420MHz

Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.
However, the limit level 125mWof AFH mode was used for the test.

4.2 Configuration and peripherals

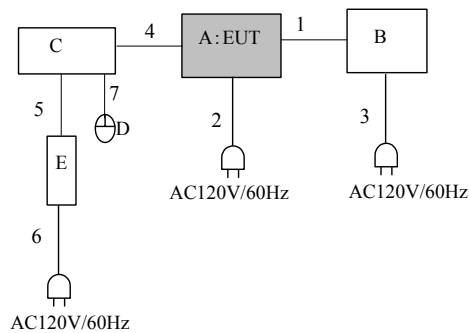

* Cabling and setup were taken into consideration and test data was taken under worst case conditions.

Description of Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Facsimile Machine	FAX-2580C	0001 *1), 0002 *2)	Brother	EUT
B	FAX equipment	FQ-70	17104455	Sharp	-
C	Notebook PC	PC-MJ720M	1V024403	Sharp	-
D	PS/2 Mouse	X06-08477	-	Microsoft	-
E	AC Adaptor	EA-RJ1V	NLD0107025900	Sharp	-

*1) For Radiated emission test, Conducted emission test

*2) For Antenna terminal conducted test

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	TEL Cable	1.5	Unshielded	Unshielded
2	AC Cable	1.8	Unshielded	Unshielded
3	AC Cable	1.8	Unshielded	Unshielded
4	USB Cable	3.0	Shielded	Shielded
5	DC Cable	1.8	Unshielded	Unshielded
6	AC Cable	1.8	Unshielded	Unshielded
7	Mouse Cable	2.0	Unshielded	Unshielded

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cable and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector	: CISPR quasi-peak and average detector (IF BW 9 kHz)
Measurement range	: 0.15-30MHz
Test data	: APPENDIX 2
Test result	: Pass

Date: July 26 and 27, 2006

Test engineer: Yutaka Yoshida

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2

Test result : Pass

[Radiated]

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 80cm above the conducting ground plane.

The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(Upper 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 and outside the restricted band of FCC15.205.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver / Spectrum Analyzer	Spectrum Analyzer
Detector	QP: BW 120kHz(T/R)	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth	20dBc : RBW: 100kHz VBW: 300kHz (S/A)	AV: RBW:1MHz/VBW:10Hz 20dBc : RBW:100kHz/VBW:300kHz

The test was made on EUT at the normal use position.

Test data : APPENDIX 2

Test result : Pass

Date: July 25 and 26, 2006

Test engineer: Yutaka Yoshida

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)

SECTION 7: Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 9: Carrier Frequency Separation

Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 10: Number of Hopping Frequency

Test Procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 11: Dwell time

Test Procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(14.06.06)