

FCC PART 15D  
MEASUREMENT AND TEST REPORT  
For  
**Porta Phone Company Inc.**

145 DEAN KNAUSS DRIVE, NARRAGANSETT, RI 02882, USA

**FCC ID: B4HCS1900**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Full Duplex Wireless Communication System - Base
<b>Test Engineer:</b> Jim Huang	<i>Jim Huang</i>
<b>Report Number:</b> RSZ11013081FP	
<b>Report Date:</b> 2011-04-08	
<b>Reviewed By:</b> Merry Zhao EMC Engineer	<i>Merry Zhao</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, NIST, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
JUSTIFICATION .....	6
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP .....	7
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>FCC §15.319 (I) &amp; §2.1091 - RF EXPOSURE INFORMATION.....</b>	<b>10</b>
LIMIT .....	10
TEST DATA .....	11
<b>FCC §15.317 &amp; §15.203 - ANTENNA REQUIREMENT .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.319 (E) - ANTENNA GAIN .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
<b>FCC §15.315 &amp; §15.207 – AC LINE CONDUCTED EMISSIONS.....</b>	<b>14</b>
MEASUREMENT UNCERTAINTY .....	14
EUT SETUP .....	14
EMI TEST RECEIVER SETUP.....	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE .....	15
TEST RESULTS SUMMARY.....	15
TEST DATA .....	15
<b>FCC §15.323 (A) - EMISSION BANDWIDTH.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA .....	19
<b>FCC §15.319 (C) - PEAK TRANSMIT POWER.....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
TEST PROCEDURE .....	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA .....	22
<b>FCC §15.319 (D) - POWER SPECTRAL DENSITY .....</b>	<b>24</b>
APPLICABLE STANDARD .....	24

TEST PROCEDURE .....	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA .....	25
<b>FCC §15.323 (D) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND.....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA .....	29
<b>FCC §15.319 (G) - RADIATED SPURIOUS EMISSIONS.....</b>	<b>39</b>
MEASUREMENT UNCERTAINTY .....	39
EUT SETUP.....	39
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST PROCEDURE .....	40
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	41
TEST RESULTS SUMMARY.....	41
TEST DATA .....	41
<b>FCC §15.323 (F) - FREQUENCY STABILITY .....</b>	<b>49</b>
APPLICABLE STANDARD .....	49
TEST PROCEDURE .....	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA .....	49
<b>FCC §15.323 &amp; §15.319(F) – SPECIFIC REQUIREMENTS FOR UPCS DEVICE .....</b>	<b>51</b>

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *PORTA PHONE CO., INC.*'s product, model number: *FLX2000 (FCC ID: B4HCS1900)* or the "EUT" as referred to in this report is a base of *FULL DUPLEX WIRELESS COMMUNICATION SYSTEM*, Which measures approximately: 20.7cm (L) x 16.8 cm (W) x 8.0 cm (H), input voltage: DC 9 V adapter or DC 6.0V Ni-MH Rechargeable battery.

Adapter information:

Model: PRS-C13US9VU;

Input: AC 100-240V 50/60Hz 0.4A MAX;

Output: DC 9.0V 1A

*\* All measurement and test data in this report was gathered from production sample serial number: 1101005 (Assigned by BAEL, Shenzhen). The EUT was received on 2011-01-30.*

### Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 – 2006, and ANSI C63.4-2009

The tests were performed in order to determine compliance with FCC Part 15, Subpart D, and section, 15.203, 15.207, 15.315, 15.317, 15.319 and 15.323 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15D submission of portable part portion with FCC ID: B4HDST1900.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.17 - 2006 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Justification

The EUT consist four identical radios, the RF circuits and antenna components are totally identical. So one has been tested at antenna port, AC line conducted emissions and radiated spurious emission have been pre-scanned and the worst case mode will be fully tested.

### Description of Test Configuration

The EUT was configured for test mode, which is provided by the manufacturer.

### Equipment Modifications

The conducted items were tested under TBR6 mode.

### Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number	FCC ID
R & S	Digital Radio-Communication Tester	CMD60	829902/026	DoC

### External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded Detectable Power Cable	1.5	Adapter	EUT

### Configuration of Test Setup

For Conducted Emission

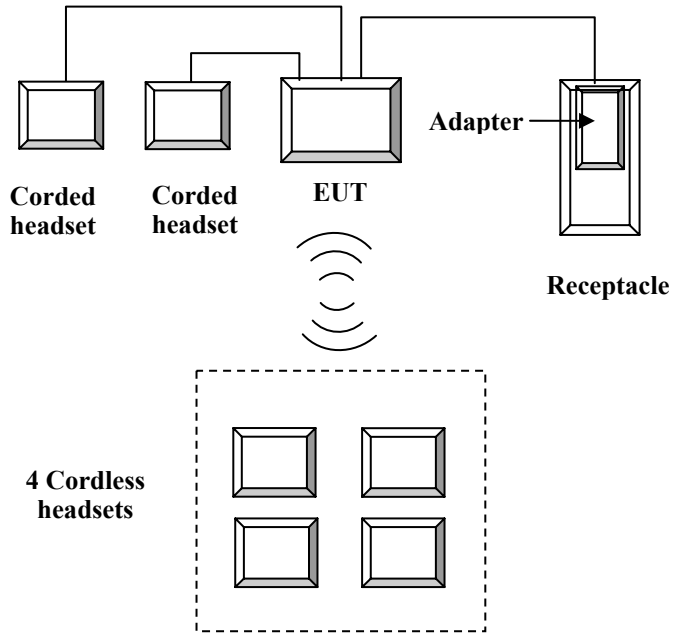


For Radiated Emission

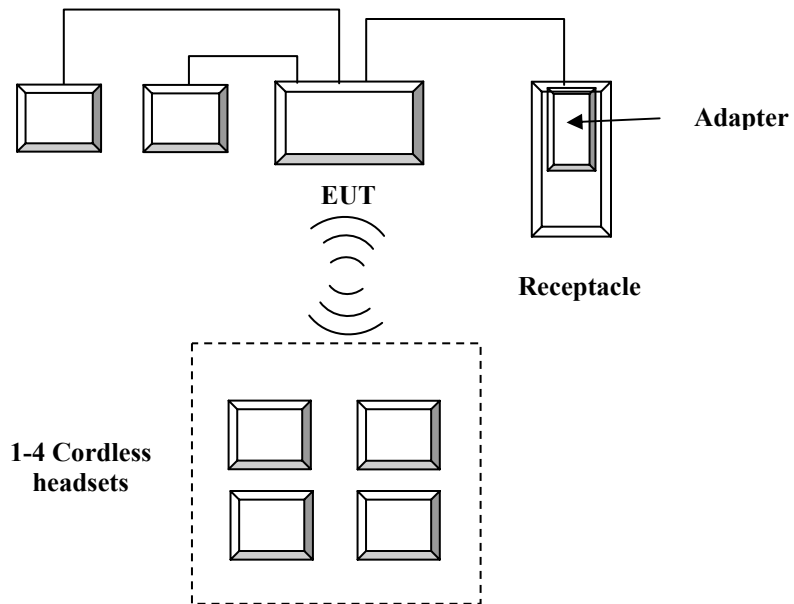


### Block Diagram of Test Setup

For Conducted Emission

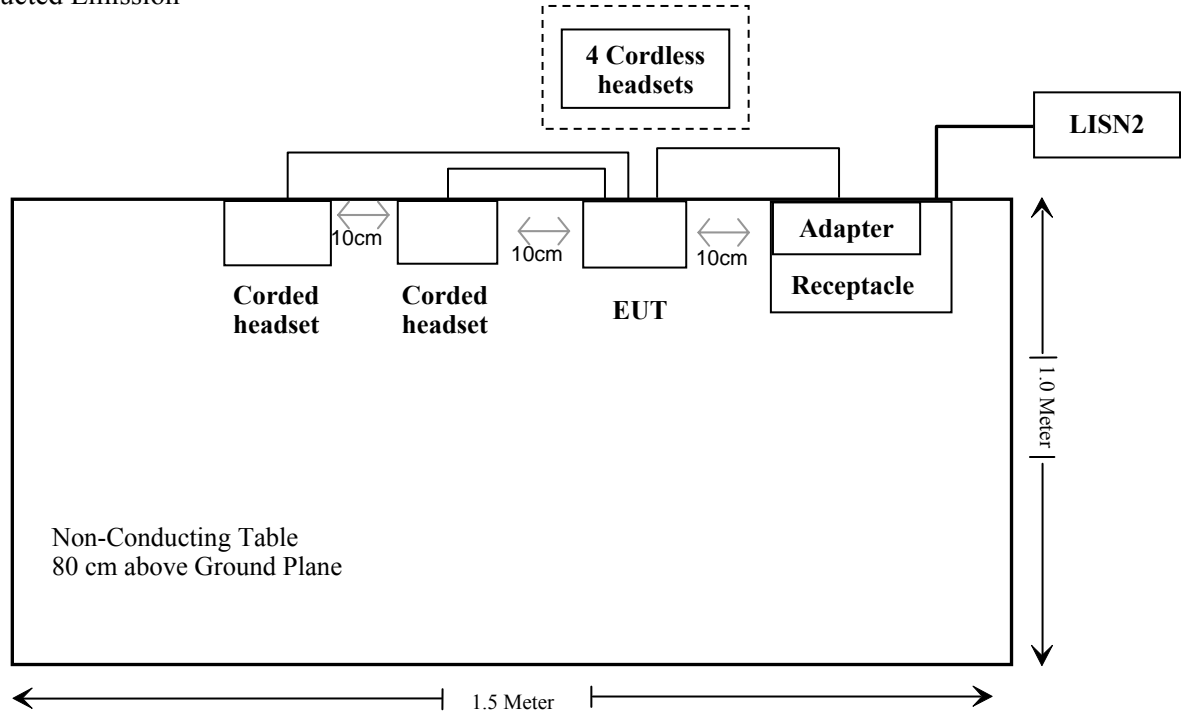

For Radiated Emission

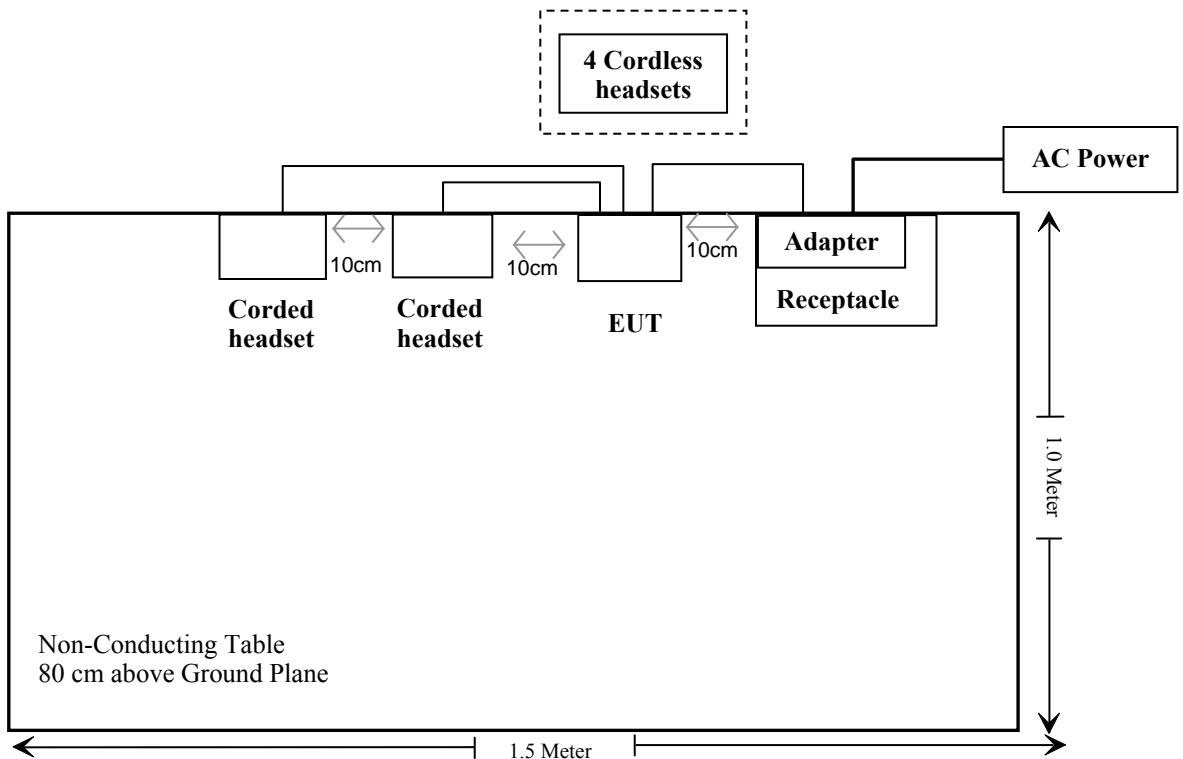



**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.319 (i), §2.1091	RF Exposure Information	Compliance
§15.317, §15.203	Antenna Requirement	Compliance
§15.319 (e)	Antenna Gain	Compliance
§15.315, §15.207	AC Line Conducted Emission	Compliance
§15.323 (a)	Emission Bandwidth	Compliance
§15.319 (c)	Peak Transmit Power	Compliance
§15.319 (d)	Power Spectral Density	Compliance
§15.323 (d)	Emission Inside and Outside the sub-band	Compliance
§15.319 (g)	Radiated Spurious Emission	Compliance
§15.323 (f)	Frequency Stability	Compliance
§15.323 (c)(e), §15.319 (f)	Specific Requirements for UPCS	Compliance

## FCC §15.319 (i) & §2.1091 - RF EXPOSURE INFORMATION

### Limit

According to FCC KDB 447498, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

a) Transmitters and modules certified for mobile or portable exposure conditions and categorically excluded by §2.1091(c) can be incorporated in mobile host devices without further testing or certification when:

i) The closest separation among all simultaneous transmitting antennas is  $\geq 20$  cm; or  
 ii) The antenna separation distance and MPE compliance boundary requirements that enable all simultaneous transmitting antennas incorporated within the host to comply with MPE limits are specified in the application filing of at least one of the certified transmitters incorporated in the host device. In addition, when transmitters certified for portable use are incorporated in a mobile host device the antenna(s) must be  $\geq 5$  cm from all other simultaneous transmitting antennas.

b) All antennas in the final product must be at least 20 cm from users and nearby persons.

Note: The distances between antennas are: antenna 1 and antenna 3 is 14.2 cm, antenna 1 and antenna 6 is 17 cm, antenna 1 and antenna 7 is 10.1 cm. please refer to EUT photos for details.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for Maximum Permissible Exposure (MPE)

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

**Test Data**

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4\pi R^2}$$

Where:

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW) .

G = gain of the antenna in the direction of interest relative to an isotropic radiator.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input terminal: 20.04(dBm)

Maximum peak output power at antenna input terminal: 100.93(mW)

Prediction distance: >20 (cm)

Predication frequency: 1924.992(MHz)

Antenna Gain (typical): 2 (dBi)

Antenna Gain (typical): 1.6 numeric

The worst case is power density at predication frequency at 20 cm: 0.032(mW/cm<sup>2</sup>)

MPE limit for general population exposure at prediction frequency: 1 (mW/cm<sup>2</sup>)

**Result:** The device meets MPE limit at 20 cm distance.

---

## **FCC §15.317 & §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connector Construction**

This product has eight integrated antennas arrangement; please refer to the internal photos. Their maximum gains are 2 dBi, fulfill the requirement of this section.

**Test Result:** Compliance

---

## **FCC §15.319 (e) - ANTENNA GAIN**

---

### **Applicable Standard**

According to FCC §15.319 (e):

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

**Result:** The antenna gain is 2 dBi provided by manufacturer.


## FCC §15.315 & §15.207 – AC LINE CONDUCTED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 2.4$  dB ( $k=2$ , 95% level of confidence).

### EUT Setup

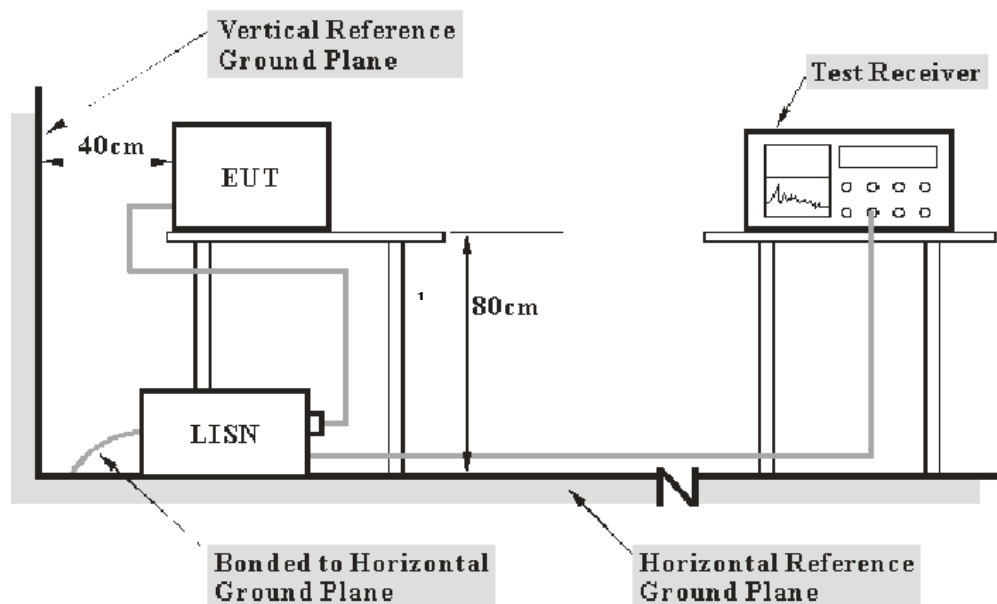

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC 15.315 and FCC 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**11.61 dB at 27.120 MHz** in the **Neutral** conducted mode.

## Test Data


### Environmental Conditions

<b>Temperature:</b>	20 ° C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Jim Huang on 2011-03-18.*

Test Mode: Transmitting and charging (based on the pre scan, EUT with two cord earphones and four wireless earphones mode is the worst case).


120 V, 60 Hz, Line:

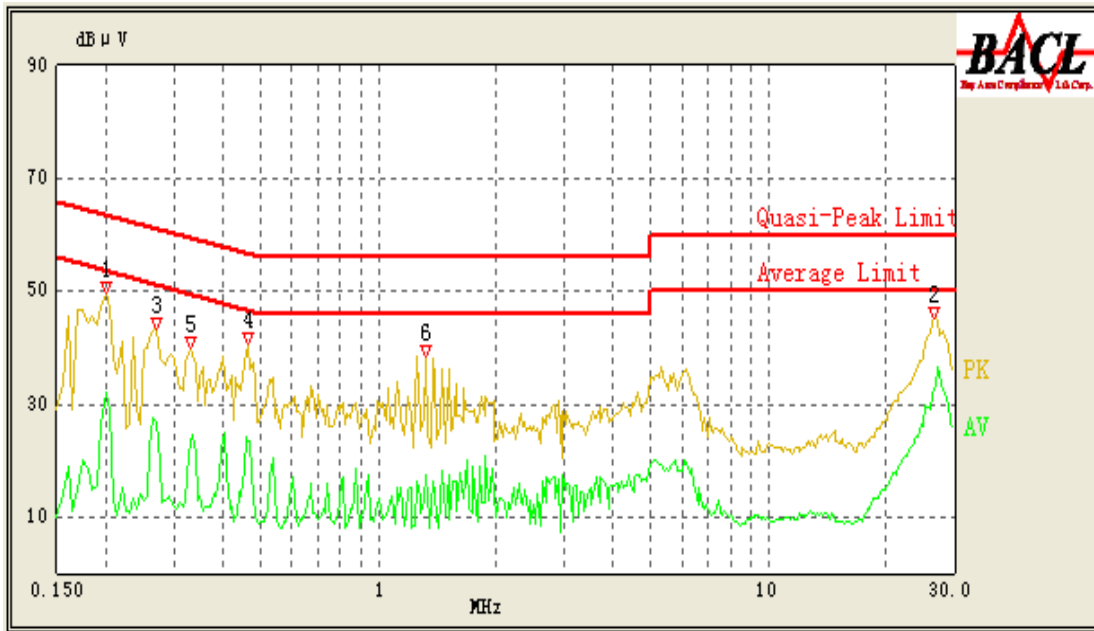

Frequency (MHz)	Cord. Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
26.945	33.09	10.13	50.00	16.91	Ave.
0.200	45.25	10.07	64.57	19.32	QP
26.680	38.89	10.13	60.00	21.11	QP
0.200	32.13	10.07	54.57	22.44	Ave.
0.270	40.12	10.02	62.57	22.45	QP
1.320	32.49	10.13	56.00	23.51	QP
0.465	23.27	10.16	47.00	23.73	Ave.
0.465	33.25	10.16	57.00	23.75	QP
0.270	26.84	10.02	52.57	25.73	Ave.
0.330	23.54	10.03	50.86	27.32	Ave.
0.330	32.51	10.03	60.86	28.35	QP
1.320	17.56	10.13	46.00	28.44	Ave.



**120 V, 60 Hz, Neutral:**

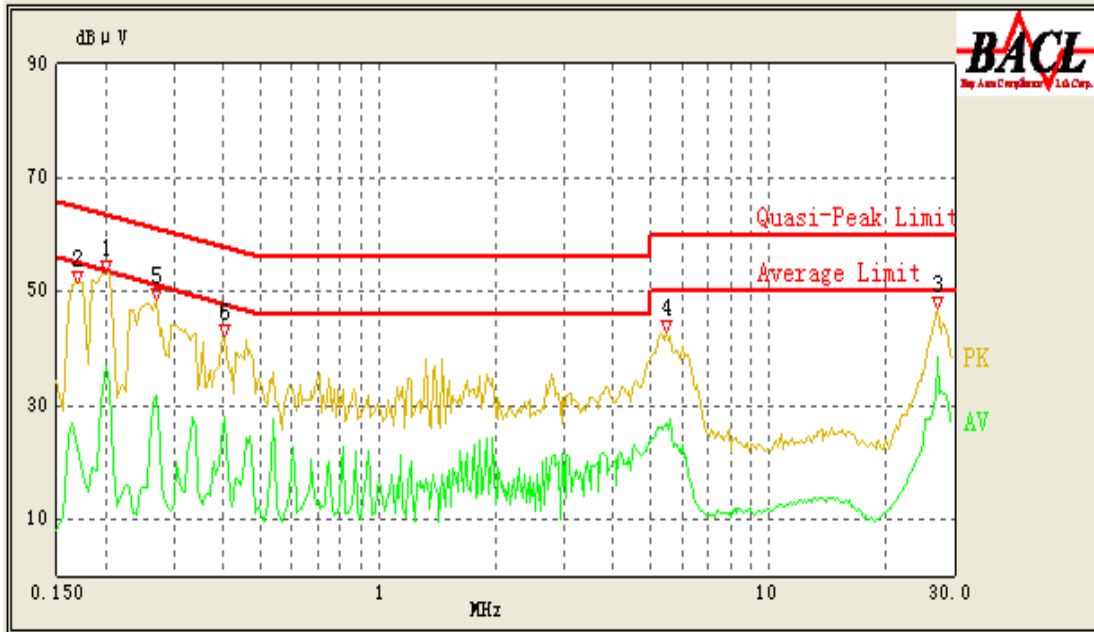


Frequency (MHz)	Cord. Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
27.120	38.39	10.13	50.00	11.61	Ave.
0.200	47.61	10.07	64.57	16.96	QP
0.200	36.98	10.07	54.57	17.59	Ave.
0.270	43.68	10.02	62.57	18.89	QP
27.120	41.06	10.13	60.00	18.94	QP
0.405	28.02	10.10	48.71	20.69	Ave.
0.270	31.78	10.02	52.57	20.79	Ave.
0.405	37.29	10.10	58.71	21.42	QP
5.470	26.68	10.10	50.00	23.32	Ave.
0.170	40.33	10.09	65.43	25.10	QP
5.470	28.64	10.10	60.00	31.36	QP
0.170	22.58	10.09	55.43	32.85	Ave.

## FCC §15.323 (a) - EMISSION BANDWIDTH

### Applicable Standard

Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less than 2.5 MHz and greater than 50 kHz.

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below:

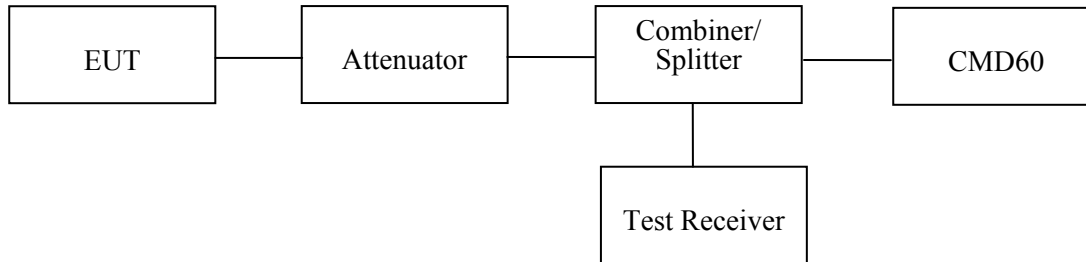

The width, in Hz, of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 VFR 15, subpart D, 15.303 (C)].

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	20 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	100.0 kPa

The testing was performed by Jim Huang on 2011-02-25.


Test Mode: Transmitting

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	Limit
Low	1921.536	1.488	50 kHz < OBW <2.5 MHz
Middle	1924.992	1.488	50 kHz < OBW <2.5 MHz
High	1928.448	1.488	50 kHz < OBW <2.5 MHz

**Test Result:** Pass


Refer to the attached plots.

**Low Channel**

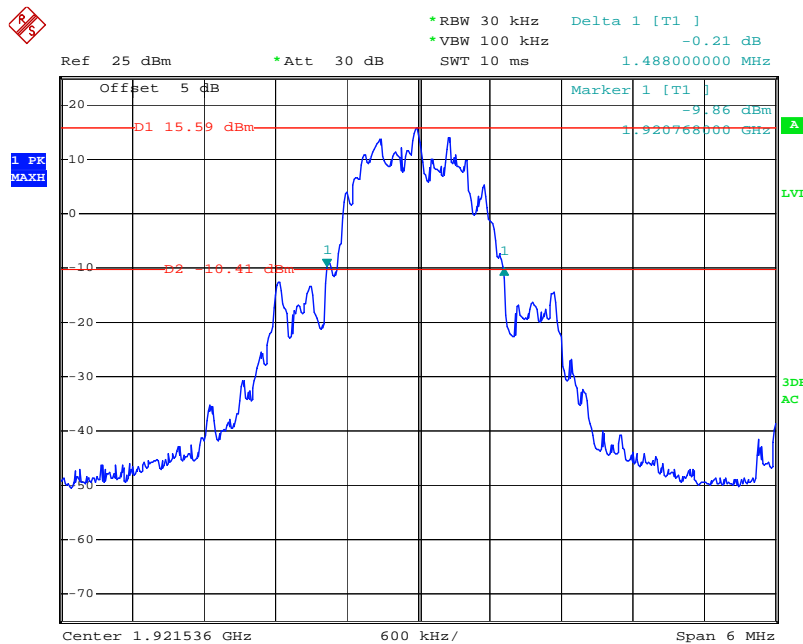

Date: 25.FEB.2011 10:02:06

### Middle Channel

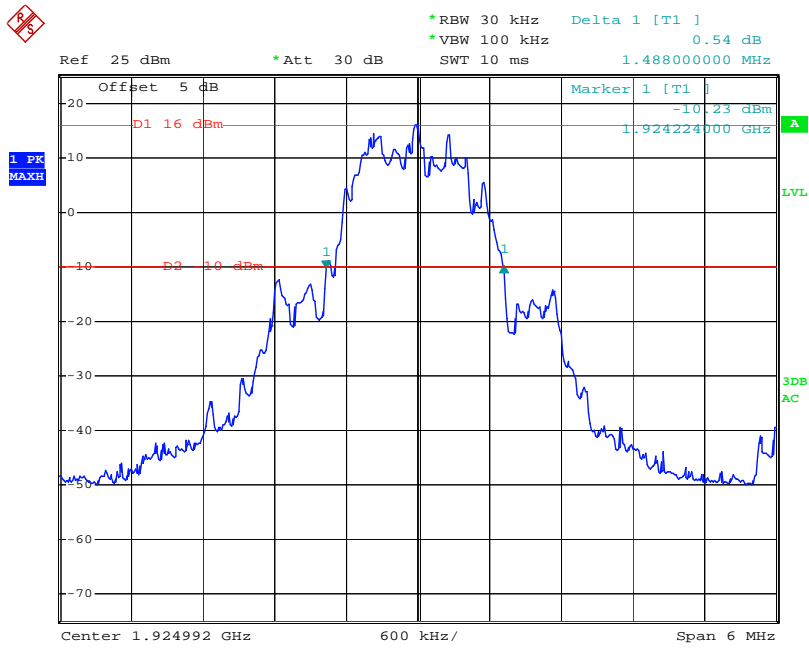

Date: 25.FEB.2011 09:57:18

### High Channel



Date: 25.FEB.2011 10:00:00

## FCC §15.319 (c) - PEAK TRANSMIT POWER

### Applicable Standard

The peak transmit power is according to ANSI C63.17-2006 §6.1.2

Per FCC Part 15.319 (a), Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz.

Per FCC Part 15.319 (e), The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Calculation of Peak Transmit Power Limit ( $P_{max}$ ):

$$P_{max} = 100\mu W \times (EBW)^{1/2}$$

EBW is the transmit emission bandwidth in Hz determined in the other test item:

Test Data:

$$EBW = 1488000\text{Hz}$$

$$P_{max} = 100 \mu W \times (1488000)^{1/2} = 20.86 \text{ dBm}$$

### Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	$\geq$ Emission bandwidth
Video bandwidth	$\geq$ RBW
Span	Zero
Center frequency	Nominal center frequency of channels
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	20 ° C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	100.0 kPa

The testing was performed by Jim Huang on 2011-02-23.

**Test Result:** Compliance, please refer to the attached table and plots.


Frequency (MHz)	Peak Transmit Power (dBm)	Limit (dBm)
1921.536	20.02	20.86
1924.992	20.03	20.86
1928.448	20.04	20.86

**Low Channel**

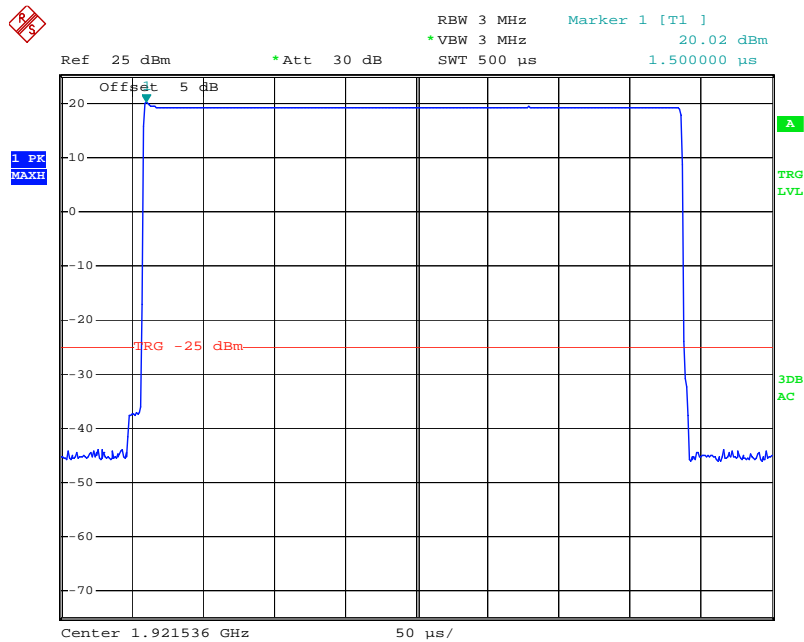


Date: 23.FEB.2011 09:07:36

### Middle Channel

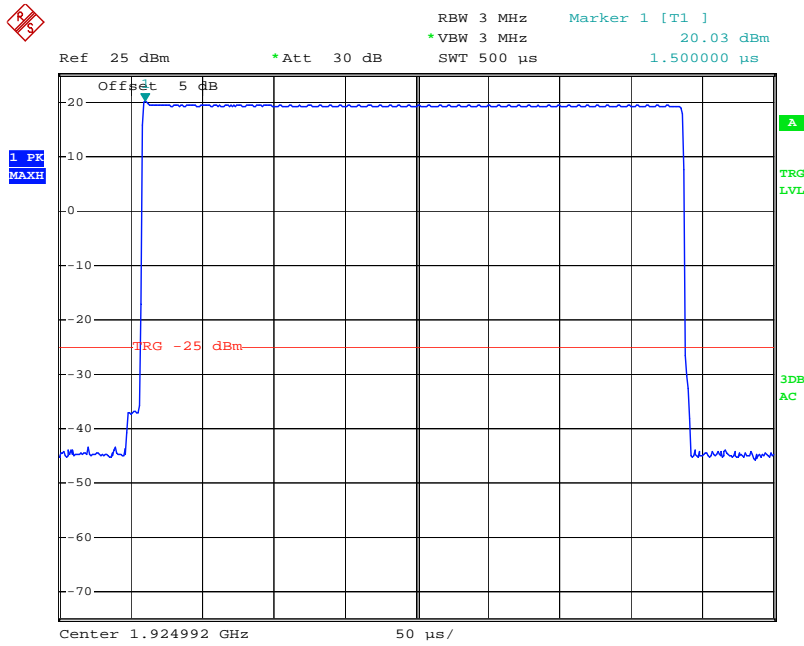

Date: 23.FEB.2011 09:10:24

### High Channel

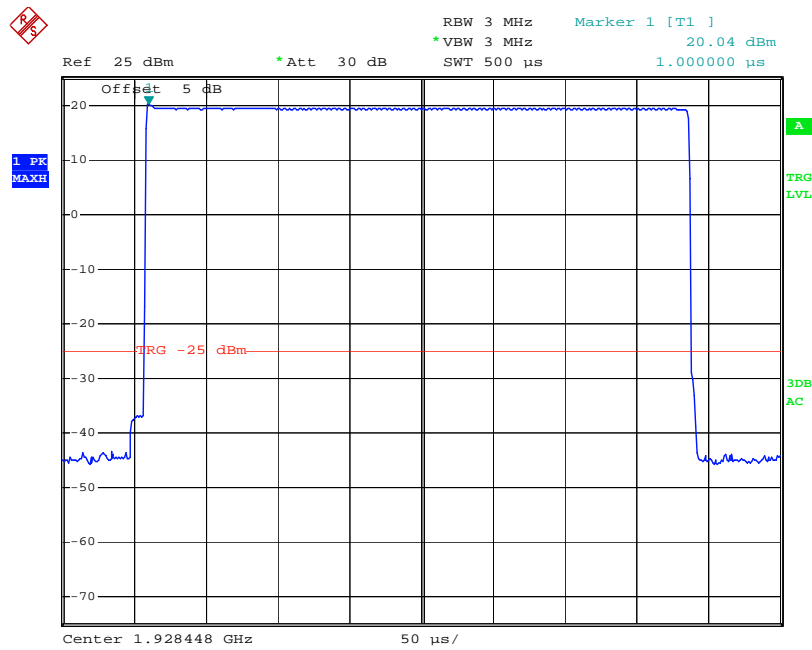

Date: 23.FEB.2011 09:14:43

## FCC §15.319 (d) - POWER SPECTRAL DENSITY

### Applicable Standard

The power spectral density is according to ANSI C63.17-2006 §6.1.5

The average pulse energy in a 3 kHz bandwidth is divided by the pulse duration.

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

### Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	3 kHz
Video bandwidth	$\geq 3 \times \text{RBW}$
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)
Center frequency	Spectral peak as determined in 6.1.3
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 $\mu\text{s}$ ). For continuous signals, 20 ms.
Amplitude scale	Log power
Detection	Sample detection and averaged for a minimum of 100 sweeps
Trigger	External or internal

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.



**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	20 ° C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	100.0 kPa


The testing was performed by Jim Huang on 2011-03-09.

Test Mode: Transmitting


Test Result: Compliance, please refer to following tables and plots

Frequency (MHz)	Power Spectral Density		Limit (mW/3 kHz)	Result
	(dBm/3 kHz)	(mW/3 kHz)		
1921.536	-2.77	0.53	3	Pass
1924.992	-3.51	0.45	3	Pass
1928.448	-2.91	0.51	3	Pass

**Low Channel**

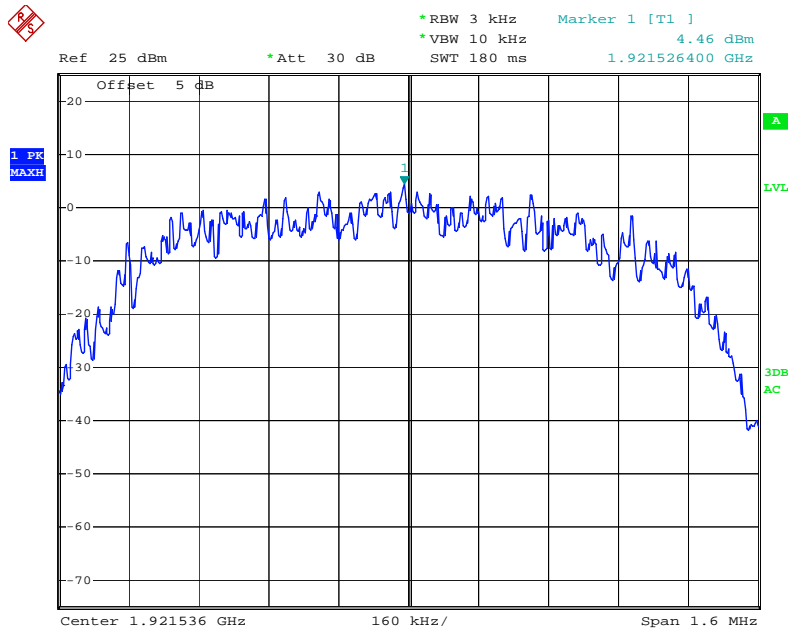


Date: 9.MAR.2011 04:26:47

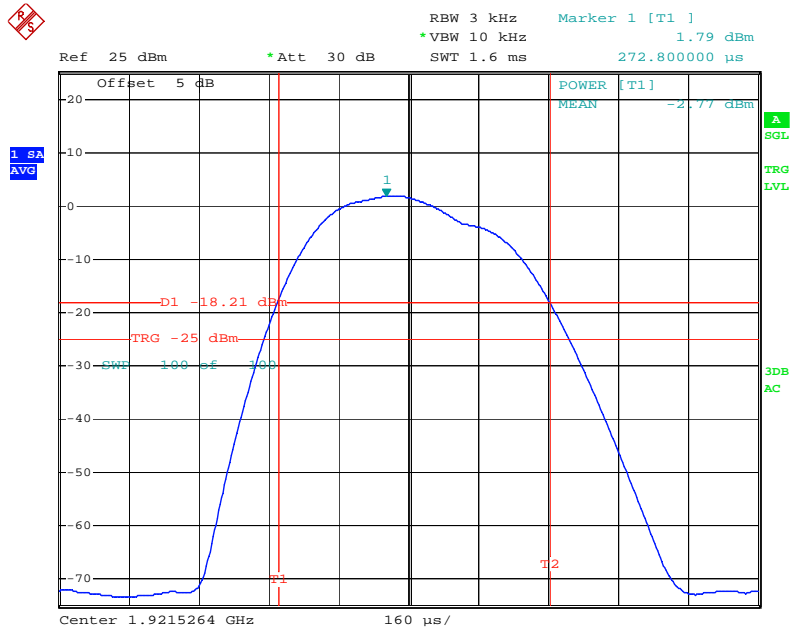


Date: 9.MAR.2011 04:28:38

### Middle Channel

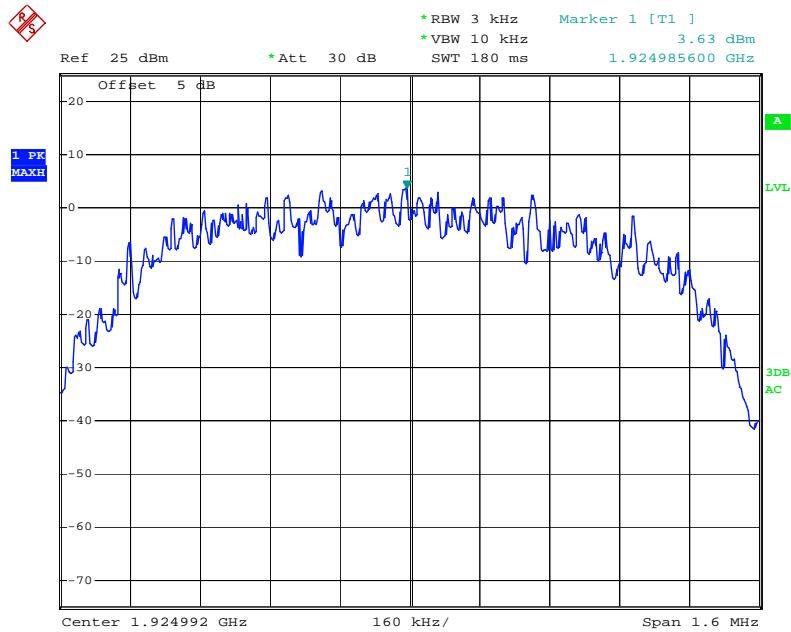


Date: 9.MAR.2011 04:19:44

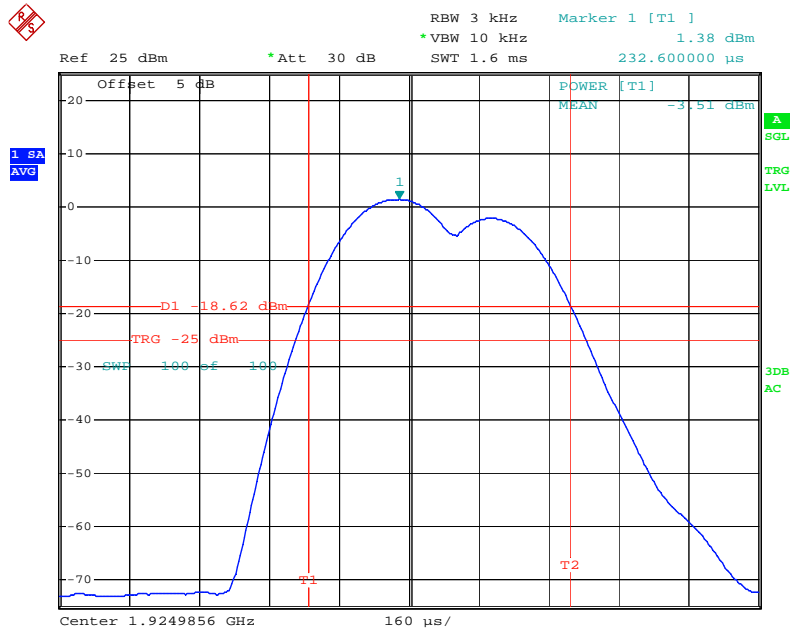


Date: 9.MAR.2011 04:20:59

### High Channel

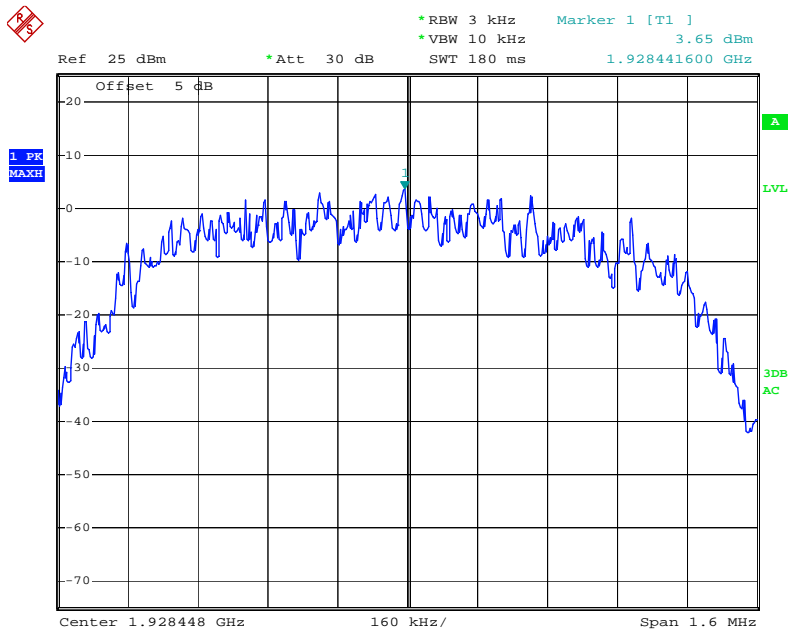

Date: 9.MAR.2011 04:22:28

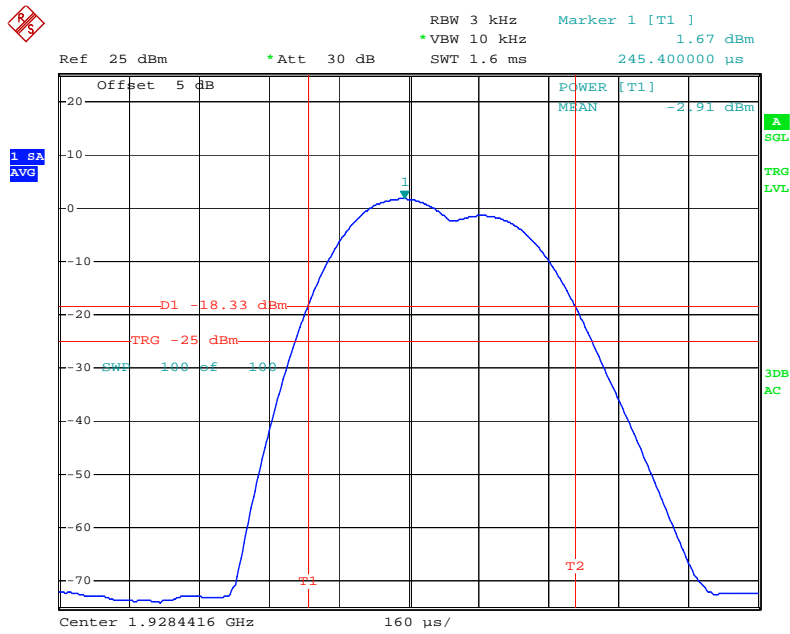

Date: 9.MAR.2011 04:24:05

## FCC §15.323 (d) - EMISSION INSIDE AND OUTSIDE THE SUB-BAND

### Applicable Standard

Emissions inside the sub-band must comply with the following emission mask:

1. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
2. in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator;
3. in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mW (20.5 dBm) as follows:

1. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
2. 50 dB between 1.25 and 2.5 MHz above or below the sub-band;
3. 60 dB at 2.5 MHz or greater above or below the sub-band.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
HP	Spectrum Analyzer	8564E	3943A01781	2011-03-09	2012-03-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	20 ° C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Jim Huang on 2011-02-25 to 2011-03-09.*

*Test Mode: Transmitting*

**Test Result:** Compliance, please refer to following plots

### Low Channel (Unwanted Emission inside the Sub-band)

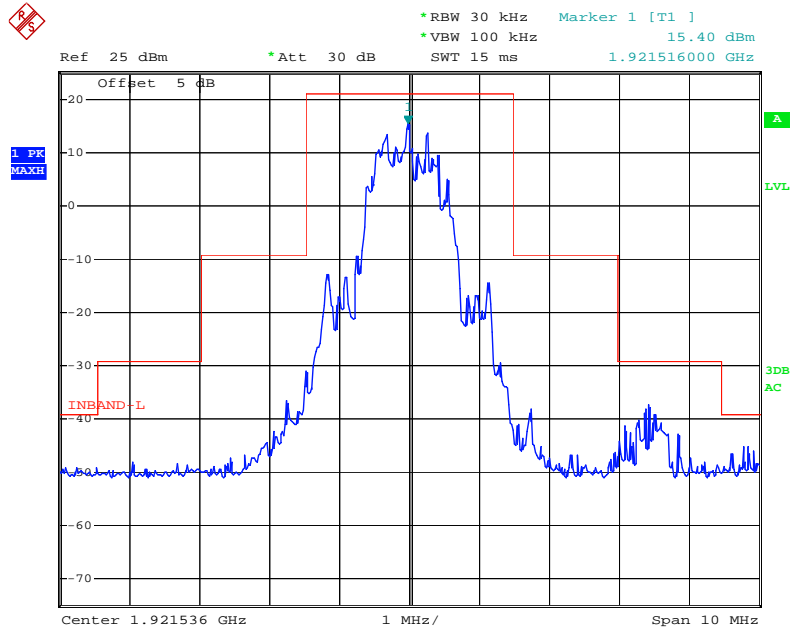


Date: 25.FEB.2011 10:06:08

### Middle Channel (Unwanted Emission inside the Sub-band)




Date: 25.FEB.2011 10:08:01

### High Channel (Unwanted Emission inside the Sub-band)

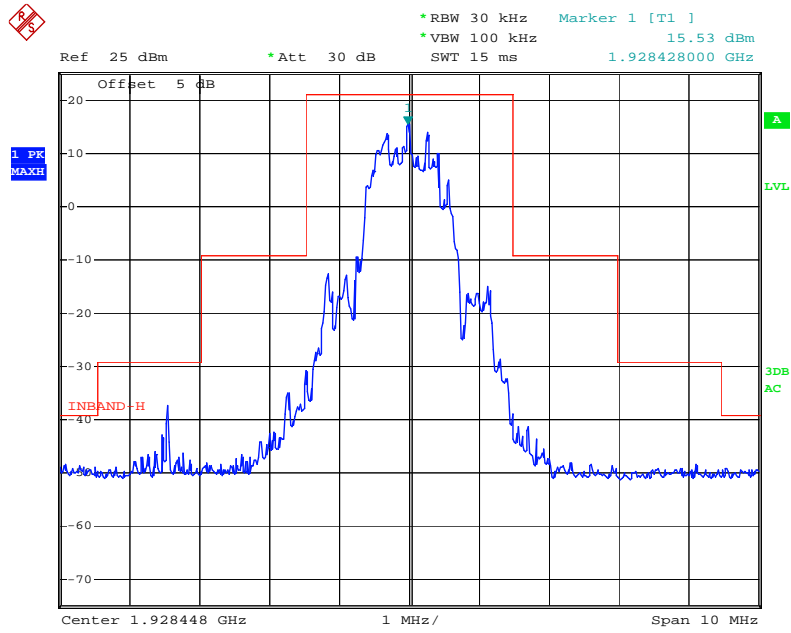


Date: 25.FEB.2011 10:08:58


### Low Channels (Unwanted Emission outside the Sub-band)

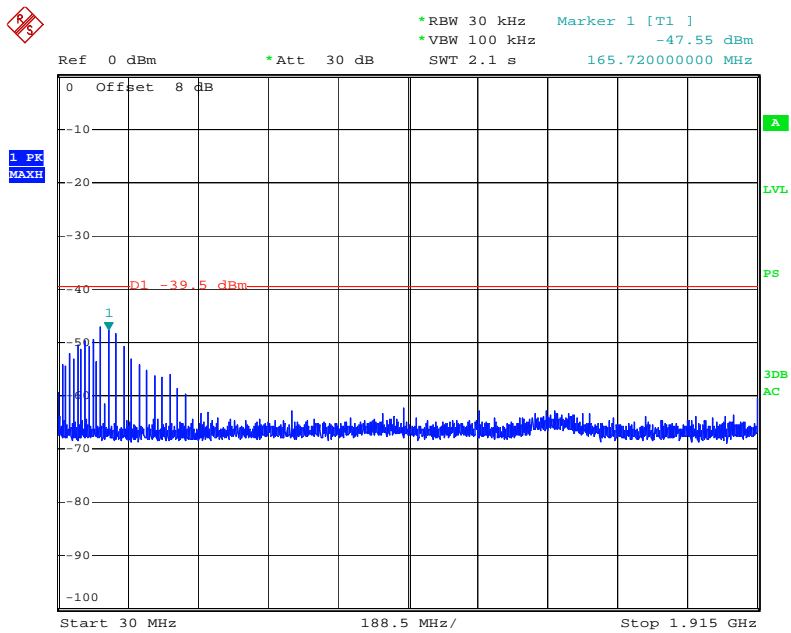

Date: 28.FEB.2011 17:22:52

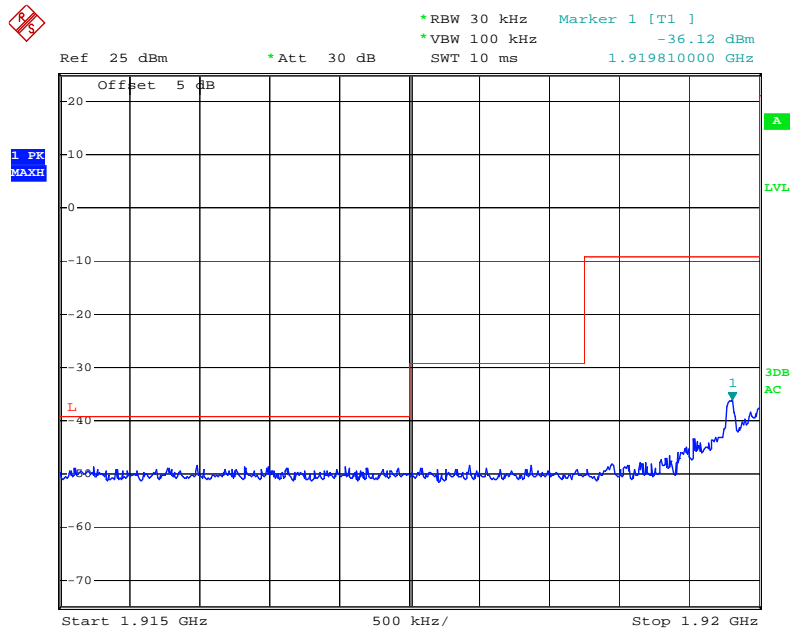


Date: 25.FEB.2011 11:07:21

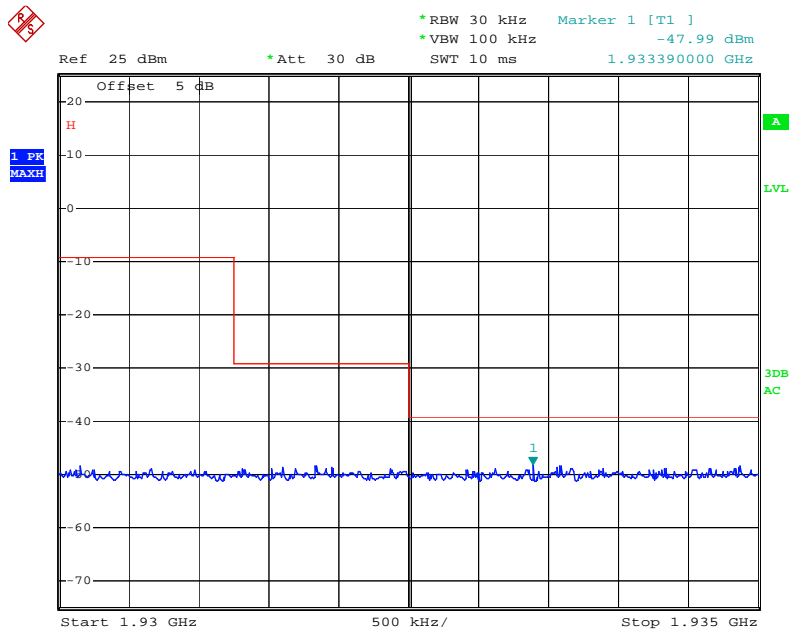


Date: 25.FEB.2011 11:12:54




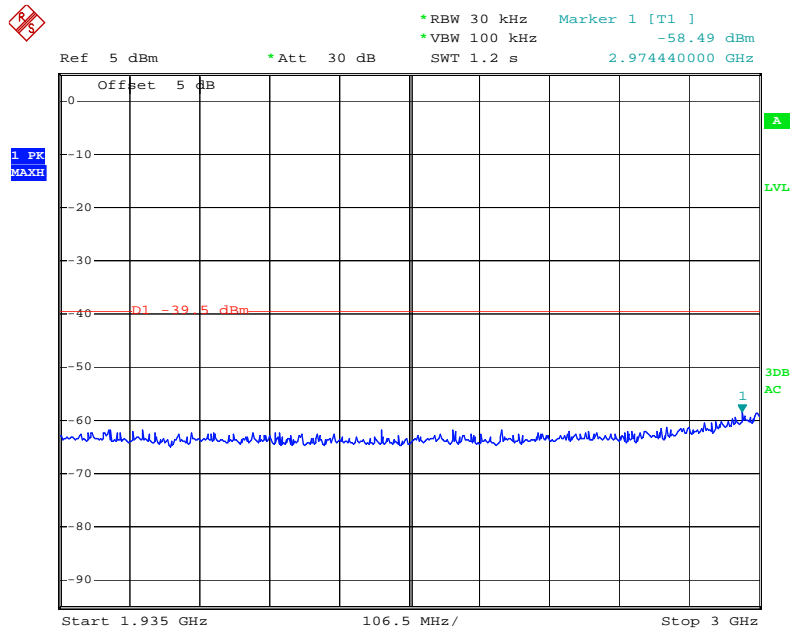


Date: 9.MAR.2011 02:18:34

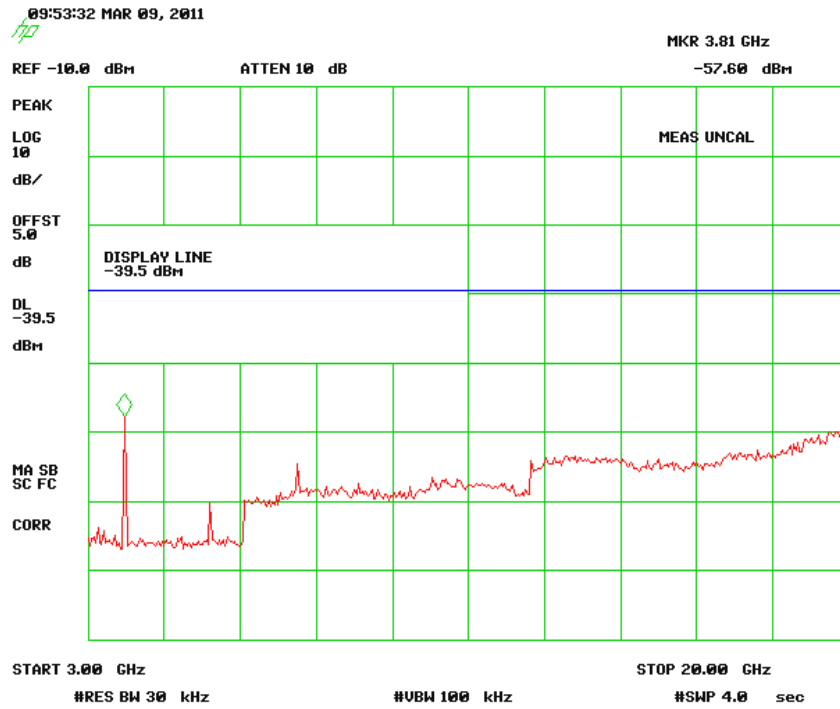


### Middle Channels (Unwanted Emission outside the Sub-band)

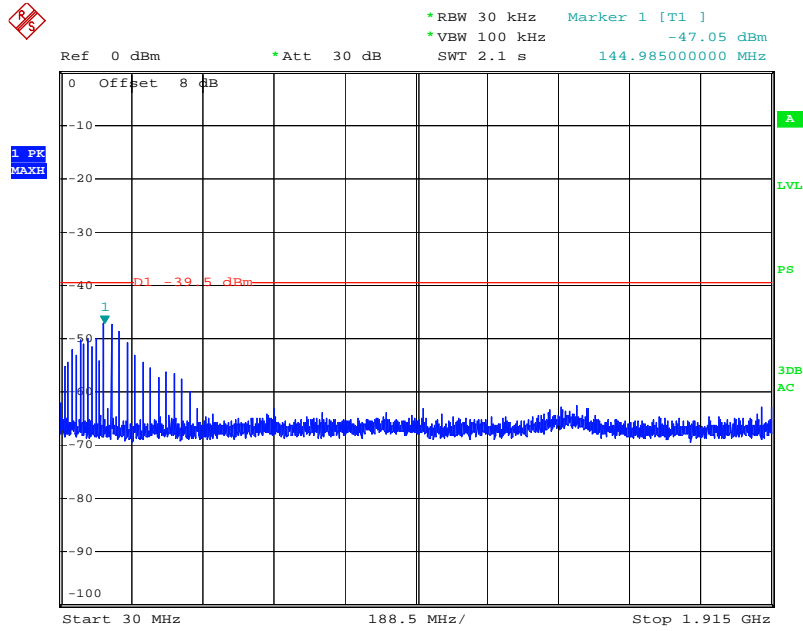


Date: 28.FEB.2011 17:24:07

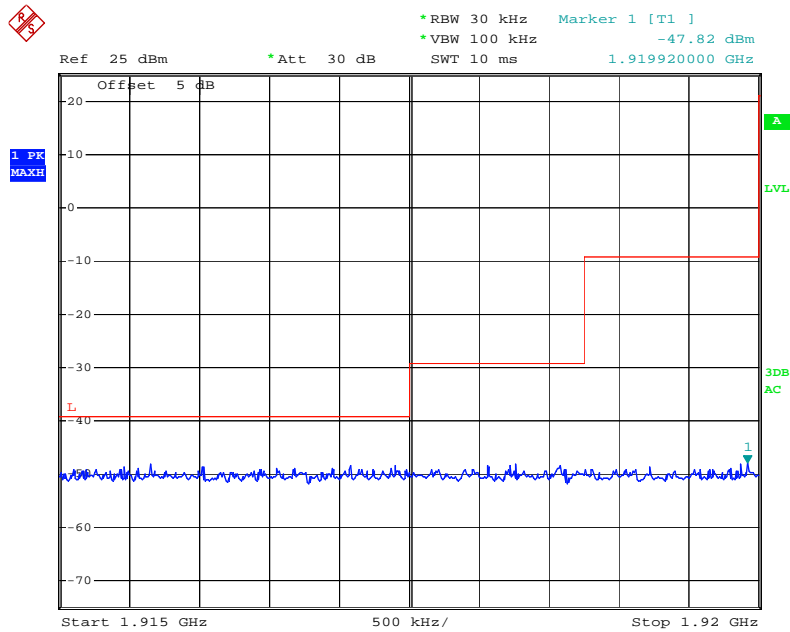


Date: 25.FEB.2011 11:06:49

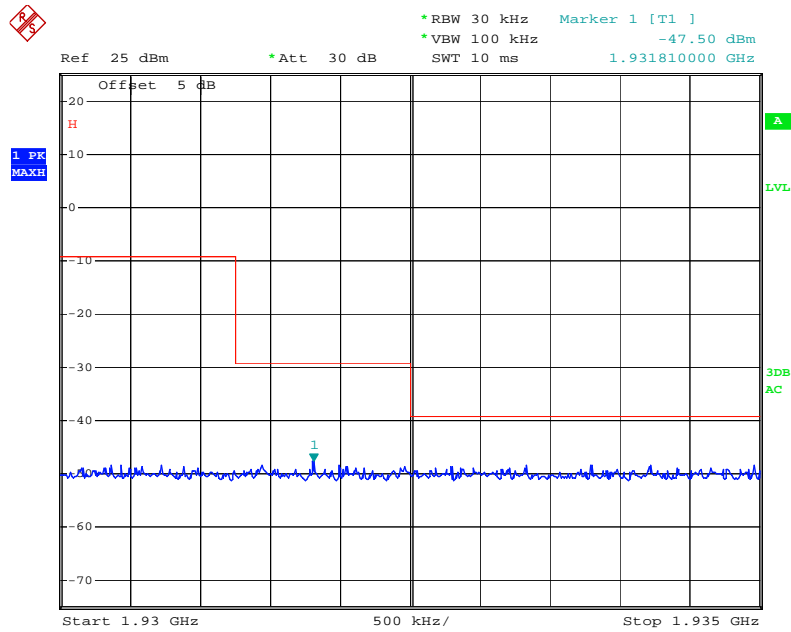


Date: 25.FEB.2011 11:13:38

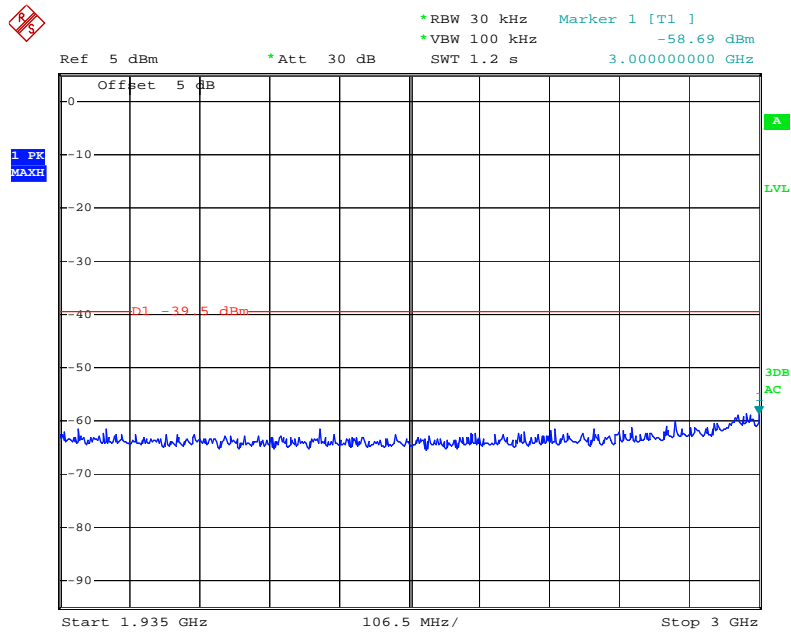


Date: 9.MAR.2011 02:17:47

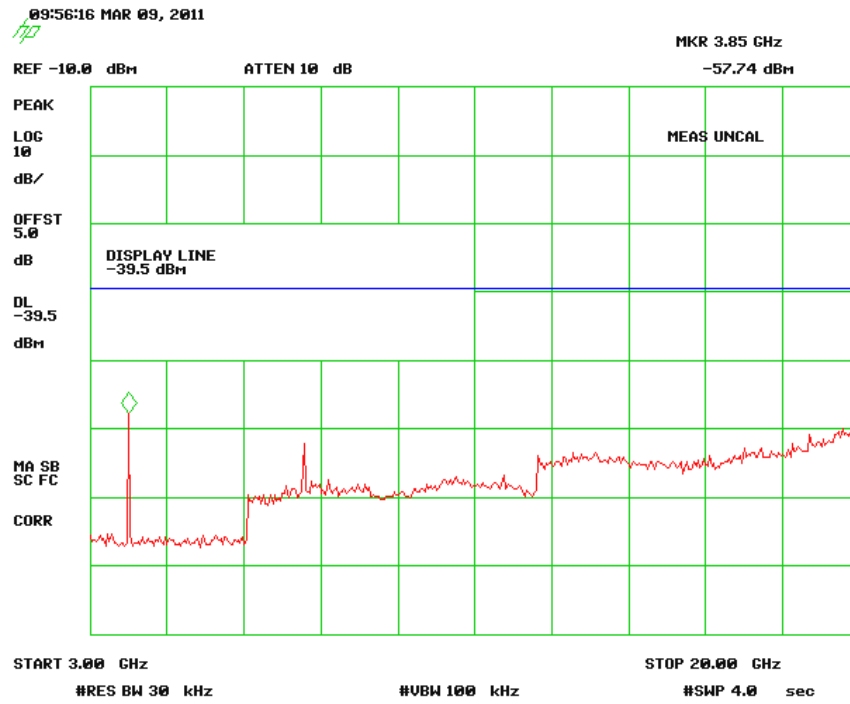


**High Channels (Unwanted Emission outside the Sub-band)**

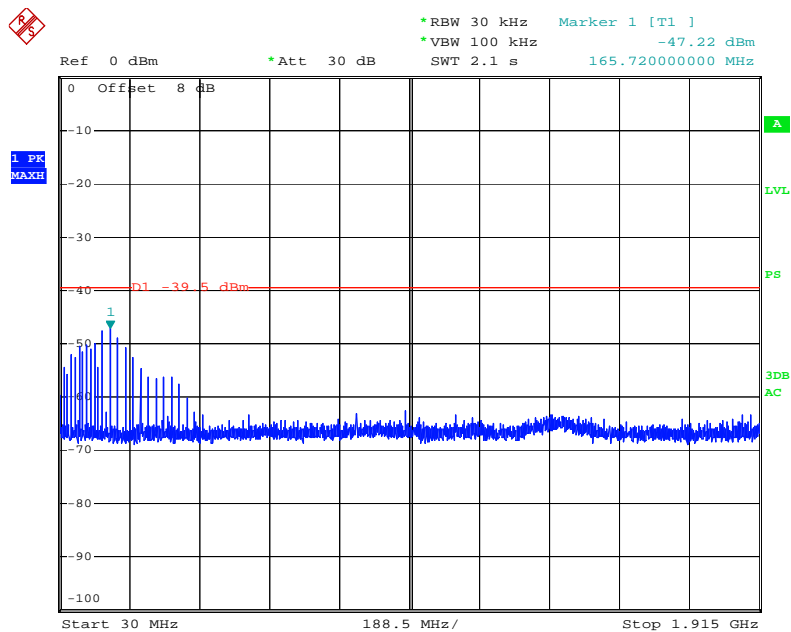


Date: 28.FEB.2011 17:25:03

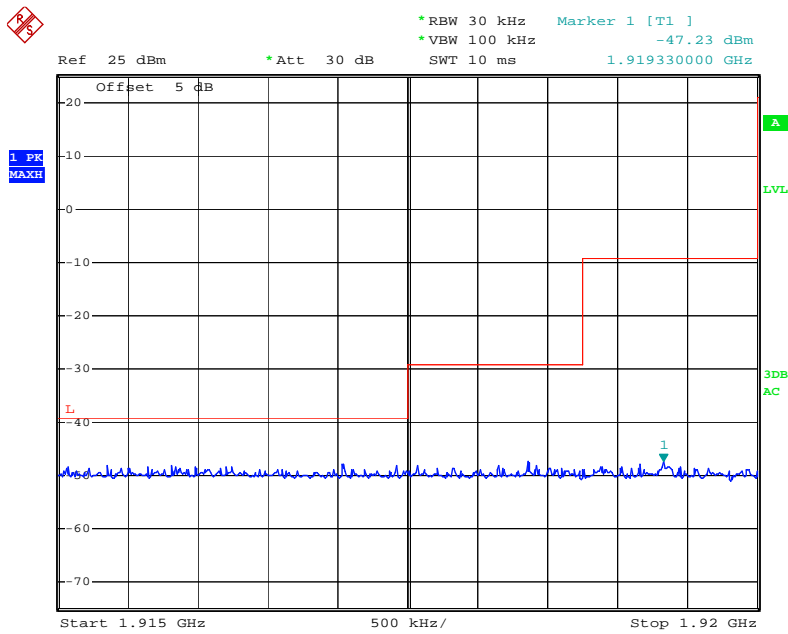


Date: 25.FEB.2011 11:06:13

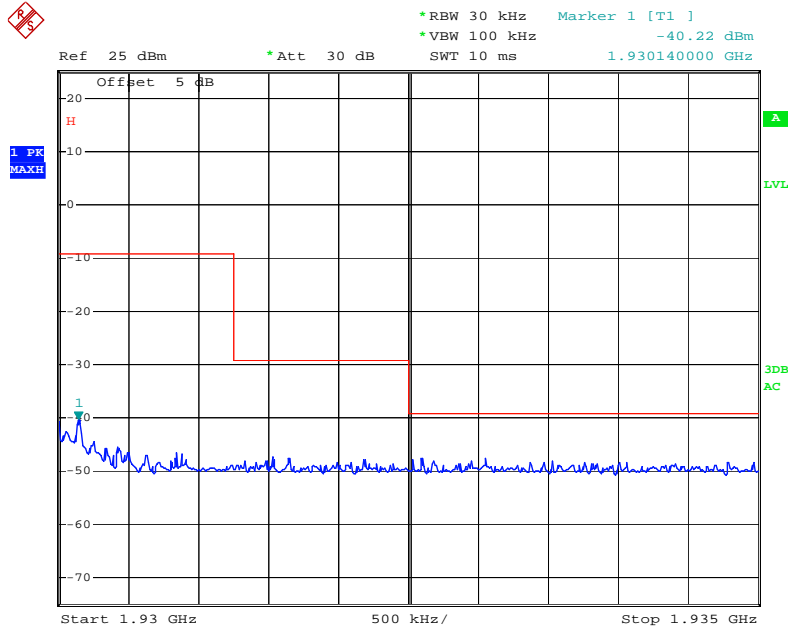

Date: 25.FEB.2011 11:15:11

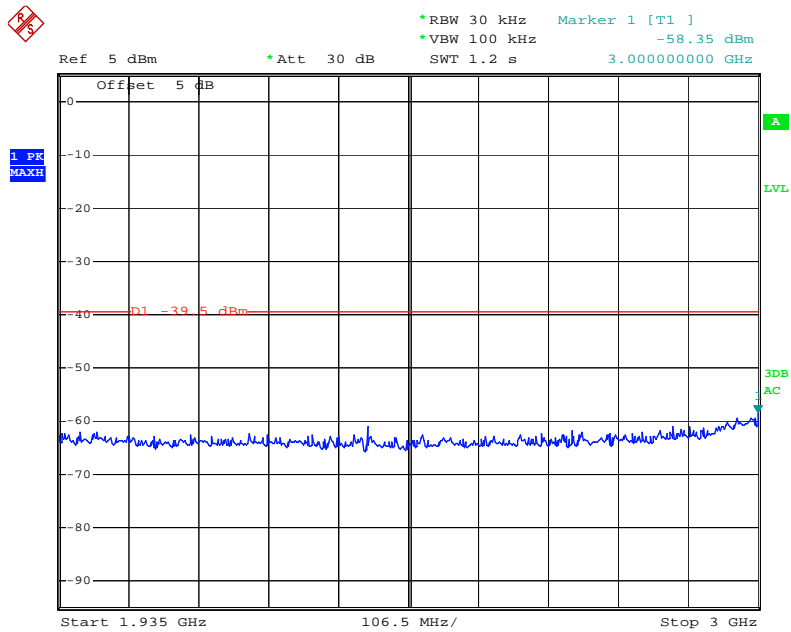

Date: 9.MAR.2011 02:17:16

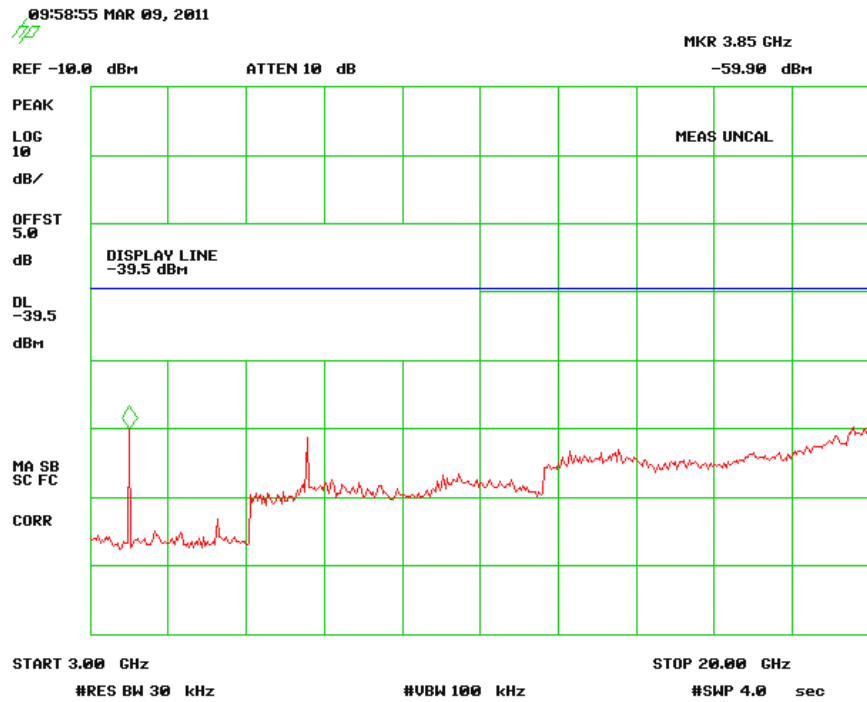

## FCC §15.319 (g) - RADIATED SPURIOUS EMISSIONS


### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 4.0$  dB ( $k=2$ , 95% level of confidence).

### EUT Setup

#### Below 1 GHz:

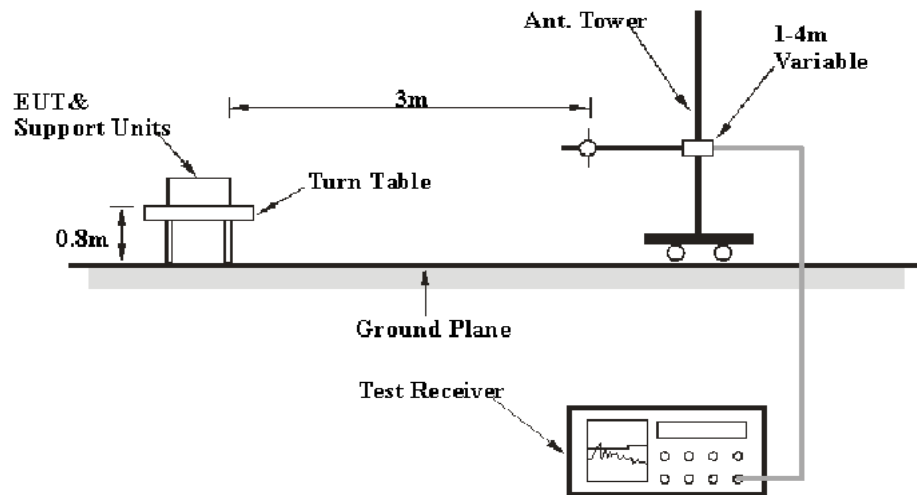

#### Above 1 GHz:

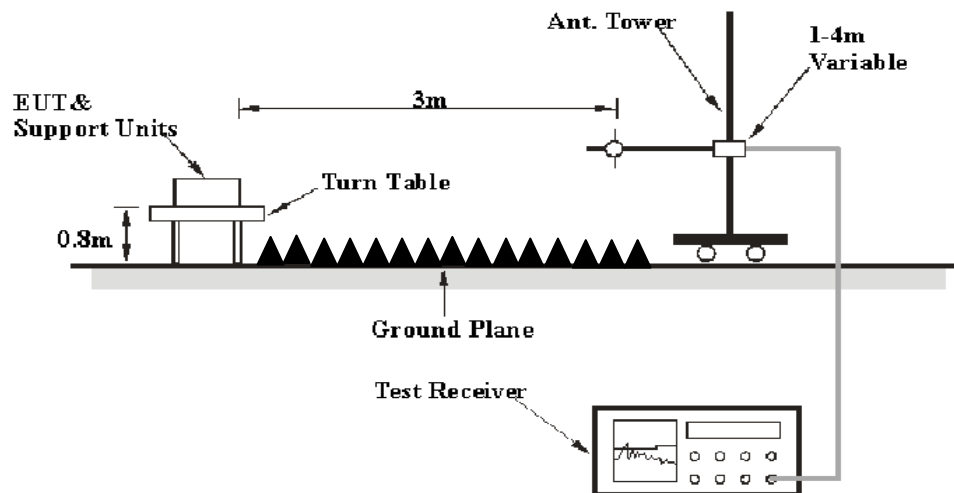

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.17-2006. The specification used was the FCC 15§ 15.319(g).

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 20 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30 MHz – 1000 MHz	100 kHz	300 kHz
Above 1 GHz	1 MHz	3 MHz

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-10
Mini-circuits	Pre-amplifier	ZVA-231+	N/A	2010-09-12	2011-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-07

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.



## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.319 (g), 15.209, with the worst margin reading of:

### Below 1 GHz:

**3.7 dB at 48.738500 MHz** in the **Vertical** polarization  
**8.2 dB at 34.529000 MHz** in the **Vertical** polarization (simultaneous transmission)

### Above 1 GHz:

**3.03 dB at 9642.24 MHz** in the **Vertical** polarization  
**4.67 dB at 7693.9 MHz** in the **Vertical** polarization (simultaneous transmission)

## Test Data


### Environmental Conditions

<b>Temperature:</b>	20 ° C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Jim Huang on 2011-03-09 and 2011-04-08.*

*Test Mode: The EUT has been pre-tested with 1 radio, 2 radios, 3 radios and 4 radios transmission, for simultaneous transmitting, based on the pre scan, EUT with two cord earphones and four wireless earphones mode is the worst case)*

1) 30-1000 MHz (single radio)

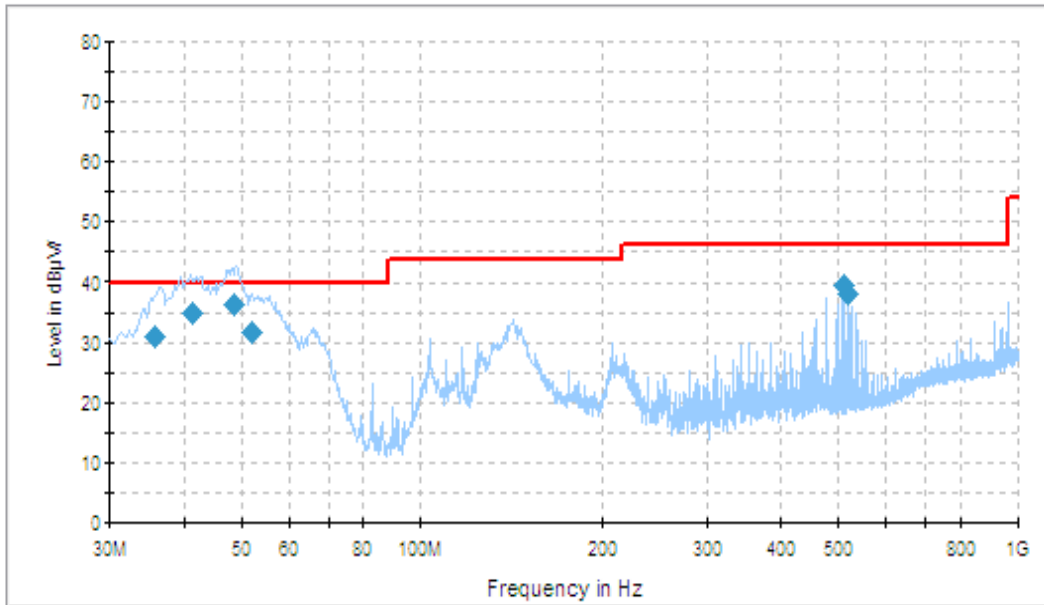

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
48.738500	36.3	105.0	V	296.0	-16.7	40.0	3.7*
41.228000	35.1	103.0	V	208.0	-12.9	40.0	4.9
511.489750	39.5	102.0	V	277.0	-8.2	46.0	6.5
518.403500	38.1	103.0	V	278.0	-8.0	46.0	7.9
51.930500	31.8	104.0	V	345.0	-17.6	40.0	8.2
35.680750	31.0	104.0	V	226.0	-9.3	40.0	9.0

\*Within measurement uncertainty!


## 2) Above 1 GHz (single radio)

Freq. (MHz)	S.A. Reading (dBμV)	Detector PK/QP/AV	Direction Degree	Test Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBuV/m)	FCC Part 15.319(g)/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBuV/m)	Margin (dB)	Remarks
Low Channel												
5764.608	55.18	PK	110	1.4	H	37.4	4.57	26.68	70.47	74	3.53*	Harmonic
9607.68	48.98	PK	116	1.2	H	41.1	5.98	26.42	69.64	74	4.36	Harmonic
9607.68	49.60	PK	190	1.6	V	39.9	5.98	26.42	69.06	74	4.94	Harmonic
11529.216	45.62	PK	175	1.6	H	41.0	6.69	26.28	67.03	74	6.97	Harmonic
7686.144	47.13	PK	90	1.4	H	39.0	5.27	26.64	64.76	74	9.24	Harmonic
11529.216	43.62	PK	120	1.7	V	40.4	6.69	26.28	64.43	74	9.57	Harmonic
5764.608	49.55	PK	87	1.6	V	36.2	4.57	26.68	63.64	74	10.36	Harmonic
3843.072	53.21	PK	190	1.5	V	33.0	3.73	26.87	63.07	74	10.93	Harmonic
7686.144	46.27	PK	120	1.8	V	37.7	5.27	26.64	62.6	74	11.40	Harmonic
3843.072	48.11	PK	313	1.5	H	33.9	3.73	26.87	58.87	74	15.13	Harmonic
Middle Channel												
9624.96	49.95	PK	140	1.6	V	39.9	5.98	26.42	69.41	74	4.59	Harmonic
9624.96	48.67	PK	120	1.3	H	41.1	5.98	26.42	69.33	74	4.67	Harmonic
11549.942	47.85	PK	130	1.7	V	40.4	6.69	26.28	68.66	74	5.34	Harmonic
5774.976	54.24	PK	10	1.8	V	36.2	4.57	26.68	68.33	74	5.67	Harmonic
5774.976	52.80	PK	120	1.5	H	37.4	4.57	26.68	68.09	74	5.91	Harmonic
11549.942	44.90	PK	200	1.5	H	41.0	6.69	26.28	66.31	74	7.69	Harmonic
7699.968	49.76	PK	140	1.8	V	37.7	5.27	26.64	66.09	74	7.91	Harmonic
3849.984	55.01	PK	185	1.7	V	33.0	3.73	26.87	64.87	74	9.13	Harmonic
7699.968	45.79	PK	166	1.4	H	39.0	5.27	26.64	63.42	74	10.58	Harmonic
3849.984	49.30	PK	60	1.5	H	33.9	3.73	26.87	60.06	74	13.94	Harmonic
High Channel												
9642.24	51.51	PK	140	1.7	V	39.9	5.98	26.42	70.97	74	3.03*	Harmonic
5785.344	54.81	PK	162	1.6	V	36.2	4.57	26.68	68.9	74	5.10	Harmonic
5785.344	53.27	PK	120	1.5	H	37.4	4.57	26.68	68.56	74	5.44	Harmonic
11570.688	46.83	PK	200	1.5	H	41.0	6.69	26.28	68.24	74	5.76	Harmonic
9642.24	47.54	PK	120	1.3	H	41.1	5.98	26.42	68.2	74	5.80	Harmonic
11570.688	47.16	PK	130	1.7	V	40.4	6.69	26.28	67.97	74	6.03	Harmonic
7713.792	49.04	PK	140	1.5	V	37.7	5.27	26.64	65.37	74	8.63	Harmonic
7713.792	45.23	PK	161	1.6	H	39.0	5.27	26.64	62.86	74	11.14	Harmonic
3856.896	52.07	PK	185	1.5	V	33.0	3.73	26.87	61.93	74	12.07	Harmonic
3856.896	48.55	PK	275	1.5	H	33.9	3.73	26.87	59.31	74	14.69	Harmonic

\*Within measurement uncertainty!

Field Strength of Spurious Emissions (Average)							
Freq. (MHz)	Peak Corrected Amplitude @ 3m (dB $\mu$ V/m)	Ant. Polar (H/V)	Duty Cycle Factor (dB)	Corrected Ave. Amplitude (dB $\mu$ V/m)	FCC 15.319(g)		Comment
					Limit (dB $\mu$ V/m)	Margin (dB)	
Low Channel							
5764.608	70.47	H	-27.96	42.51	54	11.49	Harmonic
9607.68	69.64	H	-27.96	41.68	54	12.32	Harmonic
9607.68	69.06	V	-27.96	41.1	54	12.90	Harmonic
11529.216	67.03	H	-27.96	39.07	54	14.93	Harmonic
7686.144	64.76	H	-27.96	36.8	54	17.20	Harmonic
11529.216	64.43	V	-27.96	36.47	54	17.53	Harmonic
5764.608	63.64	V	-27.96	35.68	54	18.32	Harmonic
3843.072	63.07	V	-27.96	35.11	54	18.89	Harmonic
7686.144	62.6	V	-27.96	34.64	54	19.36	Harmonic
3843.072	58.87	H	-27.96	30.91	54	23.09	Harmonic
Middle Channel							
9624.96	69.41	V	-27.96	41.45	54	12.55	Harmonic
9624.96	69.33	H	-27.96	41.37	54	12.63	Spurious
11549.942	68.66	V	-27.96	40.7	54	13.30	Harmonic
5774.976	68.33	V	-27.96	40.37	54	13.63	Harmonic
5774.976	68.09	H	-27.96	40.13	54	13.87	Harmonic
11549.942	66.31	H	-27.96	38.35	54	15.65	Harmonic
7699.968	66.09	V	-27.96	38.13	54	15.87	Harmonic
3849.984	64.87	V	-27.96	36.91	54	17.09	Harmonic
7699.968	63.42	H	-27.96	35.46	54	18.54	Harmonic
3849.984	60.06	H	-27.96	32.1	54	21.90	Harmonic
High Channel							
9642.24	70.97	V	-27.96	43.01	54	10.99	Harmonic
5785.344	68.9	V	-27.96	40.94	54	13.06	Harmonic
5785.344	68.56	H	-27.96	40.6	54	13.40	Harmonic
11570.688	68.24	H	-27.96	40.28	54	13.72	Harmonic
9642.24	68.2	H	-27.96	40.24	54	13.76	Harmonic
11570.688	67.97	V	-27.96	40.01	54	13.99	Harmonic
7713.792	65.37	V	-27.96	37.41	54	16.59	Harmonic
7713.792	62.86	H	-27.96	34.9	54	19.10	Harmonic
3856.896	61.93	V	-27.96	33.97	54	20.03	Harmonic
3856.896	59.31	H	-27.96	31.35	54	22.65	Harmonic

3) 30-1000 MHz, simultaneous transmission

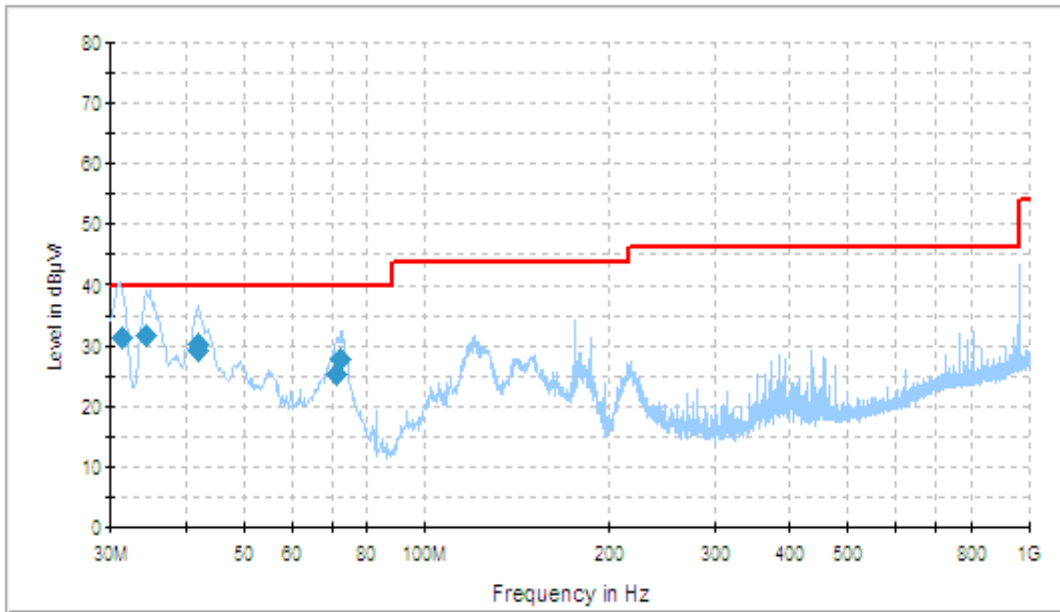

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
34.529000	31.8	102.0	V	333.0	-12.5	40.0	8.2
31.431500	31.5	124.0	V	0.0	-12.4	40.0	8.5
42.176000	30.4	103.0	V	0.0	-13.4	40.0	9.6
42.166750	29.4	102.0	V	8.0	-13.4	40.0	10.6
72.545000	27.9	281.0	H	0.0	-18.2	40.0	12.1
71.506750	25.3	400.0	H	186.0	-18.3	40.0	14.7

## 4) Above 1000 MHz, simultaneous transmission

Freq. (MHz)	S.A. Reading (dBμV)	Detector PK/QP/Ave	Direction Degree	Test Antenna			Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBuV/m)	FCC Part 15.319(g)/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBuV/m)	Margin (dB)	Remarks
7693.90	53	PK	162	1.5	V	37.7	5.27	26.64	69.33	74	4.67	Harmonic
5779.03	53.55	PK	120	1.5	H	37.4	4.57	26.68	68.84	74	5.16	Harmonic
5764.30	53.91	PK	185	1.5	V	36.2	4.57	26.68	68	74	6.00	Harmonic
5785.53	52.69	PK	165	1.5	H	37.4	4.57	26.68	67.98	74	6.02	Harmonic
7713.17	51.12	PK	140	1.5	V	37.7	5.27	26.64	67.45	74	6.55	Harmonic
5769.71	52.05	PK	120	1.5	H	37.4	4.57	26.68	67.34	74	6.66	Harmonic
7693.9	48.51	PK	120	1.5	H	39	5.27	26.64	66.14	74	7.86	Harmonic
7686.16	47.73	PK	185	1.5	V	37.7	5.27	26.64	64.06	74	9.94	Harmonic
7712.65	47.67	PK	140	1.5	V	37.7	5.27	26.64	64	74	10.00	Harmonic
7712.65	46.37	PK	161	1.5	H	39	5.27	26.64	64	74	10.00	Harmonic
7686.16	45.83	PK	275	1.5	H	39	5.27	26.64	63.46	74	10.54	Harmonic
5779.03	49.22	PK	140	1.5	V	36.2	4.57	26.68	63.31	74	10.69	Harmonic
5769.71	48.59	PK	10	1.5	V	36.2	4.57	26.68	62.68	74	11.32	Harmonic
3854.04	52.49	PK	87	1.5	V	33	3.73	26.87	62.35	74	11.65	Harmonic
5773.92	46.58	PK	166	1.5	H	37.4	4.57	26.68	61.87	74	12.13	Harmonic
7713.17	43.92	PK	120	1.5	H	39	5.27	26.64	61.55	74	12.45	Harmonic
5785.53	47.16	PK	180	1.5	V	36.2	4.57	26.68	61.25	74	12.75	Harmonic
3856.44	51.19	PK	190	1.5	V	33	3.73	26.87	61.05	74	12.95	Harmonic
5773.92	46.78	PK	140	1.5	V	36.2	4.57	26.68	60.87	74	13.13	Harmonic
3843.22	49.77	PK	190	1.5	V	33	3.73	26.87	59.63	74	14.37	Harmonic
3846.52	49.49	PK	120	1.5	V	33	3.73	26.87	59.35	74	14.65	Harmonic
3843.22	48.29	PK	289	1.5	H	33.9	3.73	26.87	59.05	74	14.95	Harmonic
5764.30	43.49	PK	60	1.5	H	37.4	4.57	26.68	58.78	74	15.22	Harmonic
3854.04	47.39	PK	300	1.5	H	33.9	3.73	26.87	58.15	74	15.85	Harmonic
3846.52	46.72	PK	265	1.5	H	33.9	3.73	26.87	57.48	74	16.52	Harmonic
3856.44	44.39	PK	245	1.5	H	33.9	3.73	26.87	55.15	74	18.85	Harmonic

Field Strength of Spurious Emissions (Average)							
Freq. (MHz)	Peak Cord. Amplitude @ 3m (dB $\mu$ V/m)	Ant. Polar (H/V)	Duty Cycle Factor (dB)	Corrected Ave Amplitude (dB $\mu$ V/m)	FCC 15.319(g)		Comment
					Limit (dB $\mu$ V/m)	Margin (dB)	
7693.90	69.33	V	-27.96	41.37	54	12.63	Harmonic
5779.03	68.84	H	-27.96	40.88	54	13.12	Harmonic
5764.30	68	V	-27.96	40.04	54	13.96	Harmonic
5785.53	67.98	H	-27.96	40.02	54	13.98	Harmonic
7713.17	67.45	V	-27.96	39.49	54	14.51	Harmonic
5769.71	67.34	H	-27.96	39.38	54	14.62	Harmonic
7693.90	66.14	H	-27.96	38.18	54	15.82	Harmonic
7686.16	64.06	V	-27.96	36.1	54	17.90	Harmonic
7712.65	64	V	-27.96	36.04	54	17.96	Harmonic
7712.65	64	H	-27.96	36.04	54	17.96	Harmonic
7686.16	63.46	H	-27.96	35.5	54	18.50	Harmonic
5779.03	63.31	V	-27.96	35.35	54	18.65	Harmonic
5769.71	62.68	V	-27.96	34.72	54	19.28	Harmonic
3854.04	62.35	V	-27.96	34.39	54	19.61	Harmonic
5773.92	61.87	H	-27.96	33.91	54	20.09	Harmonic
7713.17	61.55	H	-27.96	33.59	54	20.41	Harmonic
5785.53	61.25	V	-27.96	33.29	54	20.71	Harmonic
3856.44	61.05	V	-27.96	33.09	54	20.91	Harmonic
5773.92	60.87	V	-27.96	32.91	54	21.09	Harmonic
3843.22	59.63	V	-27.96	31.67	54	22.33	Harmonic
3846.52	59.35	V	-27.96	31.39	54	22.61	Harmonic
3843.22	59.05	H	-27.96	31.09	54	22.91	Harmonic
5764.30	58.78	H	-27.96	30.82	54	23.18	Harmonic
3854.04	58.15	H	-27.96	30.19	54	23.81	Harmonic
3846.52	57.48	H	-27.96	29.52	54	24.48	Harmonic
3856.44	55.15	H	-27.96	27.19	54	26.81	Harmonic

Note: Duty Cycle=Ton/Tp\*100%


Ton=400  $\mu$ s =0.4 ms, Tp=10 ms

Duty Cycle = 4%

Duty Cycle Factor = 20lg (Duty Cycle) = -27.96 dB


Average = Peak + Duty Cycle Factor

T<sub>on</sub>:

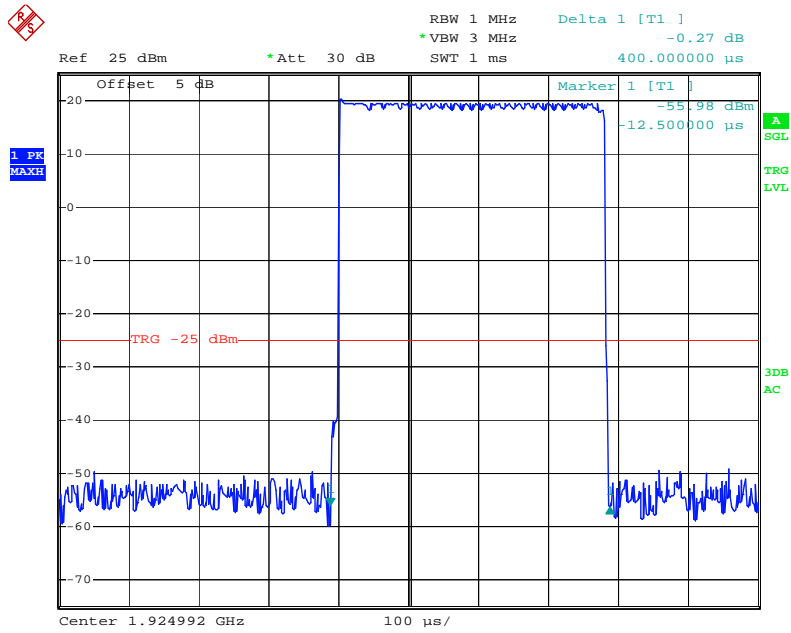

Date: 9.MAR.2011 02:22:47

T<sub>p</sub>:

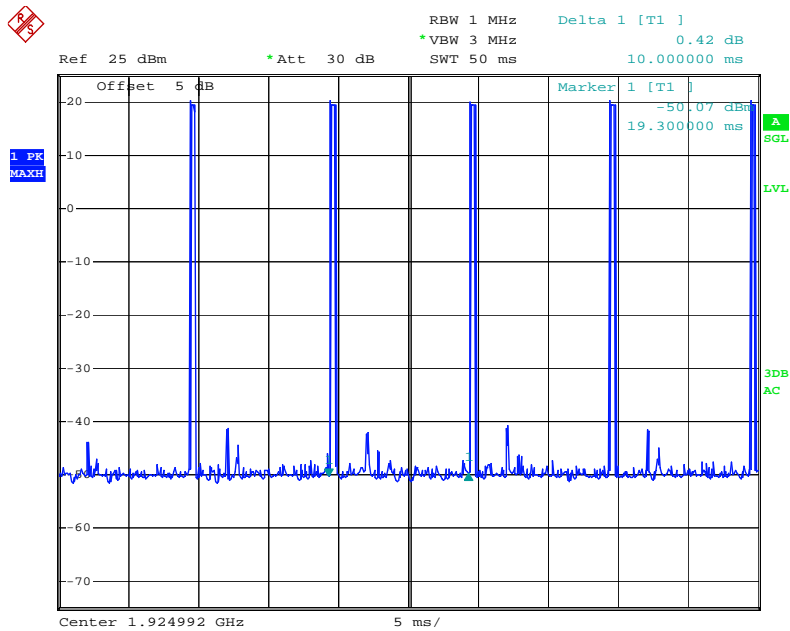

Date: 9.MAR.2011 02:26:12



## FCC §15.323 (f) - FREQUENCY STABILITY

### Applicable Standard

Per FCC §15.323(f), the frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of  $-20^{\circ}$  to  $+50^{\circ}$  C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of  $20^{\circ}$  C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

### Test Procedure

This procedure should be carried out for each of the following test cases:

Temperature	Supply Voltage
$20^{\circ}$ C	85-115% of declared nominal voltage
$-20^{\circ}$ C	Normal
$+50^{\circ}$ C	Normal

<sup>a</sup> Use the lowest temperature at which the EUT is specified to operate if it is above  $-20^{\circ}$  C.

Using the mean carrier frequency at  $20^{\circ}$  C and at nominal supply voltage as the reference, the mean carrier frequency shall be maintained within  $\pm 10$  ppm at the two extreme temperatures (or as declared by the manufacturer) and at normal temperature (typically  $20^{\circ}$  C) at the two extreme supply voltages.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2010-06-04	2011-06-03
R & S	Digital Radio-Communication Tester	CMD60	829902/026	2010-10-21	2011-10-20

### Test Data

#### Environmental Conditions

Temperature:	$20^{\circ}$ C
Relative Humidity:	50 %
ATM Pressure:	100.0 kPa

*The testing was performed by Jim Huang on 2011-03-10*

**Test Result:** Compliance.

*Test Mode: Transmitting with adapter.*

Temperature (°C)	Voltage (V <sub>AC</sub> )	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
20	102	1924.992	-13	-6.75	± 10
	120	1924.992	-12	-6.23	± 10
	138	1924.992	-11	-5.71	± 10
0	120	1924.992	-13	-6.75	± 10
40	120	1924.992	-10	-5.19	± 10

*Test Mode: Transmitting with battery.*

Temperature (°C)	Voltage (V <sub>DC</sub> )	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
20	5.1	1924.992	-10	-5.19	± 10
	6.0	1924.992	-8	-4.15	± 10
	6.9	1924.992	-11	-5.17	± 10
0	6.0	1924.992	-12	-6.23	± 10
40	6.0	1924.992	-14	-7.27	± 10

---

**FCC §15.323 & §15.319(f) – SPECIFIC REQUIREMENTS FOR UPCS DEVICE**

---

**Automatic Discontinuation of Transmission, FCC Part 15.319(f)**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

**Test Procedure:**

Please according to the declaration provided by manufacturer.

**Test result:**

Meet the requirement

**Monitoring Time FCC 15.323 (c) (1)**

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 7.3.4

**Test result:**

EUT monitors the combined time and spectrum window prior to initiation of transmission. Test result please according to FCC15.323(c) (4).

**Lower Monitoring Threshold Part15.323 (c) (2)**

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 7.3.1

**Test result:** Not Apply

**Maximum Transmit Period FCC Part15.323 (c) (3)**

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 8.2.2

**Test result:**

Repetition of Access Criteria	Measured Maximum Transmission Time (Second)	Limit (Second)	Results
First	19800	28,800	Pass
Second	19800	28,800	Pass

**System Acknowledgement, FCC Part15.323 (c) (4)**

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 8.1.1, 8.2.1

**Test result:**

Test	Time taken (second)	Limit (second)	Result
Connection acknowledgement	0.1	1	Pass
Change of access criteria for control information	20.5	30	Pass
Transmission cease time	1.2	30	Pass
Pulse length	0.0004	0.01	Pass

**Least Interfered Channel (LIC) Selection, FCC Part15.323 (c) (5)**

If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed.

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold:  $T_L = -174 + 10\log_{10}B + M_u + P_{MAX} - P_{EUT}$  (dBm)

Upper threshold:  $T_U = -174 + 10\log_{10}B + M_u + P_{MAX} - P_{EUT}$  (dBm)

Where: B=Emission bandwidth (Hz)

$M_u$  =dB the threshold may exceed thermal noise (30 for  $T_L$  & 50 for  $T_U$ )

$P_{MAX} = 5\log_{10}B - 10$  (dBm)

$P_{EUT}$  =Transmitted power (dBm)

**Limit:**

Monitor Threshold	B (MHz)	Mu (dB)	$P_{MAX}$ (dBm)	$P_{EUT}$ (dBm)	Threshold (dBm)
$T_L$	1.488	30	20.86	20.04	-81.45
$T_U$	1.488	50	20.86	20.04	-61.45

The EUT must not transmit until the interference level is less than or equal to:

Measured Threshold Level  $\leq T_U$

Where:  $T_U$  =Upper threshold level

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 7.3.2, 7.3.3, 7.3.4

**Test result:**

Monitor threshold	Measured Threshold Level	Limit (dBm)
Lower Threshold (dBm)	N/A	-81.45
Upper Threshold (dBm)	-65.4	-61.45

Note: The upper threshold is applicable as the EUT utilizes more than 40 duplex system channels

**Random waiting FCC 15.323(c) (6)**

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same window after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 8.1.3

**Test result:**

The manufacturer declares that this provision is not utilized by the EUT.

**Monitoring Bandwidth, FCC Part 15.323 (c) (7)**

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than  $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 7.5

**Test result:**

Test Equation ( $\mu\text{s}$ )	Bandwidth (MHz)	Pulse width ( $\mu\text{s}$ )	Limit ( $\mu\text{s}$ )	Result
$50 (1.25/B)^{1/2}$	1.488	45.83	50	Pass
$35 (1.25/B)^{1/2}$	1.488	32.08	35	Pass

**Monitoring Antenna, FCC Part 15.323 (c) (8)**

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 paragraph 4

**Test result:**

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

**Monitoring threshold relation FCC 15.323(c) (9)**

Devices that have a power output lower than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 paragraph 4

**Test result:**

Not apply based on 15.323 (c) (5)

**Duplex Connections, FCC Part 15.323 (c) (10)**

An initiating device may attempt to establish a duplex connection by monitors both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 8.3

**Test result:**

The manufacturer declares that this provision is not utilized by the EUT.

**Alternative monitoring interval for co-located devices, FCC Part 15.323 (c) (11)**

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 8.4

**Test result:**

The manufacturer declares that this provision is not utilized by the EUT.

**Fair Access, FCC Part 15.323 (c) (12)**

The provisions of FCC Part 15.323(c)(10) or (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

**Test result:**

The manufacturer declares that this device does not use any mechanisms as provided by Part 15.323 (c) (10) or (c) (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

**Frame Repetition Stability, Part 15.323 (e)**

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number.

**Test procedure:**

Measurement method according to ANSI C63.17-2006 clause 6.2.2, 6.2.3

**Test result:**

## Frame Repetition Stability:

Frame Repetition Stability (ppm)	Limit (ppm)	Result (Pass/Fail)
-0.98	10	Pass

## Frame Period and Jitter:

Max.Pos.jitter (us)	Max.Neg.jitter (us)	Frame period	Limit	
			Frame Period (ms)	Jitter (us)
0.01	-0.01	10.00000	20 or10/X	25us

Note: X is a positive whole number.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***