

**GE Security, Inc.  
Wireless Iconized LCD Touchpad  
B4Z-863-WILT  
Certification**

10/28/04 12:38 PM	<b>FCC ID: B4Z-863-WILT</b>	Page 1 of 20
C:\prj\touchpad\fcc-rpt\work\FCC_REPT.DOC		

**GE Security, Inc**

**Wireless IR Sensor  
B4Z-863-WILT**

**9/28/04**

**GE Security, Inc.  
1275 Red Fox Road  
Arden Hills, MN 55112  
(651) 777-2690**

# GE Security, Inc

1. INTRODUCTION	4
2. STATEMENT OF COMPLIANCE	4
3. LAB MEASUREMENTS DISCUSSION / TEST NOTES	7
3.1 Test Notes	7
3.1.1 Transmissions shall cease within 5 seconds of activation [ §15.231(a)(2) ]	7
3.1.2 Supervisory Calculation [ §15.231(a)(3) ]	10
3.1.3 Duty Cycle Correction Factor [§15.231(b)(2) and §15.35(c)]	10
3.1.4 Bandwidth Measurement [ §15.231(c) ]	13
3.1.5 Emissions Measurements	17
3.1.5.1 Radiated Emissions Summary	17
3.1.5.2 FCC Emissions Calculation	17
3.1.5.2.1 Terms	17
3.1.5.2.2 Example Calculation	18
3.1.5.3 Radiated Emissions	18
3.1.5.4 Forbidden Bands	19

# GE Security, Inc

## 1. Introduction

This device sends user input to the control panel and displays the resulting status from the control panel. In addition, this device monitors an alarm input; when an alarm condition is present, the device transmits alarm packets to the control panel. The power for the transmitter is supplied from 4 AA alkaline batteries. The transmitter's frequency is controlled by a SAW device, and is not adjustable by the user. The device measures approximately 5½" x 5" x 1¼". The unit weighs about 11 ounces.

We are requesting Certification under FCC Rules, Part 15, Subpart C, Paragraph 15.231.

Please send comments/suggestions on the report format to [john.bergman@ge.com](mailto:john.bergman@ge.com).

Grantee Code: B4Z

## 2. Statement of Compliance

### §2.907

#### Certification

This is an application for certification

### §2.911

#### Application

- a) This is an application and has been filed electronically with form 731.
- b) All information required has been supplied.
- c) The applicant has signed the application (electronically).
- d) The technical data has been signed.  
(See Radiated Emissions)
- e) Applicant signature block on electronic form 731 completed by officer of the company or authorized company personnel.
- f) The appropriate fee has been paid electronically with VISA on 08/24/04.

### §2.915

#### Grant

This application demonstrates that all applicable technical standards have been met and a grant of this application will serve the public interest.

### §2.925

#### Label

Each piece of equipment for which authorization will be granted will be uniquely identified with "FCC ID: B4Z-863-WILT." The required statement will appear with the FCC ID on the product and, although not required, in the installation instructions. See Exhibit A, PDF file *id\_label.pdf*

FCC_REPT.DOC 10/28/04 12:38 PM	FCC ID: B4Z-863-WILT	Page 4 of 20
-----------------------------------	----------------------	--------------

# GE Security, Inc

## §2.947

### **Measurement Procedure**

- a) The measurement procedure follows ANSI C63.4 procedure. Procedural notes are contained in the laboratory report.
- d) A list of test equipment used is contained in the laboratory report.

## §2.948

### **Description of Measurement Facilities**

Measurements were performed at TUV Testing Services Open Test Site. The FCC keeps a full description of the measurement facilities on file. TUV's acceptance and approval is dated as December 5, 1993 in a letter received from the FCC.

The address of the test facility is:

TUV Product Service  
19035 Wild Mountain Road  
Taylors Falls, MN 55084-1758

Phone: 651-638-0297  
Contact: Joel Schneider  
Test Engineer in Charge

See Exhibit F, PDF file *test\_phot.pdf* for sketch of measurement setup

## §2.1033

### **Application for Certification**

- a) Form 731 has been electronically filed on 10/28/04. Items that did not apply were left blank.
- b) This technical report contains the following information where applicable.
  - 1) Full name and mailing address of manufacturer and applicant for certification:  
GE Security, Inc.  
1275 Red Fox Road  
Arden Hills, MN 55112
  - 2) FCC Identifier:  
**B4Z-863-WILT**
  - 3) Copy of installation instructions:  
See Exhibit G, PDF file: *user\_man.pdf*
  - 4) Brief Description of circuit functions and device operation:  
See Exhibit I, PDF file *op\_desc.pdf*  
See Exhibit D, PDF file *schemat.pdf* for schematics (page 1) and parts placement (pages 2) diagrams.
  - 5) Block Diagram

FCC_REPT.DOC 10/28/04 12:38 PM	<b>FCC ID: B4Z-863-WILT</b>	Page 5 of 20
-----------------------------------	-----------------------------	--------------

# GE Security, Inc

- See Exhibit C, PDF file *block.pdf*.
- 6) Report of the measurements of radiation and conducted emissions:  
This document.
- 7) Photographs  
External:  
See Exhibit B, PDF file *extern.pdf*  
Internal:  
See Exhibit H, PDF file *intern.pdf*
- 8) Peripheral or Accessory devices:  
This is not applicable to device in this application.
- 9) Transition Rules  
This application is not pursuant to the transition rules of §15.37
- 10) Emergency Broadcast decoding:  
This is not applicable to device in this application.
- 11) Application for direct sequence spread spectrum devices...  
This is not applicable to device in this application.
- 12) Application for scanning receivers...  
This is not applicable to device in this application.
- c) Composite Systems  
This is not applicable to device in this application.

### 3. Lab Measurements Discussion / Test Notes

#### 3.1 Test Notes


3.1.1 Transmissions shall cease within 5 seconds of activation [ **§15.231(a)(2)** ]


Key transmissions consist of 2 packets and alarm transmissions consist of 8 packets. The packet duration is, at most, 30 mS, see **Duty Cycle Correction Factor [§15.231(b)(2) and §15.35(c)]**. The time between packets random between 100 mS and 450 mS so the length of the longest transmission is:

$$8*30\text{mS} + 7*450\text{mS} = 3.39 \text{ seconds.}$$

The following plots show a 2-packet transmission and an 8-packet transmission that concludes in less than 5 seconds.

10/28/04 12:38 PM	<b>FCC ID: B4Z-863-WILT</b>	Page 7 of 20
C:\prj\touchpad\fcc-rpt\work\FCC_REPT.DOC		

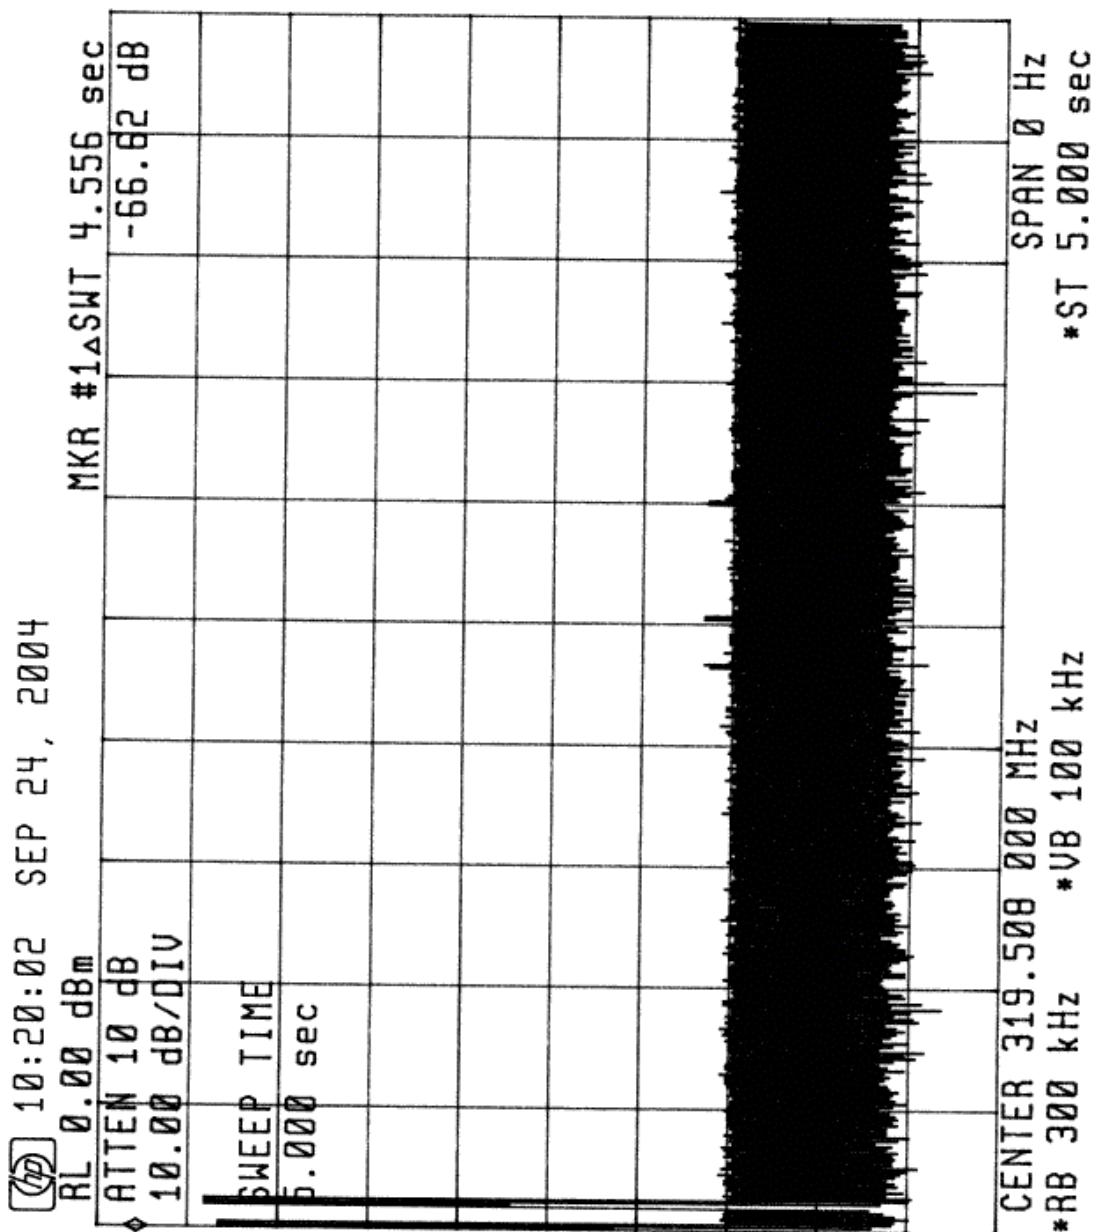

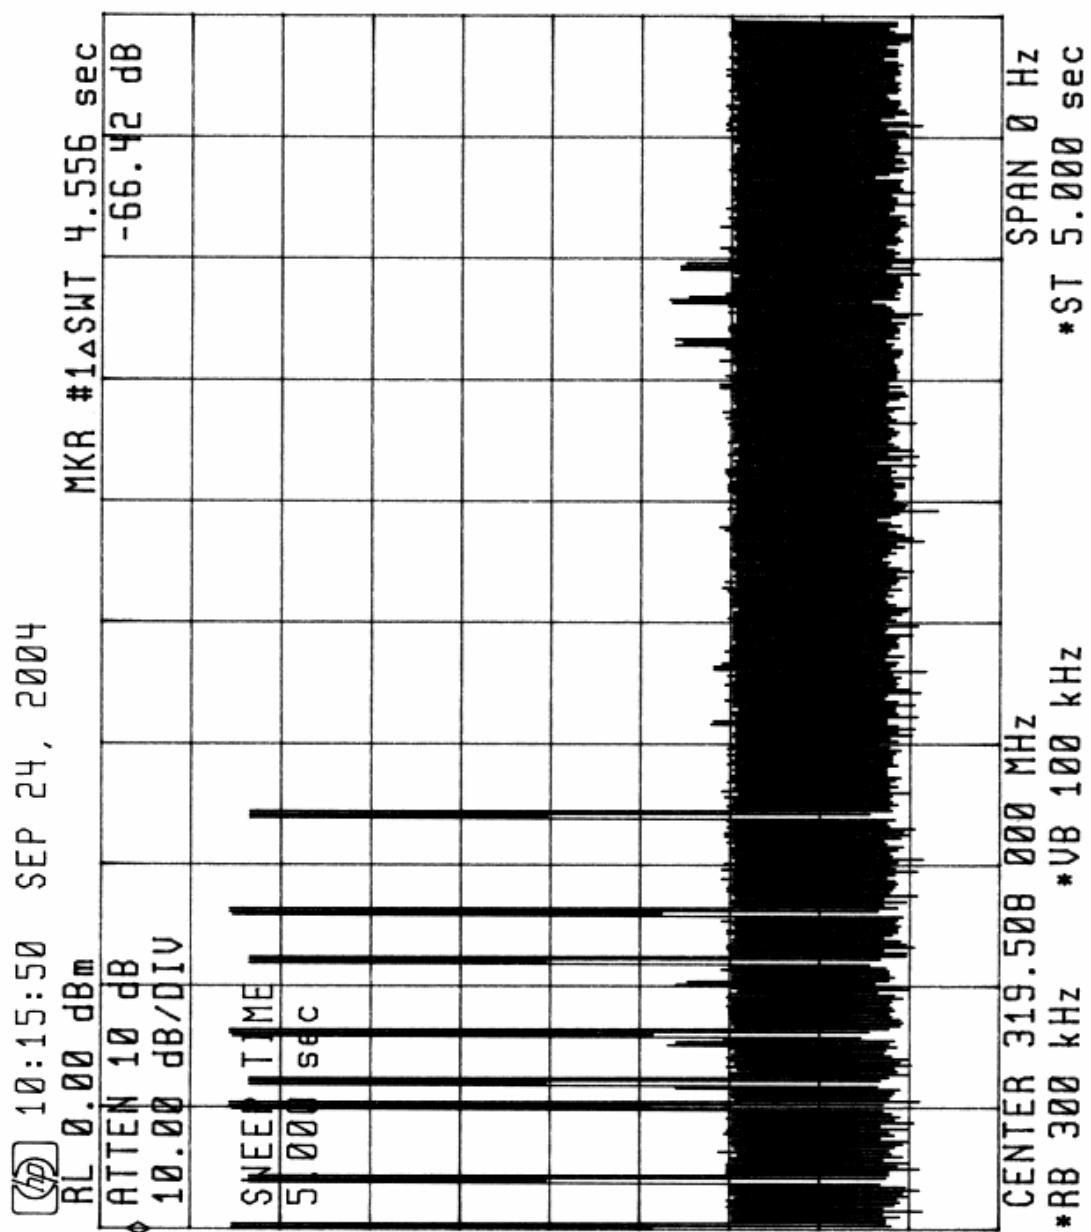

## GE Security, Inc

### 3.1.2 Supervisory Calculation [ §15.231(a)(3) ]

As permitted, this device may transmit three packets for supervision purposes. The inter-packet delay is a random time between 100 mS and 450 mS. The packet itself may be as long as 30 ms depending on the data sent. The longest time to conclude a supervisory transmission is then:

$$3 * 30 \text{ mS} + 2 * 450 \text{ mS} = 990 \text{ mS}$$

### 3.1.3 Duty Cycle Correction Factor [§15.231(b)(2) and §15.35(c)]

The transmitter employs amplitude modulation and transmits 61 bits. The packet begins with an “ON” time of 854  $\mu$ S, each bit has an “ON” time of 122  $\mu$ S, and one bit has an additional 244  $\mu$ S. The total “ON” time of a single packet is:

$$854 \mu\text{S} + 61 * 122 \mu\text{S} + 244 \mu\text{S} = 8.54 \text{ mS.}$$

Only one packet is sent in any given 100 mS window for a duty cycle correction factor of:


$$20 * \text{LOG}(8.54/100) = -21.4 \text{ dB}$$


The maximum allowed correction factor is -20.0 dB.

The following plots show:

1. Single packet in 100 mS window.
2. Expanded view of a packet with a duration of 18.3 mS

FCC_REPT.DOC 10/28/04 12:38 PM	FCC ID: B4Z-863-WILT	Page 10 of 20
-----------------------------------	----------------------	---------------

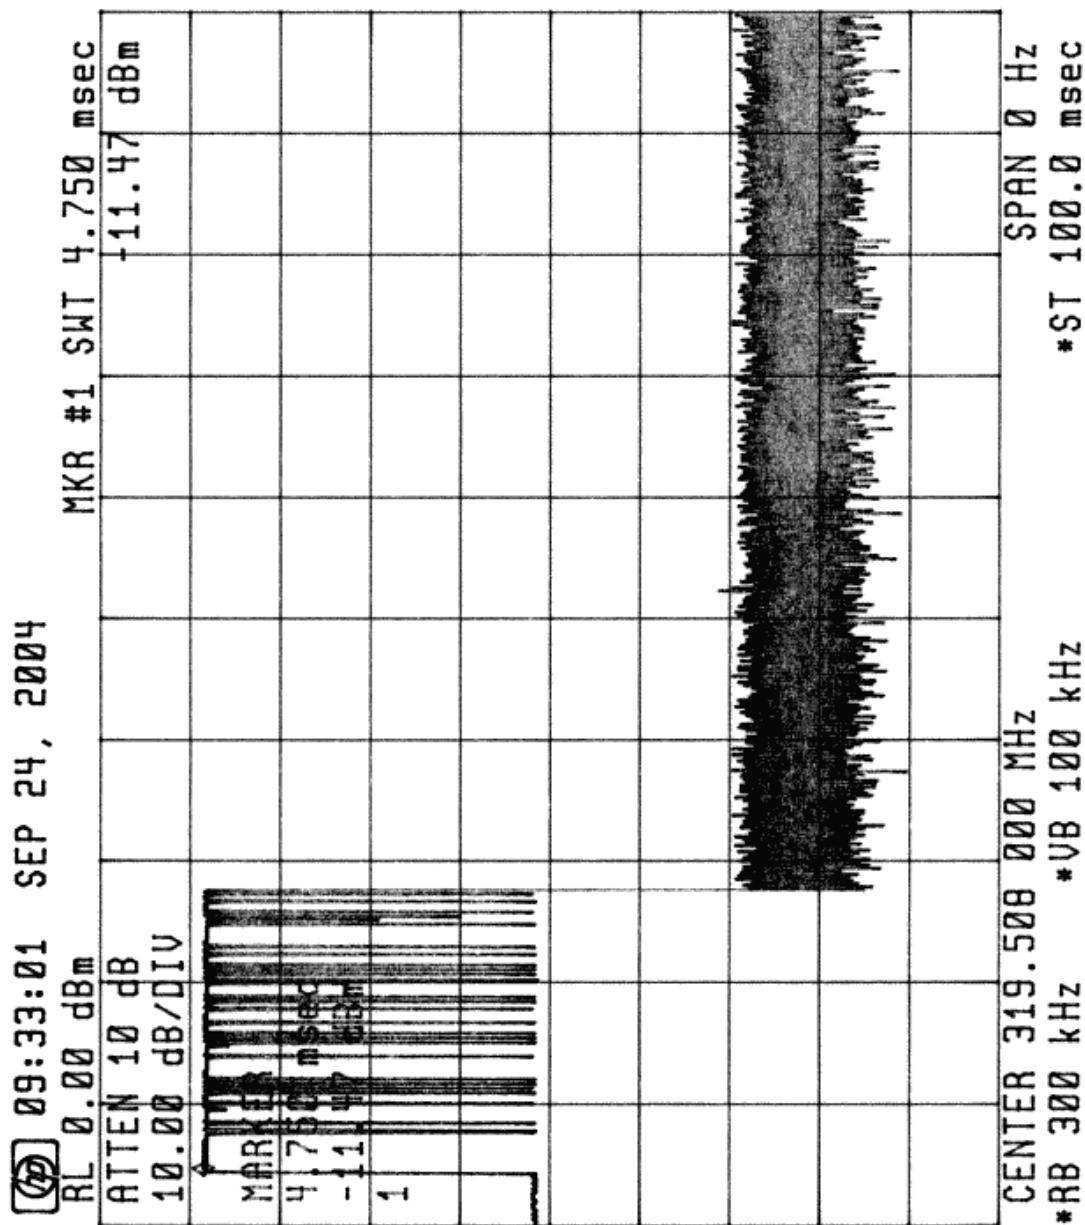

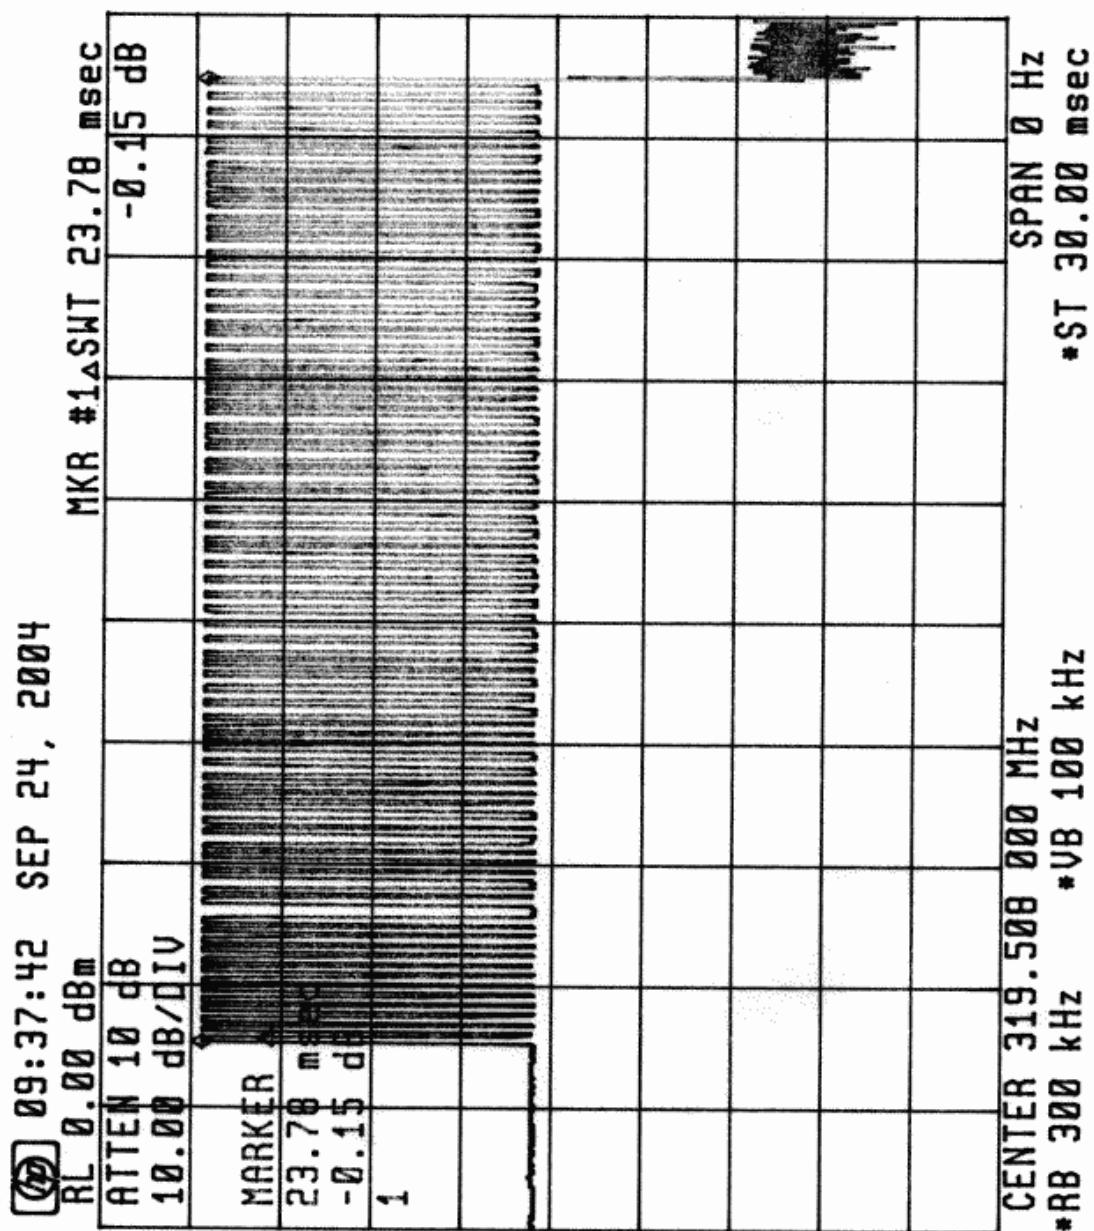

## GE Security, Inc

### 3.1.4 Bandwidth Measurement [ §15.231(c) ]

Bandwidth Measurements were made in peak mode, using a Hewlett Packard Spectrum Analyzer, model number 70000.

The spectrum analyzer 20 dB skirt bandwidth is 1.8 KHz.


The allowed 20 dB bandwidth is 0.25% of center frequency.


Estimated signal bandwidth = Measured signal bandwidth - analyzer bandwidth.


Nominal Center Frequency MHz	Measured 20 dB Bandwidth in KHz	Estimated 20 dB signal Bandwidth in KHz	FCC allowed 20 dB Bandwidth in KHz
319.508	43.0	41.2	799

The following three plots show:

1. Bandwidth of carrier without modulation
2. Bandwidth of signal with modulation, 200 kHz span
3. Bandwidth of signal with modulation, 200 MHz span

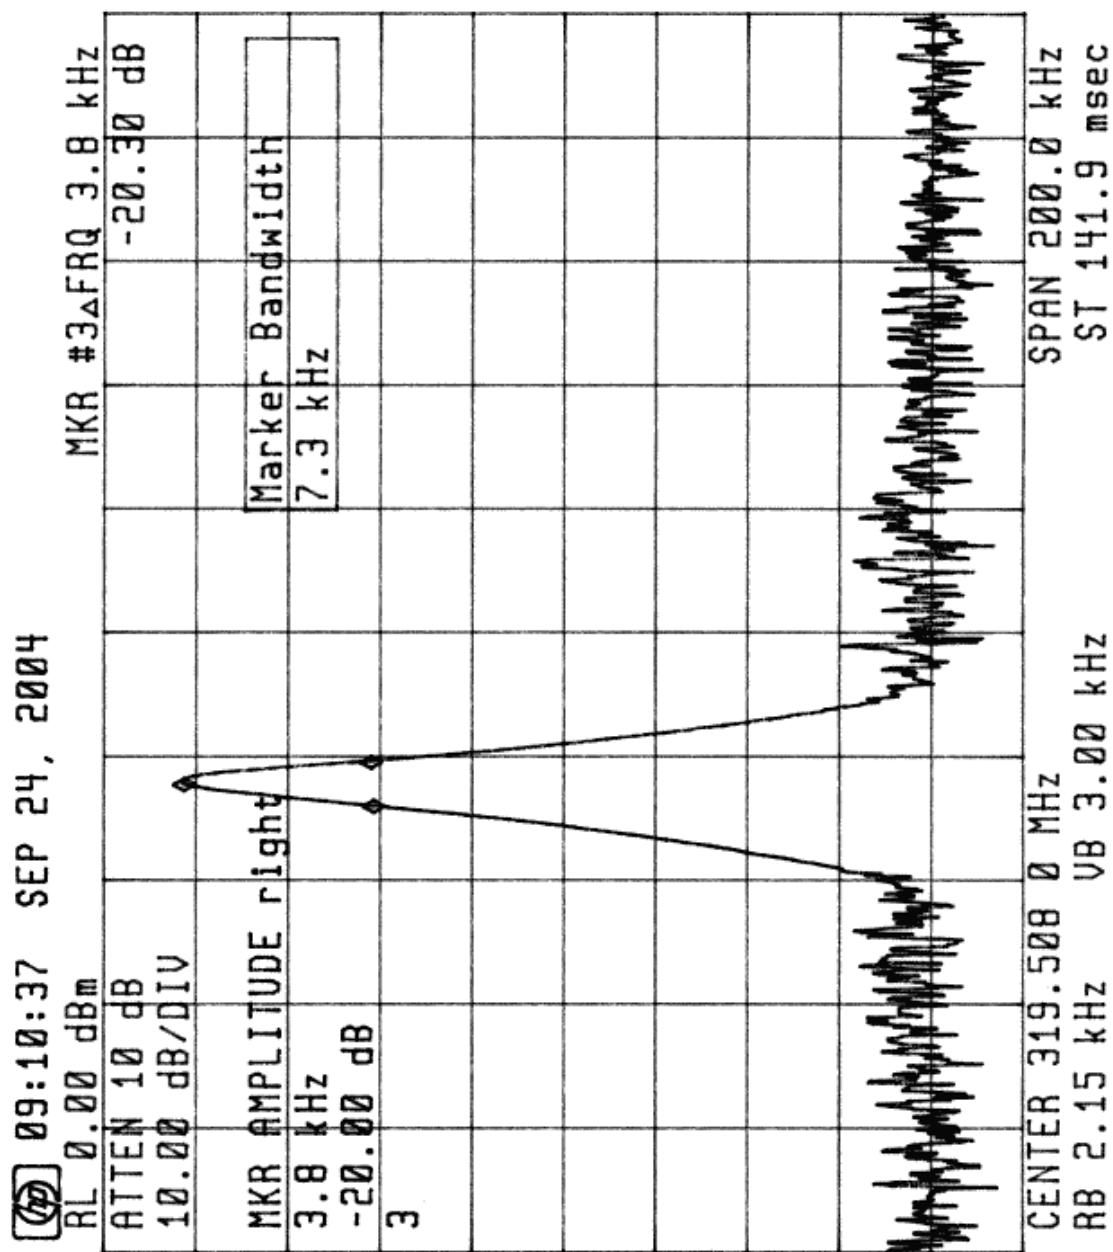

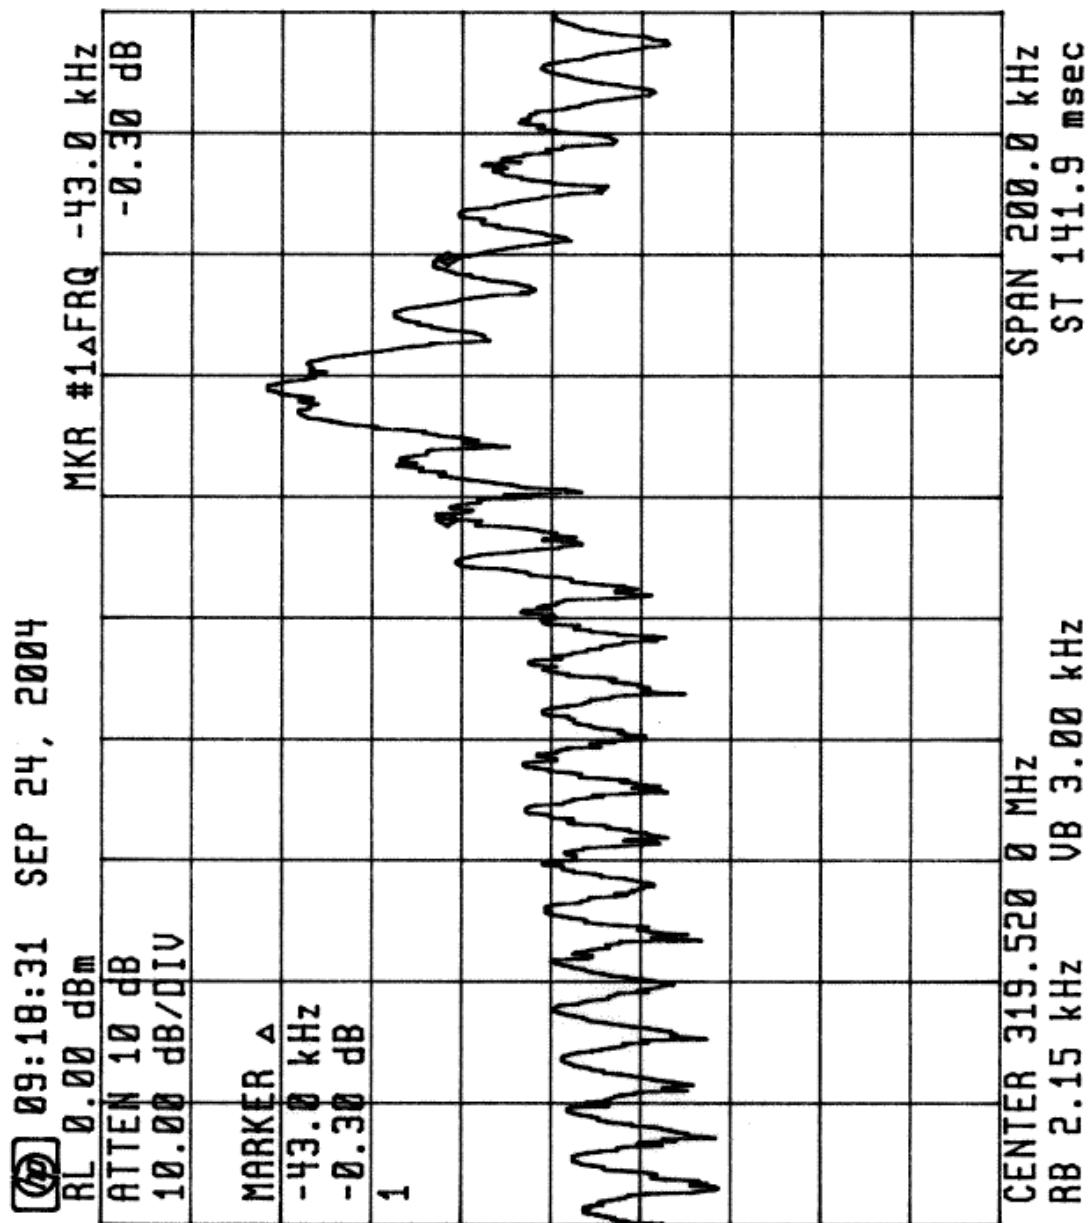

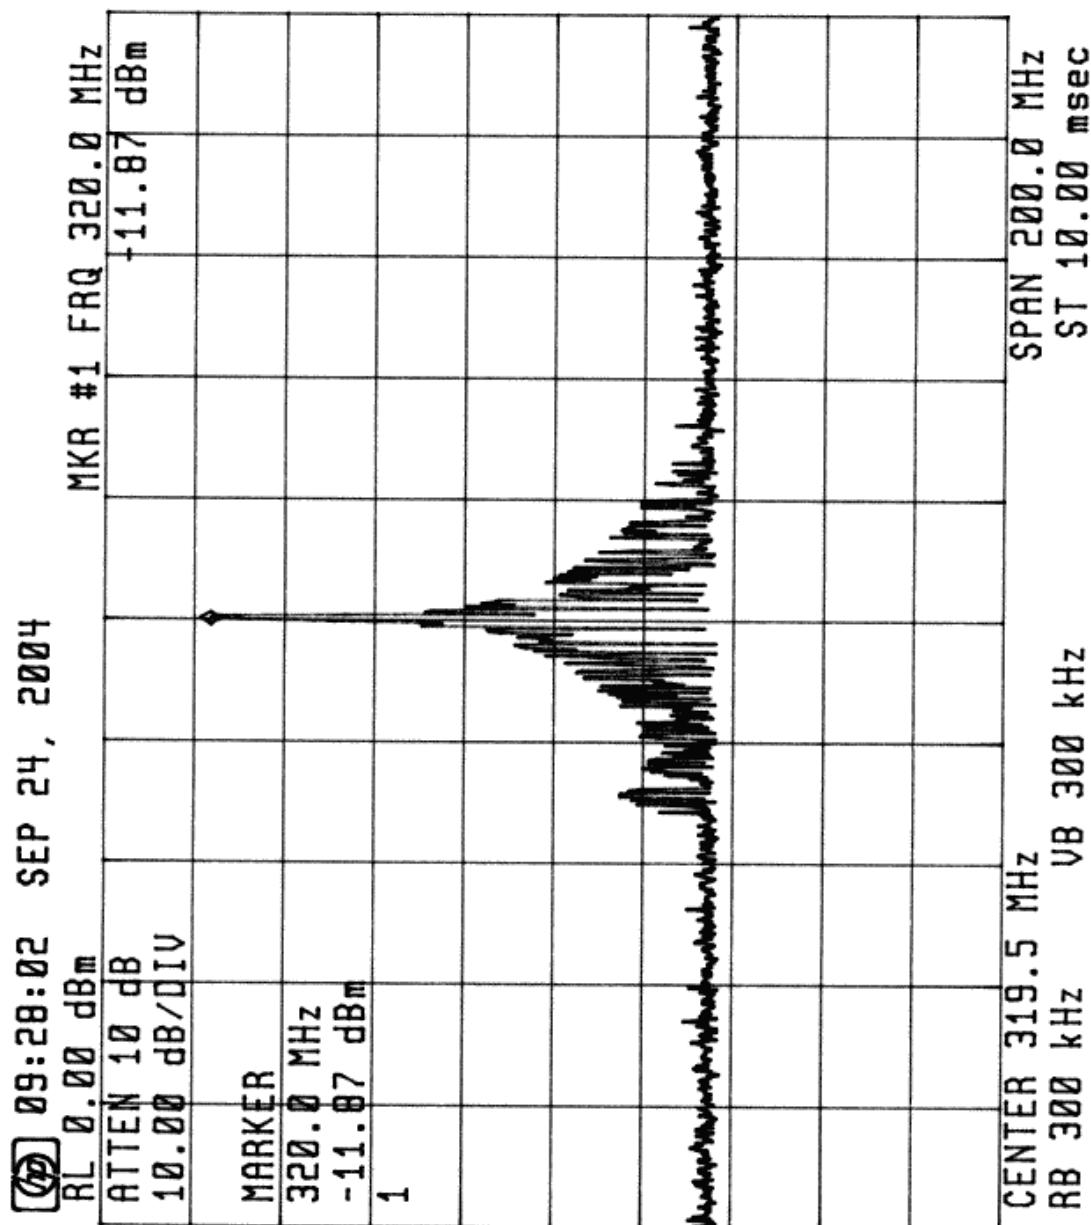

# GE Security, Inc

## 3.1.5 Emissions Measurements

### 3.1.5.1 Radiated Emissions Summary

The Wireless Iconized LCD Touchpad transmitter passes FCC Rules Part 15, Subpart C, Paragraph 15.231. The highest fundamental radiated emission was 4.98 dB below the FCC limit at 319.5 MHz. The highest spurious emission measurement was 4.58 dB below the FCC limit at 958.5 MHz. This highest forbidden band spur was 19.84 dB below the FCC limit at 1598 MHz.

### 3.1.5.2 FCC Emissions Calculation

#### 3.1.5.2.1 Terms

Term	Abbreviation	Units	Description
Analyzer Reading	AR	dB $\mu$ V	The power reading read directly from the analyzer without any correction for cabling or receive antenna.
Duty Cycle Correction	DC	dB	Correction for averaging measurement, see <b>Duty Cycle Correction Factor</b> [§15.231(b)(2) and §15.35(c)]
Antenna Factor	AF	dB	Calibration factor for measurement antenna which converts from dB $\mu$ V measured with antenna to the field strength received by the antenna in dB $\mu$ V/M.
Cable Loss	CL	dB	Amount of power lost in cable (and connectors, if any) between antenna and analyzer
Pre-Amp	PA	dB	Gain in pre-amp

## GE Security, Inc

### 3.1.5.2.2 Example Calculation

AR = 99.3 dB $\mu$ V

AF = 13.9 dB

CL = 3.8 dB

DC = 20 dB

PA=26.2 dB

The field strength for comparison to FCC limits is found to be:

$$AR + AF + CL - DC - PA = 99.3 + 13.9 + 3.8 - 20 - 26.2 = 70.8 \text{ dB}\mu\text{V/M}$$

Alternatively, the AR + AF +CL -PA is compared to the FCC limit + DC. This number is often written to the right of measurement data on the test results. For example, the FCC limit for ITI transmitters at 319.5 MHz is approximately 95.9 dB $\mu$ V/M. The limit from §15.231(b) with linear interpolation yields a limit, without consideration for duty cycle, of approximately 75.9 dB $\mu$ V/M.

To convert to  $\mu$ V/M the following equation is used:

$$\mu\text{V/M} = \text{INVLOG}(\text{dB}\mu\text{V/M} / 20)$$

For the above example, 70.8 dB $\mu$ V/M is 3,467.369 $\mu$ V/M

### 3.1.5.3 Radiated Emissions

The highest fundamental emission along with the three highest spurious and restricted band emissions are listed below as per ANSI C63.4 paragraph 10.1.8.2. Emissions from 0.009 MHz to the tenth harmonic were measured as per FCC Rules Part 15, Subpart C, Paragraph 15.33(a). Emission limits were derived from §15.231(b).

Side Antenna

Frequency	Analyzer Reading	Duty Cycle Correction	Cable Loss	Antenna Factor	Pre-Amp	Field Strength	Field Strength	FCC Limit
MHz	dB $\mu$ V	dB	dB	dB	dB	dB $\mu$ V/M	uV/M	uV/M
319.5	97.95	20	1.5	14.1	26.7	66.85	2,200	6,229
639	62.9	20	2.1	20	27.1	37.9	79	617
958.6	69.5	20	2.68	23.3	26.5	48.98	281	617
1278	72.8	20	3.1	26.6	40.6	41.9	124	617
1597.5	65.1	20	3.52	27.3	41.8	34.12	51	495
1917	53.6	20	3.88	29.1	42.7	23.88	16	617

# GE Security, Inc

## Top Antenna

Frequency	Analyzer Reading	Duty Cycle Correction	Cable Loss	Antenna Factor	Pre-Amp	Field Strength	Field Strength	FCC Limit
MHz	dBuV	dB	dB	dB	dB	dBuV/M	uV/M	uV/M
319.5	101.9	20	1.5	14.1	26.7	70.8	3,467	6,229
639	59.2	20	2.1	20	27.1	34.2	51	617
958.6	71.75	20	2.68	23.3	26.5	51.23	364	617
1278	66	20	3.1	26.6	40.6	35.1	57	617
1597.5	59.45	20	3.52	27.3	41.8	28.47	27	495
1917	52.85	20	3.88	29.1	42.7	23.13	14	617

### 3.1.5.4 Forbidden Bands

Noise floor of spectrum analyzer with antenna factors and duty cycle correction converted to  $\mu$ V/M at approximately one meter.

All measurements were taken with an HP 8566B Spectrum Analyzer. The bandwidth was 100 KHz for measurements below 1000 MHz. The bandwidth was 1 MHz for measurements above 1000 MHz. The video filter was off.

The noise floor measurements are summarized in the table below. See also the test data included in this report.

# GE Security, Inc

Frequency Range									
Low Limit	High Limit	Noise Floor Reading	Duty Cycle Corr	Field Strength	Field Strength	FCC Limit @ 3M	FCC Limit @ 1M		
MHz	MHz	dBuV	dB	dBuV/M	uV/M	uV/M	uV/M		
0.09000	0.11000	N/A	20	N/A	N/A	2400/F			
0.49500	0.50500	N/A	20	N/A	N/A	2400/F			
2.13750	2.19050	N/A	20	N/A	N/A	30	90		
4.12500	4.12800	N/A	20	N/A	N/A	30	90		
4.17725	4.17775	N/A	20	N/A	N/A	30	90		
4.20725	4.20775	N/A	20	N/A	N/A	30	90		
6.21500	6.21800	N/A	20	N/A	N/A	30	90		
6.26775	6.26825	N/A	20	N/A	N/A	30	90		
6.31175	6.31225	N/A	20	N/A	N/A	30	90		
8.29100	8.29400	N/A	20	N/A	N/A	30	90		
8.36200	8.36600	N/A	20	N/A	N/A	30	90		
8.37625	8.38675	N/A	20	N/A	N/A	30	90		
8.41425	8.41475	N/A	20	N/A	N/A	30	90		
12.29000	12.29300	N/A	20	N/A	N/A	30	90		
12.51975	12.52025	N/A	20	N/A	N/A	30	90		
12.57675	12.57725	N/A	20	N/A	N/A	30	90		
13.36000	13.41000	N/A	20	N/A	N/A	30	90		
16.42000	16.42300	N/A	20	N/A	N/A	30	90		
16.69475	16.69525	N/A	20	N/A	N/A	30	90		
16.80425	16.80475	N/A	20	N/A	N/A	30	90		
25.50000	25.67000	N/A	20	N/A	N/A	30	90		
37.50000	38.25000	N/A	20	N/A	N/A	100	300		
73.00000	74.60000	N/A	20	N/A	N/A	100	300		
74.80000	75.20000	N/A	20	N/A	N/A	100	300		
108.00000	121.94000	N/A	20	N/A	N/A	150	450		
123.00000	138.00000	N/A	20	N/A	N/A	150	450		
149.90000	150.05000	N/A	20	N/A	N/A	150	450		
156.52475	156.52525	N/A	20	N/A	N/A	150	450		
156.70000	156.90000	N/A	20	N/A	N/A	150	450		
162.01250	167.17000	N/A	20	N/A	N/A	150	450		
167.72000	173.20000	N/A	20	N/A	N/A	150	450		
240.0	285.0	N/A	20	N/A	N/A	200	600		
322.0	335.4	N/A	20	N/A	N/A	200	600		
399.9	410.0	N/A	20	N/A	N/A	200	600		
608.0	614.0	N/A	20	N/A	N/A	200	600		
960.0	1240.0	N/A	20	N/A	N/A	500	1500	1065, 1171	
1300.0	1427.0	N/A	20	N/A	N/A	500	1500	1384	
1435.0	1626.5	48.47	20	28.5	26.5	500	1500	1491,1597	
1645.5	1646.5	N/A	20	N/A	N/A	500	1500		
1660.0	1710.0	N/A	20	N/A	N/A	500	1500	1704	
1718.8	1722.2	N/A	20	N/A	N/A	500	1500		
2200.0	2300.0	N/A	20	N/A	N/A	500	1500	2236	
2310.0	2390.0	N/A	20	N/A	N/A	500	1500	2343	
2483.5	2500.0	N/A	20	N/A	N/A	500	1500		
2655.0	2900.0	N/A	20	N/A	N/A	500	1500	2662, 2769, 2875	
3260.0	3267.0	N/A	20	N/A	N/A	500	1500		
3332.0	3339.0	N/A	20	N/A	N/A	500	1500		
3345.8	3358.0	N/A	20	N/A	N/A	500	1500		
3600.0	4400.0	N/A	20	N/A	N/A	500	1500		