

**MFA** **M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176  
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

Date of Report: January 17, 2001  
Date of Submission: February 1, 2001

Federal Communications Commission  
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Telex Communications, Inc.  
Equipment: BTR-800  
FCC ID: B5DM514  
FCC Rules: 74H


Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,



Morton Flom, P. Eng.

enclosure(s)  
cc: Applicant  
MF/cvr

LIST OF EXHIBITS  
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Telex Communications, Inc.

FCC ID: B5DM514

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
  - LABEL
  - LOCATION OF LABEL
  - COMPLIANCE STATEMENT
  - LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c)(12)
4. DOCUMENTATION: 2.1033(c)
  - (3) USER MANUAL
  - (9) TUNE UP INFO
  - (10) SCHEMATIC DIAGRAM
  - (10) CIRCUIT DESCRIPTION
  - BLOCK DIAGRAM
  - PARTS LIST
  - ACTIVE DEVICES
5. PART 90.203(e) & (g) ATTESTATION

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS

**MFA** **M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176  
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

TRANSMITTER CERTIFICATION

of

FCC ID: B5DM514  
MODEL: BTR-800

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 74H

DATE OF REPORT: January 17, 2001

ON THE BEHALF OF THE APPLICANT:

Telex Communications, Inc.

AT THE REQUEST OF:

P.O. 219090

Telex Communications, Inc.  
8601 E. Cornhusker Highway  
P.O. Box 5579  
Lincoln, NE 68505-5579

Attention of:

Charles E. Conner, Project Engineer  
(402) 467-5321; FAX: -3279  
E-mail: charlie.conner@telex.com

SUPERVISED BY:



Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.


Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1051	Unwanted Emissions (Transmitter Conducted)	9
2.1053(a)	Field Strength of Spurious Radiation	12
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	16
2.1047(a)	Audio Frequency Response	31
2.1047(b)	Modulation Limiting	33
2.1055(a)(1)	Frequency Stability (Temperature Variation)	35
2.1055(b)(1)	Frequency Stability (Voltage Variation)	38
2.202(g)	Necessary Bandwidth and Emission Bandwidth	39

PAGE NO. 1 of 39.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

- a) TEST REPORT
- b) Laboratory: M. Flom Associates, Inc.  
 (FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
 (Canada: IC 2044) Chandler, AZ 85224
- c) Report Number: d0110022
- d) Client: Telex Communications, Inc.  
 8601 E. Cornhusker Highway  
 P.O. Box 5579  
 Lincoln, NE 68505-5579
- e) Identification: BTR-800  
 Description: FCC ID: B5DM514  
 UHF FM Transceiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: January 17, 2001  
 EUT Received: January 9, 2001
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:   
 Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 39.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

74H

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Telex Communications, Inc.  
8601 E. Cornhusker Highway  
P.O. Box 5579  
Lincoln, NE 68505-5579

MANUFACTURER:

Applicant

(c)(2): FCC ID: B5DM514

MODEL NO: BTR-800

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 90K0F3E

(c)(5): FREQUENCY RANGE, MHz: 518 to 608, 614 to 746

(c)(6): POWER RATING, Watts: 0.100 / 0.010  
x Switchable \_\_\_ Variable \_\_\_ N/A

FCC GRANT NOTE:

(c)(7): MAXIMUM POWER RATING, Watts: 0.25

DUT DESCRIPTION: This unit passes

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



**THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION**

**ACCREDITED LABORATORY**

A2LA has accredited


**M. FLOM ASSOCIATES, INC.**  
Chandler, AZ

for technical competence in the field of

**Electrical (EMC) Testing**


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 24<sup>th</sup> day of November, 1998.



*Peter Abjorn*  
President  
For the Accreditation Council  
Certificate Number 1008.01  
Valid to December 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



**American Association for Laboratory Accreditation**

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 AND EN 45001

M. FLOM ASSOCIATES, INC.  
Electronic Testing Laboratory  
3356 North San Marcos Place, Suite 107  
Chandler, AZ 85225  
Morton Flom Phone: 480 926 3100

**ELECTRICAL (EMC)**

Valid to: December 31, 2000 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63 4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438
RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
ESD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97

Revised 2/2/2000

*Peter Abjorn*

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8370 • Phone: 301 644 3248 • Fax: 301 662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.



PAGE NO. 4 of 39.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual  
COLLECTOR VOLTAGE, Vdc = per manual  
SUPPLY VOLTAGE, Vac = 115

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

     ATTACHED EXHIBITS  
  x   N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 39.

Sub-part  
2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- \_\_\_\_\_ 21 - Domestic Public Fixed Radio Services
- \_\_\_\_\_ 22 - Public Mobile Services
- \_\_\_\_\_ 22 Subpart H - Cellular Radiotelephone Service
- \_\_\_\_\_ 22.901(d) - Alternative technologies and auxiliary services
- \_\_\_\_\_ 23 - International Fixed Public Radiocommunication services
- \_\_\_\_\_ 24 - Personal Communications Services
- x 74 Subpart H - Low Power Auxiliary Stations
- \_\_\_\_\_ 80 - Stations in the Maritime Services
- \_\_\_\_\_ 80 Subpart E - General Technical Standards
- \_\_\_\_\_ 80 Subpart F - Equipment Authorization for Compulsory Ships
- \_\_\_\_\_ 80 Subpart K - Private Coast Stations and Marine Utility  
Stations
- \_\_\_\_\_ 80 Subpart S - Compulsory Radiotelephone Installations for  
Small Passenger Boats
- \_\_\_\_\_ 80 Subpart T - Radiotelephone Installation Required for  
Vessels on the Great Lakes
- \_\_\_\_\_ 80 Subpart U - Radiotelephone Installations Required by the  
Bridge-to-Bridge Act
- \_\_\_\_\_ 80 Subpart V - Emergency Position Indicating Radiobeacons  
(EPIRB'S)
- \_\_\_\_\_ 80 Subpart W - Global Maritime Distress and Safety System  
(GMDSS)
- \_\_\_\_\_ 80 Subpart X - Voluntary Radio Installations
- \_\_\_\_\_ 87 - Aviation Services
- \_\_\_\_\_ 90 - Private Land Mobile Radio Services
- \_\_\_\_\_ 94 - Private Operational-Fixed Microwave Service
- \_\_\_\_\_ 95 Subpart A - General Mobile Radio Service (GMRS)
- \_\_\_\_\_ 95 Subpart C - Radio Control (R/C) Radio Service
- \_\_\_\_\_ 95 Subpart D - Citizens Band (CB) Radio Service
- \_\_\_\_\_ 95 Subpart E - Family Radio Service
- \_\_\_\_\_ 95 Subpart F - Interactive Video and Data Service (IVDS)
- \_\_\_\_\_ 97 - Amateur Radio Service
- \_\_\_\_\_ 101 - Fixed Microwave Services

PAGE NO.

6 of 39.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 39.  
NAME OF TEST: Carrier Output Power (Conducted)  
SPECIFICATION: 47 CFR 2.1046(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1  
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

MEASUREMENT RESULTS  
(Worst case)

FREQUENCY OF CARRIER, MHz = 563.5, 554.2, 571.8


MHz	dBm	Milliwatts
554.198	8.4	Low: 6.9
555.198	19.60	High: 91.2

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT  
 TEST 2: FREQUENCY STABILITY

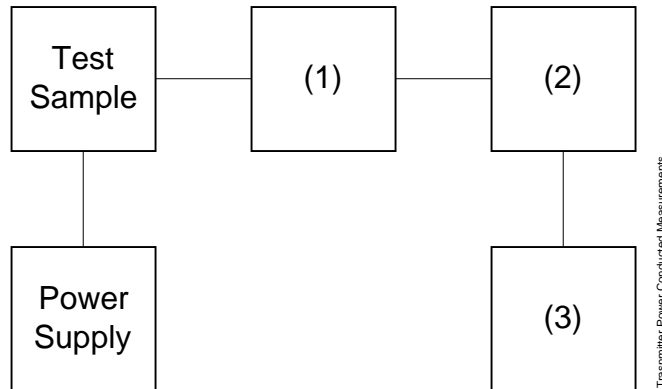

Asset	Description (as applicable)	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
I00122	Narda 766-10	7802
I00123	Narda 766-10	7802A
I00069	Bird 8329 (30 dB)	1006
I00113	Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
I00014	HP 435A	1733A05836
I00039	HP 436A	2709A26776
I00020	HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
I00042	HP 5383A	1628A00959
I00019	HP 5334B	2704A00347
I00020	HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 9 of 39.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13


TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10<sup>th</sup> harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE


FREQUENCY OF CARRIER, MHz	=	563.5, 554.2, 571.8
SPECTRUM SEARCHED, GHz	=	0 to 10 x F <sub>c</sub>
MAXIMUM RESPONSE, Hz	=	4300
ALL OTHER EMISSIONS	=	≥ 20 dB BELOW LIMIT

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

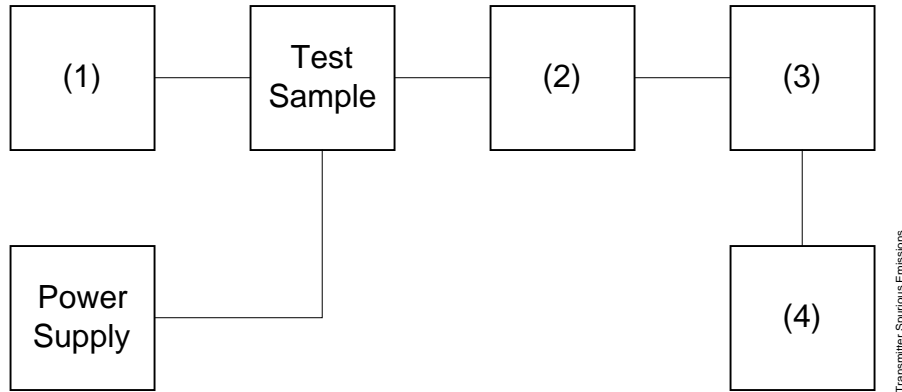

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
I00010 HP 204D	1105A04683
I00017 HP 8903A	2216A01753
I00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
I00122 Narda 766-10	7802
I00123 Narda 766-10	7802A
I00069 Bird 8329 (30 dB)	1006
I00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
I00126 Eagle TNF-1	100-250
I00125 Eagle TNF-1	50-60
I00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
I00048 HP 8566B	2511A01467
I00029 HP 8563E	3213A00104

PAGE NO. 11 of 39.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

LIMIT(S), dBc


$$-(43+10 \times \text{LOG } P) = -33 \text{ (0.1 Watts)}$$

g0110084: 2001-Jan-11 Thu 11:05:00

STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
554.200000	1108.389000	-39.1	-55.6	-19.1
554.200000	1662.588000	-54.7	-71.2	-34.7
554.200000	2216.364000	-63.2	-79.7	-43.2
554.200000	2771.068000	-64.8	-81.3	-44.8
554.200000	3325.145000	-66.1	-82.6	-46.1
554.200000	3879.599000	-65.7	-82.2	-45.7
554.200000	4433.888000	-65.5	-82	-45.5
554.200000	4987.743000	-64.9	-81.4	-44.9
554.200000	5542.170000	-65.6	-82.1	-45.6
554.200000	6095.710000	-59.2	-75.7	-39.2
554.200000	6650.663000	-60.5	-77	-40.5
554.200000	7204.538000	-60.6	-77.1	-40.6
554.200000	7758.510000	-60.8	-77.3	-40.8
554.200000	8312.505000	-60.4	-76.9	-40.4

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.




PAGE NO. 12 of 39.  
NAME OF TEST: Field Strength of Spurious Radiation  
SPECIFICATION: 47 CFR 2.1053(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 1.2.12

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth  $\leq 3$  kHz.
  - 2) Video Bandwidth  $\geq 10$  kHz
  - 3) Sweep Speed  $\leq 2000$  Hz/second
  - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

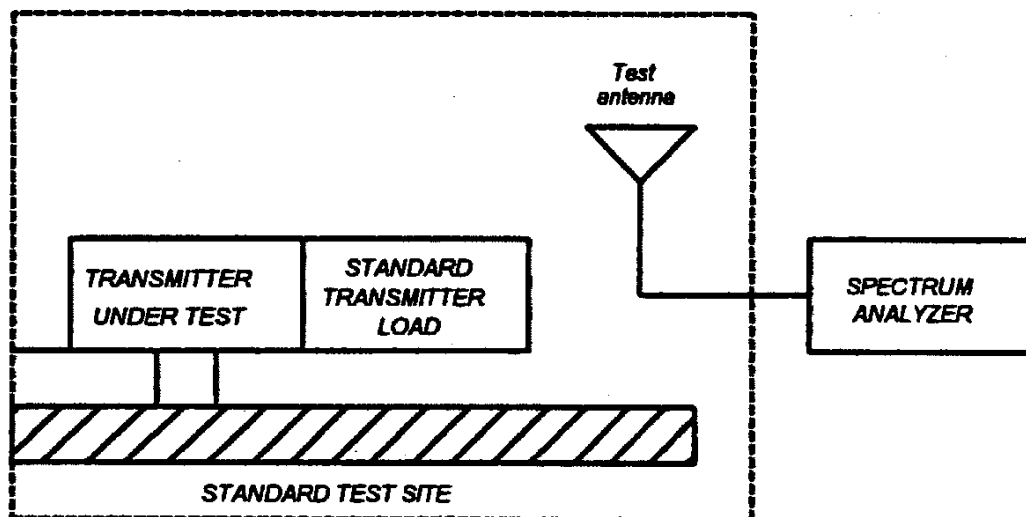

PAGE NO. 13 of 39.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

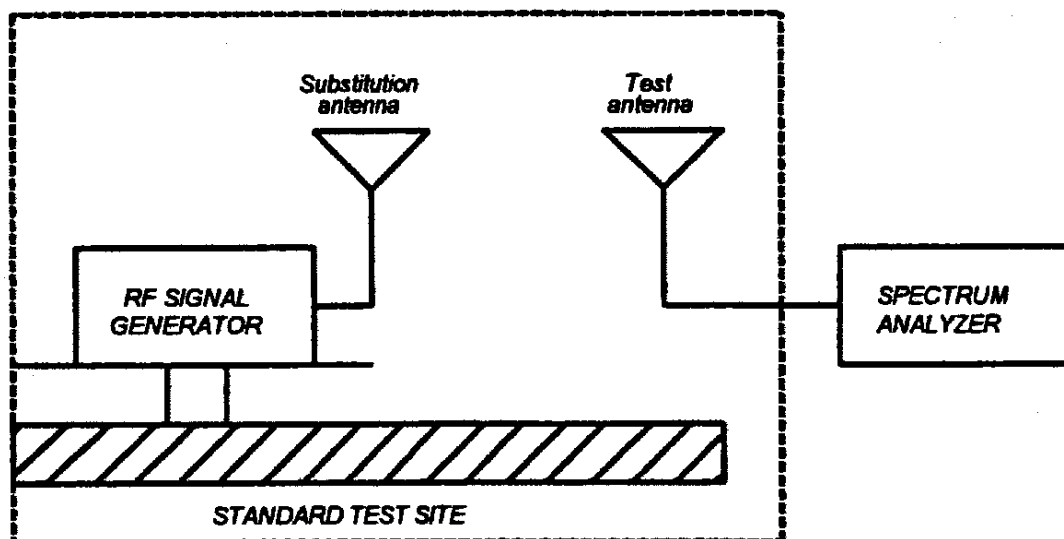

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 14 of 39.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

$$\text{Radiated spurious emissions dB} = 10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:


Asset Description (as applicable)	s/n	Cycle	Last Cal
<u>TRANSDUCER</u>			
I00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-00
I00065 EMCO 3301-B Active Monopole	2635	12 mo.	Sep-00
I00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-00
I00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-00
<u>AMPLIFIER</u>			
I00028 HP 8449A	2749A00121	12 mo.	Mar-00
<u>SPECTRUM ANALYZER</u>			
I00029 HP 8563E	3213A00104	12 mo.	Aug-00
I00033 HP 85462A	3625A00357	12 mo.	May-00
I00048 HP 8566B	2511AD1467	6 mo.	May-00
<u>MISCELLANEOUS</u>			
Microphone	<u>x</u>		
Antenna	<u>x</u>		
All Ports Terminated	<u>x</u>		

PAGE NO. 15 of 39.

NAME OF TEST: Field Strength of Spurious Radiation  
g0110078: 2001-Jan-10 Wed 12:43:00  
STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	ERP, dBm	ERP, dBc
563.500000	1127.001166	-63.3	-83.3
563.500000	1690.491166	-46	-66.0
563.500000	2253.971166	-55.7	-75.7
563.500000	2817.465333	-52.2	-72.2
563.500000	3380.997000	-55.8	-75.8
563.500000	3944.472000	-52.2	-72.2
563.500000	4508.007000	-53.8	-73.8
563.500000	5071.473667	-50.4	-70.4
563.500000	5634.977000	-53.2	-73.2

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.


PAGE NO. 16 of 39.  
NAME OF TEST: Emission Masks (Occupied Bandwidth)  
SPECIFICATION: 47 CFR 2.1049(c)(1)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5/\pm 1.25$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 17 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110127: 2001-Jan-22 Mon 10:36:00  
STATE: 1:Low Power

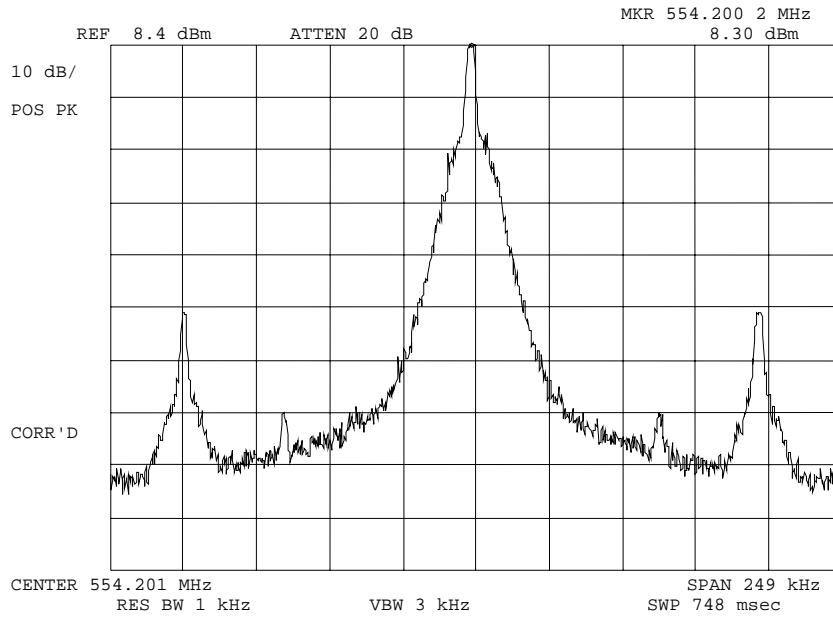


POWER: LOW  
MODULATION: NONE

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 18 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110001: 2001-Jan-22 Mon 10:45:00  
STATE: 1:Low Power

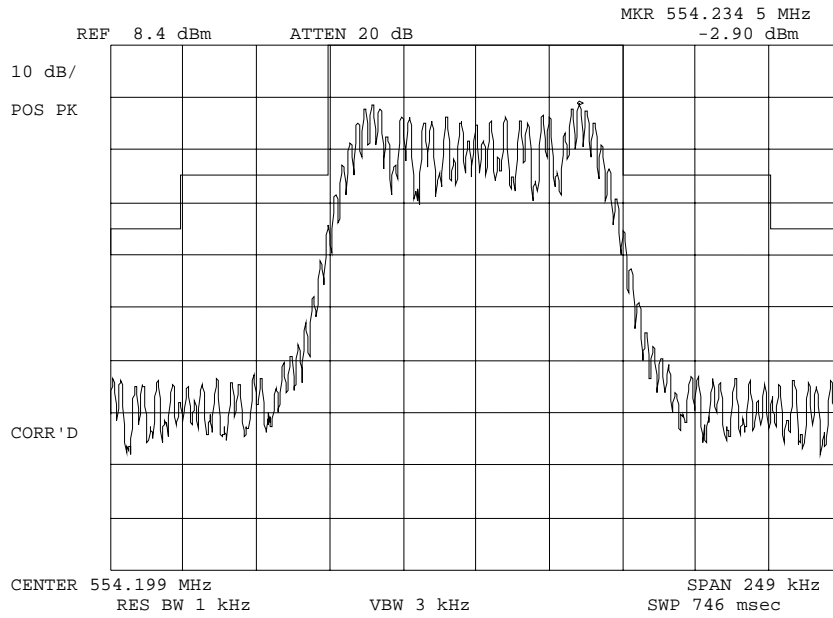

POWER:  
MODULATION:


LOW  
2500 HZ @ 20 DB ABOVE  
REFERENCE LEVEL  
MASK: Wireless Mic, 74.861

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 19 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110002: 2001-Jan-22 Mon 10:46:00  
STATE: 1:Low Power

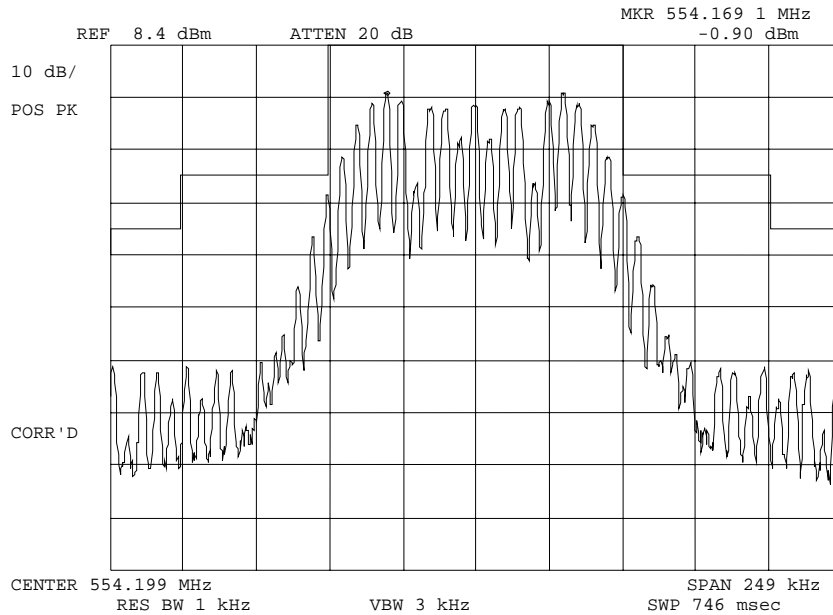

POWER:  
MODULATION:

LOW  
5 KHZ @ 20 DB ABOVE  
REFERENCE LEVEL  
MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.



PAGE NO. 20 of 39.


NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110003: 2001-Jan-22 Mon 10:47:00  
STATE: 1:Low Power

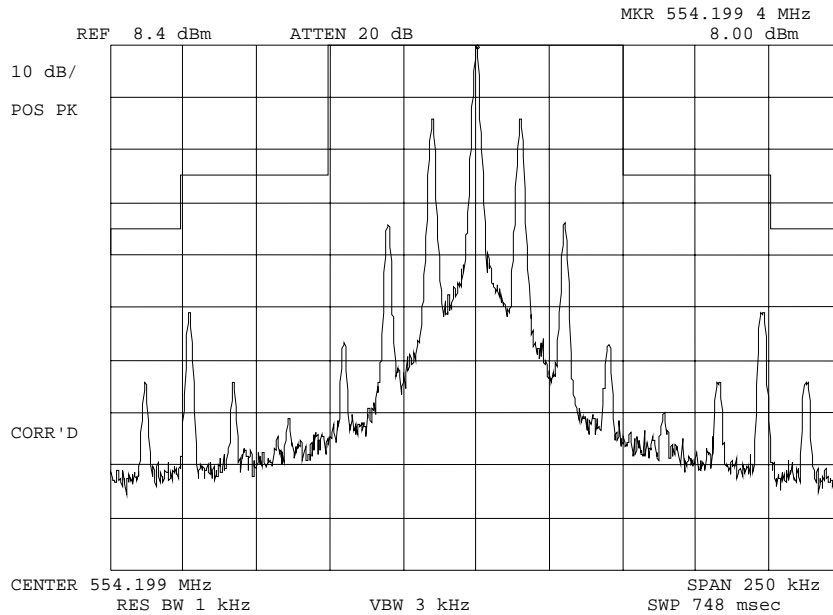

POWER:  
MODULATION:


LOW  
15 KHZ @ 20 DB ABOVE  
REFERENCE LEVEL  
MASK: Wireless Mic, 74.861

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.

PAGE NO. 21 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110008: 2001-Jan-22 Mon 11:10:00  
STATE: 1:Low Power

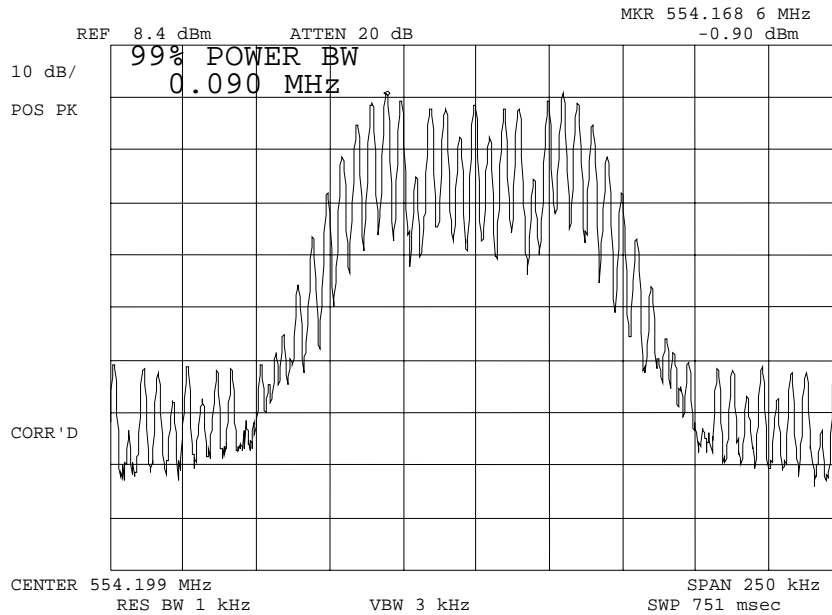

POWER:	LOW
MODULATION:	5 KHZ @ 20 DB ABOVE REFERENCE LEVEL 99 % POWER BANDWIDTH


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

22 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110009: 2001-Jan-22 Mon 11:11:00  
STATE: 1:Low Power

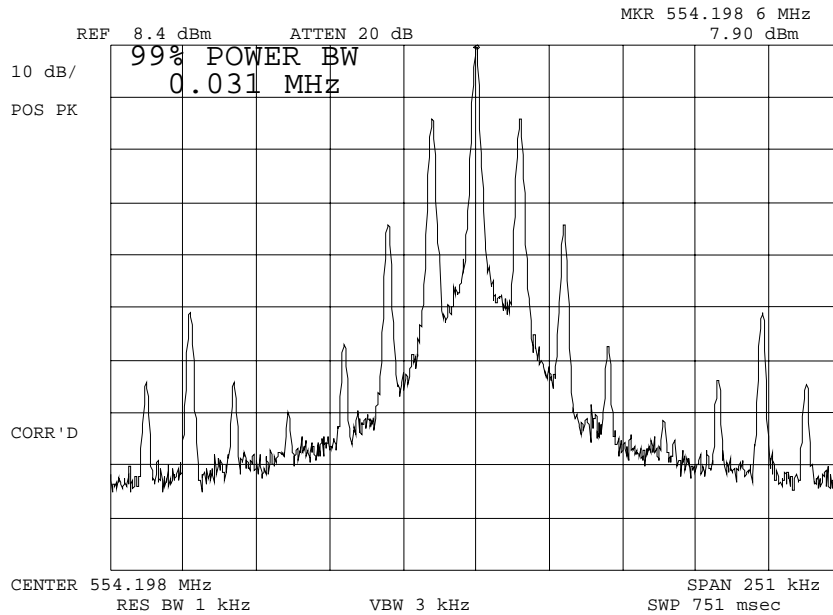

POWER:  
MODULATION:

LOW  
15 KHZ @ 20 DB ABOVE  
REFERENCE LEVEL  
99 % POWER BANDWIDTH


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

23 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110116: 2001-Jan-18 Thu 15:50:00  
STATE: 2:High Power

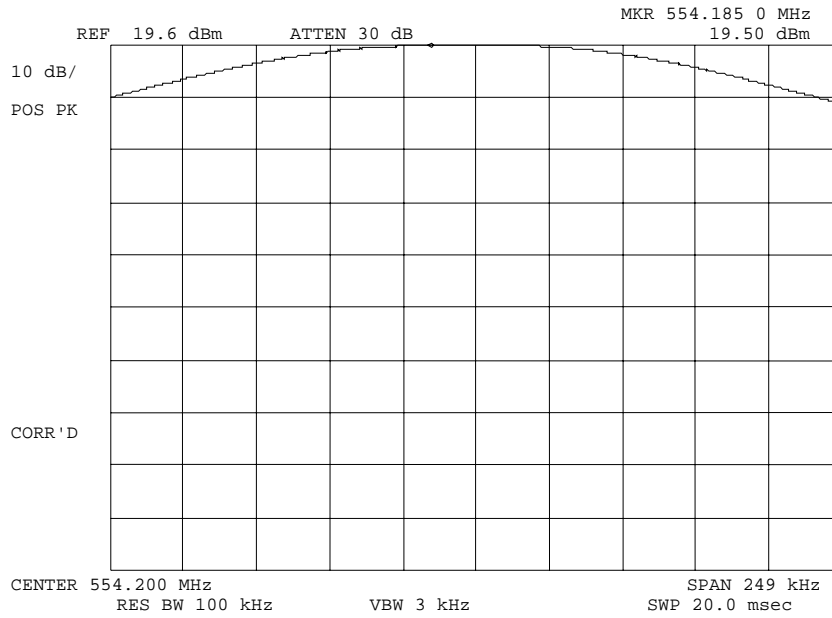


POWER: HIGH  
 MODULATION: NONE  
 MARKER TO REFERENCE LEVEL

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 24 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110079: 2001-Jan-11 Thu 10:53:00  
STATE: 2:High Power

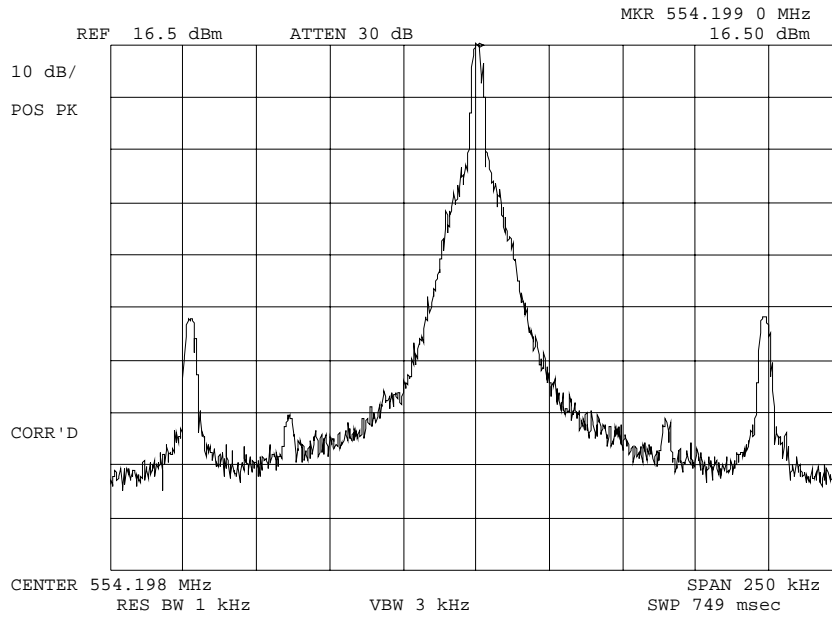


POWER: HIGH  
MODULATION: NONE

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 25 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110118: 2001-Jan-18 Thu 16:17:00  
STATE: 2:High Power

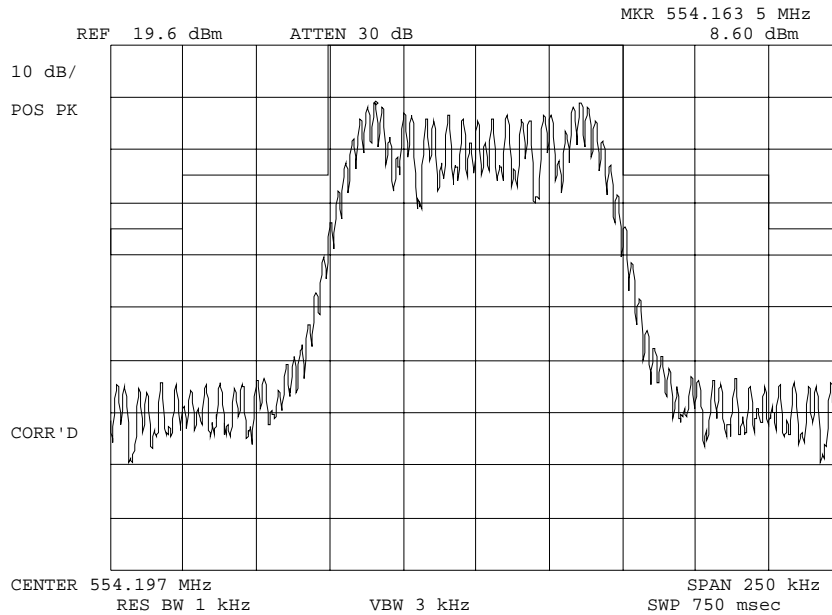

POWER:  
MODULATION:


HIGH  
2500 HZ @ 20 DB ABOVE  
REFERENCE LEVEL  
MASK: Wireless Mic, 74.861

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 26 of 39.


NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110080: 2001-Jan-11 Thu 10:57:00  
STATE: 2:High Power

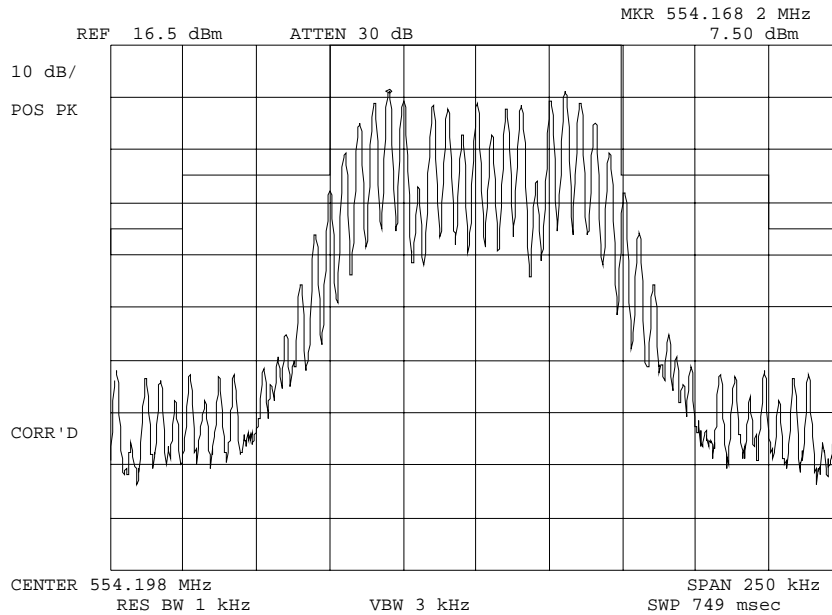

POWER:  
MODULATION:

HIGH  
5 KHZ @ 20 CB ABOVE  
REFERANCE LEVEL  
MASK: Wireless Mic, 74.861


PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.

PAGE NO.

27 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110081: 2001-Jan-11 Thu 10:58:00  
STATE: 2:High Power

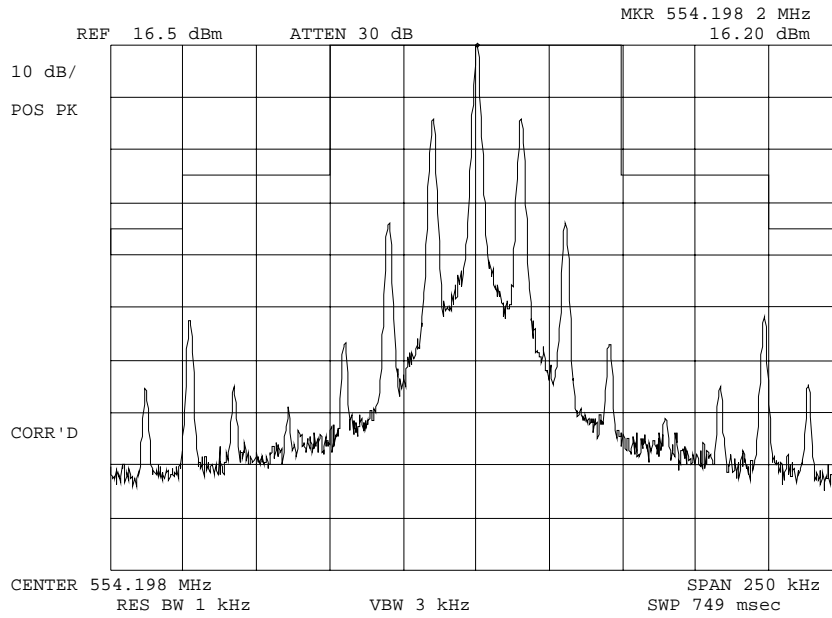

POWER:  
MODULATION:

HIGH  
15 KHZ @ 20 CB ABOVE  
REFERANCE LEVEL  
MASK: Wireless Mic, 74.861


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.



PAGE NO. 28 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110123: 2001-Jan-18 Thu 16:24:00  
STATE: 2:High Power

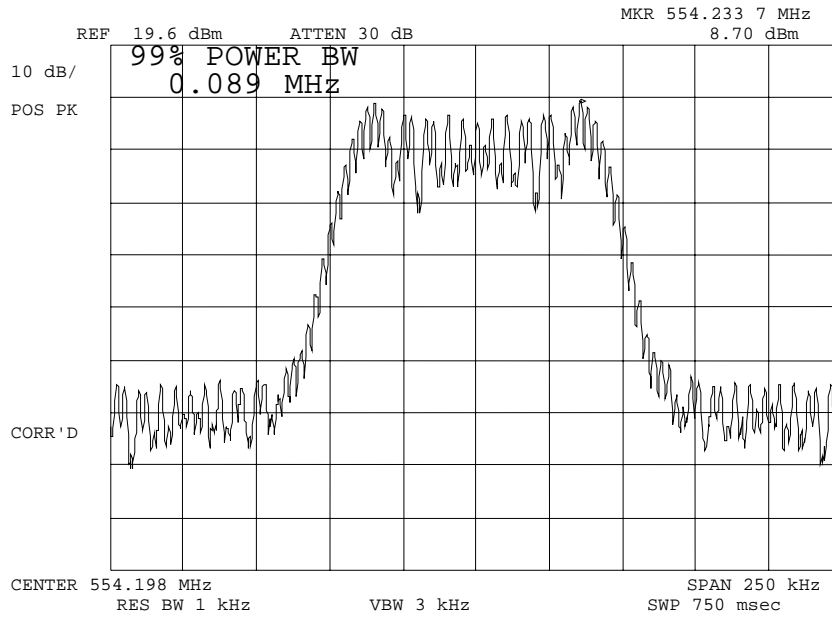


POWER:	HIGH
MODULATION:	2500 HZ @ 20 DB ABOVE REFERENCE LEVEL 99 % POWER BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 29 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110122: 2001-Jan-18 Thu 16:23:00  
STATE: 2:High Power

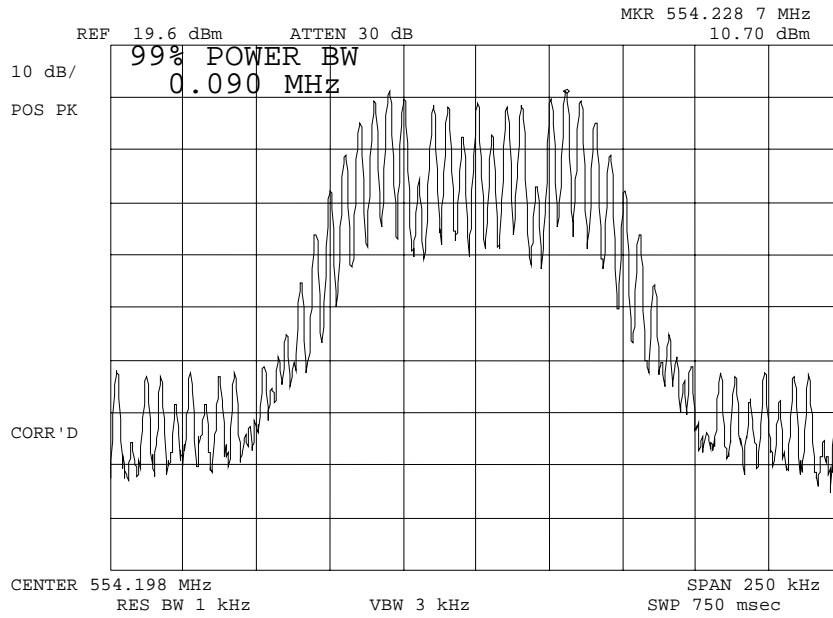


POWER:	HIGH
MODULATION:	5 KHZ @ 20 DB ABOVE REFERENCE LEVEL 99 % POWER BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 30 of 39.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0110121: 2001-Jan-18 Thu 16:22:00  
STATE: 2:High Power

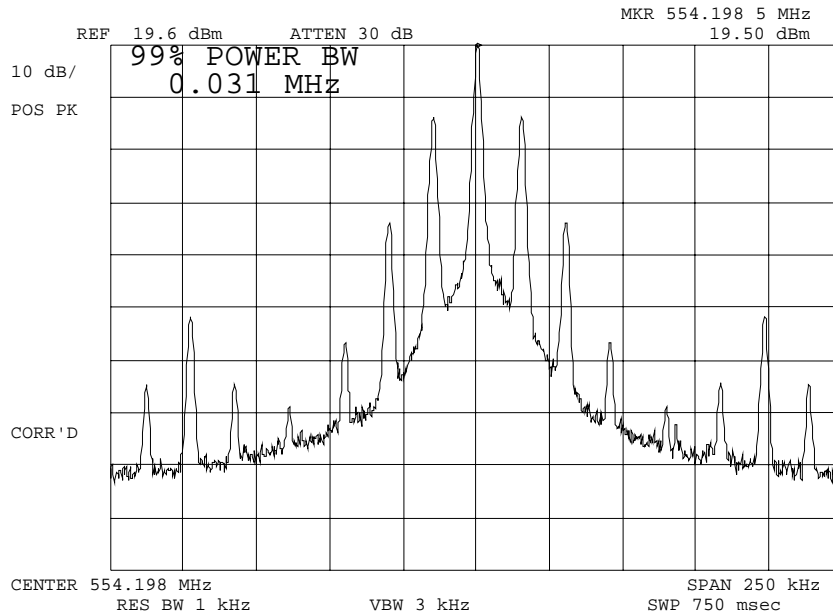

POWER:	HIGH
MODULATION:	15 KHZ @ 20 DB ABOVE REFERENCE LEVEL 99 % POWER BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.


PAGE NO. 31 of 39.  
NAME OF TEST: Audio Frequency Response  
SPECIFICATION: 47 CFR 2.1047(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 32 of 39.

NAME OF TEST: Audio Frequency Response  
 g0110052: 2001-Jan-11 Thu 09:06:00  
 STATE: 0:General

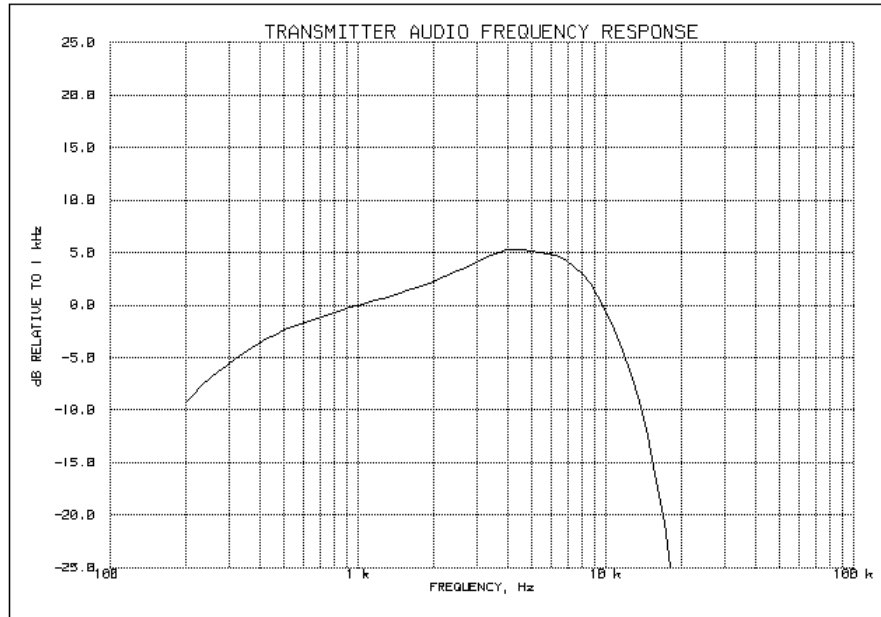

Frequency of Maximum Audio Response, Hz = 4300

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-5.45
20000	-31.20
30000	-59.89
50000	-97.94

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 33 of 39.  
NAME OF TEST: Modulation Limiting  
SPECIFICATION: 47 CFR 2.1047(b)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation ( $\pm 1.5$  kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


34 of 39.

NAME OF TEST: Modulation Limiting  
g0110053: 2001-Jan-11 Thu 09:19:00  
STATE: 0:General

Positive  
Peaks:

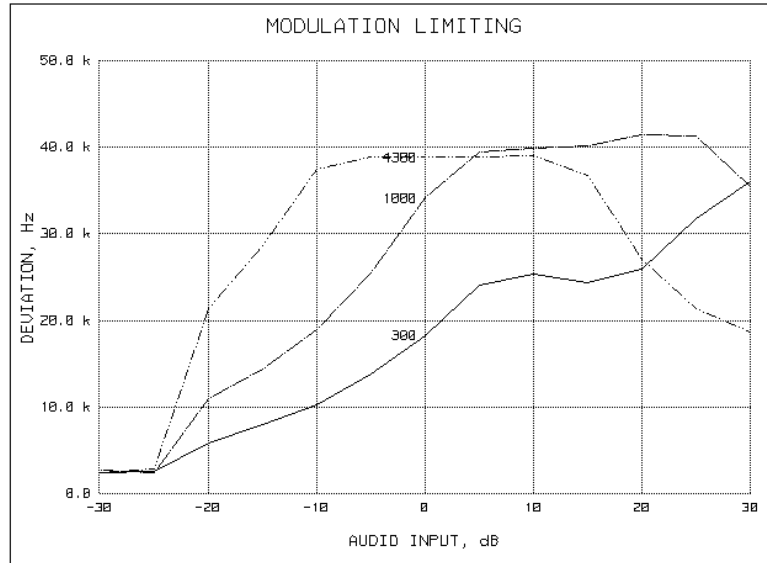

Negative  
Peaks:

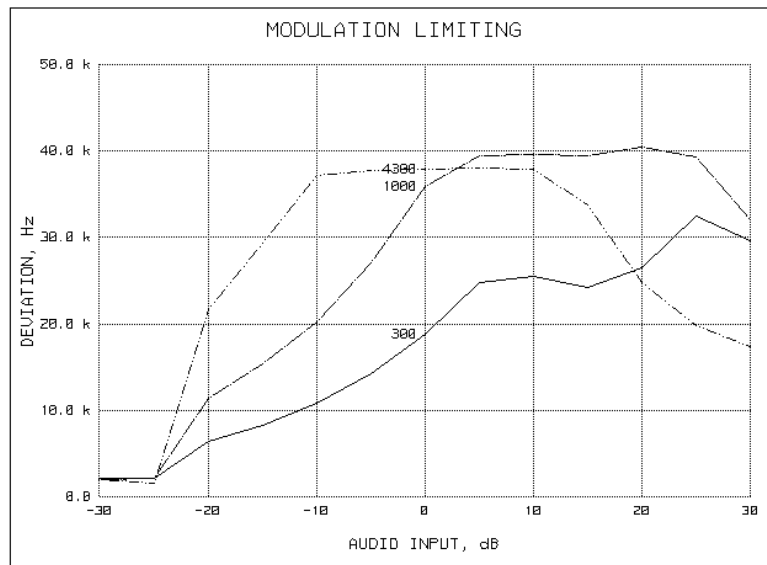

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 35 of 39.  
NAME OF TEST: Frequency Stability (Temperature Variation)  
SPECIFICATION: 47 CFR 2.1055(a)(1)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2  
TEST CONDITIONS: As Indicated  
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to  $-30^{\circ}\text{C}$  and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED



TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

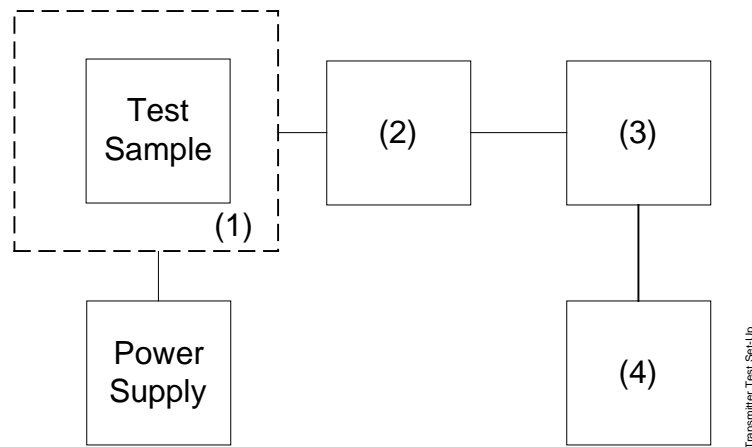

Asset Description s/n  
(as applicable)

(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
	I00027 Tenney Temp. Chamber	9083-765-234
	I00 Weber Humidity Chamber	
	I00 L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>	
	I00122 NARDA 766-10	7802
	I00123 NARDA 766-10	7802A
	I00113 SIERRA 661A-3D	1059
	I00069 BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>	
	I00014 HP 435A POWER METER	1733A05839
	I00039 HP 436A POWER METER	2709A26776
	I00020 HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>	
	I00042 HP 5383A	1628A00959
	I00019 HP 5334B	2704A00347
	I00020 HP 8901A	2105A01087

PAGE NO.


37 of 39.

NAME OF TEST:

Frequency Stability (Temperature Variation)

<u>°C</u>	<u>Change, Hz</u>	<u>PPM</u>
-30	9,427	17
-20	10,537	19
-10	11,646	21
0	9,982	18
10	4,436	8
20	2,218	4
25	0	0
30	-1,664	-3
40	-2,773	-5
50	-2,773	-5

SUPERVISED BY:

  
Doug Noble, B.A.S. E.E.T.

PAGE NO. 38 of 39.  
NAME OF TEST: Frequency Stability (Voltage Variation)  
SPECIFICATION: 47 CFR 2.1055(b)(1)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2  
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

LIMIT, ppm = 50  
 LIMIT, Hz = 27,700

<u>% of STV</u>	<u>Voltage</u>	<u>Frequency, MHz</u>	<u>Change, Hz</u>	<u>Change, ppm</u>
85	97.75	554.569160	-40	-0.072
100	115	554.569200	0	0.00
115	132.25	554.569190	-10	0.018



SUPERVISED BY:

Doug Noble, B.A.S. E.E.T.


PAGE NO. 39 of 39.  
NAME OF TEST: Necessary Bandwidth and Emission Bandwidth  
SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 90K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 5
MAXIMUM DEVIATION (D), kHz	= 40
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH ( $B_N$ ), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 90

PERFORMED BY:  
END OF TEST REPORT

  
Doug Noble, B.A.S. E.E.T.

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.