



# REPORT

issued by an Accredited Testing Laboratory, FCC listed with Reg. no. 93866 and IC recognized pursuant IC file no. 3482A.

Contact person  
Reinhold Reul  
Electronics  
+46 10 516 55 84  
Reinhold.Reul@sp.se

Date  
2012-03-29

Reference  
FX108941-14

Page  
1 (2)



Ericsson (China) Communications Company Ltd  
Att. Hua Yang  
Ericsson Tower  
No. 5 Lize East Street  
Chaoyang District, Beijing 100102  
P. R. China

## Class II Permissive Change measurements on RRU-M8 850 MHz cellular radio equipment with FCC ID: B5KCKRC16184-7

(7 appendices)

### Test object

RRU-M8, product KRC 161 84/7, revision R7E

### Summary

Standard	Compliant	Appendix
<b>FCC CFR 47</b>		
2.1046 RF Power output	Yes	2
2.1049 Occupied bandwidth	Yes	3
2.1051 Band Edge	Yes	4
2.1051 Spurious emission at antenna port	Yes	5
2.1053 Field strength of spurious radiation	Yes	6

### SP Technical Research Institute of Sweden Electronics - EMC

Performed by

Reinhold Reul

Examined by

Christer Karlsson

#### SP Technical Research Institute of Sweden

Postal address

SP  
Box 857  
SE-501 15 BORÅS  
Sweden

Office location

Västeråsen  
Brinellgatan 4  
SE-504 62 BORÅS

Phone / Fax / E-mail

+46 10 516 50 00  
+46 33 13 55 02  
info@sp.se

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.



## **Table of contents**

Description of the test object	Appendix 1
Operation mode during measurements	Appendix 1
Purpose of test	Appendix 1
Test setups	Appendix 1
RF power output	Appendix 2
Occupied bandwidth	Appendix 3
Band edge	Appendix 4
Spurious emission at antenna terminals	Appendix 5
Field strength of spurious radiation	Appendix 6
Photos of the test object	Appendix 7

Appendix 1

**Description - Equipment Under Test (EUT)**

Equipment: GSM Base Station Transceiver

TX frequency band: 869 – 894 MHz

Modulations: GMSK, 8PSK, 16QAM, 32QAM and AQPSK

Nominal maximum output power, RMS value in [dBm]:		Per modulation:			
	GMSK	8PSK	16QAM	32QAM	AQPSK
	34.0	30.7	29.3	28.9	30.6

Nominal supply voltage: -48 V DC

**Purpose of test**

The purpose of this test is to justify a Class II Permissive Change of the test object to include the use of AQSPK modulation in SCPIR 0 dB. This report verifies maintained performance characteristics of affected items by re-testing the updated equipment and comparing results for prior worst case modulation GMSK with results for the new modulation.

**Tested configurations and set-ups**


The EUT was tested as an integral part of a RBS 2308 as described below. The EUT was activated at maximum nominal RF output power, with RBS Master 2 setting 33, and random data was transmitted in all time slots, with the various modulations being tested one at a time. Connections and reference points for measurements are shown in the set-ups below.

**Test frequencies used**

Channel	ARFCN	Frequency	Comment
B	128	869.2 MHz	TX lowest frequency
M	190	881.6 MHz	TX band center frequency
T	251	893.8 MHz	TX highest frequency

Appendix 1

**Test set-up, conducted measurements**

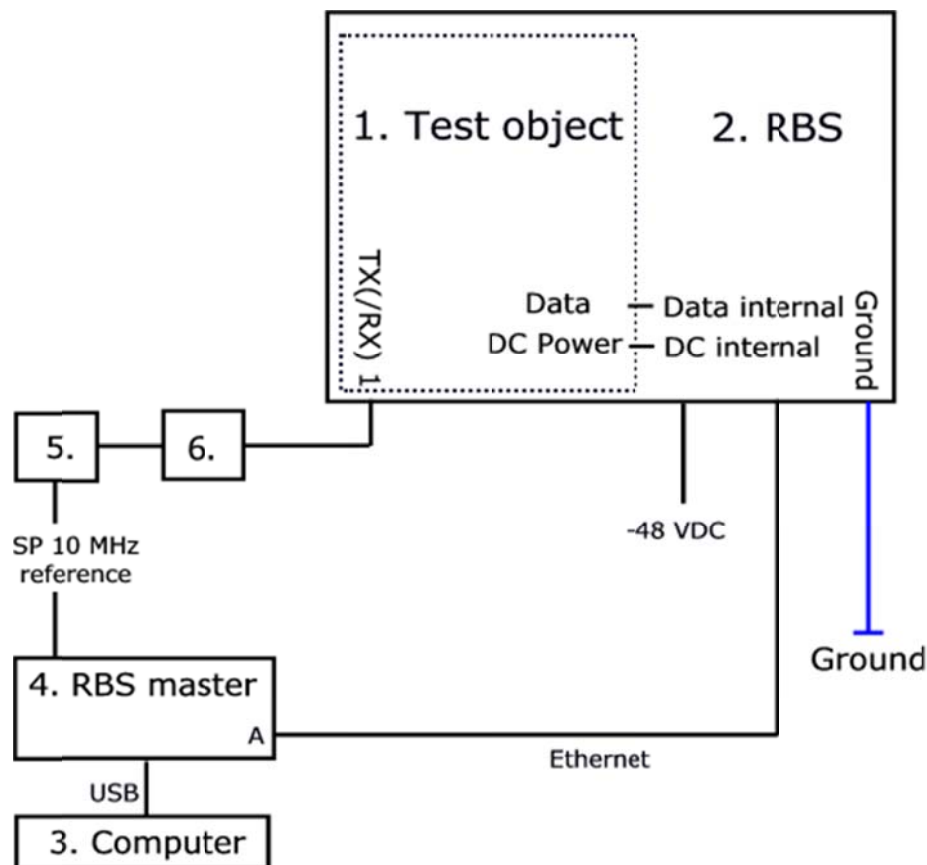

Note: Unconnected ports are omitted for simplicity.

**Test object**


1. RRU-M8, product KRC 161 84/7, revision R7E, SN C821096393 with FCC ID: B5KCKRC16184-7

**Functional test equipment**

2. RBS 2308, consisting of the test object and MBU-01, product SEB 112 1133/3, revision R2A, SN B340123190 and IXU-21, product BOE 602 15/2, revision R4C, SN AE52553821
3. Laptop Compaq nc6220, S/N: CNU54722NZ, BAMS 1000208319, with RBS Master 2E control software
4. RBS Master 2E hardware, product LPY 107 1007/3, revision R1C/A, SN T01E655543, BAMS 1000878432, with shielded Ethernet multi-wire connected to RBS internal data port, using transmission mode E1
5. Measurement equipment specified in respective appendix or client supplied Agilent MXA Signal Analyser model N9020A 20 Hz – 3.6 GHz, BAMS 1000785533 used to verify the modulation schemes
6. Attenuator / filter listed under test equipment in respective appendix

Appendix 1

**Test set-up, radiated emission**

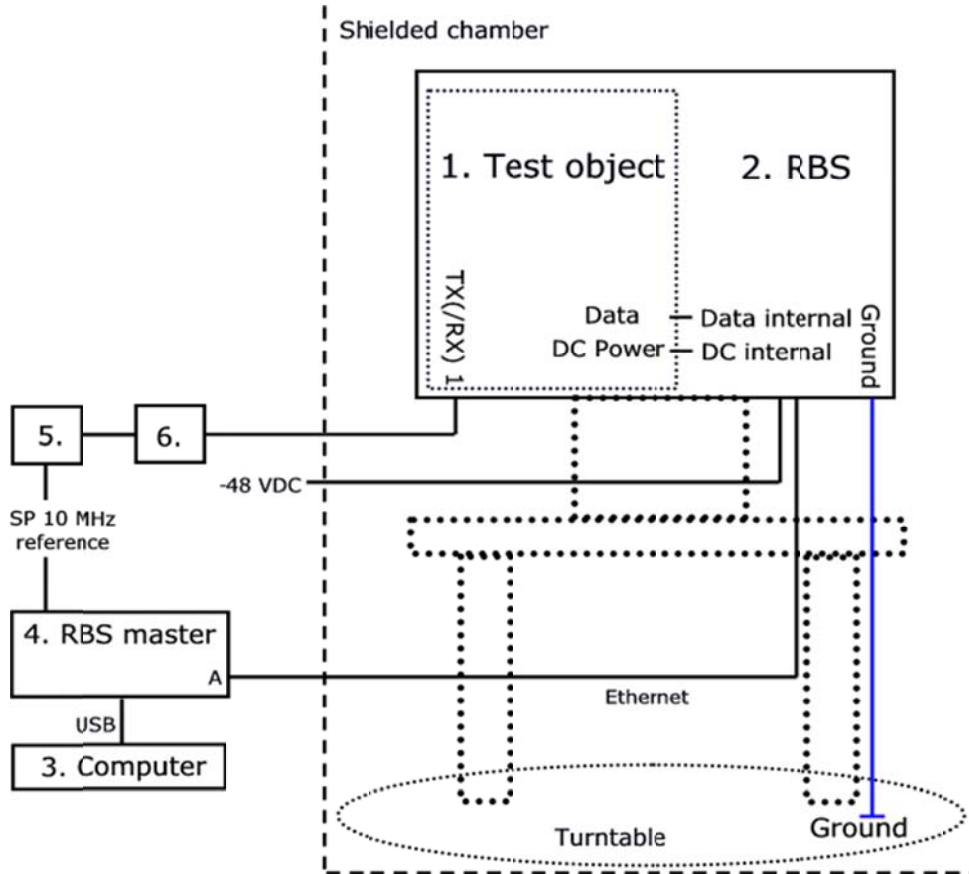

Note: Unconnected ports are omitted for simplicity.

**Test object**

1. RRU-M8, product KRC 161 84/7, revision R7E, SN C821096393 with FCC ID: B5KCKRC16184-7.

**Functional test equipment**

2. RBS 2308, consisting of the test object and MBU-01, product SEB 112 1133/3, revision R2A, SN B340123190 and IXU-21, product BOE 602 15/2, revision R4C, SN AE52553821
3. Laptop Compaq nc6220, S/N: CNU54722NZ, BAMS 1000208319, with RBS Master 2E control software
4. RBS Master 2E hardware, product LPY 107 1007/3, revision R1C/A, SN T01E655543, BAMS 1000878432, with shielded Ethernet multi-wire connected to RBS internal data port, using transmission mode E1
5. Rohde & Schwarz ESI40 (SP 503 125) for signal monitoring or 50 ohm termination
6. Attenuator 30 dB, SP 900229

## Appendix 1

**Test object connections**

Interface	Type of port
DC provided RBS internal, nominal -48 VDC	DC power
Ground connected to grounded RBS shell on top side	Ground
TX/(RX) 1, N female connector	Antenna
TX/(RX) 2, N female, unconnected	Antenna
RXBP 1 and RXBP 2, TNC female, unconnected,	Antenna
The RXBP ports may be used for connecting an optional RX band pass filter not used on the tested sample	
RBS internal Y-link for data, with IEEE-1394 connector	Signal

Note: Unconnected ports are omitted in the drawings above for simplicity. The photos in appendix 7 show EUT top & bottom views with all ports.

**Test object software**

Software	Revision
CXP 104 0007/05	R31E

**References**

Measurements were done according to relevant parts of the following standards:

ANSI C63.4-2009  
ANSI/TIA/EIA-603-C-2004  
ANSI/TIA/EIA 136-280-D-2002  
CFR 47 part 2, October 1<sup>st</sup>, 2010  
CFR 47 part 22, October 1<sup>st</sup>, 2010  
RSS-Gen, Issue 3  
RSS-132, Issue 2

**Reservation**

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in the report.

**Delivery of test object**

The test object was delivered: 2011-06-07

Appendix 1

**Test equipment**

Measurement equipment	Calibration Due	SP number
Anechoic chamber, Hertz	2013-10	15:116
Boonton 4500A RF Peak power meter/analyser	2012-11	503 144
Boonton Power sensor 56518-S/4	2012-11	503 146
Rohde & Schwarz FSQ40	2012-07	504 143
Rohde & Schwarz FSIQ40	2012-07	503 738
Rohde & Schwarz ESI40	2012-07	503 125
Rohde & Schwarz Vector Network Analyser	2012-07	503 687
Chase bilog antenna CBL 6121A	2014-10	502 460
Schaffner Reference Dipole BSRD6500	2012-03	502 181
EMCO Horn Antenna 3115	2014-01	502 175
EMCO Horn Antenna 3115	2014-01	501 548
MITEQ Low Noise Amplifier	2012-08	503 277
Attenuator 40 dB	2012-08	504 159
Attenuator 30 dB	2012-08	900 229
High pass filter	2012-08	504 199
High pass filter	2012-08	502 758
Multimeter Fluke 87	2012-05	502 190
Testo 615 temperature and humidity meter	2012-03	503 498
Testo 635 temperature and humidity meter	2013-05	504 203

**Uncertainties**

Measurement and test instrument uncertainties are described in the quality assurance documentation "SP-QD 10885". The uncertainties are calculated with a coverage factor  $k=2$  (95% level of confidence).

**Reservation**

The test results in this report apply only to the particular Equipment Under Test (EUT) as declared in the report.

**Test engineers**

Jörgen Wassholm, Martin Nilsson, Martin Forsberg and Reinhold Reul, SP

**Manufacturer's representative**

Hua Yang, Ericsson (China) Communications Company Ltd

**Test witness**

-

Appendix 2

**RF Power output measurements according to CFR 47 2.1046**

Date 2011-12-07	Temperature 23 °C ± 3 °C	Humidity 23 % ± 5 %
--------------------	-----------------------------	------------------------

**Test set-up and procedure**

Measurements were made with EUT port TX(/RX) 1 via a 50 ohm attenuator connected to a peak power analyser.

Measurement equipment	SP number
Boonton 4500A RF Peak power meter/analyser	503 144
Boonton Power sensor 56518-S/4	503 146
Attenuator	504 159
Multimeter Fluke 87	502 190
Testo 615 temperature and humidity meter	503 498

**Measurement uncertainty:** 0.7 dB

**Results**

Configuration: RBS master 2E setting 33 for maximum nominal RF output power.

Transmitter power (dBm)		Peak / RMS
Modulation		Channel M
GMSK		34.8 / 34.2
AQPSK		34.6 / 30.7

**Limits**

CFR 47 § 22.913: 500 W ERP shall not be exceeded.

Complies?	Yes
-----------	-----



Appendix 3

**Occupied bandwidth measurements according to CFR 47 2.1049**

Date 2011-12-07	Temperature 23 °C ± 3 °C	Humidity 23 % ± 5 %
--------------------	-----------------------------	------------------------

**Test set-up and procedure**

Measurements were made with EUT port TX(/RX) 1 via a 50 ohm attenuator connected to a spectrum analyser with the RMS detector activated. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz FSIQ40	503 738
Attenuator	504 159
Multimeter Fluke 87	502 190
Testo 615 temperature and humidity meter	503 498

**Measurement uncertainty:** 3.7 dB, 1.33 kHz

**Results**

Configuration: RBS master 2E setting 33 for maximum nominal output power.

	Channel	Modulation	OBW
Diagram 1:	M	GMSK	241 kHz
Diagram 2:	M	AQPSK	238 kHz

The diagrams are shown on the following page.

Appendix 3

Diagram 1:


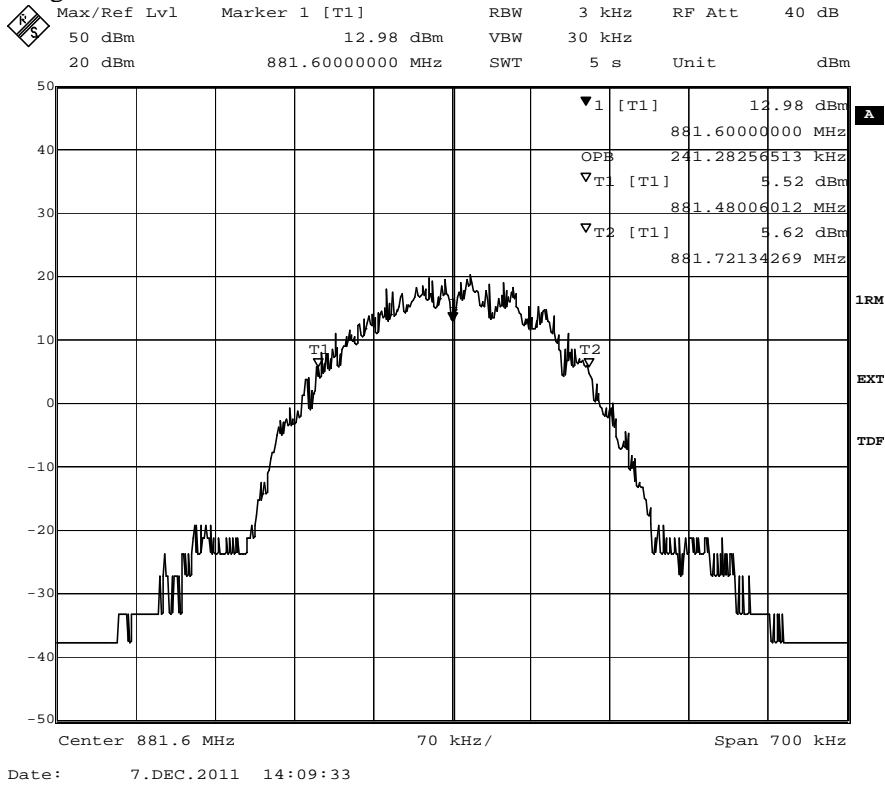


Diagram 2:

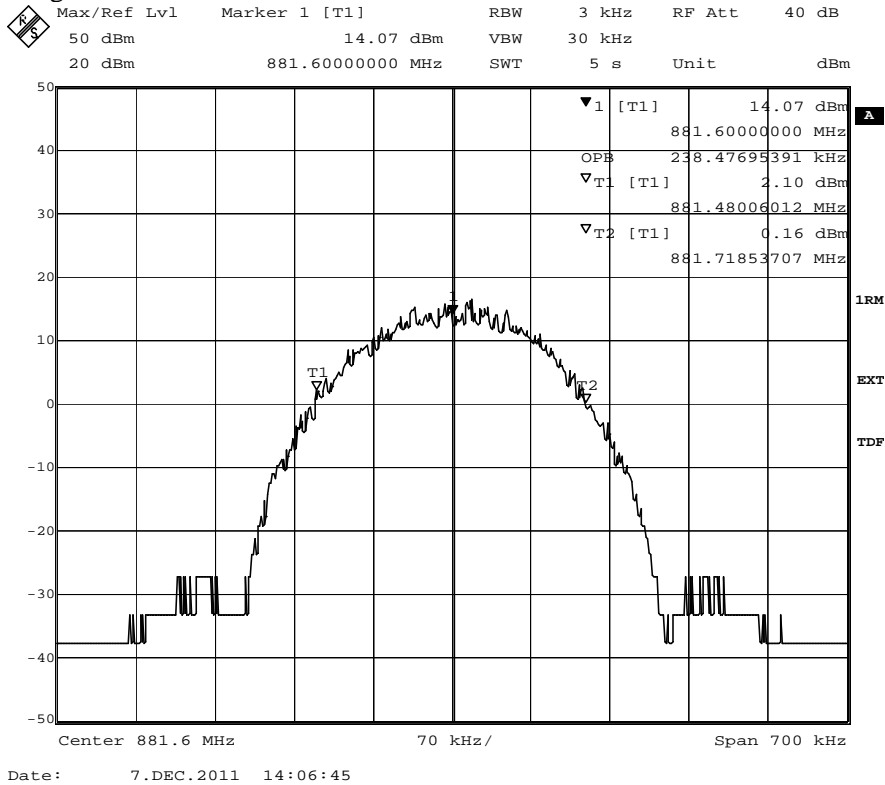

Appendix 4

**Band edge measurements according to CFR 47 2.1051**

Date 2011-12-07	Temperature 23 °C ± 3 °C	Humidity 23 % ± 5 %
--------------------	-----------------------------	------------------------

**Test set-up and procedure**

The measurements were made per definition in §22.917. EUT port TX/(RX) 1 was via a 50 ohm attenuator connected to a spectrum analyzer with the RMS detector activated. The spectrum analyzer was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz FSIQ40	503 738
Attenuator	504 159
Multimeter Fluke 87	502 190
Testo 615 temperature and humidity meter	503 498

**Measurement uncertainty: 3.7 dB**

**Results**

The results are shown in the diagrams below:

Configuration: RBS master 2E setting 33 for maximum nominal output power.

Diagram	Channel	Modulation
1 a, b, c	B	AQPSK
2 a, b, c	T	AQPSK

The diagrams are shown on the following pages.

**Limits**

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least 43 + 10 log P dB.

Complies?	Yes
-----------	-----

Appendix 4

Diagram 1 a:


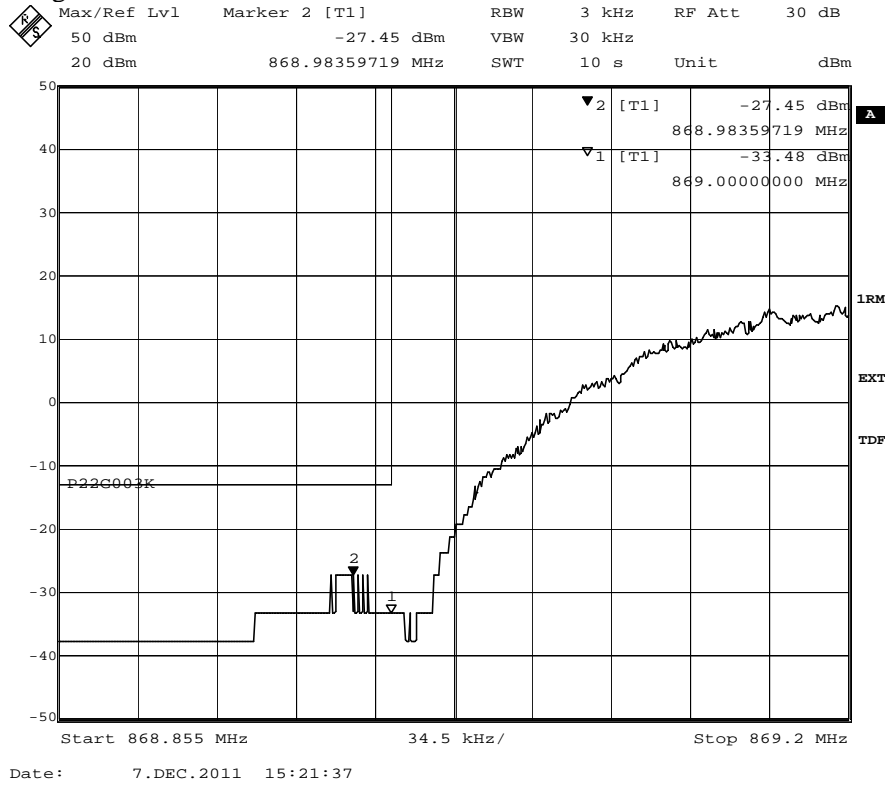



Diagram 1 b:



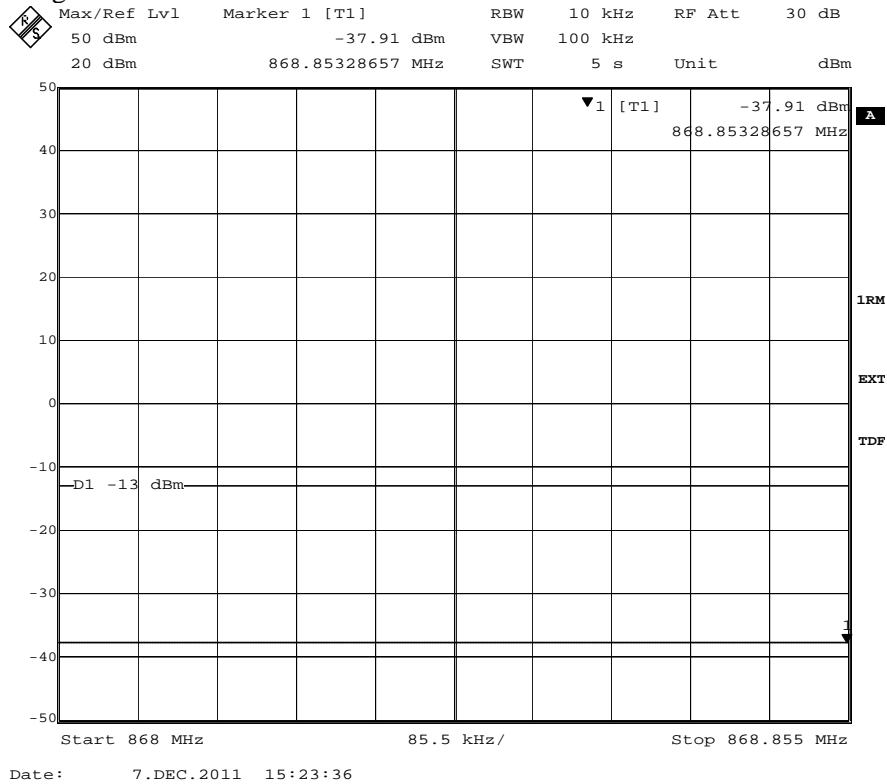

Appendix 4


Diagram 1 c:

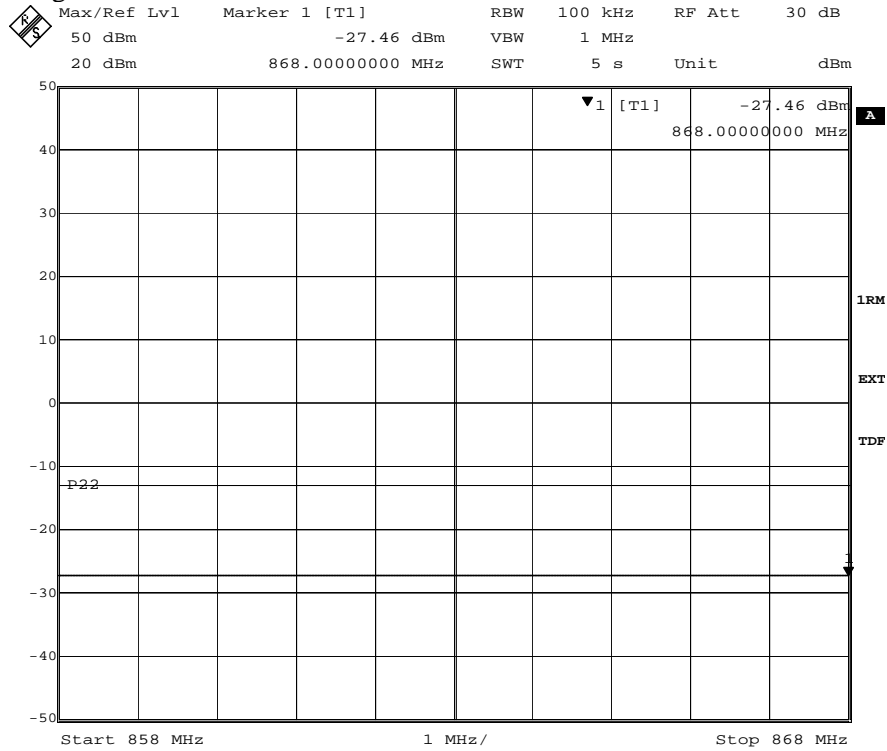

Date: 7.DEC.2011 15:24:17


Appendix 4

Diagram 2 a:

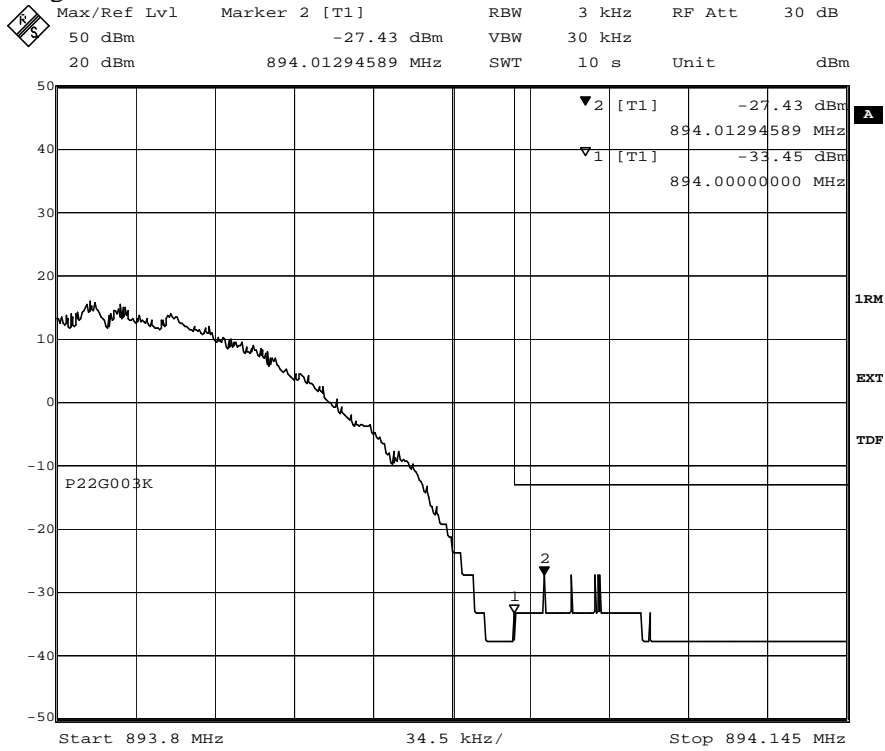

Date: 7.DEC.2011 15:29:16

Diagram 2 b:

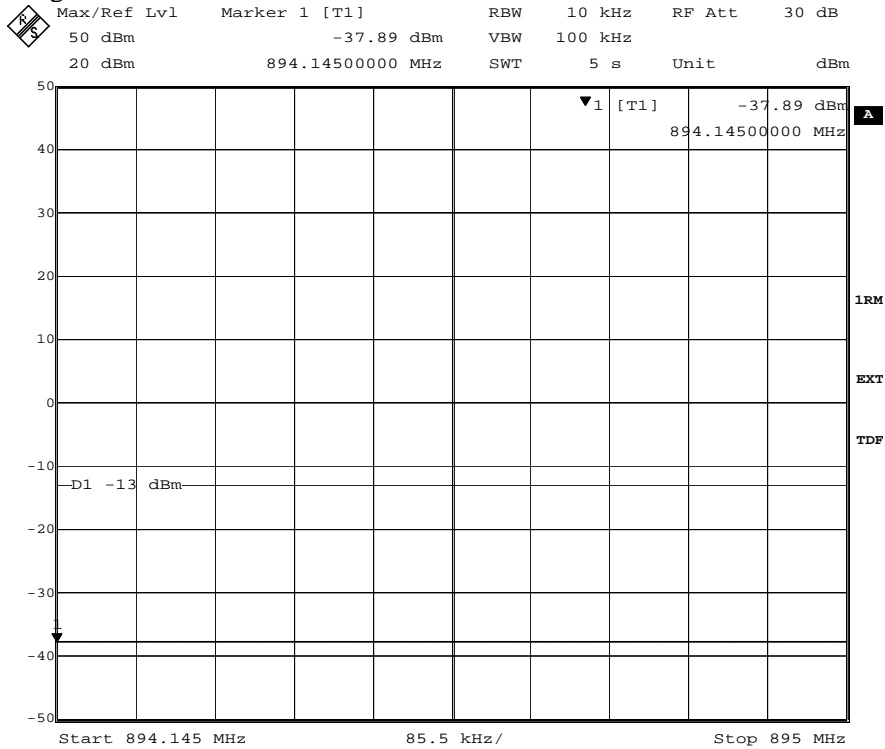


Date: 7.DEC.2011 15:30:19



Appendix 4

Diagram 2 c:

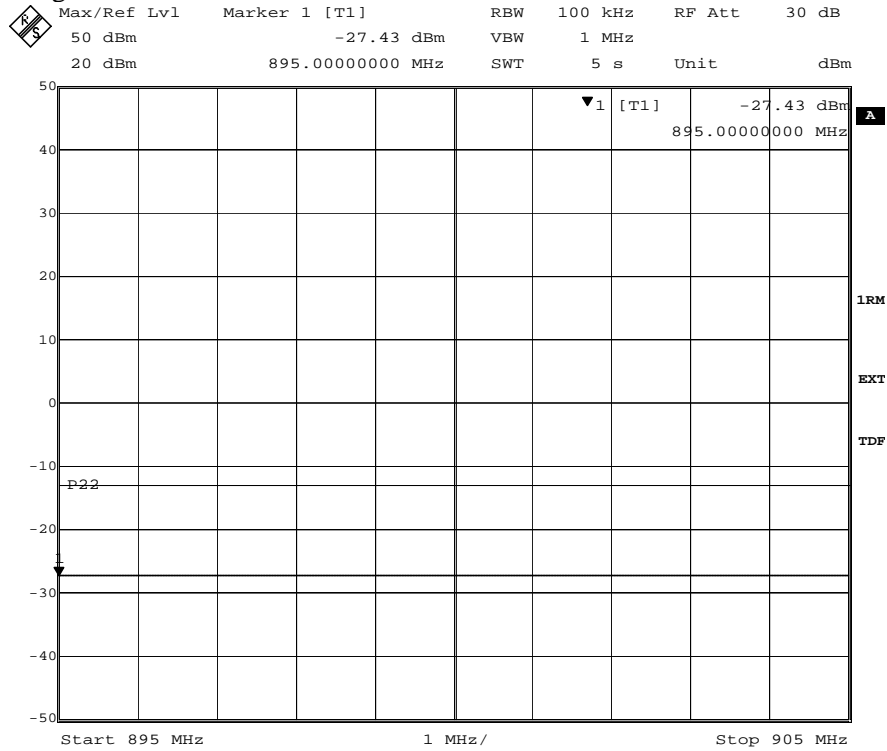

Date: 7.DEC.2011 15:31:01

Appendix 5

**Conducted spurious emission measurements according to CFR 47 2.1051**

Date	Temperature	Humidity
2011-12-07	23 °C ± 3 °C	23 % ± 5 %

**Test set-up and procedure**

The measurements were made at EUT port TX(/RX) 1. The output was connected to a spectrum analyser. A pre-measurement was performed with the PEAK detector activated. Emission above the limit with the PEAK detector is measured with the RMS detector activated. The spectrum analyser was connected to an external 10 MHz reference standard during the measurements.

Measurement equipment	SP number
Rohde & Schwarz FSIQ40	503 738
Attenuator	504 159
High pass filter	502 758
Testo 615 temperature and humidity meter	503 498

**Measurement uncertainty:** 3.7 dB

**Results**

Configuration: RBS master 2E setting 33 for maximum nominal output power. The TX was activated on channel M.

Diagram	Modulation	Frequency range measured
1 a:	GMSK	9 kHz – 1 GHz
1 b:	GMSK	1 GHz – 10 GHz
2 a:	AQPSK	9 kHz – 1 GHz
2 b:	AQPSK	1 GHz – 10 GHz

The diagrams are shown on the following pages.

**Remark**

The emission at 9 kHz on some plots was not generated by the test object. A complementary measurement with a smaller RBW showed that it was related to the LO feed-through.

**Limits**

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least 43 + 10 log P dB.

Complies?	Yes
-----------	-----



Appendix 5

Diagram 1 a:



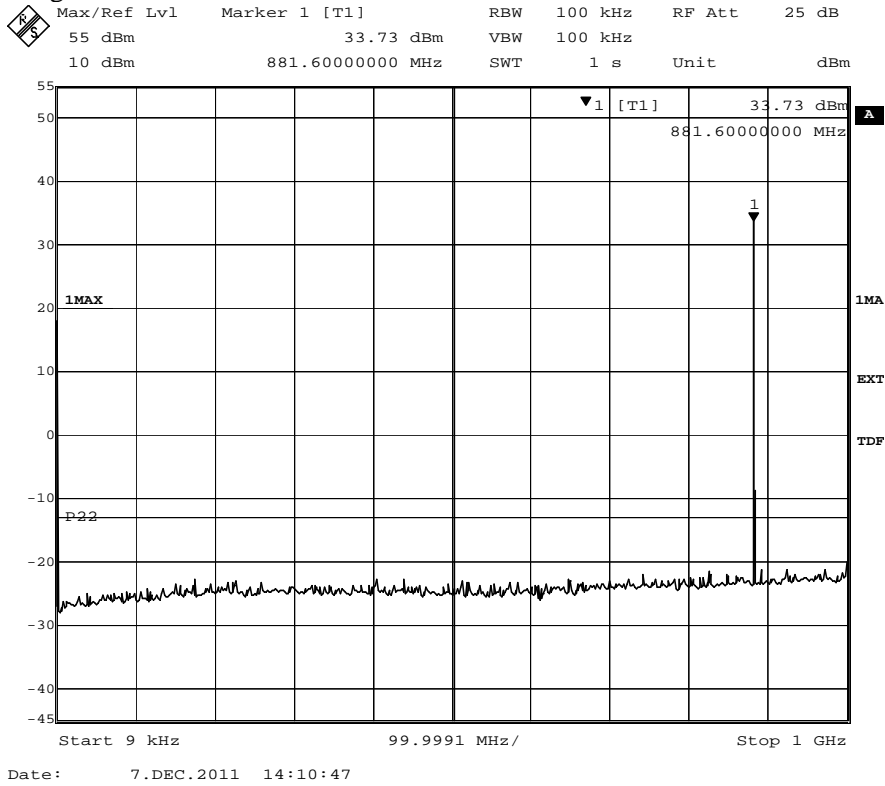


Diagram 1 b:

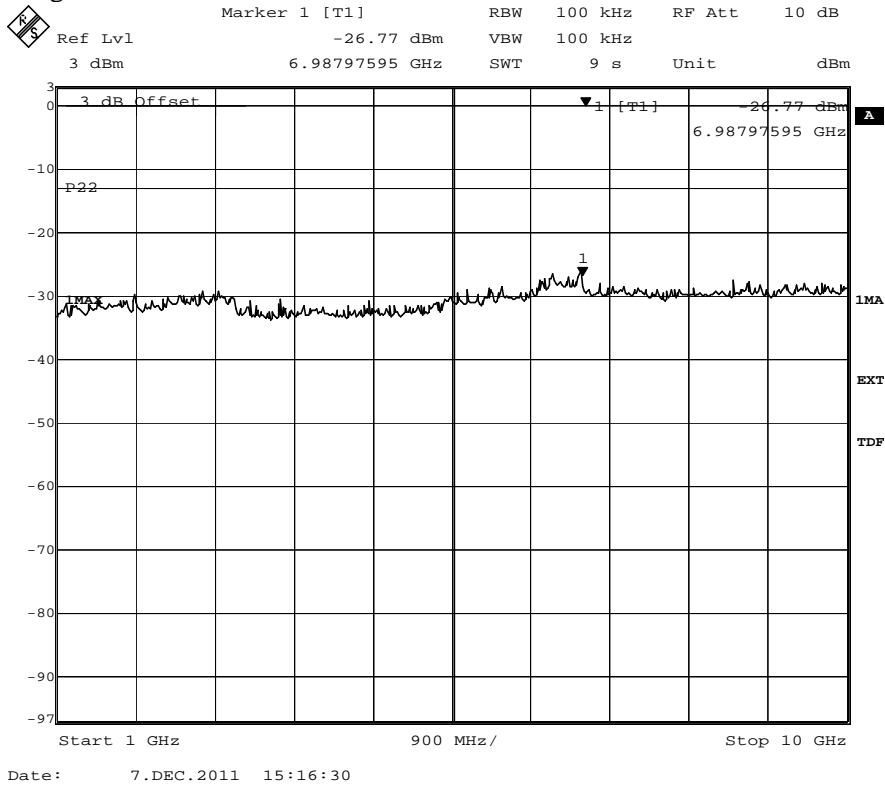


Appendix 5

Diagram 2 a:

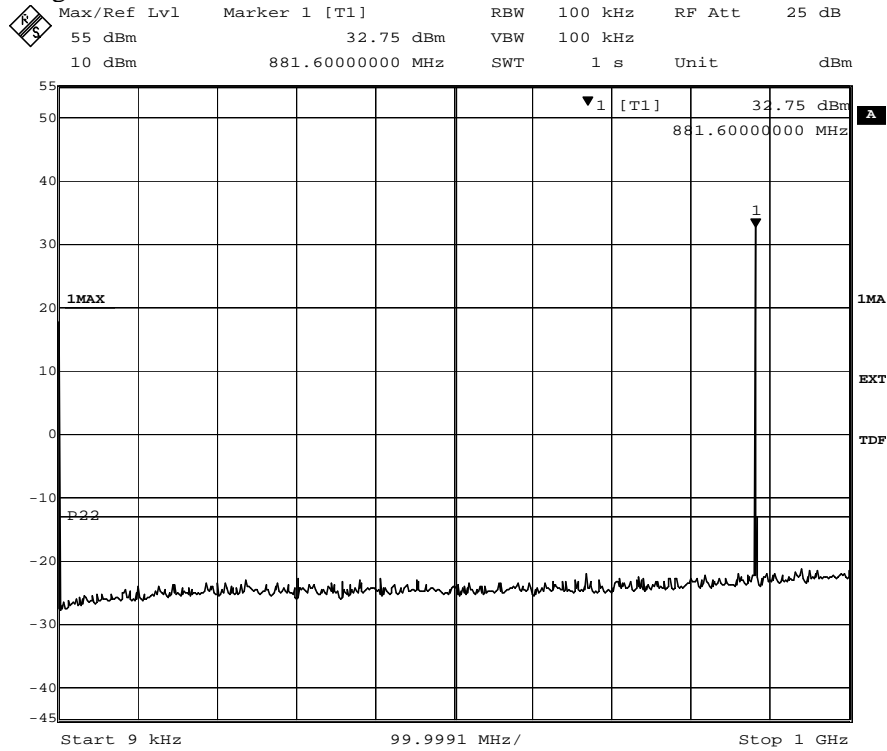

Date: 7.DEC.2011 14:08:02

Diagram 2 b:

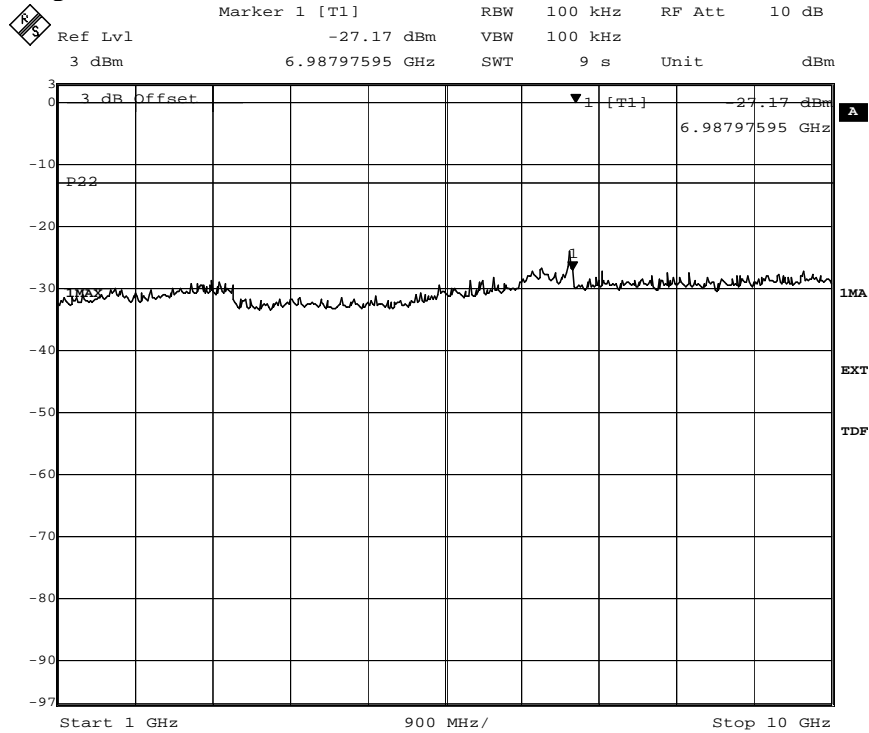

Date: 7.DEC.2011 15:18:09

Appendix 6

**Field strength of spurious radiation measurements according to CFR 47 2.1053**

Date	Temperature	Humidity
2011-06-07	21 °C ± 3 °C	70 % ± 5 %

**Test set-up and procedure**

The measurements were performed with both horizontal and vertical polarisation of the antenna. The antenna distance was 3 m in the frequency range 30 MHz – 10 GHz. The measurements were performed in Effective Radiated Power (ERP). A fully anechoic chamber was used during the measurements. The chamber is regularly calibrated with the substitution method and from that calibration an ERP correction factor is derived. The correction factor was used as a transducer to get the readings in ERP.

The measurement procedure was as the following:


1. A pre-measurement was first performed with peak detector. The EUT was continuously measured in 360 degrees.
2. Spurious radiation on frequencies closer than 6 dB to the limit was re-measured with RMS detector and with the substitution method according to the standard.

Configuration: RBS master 2E setting 33 for maximum nominal RF output power. The TX was activated on channel M.

Measurement equipment	SP number
Anechoic chamber, Hertz	15:116
R&S FSIQ40 Signal Analyser	503 738
R&S EMI Test Receiver ESI40	503 125
Chase bilog antenna CBL 6121A	502 460
Schaffner Reference Dipole BSRD6500	503 649
EMCO Horn Antenna 3115	502 175
EMCO Horn Antenna 3115	501 548
MITEQ Low Noise Amplifier	503 277
R&S Vector Network Analyser	503 687
Highpass filter	504 199
Testo 615 temperature and humidity meter	503 498

Appendix 6

The test set-up is shown in the picture below:

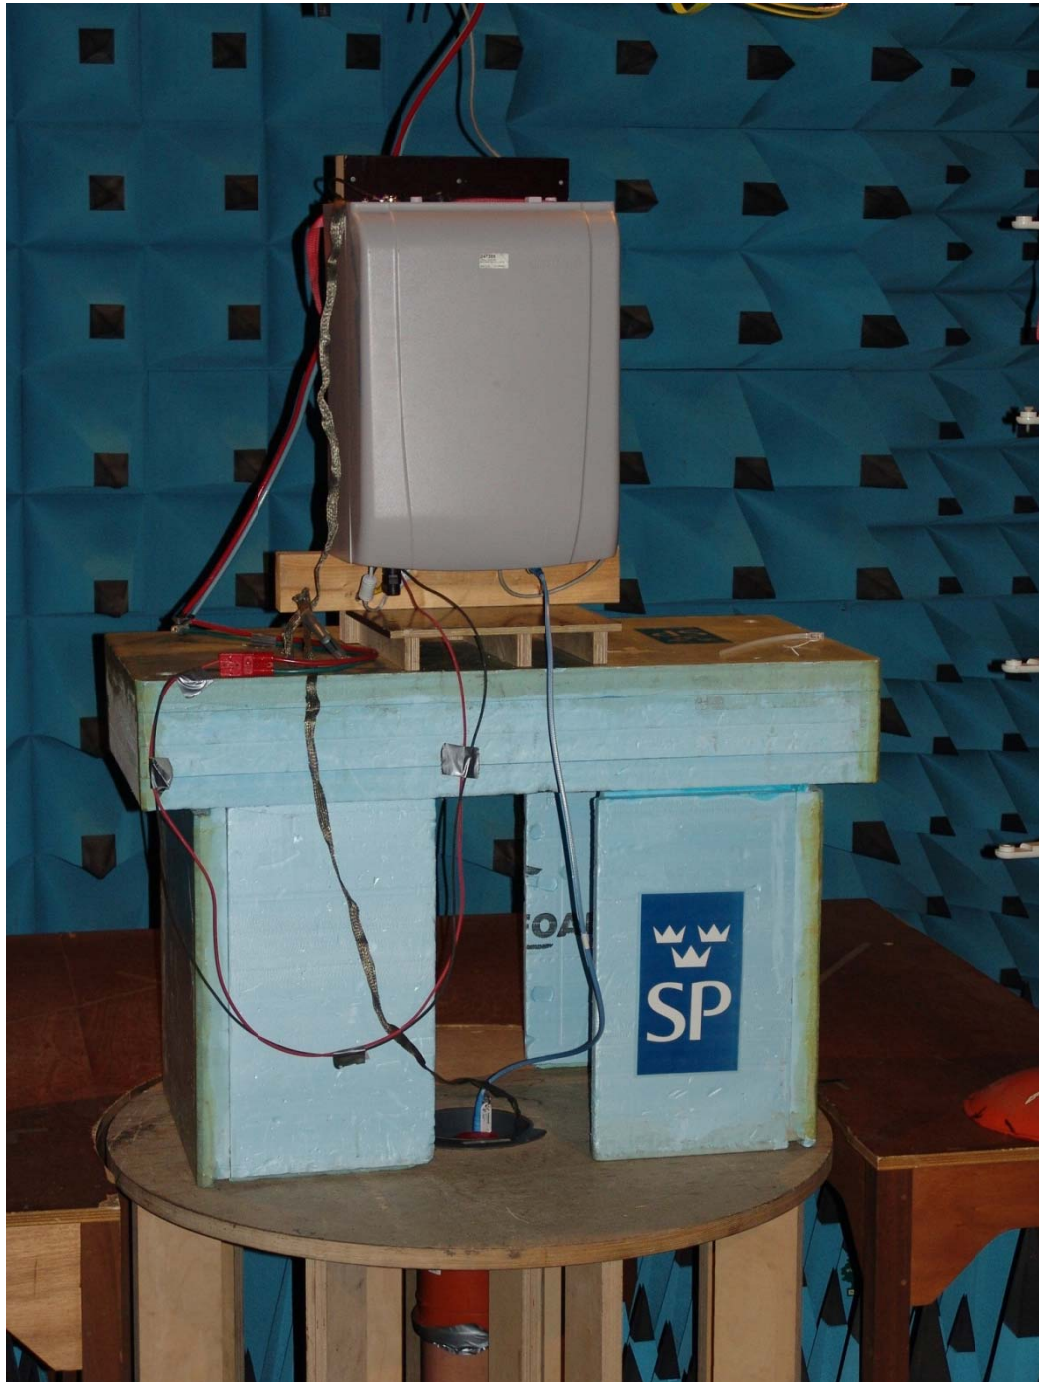

Appendix 6

**Results**

Modulation GMSK

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-10 000	All emission > 20 dB below limit	All emission > 20 dB below limit

Modulation AQPSK with SCPIR 0 dB

Frequency (MHz)	Spurious emission level (dBm)	
	Vertical	Horizontal
30-10 000	All emission > 20 dB below limit	All emission > 20 dB below limit

**Measurement uncertainty:** 3.1 dB

**Limits**

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log P$  dB.

Complies?	Yes
-----------	-----

## Appendix 7

### Photos of the test object

Note: The EUT is shown when assembled into a RBS 2308 configuration.

Front side (plastic front cover removed)



Back side





Appendix 7

Right side




Left side



Appendix 7

Top side

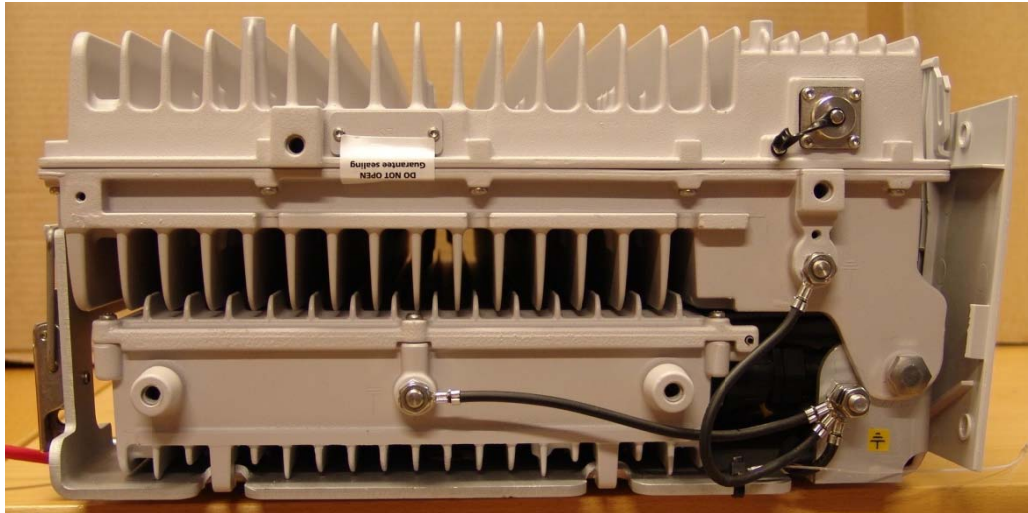

Bottom side

