

Page: 1 of 96

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Product Name Notebook Computer

HP **Brand Name**

Model No. HSN-I22C **Prepared for** HP Inc.

1501 Page Mill Road, Palo Alto CA 94304 USA

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013,

> KDB248227D01v02r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB447498D01v06.

KDB616217D04v01r02,

FCC ID B94-9560NGWCP

Date of Receipt Dec. 28, 2018

Date of Test(s) Jan. 02, 2019 ~ Jan. 18, 2019

Date of Issue Jan. 23, 2019

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in

Signed on behalf of SGS

Clerk / Ruby Ou	Supervisor / Afu Chen	Asst. Manager / John Yeh
Ruby Ou	afor Chen	John Teh

Date: Jan. 23, 2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 2 of 96

Revision History

Report Number	Revision	Description	Issue Date
EN/2018/C0015	Rev.00	Initial creation of document	Jan. 23, 2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 3 of 96

Contents

1. General Information	4
1.1 Testing Laboratory	
1.2 Details of Applicant	
1.3 Description of EUT	
1.4 Test Environment	31
1.5 Operation Description	31
1.6 The SAR Measurement System	33
1.7 System Components	
1.8 SAR System Verification	
1.9 Tissue Simulant Fluid for the Frequency Band	
1.10 Evaluation Procedures	
1.11 Probe Calibration Procedures	
1.12 Test Standards and Limits	
2. Summary of Results	49
2.1 Decision rules	
2.2 Summary of Results	
2.3 Reporting statements of conformity	52
3. Simultaneous Transmission Analysis	53
3.1 Estimated SAR calculation	54
3.2 SPLSR evaluation and analysis	54
4. Instruments List	61
5. Measurements	62
6. SAR System Performance Verification	84
7. Uncertainty Budget	
Appendixes	
EN2018C0015 SAR_Appendix A Photographs	
EN2018C0015 SAR_Appendix B DAE & Probe Cal. Certificate	
EN2018C0015 SAR Appendix C Phantom Description & Dipole Cal. Certificate	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 4 of 96

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory						
1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Rd., NeiHu Dist., Taipei City, Taiwan,						
11493.						
Tel	+886-2-2299-3279					
Fax	+886-2-2298-0488					
Internet	http://www.tw.sgs.com/					

1.2 Details of Applicant

Company Name	HP Inc.
Company Address	1501 Page Mill Road, Palo Alto CA 94304 USA

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com



Page: 5 of 96

1.3 Description of EUT

General Information of I	Host:			
Equipment Under Test	Notebook Computer			
Brand Name	HP			
Model No.	HSN-I22C			
Integrated Module	Brand Name : Intel			
miegratea medale	Model Name : 9560NGW			
FCC ID	B94-9560NGWCP			
Mode of Operation	⊠WLAN802.11 a/b/g/n(20M/40M)/ac(⊠Bluetooth	20M/40)M/80	/160M)
Duty Cycle	WLAN802.11 a/b/g/n(20M/40M)/ ac(20M/40M/80/160M)		1	
Daily Cyolo	Bluetooth		1	
	WLAN802.11 b/g/n(20M)	2412	_	2472
	WLAN802.11 n(40M)	2422	_	2462
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	5180	_	5240
	WLAN802.11 n(40M)/ac(40M) 5.2G	5190	_	5230
	WLAN802.11 ac(80M) 5.2G		5210	
	WLAN802.11 ac(160M) 5.2G			
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	5260	_	5320
TX Frequency Range	WLAN802.11 n(40M)/ac(40M) 5.3G	5270	_	5310
(MHz)	WLAN802.11 ac(80M) 5.3G		5290	
	WLAN802.11 a/n/ac(20M) 5.6G	5500	_	5720
	WLAN802.11 n/ac(40M) 5.6G	5510	_	5710
	WLAN802.11 ac(80M) 5.6G	5530	_	5690
	WLAN802.11 ac(160M) 5.6G		5670	
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	5745	_	5825
	WLAN802.11 n(40M)/ac(40M) 5.8G	5710	_	5795
	WLAN802.11 ac(80M) 5.8G		5775	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 6 of 96

TX Frequency Range (MHz)	Bluetooth	2402	_	2480
,	WLAN802.11 b/g/n(20M)	1	_	13
	WLAN802.11 n(40M)	3	_	11
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	36	_	48
	WLAN802.11 n(40M)/ac(40M) 5.2G	38	_	46
	WLAN802.11 ac(80M) 5.2G		42	
	WLAN802.11 ac(160M) 5.2G		50	
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	52	_	64
	WLAN802.11 n(40M)/ac(40M) 5.3G	54	_	62
Channel Number (ARFCN)	WLAN802.11 ac(80M) 5.3G		58	
(7 11 11 11 11 11 11 11 11 11 11 11 11 11	WLAN802.11 a/n/ac(20M) 5.6G	100	_	144
	WLAN802.11 n/ac(40M) 5.6G	102	_	142
	WLAN802.11 ac(80M) 5.6G	106	_	138
	WLAN802.11 ac(160M) 5.6G		144	
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	149	_	165
	WLAN802.11 n(40M)/ac(40M) 5.8G	151	_	159
	WLAN802.11 ac(80M) 5.8G		155	
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 7 of 96

AWAN

Max. SAR (1g) (Unit: W/Kg)									
Antenna	Band	Measured	Reported	Channel	Position				
	WLAN 802.11b	0.50	0.51	1	Top side				
	WLAN 802.11ac(80M) 5.2G	0.17	0.17	42	Top side				
Main	WLAN 802.11ac(80M) 5.3G	0.10	0.10	58	Top side				
	WLAN 802.11ac(80M) 5.6G	0.26	0.26	138	Top side				
	WLAN 802.11ac(80M) 5.8G	0.36	0.36	155	Top side				
	WLAN 802.11b	0.56	0.56	1	Top side				
	Bluetooth(GFSK)	0.11	0.20	78	Top side				
Aux	WLAN 802.11ac(80M) 5.2G	0.65	0.65	42	Top side				
Aux	WLAN 802.11ac(80M) 5.3G	0.60	0.60	58	Top side				
	WLAN 802.11ac(80M) 5.6G	0.93	0.93	138	Top side				
	WLAN 802.11ac(80M) 5.8G	0.82	0.83	155	Top side				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 8 of 96

HONG-BO

TONG-BO									
Max. SAR (1g) (Unit: W/Kg)									
Antenna	Band	Measured	Reported	Channel	Position				
	WLAN 802.11b	0.46	0.46	1	Top side				
	WLAN 802.11ac(80M) 5.2G	0.85	0.85	42	Top side				
Main	WLAN 802.11ac(80M) 5.3G	0.71	0.71	58	Top side				
	WLAN 802.11ac(80M) 5.6G	1.08	1.08	138	Top side				
	WLAN 802.11ac(80M) 5.8G	1.07	1.08	155	Top side				
	WLAN 802.11b	0.64	0.64	1	Top side				
	Bluetooth(GFSK)	0.13	0.25	78	Top side				
Aux	WLAN 802.11ac(80M) 5.2G	0.50	0.50	42	Top side				
Aux	WLAN 802.11ac(80M) 5.3G	0.51	0.51	58	Top side				
-	WLAN 802.11ac(80M) 5.6G	0.58	0.58	138	Top side				
	WLAN 802.11ac(80M) 5.8G	0.59	0.59	155	Top side				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 9 of 96

Antenna Information

Antenna	Antenna information										
Tablet mode											
Vendor	/endor HONG-BO										
Antenna	Main Aux										
Part Number	6036B0234501(260-27275)					ımber 6036B0234501(260-27275) 6036B0233201(260-27274)					
Frequency	2.4	5.2	5.3	5.6	5.8	2.4	5.2	5.3	5.6	5.8	
Gain (dBi)	-2.42	-2.99	-2.99	-2.26	-2.26	-2.98	2.55	2.55	2.4	1.89	

Laptop mode										
Vendor		HONG-BO								
Antenna			Main			Aux				
Part Number		6036B0234501(260-27275)					6036B02	233201(26	0-27274)	
Frequency	2.4	5.2	5.3	5.6	5.8	2.4	5.2	5.3	5.6	5.8
Gain (dBi)	1.57	-0.29	0.19	1.00	1.00	-9.57	-9.76	-9.76	-8.45	-8.92

Tablet mode										
Vendor	AWAN Corporation									
Antenna			Main			Aux				
Part Number	6036B0234001(ANP6Y-100282)					6	036B0234	1301(ANP	6Y-100281)
Frequency	2.4	5.2	5.3	5.6	5.8	2.4	5.2	5.3	5.6	5.8
Gain (dBi)	-5.40	-3.16	-1.47	-2.19	-3.65	-4.96	-3.46	-3.46	-2.65	-4.34

	Laptop mode									
Vendor	AWAN Corporation									
Antenna		Main						Aux		
Part Number	6	036B0234	1001(ANP	6Y-100282	2)	6	036B0234	1301(ANP	6Y-100281)
Frequency	2.4	5.2	5.3	5.6	5.8	8 2.4 5.2 5.3 5.6			5.8	
Gain (dBi)	-2.67	-5.02	-2.82	-2.98	-3.24	-4.76	-3.69	-3.21	-2.53	-3.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 10 of 96

WLAN802.11 a/b/g/n(20M/40M)/ac(20M/40M/80M/160M) conducted power table:

Antenna	SI	SO	MIMO
Band	Chain 0	Chain 1	Chain0+1
WLAN802.11b	V	V	-
WLAN802.11g	V	V	-
WLAN802.11n(20M)	V	V	V
WLAN802.11n(40M)	V	V	V
WLAN802.11a	V	V	-
WLAN802.11n(20M) 5G	V	V	V
WLAN802.11n(40M) 5G	V	V	V
WLAN802.11ac(20M) 5G	V	V	V
WLAN802.11ac(40M) 5G	V	V	V
WLAN802.11ac(80M) 5G	V	V	V
WLAN802.11ac(160M) 5G	V	V	V

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 11 of 96

Tablet mode

		Mair	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		17.50	17.48
		6	2437		17.50	17.43
	802.11b	11	2462	1Mbps	17.50	17.44
		12	2467		17.50	17.47
		13	2472		15.00	14.96
		1	2412		16.00	15.98
		2	2417		17.50	17.39
		6	2437		17.50	17.41
	802.11g	10	2457	6Mbps	17.50	17.38
		11	2462		16.50	16.39
		12	2467		13.00	12.97
		13	2472		-6.50	-6.61
2450 MHz		1	2412		16.00	15.99
2430 1011 12		2	2417		17.50	17.42
		6	2437		17.50	17.41
	802.11n20-HT0	10	2457	MCS0	17.50	17.40
		11	2462		16.50	16.46
		12	2467		13.00	12.97
		13	2472		-6.50	-6.53
		3	2422		14.50	14.49
		4	2427		16.00	15.96
		6	2437		16.00	15.95
	802.11n40-HT0	8	2447	MCS0	16.00	15.93
		9	2452		14.00	13.94
		10	2457]	10.50	10.44
		11	2462		3.50	3.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 12 of 96

		Main	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		15.50	15.45
	802.11a	40	5200	6Mbpc	15.50	15.36
	002.11a	44	5220	6Mbps	15.50	15.44
		48	5240		15.50	15.40
		36	5180	_	15.50	15.40
	802.11n20-HT0	40	5200	MCS0	15.50	15.41
	002.111120-1110	44	5220	IVICOU	15.50	15.43
		48	5240		15.50	15.45
5.15-5.25 GHz		36	5180		15.50	Average power (dBm) 15.45 15.36 15.44 15.40 15.40 15.41 15.43
0.10-0.20 0112	802.11ac20-VHT0	40	5200	MCS0	15.50	15.36
	002.11ac20-V1110	44	5220	IVICOU	15.50	15.43
		48	5240		15.50	15.40
	802.11n40-HT0	38	5190	MCS0	15.50	15.49
	002.1111 4 0-1110	46	5230	MCSU	15.50	15.47
	802.11ac40-VHT0	38	5190	MCS0	15.50	15.40
	002.11a040-VIII0	46	5230	IVICOU	15.50	15.43
	802.11ac80-VHT0	42	5210	MCS0	15.50	15.50
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 13 of 96

		Main	Antenna				
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
		52	5260		15.50	power (dBm) 15.46 15.49 15.40 15.43 15.44 15.38 15.35 15.35 15.43 15.41 15.32 15.37 15.48 14.46 15.43 14.43	
	802.11a	56	5280	6Mbps	15.50	15.49	
	002.11a	60	5300	Olvibps	15.50	15.40	
		64	5320		15.50	15.43	
		52	5260		15.50	15.44	
	802.11n20-HT0	56	5280	MCS0	15.50	15.38	
	002.111120-1110	60	5300	IVICOU	15.50	15.33	
		64	5320		15.50	15.35	
5.25-5.35 GHz		52	5260		15.50	15.43	
	802.11ac20-VHT0	56	5280	MCS0	15.50	15.41	
	002.11ac20-VH10	60	5300	MCSU	15.50	15.32	
		64	5320		15.50	15.37	
	802.11n40-HT0	54	5270	MCS0	15.50	15.48	
	002.111140-1110	62	5310	IVICOU	14.50	14.46	
	802.11ac40-VHT0	54	5270	MCSO	15.50	15.43	
	002.11a040-VIII0	62	5310	MCS0	14.50	14.43	
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 14 of 96

		Main A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		15.50	15.43
		116	5580		15.50	15.45
	802.11a	120	5600	6Mbps	15.50	15.39
		140	5700		15.50	15.41
		144	5720		15.50	15.44
		100	5500		15.50	15.41
		116	5580		15.50	15.44
	802.11n20-HT0	120	5600	MCS0	15.50	15.37
		140	5700		15.50	15.40
		144	5720		15.50	15.39
		100	5500		15.50	15.44
		116	5580		15.50	15.36
	802.11ac20-VHT0	120	5600	MCS0	15.50	15.41
5600 MHz		140	5700		15.50	15.45
3000 1011 12		144	5720		15.50	15.44
		102	5510		15.50	15.45
	802.11n40-HT0	110	5550	MCS0	15.50	15.49
	002.111140-1110	118	5590	IVICOU	15.50	15.47
		134	5670		15.50	15.48
		102	5510		15.50	15.40
		110	5550		15.50	15.45
	802.11ac40-VHT0	118	5590	MCS0	15.50	15.43
		134	5670		15.50	15.40
		142	5710		15.50	15.46
		106	5530		15.50	15.47
	802.11ac80-VHT0	122	5610	MCS0	15.50	15.41
		138	5690		15.50	15.50
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 15 of 96

	Main Antenna									
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		149	5745		15.50	15.42				
	802.11a	157	5785	6Mbps	15.50	15.34				
		165	5825		15.50	15.39				
		149	5745		15.50	15.38				
	802.11n20-HT0	157	5785	MCS0	15.50	15.43				
		165	5825		15.50	15.41				
5800 MHz		149	5745		15.50	15.37				
3000 1011 12	802.11ac20-VHT0	157	5785	MCS0	15.50	15.35				
		165	5825		15.50	15.40				
	802.11n40-HT0	151	5755	MCS0	15.50	15.42				
	002.111140-1110	159	5795	IVICOU	15.50	15.34				
	802.11ac40-VHT0	151	5755	MCS0	15.50	15.43				
	002.11a040-V1110	159	5795	IVICOU	15.50	15.38				
	802.11ac80-VHT0	155	5775	MCS0	15.50	15.45				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 16 of 96

		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		17.50	17.50
		6	2437		17.50	17.46
	802.11b	11	2462	1Mbps	17.50	17.43
		12	2467		17.50	17.34
		13	2472		15.00	14.93
		1	2412		16.00	15.96
		2	2417		17.50	17.37
		6	2437		17.50	17.39
	802.11g	10	2457	6Mbps	17.50	17.42
		11	2462		16.00	15.93
		12	2467		13.50	13.45
		13	2472		-6.00	-6.02
2450 MHz		1	2412		16.00	15.91
2430 1011 12		2	2417		17.50	17.41
		6	2437		17.50	17.43
	802.11n20-HT0	10	2457	MCS0	17.50	17.44
		11	2462		16.00	15.89
		12	2467		13.50	13.43
		13	2472		-6.00	-6.04
		3	2422		15.00	14.97
		4	2427		16.00	15.92
		6	2437		16.00	15.93
	802.11n40-HT0	8	2447	MCS0	16.00	15.91
		9	2452		14.50	14.41
		10	2457		11.00	10.84
		11	2462		3.00	2.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 17 of 96

		Aux A	ntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		15.50	15.39
	802.11a	40	5200	6Mbpc	15.50	15.38
	002.11a	44	5220	6Mbps	15.50	15.39
		48	5240		15.50	15.40
		36	5180		15.50	15.39
	802.11n20-HT0	40	5200	MCS0	15.50	15.40
	002.111120-1110	44	5220	IVICOU	15.50	15.34
		48	5240		15.50	15.41
5.15-5.25 GHz		36	5180		15.50	15.38
0.10 0.20 0112	802.11ac20-VHT0	40	5200	MCS0	15.50	15.41
	002.11d020 V1110	44	5220	WOOO	15.50	15.35
		48	5240		15.50	15.40
	802.11n40-HT0	38	5190	MCS0	15.50	15.44
	002.111140-1110	46	5230	IVICOU	15.50	15.41
	802.11ac40-VHT0	38	5190	MCS0	15.50	15.42
	002.11a070-V1110	46	5230	IVICOU	15.50	15.39
	802.11ac80-VHT0	42	5210	MCS0	15.50	15.50
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 18 of 96

		Aux A	ntenna				
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
		52	5260		15.50	Average power	
	802.11a	56	5280	6Mbps	15.50	15.42	
	002.11a	60	5300	Olvibps	15.50	15.49	
		64	5320		15.50	15.50	
		52	5260		15.50	15.37	
	802.11n20-HT0	56	5280	MCS0	15.50	15.31	
	002.111120-1110	60	5300	IVICOU	15.50	15.43	
		64	5320		15.50	15.46	
5.25-5.35 GHz		52	5260		15.50	15.39	
	802.11ac20-VHT0	56	5280	MCS0	15.50	15.35	
	602.11ac20-VH10	60	5300	MCSU	15.50	15.44	
		64	5320		15.50	15.41	
	802.11n40-HT0	54	5270	MCS0	15.50	15.45	
	ου2.1111 4 U-Π1U	62	5310	IVICS0	14.50	14.41	
	802.11ac40-VHT0	54	5270	MCS0	15.50	15.46	
	002.11a040-VH10	62	5310	IVICOU	14.50	14.44	
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 19 of 96

		Aux A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		15.50	15.35
		116	5580		15.50	15.41
	802.11a	120	5600	6Mbps	15.50	15.31
		140	5700		15.50	15.36
		144	5720		15.50	15.32
		100	5500		15.50	15.40
		116	5580		15.50	15.31
	802.11n20-HT0	120	5600 MCS0	MCS0	15.50	15.33
		140	5700		15.50	15.31
		144	5720		15.50	15.38
		100	5500		15.50	15.36
		116	5580		15.50	15.34
	802.11ac20-VHT0	120	5600	MCS0	15.50	15.38
5600 MHz		140	5700		15.50	15.39
3000 1011 12		144	5720		15.50	15.43
		102	5510		15.50	15.36
	802.11n40-HT0	110	5550	MCS0	15.50	15.39
	002.111140-1110	118	5590	IVICOU	15.50	15.42
		134	5670		15.50	15.34
		102	5510		15.50	15.34
		110	5550		15.50	15.36
	802.11ac40-VHT0	118	5590	MCS0	15.50	15.33
		134	5670		15.50	15.39
		142	5710		15.50	15.41
		106	5530		15.50	15.48
	802.11ac80-VHT0	122	5610	MCS0	15.50	15.44
		138	5690		15.50	15.50
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 20 of 96

		Aux A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		15.50	15.45
	802.11a	157	5785	6Mbps	15.50	15.37
		165	5825		15.50	15.41
		149	5745		15.50	15.39
	802.11n20-HT0	157	5785	MCS0	15.50	15.46
		165	5825		15.50	15.41
5800 MHz		149	5745		15.50	15.44
3000 1011 12	802.11n40-VHT0	157	5785	MCS0	15.50	15.38
		165	5825		15.50	15.44
	802.11n40-HT0	151	5755	MCS0	15.50	15.46
	002.111140-1110	159	5795	IVICOU	15.50	15.40
	802.11ac40-VHT0	151	5755	MCS0	15.50	15.37
	002.11d040-V110	159	5795	IVICSU	15.50	15.44
	802.11ac80-VHT0	155	5775	MCS0	15.50	15.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 21 of 96

Notebook mode

		Mair	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.50	19.44
		2	2417		20.50	20.43
		6	2437		20.50	20.49
	802.11b	10	2457	1Mbps	20.50	20.48
		11	2462		19.50	19.41
		12	2467		18.50	18.47
		13	2472		15.00	14.89
		1	2412		16.00	15.95
		2	2417		18.50	18.43
		6	2437		20.50	20.41
	802.11g	10	2457	6Mbps	18.50	18.45
		11	2462		16.50	16.42
		12	2467		13.00	12.91
2450 MHz		13	2472		-6.50	-6.51
2450 IVITZ		1	2412		16.00	15.96
		2	2417		18.50	18.45
		6	2437		20.50	20.44
	802.11n20-HT0	10	2457	MCS0	18.50	18.44
		11	2462		16.50	16.44
		12	2467		13.00	12.91
		13	2472		-6.50	-6.60
		3	2422		14.50	14.49
		4	2427		16.00	15.97
		6	2437		16.00	15.96
	802.11n40-HT0	8	2447	MCS0	16.00	15.95
		9	2452		14.00	13.91
		10	2457		10.50	10.43
		11	2462		3.50	3.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 22 of 96

		Main A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		19.00	18.95
	802.11a	40	5200	6Mbps	20.50	20.49
		44	5220	Givibps	20.50	20.48
		48	5240		20.50	20.50
		36	5180		19.00	18.95
	802.11n20-HT0	40	5200	MCS0	20.50	20.40
	002.111120-1110	44	5220	IVICOU	20.50	20.41
		48	5240		20.50	20.44
5.15-5.25 GHz		36	5180		19.00	18.92
0.13-3.23 GHZ	802.11ac20-VHT0	40	5200	MCS0	20.50	20.41
	002.11ac20-V1110	44	5220	IVICOU	20.50	20.46
		48	5240		20.50	20.40
	802.11n40-HT0	38	5190	MCS0	18.00	17.87
	802.11N4U-H10	46	5230	IVICOU	19.00	18.94
	802.11ac40-VHT0	38	5190	MCS0	18.00	17.90
	002.11a040-VIII0	46	5230	IVICOU	19.00	18.95
	802.11ac80-VHT0	42	5210	MCS0	17.50	17.44
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 23 of 96

		Main	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		20.50	20.49
	802.11a	56	5280	6Mbps	20.50	20.45
		60	5300		20.50	20.42
		64	5320		16.50	16.47
		52	5260	MCS0	20.50	20.43
	802.11n20-HT0	56	5280		20.50	20.38
	002.111120-1110	60	5300		20.50	20.43
		64	5320		16.50	16.39
5.25-5.35 GHz		52	5260		20.50	20.37
	802.11ac20-VHT0	56	5280	MCS0	20.50	20.40
	002.11ac20-VH10	60	5300	MCSU	20.50	20.37
		64	5320		16.50	16.42
	802.11n40-HT0	54	5270	MCS0	18.50	18.39
	002.111140-HTU	62	5310	IVICOU	14.50	14.35
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.42
	802.11ac40-VH10	62	5310	IVICOU	14.50	14.48
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 24 of 96

		Main	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.00	18.93
		104	5520		20.50	20.50
		116	5580		20.50	20.48
	802.11a	120	5600	6Mbps	20.50	20.44
		136	5680	- -	20.50	20.49
		140	5700		18.50	18.47
		100	5500		19.00	18.99
		104	5520		20.50	20.43
	000 44 00 1170	116 5580		20.50	20.45	
	802.11n20-HT0	120	5600	MCS0	20.50	20.49
		136	5680		20.50	20.49
		140	5700		18.50	18.49
		100	5500		19.00	18.97
		104	5520	MCS0	20.50	20.45
		116	5580		20.50	20.47
5000 MI I-	802.11ac20-VHT0	120	5600		20.50	20.49
5600 MHz		136	5680		20.50	20.44
		140	5700		18.50	18.41
		144	5720		19.50	19.41
		102	5510		16.50	16.41
	000 44 × 40 LITO	110	5550	MCCO	20.50	20.44
	802.11n40-HT0	118	5590	MCS0	20.50	20.47
		134	5670		19.50	19.43
		102	5510		16.50	16.49
		110	5550]	20.50	20.49
	802.11ac40-VHT0	118	5590	MCS0	20.50	20.45
		134	5670]	19.50	19.42
		142	5710	1	19.50	19.43
		106	5530		17.00	17.00
	802.11ac80-VHT0	122	5610	MCS0	20.50	20.47
		138	5690]	20.50	20.50
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 25 of 96

		Main A	Antenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		20.50	20.50
	802.11a 802.11n20-HT0	157	5785	6Mbps	20.50	20.44
		165	5825		20.50	20.43
		149	5745	MCS0	20.50	20.41
		157	5785		20.50	20.46
		165	5825		20.50	20.41
5800 MHz		149	5745		20.50	20.46
3600 1011 12	802.11ac20-VHT0	157	5785	MCS0	20.50	20.47
		165	5825		20.50	20.40
	802.11n40-HT0	151	5755	MCS0	18.50	18.46
	802.11N40-H10	159	5795	IVICOU	20.00	19.99
	802.11ac40-VHT0	151	5755	MCS0	18.50	18.42
	002.11d040-VH10	159	5795	IVICOU	20.00	19.97
	802.11ac80-VHT0	155	5775	MCS0	18.50	18.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 26 of 96

		Aux	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.50	19.42
		2	2417		20.50	20.48
		6	2437		20.50	20.47
	802.11b	10	2457	1Mbps	20.50	20.50
		11	2462		19.50	19.49
		12	2467		18.50	18.48
		13	2472		15.00	14.90
		1	2412		16.00	15.99
		2	2417		17.50	17.48
		6	2437		20.50	20.43
	802.11g	10	2457	6Mbps	18.50	18.41
		11	2462		16.00	15.90
		12	2467		13.50	13.43
2450 MHz		13	2472		-6.00	-6.08
2430 1011 12		1	2412		16.00	15.98
		2	2417		17.50	17.42
		6	2437		20.50	20.44
	802.11n20-HT0	10	2457	MCS0	18.50	18.44
		11	2462		16.00	15.99
		12	2467		13.50	13.46
		13	2472		-6.00	-6.09
		3	2422]	15.00	14.97
		4	2427		16.00	15.99
		6	2437		16.00	15.96
	802.11n40-HT0	8	2447	MCS0	16.00	15.97
		9	2452	1	14.50	14.40
		10	2457		11.00	10.90
		11	2462		3.00	2.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 27 of 96

		Aux A	ıntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		18.50	18.44
	802.11a	40	5200	6Mbps	20.00	19.92
		44	5220	Olvibbs	20.50	20.41
		48	5240		20.50	20.47
	802.11n20-HT0	36	5180		18.50	18.45
		40	5200	MCS0	20.00	19.94
	002.111120-1110	44	5220	IVICOU	20.50	20.41
		48	5240		20.50	20.44
5.15-5.25 GHz		36	5180		18.50	18.35
0.10 0.20 0112	802.11ac20-VHT0	40	5200	MCS0	20.00	19.89
	002.11a020 VIII0	44	5220	WOOO	20.50	20.43
		48	5240		20.50	20.46
	802.11n40-HT0	38	5190	MCS0	18.00	17.90
	802.111ac40-VHT0	46	5230	10000	19.50	19.41
		38	5190	MCS0	18.00	17.85
		46	5230		19.50	19.38
	802.11ac80-VHT0	42	5210	MCS0	18.00	17.92
	802.11ac160-VHT0	50	5250	MCS0	13.50	13.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 28 of 96

		Aux A	ntenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		20.50	20.49
	802.11a	56	5280	6Mbps	20.50	20.43
	002.11a	60	5300	Olvibps	20.50	20.42
		64	5320		16.00	15.95
	802.11n20-HT0	52	5260	MCS0	20.50	20.41
		56	5280		20.50	20.46
	002.111120-1110	60	5300		20.50	20.47
		64	5320		16.00	15.89
5.25-5.35 GHz		52	5260		20.50	20.39
	802.11ac20-VHT0	56	5280	MCS0	20.50	20.43
	602.11ac20-VH10	60	5300	IVICSU	20.50	20.41
		64	5320		16.00	15.94
	802.11n40-HT0	54	5270	MCS0	18.50	18.49
	ου2.11114U-Π1U	62	5310	IVICSU	14.50	14.43
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.42
	002.11a040-VH10	62	5310	IVICOU	14.50	14.41
	802.11ac80-VHT0	58	5290	MCS0	15.50	15.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 29 of 96

		Aux A	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.00	18.98
		104	5520		20.50	20.50
	902 110	116	5580	GMbpa	20.50	20.46
	802.11a	120	5600	6Mbps	20.50	20.41
		136	5680		20.50	20.49
		140	5700		18.50	18.48
		100	5500		19.00	18.90
		104	5520		20.50	20.43
	802.11n20-HT0	116	5580	MCS0	20.50	20.41
	802.11N20-H10	120	5600	MCSU	20.50	20.41
		136	5680		20.50	20.40
		140	5700		18.50	18.46
		100	5500		19.00	18.99
		104	5520	MCS0	20.50	20.41
		116	5580		20.50	20.45
5600 MHz	802.11ac20-VHT0	120	5600		20.50	20.48
3600 MINZ		136	5680		20.50	20.48
		140	5700		18.50	18.41
		144	5720		20.00	19.99
		102	5510		17.00	16.91
	802.11n40-HT0	110	5550	MCS0	20.50	20.43
	002.111140-010	118	5590	IVICSU	20.50	20.46
		134	5670		18.50	18.44
		102	5510		17.00	16.90
		110	5550		20.50	20.49
	802.11ac40-VHT0	118	5590	MCS0	20.50	20.41
		134	5670		18.50	18.49
		142	5710		19.50	19.41
		106	5530		17.50	17.42
	802.11ac80-VHT0	122	5610	MCS0	20.50	20.46
		138	5690		20.50	20.50
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.98

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 30 of 96

		Aux A	ntenna			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		20.50	20.50
	802.11a	157	5785	6Mbps	20.50	20.45
		165	5825		20.50	20.41
		149	5745	MCS0	20.50	20.44
	802.11n20-HT0	157	5785		20.50	20.48
		165	5825		20.50	20.43
5800 MHz		149	5745		20.50	20.45
3600 1011 12	802.11n40-VHT0	157	5785	MCS0	20.50	20.40
		165	5825		20.50	20.41
	802.11n40-HT0	151	5755	MCS0	19.50	19.47
	802.11n40-H10	159	5795	IVICOU	20.00	19.97
	802.11ac40-VHT0	151	5755	MCS0	19.50	19.49
	002.11ac40-VH10	159	5795	IVICOU	20.00	19.91
	802.11ac80-VHT0	155	5775	MCS0	19.00	18.91

Bluetooth conducted power table:

			1Mbps		2MI	ops	3Mbps	
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	CH 00	2402	9.50	7.94	5.50	5.34	5.50	5.36
BR/EDR	CH 39	2441	9.50	8.42	5.50	5.46	5.50	5.45
	CH 78	2480	9.50	8.66	5.50	5.41	5.50	5.42

Mode	Channel	Frequency	GF	GFSK		
iviode	(MHz)		Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)		
	CH 00	2402		5.40		
LE	CH 19	2440	5.5	5.32		
	CH 39 2480			5.38		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 31 of 96

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

Use chipset specific software to control the EUT, and makes it transmit in maximum power. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

The device is a convertible laptop computer with RF feature. The device will adjust the maximum output power for different user scenario and EUT was tested as below based on KDB inquiry.

Tablet mode

Main/Aux antennas: Back/top/bottom/right/left sides_0mm with reduced power

Laptop mode

SAR measurement for Laptop SAR with full power is not required since the distance between antenna and user is > 20cm.

Note:

802.11b DSSS SAR Test Requirements:

- 1. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

3. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 32 of 96

adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

- 4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 6. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 7. BT and WLAN Aux use the same antenna path, but they can't transmit at the same time.
- 8. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is \leq 100 MHz.
- 9. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)
- 10.SAR test exclusion evaluation (based on KDB447498D01) for the surfaces/edges of tablet mode is not required since all the applicable surfaces/edges were tested.
- 11. There are two antenna vendors, one is AWAN, and another is HONG-BO. Both of them were measured fully and respectively.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 33 of 96

1.6 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ ($|Ei|^2$)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

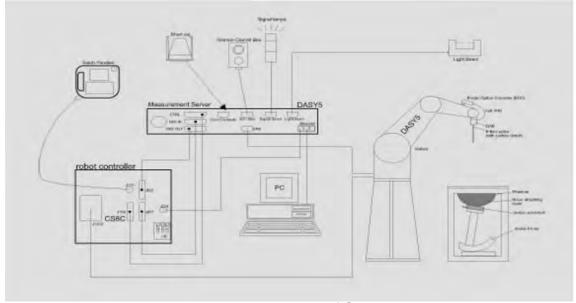


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 34 of 96

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. Tissue simulating liquid mixed according to the given recipes.
- 11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具色書,同時什樣具僅保留的主。大報生主經太公司書面許可,不可無份複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 35 of 96

1.7 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)		
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request		
Frequency	10 MHz to > 6 GHz		
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)		
Dynamic	$10 \mu \text{W/g to} > 100 \text{mW/g}$		
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)		
Dimensions	Tip diameter: 2.5 mm		
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 36 of 96

PHANTOM

FIIANTOW		
Model	ELI	
Construction	body-mounted wireless devices to 6 GHz. ELI is fully cor standard and all known tissue optimized regarding its perform our standard phantom tables. A liquid. Reference markings on the complete setup, including	ompliance testing of handheld and in the frequency range of 30 MHz mpatible with the IEC 62209-2 simulating liquids. ELI has been mance and can be integrated into a cover prevents evaporation of the the phantom allow installation of all predefined phantom positions aching three points. The phantom osimetric probes and dipoles.
Shell	2 ± 0.2 mm	
Thickness		
Filling Volume	Approx. 30 liters	
Dimensions	Major axis: 600 mm	E DE SERVICE : DESCRIPTION DE L'ACTUAL DE
	Minor axis: 400 mm	

DEVICE HOLDER

DEVICE HOLDER			
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	Device Holder	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 37 of 96

1.8 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was \geq 15 cm \pm 5 mm (frequency \leq 3 GHz) or \geq 10 cm \pm 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

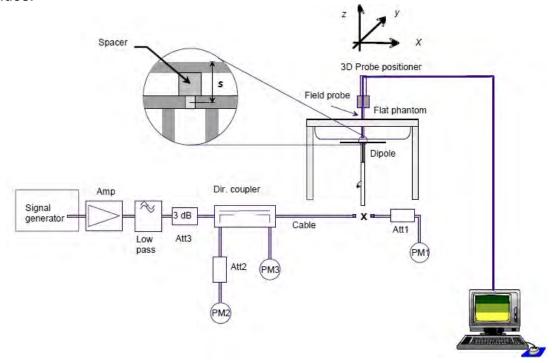


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的阻,此想些结果做新测试之缘具负责,同时讲解已确保例的主,不可可以发现。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall fillings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 38 of 96

Validation Kit	S/N	Frequ (Mł	•	1W Target SAR-1g (mW/g)	Pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450\/2	727	2450 Body		50.8	13.2	52.8	3.94%	Jan. 15, 2019
D2450V2	121	21 2450	Бойу	50.8	12.8	51.2	0.79%	Jan. 02, 2019

Validation Kit	I S/N		uency Hz)	1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
		5200		72.8	7.37	73.7	1.24%	Jan. 15, 2019
		3200	Body	72.8	7.26	72.6	-0.27%	Jan. 02, 2019
		5300	Body	76.1	7.62	76.2	0.13%	Jan. 16, 2019
D5GHzV2				76.1	7.57	75.7	-0.53%	Jan. 03, 2019
DJGHZVZ	1023	5600	Body	79.6	8.17	81.7	2.64%	Jan. 17, 2019
		5600		79.6	8.09	80.9	1.63%	Jan. 05, 2019
		5800	Dody	75.9	7.77	77.7	2.37%	Jan. 18, 2019
			Body	75.9	7.74	77.4	1.98%	Jan. 06, 2019

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 39 of 96

1.9 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.

The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm ± 5 mm (Frequency \leq 3G) or \geq 10 cm \pm 5 mm (Frequency >3G) during all tests. (Fig. 2)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 40 of 96

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		2402.00	52.764	1.904	53.702	1.917	-1.78%	-0.68%
		2412.00	52.751	1.914	53.689	1.929	-1.78%	-0.78%
		2417.00	52.744	1.918	53.660	1.935	-1.74%	-0.89%
		2437.00	52.717	1.938	53.617	1.961	-1.71%	-1.19%
	Jan, 15. 2019	2441.00	52.712	1.941	53.605	1.964	-1.69%	-1.18%
		2450.00	52.700	1.950	53.538	1.981	-1.59%	-1.59%
		2457.00	52.691	1.960	53.543	1.983	-1.62%	-1.17%
		2462.00	52.685	1.967	53.549	1.990	-1.64%	-1.17%
		2480.00	52.662	1.993	53.513	2.011	-1.62%	-0.90%
		5180.00	49.041	5.276	49.350	5.165	-0.63%	2.10%
		5190.00	49.028	5.288	49.302	5.174	-0.56%	2.16%
		5200.00	49.014	5.299	49.236	5.180	-0.45%	2.25%
	Jan, 15. 2019	5210.00	49.001	5.311	49.186	5.187	-0.38%	2.33%
		5220.00	48.987	5.323	49.185	5.201	-0.40%	2.29%
		5230.00	48.974	5.334	49.112	5.246	-0.28%	1.65%
		5240.00	48.960	5.346	49.107	5.251	-0.30%	1.78%
		5260.00	48.933	5.369	48.998	5.287	-0.13%	1.53%
	Jan, 16. 2019	5270.00	48.919	5.381	48.991	5.302	-0.15%	1.47%
Dark		5280.00	48.906	5.393	48.987	5.317	-0.17%	1.41%
Body		5290.00	48.892	5.404	48.949	5.346	-0.12%	1.07%
		5300.00	48.879	5.416	48.947	5.349	-0.14%	1.24%
		5310.00	48.865	5.428	48.868	5.369	-0.01%	1.09%
		5320.00	48.851	5.439	48.855	5.376	-0.01%	1.16%
[5510.00	48.594	5.661	48.235	5.683	0.74%	-0.39%
		5520.00	48.580	5.673	48.218	5.707	0.75%	-0.60%
		5530.00	48.566	5.685	48.165	5.716	0.83%	-0.55%
		5550.00	48.539	5.708	48.086	5.744	0.93%	-0.63%
	Jan, 17. 2019	5590.00	48.485	5.755	48.001	5.835	1.00%	-1.39%
	Jan, 17. 2019	5600.00	48.471	5.766	48.007	5.838	0.96%	-1.25%
		5610.00	48.458	5.778	47.943	5.842	1.06%	-1.11%
		5670.00	48.376	5.848	47.758	5.950	1.28%	-1.74%
		5680.00	48.363	5.860	47.694	5.984	1.38%	-2.12%
		5690.00	48.349	5.872	47.693	6.000	1.36%	-2.18%
		5745.00	48.275	5.936	47.543	6.073	1.52%	-2.31%
		5755.00	48.261	5.947	47.500	6.087	1.58%	-2.35%
	Jan, 18. 2019	5775.00	48.234	5.971	47.395	6.129	1.74%	-2.65%
		5795.00	48.207	5.994	47.356	6.165	1.77%	-2.85%
		5800.00	48.200	6.000	47.329	6.169	1.81%	-2.82%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 41 of 96

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		2402.00	52.764	1.904	54.094	1.916	-2.52%	-0.63%
		2412.00	52.751	1.914	54.086	1.923	-2.53%	-0.47%
		2417.00	52.744	1.918	54.038	1.934	-2.45%	-0.83%
		2437.00	52.717	1.938	53.985	1.961	-2.41%	-1.19%
	Jan, 02. 2019	2441.00	52.712	1.941	53.982	1.965	-2.41%	-1.24%
		2450.00	52.700	1.950	53.980	1.984	-2.43%	-1.74%
		2457.00	52.691	1.960	53.946	1.987	-2.38%	-1.38%
		2462.00	52.685	1.967	53.935	1.992	-2.37%	-1.27%
		2480.00	52.662	1.993	53.880	2.016	-2.31%	-1.15%
		5180.00	49.041	5.276	49.497	5.146	-0.93%	2.46%
		5190.00	49.028	5.288	49.484	5.149	-0.93%	2.63%
		5200.00	49.014	5.299	49.443	5.164	-0.88%	2.55%
	Jan, 02. 2019	5210.00	49.001	5.311	49.379	5.170	-0.77%	2.65%
		5220.00	48.987	5.323	49.367	5.183	-0.78%	2.63%
		5230.00	48.974	5.334	49.276	5.208	-0.62%	2.36%
		5240.00	48.960	5.346	49.258	5.231	-0.61%	2.15%
		5260.00	48.933	5.369	49.166	5.264	-0.48%	1.96%
	Jan, 03. 2019	5270.00	48.919	5.381	49.163	5.288	-0.50%	1.73%
Body		5280.00	48.906	5.393	49.154	5.290	-0.51%	1.91%
		5290.00	48.892	5.404	49.119	5.314	-0.46%	1.67%
		5300.00	48.879	5.416	49.113	5.332	-0.48%	1.55%
		5310.00	48.865	5.428	49.045	5.338	-0.37%	1.66%
		5320.00	48.851	5.439	48.993	5.347	-0.29%	1.69%
		5510.00	48.594	5.661	48.391	5.668	0.42%	-0.12%
		5520.00	48.580	5.673	48.355	5.681	0.46%	-0.14%
		5530.00	48.566	5.685	48.343	5.692	0.46%	-0.12%
		5550.00	48.539	5.708	48.245	5.720	0.61%	-0.21%
	Jan, 05. 2019	5590.00	48.485	5.755	48.177	5.810	0.64%	-0.96%
		5600.00	48.471	5.766	48.165	5.820	0.63%	-0.94%
		5610.00	48.458	5.778	48.110	5.831	0.72%	-0.92%
		5670.00	48.376	5.848	47.898	5.935	0.99%	-1.49%
		5690.00	48.349	5.872	47.835	5.976	1.06%	-1.77%
		5745.00	48.275	5.936	47.685	6.066	1.22%	-2.19%
		5755.00	48.261	5.947	47.649	6.082	1.27%	-2.27%
	Jan, 06. 2019	5775.00	48.234	5.971	47.570	6.107	1.38%	-2.28%
		5795.00	48.207	5.994	47.513	6.144	1.44%	-2.50%
		5800.00	48.200	6.000	47.504	6.148	1.44%	-2.47%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 42 of 96

The composition of the tissue simulating liquid:

						•		
				Ingr	edient			Tatal
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount
2450M	Body	301.7ml	698.3ml		_	_		1.0L(Kg)

Body Simulating Liquids for 5 GHz, Manufactured by SPEAG:

	Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
Ī	(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 96

1.10 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 44 of 96

interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.11 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.11.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T/\delta t$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t}$$
,

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 45 of 96

- The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures ($\sim 2\%$ for c; much better for p), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.11.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids. When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> SGS Taiwan Ltd. 1 t (886-2) 2299-3279



Page: 46 of 96

setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- 1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- 2. K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962,
- 3. K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 47 of 96

1.12 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- (1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- (2) Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- (3) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,件据华廷用属影测建文样具色素,同时件样具属是例如于。大规华主领大公司事面实可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 48 of 96

exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 49 of 96

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013: Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

AWAN

WI AN Antenna (Tablet mode)

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W)		Plot page
			()		(**************************************	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	1	2412	17.50	17.48	100.46%	0.473	0.475	-
		Top side	0	1	2412	17.50	17.48	100.46%	0.503	0.505	62
	WLAN 802.11b	Bottom side	0	1	2412	17.50	17.48	100.46%	0.011	0.011	-
		Right side	0	1	2412	17.50	17.48	100.46%	0.008	0.008	-
		Left side	0	1	2412	17.50	17.48	100.46%	0.278	0.279	-
		Back side	0	42	5210	15.50	15.50	100.00%	0.162	0.162	-
		Top side	0	42	5210	15.50	15.50	100.00%	0.173	0.173	63
	WLAN 802.11ac(80M) 5.2G	Bottom side	0	42	5210	15.50	15.50	100.00%	0.005	0.005	-
		Right side	0	42	5210	15.50	15.50	100.00%	0.004	0.004	-
		Left side	0	42	5210	15.50	15.50	100.00%	0.114	0.114	-
		Back side	0	58	5290	15.50	15.50	100.00%	0.083	0.083	-
		Top side	0	58	5290	15.50	15.50	100.00%	0.097	0.097	64
Main	WLAN 802.11ac(80M) 5.3G	Bottom side	0	58	5290	15.50	15.50	100.00%	0.003	0.003	-
		Right side	0	58	5290	15.50	15.50	100.00%	0.002	0.002	-
		Left side	0	58	5290	15.50	15.50	100.00%	0.072	0.072	-
		Back side	0	138	5690	15.50	15.50	100.00%	0.231	0.231	-
		Top side	0	138	5690	15.50	15.50	100.00%	0.257	0.257	65
	WLAN 802.11ac(80M) 5.6G	Bottom side	0	138	5690	15.50	15.50	100.00%	0.007	0.007	-
		Right side	0	138	5690	15.50	15.50	100.00%	0.006	0.006	-
		Left side	0	138	5690	15.50	15.50	100.00%	0.183	0.183	-
		Back side	0	155	5775	15.50	15.45	101.16%	0.322	0.326	-
		Top side	0	155	5775	15.50	15.45	101.16%	0.356	0.360	66
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	15.50	15.45	101.16%	0.010	0.011	-
		Right side	0	155	5775	15.50	15.45	101.16%	0.007	0.008	-
		Left side	0	155	5775	15.50	15.45	101.16%	0.255	0.258	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 96

WLAN Aux Antenna (Tablet mode)

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			(11111)		(1411 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back side	0	1	2412	17.50	17.50	100.00%	0.517	0.517	-
		Top side	0	1	2412	17.50	17.50	100.00%	0.559	0.559	67
	WLAN 802.11b	Bottom side	0	1	2412	17.50	17.50	100.00%	0.013	0.013	-
		Right side	0	1	2412	17.50	17.50	100.00%	0.284	0.284	-
		Left side	0	1	2412	17.50	17.50	100.00%	0.010	0.010	-
		Back side	0	78	2480	11.50	8.66	192.31%	0.098	0.188	-
		Top side	0	78	2480	11.50	8.66	192.31%	0.105	0.202	68
	Bluetooth (GFSK)	Bottom side	0	78	2480	11.50	8.66	192.31%	0.004	0.008	
		Right side	0	78	2480	11.50	8.66	192.31%	0.057	0.110	-
		Left side	0	78	2480	11.50	8.66	192.31%	0.003	0.006	-
		Back side	0	42	5210	15.50	15.50	100.00%	0.617	0.617	-
		Top side	0	42	5210	15.50	15.50	100.00%	0.645	0.645	69
	WLAN 802.11ac(80M) 5.2G	Bottom side	0	42	5210	15.50	15.50	100.00%	0.022	0.022	-
		Right side	0	42	5210	15.50	15.50	100.00%	0.311	0.311	-
		Left side	0	42	5210	15.50	15.50	100.00%	0.017	0.017	-
		Back side	0	58	5290	15.50	15.50	100.00%	0.538	0.538	-
Aux		Top side	0	58	5290	15.50	15.50	100.00%	0.595	0.595	70
	WLAN 802.11ac(80M) 5.3G	Bottom side	0	58	5290	15.50	15.50	100.00%	0.016	0.016	-
		Right side	0	58	5290	15.50	15.50	100.00%	0.301	0.301	-
		Left side	0	58	5290	15.50	15.50	100.00%	0.012	0.012	-
		Back side	0	138	5690	15.50	15.50	100.00%	0.703	0.703	-
		Top side	0	106	5530	15.50	15.48	100.46%	0.893	0.897	
		Top side	0	138	5690	15.50	15.50	100.00%	0.927	0.927	71
	WLAN 802.11ac(80M) 5.6G	Top side*	0	138	5690	15.50	15.50	100.00%	0.884	0.884	-
		Bottom side	0	138	5690	15.50	15.50	100.00%	0.028	0.028	-
		Right side	0	138	5690	15.50	15.50	100.00%	0.524	0.524	-
		Left side	0	138	5690	15.50	15.50	100.00%	0.020	0.020	-
		Back side	0	155	5775	15.50	15.48	100.46%	0.713	0.716	-
		Top side	0	155	5775	15.50	15.48	100.46%	0.821	0.825	72
	WLAN 802.11ac(80M) 5.8G	Top side*	0	155	5775	15.50	15.48	100.46%	0.779	0.783	
	VV LAIN OUZ. I TAC(OUIVI) 5.8G	Bottom side	0	155	5775	15.50	15.48	100.46%	0.024	0.024	-
		Right side	0	155	5775	15.50	15.48	100.46%	0.499	0.501	-
		Left side	0	155	5775	15.50	15.48	100.46%	0.019	0.019	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 51 of 96

HONG-BO

WI AN Antenna (Tablet mode)

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			()		(2)	Tolerance (dBm)	(dBm)		Measured	Reported	pago
		Back side	0	1	2412	17.50	17.48	100.46%	0.436	0.438	-
		Top side	0	1	2412	17.50	17.48	100.46%	0.458	0.460	73
	WLAN 802.11b	Bottom side	0	1	2412	17.50	17.48	100.46%	0.009	0.009	-
		Right side	0	1	2412	17.50	17.48	100.46%	0.007	0.007	-
		Left side	0	1	2412	17.50	17.48	100.46%	0.256	0.257	-
		Back side	0	42	5210	15.50	15.50	100.00%	0.763	0.763	-
		Top side	0	42	5210	15.50	15.50	100.00%	0.847	0.847	74
	WLAN 802.11ac(80M) 5.2G	Top side*	0	42	5210	15.50	15.50	100.00%	0.843	0.843	-
	WLAN 802.11ac(80W) 5.2G	Bottom side	0	42	5210	15.50	15.50	100.00%	0.022	0.022	-
		Right side	0	42	5210	15.50	15.50	100.00%	0.019	0.019	-
		Left side	0	42	5210	15.50	15.50	100.00%	0.424	0.424	-
		Back side	0	58	5290	15.50	15.50	100.00%	0.688	0.688	-
	WLAN 802.11ac(80M) 5.3G	Top side	0	58	5290	15.50	15.50	100.00%	0.706	0.706	75
		Bottom side	0	58	5290	15.50	15.50	100.00%	0.018	0.018	-
Main		Right side	0	58	5290	15.50	15.50	100.00%	0.016	0.016	-
		Left side	0	58	5290	15.50	15.50	100.00%	0.367	0.367	-
		Back side	0	138	5690	15.50	15.50	100.00%	0.765	0.765	-
		Top side	0	106	5530	15.50	15.47	100.69%	1.010	1.017	-
		Top side	0	138	5690	15.50	15.50	100.00%	1.080	1.080	76
	WLAN 802.11ac(80M) 5.6G	Top side*	0	138	5690	15.50	15.50	100.00%	1.060	1.060	-
		Bottom side	0	138	5690	15.50	15.50	100.00%	0.027	0.027	-
		Right side	0	138	5690	15.50	15.50	100.00%	0.022	0.022	-
		Left side	0	138	5690	15.50	15.50	100.00%	0.493	0.493	-
		Back side	0	155	5775	15.50	15.45	101.16%	0.738	0.747	-
		Top side	0	155	5775	15.50	15.45	101.16%	1.070	1.082	77
	W/I ANI 902 11 pg/90MP 5 92	Top side*	0	155	5775	15.50	15.45	101.16%	1.050	1.062	-
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	15.50	15.45	101.16%	0.025	0.025	-
		Right side	0	155	5775	15.50	15.45	101.16%	0.019	0.020	-
		Left side	0	155	5775	15.50	15.45	101.16%	0.488	0.494	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com



Page: 52 of 96

WLAN Aux Antenna (Tablet mode)

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W	AR over 1g /kg)	Plot page
			()		(/	Tolerance (dBm)	(dBm)		Measured	Reported	F3-
		Back side	0	1	2412	17.50	17.50	100.00%	0.603	0.603	-
		Top side	0	1	2412	17.50	17.50	100.00%	0.636	0.636	78
	WLAN 802.11b	Bottom side	0	1	2412	17.50	17.50	100.00%	0.015	0.015	-
		Right side	0	1	2412	17.50	17.50	100.00%	0.291	0.291	-
		Left side	0	1	2412	17.50	17.50	100.00%	0.013	0.013	-
		Back side	0	78	2480	11.50	8.66	192.31%	0.127	0.244	-
		Top side	0	78	2480	11.50	8.66	192.31%	0.131	0.252	79
	Bluetooth (GFSK)	Bottom side	0	78	2480	11.50	8.66	192.31%	0.003	0.006	-
		Right side	0	78	2480	11.50	8.66	192.31%	0.079	0.153	-
		Left side	0	78	2480	11.50	8.66	192.31%	0.002	0.004	-
		Back side	0	42	5210	15.50	15.50	100.00%	0.476	0.476	-
		Top side	0	42	5210	15.50	15.50	100.00%	0.499	0.499	80
	WLAN 802.11ac(80M) 5.2G	Bottom side	0	42	5210	15.50	15.50	100.00%	0.012	0.012	-
		Right side	0	42	5210	15.50	15.50	100.00%	0.211	0.211	-
Aux		Left side	0	42	5210	15.50	15.50	100.00%	0.008	0.008	-
Aux		Back side	0	58	5290	15.50	15.50	100.00%	0.481	0.481	-
		Top side	0	58	5290	15.50	15.50	100.00%	0.511	0.511	81
	WLAN 802.11ac(80M) 5.3G	Bottom side	0	58	5290	15.50	15.50	100.00%	0.013	0.013	-
		Right side	0	58	5290	15.50	15.50	100.00%	0.232	0.232	-
		Left side	0	58	5290	15.50	15.50	100.00%	0.007	0.007	-
		Back side	0	138	5690	15.50	15.50	100.00%	0.584	0.584	-
		Top side	0	138	5690	15.50	15.50	100.00%	0.578	0.578	82
	WLAN 802.11ac(80M) 5.6G	Bottom side	0	138	5690	15.50	15.50	100.00%	0.014	0.014	-
		Right side	0	138	5690	15.50	15.50	100.00%	0.273	0.273	-
		Left side	0	138	5690	15.50	15.50	100.00%	0.010	0.010	-
		Back side	0	155	5775	15.50	15.48	100.46%	0.584	0.587	-
		Top side	0	155	5775	15.50	15.48	100.46%	0.591	0.594	83
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	15.50	15.48	100.46%	0.014	0.014	-
		Right side	0	155	5775	15.50	15.48	100.46%	0.278	0.279	-
		Left side	0	155	5775	15.50	15.48	100.46%	0.011	0.011	-

Note:

Scaling =
$$\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P2-P1}{10}\right)(dBm)}$$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 53 of 96

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
2.4GHz WLAN MIMO	Yes
5GHz WLAN MIMO	Yes
BT + 2.4GHz WLAN Main	Yes
BT + 5GHz WLAN Main	Yes

Note:

- 1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.
- 2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 96

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 55 of 96

AWAN

2.4 GHz WLAN MIMO

	JIIL WEAR MINO					
No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0.475	0.517	0.992	ΣSAR<1.6, Not required
		Top side	0.505	0.559	1.064	ΣSAR<1.6, Not required
1	2.4 GHz WLAN Main + WLAN Aux	Bottom side	0.011	0.013	0.024	ΣSAR<1.6, Not required
		Right side	0.008	0.284	0.292	ΣSAR<1.6, Not required
		Left side	0.279	0.010	0.289	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 56 of 96

5 GHz WLAN MIMO

No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0.326	0.716	1.042	ΣSAR<1.6, Not required
		Top side	0.360	0.927	1.287	ΣSAR<1.6, Not required
2	5 GHz WLAN Main + WLAN Aux	Bottom side	0.011	0.028	0.039	ΣSAR<1.6, Not required
		Right side	0.008	0.524	0.532	ΣSAR<1.6, Not required
		Left side	0.258	0.020	0.278	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 57 of 96

BT+ 2.4GHz WLAN Main

<u>=</u>	T Z.TOTIZ WEAT MIGH								
No.	Conditions	Position	Max. WLAN Main	ВТ	SAR Sum	SPLSR			
		Back side	0.475	0.188	0.663	ΣSAR<1.6, Not required			
		Top side	0.505	0.202	0.707	ΣSAR<1.6, Not required			
3	2.4 GHz WLAN Main + BT	Bottom side	0.011	0.008	0.019	ΣSAR<1.6, Not required			
		Right side	0.008	0.110	0.118	ΣSAR<1.6, Not required			
		Left side	0.279	0.006	0.285	ΣSAR<1.6, Not required			

BT+ 5GHz WLAN Main

No.	Conditions	Position	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0.326	0.188	0.514	ΣSAR<1.6, Not required
		Top side	0.360	0.202	0.562	ΣSAR<1.6, Not required
4	5 GHz WLAN Main + BT	Bottom side	0.011	0.008	0.019	ΣSAR<1.6, Not required
		Right side	0.008	0.110	0.118	ΣSAR<1.6, Not required
		Left side	0.258	0.006	0.264	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sas.com



Page: 58 of 96

HONG-BO

2.4 GHz WI AN MIMO

	SIIZ WEAR WIIIVIO					
No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0.438	0.603	1.041	ΣSAR<1.6, Not required
		Top side	0.460	0.636	1.096	ΣSAR<1.6, Not required
1	2.4 GHz WLAN Main + WLAN Aux	Bottom side	0.009	0.015	0.024	ΣSAR<1.6, Not required
		Right side	0.007	0.291	0.298	ΣSAR<1.6, Not required
		Left side	0.257	0.013	0.270	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 59 of 96

5 GHz WLAN MIMO

<u></u>	OTIZ WEAR WINDO							
No.	Conditions	Position	Max. WLAN Main	Max. WLAN Aux	SAR Sum	SPLSR		
		Back side	0.765	0.587	1.352	ΣSAR<1.6, Not required		
		Top side	1.082	0.594	1.676	Analyzed as below		
2	5 GHz WLAN Main + WLAN Aux	Bottom side	0.027	0.014	0.041	ΣSAR<1.6, Not required		
		Right side	0.022	0.279	0.301	ΣSAR<1.6, Not required		
		Left side	0.494	0.011	0.505	ΣSAR<1.6, Not required		

5 GHz WLAN MIMO

	Conditions Position SAR Value (W/kg) X y z	Peak Location Separation	SPLSR	Simultaneous Transmission						
			(W/kg)	х	у	Z	(vv/kg)	Distance (mm)		SAR Test
	WLAN Main	Top side	1.082	-0.96	-0.06	-0.18	1.676	74.63	0.029	SPLSR<0.04,
	WLAN Aux	Top side	0.594	-1.10	7.40	-0.13	1.070	74.03	0.029	Not required

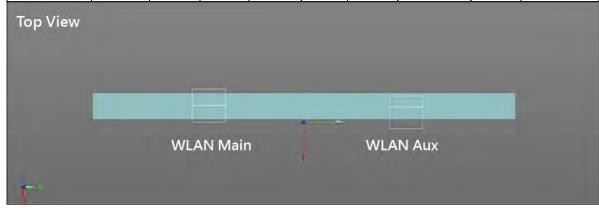

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 60 of 96

BT+ 2.4GHz WLAN Main

<u>=</u>	ZITOTIZ WZAN MIGHT								
No.	Conditions	Position	Max. WLAN Main	ВТ	SAR Sum	SPLSR			
		Back side	0.438	0.244	0.682	ΣSAR<1.6, Not required			
		Top side	0.460	0.252	0.712	ΣSAR<1.6, Not required			
3	2.4 GHz WLAN Main + BT	Bottom side	0.009	0.006	0.015	ΣSAR<1.6, Not required			
		Right side	0.007	0.153	0.160	ΣSAR<1.6, Not required			
		Left side	0.257	0.004	0.261	ΣSAR<1.6, Not required			

BT+ 5GHz WLAN Main

No.	Conditions	Position	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0.765	0.244	1.009	ΣSAR<1.6, Not required
		Top side	1.082	0.252	1.334	ΣSAR<1.6, Not required
4	5 GHz WLAN Main + BT	Bottom side	0.027	0.006	0.033	ΣSAR<1.6, Not required
		Right side	0.022	0.153	0.175	ΣSAR<1.6, Not required
		Left side	0.494	0.004	0.498	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 61 of 96

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	3938	Oct.24,2018	Oct.23,2019
SPEAG	System Validation	D2450V2	727	Apr.24,2018	Apr.23,2019
OI LAG	Dipole	D5GHzV2	1023	Jan.25,2018	Jan.24,2019
SPEAG	Data acquisition Electronics	DAE4	1336	Aug.06,2018	Aug.05,2019
SPEAG	Software	DASY 52 52.8.8	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
Agilent	Network Analyzer	E5071C	MY46107530	Feb.26,2018	Feb.25,2019
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional	772D	MY52180142	Jul.04,2018	Jul.03,2019
Agilont	coupler	778D	MY52180302	Jul.05,2018	Jul.04,2019
Agilent	Signal Generator	N5181A	MY50144143	Mar.15,2018	Mar.14,2019
Agilent	Power Meter	E4417A	MY52240003	Feb.01,2018	Jan.31,2019
Agilopt	Dower Sensor	E9301H	MY52200003	Feb.01,2018	Jan.31,2019
Aglient	Agilent Power Sensor	EASOIL	MY52200004	Feb.01,2018	Jan.31,2019
Changzhou Xinwang	Digital thermometer	PT1	EC14011603	Jul.06,2018	Jul.05,2019
TECPEL	Digital thermometer	DTM-303A	TP130077	Mar.09,2018	Mar.08,2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 62 of 96

5. Measurements

Date: 2019/1/15

WLAN 802.11b Body Top side CH 1 Main 0mm

Communication System: WLAN 2.45G; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz; $\sigma = 1.929$ S/m; $\varepsilon_r = 53.689$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.699 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.620 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

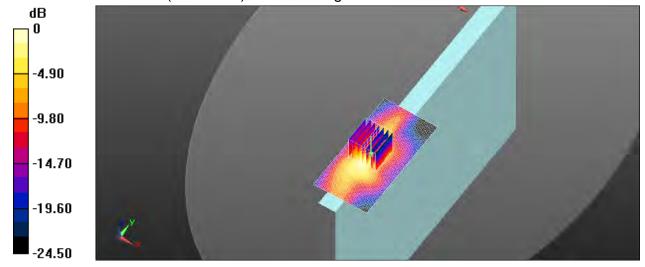

0 dB = 0.716 W/kg = -1.45 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 63 of 96

Date: 2019/1/15

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_Main_0mm

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 5.187 \text{ S/m}$; $\varepsilon_r = 49.186$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.327 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.413 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

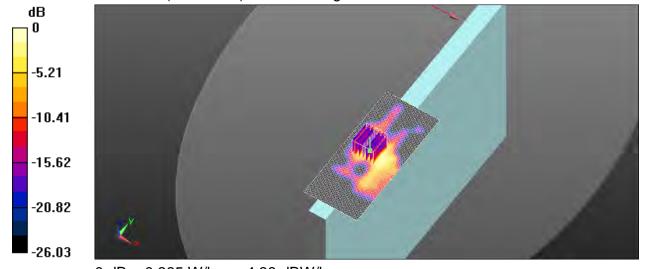

0 dB = 0.365 W/kg = -4.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 64 of 96

Date: 2019/1/16

WLAN 802.11ac(80M) 5.3G_Body_Top side_CH 58_Main_0mm

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5290 MHz; $\sigma = 5.346 \text{ S/m}$; $\varepsilon_r = 48.949$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 22.1°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.243 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.347 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.216 W/kg

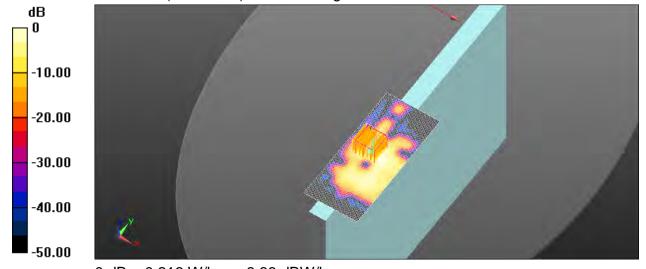

0 dB = 0.216 W/kg = -6.66 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 65 of 96

Date: 2019/1/17

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_Main_0mm

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz; $\sigma = 6$ S/m; $\epsilon_r = 47.693$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.426 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.784 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.582 W/kg

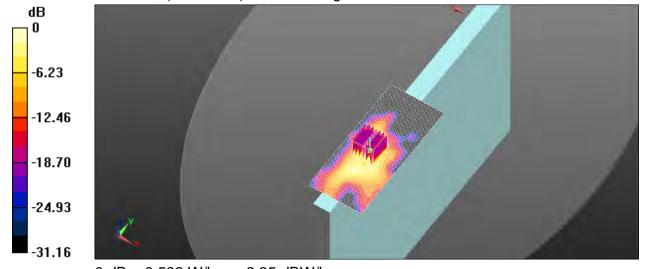

0 dB = 0.582 W/kg = -2.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall fillings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 66 of 96

Date: 2019/1/18

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_Main_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.129$ S/m; $\varepsilon_r = 47.395$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 22.0°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.627 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.841 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

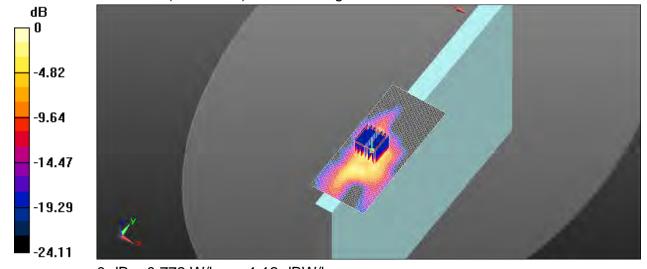

0 dB = 0.772 W/kg = -1.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 67 of 96

Date: 2019/1/15

WLAN 802.11b_Body_Top side_CH 1_Aux_0mm

Communication System: WLAN 2.45G; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz; $\sigma = 1.929$ S/m; $\varepsilon_r = 53.689$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.925 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.142 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

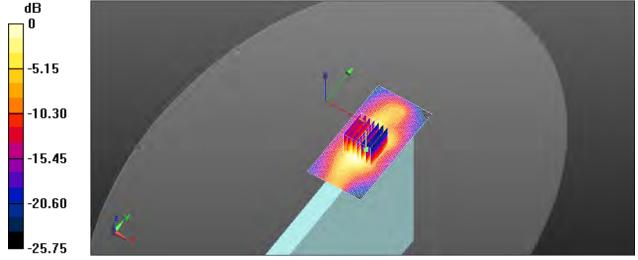

0 dB = 0.811 W/kg = -0.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 68 of 96

Date: 2019/1/15

Bluetooth(GFSK)_Body_Top side_CH 78_Aux_0mm

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2480 MHz; $\sigma = 2.011 \text{ S/m}$; $\varepsilon_r = 53.513$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.181 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.101 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

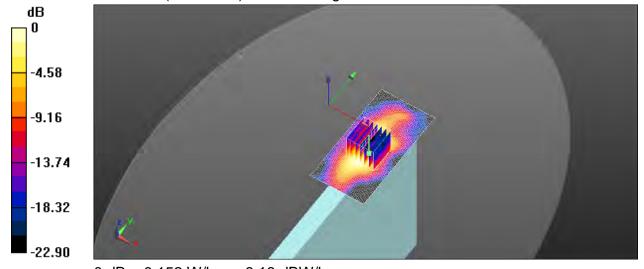

0 dB = 0.152 W/kg = -8.18 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 69 of 96

Date: 2019/1/15

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_Aux_0mm

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 5.187 \text{ S/m}$; $\varepsilon_r = 49.186$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.36 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.518 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

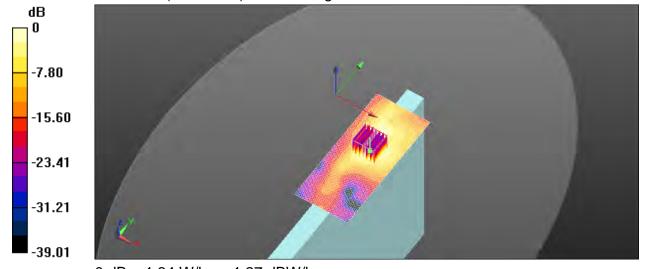

0 dB = 1.34 W/kg = 1.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall fillings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 70 of 96

Date: 2019/1/16

WLAN 802.11ac(80M) 5.3G_Body_Top side_CH 58_Aux_0mm

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5290 MHz; $\sigma = 5.346 \text{ S/m}$; $\varepsilon_r = 48.949$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 22.1°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.26 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.543 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

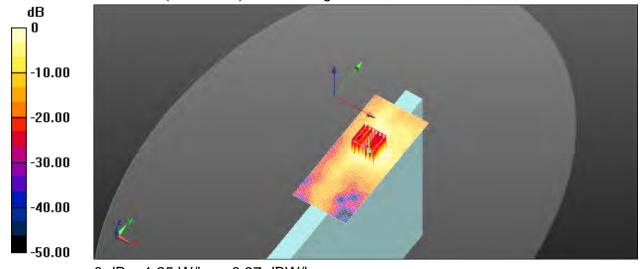

0 dB = 1.25 W/kg = 0.97 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall fillings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 71 of 96

Date: 2019/1/17

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_Aux_0mm

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz; $\sigma = 6 \text{ S/m}$; $\varepsilon_r = 47.693$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.96 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.341 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.19 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

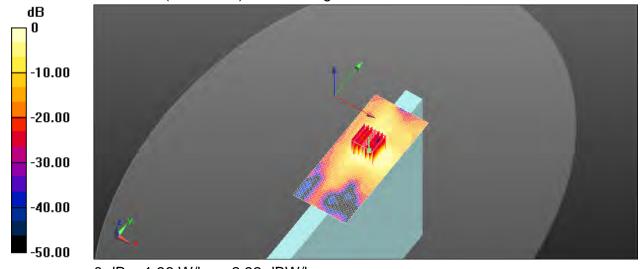

0 dB = 1.96 W/kg = 2.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 72 of 96

Date: 2019/1/18

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_Aux_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.129$ S/m; $\varepsilon_r = 47.395$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 22.0°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.80 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.412 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.73 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.74 W/kg

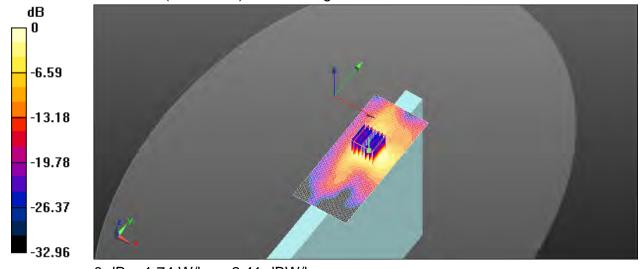

0 dB = 1.74 W/kg = 2.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 73 of 96

Date: 2019/1/2

WLAN 802.11b_Body_Top side_CH 1_Main_0mm

Communication System: WLAN 2.45G; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz; $\sigma = 1.923$ S/m; $\varepsilon_r = 54.086$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 22.1°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.647 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.215 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.660 W/kg

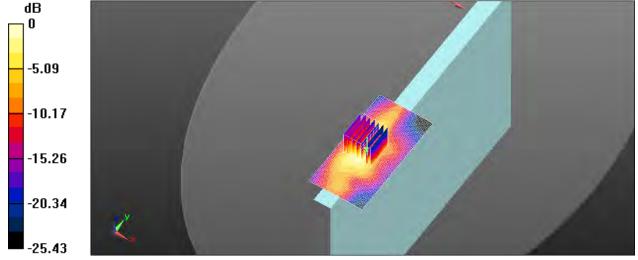

0 dB = 0.660 W/kg = -1.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 74 of 96

Date: 2019/1/2

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_Main_0mm

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 5.17$ S/m; $\varepsilon_r = 49.379$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.36 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.095 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

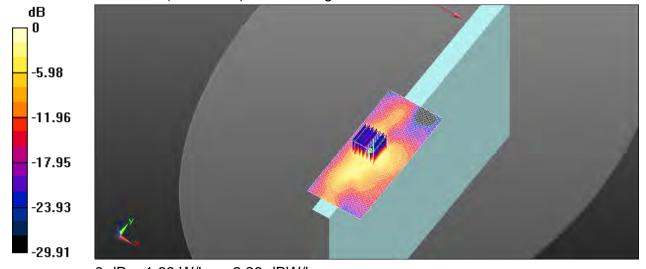

0 dB = 1.69 W/kg = 2.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 75 of 96

Date: 2019/1/3

WLAN 802.11ac(80M) 5.3G_Body_Top side_CH 58_Main_0mm

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5290 MHz; $\sigma = 5.314 \text{ S/m}$; $\varepsilon_r = 49.119$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.523 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

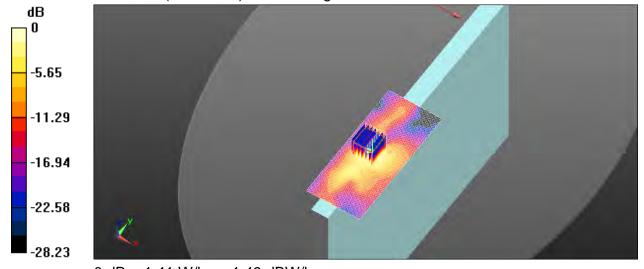

0 dB = 1.41 W/kg = 1.49 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 76 of 96

Date: 2019/1/5

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_Main_0mm

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; $\sigma = 5.976 \text{ S/m}$; $\varepsilon_r = 47.835$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.85 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.832 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 5.03 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 2.19 W/kg

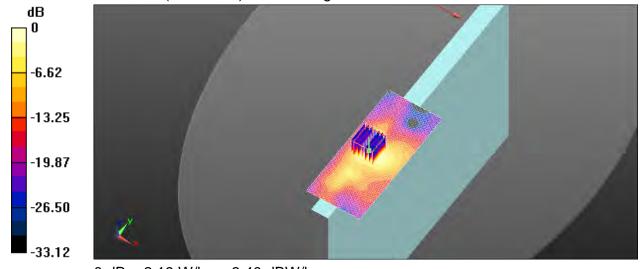

0 dB = 2.19 W/kg = 3.40 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 77 of 96

Date: 2019/1/6

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_Main_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.107$ S/m; $\varepsilon_r = 47.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.83 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.524 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 5.07 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 2.18 W/kg

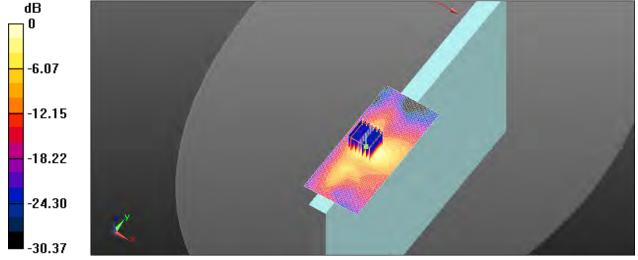

0 dB = 2.18 W/kg = 3.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 78 of 96

Date: 2019/1/2

WLAN 802.11b_Body_Top side_CH 1_Aux_0mm

Communication System: WLAN 2.45G; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz; $\sigma = 1.923$ S/m; $\varepsilon_r = 54.086$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 22.1°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.025 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.279 W/kg

Maximum value of SAR (measured) = 0.922 W/kg

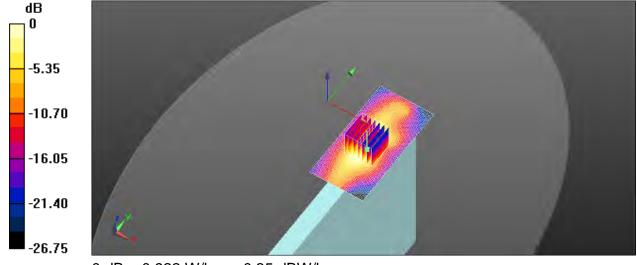

0 dB = 0.922 W/kg = -0.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 79 of 96

Date: 2019/1/2

Bluetooth(GFSK)_Body_Top side_CH 78_Aux_0mm

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2480 MHz; $\sigma = 2.016 \text{ S/m}$; $\varepsilon_r = 53.88$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 22.1°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.214 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.167 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

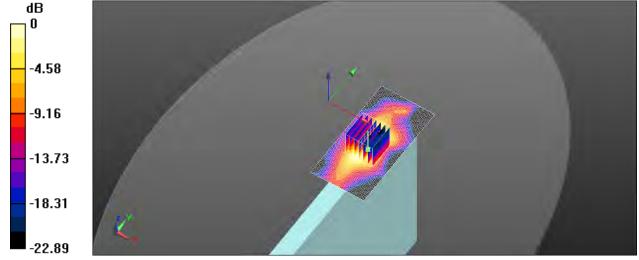

0 dB = 0.192 W/kg = -7.17 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 80 of 96

Date: 2019/1/2

WLAN 802.11ac(80M) 5.2G_Body_Top side_CH 42_Aux_0mm

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 5.17 \text{ S/m}$; $\epsilon_r = 49.379$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.731 V/m: Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.961 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.731 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.878 W/kg

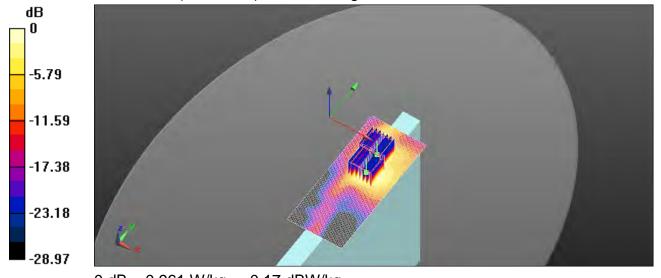

0 dB = 0.961 W/kq = -0.17 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 81 of 96

Date: 2019/1/3

WLAN 802.11ac(80M) 5.3G_Body_Top side_CH 58_Aux_0mm

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5290 MHz; $\sigma = 5.314 \text{ S/m}$; $\varepsilon_r = 49.119$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.906 V/m: Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.989 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.906 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.856 W/kg

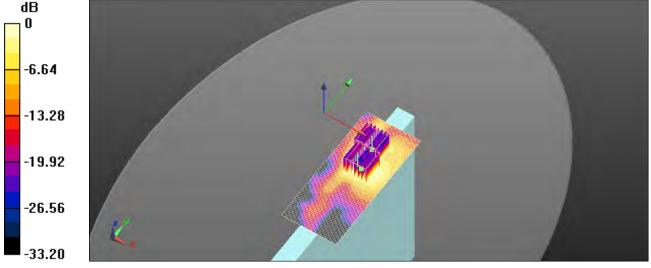

0 dB = 0.989 W/kq = -0.05 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 82 of 96

Date: 2019/1/5

WLAN 802.11ac(80M) 5.6G_Body_Top side_CH 138_Aux_0mm

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; $\sigma = 5.976 \text{ S/m}$; $\varepsilon_r = 47.835$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.665 V/m: Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

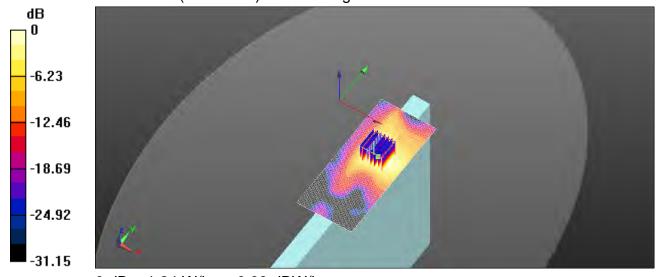

0 dB = 1.24 W/kg = 0.93 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, or fall findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 83 of 96

Date: 2019/1/6

WLAN 802.11ac(80M) 5.8G_Body_Top side_CH 155_Aux_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 6.107$ S/m; $\varepsilon_r = 47.57$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.43 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.125 V/m: Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

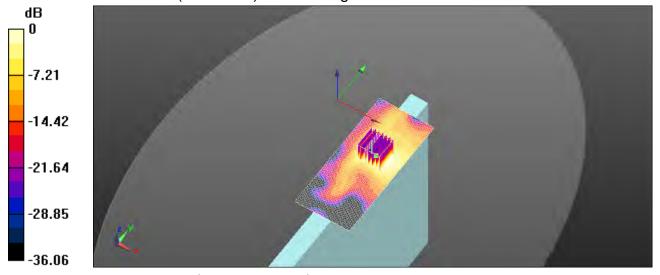

0 dB = 1.29 W/kg = 1.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 84 of 96

6. SAR System Performance Verification

Date: 2019/1/15

Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.981 \text{ S/m}$; $\epsilon_r = 53.538$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.8 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 97.87 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.28 W/kg Maximum value of SAR (measured) = 19.7 W/kg

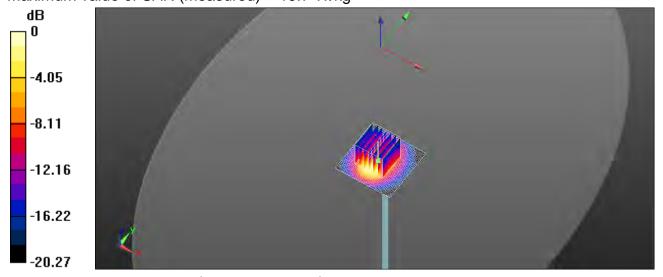

0 dB = 19.7 W/kg = 12.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報告結果僅與10天。木報告表經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 85 of 96

Date: 2019/1/2

Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.984 \text{ S/m}$; $\epsilon_r = 53.98$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 22.1°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.3, 7.3, 7.3);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 95.63 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 26.6 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.84 W/kg Maximum value of SAR (measured) = 19.7 W/kg

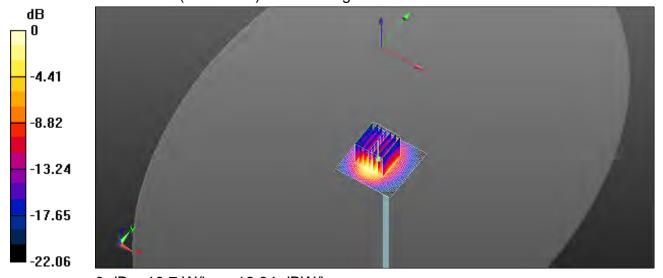

0 dB = 19.7 W/kg = 12.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報告結果僅與10天。木報告表經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 86 of 96

Date: 2019/1/15

Dipole 5200 MHz_SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 5.18 \text{ S/m}$; $\varepsilon_r = 49.236$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 15.3 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.45 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 7.37 W/kg; SAR(10 g) = 2.03 W/kgMaximum value of SAR (measured) = 15.7 W/kg

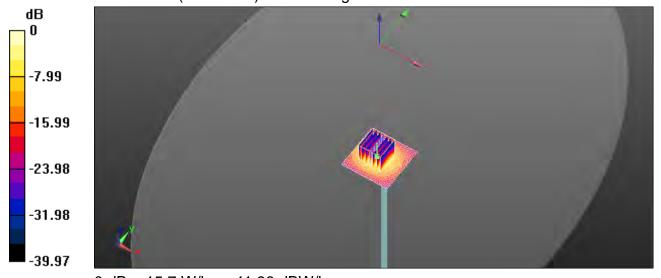

0 dB = 15.7 W/kg = 11.96 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 87 of 96

Date: 2019/1/2

Dipole 5200 MHz_SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 5.164 \text{ S/m}$; $\epsilon_r = 49.443$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 15.1 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.02 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 7.26 W/kg; SAR(10 g) = 2.04 W/kg Maximum value of SAR (measured) = 15.2 W/kg

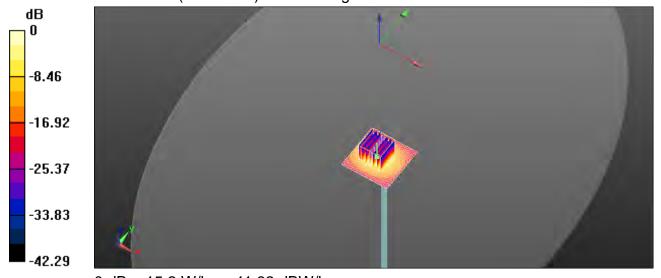

0 dB = 15.2 W/kg = 11.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 88 of 96

Date: 2019/1/16

Dipole 5300 MHz_SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 5.349 \text{ S/m}$; $\varepsilon_r = 48.947$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 22.1°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 16.2 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.89 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 35.2 W/kg

SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.09 W/kg Maximum value of SAR (measured) = 16.3 W/kg

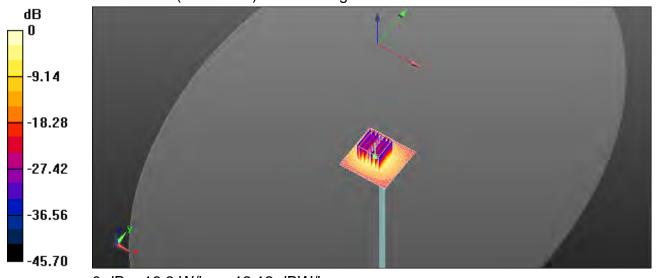

0 dB = 16.3 W/kg = 12.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里做影响就之缘是台書,同時什樣是做保留00千。木都华未领太公司事而纯可,不可部份海喇。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 89 of 96

Date: 2019/1/3

Dipole 5300 MHz_SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 5.332 \text{ S/m}$; $\epsilon_r = 49.113$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.23, 4.23, 4.23);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 16.1 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.54 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.08 W/kg Maximum value of SAR (measured) = 16.1 W/kg

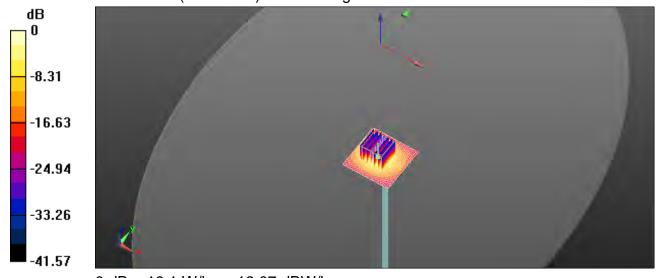

0 dB = 16.1 W/kg = 12.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 90 of 96

Date: 2019/1/17

Dipole 5600 MHz SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.838 \text{ S/m}$; $\epsilon_r = 48.007$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 17.7 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.29 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 39.6 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.22 W/kgMaximum value of SAR (measured) = 17.7 W/kg

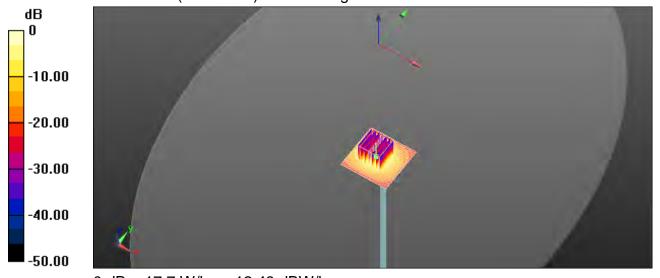

0 dB = 17.7 W/kg = 12.48 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 91 of 96

Date: 2019/1/5

Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.82 \text{ S/m}$; $\varepsilon_r = 48.165$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.9°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(3.77, 3.77, 3.77);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 17.5 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.12 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 39.2 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.2 W/kgMaximum value of SAR (measured) = 17.4 W/kg

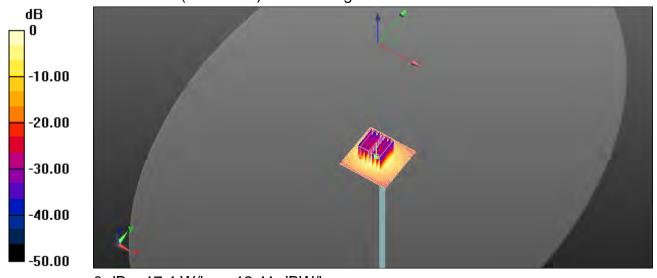

0 dB = 17.4 W/kg = 12.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報告結果僅享到關於了樣品負責,同時什樣品僅是留何天。木報告未經木公司惠面許可,不可部份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 92 of 96

Date: 2019/1/18

Dipole 5800 MHz_SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 6.169 \text{ S/m}$; $\varepsilon_r = 47.329$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.8°C; Liquid temperature: 22.0°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 16.5 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 54.81 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 38.4 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.13 W/kg Maximum value of SAR (measured) = 16.9 W/kg

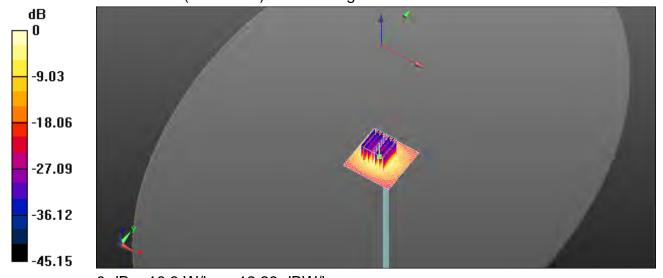

0 dB = 16.9 W/kg = 12.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms_and_conditions.htm and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 93 of 96

Date: 2019/1/6

Dipole 5800 MHz SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 6.148 \text{ S/m}$; $\varepsilon_r = 47.504$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4, 4, 4);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: ELI

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 16.5 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 54.81 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 38.3 W/kg

SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.12 W/kgMaximum value of SAR (measured) = 16.8 W/kg

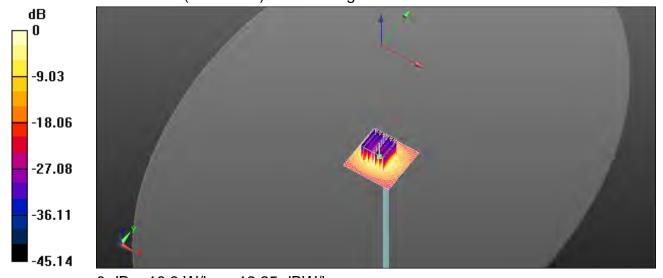

0 dB = 16.8 W/kg = 12.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 94 of 96

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
	Tolerance/	Probability		5: 1/ 1			Standard	Standard	
Source of Uncertainty	Uncertainty	Distributio	Div	Div Value	ci (1g)	ci (10g)	uncertainty	uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	oc
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	8
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	80
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	00
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	1.81%	N	1	1	0.64	0.43	1.16%	0.78%	М
Liquid Conductivity (mea.)	2.85%	N	1	1	0.6	0.49	1.71%	1.40%	М
Combined standard uncertainty		RSS					11.90%	11.82%	
Expant uncertainty (95% confidence interval), K=2							23.79%	23.63%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page: 95 of 96

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.53%	N	1	1	0.64	0.43	1.62%	1.09%	М
Liquid Conductivity (mea.)	1.59%	N	1	1	0.6	0.49	0.95%	0.78%	М
Combined standard uncertainty		RSS					11.57%	11.49%	
Expant uncertainty (95% confidence interval), K=2			-				23.14%	22.97%	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 96 of 96

Appendixes

Refer to separated files for the following appendixes.

EN2018C0015 SAR_Appendix A Photographs

EN2018C0015 SAR_Appendix B DAE & Probe Cal. Certificate

EN2018C0015 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华红用摄影测述之龄只有含,同时此类只是是2000年。大数华土德大公司事而纯可,不可如公准制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號