

# FCC SAR TEST REPORT

FCC ID : B94-MT7922A22MM  
Equipment : 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card  
Brand Name : MediaTek  
Model Name : MT7922A22M  
Applicant : HP Inc.  
3390 East Harmony Road, Fort Collins Colorado,  
USA 80528  
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Notebook PC (Brand Name: HP, Model Name: TPN-W150) during test.

The product was received on Nov. 16, 2021 and testing was started from Nov. 16, 2021 and completed on Nov. 23, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



**Sporton International Inc. EMC & Wireless Communications Laboratory**  
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



**Table of Contents**

**1. Statement of Compliance ..... 4**

**2. Guidance Applied..... 4**

**3. Equipment Under Test (EUT) Information ..... 5**

    3.1 General Information ..... 5

    3.2 Sensor Triggering angle and power verification ..... 6

**4. RF Exposure Limits.....13**

    4.1 Uncontrolled Environment.....13

    4.2 Controlled Environment.....13

    4.3 RF Exposure limit for above 6GHz.....14

**5. Specific Absorption Rate (SAR).....15**

    5.1 Introduction .....15

    5.2 SAR Definition.....15

**6. System Description and Setup .....16**

    6.1 Test Site Location.....16

    6.2 E-Field Probe .....17

    6.3 Data Acquisition Electronics (DAE) .....17

    6.4 Phantom.....18

    6.5 Device Holder.....19

**7. Measurement Procedures .....20**

    7.1 Spatial Peak SAR Evaluation.....20

    7.2 Power Reference Measurement.....21

    7.3 Area Scan .....21

    7.4 Zoom Scan.....22

    7.5 Volume Scan Procedures.....22

    7.6 Power Drift Monitoring.....22

**8. Test Equipment List.....23**

**9. System Verification .....24**

    9.1 Tissue Verification .....24

    9.2 System Performance Check Results.....24

    9.3 PD System Performance Check Results.....25

**10. WiFi/Bluetooth Output Power (Unit: dBm) .....26**

**11. Antenna Location .....38**

**12. SAR Test Results .....41**

    12.1 Body SAR .....42

**13. Simultaneous Transmission Analysis.....44**

    13.1 Body Exposure Conditions .....44

**14. Uncertainty Assessment .....45**

**15. References .....48**

**Appendix A. Plots of SAR System Performance Check**

**Appendix B. Plots of PD System Performance Check**

**Appendix C. Plots of High SAR Measurement**

**Appendix D. Plots of High PD Measurement**

**Appendix E. DASYS Calibration Certificate**

**Appendix F. Test Setup Photos**





### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HP Inc., 2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card, MT7922A22M, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
			Body (Separation 0mm)		
			1g SAR (W/kg)		
DTS	WLAN	2.4GHz WLAN	0.37		0.45
NII		5GHz WLAN	0.42		
6XD		6GHz WLAN	0.13		
DSS	2.4GHz Band	Bluetooth	0.09		0.50
Date of Testing:			2021/11/17		

Equipment Class	Frequency Band		Reported SAR	APD	Reported PD
			Body 1g SAR (W/kg)	Body (W/m^2)	Body (W/m^2)
6XD	WLAN	6GHz WLAN	0.13	0.75	3.24
Date of Testing:			2021/11/16 ~ 2021/11/23		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No.TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) and power density for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm<sup>2</sup>=10 W/m<sup>2</sup>) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

**Reviewed by: Jason Wang**  
**Report Producer: Paula Chen**

### 2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	2TX 11ax (WiFi6E) BW160 + BT/BLE Combo Card
Brand Name	MediaTek
Model Name	MT7922A22M
FCC ID	B94-MT7922A22MM
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
<b>Remark:</b>	
1. This device has two antenna vendors, RF exposure evaluation selects WNC as the main test, and High-Tek spot check worst case found in WNC.	

Host Information	
Equipment Name	Notebook PC
Brand Name	HP
Model Name	TPN-W150
EUT Stage	Production Unit

Antenna Information (Laptop mode)									
1	Ant. Type	PIFA	connector	High-Tek	2	Ant. Type	PIFA	connector	High-Tek
	Model No.	025.901S3.0031 (0ACAR020015N)				Model No.	025.901S3.0021 (0ACAR020014N)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	-1.63	5470~5725MHz	-2.39		2400~2483.5MHz	-3.28	5470~5725MHz	-2.25
	5150~5250MHz	-0.9	5725~5850MHz	-3.49		5150~5250MHz	-2.87	5725~5850MHz	-0.5
5250~5350MHz	-1.19	5925~7125MHz	2.63	5250~5350MHz	-2.83	5925~7125MHz	0.26		
1	Ant. Type	PIFA	connector	WNC	2	Ant. Type	PIFA	connector	WNC
	Model No.	025.901S3.0011 (81EABD15.G36)				Model No.	025.901S3.0001 (81EABD15.G35)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	1.63	5470~5725MHz	-0.06		2400~2483.5MHz	1	5470~5725MHz	0.8
	5150~5250MHz	0.95	5725~5850MHz	0.09		5150~5250MHz	2.04	5725~5850MHz	0.8
5250~5350MHz	0.95	5925~7125MHz	0.4	5250~5350MHz	2.03	5925~7125MHz	2.32		

Antenna Information (Tablet mode)									
1	Ant. Type	PIFA	connector	High-Tek	2	Ant. Type	PIFA	connector	High-Tek
	Model No.	025.901S3.0031 (0ACAR020015N)				Model No.	025.901S3.0021 (0ACAR020014N)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	-3.95	5470~5725MHz	-3.05		2400~2483.5MHz	-2.69	5470~5725MHz	-2.37
	5150~5250MHz	-2.67	5725~5850MHz	-2.8		5150~5250MHz	-1.39	5725~5850MHz	-0.45
5250~5350MHz	-3.04	5925~7125MHz	3.27	5250~5350MHz	-2.64	5925~7125MHz	0.87		
1	Ant. Type	PIFA	connector	WNC	2	Ant. Type	PIFA	connector	WNC
	Model No.	025.901S3.0011 (81EABD15.G36)				Model No.	025.901S3.0001 (81EABD15.G35)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	1.73	5470~5725MHz	1.99		2400~2483.5MHz	0.23	5470~5725MHz	1.69
	5150~5250MHz	-0.2	5725~5850MHz	1.99		5150~5250MHz	1.88	5725~5850MHz	1.69
5250~5350MHz	1.84	5925~7125MHz	2.21	5250~5350MHz	1.94	5925~7125MHz	1.7		



**3.2 Sensor Triggering angle and power verification**

**General Note:**

- The following guidance should be applied to laptops/tablets that use Hall Effect or gravity sensors to detect lid angle for the purpose of power reduction:

- Step 1: With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained
- Step 2: Lower the screen 5 degrees. Closed mode should be reobtained. If not keep lowering in 5 degree steps
- Step 3: Open the screen in 1 degree steps until laptop mode is reobtained
- Step 4: Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained
- Step 5: Then continue opening the screen in 10 degree steps until tablet mode is obtained
- Step 6: Power measurements should be taken at each step
- Step 7: Reverse this procedure going from tablet mode back down to closed mode

when the screen angle is from 0 degree to 360 degree								
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1+2					
	Band		2.4GHz WLAN	5.2GHz WLAN	5.3GHz WLAN	5.5GHz WLAN	5.8GHz WLAN	6GHz WLAN
Lid Close	0		standby	standby	standby	standby	standby	standby
	10		standby	standby	standby	standby	standby	standby
	20		standby	standby	standby	standby	standby	standby
	30		standby	standby	standby	standby	standby	standby
	31		standby	standby	standby	standby	standby	standby
	32		standby	standby	standby	standby	standby	standby
	33		standby	standby	standby	standby	standby	standby
Laptop	34		standby	standby	standby	standby	standby	standby
	35		23.0	22.5	22.5	22.5	24.0	12.5
	36		23.0	22.5	22.5	22.5	24.0	12.5
	37		23.0	22.5	22.5	22.5	24.0	12.5
	38		23.0	22.5	22.5	22.5	24.0	12.5
	39		23.0	22.5	22.5	22.5	24.0	12.5
	40		23.0	22.5	22.5	22.5	24.0	12.5
	50		23.0	22.5	22.5	22.5	24.0	12.5
	60		23.0	22.5	22.5	22.5	24.0	12.5
	70		23.0	22.5	22.5	22.5	24.0	12.5
	80		23.0	22.5	22.5	22.5	24.0	12.5
	90		23.0	22.5	22.5	22.5	24.0	12.5
	100		23.0	22.5	22.5	22.5	24.0	12.5
	110		23.0	22.5	22.5	22.5	24.0	12.5
	120		23.0	22.5	22.5	22.5	24.0	12.5
	125		23.0	22.5	22.5	22.5	24.0	12.5
Tablet	126		23.0	22.5	22.5	22.5	24.0	12.5
	127		23.0	22.5	22.5	22.5	24.0	12.5
	128		23.0	22.5	22.5	22.5	24.0	12.5
	129		23.0	22.5	22.5	22.5	24.0	12.5
	130		18.5	18.0	18.0	17.5	17.0	12.5
	131		18.5	18.0	18.0	17.5	17.0	12.5
	132		18.5	18.0	18.0	17.5	17.0	12.5
	133		18.5	18.0	18.0	17.5	17.0	12.5
	134		18.5	18.0	18.0	17.5	17.0	12.5
	135		18.5	18.0	18.0	17.5	17.0	12.5
	140		18.5	18.0	18.0	17.5	17.0	12.5
	150		18.5	18.0	18.0	17.5	17.0	12.5
	160		18.5	18.0	18.0	17.5	17.0	12.5
	170		18.5	18.0	18.0	17.5	17.0	12.5
180		18.5	18.0	18.0	17.5	17.0	12.5	
190		18.5	18.0	18.0	17.5	17.0	12.5	
200		18.5	18.0	18.0	17.5	17.0	12.5	
210		18.5	18.0	18.0	17.5	17.0	12.5	
220		18.5	18.0	18.0	17.5	17.0	12.5	
230		18.5	18.0	18.0	17.5	17.0	12.5	



		240	18.5	18.0	18.0	17.5	17.0	12.5
		250	18.5	18.0	18.0	17.5	17.0	12.5
		260	18.5	18.0	18.0	17.5	17.0	12.5
		270	18.5	18.0	18.0	17.5	17.0	12.5
		280	18.5	18.0	18.0	17.5	17.0	12.5
		290	18.5	18.0	18.0	17.5	17.0	12.5
		300	18.5	18.0	18.0	17.5	17.0	12.5
		310	18.5	18.0	18.0	17.5	17.0	12.5
		320	18.5	18.0	18.0	17.5	17.0	12.5
		330	18.5	18.0	18.0	17.5	17.0	12.5
		340	18.5	18.0	18.0	17.5	17.0	12.5
		350	18.5	18.0	18.0	17.5	17.0	12.5
	360	18.5	18.0	18.0	17.5	17.0	12.5	
	Tablet	195	18.5	18.0	18.0	17.5	17.0	12.5
		196	18.5	18.0	18.0	17.5	17.0	12.5
		197	18.5	18.0	18.0	17.5	17.0	12.5
		198	18.5	18.0	18.0	17.5	17.0	12.5
		199	18.5	18.0	18.0	17.5	17.0	12.5
		200	18.5	18.0	18.0	17.5	17.0	12.5
	Stand mode (Screen orientation is set to 0° and base is horizontal)	201	23.0	22.5	22.5	22.5	24.0	12.5
		202	23.0	22.5	22.5	22.5	24.0	12.5
		203	23.0	22.5	22.5	22.5	24.0	12.5
		204	23.0	22.5	22.5	22.5	24.0	12.5
		205	23.0	22.5	22.5	22.5	24.0	12.5
		210	23.0	22.5	22.5	22.5	24.0	12.5
		220	23.0	22.5	22.5	22.5	24.0	12.5
		230	23.0	22.5	22.5	22.5	24.0	12.5
		240	23.0	22.5	22.5	22.5	24.0	12.5
		250	23.0	22.5	22.5	22.5	24.0	12.5
		260	23.0	22.5	22.5	22.5	24.0	12.5
		270	23.0	22.5	22.5	22.5	24.0	12.5
		280	23.0	22.5	22.5	22.5	24.0	12.5
		290	23.0	22.5	22.5	22.5	24.0	12.5
		300	23.0	22.5	22.5	22.5	24.0	12.5
		310	23.0	22.5	22.5	22.5	24.0	12.5
		320	23.0	22.5	22.5	22.5	24.0	12.5
		330	23.0	22.5	22.5	22.5	24.0	12.5
		335	23.0	22.5	22.5	22.5	24.0	12.5
		336	23.0	22.5	22.5	22.5	24.0	12.5
	337	23.0	22.5	22.5	22.5	24.0	12.5	
	338	23.0	22.5	22.5	22.5	24.0	12.5	
	339	23.0	22.5	22.5	22.5	24.0	12.5	
	340	23.0	22.5	22.5	22.5	24.0	12.5	
	Tablet	341	18.5	18.0	18.0	17.5	17.0	12.5
		342	18.5	18.0	18.0	17.5	17.0	12.5
343		18.5	18.0	18.0	17.5	17.0	12.5	
344		18.5	18.0	18.0	17.5	17.0	12.5	
345		18.5	18.0	18.0	17.5	17.0	12.5	
350		18.5	18.0	18.0	17.5	17.0	12.5	
360	18.5	18.0	18.0	17.5	17.0	12.5		
Tablet	195	18.5	18.0	18.0	17.5	17.0	12.5	
	196	18.5	18.0	18.0	17.5	17.0	12.5	
	197	18.5	18.0	18.0	17.5	17.0	12.5	
	198	18.5	18.0	18.0	17.5	17.0	12.5	
	199	18.5	18.0	18.0	17.5	17.0	12.5	
Tent mode (Screen orientation is	200	18.5	18.0	18.0	17.5	17.0	12.5	
	201	18.5	18.0	18.0	17.5	17.0	12.5	
	202	18.5	18.0	18.0	17.5	17.0	12.5	
		203	18.5	18.0	18.0	17.5	17.0	12.5



**FCC SAR TEST REPORT**

**Report No. : FA193031**

set to 180° and base is not horizontal)	204	18.5	18.0	18.0	17.5	17.0	12.5	
	205	18.5	18.0	18.0	17.5	17.0	12.5	
	210	18.5	18.0	18.0	17.5	17.0	12.5	
	220	18.5	18.0	18.0	17.5	17.0	12.5	
	230	18.5	18.0	18.0	17.5	17.0	12.5	
	240	18.5	18.0	18.0	17.5	17.0	12.5	
	250	18.5	18.0	18.0	17.5	17.0	12.5	
	260	18.5	18.0	18.0	17.5	17.0	12.5	
	270	18.5	18.0	18.0	17.5	17.0	12.5	
	280	18.5	18.0	18.0	17.5	17.0	12.5	
	290	18.5	18.0	18.0	17.5	17.0	12.5	
	300	18.5	18.0	18.0	17.5	17.0	12.5	
	310	18.5	18.0	18.0	17.5	17.0	12.5	
	320	18.5	18.0	18.0	17.5	17.0	12.5	
	330	18.5	18.0	18.0	17.5	17.0	12.5	
	335	18.5	18.0	18.0	17.5	17.0	12.5	
	336	18.5	18.0	18.0	17.5	17.0	12.5	
	337	18.5	18.0	18.0	17.5	17.0	12.5	
	338	18.5	18.0	18.0	17.5	17.0	12.5	
	339	18.5	18.0	18.0	17.5	17.0	12.5	
	340	18.5	18.0	18.0	17.5	17.0	12.5	
	Tablet	341	18.5	18.0	18.0	17.5	17.0	12.5
		342	18.5	18.0	18.0	17.5	17.0	12.5
		343	18.5	18.0	18.0	17.5	17.0	12.5
		344	18.5	18.0	18.0	17.5	17.0	12.5
		345	18.5	18.0	18.0	17.5	17.0	12.5
		350	18.5	18.0	18.0	17.5	17.0	12.5
	Lid Close	360	18.5	18.0	18.0	17.5	17.0	12.5
		0	standby	standby	standby	standby	standby	standby
		10	standby	standby	standby	standby	standby	standby
		20	standby	standby	standby	standby	standby	standby
		30	standby	standby	standby	standby	standby	standby
		31	standby	standby	standby	standby	standby	standby
		32	standby	standby	standby	standby	standby	standby
		33	standby	standby	standby	standby	standby	standby
	Book (screen orientation is 90° or 270°)	34	standby	standby	standby	standby	standby	standby
35		18.5	18.0	18.0	17.5	17.0	12.5	
36		18.5	18.0	18.0	17.5	17.0	12.5	
37		18.5	18.0	18.0	17.5	17.0	12.5	
38		18.5	18.0	18.0	17.5	17.0	12.5	
39		18.5	18.0	18.0	17.5	17.0	12.5	
40		18.5	18.0	18.0	17.5	17.0	12.5	
50		18.5	18.0	18.0	17.5	17.0	12.5	
60		18.5	18.0	18.0	17.5	17.0	12.5	
70		18.5	18.0	18.0	17.5	17.0	12.5	
80		18.5	18.0	18.0	17.5	17.0	12.5	
90		18.5	18.0	18.0	17.5	17.0	12.5	
100		18.5	18.0	18.0	17.5	17.0	12.5	
110		18.5	18.0	18.0	17.5	17.0	12.5	
120		18.5	18.0	18.0	17.5	17.0	12.5	
120		18.5	18.0	18.0	17.5	17.0	12.5	
130		18.5	18.0	18.0	17.5	17.0	12.5	
140		18.5	18.0	18.0	17.5	17.0	12.5	
150	18.5	18.0	18.0	17.5	17.0	12.5		
160	18.5	18.0	18.0	17.5	17.0	12.5		
170	18.5	18.0	18.0	17.5	17.0	12.5		
180	18.5	18.0	18.0	17.5	17.0	12.5		
190	18.5	18.0	18.0	17.5	17.0	12.5		
195	18.5	18.0	18.0	17.5	17.0	12.5		





Tablet	196	18.5	18.0	18.0	17.5	17.0	12.5
	197	18.5	18.0	18.0	17.5	17.0	12.5
	198	18.5	18.0	18.0	17.5	17.0	12.5
	199	18.5	18.0	18.0	17.5	17.0	12.5
	200	18.5	18.0	18.0	17.5	17.0	12.5
	201	18.5	18.0	18.0	17.5	17.0	12.5
	202	18.5	18.0	18.0	17.5	17.0	12.5
	203	18.5	18.0	18.0	17.5	17.0	12.5
	204	18.5	18.0	18.0	17.5	17.0	12.5
	205	18.5	18.0	18.0	17.5	17.0	12.5
	210	18.5	18.0	18.0	17.5	17.0	12.5
	220	18.5	18.0	18.0	17.5	17.0	12.5
	230	18.5	18.0	18.0	17.5	17.0	12.5
	240	18.5	18.0	18.0	17.5	17.0	12.5
	250	18.5	18.0	18.0	17.5	17.0	12.5
	260	18.5	18.0	18.0	17.5	17.0	12.5
	270	18.5	18.0	18.0	17.5	17.0	12.5
	280	18.5	18.0	18.0	17.5	17.0	12.5
	290	18.5	18.0	18.0	17.5	17.0	12.5
	300	18.5	18.0	18.0	17.5	17.0	12.5
310	18.5	18.0	18.0	17.5	17.0	12.5	
320	18.5	18.0	18.0	17.5	17.0	12.5	
330	18.5	18.0	18.0	17.5	17.0	12.5	
340	18.5	18.0	18.0	17.5	17.0	12.5	
350	18.5	18.0	18.0	17.5	17.0	12.5	
360	18.5	18.0	18.0	17.5	17.0	12.5	

when the screen angle is from 0 degree to 360 degree							
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1/2				
	Band	2.4GHz WLAN	5.2GHz WLAN	5.3GHz WLAN	5.5GHz WLAN	5.8GHz WLAN	6GHz WLAN
Tablet Mode	360	18.50	18.00	18.00	17.50	17.00	12.50
	350	18.50	18.00	18.00	17.50	17.00	12.50
	340	18.50	18.00	18.00	17.50	17.00	12.50
	330	18.50	18.00	18.00	17.50	17.00	12.50
	320	18.50	18.00	18.00	17.50	17.00	12.50
	310	18.50	18.00	18.00	17.50	17.00	12.50
	300	18.50	18.00	18.00	17.50	17.00	12.50
	290	18.50	18.00	18.00	17.50	17.00	12.50
	280	18.50	18.00	18.00	17.50	17.00	12.50
	270	18.50	18.00	18.00	17.50	17.00	12.50
	260	18.50	18.00	18.00	17.50	17.00	12.50
	250	18.50	18.00	18.00	17.50	17.00	12.50
	240	18.50	18.00	18.00	17.50	17.00	12.50
	230	18.50	18.00	18.00	17.50	17.00	12.50
	220	18.50	18.00	18.00	17.50	17.00	12.50
	210	18.50	18.00	18.00	17.50	17.00	12.50
	200	18.50	18.00	18.00	17.50	17.00	12.50
	190	18.50	18.00	18.00	17.50	17.00	12.50
	180	18.50	18.00	18.00	17.50	17.00	12.50
	170	18.50	18.00	18.00	17.50	17.00	12.50
160	18.50	18.00	18.00	17.50	17.00	12.50	
150	18.50	18.00	18.00	17.50	17.00	12.50	
140	18.50	18.00	18.00	17.50	17.00	12.50	
135	18.50	18.00	18.00	17.50	17.00	12.50	
134	18.50	18.00	18.00	17.50	17.00	12.50	
133	18.50	18.00	18.00	17.50	17.00	12.50	
132	18.50	18.00	18.00	17.50	17.00	12.50	
131	18.50	18.00	18.00	17.50	17.00	12.50	



	Notebook	130	18.50	18.00	18.00	17.50	17.00	12.50
		129	23.00	22.50	22.50	22.50	24.00	12.50
		128	23.00	22.50	22.50	22.50	24.00	12.50
		127	23.00	22.50	22.50	22.50	24.00	12.50
		126	23.00	22.50	22.50	22.50	24.00	12.50
		125	23.00	22.50	22.50	22.50	24.00	12.50
		120	23.00	22.50	22.50	22.50	24.00	12.50
		110	23.00	22.50	22.50	22.50	24.00	12.50
		100	23.00	22.50	22.50	22.50	24.00	12.50
		90	23.00	22.50	22.50	22.50	24.00	12.50
		80	23.00	22.50	22.50	22.50	24.00	12.50
		70	23.00	22.50	22.50	22.50	24.00	12.50
		60	23.00	22.50	22.50	22.50	24.00	12.50
		50	23.00	22.50	22.50	22.50	24.00	12.50
		40	23.00	22.50	22.50	22.50	24.00	12.50
		39	23.00	22.50	22.50	22.50	24.00	12.50
		38	23.00	22.50	22.50	22.50	24.00	12.50
		37	23.00	22.50	22.50	22.50	24.00	12.50
	36	23.00	22.50	22.50	22.50	24.00	12.50	
	35	23.00	22.50	22.50	22.50	24.00	12.50	
	Lid Close	34	standby	standby	standby	standby	standby	standby
		33	standby	standby	standby	standby	standby	standby
		32	standby	standby	standby	standby	standby	standby
		31	standby	standby	standby	standby	standby	standby
		30	standby	standby	standby	standby	standby	standby
		20	standby	standby	standby	standby	standby	standby
		10	standby	standby	standby	standby	standby	standby
	0	standby	standby	standby	standby	standby	standby	
	Tablet	360	18.50	18.00	18.00	17.50	17.00	12.50
		350	18.50	18.00	18.00	17.50	17.00	12.50
		345	18.50	18.00	18.00	17.50	17.00	12.50
		344	18.50	18.00	18.00	17.50	17.00	12.50
		343	18.50	18.00	18.00	17.50	17.00	12.50
		342	18.50	18.00	18.00	17.50	17.00	12.50
		341	18.50	18.00	18.00	17.50	17.00	12.50
	Stand mode (Screen orientation is set to 0° and base is horizontal)	340	23.00	22.50	22.50	22.50	24.00	12.50
		339	23.00	22.50	22.50	22.50	24.00	12.50
		338	23.00	22.50	22.50	22.50	24.00	12.50
		337	23.00	22.50	22.50	22.50	24.00	12.50
		336	23.00	22.50	22.50	22.50	24.00	12.50
		335	23.00	22.50	22.50	22.50	24.00	12.50
		330	23.00	22.50	22.50	22.50	24.00	12.50
		320	23.00	22.50	22.50	22.50	24.00	12.50
		310	23.00	22.50	22.50	22.50	24.00	12.50
		300	23.00	22.50	22.50	22.50	24.00	12.50
290		23.00	22.50	22.50	22.50	24.00	12.50	
280		23.00	22.50	22.50	22.50	24.00	12.50	
270		23.00	22.50	22.50	22.50	24.00	12.50	
260		23.00	22.50	22.50	22.50	24.00	12.50	
250		23.00	22.50	22.50	22.50	24.00	12.50	
240		23.00	22.50	22.50	22.50	24.00	12.50	
230		23.00	22.50	22.50	22.50	24.00	12.50	
220	23.00	22.50	22.50	22.50	24.00	12.50		
210	23.00	22.50	22.50	22.50	24.00	12.50		
205	23.00	22.50	22.50	22.50	24.00	12.50		
204	23.00	22.50	22.50	22.50	24.00	12.50		
203	23.00	22.50	22.50	22.50	24.00	12.50		
202	23.00	22.50	22.50	22.50	24.00	12.50		
201	23.00	22.50	22.50	22.50	24.00	12.50		



Tablet	Tablet	200	18.50	18.00	18.00	17.50	17.00	12.50
		199	18.50	18.00	18.00	17.50	17.00	12.50
		198	18.50	18.00	18.00	17.50	17.00	12.50
		197	18.50	18.00	18.00	17.50	17.00	12.50
		196	18.50	18.00	18.00	17.50	17.00	12.50
	195	18.50	18.00	18.00	17.50	17.00	12.50	
	Tablet	360	18.50	18.00	18.00	17.50	17.00	12.50
		350	18.50	18.00	18.00	17.50	17.00	12.50
		345	18.50	18.00	18.00	17.50	17.00	12.50
		344	18.50	18.00	18.00	17.50	17.00	12.50
		343	18.50	18.00	18.00	17.50	17.00	12.50
		342	18.50	18.00	18.00	17.50	17.00	12.50
		341	18.50	18.00	18.00	17.50	17.00	12.50
	Tent mode (Screen orientation is set to 180° and base is not horizontal)	340	18.50	18.00	18.00	17.50	17.00	12.50
		339	18.50	18.00	18.00	17.50	17.00	12.50
		338	18.50	18.00	18.00	17.50	17.00	12.50
		337	18.50	18.00	18.00	17.50	17.00	12.50
		336	18.50	18.00	18.00	17.50	17.00	12.50
		335	18.50	18.00	18.00	17.50	17.00	12.50
		330	18.50	18.00	18.00	17.50	17.00	12.50
		320	18.50	18.00	18.00	17.50	17.00	12.50
		310	18.50	18.00	18.00	17.50	17.00	12.50
		300	18.50	18.00	18.00	17.50	17.00	12.50
		290	18.50	18.00	18.00	17.50	17.00	12.50
		280	18.50	18.00	18.00	17.50	17.00	12.50
		270	18.50	18.00	18.00	17.50	17.00	12.50
		260	18.50	18.00	18.00	17.50	17.00	12.50
		250	18.50	18.00	18.00	17.50	17.00	12.50
		240	18.50	18.00	18.00	17.50	17.00	12.50
		230	18.50	18.00	18.00	17.50	17.00	12.50
		220	18.50	18.00	18.00	17.50	17.00	12.50
		210	18.50	18.00	18.00	17.50	17.00	12.50
		205	18.50	18.00	18.00	17.50	17.00	12.50
	204	18.50	18.00	18.00	17.50	17.00	12.50	
	203	18.50	18.00	18.00	17.50	17.00	12.50	
202	18.50	18.00	18.00	17.50	17.00	12.50		
201	18.50	18.00	18.00	17.50	17.00	12.50		
Tablet	200	18.50	18.00	18.00	17.50	17.00	12.50	
	199	18.50	18.00	18.00	17.50	17.00	12.50	
	198	18.50	18.00	18.00	17.50	17.00	12.50	
	197	18.50	18.00	18.00	17.50	17.00	12.50	
	196	18.50	18.00	18.00	17.50	17.00	12.50	
195	18.50	18.00	18.00	17.50	17.00	12.50		
Tablet	360	18.50	18.00	18.00	17.50	17.00	12.50	
	350	18.50	18.00	18.00	17.50	17.00	12.50	
	340	18.50	18.00	18.00	17.50	17.00	12.50	
	330	18.50	18.00	18.00	17.50	17.00	12.50	
	320	18.50	18.00	18.00	17.50	17.00	12.50	
	310	18.50	18.00	18.00	17.50	17.00	12.50	
	300	18.50	18.00	18.00	17.50	17.00	12.50	
	290	18.50	18.00	18.00	17.50	17.00	12.50	
	280	18.50	18.00	18.00	17.50	17.00	12.50	
	270	18.50	18.00	18.00	17.50	17.00	12.50	
	260	18.50	18.00	18.00	17.50	17.00	12.50	
	250	18.50	18.00	18.00	17.50	17.00	12.50	
	240	18.50	18.00	18.00	17.50	17.00	12.50	
	230	18.50	18.00	18.00	17.50	17.00	12.50	
	220	18.50	18.00	18.00	17.50	17.00	12.50	
210	18.50	18.00	18.00	17.50	17.00	12.50		



Book (screen orientation is 90° or 270°)	205	18.50	18.00	18.00	17.50	17.00	12.50	
	204	18.50	18.00	18.00	17.50	17.00	12.50	
	203	18.50	18.00	18.00	17.50	17.00	12.50	
	202	18.50	18.00	18.00	17.50	17.00	12.50	
	201	18.50	18.00	18.00	17.50	17.00	12.50	
	200	18.50	18.00	18.00	17.50	17.00	12.50	
	199	18.50	18.00	18.00	17.50	17.00	12.50	
	198	18.50	18.00	18.00	17.50	17.00	12.50	
	197	18.50	18.00	18.00	17.50	17.00	12.50	
	196	18.50	18.00	18.00	17.50	17.00	12.50	
	195	18.50	18.00	18.00	17.50	17.00	12.50	
	190	18.50	18.00	18.00	17.50	17.00	12.50	
	180	18.50	18.00	18.00	17.50	17.00	12.50	
	170	18.50	18.00	18.00	17.50	17.00	12.50	
	160	18.50	18.00	18.00	17.50	17.00	12.50	
	150	18.50	18.00	18.00	17.50	17.00	12.50	
	140	18.50	18.00	18.00	17.50	17.00	12.50	
	130	18.50	18.00	18.00	17.50	17.00	12.50	
	120	18.50	18.00	18.00	17.50	17.00	12.50	
	110	18.50	18.00	18.00	17.50	17.00	12.50	
	100	18.50	18.00	18.00	17.50	17.00	12.50	
	90	18.50	18.00	18.00	17.50	17.00	12.50	
	80	18.50	18.00	18.00	17.50	17.00	12.50	
	70	18.50	18.00	18.00	17.50	17.00	12.50	
	60	18.50	18.00	18.00	17.50	17.00	12.50	
	50	18.50	18.00	18.00	17.50	17.00	12.50	
	40	18.50	18.00	18.00	17.50	17.00	12.50	
	39	18.50	18.00	18.00	17.50	17.00	12.50	
	38	18.50	18.00	18.00	17.50	17.00	12.50	
	37	18.50	18.00	18.00	17.50	17.00	12.50	
	36	18.50	18.00	18.00	17.50	17.00	12.50	
	35	18.50	18.00	18.00	17.50	17.00	12.50	
	Lid Close	34	standby	standby	standby	standby	standby	standby
		33	standby	standby	standby	standby	standby	standby
		32	standby	standby	standby	standby	standby	standby
31		standby	standby	standby	standby	standby	standby	
30		standby	standby	standby	standby	standby	standby	
20		standby	standby	standby	standby	standby	standby	
10		standby	standby	standby	standby	standby	standby	
0		standby	standby	standby	standby	standby	standby	



## 4. RF Exposure Limits

### 4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



**4.3 RF Exposure limit for above 6GHz**

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm<sup>2</sup> per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30



## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

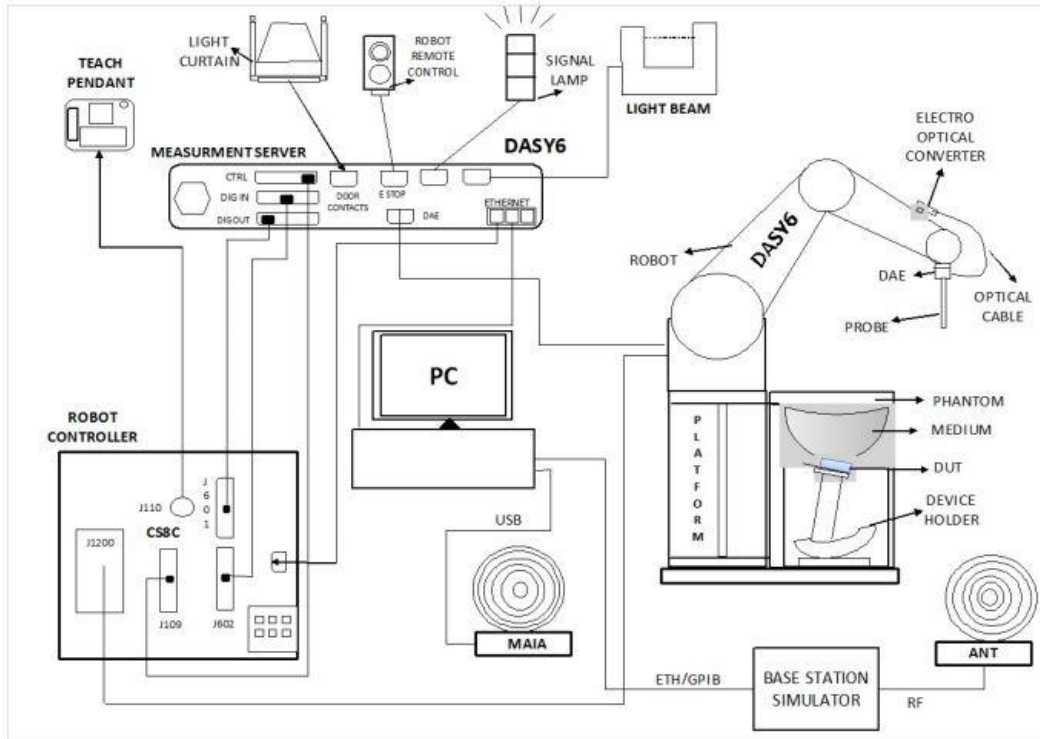

- The DASY system in DASY6/DASY5 V5.2 SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY5/DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No.TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.


Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	




**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	


**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

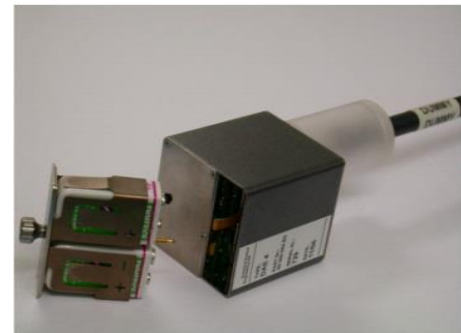

**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 17, 2021	Aug. 17, 2022
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 15, 2021	Sep. 14, 2022
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1003	Sep. 24, 2021	Sep. 23, 2022
SPEAG	5G Verification Source	10 GHz	1020	Jan. 18, 2021	Jan. 17, 2022
SPEAG	Data Acquisition Electronics	DAE4	656	Jan. 22, 2021	Jan. 21, 2022
SPEAG	Data Acquisition Electronics	DAE4	917	Dec. 22, 2020	Dec. 21, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3642	Apr. 26, 2021	Apr. 25, 2022
SPEAG	EUmmWV Probe Tip Protection	EUmmWV3	9424	Mar. 23, 2021	Mar. 22, 2022
RCPTWN	Thermometer	HTC-1	TM685-1	Oct. 28, 2021	Oct. 27, 2022
RCPTWN	Thermometer	HTC-1	TM560-2	Oct. 28, 2021	Oct. 27, 2022
R&S	BT Base Station	CBT	100815	Feb. 19, 2021	Feb. 18, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 24, 2021	Oct. 23, 2022
Keysight	ENA Network Analyzer	E5071C	MY46316648	Jul. 22, 2021	Jul. 21, 2022
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 24, 2021	Sep. 23, 2022
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3252	Jul. 15, 2021	Jul. 14, 2022
Anritsu	Power Meter	ML2495A	1419002	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Meter	ML2495A	1804003	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Power Sensor	MA2411B	1726150	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 15, 2021	Jan. 14, 2022
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 18, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 12, 2021	Oct. 11, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 06, 2021	Sep. 05, 2022
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

## 9. System Verification

### 9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

#### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
2450	22.5	1.849	39.081	1.80	39.20	2.72	-0.30	±5	2021/11/17
5250	22.5	4.756	36.058	4.71	35.95	0.98	0.30	±5	2021/11/17
5600	22.5	5.139	35.414	5.07	35.50	1.36	-0.24	±5	2021/11/17
5750	22.5	5.312	35.150	5.22	35.35	1.76	-0.57	±5	2021/11/17
6500	22.5	6.070	35.300	6.07	34.50	0.00	2.32	±5	2021/11/16

### 9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR06	2021/11/17	2450	250	D2450V2-736	EX3DV4 - SN3642	DAE4 Sn917	13.00	54.20	52	-4.06
SAR06	2021/11/17	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN3642	DAE4 Sn917	8.78	81.70	87.8	7.47
SAR06	2021/11/17	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN3642	DAE4 Sn917	9.15	85.10	91.5	7.52
SAR06	2021/11/17	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN3642	DAE4 Sn917	8.73	81.40	87.3	7.25
SAR06	2021/11/16	6500	100	D6.5GHzV2-1003	EX3DV4 - SN3642	DAE4 Sn917	27.30	292.00	273	-6.51

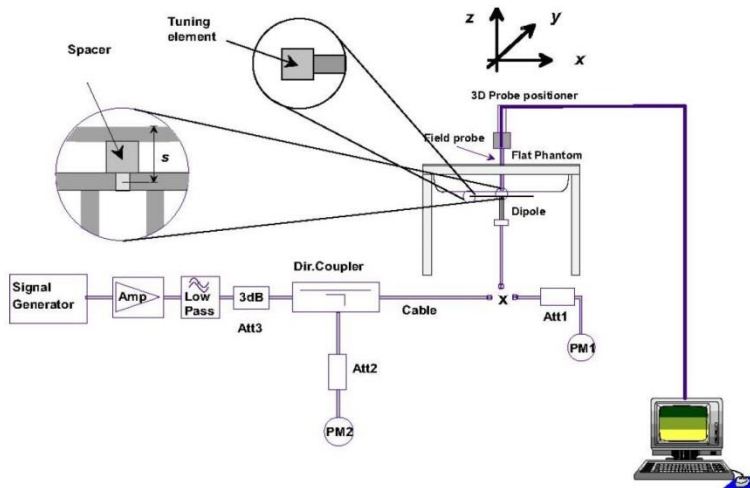


Fig 8.3.1 System Performance Check Setup




Fig 8.3.2 Setup Photo



**9.3 PD System Performance Check Results**

The system was verified to be within  $\pm 0.66$  dB of the power density targets on the calibration certificate according to the test system specification in the user’s manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG’s mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Test Location	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm <sup>2</sup> (W/m <sup>2</sup> )	Targeted 4 cm <sup>2</sup> (W/m <sup>2</sup> )	Deviation (dB)	Date
SAR06	10G	10GHz_1020	EUmmWV3-9424	DAE4-656	10mm	37.7	42.1	-0.48	2021/11/23

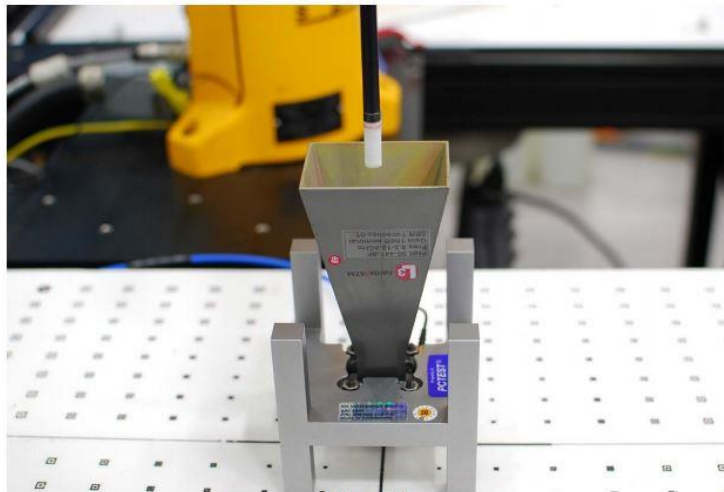

**Figure 4-3**  
System Verification Setup Photo

**System Performance Check Setup**



## 10. WiFi/Bluetooth Output Power (Unit: dBm)

### General Note:

1. All of the wireless technology of this device only supports MIMO mode operation.
2. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
7. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
8. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
9. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
10. When SAR testing for 802.11ax is required
  - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
  - b. Otherwise, consider the fully allocated channel for SAR testing
  - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<Tablet Mode>

2.4GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2		
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	15.40	15.50	15.40	15.50	18.41	18.50	99.70
6		2437	15.30	15.50	15.30	15.50	18.31	18.50		
11		2462	15.40	15.50	15.10	15.50	18.26	18.50		
12		2467	15.40	15.50	15.20	15.50	18.31	18.50		
13		2472	15.40	15.50	15.20	15.50	18.31	18.50		
802.11g 6Mbps	1	2412	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required	
	6	2437		15.50		18.50				
	11	2462		15.50		18.50				
	12	2467		14.50		17.50				
	13	2472		11.50		14.50				
802.11n-HT20 MCS0	1	2412	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required	
	6	2437		15.50		18.50				
	11	2462		15.50		18.50				
	12	2467		14.00		17.00				
	13	2472		9.50		12.50				
802.11n-HT40 MCS0	3	2422	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required	
	6	2437		15.50		18.50				
	9	2452		15.00		18.00				
	10	2457		12.00		15.00				
	11	2462		10.00		13.00				
802.11ac-VHT20 MCS0	1	2412	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required	
	6	2437		15.50		18.50				
	11	2462		15.50		18.50				
	12	2467		14.00		17.00				
	13	2472		9.50		12.50				
802.11ac-VHT40 MCS0	3	2422	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required	
	6	2437		15.50		18.50				
	9	2452		15.00		18.00				
	10	2457		12.00		15.00				
	11	2462		10.00		13.00				
802.11ax-HE20 MCS0	1	2412	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required	
	6	2437		15.50		18.50				
	11	2462		15.50		18.50				
	12	2467		14.00		17.00				
	13	2472		10.00		13.00				
802.11ax-HE40 MCS0	3	2422	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required	
	6	2437		15.50		18.50				
	9	2452		15.00		18.00				
	10	2457		12.50		15.50				
	11	2462		10.00		13.00				



5.2GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2			
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	802.11a 6Mbps	36	5180	Not Required	15.00	Not Required	15.00	15.00	Not Required	18.00	Not Required
		40	5200								
		44	5220								
		48	5240								
	802.11n-HT20 MCS0	36	5180								
		40	5200								
		44	5220								
		48	5240								
	802.11n-HT40 MCS0	38	5190								
		46	5230								
	802.11ac-VHT20 MCS0	36	5180								
		40	5200								
		44	5220								
		48	5240								
	802.11ac-VHT40 MCS0	38	5190								
		46	5230								
	802.11ac-VHT80 MCS0	42	5210								
	802.11ax-HE20 MCS0	36	5180								
		40	5200								
44		5220									
48		5240									
802.11ax-HE40 MCS0	38	5190									
	46	5230									
802.11ax-HE80 MCS0	42	5210									



5.3GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2			
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	5.3GHz WLAN	802.11a 6Mbps	52	5260	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required
56			5280	15.00		15.00		18.00			
60			5300	15.00		15.00		18.00			
64			5320	15.00		15.00		18.00			
802.11n-HT20 MCS0		52	5260	15.00		15.00		15.00		18.00	
		56	5280	15.00		15.00		15.00		18.00	
		60	5300	15.00		15.00		15.00		18.00	
		64	5320	15.00		15.00		15.00		18.00	
802.11n-HT40 MCS0		54	5270	14.80	15.00	15.00	15.00	17.91	18.00	95.10	
		62	5310	14.90	15.00	15.00	15.00	17.96	18.00		
802.11ac-VHT20 MCS0		52	5260	Not Required	15.00	Not Required	15.00	Not Required	18.00	Not Required	
		56	5280		15.00		15.00		18.00		
		60	5300		15.00		15.00		18.00		
		64	5320		15.00		15.00		18.00		
802.11ac-VHT40 MCS0		54	5270		15.00		15.00		15.00		18.00
		62	5310		15.00		15.00		15.00		18.00
802.11ac-VHT80 MCS0		58	5290		14.50		14.50		17.50		
802.11ac-VHT160 MCS0		50	5250		10.50		10.50		13.50		
802.11ax-HE20 MCS0		52	5260		15.00		15.00		18.00		
		56	5280		15.00		15.00		18.00		
	60	5300	15.00		15.00		18.00				
	64	5320	15.00		15.00		18.00				
802.11ax-HE40 MCS0	54	5270	15.00		15.00		18.00				
	62	5310	15.00		15.00		18.00				
802.11ax-HE80 MCS0	58	5290	14.50		14.50		17.50				
802.11ax-HE160 MCS0	50	5250	10.50		10.50		13.50				



5.5GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
	5.5GHz WLAN	802.11a 6Mbps	100	5500	Not Required	14.50	Not Required	14.50	Not Required	17.50	Not Required			
116			5580	14.50		17.50								
124			5620	14.50		17.50								
132			5660	14.50		17.50								
144			5720	14.50		17.50								
802.11n-HT20 MCS0		100	5500	14.50		17.50								
		116	5580	14.50		17.50								
		124	5620	14.50		17.50								
		132	5660	14.50		17.50								
		144	5720	14.50		17.50								
802.11n-HT40 MCS0		102	5510	14.50		17.50								
		110	5550	14.50		17.50								
		126	5630	14.50		17.50								
		134	5670	14.50		17.50								
		142	5710	14.50		17.50								
802.11ac-VHT20 MCS0		100	5500	14.50		17.50								
		116	5580	14.50		17.50								
		124	5620	14.50		17.50								
		132	5660	14.50		17.50								
		144	5720	14.50		17.50								
802.11ac-VHT40 MCS0		102	5510	14.50		17.50								
		110	5550	14.50		17.50								
		126	5630	14.50		17.50								
		134	5670	14.50		17.50								
		142	5710	14.50		17.50								
802.11ac-VHT80 MCS0		106	5530	14.50		14.50		14.40		14.50		17.46	17.50	85.10
		122	5610	14.40		14.50		14.50		14.50		17.46	17.50	
		138	5690	14.20		14.50		14.30		14.50		17.26	17.50	
802.11ac-VHT160 MCS0		114	5570			9.50				9.50			12.50	Not Required
802.11ax-HE20 MCS0		100	5500			14.50				14.50			17.50	
		116	5580			14.50				14.50			17.50	
		124	5620			14.50				14.50			17.50	
		132	5660			14.50				14.50			17.50	
		144	5720			14.50				14.50			17.50	
802.11ax-HE40 MCS0		102	5510			14.50				14.50			17.50	
		110	5550			14.50				14.50			17.50	
		126	5630			14.50				14.50			17.50	
		134	5670			14.50				14.50			17.50	
		142	5710			14.50				14.50			17.50	
802.11ax-HE80 MCS0		106	5530			14.50				14.50			17.50	
	122	5610		14.50		14.50		17.50						
	138	5690		14.50		14.50		17.50						
802.11ax-HE160 MCS0	114	5570		9.50		9.50		12.50						



5.8GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2									
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %							
	802.11a 6Mbps	149	5745	Not Required	14.00	Not Required	14.00	14.00	Not Required	17.00	Not Required						
		157	5785														
		165	5825														
	802.11n-HT20 MCS0	149	5745														
		157	5785														
		165	5825														
	802.11n-HT40 MCS0	151	5755														
		159	5795														
	802.11ac-VHT20 MCS0	149	5745														
		157	5785														
		165	5825														
	802.11ac-VHT40 MCS0	151	5755														
		159	5795														
	802.11ac-VHT80 MCS0	155	5775									13.50	14.00	13.70	14.00	16.61	17.00
802.11ax-HE20 MCS0	149	5745	Not Required									14.00	Not Required	14.00	14.00	Not Required	17.00
	157	5785															
	165	5825															
802.11ax-HE40 MCS0	151	5755															
	159	5795															
802.11ax-HE80 MCS0	155	5775		14.00	14.00	14.00	14.00	14.00	17.00	85.10							

WiFi 6E				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2											
WiFi 6E	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %									
	802.11ax-HE20 MCS0	1	5955	Not Required	1.00	Not Required	1.00	1.00	Not Required	4.00	Not Required								
		57	6235																
		113	6515																
		173	6815																
		233	7115																
	802.11ax-HE40 MCS0	3	5965																
		59	6245																
		107	6485																
		171	6805																
	802.11ax-HE80 MCS0	227	7085																
		7	5985																
		71	6305																
		119	6545																
	802.11ax-HE160 MCS0	167	6785									7.00	7.00	7.00	7.00	7.00	7.00	10.00	85.40
		215	7025									7.50	7.50	7.50	7.50	7.50	7.50	10.50	
		15	6025									8.90	9.00	9.00	9.00	11.96	12.00	12.00	
		47	6185									8.70	9.00	9.00	9.00	11.86	12.00	12.00	
		111	6505									9.30	9.50	9.00	9.50	12.16	12.50	12.50	
	175	6825	8.20									8.50	8.50	8.50	11.36	11.50	11.50		
207	6985	9.40	9.50									9.20	9.50	12.31	12.50	12.50			



<Laptop Mode>

2.4GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2		
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	2.4GHz WLAN	802.11b 1Mbps	1	2412	Not Required	18.00	Not Required	18.00	Not Required	21.00
6			2437	18.00		21.00				
11			2462	17.50		20.50				
12			2467	17.50		20.50				
13			2472	16.50		19.50				
802.11g 6Mbps		1	2412	18.00		21.00				
		6	2437	20.50		23.50				
		11	2462	18.00		21.00				
		12	2467	14.50		17.50				
802.11n-HT20 MCS0		1	2412	17.50		20.50				
		6	2437	20.00		23.00				
		11	2462	17.00		20.00				
		12	2467	14.00		17.00				
802.11n-HT40 MCS0		3	2422	15.00		18.00				
		6	2437	18.00		21.00				
		9	2452	15.00		18.00				
		10	2457	12.00		15.00				
802.11ac-VHT20 MCS0		1	2412	17.50		20.50				
		6	2437	20.00		23.00				
		11	2462	17.00		20.00				
		12	2467	14.00		17.00				
		13	2472	9.50		12.50				
802.11ac-VHT40 MCS0		3	2422	15.00		18.00				
		6	2437	18.00		21.00				
		9	2452	15.00		18.00				
		10	2457	12.00		15.00				
		11	2462	10.00		13.00				
802.11ax-HE20 MCS0		1	2412	17.50		20.50				
		6	2437	20.00		23.00				
		11	2462	17.50		20.50				
		12	2467	14.00		17.00				
		13	2472	10.00		13.00				
802.11ax-HE40 MCS0		3	2422	15.00		18.00				
		6	2437	18.00		21.00				
		9	2452	15.00		18.00				
		10	2457	12.50		15.50				
		11	2462	10.00		13.00				





5.2GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2			
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	802.11a 6Mbps	36	5180	Not Required	Not Required	19.00	Not Required	19.00	Not Required	22.00	Not Required
		40	5200			19.00		19.00		22.00	
		44	5220			19.00		19.00		22.00	
		48	5240			19.00		19.00		22.00	
	802.11n-HT20 MCS0	36	5180			18.50		18.50		21.50	
		40	5200			19.50		19.50		22.50	
		44	5220			19.50		19.50		22.50	
		48	5240			19.50		19.50		22.50	
	802.11n-HT40 MCS0	38	5190			17.00		17.00		20.00	
		46	5230			19.50		19.50		22.50	
	802.11ac-VHT20 MCS0	36	5180			18.50		18.50		21.50	
		40	5200			19.50		19.50		22.50	
		44	5220			19.50		19.50		22.50	
	802.11ac-VHT40 MCS0	38	5190			17.00		17.00		20.00	
		46	5230			19.50		19.50		22.50	
	802.11ac-VHT80 MCS0	42	5210			14.00		14.00		17.00	
	802.11ax-HE20 MCS0	36	5180			18.50		18.50		21.50	
		40	5200			19.50		19.50		22.50	
44		5220	19.50			19.50		22.50			
48		5240	19.50	19.50	22.50						
802.11ax-HE40 MCS0	38	5190	17.00	17.00	20.00						
	46	5230	19.50	19.50	22.50						
802.11ax-HE80 MCS0	42	5210	14.00	14.00	17.00						



5.3GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2			
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	802.11a 6Mbps	52	5260	Not Required	Not Required	Not Required	19.00	19.00	Not Required	22.00	Not Required
		56	5280				19.00	19.00			
		60	5300				19.00	19.00			
		64	5320				19.00	19.00			
	802.11n-HT20 MCS0	52	5260				19.50	19.50			
		56	5280				19.50	19.50			
		60	5300				19.00	19.00			
		64	5320				19.00	19.00			
	802.11n-HT40 MCS0	54	5270				19.50	19.50			
		62	5310				16.50	16.50			
	802.11ac-VHT20 MCS0	52	5260				19.50	19.50			
		56	5280				19.50	19.50			
		60	5300				19.00	19.00			
		64	5320				19.00	19.00			
	802.11ac-VHT40 MCS0	54	5270				19.50	19.50			
		62	5310				16.50	16.50			
	802.11ac-VHT80 MCS0	58	5290				14.50	14.50			
	802.11ac-VHT160 MCS0	50	5250				13.50	13.50			
	802.11ax-HE20 MCS0	52	5260				19.50	19.50			
56		5280	19.50				19.50				
60		5300	19.00	19.00							
64		5320	19.00	19.00							
802.11ax-HE40 MCS0	54	5270	19.50	19.50							
	62	5310	16.50	16.50							
802.11ax-HE80 MCS0	58	5290	14.50	14.50							
802.11ax-HE160 MCS0	50	5250	13.50	13.50							



5.5GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2		
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		100	5500	Not Required	19.00	Not Required	19.00	Not Required	22.00
		116	5580	19.00		19.00		22.00		
		124	5620	19.00		19.00		22.00		
		132	5660	19.00		19.00		22.00		
		144	5720	19.00		19.00		22.00		
802.11n-HT20 MCS0		100	5500	Not Required	18.50	Not Required	18.50	Not Required	21.50	Not Required
		116	5580		19.50		19.50		22.50	
		124	5620		19.50		19.50		22.50	
		132	5660		18.50		18.50		21.50	
		144	5720		19.00		19.00		22.00	
802.11n-HT40 MCS0		102	5510	Not Required	16.50	Not Required	16.50	Not Required	19.50	Not Required
		110	5550		19.00		19.00		22.00	
		126	5630		18.50		18.50		21.50	
		134	5670		18.00		18.00		21.00	
		142	5710		19.50		19.50		22.50	
802.11ac-VHT20 MCS0		100	5500	Not Required	18.50	Not Required	18.50	Not Required	21.50	Not Required
		116	5580		19.50		19.50		22.50	
		124	5620		19.50		19.50		22.50	
		132	5660		18.50		18.50		21.50	
		144	5720		19.00		19.00		22.00	
802.11ac-VHT40 MCS0		102	5510	Not Required	16.50	Not Required	16.50	Not Required	19.50	Not Required
		110	5550		19.00		19.00		22.00	
		126	5630		18.50		18.50		21.50	
		134	5670		18.00		18.00		21.00	
		142	5710		19.50		19.50		22.50	
802.11ac-VHT80 MCS0		106	5530	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		122	5610		17.50		17.50		20.50	
		138	5690		19.00		19.00		22.00	
802.11ac-VHT160 MCS0		114	5570	Not Required	12.50	Not Required	12.50	Not Required	15.50	Not Required
802.11ax-HE20 MCS0		100	5500		18.50		18.50		21.50	
		116	5580	19.50	19.50	22.50				
		124	5620	19.50	19.50	22.50				
		132	5660	18.50	18.50	21.50				
		144	5720	19.00	19.00	22.00				
802.11ax-HE40 MCS0		102	5510	Not Required	16.50	Not Required	16.50	Not Required	19.50	Not Required
		110	5550		19.00		19.00		22.00	
		126	5630		18.50		18.50		21.50	
		134	5670		18.00		18.00		21.00	
		142	5710		19.50		19.50		22.50	
802.11ax-HE80 MCS0		106	5530	Not Required	15.50	Not Required	15.50	Not Required	18.50	Not Required
		122	5610		17.50		17.50		20.50	
		138	5690		19.00		19.00		22.00	
802.11ax-HE160 MCS0		114	5570	Not Required	12.50	Not Required	12.50	Not Required	15.50	Not Required



5.8GHz WLAN				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
	802.11a 6Mbps	149	5745	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required			
		157	5785									21.00	21.00	24.00
		165	5825									21.00	21.00	24.00
	802.11n-HT20 MCS0	149	5745									19.50	19.50	22.50
		157	5785									19.50	19.50	22.50
		165	5825									19.50	19.50	22.50
	802.11n-HT40 MCS0	151	5755									19.50	19.50	22.50
		159	5795									19.50	19.50	22.50
	802.11ac-VHT20 MCS0	149	5745									19.50	19.50	22.50
		157	5785									19.50	19.50	22.50
	802.11ac-VHT40 MCS0	151	5755									19.50	19.50	22.50
		159	5795									19.50	19.50	22.50
	802.11ac-VHT80 MCS0	155	5775									17.50	17.50	20.50
	802.11ax-HE20 MCS0	149	5745									19.50	19.50	22.50
157		5785	19.50									19.50	22.50	
165		5825	19.50	19.50	22.50									
802.11ax-HE40 MCS0	151	5755	19.50	19.50	22.50									
	159	5795	19.50	19.50	22.50									
802.11ax-HE80 MCS0	155	5775	17.50	17.50	20.50									

WiFi 6E				Ant 1+2 (1)		Ant 1+2 (2)		Ant 1+2						
WiFi 6E	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
	802.11ax-HE20 MCS0	1	5955	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required	Not Required			
		57	6235									1.00	1.00	4.00
		113	6515									1.50	1.50	4.50
		173	6815									1.50	1.50	4.50
		233	7115									2.00	2.00	5.00
	802.11ax-HE40 MCS0	3	5965									3.50	3.50	6.50
		59	6245									3.50	3.50	6.50
		107	6485									4.00	4.00	7.00
		171	6805									4.00	4.00	7.00
	802.11ax-HE80 MCS0	227	7085									4.50	4.50	7.50
		7	5985									7.00	7.00	10.00
		71	6305									7.00	7.00	10.00
		119	6545									7.00	7.00	10.00
		167	6785									7.00	7.00	10.00
	802.11ax-HE160 MCS0	215	7025									7.50	7.50	10.50
		15	6025									9.00	9.00	12.00
		47	6185									9.00	9.00	12.00
		111	6505									9.50	9.50	12.50
		175	6825									8.50	8.50	11.50
207	6985	9.50	9.50									12.50		




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	10.90	Not Required	Not Required
	CH 39	2441	10.90		
	CH 78	2480	10.80		
Tune-up Limit			11.50	8.50	8.50

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	Not Required	Not Required
	CH 19	2440		
	CH 39	2480		
Tune-up Limit			11.50	11.50


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.84% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

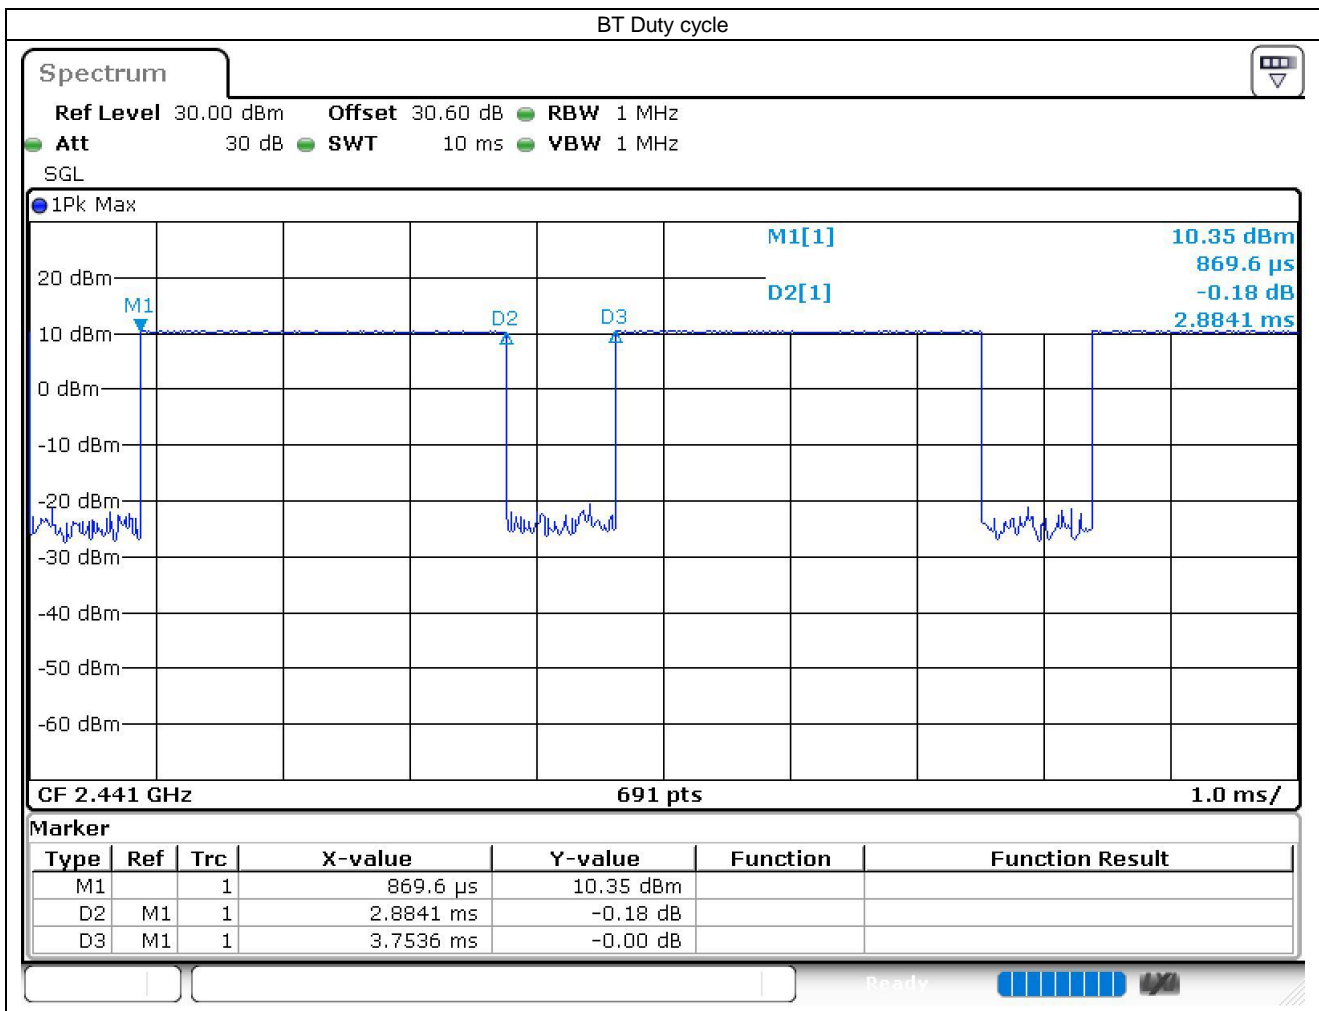

### 11. Antenna Location

<For Tablet>

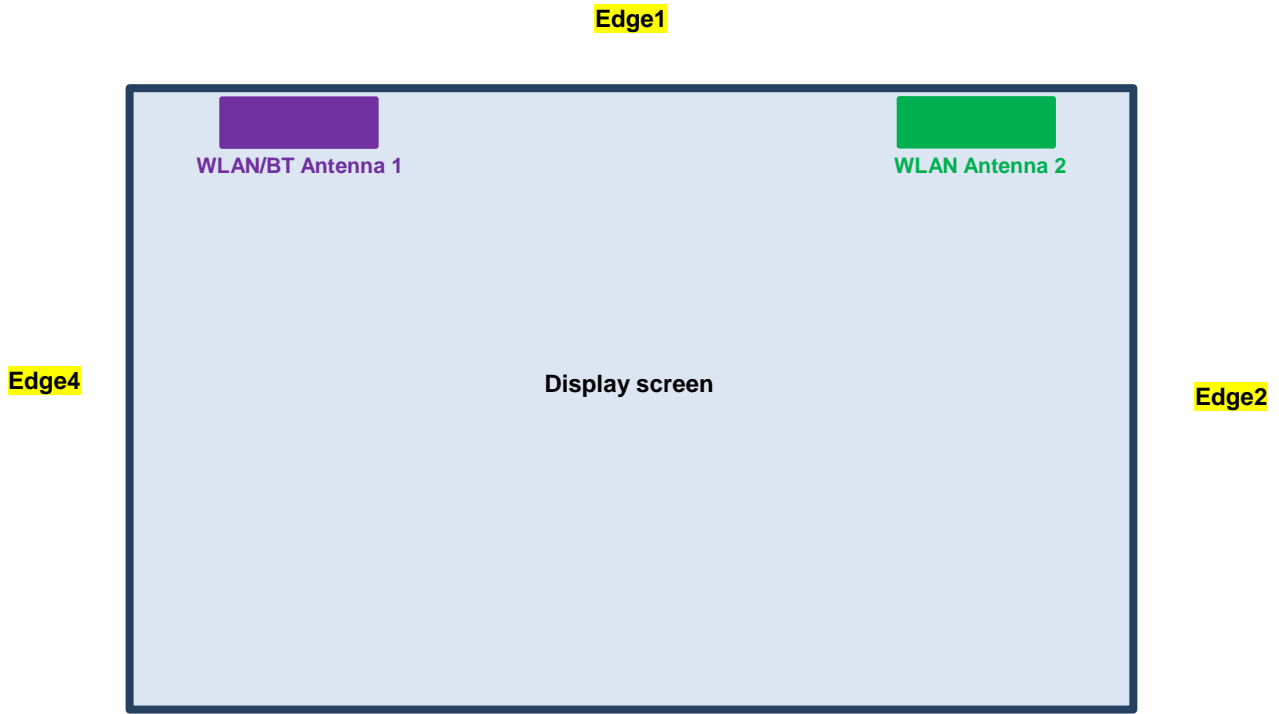


**Edge3**

**Front View**

The separation distance for antenna to edge:

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WLAN/BT Antenna 1	2	252.51	221.8	45.45
WLAN Antenna 2	2	45.51	221.8	252.45

<For Laptop>

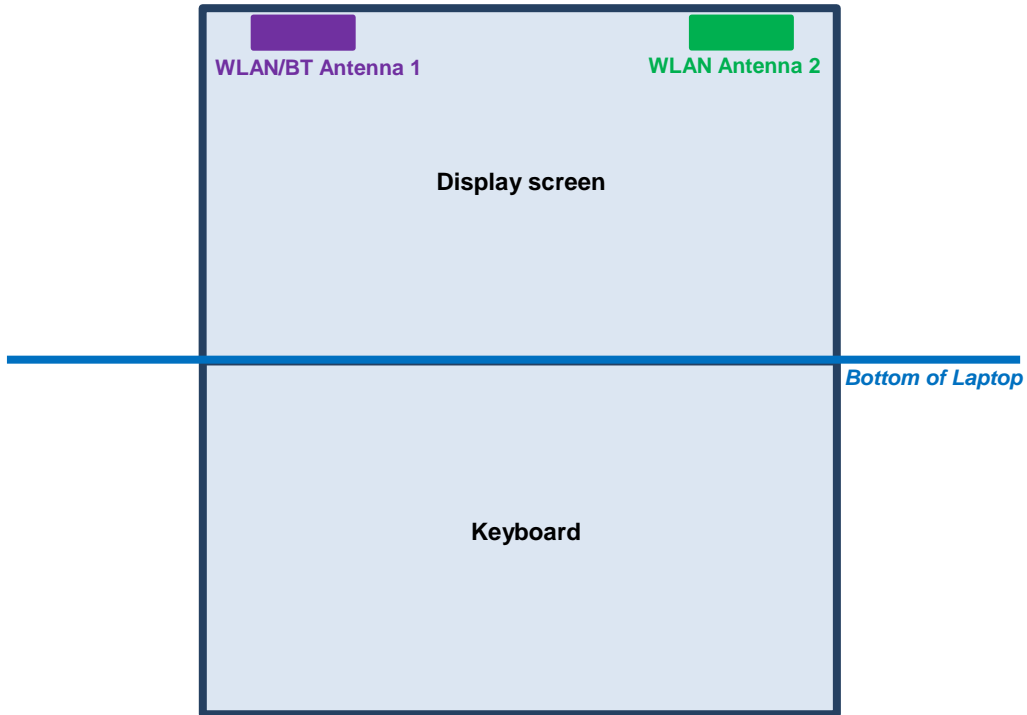

The separation distance for antenna to edge :

Antenna	To Bottom of Laptop (mm)
WLAN/BT Antenna 1	230.72
WLAN Antenna 2	230.72



**<SAR test exclusion table>**

**General Note:**

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
  - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
    - f(GHz) is the RF channel transmit frequency in GHz
    - Power and distance are rounded to the nearest mW and mm before calculation
    - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
  - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · ( f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	BT ANT 1	2.4GHz WLAN ANT 1+2	5GHz WLAN ANT 1+2	6GHz WLAN ANT 1+2
	Calculated Frequency (MHz)	2480	2472	5825	6985
Maximum power (dBm)	11.5	23.5	24.0	12.5	
Maximum rated power(mW)	14.13	223.87	251.19	17.78	
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	4.5	70.4	121.3	9.4
	Testing required?	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	4.5	70.4	121.3	9.4
	Testing required?	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	252.5	45.5	45.5	45.5
	exclusion threshold	2120.0	7.7	13.3	1.0
	Testing required?	No	Yes	Yes	No
Edge 3	Separation distance(mm)	221.8	221.8	221.8	221.8
	exclusion threshold	1813.0	1813.0	1780.0	1775.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	45.5	45.5	45.5	45.5
	exclusion threshold	0.5	7.7	13.3	1.0
	Testing required?	No	Yes	Yes	No
Bottom of Laptop	Separation distance(mm)	230.7	230.7	230.7	230.7
	exclusion threshold	1902.0	1903.0	1869.0	1864.0
	Testing required?	No	No	No	No





## 12. SAR Test Results

### General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

### WLAN Note:

- Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
- When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain
- During SAR testing the WLAN transmission was verified using a spectrum analyzer.

### WLAN PD Note:

- The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- Batteries are fully charged at the beginning of the measurements. The DUT was connected to a wall charger for some measurements due to the test duration. It was confirmed that the charger plugged into this DUT did not impact the near-field PD test results.
- Absorbed power density (APD) using a 4cm<sup>2</sup> averaging area is reported based on SAR measurements.
- Power density was calculated by repeated E-field measurements on two measurement planes separated by λ/4.
- The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
- Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
- The measurement procedure consists of measuring the PD<sub>inc</sub> at two different distances: 2 mm (compliance distance) and λ/5. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD<sub>n</sub> fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$



12.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	WNC	Ant 1+2(1)	1	2412	15.40	15.50	1.023	99.7	1.003	-0.07	0.134	0.138
				0mm	WNC	Ant 1+2(2)	1	2412	15.40	15.50	1.023	99.7	1.003	-0.07	0.152	0.156
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	WNC	Ant 1+2(1)	1	2412	15.40	15.50	1.023	99.7	1.003	-0.16	0.142	0.146
				0mm	WNC	Ant 1+2(2)	1	2412	15.40	15.50	1.023	99.7	1.003	-0.16	0.228	0.234
	WLAN2.4GHz	802.11b 1Mbps	Edge 2	0mm	WNC	Ant 1+2(2)	1	2412	15.40	15.50	1.023	99.7	1.003	-0.19	0.042	0.043
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	WNC	Ant 1+2(1)	1	2412	15.40	15.50	1.023	99.7	1.003	0.07	0.046	0.047
01	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	HTK	Ant 1+2(1)	1	2412	15.40	15.50	1.023	99.7	1.003	-0.08	0.357	0.366
				0mm	HTK	Ant 1+2(2)	1	2412	15.40	15.50	1.023	99.7	1.003	-0.08	0.290	0.298
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	WNC	Ant 1+2(1)	62	5310	14.90	15.00	1.023	95.1	1.052	-0.19	0.047	0.051
				0mm	WNC	Ant 1+2(2)	62	5310	15.00	15.00	1.000	95.1	1.052	-0.19	0.052	0.055
02	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	62	5310	14.90	15.00	1.023	95.1	1.052	-0.07	0.130	0.140
				0mm	WNC	Ant 1+2(2)	62	5310	15.00	15.00	1.000	95.1	1.052	-0.07	0.147	0.155
	WLAN5GHz	802.11n-HT40 MCS0	Edge 2	0mm	WNC	Ant 1+2(2)	62	5310	15.00	15.00	1.000	95.1	1.052	0.06	0.036	0.038
	WLAN5GHz	802.11n-HT40 MCS0	Edge 4	0mm	WNC	Ant 1+2(1)	62	5310	14.90	15.00	1.023	95.1	1.052	0.08	0.050	0.054
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	HTK	Ant 1+2(1)	62	5310	14.90	15.00	1.023	95.1	1.052	-0.15	0.142	0.153
				0mm	HTK	Ant 1+2(2)	62	5310	15.00	15.00	1.000	95.1	1.052	-0.15	0.089	0.094
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	WNC	Ant 1+2(1)	106	5530	14.50	14.50	1.000	85.1	1.175	0.16	0.048	0.056
				0mm	WNC	Ant 1+2(2)	106	5530	14.40	14.50	1.023	85.1	1.175	0.16	0.051	0.061
03	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	106	5530	14.50	14.50	1.000	85.1	1.175	-0.04	0.354	0.416
				0mm	WNC	Ant 1+2(1)	106	5530	14.40	14.50	1.023	85.1	1.175	-0.04	0.304	0.366
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	WNC	Ant 1+2(2)	106	5530	14.40	14.50	1.023	85.1	1.175	0	0.047	0.057
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	WNC	Ant 1+2(1)	106	5530	14.50	14.50	1.000	85.1	1.175	-0.03	0.095	0.112
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	HTK	Ant 1+2(1)	106	5530	14.50	14.50	1.000	85.1	1.175	-0.17	0.240	0.282
				0mm	HTK	Ant 1+2(2)	106	5530	14.40	14.50	1.023	85.1	1.175	-0.17	0.204	0.245
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	WNC	Ant 1+2(1)	155	5775	13.50	14.00	1.122	85.1	1.175	-0.07	0.070	0.092
				0mm	WNC	Ant 1+2(2)	155	5775	13.70	14.00	1.072	85.1	1.175	-0.07	0.081	0.102
04	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	155	5775	13.50	14.00	1.122	85.1	1.175	0.1	0.303	0.399
				0mm	WNC	Ant 1+2(2)	155	5775	13.70	14.00	1.072	85.1	1.175	0.1	0.191	0.240
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 2	0mm	WNC	Ant 1+2(2)	155	5775	13.70	14.00	1.072	85.1	1.175	0.07	0.055	0.069
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	WNC	Ant 1+2(1)	155	5775	13.50	14.00	1.122	85.1	1.175	-0.16	0.109	0.144
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	HTK	Ant 1+2(1)	155	5775	13.50	14.00	1.122	85.1	1.175	0.06	0.265	0.349
				0mm	HTK	Ant 1+2(2)	155	5775	13.70	14.00	1.072	85.1	1.175	0.06	0.171	0.215

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom Face	0mm	WNC	Ant 1	39	2441	10.90	11.50	1.148	76.84	1.084	0.07	0.061	0.076
	Bluetooth	1Mbps	Edge 1	0mm	WNC	Ant 1	39	2441	10.90	11.50	1.148	76.84	1.084	0.01	0.065	0.081
05	Bluetooth	1Mbps	Edge 1	0mm	HTK	Ant 1	39	2441	10.90	11.50	1.148	76.84	1.084	-0.08	0.070	0.087

**12.2 6GHz WLAN SAR Test Result**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna Vendor	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	APD (W/m <sup>2</sup> )
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Face	0mm	WNC	Ant 1+2(1)	207	6985	9.40	9.50	1.023	85.4	1.171	0.08	0.033	0.040	0.237
				0mm	WNC	Ant 1+2(2)	207	6985	9.20	9.50	1.072	85.4	1.171	0.08	0.032	0.040	0.23
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	207	6985	9.40	9.50	1.023	85.4	1.171	-0.05	0.093	0.111	0.668
				0mm	WNC	Ant 1+2(2)	207	6985	9.20	9.50	1.072	85.4	1.171	-0.05	0.065	0.082	0.467
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	15	6025	8.90	9.00	1.023	85.4	1.171	0.18	0.085	0.102	0.611
				0mm	WNC	Ant 1+2(2)	15	6025	9.00	9.00	1.000	85.4	1.171	0.18	0.079	0.093	0.567
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	47	6185	8.70	9.00	1.072	85.4	1.171	0.07	0.087	0.109	0.625
				0mm	WNC	Ant 1+2(2)	47	6185	9.00	9.00	1.000	85.4	1.171	0.07	0.052	0.061	0.373
06	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	111	6505	9.30	9.50	1.047	85.4	1.171	0.04	0.109	0.134	0.749
				0mm	WNC	Ant 1+2(2)	111	6505	9.00	9.50	1.122	85.4	1.171	0.04	0.102	0.134	0.738
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	WNC	Ant 1+2(1)	175	6825	8.20	8.50	1.072	85.4	1.171	0.02	0.036	0.045	0.258
				0mm	WNC	Ant 1+2(2)	175	6825	8.50	8.50	1.000	85.4	1.171	0.02	0.029	0.034	0.208
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	HTK	Ant 1+2(1)	111	6505	9.30	9.50	1.047	85.4	1.171	-0.17	0.053	0.065	0.381
				0mm	HTK	Ant 1+2(2)	111	6505	9.00	9.50	1.122	85.4	1.171	-0.17	0.048	0.063	0.345

**12.3 6GHz PD Test Result**

Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Grip Step (λ)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m <sup>2</sup> )	Total psPD (W/m <sup>2</sup> )
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	WNC	15	6025	8.90	0.0625	5.75	2.942849932	1.54	1.74
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	10mm	Ant 1	WNC	15	6025	8.90	0.25	2.92		0.661	0.699
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	WNC	207	6985	9.40	0.0625	1.6	-0.83681747	0.831	0.924
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	8.59mm	Ant 1	WNC	207	6985	9.40	0.25	1.94		0.463	0.536
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	WNC	15	6025	9.0	0.0625	4.25	1.059446965	0.762	0.779
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	10mm	Ant 2	WNC	15	6025	9.0	0.25	3.33		0.58	0.656
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	WNC	207	6985	9.2	0.0625	5.69	2.249125682	0.772	0.863
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	8.59mm	Ant 2	WNC	207	6985	9.2	0.25	3.39		0.62	0.647

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Sample	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Grip Step (λ)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m <sup>2</sup> )	Scaled Normal psPD (W/m <sup>2</sup> )	Total psPD (W/m <sup>2</sup> )	Scaled Total psPD (W/m <sup>2</sup> )
01	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	WNC	15	6025	8.90	9.00	85.40	0.0625	1.5535	0.16	1.54	2.87	1.74	3.24
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	WNC	47	6185	8.70	9.00	85.40	0.0625	1.5535	-0.02	1.25	2.44	1.59	3.10
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	WNC	111	6505	9.30	9.50	85.40	0.0625	1.5535	-0.06	0.306	0.58	0.53	1.01
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	WNC	175	6825	8.20	8.50	85.40	0.0625	1.5535	-0.08	0.675	1.32	0.832	1.62
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	WNC	207	6985	9.40	9.50	85.40	0.0625	1.5535	0.05	0.831	1.55	0.924	1.72
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 1	HTK	15	6025	8.90	9.00	85.40	0.0625	1.5535	-0.07	0.644	1.20	0.697	1.30
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	WNC	15	6025	9.0	9.00	85.40	0.0625	1.5535	0.05	0.762	1.39	0.779	1.42
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	WNC	47	6185	9.0	9.00	85.40	0.0625	1.5535	0.09	1.05	1.91	1.11	2.02
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	WNC	111	6505	9.0	9.50	85.40	0.0625	1.5535	0.11	0.697	1.42	0.805	1.64
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	WNC	175	6825	8.5	8.50	85.40	0.0625	1.5535	0.11	0.805	1.46	0.884	1.61
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	WNC	207	6985	9.2	9.50	85.40	0.0625	1.5535	0.08	0.772	1.50	0.863	1.68
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2	HTK	47	6185	9.0	9.00	85.40	0.0625	1.5535	0.01	0.912	1.66	1.02	1.86

### **13. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Body
1.	2.4GHz WLAN Ant 1+2 + Bluetooth Ant 1	Yes
2.	5G/6GHz WLAN Ant 1+2 + Bluetooth Ant 1	Yes

**General Note:**

1. EUT will choose either WLAN 2.4GHz or WLAN 5GHz or WLAN 6GHz according to the network signal condition; therefore, 2.4GHz WLAN, 5GHz WLAN and 6GHz WLAN will not operate simultaneously at any moment.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

#### **13.1 Body Exposure Conditions**

Exposure Position	1	2	3	1+3 Summed 1g SAR (W/kg)	2+3 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 1+2	5G/6GHz WLAN Ant 1+2	Bluetooth Ant 1		
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
Bottom Face at 0mm	0.156	0.102	0.076	<b>0.232</b>	<b>0.178</b>
Edge 1 at 0mm	0.366	0.416	0.087	<b>0.453</b>	<b>0.503</b>
Edge 2 at 0mm	0.043	0.069		<b>0.043</b>	<b>0.069</b>
Edge 4 at 0mm	0.047	0.144		<b>0.047</b>	<b>0.144</b>

**Test Engineer** : Bevis Chang, Jay Jian and Dennis Hsieh

**14. Uncertainty Assessment**

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.



**Applicable for SAR Measurements:**

Uncertainty Budget (4 MHz - 10 GHz range)								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
<b>Measurement System</b>								
Probe Calibration	18.60	N	2	1	1	9.3	9.3	∞
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9	∞
Linearity	4.70	R	1.732	1	1	2.7	2.7	∞
Modulation Response	4.68	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6	∞
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2	∞
Readout Electronics	0.30	N	1	1	1	0.3	0.3	∞
Response Time	0.00	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.60	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9	∞
Post-processing	4.00	R	1.732	1	1	2.3	2.3	∞
<b>Test Sample Related</b>								
Device Holder	3.60	N	1	1	1	3.6	3.6	12
Test sample Positioning	3.03	N	1	1	1	3.0	3.0	35
Power Scaling	0.00	R	1.732	1	1	0.0	0.0	∞
Power Drift	5.00	R	1.732	1	1	2.9	2.9	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4	∞
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0	∞
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0	5
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2	∞
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1	∞
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6	∞
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0	5
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4	∞
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1	∞
<b>Combined Std. Uncertainty</b>						14.5%	14.2%	2371
<b>Coverage Factor for 95 %</b>						K=2	K=2	
<b>Expanded STD Uncertainty</b>						29.0%	28.4%	



**Applicable for Power Density Measurements:**

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependence	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
<b>Uncertainty terms dependent on the DUT and environmental factors</b>					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
<b>Combined Std. Uncertainty</b>					<b>1.34</b>
<b>Expanded STD Uncertainty (95%)</b>					<b>2.68</b>



## **15. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [10] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [11] SPEAG DASY6 System Handbook
- [12] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)