


FCC SAR TEST REPORT

FCC ID : B94-RTL8822CED
Equipment : 802.11 a/b/g/n/ac RTL8822CE Combo module
Brand Name : Realtek
Model Name : RTL8822CE
Applicant : HP Inc.
1501 Page Mill Road Palo Alto, CA 94304
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Notebook PC (Brand Name: HP, Model Name: TPN-W147) during test.

The product was received on Feb. 24, 2022 and testing was started from Mar. 10, 2022 and completed on Mar. 17, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance 4

2. Guidance Applied..... 4

3. Equipment Under Test (EUT) Information 5

 3.1 General Information 5

 3.1 Sensor Triggering angle and power verification 6

4. RF Exposure Limits.....14

 4.1 Uncontrolled Environment.....14

 4.2 Controlled Environment.....14

5. Specific Absorption Rate (SAR).....15

 5.1 Introduction15

 5.2 SAR Definition.....15

6. System Description and Setup16

 6.1 Test Site Location.....16

 6.2 E-Field Probe17

 6.3 Data Acquisition Electronics (DAE)17

 6.4 Phantom.....18

 6.5 Device Holder.....19

7. Measurement Procedures20

 7.1 Spatial Peak SAR Evaluation20

 7.2 Power Reference Measurement.....21

 7.3 Area Scan21

 7.4 Zoom Scan.....22

 7.5 Volume Scan Procedures.....22

 7.6 Power Drift Monitoring.....22

8. Test Equipment List23

9. System Verification24

 9.1 Tissue Verification24

 9.2 System Performance Check Results.....24

10. WiFi/Bluetooth Output Power (Unit: dBm)25

11. Antenna Location33

12. SAR Test Results36

 12.1 Body SAR37

 12.2 Repeated SAR Measurement38

13. Simultaneous Transmission Analysis.....39

 13.1 Body Exposure Conditions.....39

 13.2 SPLSR Evaluation and Analysis.....40

14. Uncertainty Assessment41

15. References41

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
FA221902	01	Initial issue of report	Apr. 12, 2022



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HP Inc., 802.11 a/b/g/n/ac RTL8822CE Combo module, RTL8822CE, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
			Body (Separation 0mm) 1g SAR (W/kg)	
DTS	WLAN	2.4GHz WLAN	0.82	0.87
NII		5GHz WLAN	1.24	1.24
DSS	2.4GHz Band	Bluetooth	0.05	1.24
Date of Testing:			2022/3/10 ~ 2022/3/17	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	802.11 a/b/g/n/ac RTL8822CE Combo module
Brand Name	Realtek
Model Name	RTL8822CE
FCC ID	B94-RTL8822CED
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
Remark:	
1. This device has two antenna vendors, RF exposure evaluation selects INPAQ as the main test, WNC will spot check worst case found in INPAQ.	
2. The device implements G sensor detection, the G-sensor is control when the device from laptop change to tablet mode that device will limit different output power for SAR compliance.	

Host Information	
Equipment Name	Notebook PC
Brand Name	HP
Model Name	TPN-W147
EUT Stage	Production Unit

Antenna Information(Laptop)									
1	Ant. Type	PIFA	Connector	INPAQ	2	Ant. Type	PIFA	Connector	INPAQ
	Model No.	025.901SO.0001 (WA-P-LE-02-005)				Model No.	025.901SP.0001 (WA-P-LE-02-006)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	2.81	5470~5725MHz	0.47		2400~2483.5MHz	-1.64	5470~5725MHz	0.69
	5150~5250MHz	-0.14	5725~5850MHz	-1.24		5150~5250MHz	-1.13	5725~5850MHz	-0.17
5250~5350MHz	0.72			5250~5350MHz	-0.56				
1	Ant. Type	PIFA	Connector	WNC	2	Ant. Type	PIFA	Connector	WNC
	Model No.	025.901SL.0001 (81EABD15.G29)				Model No.	025.901SL.0011 (81EABD15.G30)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	1.53	5470~5725MHz	2.87		2400~2483.5MHz	1.08	5470~5725MHz	2.84
	5150~5250MHz	2.77	5725~5850MHz	2.83		5150~5250MHz	2.77	5725~5850MHz	2.92
5250~5350MHz	2.9			5250~5350MHz	2.77				
Antenna Information (Tablet)									
1	Ant. Type	PIFA	Connector	INPAQ	2	Ant. Type	PIFA	Connector	INPAQ
	Model No.	025.901SO.0001 (WA-P-LE-02-005)				Model No.	025.901SP.0001 (WA-P-LE-02-006)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	-0.57	5470~5725MHz	0.6		2400~2483.5MHz	-1.54	5470~5725MHz	0.58
	5150~5250MHz	1.69	5725~5850MHz	-1.16		5150~5250MHz	-0.03	5725~5850MHz	-1.07
5250~5350MHz	2.88			5250~5350MHz	-0.03				
1	Ant. Type	PIFA	Connector	WNC	2	Ant. Type	PIFA	Connector	WNC
	Model No.	025.901SL.0001 (81EABD15.G29)				Model No.	025.901SL.0011 (81EABD15.G30)		
	Peak Gain (dBi)					Peak Gain (dBi)			
	2400~2483.5MHz	-0.02	5470~5725MHz	0.25		2400~2483.5MHz	-0.58	5470~5725MHz	0.19
	5150~5250MHz	1.08	5725~5850MHz	-0.36		5150~5250MHz	0.05	5725~5850MHz	0.07
5250~5350MHz	1.08			5250~5350MHz	0.05				



3.1 Sensor Triggering angle and power verification

General Note:

- The following guidance should be applied to laptops/tablets that use Hall Effect or gravity sensors to detect lid angle for the purpose of power reduction:

- Step 1: With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained
- Step 2: Lower the screen 5 degrees. Closed mode should be reobtained. If not keep lowering in 5 degree steps
- Step 3: Open the screen in 1 degree steps until laptop mode is reobtained
- Step 4: Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained
- Step 5: Then continue opening the screen in 10 degree steps until tablet mode is obtained
- Step 6: Power measurements should be taken at each step
- Step 7: Reverse this procedure going from tablet mode back down to closed mode

when the screen angle is from 0 degree to 360 degree							
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1/2				
	Band		2.4GHz WLAN	5.2GHz WLAN	5.3GHz WLAN	5.5GHz WLAN	5.8GHz WLAN
	Lid Close	0		standby	standby	standby	standby
10			standby	standby	standby	standby	standby
20			standby	standby	standby	standby	standby
30			standby	standby	standby	standby	standby
31			standby	standby	standby	standby	standby
32			standby	standby	standby	standby	standby
33			standby	standby	standby	standby	standby
34			standby	standby	standby	standby	standby
Laptop	35		20	20.5	20.5	20.5	20.5
	36		20	20.5	20.5	20.5	20.5
	37		20	20.5	20.5	20.5	20.5
	38		20	20.5	20.5	20.5	20.5
	39		20	20.5	20.5	20.5	20.5
	40		20	20.5	20.5	20.5	20.5
	50		20	20.5	20.5	20.5	20.5
	60		20	20.5	20.5	20.5	20.5
	70		20	20.5	20.5	20.5	20.5
	80		20	20.5	20.5	20.5	20.5
	90		20	20.5	20.5	20.5	20.5
	100		20	20.5	20.5	20.5	20.5
	110		20	20.5	20.5	20.5	20.5
	120		20	20.5	20.5	20.5	20.5
	125		20	20.5	20.5	20.5	20.5
	126		20	20.5	20.5	20.5	20.5
127		20	20.5	20.5	20.5	20.5	
128		20	20.5	20.5	20.5	20.5	
129		20	20.5	20.5	20.5	20.5	
Tablet	130		17.5	15.5	16.0	16.0	15.5
	135		17.5	15.5	16	16	15.5
	136		17.5	15.5	16	16	15.5
	137		17.5	15.5	16	16	15.5
	138		17.5	15.5	16	16	15.5
	139		17.5	15.5	16	16	15.5
	140		17.5	15.5	16.0	16.0	15.5
	141		17.5	15.5	16.0	16.0	15.5
	142		17.5	15.5	16.0	16.0	15.5
	143		17.5	15.5	16.0	16.0	15.5
	144		17.5	15.5	16.0	16.0	15.5
	145		17.5	15.5	16.0	16.0	15.5
150		17.5	15.5	16.0	16.0	15.5	



		160	17.5	15.5	16.0	16.0	15.5
		170	17.5	15.5	16.0	16.0	15.5
		180	17.5	15.5	16.0	16.0	15.5
		190	17.5	15.5	16.0	16.0	15.5
		195	17.5	15.5	16.0	16.0	15.5
		196	17.5	15.5	16.0	16.0	15.5
		197	17.5	15.5	16.0	16.0	15.5
		198	17.5	15.5	16.0	16.0	15.5
		199	17.5	15.5	16.0	16.0	15.5
		200	17.5	15.5	16.0	16.0	15.5
		201	17.5	15.5	16	16	15.5
		202	17.5	15.5	16	16	15.5
		203	17.5	15.5	16	16	15.5
		204	17.5	15.5	16	16	15.5
		205	17.5	15.5	16	16	15.5
		210	17.5	15.5	16.0	16.0	15.5
		220	17.5	15.5	16.0	16.0	15.5
		230	17.5	15.5	16.0	16.0	15.5
		240	17.5	15.5	16.0	16.0	15.5
		250	17.5	15.5	16.0	16.0	15.5
		260	17.5	15.5	16.0	16.0	15.5
		270	17.5	15.5	16.0	16.0	15.5
		280	17.5	15.5	16.0	16.0	15.5
		290	17.5	15.5	16.0	16.0	15.5
		300	17.5	15.5	16.0	16.0	15.5
		310	17.5	15.5	16.0	16.0	15.5
		320	17.5	15.5	16.0	16.0	15.5
		330	17.5	15.5	16.0	16.0	15.5
		335	17.5	15.5	16.0	16.0	15.5
		336	17.5	15.5	16	16	15.5
		337	17.5	15.5	16	16	15.5
		338	17.5	15.5	16	16	15.5
		339	17.5	15.5	16	16	15.5
		340	17.5	15.5	16	16	15.5
		341	17.5	15.5	16.0	16.0	15.5
		342	17.5	15.5	16.0	16.0	15.5
		343	17.5	15.5	16.0	16.0	15.5
		344	17.5	15.5	16.0	16.0	15.5
		345	17.5	15.5	16.0	16.0	15.5
		350	17.5	15.5	16.0	16.0	15.5
		360	17.5	15.5	16.0	16.0	15.5
	Stand mode (Screen orientation is set to 0° and base is horizontal)	201	20	20.5	20.5	20.5	20.5
		202	20	20.5	20.5	20.5	20.5
		203	20	20.5	20.5	20.5	20.5
		204	20	20.5	20.5	20.5	20.5
		205	20	20.5	20.5	20.5	20.5
		210	20.0	20.5	20.5	20.5	20.5
		220	20.0	20.5	20.5	20.5	20.5
		230	20.0	20.5	20.5	20.5	20.5
		240	20.0	20.5	20.5	20.5	20.5
		250	20.0	20.5	20.5	20.5	20.5
		260	20.0	20.5	20.5	20.5	20.5
		270	20.0	20.5	20.5	20.5	20.5
		280	20.0	20.5	20.5	20.5	20.5
	290	20.0	20.5	20.5	20.5	20.5	
	300	20.0	20.5	20.5	20.5	20.5	



		310	20.0	20.5	20.5	20.5	20.5
		320	20.0	20.5	20.5	20.5	20.5
		330	20.0	20.5	20.5	20.5	20.5
		335	20.0	20.5	20.5	20.5	20.5
		336	20	20.5	20.5	20.5	20.5
		337	20	20.5	20.5	20.5	20.5
		338	20	20.5	20.5	20.5	20.5
		339	20	20.5	20.5	20.5	20.5
		340	20	20.5	20.5	20.5	20.5
	Tent mode (Screen orientation is set to 180° and base is not horizontal)	201	17.5	15.5	16.0	16.0	15.5
		202	17.5	15.5	16.0	16.0	15.5
		203	17.5	15.5	16.0	16.0	15.5
		204	17.5	15.5	16.0	16.0	15.5
		205	17.5	15.5	16.0	16.0	15.5
		210	17.5	15.5	16.0	16.0	15.5
		220	17.5	15.5	16.0	16.0	15.5
		230	17.5	15.5	16.0	16.0	15.5
		240	17.5	15.5	16.0	16.0	15.5
		250	17.5	15.5	16.0	16.0	15.5
		260	17.5	15.5	16.0	16.0	15.5
		270	17.5	15.5	16.0	16.0	15.5
		280	17.5	15.5	16.0	16.0	15.5
		290	17.5	15.5	16.0	16.0	15.5
		300	17.5	15.5	16.0	16.0	15.5
		310	17.5	15.5	16.0	16.0	15.5
		320	17.5	15.5	16.0	16.0	15.5
		330	17.5	15.5	16.0	16.0	15.5
		335	17.5	15.5	16.0	16.0	15.5
		336	17.5	15.5	16.0	16.0	15.5
		337	17.5	15.5	16.0	16.0	15.5
	338	17.5	15.5	16.0	16.0	15.5	
	339	17.5	15.5	16.0	16.0	15.5	
	340	17.5	15.5	16.0	16.0	15.5	
	Lid Close	0	standby	standby	standby	standby	standby
		10	standby	standby	standby	standby	standby
		20	standby	standby	standby	standby	standby
		30	standby	standby	standby	standby	standby
		31	standby	standby	standby	standby	standby
		32	standby	standby	standby	standby	standby
		33	standby	standby	standby	standby	standby
		34	standby	standby	standby	standby	standby
	Book (screen orientation is 90° or 270°)	35	17.5	15.5	16.0	16.0	15.5
		36	17.5	15.5	16.0	16.0	15.5
		37	17.5	15.5	16.0	16.0	15.5
		38	17.5	15.5	16.0	16.0	15.5
39		17.5	15.5	16.0	16.0	15.5	
40		17.5	15.5	16.0	16.0	15.5	
50		17.5	15.5	16.0	16.0	15.5	
60		17.5	15.5	16.0	16.0	15.5	
70		17.5	15.5	16.0	16.0	15.5	
80		17.5	15.5	16.0	16.0	15.5	
90		17.5	15.5	16.0	16.0	15.5	
100		17.5	15.5	16.0	16.0	15.5	
110		17.5	15.5	16.0	16.0	15.5	
120		17.5	15.5	16.0	16.0	15.5	
130		17.5	15.5	16.0	16.0	15.5	



Tablet (screen orientation is 90° or 270°)	140	17.5	15.5	16.0	16.0	15.5
	150	17.5	15.5	16.0	16.0	15.5
	160	17.5	15.5	16.0	16.0	15.5
	170	17.5	15.5	16.0	16.0	15.5
	180	17.5	15.5	16.0	16.0	15.5
	190	17.5	15.5	16.0	16.0	15.5
	195	17.5	15.5	16.0	16.0	15.5
	196	17.5	15.5	16.0	16.0	15.5
	197	17.5	15.5	16.0	16.0	15.5
	198	17.5	15.5	16.0	16.0	15.5
	199	17.5	15.5	16.0	16.0	15.5
	200	17.5	15.5	16.0	16.0	15.5
	201	17.5	15.5	16.0	16.0	15.5
	202	17.5	15.5	16.0	16.0	15.5
	203	17.5	15.5	16.0	16.0	15.5
	204	17.5	15.5	16.0	16.0	15.5
	205	17.5	15.5	16.0	16.0	15.5
	210	17.5	15.5	16.0	16.0	15.5
	220	17.5	15.5	16.0	16.0	15.5
	230	17.5	15.5	16.0	16.0	15.5
	240	17.5	15.5	16.0	16.0	15.5
	250	17.5	15.5	16.0	16.0	15.5
	260	17.5	15.5	16.0	16.0	15.5
	270	17.5	15.5	16.0	16.0	15.5
	280	17.5	15.5	16.0	16.0	15.5
	290	17.5	15.5	16.0	16.0	15.5
	300	17.5	15.5	16.0	16.0	15.5
	310	17.5	15.5	16.0	16.0	15.5
	320	17.5	15.5	16.0	16.0	15.5
	330	17.5	15.5	16.0	16.0	15.5
	340	17.5	15.5	16.0	16.0	15.5
	350	17.5	15.5	16.0	16.0	15.5
	360	17.5	15.5	16.0	16.0	15.5



when the screen angle is from 0 degree to 360 degree							
Screen angle (degree) v.s. power	Wireless		WLAN Ant 1/2				
	Band		2.4GHz WLAN	5.2GHz WLAN	5.3GHz WLAN	5.5GHz WLAN	5.8GHz WLAN
Tablet	360		17.5	15.5	16.0	16.0	15.5
	350		17.5	15.5	16.0	16.0	15.5
	345		17.5	15.5	16.0	16.0	15.5
	344		17.5	15.5	16.0	16.0	15.5
	343		17.5	15.5	16.0	16.0	15.5
	342		17.5	15.5	16.0	16.0	15.5
	341		17.5	15.5	16.0	16.0	15.5
	340		17.5	15.5	16	16	15.5
	339		17.5	15.5	16	16	15.5
	338		17.5	15.5	16	16	15.5
	337		17.5	15.5	16	16	15.5
	336		17.5	15.5	16	16	15.5
	335		17.5	15.5	16.0	16.0	15.5
	330		17.5	15.5	16.0	16.0	15.5
	320		17.5	15.5	16.0	16.0	15.5
	310		17.5	15.5	16.0	16.0	15.5
	300		17.5	15.5	16.0	16.0	15.5
	290		17.5	15.5	16.0	16.0	15.5
	280		17.5	15.5	16.0	16.0	15.5
	270		17.5	15.5	16.0	16.0	15.5
	260		17.5	15.5	16.0	16.0	15.5
	250		17.5	15.5	16.0	16.0	15.5
	240		17.5	15.5	16.0	16.0	15.5
	230		17.5	15.5	16.0	16.0	15.5
	220		17.5	15.5	16.0	16.0	15.5
	210		17.5	15.5	16.0	16.0	15.5
	205		17.5	15.5	16	16	15.5
	204		17.5	15.5	16	16	15.5
	203		17.5	15.5	16	16	15.5
	202		17.5	15.5	16	16	15.5
	201		17.5	15.5	16	16	15.5
	200		17.5	15.5	16.0	16.0	15.5
	199		17.5	15.5	16.0	16.0	15.5
	198		17.5	15.5	16.0	16.0	15.5
	197		17.5	15.5	16.0	16.0	15.5
	196		17.5	15.5	16.0	16.0	15.5
195		17.5	15.5	16.0	16.0	15.5	
190		17.5	15.5	16.0	16.0	15.5	
180		17.5	15.5	16.0	16.0	15.5	
170		17.5	15.5	16.0	16.0	15.5	
160		17.5	15.5	16.0	16.0	15.5	
150		17.5	15.5	16.0	16.0	15.5	
145		17.5	15.5	16.0	16.0	15.5	
144		17.5	15.5	16.0	16.0	15.5	
143		17.5	15.5	16.0	16.0	15.5	
142		17.5	15.5	16.0	16.0	15.5	
141		17.5	15.5	16.0	16.0	15.5	
140		17.5	15.5	16.0	16.0	15.5	
139		17.5	15.5	16	16	15.5	
138		17.5	15.5	16	16	15.5	
137		17.5	15.5	16	16	15.5	
136		17.5	15.5	16	16	15.5	



	Laptop	135	17.5	15.5	16	16	15.5	
		130	17.5	15.5	16.0	16.0	15.5	
		129	20.0	20.5	20.5	20.5	20.5	20.5
		128	20.0	20.5	20.5	20.5	20.5	20.5
		127	20.0	20.5	20.5	20.5	20.5	20.5
		126	20.0	20.5	20.5	20.5	20.5	20.5
		125	20.0	20.5	20.5	20.5	20.5	20.5
		120	20.0	20.5	20.5	20.5	20.5	20.5
		110	20.0	20.5	20.5	20.5	20.5	20.5
		100	20.0	20.5	20.5	20.5	20.5	20.5
		90	20.0	20.5	20.5	20.5	20.5	20.5
		80	20.0	20.5	20.5	20.5	20.5	20.5
		70	20.0	20.5	20.5	20.5	20.5	20.5
		60	20.0	20.5	20.5	20.5	20.5	20.5
		50	20.0	20.5	20.5	20.5	20.5	20.5
		40	20.0	20.5	20.5	20.5	20.5	20.5
		39	20.0	20.5	20.5	20.5	20.5	20.5
		38	20.0	20.5	20.5	20.5	20.5	20.5
		37	20.0	20.5	20.5	20.5	20.5	20.5
		36	20.0	20.5	20.5	20.5	20.5	20.5
	35	20.0	20.5	20.5	20.5	20.5	20.5	
	Lid Close	34	standby	standby	standby	standby	standby	
		33	standby	standby	standby	standby	standby	
		32	standby	standby	standby	standby	standby	
		31	standby	standby	standby	standby	standby	
		30	standby	standby	standby	standby	standby	
		20	standby	standby	standby	standby	standby	
		10	standby	standby	standby	standby	standby	
	0	standby	standby	standby	standby	standby		
	Stand mode (Screen orientation is set to 0° and base is horizontal)	340	20	20.5	20.5	20.5	20.5	
		339	20	20.5	20.5	20.5	20.5	
		338	20	20.5	20.5	20.5	20.5	
		337	20	20.5	20.5	20.5	20.5	
		336	20	20.5	20.5	20.5	20.5	
		335	20.0	20.5	20.5	20.5	20.5	
		330	20.0	20.5	20.5	20.5	20.5	
		320	20.0	20.5	20.5	20.5	20.5	
		310	20.0	20.5	20.5	20.5	20.5	
		300	20.0	20.5	20.5	20.5	20.5	
		290	20.0	20.5	20.5	20.5	20.5	
		280	20.0	20.5	20.5	20.5	20.5	
		270	20.0	20.5	20.5	20.5	20.5	
		260	20.0	20.5	20.5	20.5	20.5	
		250	20.0	20.5	20.5	20.5	20.5	
		240	20.0	20.5	20.5	20.5	20.5	
230		20.0	20.5	20.5	20.5	20.5		
220		20.0	20.5	20.5	20.5	20.5		
210	20.0	20.5	20.5	20.5	20.5			
205	20	20.5	20.5	20.5	20.5			
204	20	20.5	20.5	20.5	20.5			
203	20	20.5	20.5	20.5	20.5			
202	20	20.5	20.5	20.5	20.5			
201	20	20.5	20.5	20.5	20.5			
Tent mode (Screen orientation is set to 180° and base is not)	340	17.5	15.5	16.0	16.0	15.5		
	339	17.5	15.5	16.0	16.0	15.5		
	338	17.5	15.5	16.0	16.0	15.5		



horizontal)	337	17.5	15.5	16.0	16.0	15.5	
	336	17.5	15.5	16.0	16.0	15.5	
	335	17.5	15.5	16.0	16.0	15.5	
	330	17.5	15.5	16.0	16.0	15.5	
	320	17.5	15.5	16.0	16.0	15.5	
	310	17.5	15.5	16.0	16.0	15.5	
	300	17.5	15.5	16.0	16.0	15.5	
	290	17.5	15.5	16.0	16.0	15.5	
	280	17.5	15.5	16.0	16.0	15.5	
	270	17.5	15.5	16.0	16.0	15.5	
	260	17.5	15.5	16.0	16.0	15.5	
	250	17.5	15.5	16.0	16.0	15.5	
	240	17.5	15.5	16.0	16.0	15.5	
	230	17.5	15.5	16.0	16.0	15.5	
	220	17.5	15.5	16.0	16.0	15.5	
	210	17.5	15.5	16	16	15.5	
	205	17.5	15.5	16.0	16.0	15.5	
	204	17.5	15.5	16.0	16.0	15.5	
	203	17.5	15.5	16.0	16.0	15.5	
	202	17.5	15.5	16.0	16.0	15.5	
	201	17.5	15.5	16.0	16.0	15.5	
	Tablet (screen orientation is 90° or 270°)	360	20.0	20.5	20.5	20.5	20.5
		350	20.0	20.5	20.5	20.5	20.5
		340	20.0	20.5	20.5	20.5	20.5
		330	20.0	20.5	20.5	20.5	20.5
		320	20.0	20.5	20.5	20.5	20.5
		310	20.0	20.5	20.5	20.5	20.5
		300	20.0	20.5	20.5	20.5	20.5
		290	20.0	20.5	20.5	20.5	20.5
		280	20.0	20.5	20.5	20.5	20.5
		270	20.0	20.5	20.5	20.5	20.5
		260	20.0	20.5	20.5	20.5	20.5
		250	20.0	20.5	20.5	20.5	20.5
		240	20.0	20.5	20.5	20.5	20.5
		230	20.0	20.5	20.5	20.5	20.5
		220	20.0	20.5	20.5	20.5	20.5
		210	20.0	20.5	20.5	20.5	20.5
		205	20.0	20.5	20.5	20.5	20.5
		204	20.0	20.5	20.5	20.5	20.5
203	20.0	20.5	20.5	20.5	20.5		
202	20.0	20.5	20.5	20.5	20.5		
201	20.0	20.5	20.5	20.5	20.5		
Book (screen orientation is 90° or 270°)	200	17.5	15.5	16.0	16.0	15.5	
	199	17.5	15.5	16.0	16.0	15.5	
	198	17.5	15.5	16.0	16.0	15.5	
	197	17.5	15.5	16.0	16.0	15.5	
	196	17.5	15.5	16.0	16.0	15.5	
	195	17.5	15.5	16.0	16.0	15.5	
	190	17.5	15.5	16.0	16.0	15.5	
	180	17.5	15.5	16.0	16.0	15.5	
	170	17.5	15.5	16.0	16.0	15.5	
	160	17.5	15.5	16.0	16.0	15.5	
	150	17.5	15.5	16.0	16.0	15.5	
	140	17.5	15.5	16.0	16.0	15.5	
130	17.5	15.5	16.0	16.0	15.5		
120	17.5	15.5	16.0	16.0	15.5		



		110	17.5	15.5	16.0	16.0	15.5
		100	17.5	15.5	16.0	16.0	15.5
		90	17.5	15.5	16.0	16.0	15.5
		80	17.5	15.5	16.0	16.0	15.5
		70	17.5	15.5	16.0	16.0	15.5
		60	17.5	15.5	16.0	16.0	15.5
		50	17.5	15.5	16.0	16.0	15.5
		40	17.5	15.5	16.0	16.0	15.5
		39	17.5	15.5	16.0	16.0	15.5
		38	17.5	15.5	16.0	16.0	15.5
		37	17.5	15.5	16.0	16.0	15.5
		36	17.5	15.5	16.0	16.0	15.5
		35	17.5	15.5	16.0	16.0	15.5
		Lid Close	34	standby	standby	standby	standby
	33		standby	standby	standby	standby	standby
	32		standby	standby	standby	standby	standby
	31		standby	standby	standby	standby	standby
	30		standby	standby	standby	standby	standby
	20	standby	standby	standby	standby	standby	
	10	standby	standby	standby	standby	standby	
	0	standby	standby	standby	standby	standby	



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

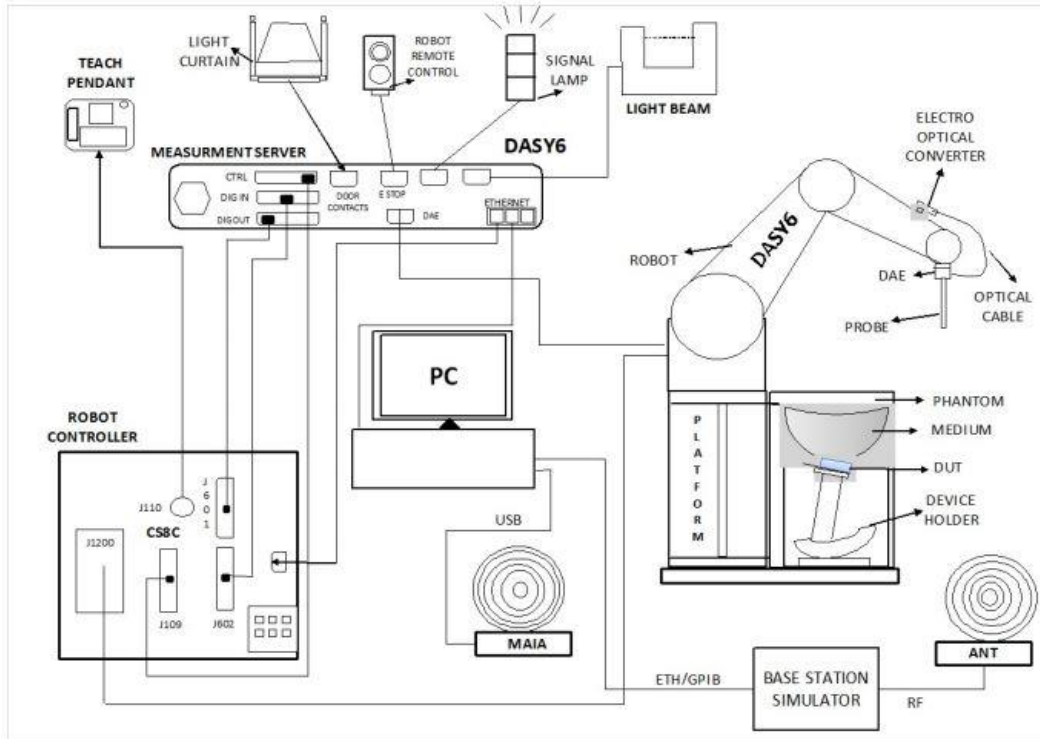

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2019	Nov. 18, 2022
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 15, 2021	Sep. 14, 2022
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 26, 2022	Jan. 25, 2023
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 28, 2022	Feb. 27, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 21, 2021	Oct. 20, 2022
RCPTWN	Thermometer	HTC-1	TM560-2	Oct. 28, 2021	Oct. 27, 2022
R&S	BT Base Station	CBT32	101136	Oct. 17, 2021	Oct. 16, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 24, 2021	Oct. 23, 2022
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2021	Sep. 18, 2022
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 24, 2021	Sep. 23, 2022
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Oct. 26, 2021	Oct. 25, 2022
Anritsu	Power Meter	ML2495A	1419002	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Meter	ML2495A	1804003	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Power Sensor	MA2411B	1726150	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 16, 2021	Jul. 15, 2022
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 12, 2022	Jan. 11, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 12, 2021	Oct. 11, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 06, 2021	Sep. 05, 2022
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
2450	22.4	1.836	39.627	1.80	39.20	2.00	1.09	±5	2022/3/11
2450	22.6	1.838	39.639	1.80	39.20	2.11	1.12	±5	2022/3/17
5250	22.6	4.870	37.412	4.71	35.95	3.40	4.07	±5	2022/3/10
5600	22.6	5.266	36.854	5.07	35.50	3.87	3.81	±5	2022/3/10
5750	22.6	5.413	36.670	5.22	35.35	3.70	3.73	±5	2022/3/10

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Power Drift (dB)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR09	2022/3/11	2450	50	D2450V2-929	EX3DV4 - SN3931	DAE4 Sn316	-0.11	2.670	53.10	53.4	0.56
SAR09	2022/3/17	2450	250	D2450V2-929	EX3DV4 - SN3931	DAE4 Sn1399	0.05	14.000	53.10	56	5.46
SAR09	2022/3/10	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN3931	DAE4 Sn316	0.01	8.710	81.70	87.1	6.61
SAR09	2022/3/10	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN3931	DAE4 Sn316	-0.01	9.220	85.10	92.2	8.34
SAR09	2022/3/10	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN3931	DAE4 Sn316	0.08	8.800	81.40	88	8.11

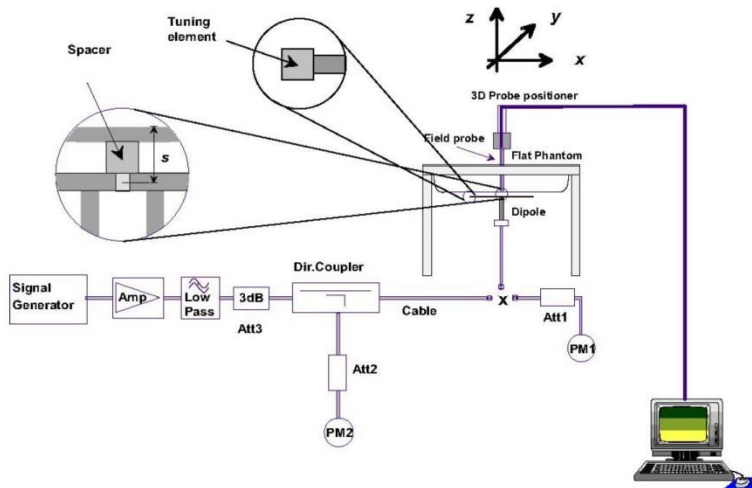


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo



10. WiFi/Bluetooth Output Power (Unit: dBm)

General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.



<Tablet Mode>

2.4GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11b 1Mbps	1	2412	17.30	17.50	100.00	17.20	17.50	100.00				
	6	2437	17.40	17.50		17.30	17.50					
	11	2462	17.50	17.50		17.10	17.50					
	12	2467	13.90	14.00		13.80	14.00					
	13	2472	13.00	13.00		12.70	13.00					
802.11g 6Mbps	1	2412	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	17.00	Not Required	
	6	2437		17.50			17.50			17.50		
	11	2462		14.00			14.00			17.00		
	12	2467		11.00			11.00			14.00		
	13	2472		8.00			8.00			11.00		
802.11n-HT20 MCS0	1	2412	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	17.00	Not Required	
	6	2437		17.50			17.50			17.50		
	11	2462		14.00			14.00			17.00		
	12	2467		11.00			11.00			14.00		
	13	2472		8.00			8.00			11.00		
802.11n-HT40 MCS0	3	2422	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	16.00	Not Required	
	6	2437		17.00			17.00			17.50		
	9	2452		14.00			14.00			17.00		
	10	2457		11.00			11.00			14.00		
	11	2462		8.00			8.00			10.50		
802.11ac-VHT20 MCS0	1	2412	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	17.00	Not Required	
	6	2437		17.50			17.50			17.50		
	11	2462		14.00			14.00			17.00		
	12	2467		11.00			11.00			14.00		
	13	2472		8.00			8.00			11.00		
802.11ac-VHT40 MCS0	3	2422	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	16.00	Not Required	
	6	2437		17.00			17.00			17.50		
	9	2452		14.00			14.00			17.00		
	10	2457		11.00			11.00			14.00		
	11	2462		8.00			8.00			10.50		



5.2GHz WLAN				Ant 1			Ant 2			Ant 1+2		
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		36	5180	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	15.50
40			5200	15.50		15.50						
44			5220	15.50		15.50						
48			5240	15.50		15.50						
802.11n-HT20 MCS0		36	5180	15.50		15.50						
		40	5200	15.50		15.50						
		44	5220	15.50		15.50						
		48	5240	15.50		15.50						
802.11n-HT40 MCS0		38	5190	15.50		15.50						
		46	5230	15.50		15.50						
802.11ac-VHT20 MCS0		36	5180	15.50		15.50						
		40	5200	15.50		15.50						
		44	5220	15.50		15.50						
		48	5240	15.50		15.50						
802.11ac-VHT40 MCS0		38	5190	15.50		15.50						
		46	5230	15.50		15.50						
802.11ac-VHT80 MCS0		42	5210	15.50	15.50							

5.3GHz WLAN				Ant 1			Ant 2			Ant 1+2								
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %						
	802.11a 6Mbps		52	5260	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	16.00	Not Required					
56			5280	16.00		16.00												
60			5300	16.00		16.00												
64			5320	16.00		16.00												
802.11n-HT20 MCS0		52	5260	16.00		16.00												
		56	5280	16.00		16.00												
		60	5300	16.00		16.00												
		64	5320	16.00		16.00												
802.11n-HT40 MCS0		54	5270	15.70		16.00			100.00			15.70		16.00	100.00	Not Required	16.00	Not Required
		62	5310	15.80		16.00			15.80			16.00						
802.11ac-VHT20 MCS0		52	5260	16.00		16.00												
		56	5280	16.00		16.00												
		60	5300	16.00		16.00												
		64	5320	16.00		16.00												
802.11ac-VHT40 MCS0		54	5270	16.00		16.00												
		62	5310	16.00		16.00												
802.11ac-VHT80 MCS0		58	5290	15.90	16.00	100.00	15.70	16.00	100.00	16.00								



5.5GHz WLAN				Ant 1			Ant 2			Ant 1+2		
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		100	5500	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	16.00
116			5580	16.00		16.00						
124			5620	16.00		16.00						
132			5660	16.00		16.00						
144			5720	16.00		16.00						
802.11n-HT20 MCS0		100	5500	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	16.00	Not Required
		116	5580		16.00			16.00				
		124	5620		16.00			16.00				
		132	5660		16.00			16.00				
		144	5720		16.00			16.00				
802.11n-HT40 MCS0		102	5510	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	16.00	Not Required
		110	5550		16.00			16.00				
		126	5630		16.00			16.00				
		134	5670		16.00			16.00				
802.11ac-VHT20 MCS0		100	5500	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	16.00	Not Required
		116	5580		16.00			16.00				
		124	5620		16.00			16.00				
		132	5660		16.00			16.00				
802.11ac-VHT40 MCS0		102	5510	Not Required	16.00	Not Required	Not Required	16.00	Not Required	Not Required	16.00	Not Required
		110	5550		16.00			16.00				
		126	5630		16.00			16.00				
		134	5670		16.00			16.00				
802.11ac-VHT80 MCS0		106	5530	15.70	16.00	100.00	16.00	16.00	100.00	16.00	Not Required	
		122	5610	15.90	16.00		16.00	16.00				
		138	5690	15.70	16.00		15.80	16.00				

5.8GHz WLAN				Ant 1			Ant 2			Ant 1+2		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		149	5745	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	15.50
157			5785	15.50		15.50						
165			5825	15.50		15.50						
802.11n-HT20 MCS0		149	5745	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	15.50	Not Required
		157	5785		15.50			15.50				
		165	5825		15.50			15.50				
802.11n-HT40 MCS0		151	5755	15.50	15.50	100.00	15.40	15.50	100.00	15.50	Not Required	
		159	5795	15.50	15.50		15.30	15.50				
802.11ac-VHT20 MCS0		149	5745	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	15.50	Not Required
		157	5785		15.50			15.50				
		165	5825		15.50			15.50				
802.11ac-VHT40 MCS0		151	5755	Not Required	15.50	Not Required	Not Required	15.50	Not Required	Not Required	15.50	Not Required
		159	5795		15.50			15.50				
802.11ac-VHT80 MCS0		155	5775	15.50	15.50	100.00	15.20	15.50	100.00	15.50	Not Required	



<Laptop Mode>

2.4GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11b 1Mbps	1	2412	18.70	19.00	100.00	18.70	19.00	100.00				
	6	2437	19.70	20.00		19.80	20.00					
	11	2462	18.80	19.00		18.80	19.00					
	12	2467	13.90	14.00		13.80	14.00					
	13	2472	13.00	13.00		12.70	13.00					
802.11g 6Mbps	1	2412	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	17.00	Not Required	
	6	2437		20.00			20.00			23.00		
	11	2462		14.00			14.00			17.00		
	12	2467		11.00			11.00			14.00		
	13	2472		8.00			8.00			11.00		
802.11n-HT20 MCS0	1	2412	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	17.00	Not Required	
	6	2437		20.00			20.00			23.00		
	11	2462		14.00			14.00			17.00		
	12	2467		11.00			11.00			14.00		
	13	2472		8.00			8.00			11.00		
802.11n-HT40 MCS0	3	2422	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	16.00	Not Required	
	6	2437		17.00			17.00			20.00		
	9	2452		14.00			14.00			17.00		
	10	2457		11.00			11.00			14.00		
	11	2462		8.00			8.00			10.50		
802.11ac-VHT20 MCS0	1	2412	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	17.00	Not Required	
	6	2437		20.00			20.00			23.00		
	11	2462		14.00			14.00			17.00		
	12	2467		11.00			11.00			14.00		
	13	2472		8.00			8.00			11.00		
802.11ac-VHT40 MCS0	3	2422	Not Required	14.00	Not Required	Not Required	14.00	Not Required	Not Required	16.00	Not Required	
	6	2437		17.00			17.00			20.00		
	9	2452		14.00			14.00			17.00		
	10	2457		11.00			11.00			14.00		
	11	2462		8.00			8.00			10.50		



5.2GHz WLAN				Ant 1			Ant 2			Ant 1+2			
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
	802.11a 6Mbps	36	5180	Not Required	18.00	Not Required	Not Required	19.50	19.50	Not Required	Not Required	19.50	Not Required
		40	5200					20.50	20.50				
		44	5220					20.50	20.50				
		48	5240					20.50	20.50				
	802.11n-HT20 MCS0	36	5180					19.50	19.50				
		40	5200					20.50	20.50				
		44	5220					20.50	20.50				
		48	5240					20.50	20.50				
	802.11n-HT40 MCS0	38	5190					18.00	18.00				
		46	5230					19.50	19.50				
	802.11ac-VHT20 MCS0	36	5180					19.50	19.50				
		40	5200					20.50	20.50				
44		5220	20.50					20.50					
48		5240	20.50	20.50									
802.11ac-VHT40 MCS0	38	5190	18.00	18.00									
	46	5230	19.50	19.50									
802.11ac-VHT80 MCS0	42	5210	17.50	17.50									

5.3GHz WLAN				Ant 1			Ant 2			Ant 1+2					
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
	802.11a 6Mbps	52	5260	20.30	20.50	100.00	20.40	20.50	100.00	Not Required	Not Required	21.50	Not Required		
		56	5280	20.50	20.50		20.30	20.50				21.50			
		60	5300	20.50	20.50		20.50	20.50				21.00			
		64	5320	19.70	20.00		19.90	20.00				21.50			
	802.11n-HT20 MCS0	52	5260	Not Required	20.50	Not Required	Not Required	20.50	Not Required			21.50			
		56	5280									20.50		20.50	21.50
		60	5300									20.50		20.50	21.00
		64	5320									20.00		20.00	21.50
	802.11n-HT40 MCS0	54	5270									19.50		19.50	
		62	5310									17.50		17.50	
	802.11ac-VHT20 MCS0	52	5260									20.50		20.50	
		56	5280									20.50		20.50	
60		5300	20.50									20.50			
64		5320	20.00							20.00					
802.11ac-VHT40 MCS0	54	5270	19.50							19.50					
	62	5310	17.50							17.50					
802.11ac-VHT80 MCS0	58	5290	17.00							17.00					



5.5GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	18.90	19.00	100.00	18.90	19.00	100.00	Not Required	19.50	Not Required	
	116	5580	20.30	20.50		20.30	20.50			21.50		
	124	5620	20.20	20.50		20.30	20.50			21.50		
	132	5660	20.30	20.50		20.20	20.50			21.50		
	144	5720	20.30	20.50		20.20	20.50			21.50		
802.11n-HT20 MCS0	100	5500	Not Required	19.00	Not Required	19.00	Not Required	Not Required	19.50	Not Required		
	116	5580		20.50		20.50			21.50			
	124	5620		20.50		20.50			21.50			
	132	5660		20.50		20.50			21.50			
	144	5720		20.50		20.50			21.50			
802.11n-HT40 MCS0	102	5510	Not Required	16.00	Not Required	16.00	Not Required	Not Required	18.00	Not Required		
	110	5550		19.50		19.50			21.50			
	126	5630		19.50		19.50			21.50			
	134	5670		19.50		19.50			21.50			
	142	5710		19.50		19.50			21.50			
802.11ac-VHT20 MCS0	100	5500	Not Required	19.00	Not Required	19.00	Not Required	Not Required	19.50	Not Required		
	116	5580		20.50		20.50			21.50			
	124	5620		20.50		20.50			21.50			
	132	5660		20.50		20.50			21.50			
	144	5720		20.50		20.50			21.50			
802.11ac-VHT40 MCS0	102	5510	Not Required	16.00	Not Required	16.00	Not Required	Not Required	18.00	Not Required		
	110	5550		19.50		19.50			21.50			
	126	5630		19.50		19.50			21.50			
	134	5670		19.50		19.50			21.50			
	142	5710		19.50		19.50			21.50			
802.11ac-VHT80 MCS0	106	5530	Not Required	16.00	Not Required	16.00	Not Required	Not Required	17.00	Not Required		
	122	5610		19.50		19.50			21.00			
	138	5690		19.50		19.50			21.50			

5.8GHz WLAN				Ant 1			Ant 2			Ant 1+2		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	149	5745	20.50	20.50	100.00	20.30	20.50	100.00	Not Required	23.50	Not Required	
	157	5785	20.40	20.50		20.10	20.50			23.50		
	165	5825	20.30	20.50		20.30	20.50			23.50		
802.11n-HT20 MCS0	149	5745	Not Required	20.50	Not Required	20.50	Not Required	Not Required	23.50	Not Required		
	157	5785		20.50		20.50			23.50			
	165	5825		20.50		20.50			23.50			
802.11n-HT40 MCS0	151	5755	Not Required	19.50	Not Required	19.50	Not Required	Not Required	22.50	Not Required		
	159	5795		19.50		19.50			22.50			
802.11ac-VHT20 MCS0	149	5745	Not Required	20.50	Not Required	20.50	Not Required	Not Required	23.50	Not Required		
	157	5785		20.50		20.50			23.50			
	165	5825		20.50		20.50			23.50			
802.11ac-VHT40 MCS0	151	5755	Not Required	19.50	Not Required	19.50	Not Required	Not Required	22.50	Not Required		
	159	5795		19.50		19.50			22.50			
802.11ac-VHT80 MCS0	155	5775	Not Required	19.50	Not Required	19.50	Not Required	Not Required	20.00	Not Required		




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	6.00	6.00	6.00
	CH 39	2441	6.00	6.00	6.00
	CH 78	2480	6.00	6.00	6.00
Tune-up Limit			6.00	6.00	6.00

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	5.90	5.90
	CH 19	2440	5.90	5.90
	CH 39	2480	6.00	6.00
Tune-up Limit			6.00	6.00


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 100% considered in SAR testing.

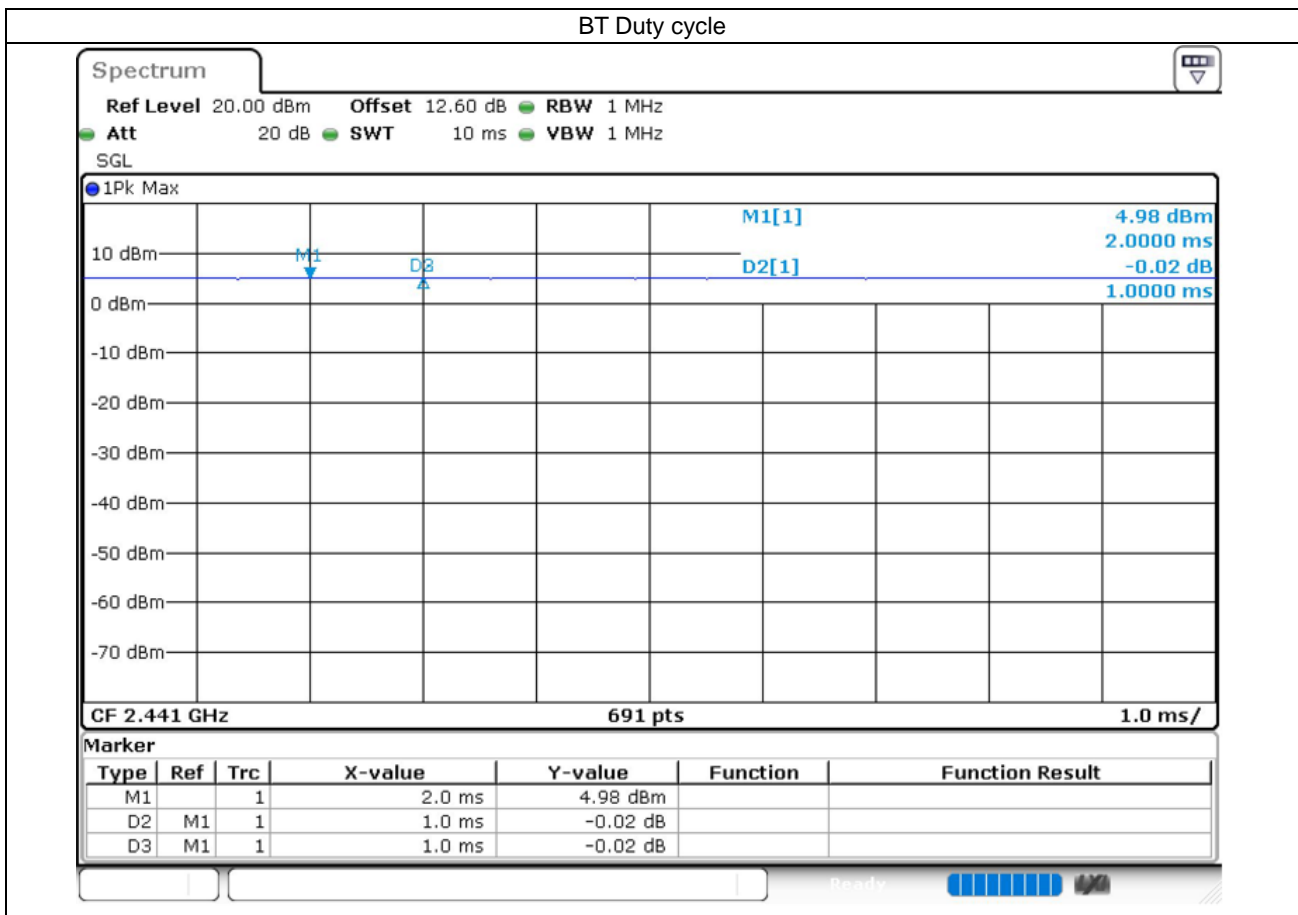

11. Antenna Location


<Tablet mode>

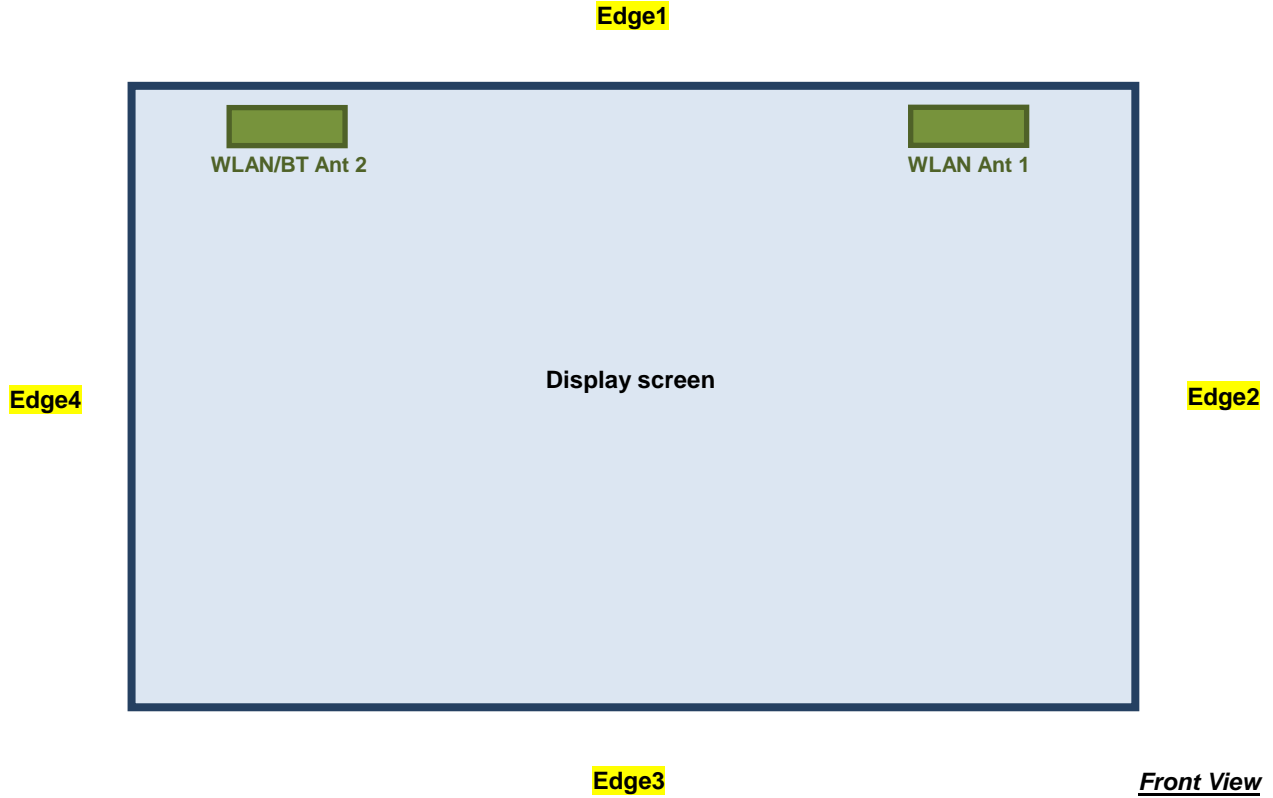

The separation distance for antenna to edge :

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WLAN Antenna 1	2.6	56.8	221.4	255.8
WLAN/BT Antenna 2	2.6	225.8	221.4	56.8

<Laptop mode>

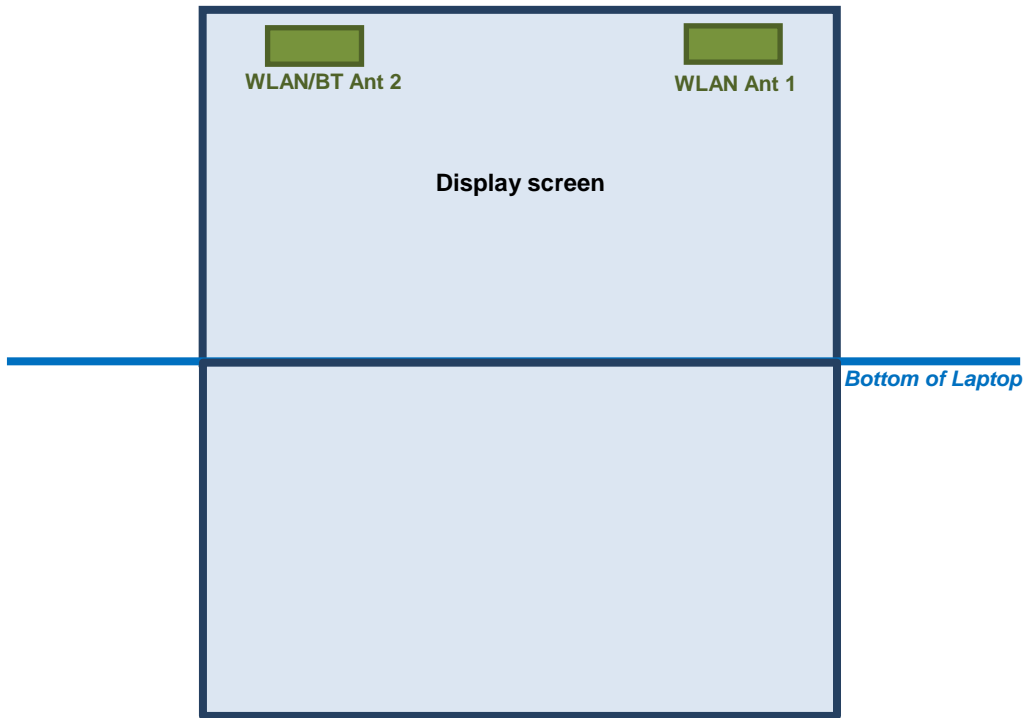

The separation distance for antenna to edge :

Antenna	To Bottom of Laptop (mm)
WLAN Antenna 1	221.97
WLAN/BT Antenna 2	221.97



<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

<Tablet Mode>

Exposure Position	Wireless Interface	2.4GHz WLAN ANT 1	2.4GHz WLAN/BT ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
	Calculated Frequency (MHz)		2472	2472	5825
Maximum power (dBm)		17.5	17.5	16.0	16.0
Maximum rated power(mW)		56.23	56.23	39.81	39.81
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	17.7	17.7	19.2	19.2
	Testing required?	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	17.7	17.7	19.2	19.2
	Testing required?	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	56.8	225.8	56.8	225.8
	exclusion threshold	163.0	1853.0	130.0	1820.0
	Testing required?	No	No	No	No
Edge 3	Separation distance(mm)	221.4	221.4	221.4	221.4
	exclusion threshold	1809.0	1809.0	1776.0	1776.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	255.8	56.8	255.8	56.8
	exclusion threshold	2153.0	163.0	2120.0	130.0
	Testing required?	No	No	No	No

<Laptop Mode>

Exposure Position	Wireless Interface	2.4GHz WLAN ANT 1	2.4GHz WLAN ANT 2	5GHz WLAN ANT 1	5GHz WLAN ANT 2
	Calculated Frequency (MHz)		2472	2472	5825
Maximum power (dBm)		20.0	20.0	20.5	20.5
Maximum rated power(mW)		100.00	100.00	112.20	112.20
Bottom of Laptop	Separation distance(mm)	221.4	221.4	221.4	221.4
	exclusion threshold	1809.0	1809.0	1776.0	1776.0
	Testing required?	No	No	No	No



12. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for WLAN5.2GHz band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



12.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	configure (Tablet / Laptop)	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	Tablet	11	2462	INPAQ	17.50	17.50	1.000	100	1.000	-0.1	0.209	0.209
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 1	Tablet	11	2462	INPAQ	17.50	17.50	1.000	100	1.000	-0.07	0.814	0.814
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 1	Tablet	6	2437	INPAQ	17.40	17.50	1.023	100	1.000	-0.03	0.703	0.719
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 1	Tablet	1	2412	INPAQ	17.30	17.50	1.047	100	1.000	0.09	0.514	0.538
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 1	Tablet	11	2462	WNC	17.50	17.50	1.000	100	1.000	-0.01	0.486	0.486
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 2	Tablet	6	2437	INPAQ	17.30	17.50	1.047	100	1.000	-0.1	0.273	0.286
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 2	Tablet	6	2437	INPAQ	17.30	17.50	1.047	100	1.000	0.02	0.595	0.623
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 2	Tablet	1	2412	INPAQ	17.20	17.50	1.072	100	1.000	0.05	0.622	0.666
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 2	Tablet	11	2462	INPAQ	17.10	17.50	1.096	100	1.000	0.03	0.566	0.621
01	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 2	Tablet	1	2412	WNC	17.20	17.50	1.072	100	1.000	-0.03	0.762	0.816
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 2	Tablet	6	2437	WNC	17.30	17.50	1.047	100	1.000	-0.08	0.700	0.733
	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 2	Tablet	11	2462	WNC	17.10	17.50	1.096	100	1.000	-0.03	0.701	0.769
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	Tablet	58	5290	INPAQ	15.90	16.00	1.023	100	1.000	-0.04	0.080	0.082
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	58	5290	INPAQ	15.90	16.00	1.023	100	1.000	-0.01	0.706	0.722
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	58	5290	WNC	15.90	16.00	1.023	100	1.000	-0.16	0.815	0.834
	WLAN5GHz	802.11n-HT40 MCS0	Edge1	0mm	Ant 1	Tablet	62	5310	WNC	15.80	16.00	1.047	100	1.000	0.011	0.515	0.539
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	58	5290	INPAQ	15.70	16.00	1.072	100	1.000	0.09	0.043	0.046
02	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	58	5290	INPAQ	15.70	16.00	1.072	100	1.000	-0.11	0.882	0.945
	WLAN5GHz	802.11n-HT40 MCS0	Edge1	0mm	Ant 2	Tablet	62	5310	INPAQ	15.80	16.00	1.047	100	1.000	-0.18	0.817	0.856
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	58	5290	WNC	15.70	16.00	1.072	100	1.000	-0.16	0.703	0.753
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	Tablet	122	5610	INPAQ	15.90	16.00	1.023	100	1.000	-0.05	0.165	0.169
03	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	122	5610	INPAQ	15.90	16.00	1.023	100	1.000	-0.11	1.210	1.238
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	106	5530	INPAQ	15.70	16.00	1.072	100	1.000	-0.12	0.782	0.838
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	138	5690	INPAQ	15.70	16.00	1.072	100	1.000	-0.05	0.568	0.609
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	122	5610	WNC	15.90	16.00	1.023	100	1.000	-0.02	0.764	0.782
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	106	5530	INPAQ	16.00	16.00	1.000	100	1.000	-0.1	0.049	0.049
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	106	5530	INPAQ	16.00	16.00	1.000	100	1.000	0.02	0.544	0.544
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	122	5610	INPAQ	16.00	16.00	1.000	100	1.000	0.18	0.621	0.621
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	138	5690	INPAQ	15.80	16.00	1.047	100	1.000	0.1	0.785	0.822
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	138	5690	WNC	15.80	16.00	1.047	100	1.000	0.14	1.060	1.110
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	106	5530	WNC	16.00	16.00	1.000	100	1.000	0.03	0.854	0.854
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	122	5610	WNC	16.00	16.00	1.000	100	1.000	0.05	0.862	0.862
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 1	Tablet	155	5775	INPAQ	15.50	15.50	1.000	100	1.000	-0.04	0.094	0.094
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	155	5775	INPAQ	15.50	15.50	1.000	100	1.000	0.14	0.731	0.731
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	155	5775	WNC	15.50	15.50	1.000	100	1.000	0.01	1.040	1.040
	WLAN5GHz	802.11n-HT40 MCS0	Edge1	0mm	Ant 1	Tablet	151	5755	WNC	15.50	15.50	1.000	100	1.000	0.04	0.831	0.831
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant 2	Tablet	155	5775	INPAQ	15.20	15.50	1.072	100	1.000	-0.07	0.031	0.033
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	155	5775	INPAQ	15.20	15.50	1.072	100	1.000	0	0.449	0.481
04	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	155	5775	WNC	15.20	15.50	1.072	100	1.000	-0.07	1.110	1.189
	WLAN5GHz	802.11n-HT40 MCS0	Edge1	0mm	Ant 2	Tablet	151	5755	WNC	15.40	15.50	1.023	100	1.000	0.04	1.030	1.054



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Configure (Tablet / Laptop)	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom Face	0mm	Ant 2	Tablet	0	2402	INPAQ	6.00	6.00	1.000	100	1.000	0	0.001	0.001
	Bluetooth	1Mbps	Edge1	0mm	Ant 2	Tablet	0	2402	INPAQ	6.00	6.00	1.000	100	1.000	0	0.009	0.009
	Bluetooth	1Mbps	Edge1	0mm	Ant 2	Tablet	39	2441	INPAQ	6.00	6.00	1.000	100	1.000	-0.18	0.012	0.012
	Bluetooth	1Mbps	Edge1	0mm	Ant 2	Tablet	78	2480	INPAQ	6.00	6.00	1.000	100	1.000	0	0.014	0.014
05	Bluetooth	1Mbps	Edge1	0mm	Ant 2	Tablet	0	2402	WNC	6.00	6.00	1.000	100	1.000	-0.02	0.049	0.049
	Bluetooth	1Mbps	Edge1	0mm	Ant 2	Tablet	39	2441	WNC	6.00	6.00	1.000	100	1.000	-0.08	0.030	0.030
	Bluetooth	1Mbps	Edge1	0mm	Ant 2	Tablet	78	2480	WNC	6.00	6.00	1.000	100	1.000	-0.02	0.030	0.030

12.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Configure (Tablet / Laptop)	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 1	Tablet	11	2462	INPAQ	17.50	17.50	1.000	100	1.000	-0.07	0.814	-	0.814
2nd	WLAN2.4GHz	802.11b 1Mbps	Edge1	0mm	Ant 1	Tablet	11	2462	INPAQ	17.50	17.50	1.000	100	1.000	-0.18	0.802	1.015	0.802
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	58	5290	INPAQ	15.70	16.00	1.072	100	1.000	-0.11	0.882	-	0.945
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	58	5290	INPAQ	15.70	16.00	1.072	100	1.000	-0.18	0.808	1.092	0.866
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	122	5610	INPAQ	15.90	16.00	1.023	100	1.000	-0.11	1.210	-	1.238
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 1	Tablet	122	5610	INPAQ	15.90	16.00	1.023	100	1.000	0.13	1.200	1.008	1.228
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	155	5775	WNC	15.20	15.50	1.072	100	1.000	-0.07	1.110	-	1.189
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Edge1	0mm	Ant 2	Tablet	155	5775	WNC	15.20	15.50	1.072	100	1.000	-0.04	0.999	1.111	1.070

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WLAN2.4GHz Ant 1+ WLAN2.4GHz Ant 2	Yes
2.	WLAN5GHz Ant 1+ WLAN5GHz Ant 2	Yes
3.	WLAN2.4GHz Ant 2 + Bluetooth Ant 2	Yes
4.	WLAN5GHz Ant 2 + Bluetooth Ant 2	Yes

General Note:

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 13.2.


13.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	3+4 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)	4+5 Summed 1g SAR (W/kg)	SPLSR	Case No
	WLAN2.4GHz Ant 1 1g SAR (W/kg)	WLAN2.4GHz Ant 2 1g SAR (W/kg)	WLAN5GHz Ant 1 1g SAR (W/kg)	WLAN5GHz Ant 2 1g SAR (W/kg)	Bluetooth Ant 2 1g SAR (W/kg)						
Bottom Face at 0mm	0.209	0.286	0.169	0.049	0.001	0.495	0.218	0.287	0.050		
Edge1 at 0mm	0.814	0.816	1.238	1.189	0.049	1.630	2.427	0.865	1.238	0.020	Case 1

13.2 SPLSR Evaluation and Analysis

General Note:

1. Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
2. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
3. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

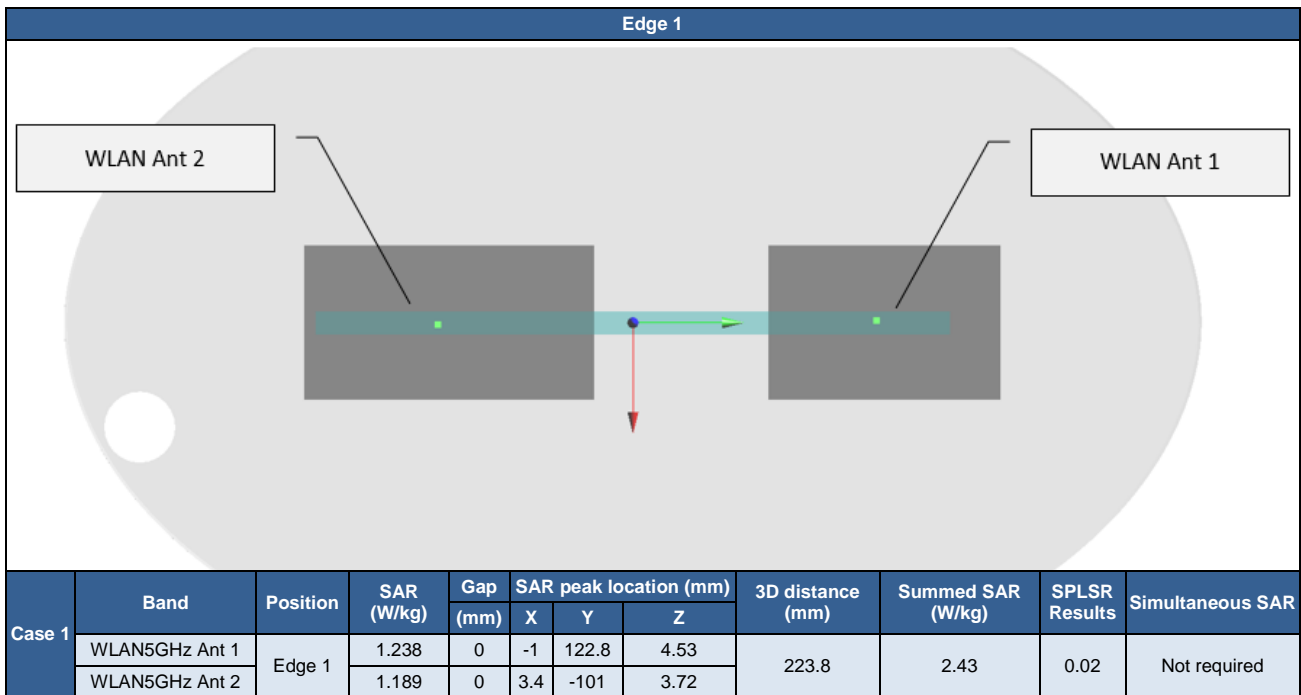

Test Engineer : Bob Cheng and Ray Sun



14. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

15. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.