



TEST REPORT

EUT Description	WWAN module installed in Convertible PC
Brand Name	HP
Model Name	HSN-I61C
FCC ID / ISED ID	B94HNI61CKLU / 21374-FM350GL16
Date of Test Start/End	2024-01-03 / 2024-01-31
Features	WWAN (LTE, UMTS), WLAN, BT (see section 5)
Description	Platform: HSN-I61C + Antenna Vendors 1 & 2

Applicant	HP Inc.
Address	1501 Page Mill Road, Palo Alto CA 94304 USA
Contact Person	Sam Lin
Telephone / Email	+886 2 37896331 / sam.lin2@hp.com

Reference Standards	FCC 47 CFR Part §2.1093 RSS-102, issue 5 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	0.79 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	0mm to phantom, 1.90 mm to antenna edge	

Test Report identification	231128-03.TR05
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by

Reviewed by

Yamine HADDAD
(Test Engineer)

Adel LOUNES
(Test Lead Engineer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600 Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	11
7. Test Verdicts summary	12
8. Document Revision History	12
Annex A. Test & System Description	13
A.1 SAR DEFINITION	13
A.2 SPEAG SAR MEASUREMENT SYSTEM.....	14
A.2.1 SAR Measurement Setup	14
A.2.2 E-Field Measurement Probe	15
A.2.4 Flat Phantom.....	15
A.2.5 Device Positioner	16
A.3 DATA EVALUATION.....	17
A.4 SYSTEM AND LIQUID CHECK.....	19
A.4.1 System Check.....	19
A.4.2 Liquid Check	20
A.5 TEST EQUIPMENT LIST	21
A.5.1 SAR System #3.....	21
A.5.2 Shared Instrumentation.....	21
A.5.3 Tissue Simulant Liquid.....	21
A.6 MEASUREMENT UNCERTAINTY EVALUATION	22
A.7 RF EXPOSURE LIMITS.....	23
Annex B. Test Results	24
B.1 TEST CONDITIONS	24
B.1.1 Test SAR Test positions relative to the phantom	24
B.2 TEST SIGNAL, OUTPUT POWER AND TEST FREQUENCIES.....	25
B.3 EVALUATION EXCLUSION AND TEST REDUCTIONS.....	26
B.4 CONDUCTED POWER MEASUREMENTS TABLET MODE	30
B.4.1 WCDMA/ HSPA/ DC-HSPA	30
B.4.2 LTE	33
B.5 TISSUE PARAMETERS MEASUREMENT.....	57
B.6 SYSTEM CHECK MEASUREMENTS	57
B.7 SAR TEST RESULTS.....	58
B.7.1 WCDMA.....	58
B.7.1.1 WCDMA II.....	58
B.7.1.2 WCDMA IV.....	58
B.7.1.3 WCDMA V.....	58
B.7.2 LTE	59
B.7.3 Bystander evaluation.....	65
B.8 SAR Measurement Variability	66
B.9 Simultaneous Transmission SAR Evaluation	67
Annex C. Test System Plots.....	69
Annex D. TSL Dielectric Parameters.....	95

D.1 BODY 650MHZ-1950MHZ.....	95
D.2 BODY 2250MHZ-3800MHZ.....	97
Annex E. Calibration Certificates	99
Annex F. Photographs	101
F.1 TEST SAMPLES	101
F.2 TEST POSITIONS	103
F.3 ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY.....	105
F.4 PHANTOM LIQUID LEVEL DURING MEASUREMENTS	106

1. Standards, reference documents and applicable test methods

FCC	<ol style="list-style-type: none"> 1. FCC Title 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices. 2021-10-01 Edition 2. FCC OET KDB 447498 D04 Interim General RF Exposure Guidance v01– RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices. 3. FCC OET KDB 616217 D04 v01r02 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers. 4. FCC OET KDB 865664 D01 v01r04 – SAR Measurement Requirements for 100 MHz to 6 GHz. 5. FCC OET KDB 865664 D02 v01r02 – RF Exposure Compliance Reporting and Documentation Considerations. 6. FCC OET KDB 941225 D05 v02r05 – SAR Evaluation Considerations for LTE Devices. 7. FCC OET KDB 941225 D01 v03r01 – 3G SAR Measurement Procedures. 8. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques... 9. TCB workshop November 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR) 10. TCB workshop October 2018; RF Exposure Procedures (LTE Inter-Band Uplink Carrier Aggregation –Interim Procedures) 11. TCB workshop November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DC UE SAR Evaluations) 12. TCB workshop November 2019; 5G NR/ EN-DC Compliance Test Configurations
ISED	<ol style="list-style-type: none"> 13. ISED RSS 102, Issue 5 – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands) 14. ISED RSS-102 Supplementary Procedures SPR-001 SAR testing requirements with regard to bystanders for laptop type computers with antennas built-in on display screen (Laptop Mode / Tablet Mode) 15. ISED Notice 2020-DRS2020 Applicability of IEC/IEEE62209-1528 and IEC 62209 -3 standard 16. ISED Notice 2016-DRS001 – Applicability of latest FCC RF Exposure KDB Procedures and Other Procedures. 17. ISED Notice 2012-DRS0529 – SAR correction for measured conductivity and relative permittivity based on IEC 62209-2 standard. 18. FCC OET KDB 447498 D01 V06 General RF Exposure Guidance v01– RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices. 19. FCC OET KDB 616217 D04 v01r02 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers. 20. FCC OET KDB 865664 D01 v01r04 – SAR Measurement Requirements for 100 MHz to 6 GHz. 21. FCC OET KDB 865664 D02 v01r02 – RF Exposure Compliance Reporting and Documentation Considerations. 22. FCC OET KDB 941225 D05 v02r05 – SAR Evaluation Considerations for LTE Devices. 23. FCC OET KDB 941225 D01 v03r01 – 3G SAR Measurement Procedures. 24. IEC/IEEE 62209-1528:2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Tests performed under ISED standards identified in section 1 are covered by Cofrac accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 testing laboratory accredited by the French Committee for Accreditation (Cofrac) with the certificate number 1-6736.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED company number 1000Y and CAB identifier FR0005
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	21.1°C ± 1.2°C
Humidity	46% ± 12%
Liquid Temperature	20.9°C ± 1.6°C

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Antenna
#01	231128-03.S01	WWAN module installed in Convertible PC	HSN-I61C	0003770DDC	2023-11-28	Vendor 2
#02	231128-03.S03	WWAN module installed in Convertible PC	HSN-I61C	0003770DDM	2023-11-28	Vendor 1

5. EUT Features

The herein information is provided by the customer

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	HP
Model Name	HSN-I61C
Prototype / Production	Production
Host Identification	HSN-I61C
Exposure Conditions	Body worn

Supported radios

The applicable frequency bands and operating modes are identified in the following table.

WWAN:

Mode	Bands	Supported Tx Mode			
		RMC	HSDPA	HSUPA	DC-HSDPA
WCDMA	FDD II (1850.0 – 1910.0 MHz)	✓	✓	✓	✓
	FDD IV (1710.0 – 1755.0 MHz)	✓	✓	✓	✓
	FDD V (824.0 – 849.0 MHz)	✓	✓	✓	✓

FDD/TDD	Bands	Modulations	Bandwidth					
			1.4	3	5	10	15	20
LTE FDD	Band 2 (1850.0 – 1910.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 4 (1710.0 – 1755.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 5 (824.0 – 849.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓		
	Band 7 (2500.0 – 2570.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 12 (699.0 – 716.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓		
	Band 13 (777.0 – 787.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 14 (788.0 – 798.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 17 (704.0 – 716.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 25 (1850.0 – 1915.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
	Band 26 (814.0 – 849.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	
	Band 30 (2305.0 – 2315.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓		
	Band 66 (1710.0 – 1780.0 MHz)	QPSK/16QAM/64QAM/256QAM	✓	✓	✓	✓	✓	✓
LTE TDD	Band 71 (663.0 – 698.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 38 (2570.0 – 2620.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 41 (2496.0 – 2690.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓
	Band 48 (3550.0 – 3700.0 MHz)	QPSK/16QAM/64QAM/256QAM			✓	✓	✓	✓

UL carrier aggregation LTE (Intra-band)
5B
7C
38C
41C
66B
66C

WLAN BE200NGW

Mode	UL Freq Range
802.11b/g/n/ax/be	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac/ax/be	5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) 5.9GHz (5850.0 – 5895.0 MHz)
802.11ax/be	6.0GHz (5925.0 – 7125.0 MHz)
Bluetooth & BLE	2.4GHz (2400.0 – 2483.5 MHz)

WLAN AX211NGW

Mode	UL Freq Range
802.11b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac/ax	5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) 5.9GHz (5850.0 – 5895.0 MHz)
802.11ax	6.0GHz (5925.0 – 7125.0 MHz)
Bluetooth & BLE	2.4GHz (2400.0 – 2483.5 MHz)

NFC

Model name	XRAV-1
Tx/Rx Freq. Range	13.56MHz
Antenna Type	Loop antenna
Modulation	ASK



Antenna Information & Mapping

Antenna Information "information provided by the applicant"

The DUT has 2 WWAN TX antenna:

Transmitter	Ant 5 (TX/RX)
Manufacturer	Vendor 2
Antenna type	PIFA antenna
Part number	6036B0345901 (81ELBA15.G02)

Transmitter	Ant 5 (TX/RX)
Manufacturer	Vendor 1
Antenna type	PIFA antenna
Part number	6036B0346901 (00-3302702850)

See Annex F for more details on antennas location.

WWAN Antenna Mapping

Configuration	Ant 5 (TX/RX)
WCDMA	LB / MHB
LTE	LB / MHB
LTE ULCA	LB
	MHB
	B41

- LB: WCDMA FDD V, LTE B5/12/13/14/17/26/71
- MHB: WCDMA FDD II/ FDD IV, LTE B2/4/7/25/30/38/66
- UHB: LTE: B41/48

Note: For inter-bands on LTE the carriers transmit on separate/same antennas.

Simultaneous Transmission Configurations

WWAN Main (Ant5) + WLAN 2.4GHz Main + BT Aux
 WWAN Main (Ant5) + WLAN 2.4GHz Main + WLAN 2.4GHz Aux
 WWAN Main (Ant5) + WLAN 5/6GHz Main + BT Aux
 WWAN Main (Ant5) + WLAN 5/6GHz Main + WLAN 5/6GHz Aux
 WWAN Main (Ant5) + WLAN 5/6GHz Main + WLAN 5/6GHz Aux + BT Aux

WLAN transmitter is considered in this report just for the simultaneous transmission evaluation with the WWAN module (See section B.9)

Additional information

- 5.60-5.65 GHz band (TDWR) is supported by the device
- Band gap is supported by the device
- Two different power settings are implemented in the DUT:
 - Max power for Notebook mode
 - Reduced power for Tablet mode
- The DUT does not support VoLTE, so Head Exposure is not considered for LTE and WCDMA modes. Maximum Power Reduction (MPR) is implemented according to 3GPP, and it is a permanent feature, built-in by design on the tune-up power:

Modulation	Channel bandwidth / #RB						MPR (Db)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≥ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The maximum power reduction is applicable on the Tune up tolerance.

The following table indicates the power levels and tolerance for each mode:

Maximum Output power specification + Tune up tolerance

Mode	Tx Ant	Technology	Bands	Class	Nominal (dBm)	Tolerance dB	Lower Tolerance (dBm)	Upper Tolerance (dBm)
Laptop	5	WCDMA/HSPA	FDD II (1850.0 – 1910.0 MHz)	3	24.50	±1	23.50	25.50
	5	WCDMA/HSPA	FDD IV (1710.0 – 1755.0 MHz)	3	24.50	±1	23.50	25.50
	5	WCDMA/HSPA	FDD V (824.0 – 849.0 MHz)	3	24.50	±1	23.50	25.50
	5	LTE	B2 (1850.0 – 1910.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B4 (1710.0 – 1755.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B5 (824.0 – 849.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B7 (2500.0 – 2570.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B12 (699.0 – 716.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B13 (777.0 – 787.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B14 (788.0 – 798.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B17 (704.0 – 716.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B25 (1850.0 – 1915.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B26 (814.0 – 849.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B30 (2305.0 – 2315.0 MHz)	3	23.00	±1	22.00	24.00
	5	LTE	B38 (2570.0 – 2620.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B41 (2496.0 – 2690.0 MHz)	3	24.00	±1	23.00	25.00
	5	LTE	B41-HPUE (2496.0 – 2690.0 MHz)	2	27.00	±1	26.00	28.00
	5	LTE	B48 (3552.5 – 3697.0 MHz)	2	22.00	±1	21.00	23.00
	Tablet	5	WCDMA/HSPA	FDD II (1850.0 – 1910.0 MHz)	3	12.00	±1	11.00
5		WCDMA/HSPA	FDD IV (1710.0 – 1755.0 MHz)	3	13.00	±1	12.00	14.00
5		WCDMA/HSPA	FDD V (824.0 – 849.0 MHz)	3	16.00	±1	15.00	17.00
5		LTE	B2 (1850.0 – 1910.0 MHz)	3	12.00	±1	11.00	13.00
5		LTE	B4 (1710.0 – 1755.0 MHz)	3	13.00	±1	12.00	14.00
5		LTE	B5 (824.0 – 849.0 MHz)	3	16.00	±1	15.00	17.00
5		LTE	B7 (2500.0 – 2570.0 MHz)	3	11.00	±1	10.00	12.00
5		LTE	B12 (699.0 – 716.0 MHz)	3	13.50	±1	12.50	14.50
5		LTE	B13 (777.0 – 787.0 MHz)	3	14.50	±1	13.50	15.50
5		LTE	B14 (788.0 – 798.0 MHz)	3	14.50	±1	13.50	15.50
5		LTE	B17 (704.0 – 716.0 MHz)	3	13.50	±1	12.50	14.50
5		LTE	B25 (1850.0 – 1915.0 MHz)	3	12.50	±1	11.50	13.50
5		LTE	B26 (814.0 – 849.0 MHz)	3	16.00	±1	15.00	17.00
5		LTE	B30 (2305.0 – 2315.0 MHz)	3	12.50	±1	11.50	13.50
5		LTE	B38 (2570.0 – 2620.0 MHz)	3	16.50	±1	15.50	17.50
5		LTE	B41 (2496.0 – 2690.0 MHz)	3	16.50	±1	15.50	17.50
5		LTE	B41-HPUE (2496.0 – 2690.0 MHz)	2	16.50	±1	15.50	17.50
5		LTE	B48 (3552.5 – 3697.0 MHz)	2	17.00	±1	16.00	18.00
5		LTE	B66 (1710.0 – 1780.0 MHz)	3	13.00	±1	12.00	14.00
5	LTE	B71 (663.0 – 698.0 MHz)	3	19.00	±1	18.00	20.00	

6. Remarks and comments

- Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.h
- The same conducted power measurements were used on both samples since the same WWAN module has been used on the samples under test during SAR measurements.
- Simultaneous transmission combination with WLAN is evaluated considering max SAR from test reports: 231128-03.TR02 / 231128-03.TR03 / 231128-03.TR04 / 231128-04.TR02 / 231128-04.TR03 / 231128-04.TR04

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without considering the measurement uncertainties.

Mode	Band (UL)	Highest Reported SAR (1g) (W/kg)	Verdict
WCDMA	FDD II (1850.0 – 1910.0 MHz)	0.49	P
	FDD IV (1710.0 – 1755.0 MHz)	0.51	P
	FDD V (824.0 – 849.0 MHz)	0.36	P
LTE FDD	Band 2 (1850.0 – 1910.0 MHz)	NM	NA
	Band 4 (1710.0 – 1755.0 MHz)	NM	NA
	Band 5 (824.0 – 849.0 MHz)	0.43	P
	Band 7 (2500.0 – 2570.0 MHz)	0.25	P
	Band 12 (699.0 – 716.0 MHz)	0.24	P
	Band 13 (777.0 – 787.0 MHz)	0.30	P
	Band 14 (788.0 – 798.0 MHz)	0.29	P
	Band 17 (704.0 – 716.0 MHz)	NM	NA
	Band 25 (1850.0 – 1915.0 MHz)	0.49	P
	Band 26 (814.0 – 849.0 MHz)	0.43	P
	Band 30 (2305.0 – 2315.0 MHz)	0.79	P
	Band 66 (1710.0 – 1780.0 MHz)	0.55	P
	Band 71 (663.0 – 698.0 MHz)	0.79	P
	LTE TDD	Band 38 (2570.0 – 2620.0 MHz)	NM
Band 41 (2496.0 – 2690.0 MHz)		0.55	P
Band 48 (3550.0 – 3700.0 MHz)		0.79	P

P: Pass NM: Not Measured
F: Fail NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Exposure Condition	Highest Reported SAR (1g) (W/kg)			
	Equipment Class			
	PCE	DTS	DSS	U-NII
Body Worn	0.79	1.02	0.27	1.53
Simultaneous Tx	Sum-SAR: 2.32 SPLSR : 0.02	Sum-SAR: 1.88 SPLSR : 0.04	Sum-SAR: 1.06 SPLSR : NA	Sum-SAR: 2.32 SPLSR :0.02

Considering the results of the performed test according to FCC 47CFR Part 2.1093 the item under test is following the requested specifications specified in Section1. Standards, reference documents and applicable test methods

8. Document Revision History

Revision #	Modified by	Revision Details
------------	-------------	------------------

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = Conductivity of the tissue (S/m)


ρ = Mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

A.2 SPEAG SAR Measurement System

A.2.1 SAR Measurement Setup


The DASY6 system for performing compliance tests consists of the following items:

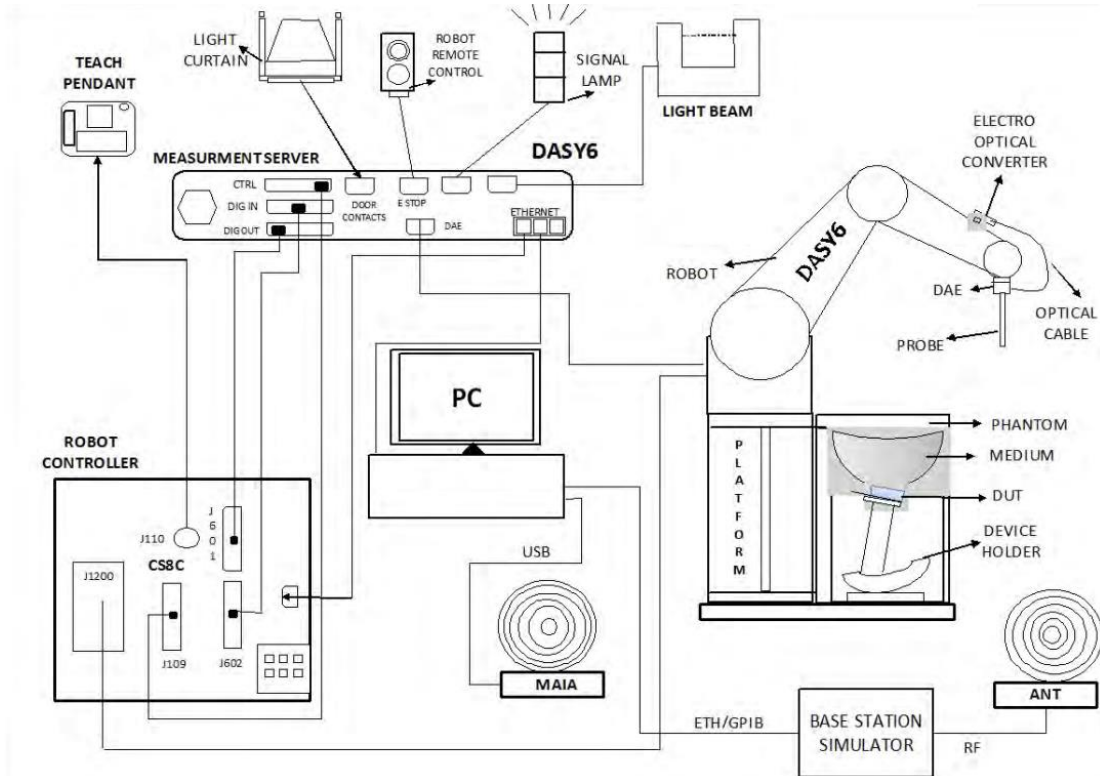

- ✓ A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder, and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator.

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:


Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	±0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	±0.5 dB
Linearity	±0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.01 W/kg

A.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm

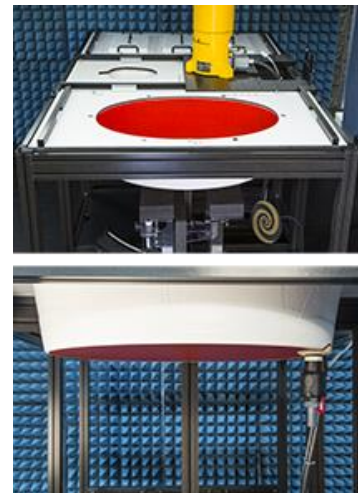

A.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.



A.3 Data Evaluation

Power Reference measurement

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

Area Scan

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30° . If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

Zoom Scan

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within $\pm 30^\circ$ of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than $\pm 30^\circ$, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

Power Drift measurement

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

Post-processing

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

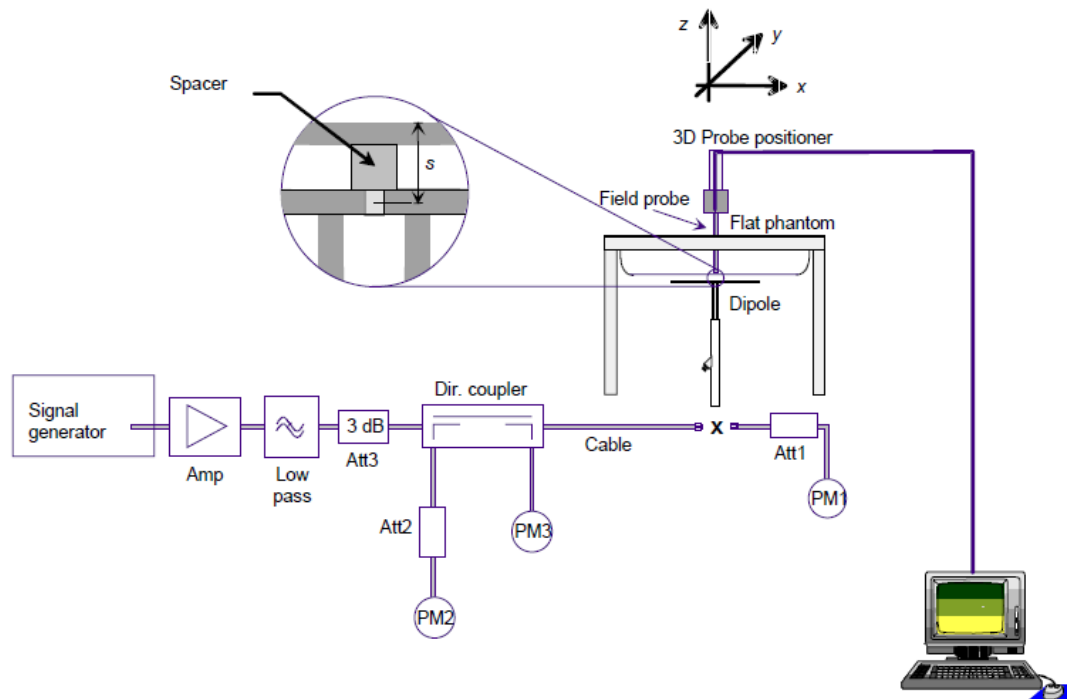

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r (F/m)	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000$ kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

A.5.1 SAR System #3

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
004-006	Dosimetric E-Field probe	EX3DV4	7604	SPEAG	2023-09-08	2024-09-08
004-014	Data Acquisition Electronics	DAE4ip	1704	SPEAG	2023-04-18	2024-04-18
002-000	6-axis Robot	TX60 L	F16/55FXA1/A/01	STAÜBLI	n/a	n/a
002-001	Robot Controller	CS8C	F16/55FXA1/C/01	STAÜBLI	n/a	n/a
002-002	Measurement Server	DASY6 P/N: SE UMS 028 BB	1489	SPEAG	n/a	n/a
002-003	Electro-Optical Converter	EOC60	1098	SPEAG	n/a	n/a
002-004	Light Beam Unit	SE UKS 030 AA	-	Di-soric	n/a	n/a
002-005	Oval Flat Phantom	ELI v8.0	2048	SPEAG	n/a	n/a
002-006	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	n/a	n/a
002-007	Measurement SW	DASY v6.14	9-5DEE27C2	SPEAG	n/a	n/a
458-000	Automation SW	SARA v2.3	-	Intel	n/a	n/a

A.5.2 Shared Instrumentation

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
151-000	USB Power Sensor	NRP-Z58	100972	R&S	2022-03-29	2024-03-29
008-025	USB Power Sensor	NRP-Z57	101280	R&S	2022-04-22	2024-04-22
135-000	Network Emulator	CMW500	152721	R&S	2022-03-29	2024-03-29
130-000	Vector Signal Generator	SMB100A	178217	R&S	2023-07-26	2025-07-26
099-000	Liquid measurement SW	DAK-3.5 V3.5	9-2687B491	SPEAG	n/a	n/a
339-000	VNA Analyzer ZNB 40	ZNB 40	101740	R&S	2023-05-19	2025-05-19
071-000	750 MHz System Validation Dipole	D750V3	1136	SPEAG	2021-01-21	2024-01-21
072-000	835 MHz System Validation Dipole	D835V2	4d192	SPEAG	2021-01-21	2024-01-21
073-000	1750 MHz System Validation Dipole	D1750V2	1133	SPEAG	2021-01-14	2024-01-14
074-000	1900 MHz System Validation Dipole	D1900V2	5d197	SPEAG	2021-01-14	2024-01-14
075-000	2300 MHz System Validation Dipole	D2300V2	1046	SPEAG	2021-01-13	2024-01-13
076-000	2600 MHz System Validation Dipole	D2600V2	1100	SPEAG	2021-01-13	2024-01-13
404-000	3700 MHz System Validation Dipole	D3700V2	1093	SPEAG	2022-05-21	2024-05-21
496-000	Temp & Humidity Logger	RA32E-TH1-RAS	RA32-FC8485	AVTECH	2023-04-20	2025-04-20
198-000	0.8-21GHz RF amplifier	TVA-82-213A+	2004003	Mini-Circuits	2023-02-20	2024-02-20
077-000	Coupler	CD0.5-8-20-30	1251-002	Amd-group	2023-02-20	2024-02-20

A.5.3 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body WideBand	SPEAG MBBL600-6000V6 Batch 220309-01	600-6000	Ethenediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxyated alcohol

A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

SPEAG DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (4 MHz - 6 GHz) including IEEE 1528-2013 and IEC 62209-1/2016, IEC 62209-2/2010								
Symbol	Error Description	Uncert. Value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std Unc. (1g)	Std Unc. (10g)
Measurement System Errors								
CF	<i>Probe Calibration</i>	±14.0 %	N	2	1	1	±7.0 %	±7.0 %
CF _{drift}	Probe Calibration Drift	±1.0 %	N	1	1	1	±1.0 %	±1.0 %
LIN	Probe Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %
BBS	Broadband Signal	±3.0 %	N	2	1	1	±1.5 %	±1.5 %
ISO	<i>Axial Isotropy</i>	±4.7 %	R	√3	0.5	0.5	±1.4 %	±1.4 %
ISO	Hemispherical Isotropy	±9.6 %	R	√3	0.5	0.5	±2.8 %	±2.8 %
DAE	Data Acquisition	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
AMB	RF Ambient	±1.8 %	N	1	1	1	±1.8 %	±1.8 %
Δ _{sys}	Probe Positioning	±0.2 %	N	1	0.33	0.33	±0.1 %	±0.1 %
DAT	Data Processing	±2.3 %	N	1	1	1	±2.3 %	±2.3 %
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) _{DAK}	±2.5 %	N	1	0.78	0.71	±2.0 %	±1.8 %
LIQ(Tσ)	Conductivity (temp.) _{BB}	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %
EPS	Phantom Permittivity	±14.0 %	R	√3	0.25	0.25	±2.0 %	±2.0 %
DAS	Distance DUT - TSL	±2.0 %	N	1	2	2	±4.0 %	±4.0 %
H	Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %
MOD	DUT Modulation _m	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %
TAS	Time-average SAR	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %
RF _{drift}	DUT drift	±5.0 %	N	1	1	1	±2.9 %	±2.9 %
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9 %	N	1	1	0.84	±1.9 %	±1.6 %
Combined Std. Uncertainty							±11.5 %	±11.4 %
Expanded STD Uncertainty							±23.1 %	±22.9 %

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR Part 2.1093 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

The herein test results were performed by:

Test case measurement	Test Personnel
SAR measurement	Y HADDAD
Conducted measurement	F. Heurtematte

B.1 Test Conditions

B.1.1 Test SAR Test positions relative to the phantom

The device under test was a Convertible PC, HSN-I61C. The device was operated utilizing proprietary software tool (Engineer Tool: v1.1.1.37) and each channel was measured using a communication tester to determine the maximum average power.

The device has 2 power setting:

Laptop mode
Tablet mode

As described below on section B.1.3, Laptop position does not require SAR testing.

Notebook	WWAN Ant 5 TX/RX
Position	Laptop

See section 5 for details about power values for the configuration
See Annex F.3 for information about the platform antenna configuration

Tablet mode

Tablet	WWAN Ant 5 TX/RX
Position	Top Edge Back Face Right Edge

See F.2 Test position section for more information on the tested positions.

B.2 Test signal, Output power and Test Frequencies

B.2.1 LTE TDD consideration

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame structure and table 2 for uplink-downlink configurations and table 1 for special subframe configurations

Table 1

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 T _s	(1+X) 2192 T _s	(1+X) 2560 T _s	7680 · T _s	(1+X) 2192 T _s	(1+X) 2560 T _s
1	19760 T _s			20480 T _s		
2	21952 T _s			23040 T _s		
3	24144 T _s			25600 T _s		
4	26336 T _s			7680 T _s		
5	6592 T _s	(2+X) 2192 T _s	(2+X) 2560 T _s	20480 T _s	(2+X) 2192 T _s	(2+X) 2560 T _s
6	19760 T _s			23040 T _s		
7	21952 T _s			12800 T _s		
8	24144 T _s			-		
9	13168 T _s			-		
10	13168 T _s	13150 T _s	12800 T _s	-	-	-

Table2

Uplink-Downlink Config.	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated duty cycle = Extended cyclic prefix in uplink *(TS)*# of S + # of U / period

The configuration used for SAR testing was the number 0 which corresponds to the highest duty cycle (Power Class 3)

B.3 Evaluation Exclusion and Test Reductions

B.3.1 SAR evaluation exclusion

For FCC:

The SAR Test Exclusion Threshold in FCC OET KDB 447498 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances ≤50mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune – up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \left[\sqrt{f_{(\text{GHz})}} \right] \leq 3.0 \text{ for } 1g \text{ SAR, and } \leq 7.5 \text{ for } 10g \text{ extremity SAR} \tag{1}$$

Where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$\langle (\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{MHz}}/150) \rangle \text{mW, for } 100\text{MHz to } 1500\text{MHz} \tag{2}$$

$$\langle (\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10 \rangle \text{mW, for } 1500\text{MHz and } \leq 6\text{GHz} \tag{3}$$

In order to evaluate SAR test exclusion for Laptop positions in which the separation distance passes the 50mm limit, equations (2) and (3) are used with the corresponding frequencies for each band, the user distances for the laptop position and with the power values described on Section 5. The table below shows all cellular bands evaluated in this report grouped by frequency band, separation distances and the corresponding Power threshold in mW for each combination (distance and frequency)

Bands	Frequency	Separation distance to the body on mm										Threshold values in mW
		60	70	80	90	100	110	160	170	190	200	
LTE 12,13,14,17,71	750	223	273	323	373	423	473	723	773	873	923	
FDD V, LTE 5, 26	835	220	275	331	387	442	498	776	832	943	999	
FDD IV LTE 4, 66	1750	213	313	413	513	613	713	1213	1313	1513	1613	
FDD II, LTE2, 25	1900	209	309	409	509	609	709	1209	1309	1509	1609	
LTE 30	2300	199	299	399	499	599	699	1199	1299	1499	1599	
LTE 7,38,41	2600	193	293	393	493	593	693	1193	1293	1493	1593	
LTE 48	3700	180	280	380	480	580	680	1180	1280	1480	1580	

ISED:

According to RSS-102 section 2.5.1, SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table below:

SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance					
Frequency	Exemption Limits (mW)				
(MHz)	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW
Frequency	Exemption Limits (mW)				
(MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Test Exclusion

Antenna	Band Name	Output power				Top Edge	Back Face	Left Edge	Laptop	Right Edge	Laptop	Left Edge	Top Edge	Back Face	Right Edge
		Laptop Mode		Tablet Mode											
		dBm	mW	dBm	mW										
WWAN Ant 5	WCDMA II	24.50	281.83	12.00	15.85	<50	<50	>50	>50	<50	R	R	T	T	T
	WCDMA IV	24.50	281.83	13.00	19.95	<50	<50	>50	>50	<50	R	R	T	T	T
	WCDMA V	24.50	281.83	16.00	39.81	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 2	24.00	251.19	12.00	15.85	<50	<50	>50	>50	<50	R	R	R	R	R
	LTE 4	24.00	251.19	13.00	19.95	<50	<50	>50	>50	<50	R	R	R	R	R
	LTE 5	24.00	251.19	16.00	39.81	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 7	24.00	251.19	11.00	12.59	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 12	24.00	251.19	13.50	22.39	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 13	24.00	251.19	14.50	28.18	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 14	24.00	251.19	14.50	28.18	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 17	24.00	251.19	13.50	22.39	<50	<50	>50	>50	<50	R	R	R	R	R
	LTE 25	24.00	251.19	12.50	17.78	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 26	24.00	251.19	16.00	39.81	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 30	24.00	251.19	12.50	17.78	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 38	24.00	251.19	16.50	44.67	<50	<50	>50	>50	<50	R	R	R	R	R
	LTE 41	24.00	251.19	16.50	44.67	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 48	21.00	125.89	17.00	50.12	<50	<50	>50	>50	<50	R	R	T	T	T
	LTE 66	24.00	251.19	13.00	19.95	<50	<50	>50	>50	<50	R	R	T	T	T
LTE 71	24.00	251.19	19.00	79.43	<50	<50	>50	>50	<50	R	R	T	T	T	

T: Tested position

R: Reduced

See Annex F for a more detailed explanation of the separation distance related to the platform.

B.3.2 General SAR test reduction

According to FCC OET KDB 447498, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

WWAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
HSDPA	According to FCC OET KDB 941225 D01, SAR evaluation is not required when the maximum average output power is $< \frac{1}{4}$ dB higher than the measured on the corresponding channels without HSDPA, using 12.2kbps RMC, and the maximum SAR for 12.2kbps RMC is < 1.2 W/kg.
HSUPA DC+HSDPA HSPA+	According to FCC OET KDB 941225 D01, SAR evaluation is not required when the maximum average output power is $< \frac{1}{4}$ dB higher than the measured on the corresponding channels without HSUPA, using 12.2kbps RMC, and the maximum SAR for 12.2kbps RMC is < 1.2 W/kg.
LTE	<p>According to FCC OET KDB 941225 D05, testing of 100% RB allocation, higher order modulations or lower BW is not required when these conditions are met:</p> <p>For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.</p> <p>For each modulation besides QPSK, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.</p> <p>For lower BW, only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.</p> <p>For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M, and L channels may not fully apply</p> <p>The conducted power for the higher order modulations i.e., 64 QAM and 256 QAM has not been measured since the applicable MPR is respectively 2dB and 5dB.</p>

B.4 Conducted Power Measurements Tablet Mode

B.4.1 WCDMA/ HSPA/ DC-HSPA

B.4.1.1 WCDMA band II – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	9262	1852.4	-	11.10	12.00
	9400	1880.0	-	10.50	12.00
	9538	1907.6	-	10.70	12.00
HSDPA	9262	1852.4	1		12.00
			2		12.00
			3		12.00
			4		12.00
	9400	1880.0	1		12.00
			2		12.00
			3		12.00
			4		12.00
	9538	1907.6	1		12.00
			2		12.00
			3		12.00
			4		12.00
HSUPA	9262	1852.4	1		12.00
			2		12.00
			3		12.00
			4		12.00
			5		12.00
	9400	1880.0	1		12.00
			2		12.00
			3		12.00
			4		12.00
			5		12.00
	9538	1907.6	1		12.00
			2		12.00
			3		12.00
			4		12.00
			5		12.00
DC-HSDPA	9262	1852.4	1		12.00
			2		12.00
			3		12.00
			4		12.00
	9400	1880	1		12.00
			2		12.00
			3		12.00
			4		12.00
	9538	1907.6	1		12.00
			2		12.00
			3		12.00
			4		12.00

B.4.1.2 WCDMA band IV – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	1312	1712.4	-	11.50	13.00
	1413	1732.6	-	11.60	13.00
	1513	1752.6	-	12.00	13.00
HSDPA	1312	1712.4	1		13.00
			2		13.00
			3		13.00
			4		13.00
	1413	1732.6	1		13.00
			2		13.00
			3		13.00
			4		13.00
	1513	1752.6	1		13.00
			2		13.00
			3		13.00
			4		13.00
HSUPA	1312	1712.4	1		13.00
			2		13.00
			3		13.00
			4		13.00
			5		13.00
	1413	1732.6	1		13.00
			2		13.00
			3		13.00
			4		13.00
			5		13.00
	1513	1752.6	1		13.00
			2		13.00
			3		13.00
			4		13.00
			5		13.00
DC-HSDPA	1312	1712.4	1		13.00
			2		13.00
			3		13.00
			4		13.00
	1413	1732.6	1		13.00
			2		13.00
			3		13.00
			4		13.00
	1513	1752.6	1		13.00
			2		13.00
			3		13.00
			4		13.00

B.4.1.3 WCDMA band V – Antenna 5

Mode	Channel Number	Freq (MHz)	Subset	Average Power Measured (dBm)	Factory Upper Tolerance (dBm)
RMC	4132	826.4	-	15.00	16.00
	4183	836.6	-	14.50	16.00
	4233	846.6	-	14.50	16.00
HSDPA	4132	826.4	1		16.00
			2		16.00
			3		16.00
			4		16.00
	4183	836.6	1		16.00
			2		16.00
			3		16.00
			4		16.00
	4233	846.6	1		16.00
			2		16.00
			3		16.00
			4		16.00
HSUPA	4132	826.4	1		16.00
			2		16.00
			3		16.00
			4		16.00
			5		16.00
	4183	836.6	1		16.00
			2		16.00
			3		16.00
			4		16.00
			5		16.00
	4233	846.6	1		16.00
			2		16.00
			3		16.00
			4		16.00
			5		16.00
DC- HSDPA	4132	826.4	1		16.00
			2		16.00
			3		16.00
			4		16.00
	4183	836.6	1		16.00
			2		16.00
			3		16.00
			4		16.00
	4233	846.6	1		16.00
			2		16.00
			3		16.00
			4		16.00

B.4.2 LTE

B.4.2.1 LTE band 2 FDD – Antennas 5

SAR Measurement for LTE Band 2 FDD (Frequency range: 1850 – 1910MHz) is covered by LTE Band 25 FDD (Frequency range: 1850 – 1915MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.2 LTE band 4 FDD – Antennas 5

SAR Measurement for LTE Band 4 FDD (Frequency range: 1710 – 1755MHz) is covered by LTE Band 66 FDD (Frequency range: 1710 – 1780MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.3 LTE band 5 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 5	10 MHz	20525	836.5	1RB Low	1 Pos 0	16.00	0	14.89	16.00	1	14.14
				1RB Mid	1 Pos 50	16.00	0	14.86	16.00	1	14.13
				1RB High	1 Pos 99	16.00	0	14.78	16.00	1	14.07
				50% RB Low	50 Pos 0	16.00	1	13.79	16.00	2	12.98
				50% RB Mid	50 Pos 24	16.00	1	13.76	16.00	2	12.92
				50% RB High	50 Pos 50	16.00	1	13.74	16.00	2	12.87
	5 MHz	20425	826.5	1RB Low	1 Pos 0	16.00	0	14.91	16.00	1	14.06
				1RB Mid	1 Pos 38	16.00	0	14.85	16.00	1	14.08
				1RB High	1 Pos 74	16.00	0	14.94	16.00	1	14.18
				50% RB Low	38 Pos 0	16.00	1	13.77	16.00	2	12.82
				50% RB Mid	38 Pos 19	16.00	1	13.79	16.00	2	12.82
				50% RB High	38 Pos 39	16.00	1	13.77	16.00	2	12.81
		20525	836.5	100% RB	75 Pos 0	16.00	1	13.82	16.00	2	12.92
				1RB Low	1 Pos 0	16.00	0	14.87	16.00	1	14.10
				1RB Mid	1 Pos 38	16.00	0	14.84	16.00	1	14.10
				1RB High	1 Pos 74	16.00	0	14.84	16.00	1	14.03
				50% RB Low	38 Pos 0	16.00	1	13.80	16.00	2	12.87
				50% RB Mid	38 Pos 19	16.00	1	13.79	16.00	2	12.82
		20625	846.5	50% RB High	38 Pos 39	16.00	1	13.76	16.00	2	12.80
				100% RB	75 Pos 0	16.00	1	13.80	16.00	2	12.87
				1RB Low	1 Pos 0	16.00	0	14.87	16.00	1	14.10
				1RB Mid	1 Pos 38	16.00	0	14.90	16.00	1	14.06
				1RB High	1 Pos 74	16.00	0	14.87	16.00	1	14.01
				50% RB Low	38 Pos 0	16.00	1	13.77	16.00	2	12.83
	3 MHz	20415	825.5	50% RB Mid	38 Pos 19	16.00	1	13.75	16.00	2	12.83
				50% RB High	38 Pos 39	16.00	1	13.77	16.00	2	12.78
				100% RB	75 Pos 0	16.00	1	13.73	16.00	2	12.83
				1RB Low	1 Pos 0	16.00	0	14.82	16.00	1	14.12
				1RB Mid	1 Pos 24	16.00	0	14.85	16.00	1	14.24
				1RB High	1 Pos 49	16.00	0	14.77	16.00	1	14.11
		20525	836.5	50% RB Low	25 Pos 0	16.00	1	13.76	16.00	2	12.86
				50% RB Mid	25 Pos 12	16.00	1	13.79	16.00	2	12.91
				50% RB High	25 Pos 25	16.00	1	13.77	16.00	2	12.87
				100% RB	50 Pos 0	16.00	1	13.74	16.00	2	12.80
				1RB Low	1 Pos 0	16.00	0	14.81	16.00	1	14.09
				1RB Mid	1 Pos 24	16.00	0	14.74	16.00	1	14.17
		20635	847.5	1RB High	1 Pos 49	16.00	0	14.61	16.00	1	14.02
				50% RB Low	25 Pos 0	16.00	1	13.71	16.00	2	12.83
				50% RB Mid	25 Pos 12	16.00	1	13.76	16.00	2	12.85
				50% RB High	25 Pos 25	16.00	1	13.72	16.00	2	12.83
				100% RB	50 Pos 0	16.00	1	13.73	16.00	2	12.79
				1RB Low	1 Pos 0	16.00	0	14.65	16.00	1	14.13
	20635	847.5	1RB Mid	1 Pos 24	16.00	0	14.78	16.00	1	14.14	
			1RB High	1 Pos 49	16.00	0	14.76	16.00	1	14.06	
			50% RB Low	25 Pos 0	16.00	1	13.75	16.00	2	12.85	
			50% RB Mid	25 Pos 12	16.00	1	13.75	16.00	2	12.86	
			50% RB High	25 Pos 25	16.00	1	13.70	16.00	2	12.82	
			100% RB	50 Pos 0	16.00	1	13.74	16.00	2	12.81	

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 5	1.4 MHz	20407	824.7	1RB Low	1 Pos 0	16.00	0	14.82	16.00	1	13.76
				1RB Mid	1 Pos 2	16.00	0	14.89	16.00	1	13.83
				1RB High	1 Pos 5	16.00	0	14.84	16.00	1	13.78
				50% RB Low	3 Pos 0	16.00	1	14.80	16.00	2	13.96
				50% RB Mid	3 Pos 1	16.00	1	14.79	16.00	2	13.97
				50% RB High	3 Pos 2	16.00	1	14.77	16.00	2	13.98
		100% RB	6 Pos 0	16.00	1	13.78	16.00	2	12.88		
		20525	836.5	1RB Low	1 Pos 0	16.00	0	14.83	16.00	1	13.70
				1RB Mid	1 Pos 2	16.00	0	14.82	16.00	1	13.79
				1RB High	1 Pos 5	16.00	0	14.80	16.00	1	13.64
				50% RB Low	3 Pos 0	16.00	1	14.77	16.00	2	13.92
				50% RB Mid	3 Pos 1	16.00	1	14.78	16.00	2	13.93
				50% RB High	3 Pos 2	16.00	1	14.74	16.00	2	13.90
		100% RB	6 Pos 0	16.00	1	13.79	16.00	2	12.88		
		20643	848.3	1RB Low	1 Pos 0	16.00	0	14.81	16.00	1	13.52
				1RB Mid	1 Pos 2	16.00	0	14.79	16.00	1	13.74
				1RB High	1 Pos 5	16.00	0	14.77	16.00	1	13.65
				50% RB Low	3 Pos 0	16.00	1	14.73	16.00	2	13.91
				50% RB Mid	3 Pos 1	16.00	1	14.76	16.00	2	13.89
				50% RB High	3 Pos 2	16.00	1	14.75	16.00	2	13.95
		100% RB	6 Pos 0	16.00	1	13.76	16.00	2	12.88		

B.4.2.4 LTE band 7 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	20 MHz	20850	2510	1RB Low	1 Pos 0	11.00	0	9.64	11.00	1	8.78
				1RB Mid	1 Pos 50	11.00	0	9.78	11.00	1	8.93
				1RB High	1 Pos 99	11.00	0	9.64	11.00	1	8.78
				50% RB Low	50 Pos 0	11.00	1	8.71	11.00	2	7.71
				50% RB Mid	50 Pos 24	11.00	1	8.74	11.00	2	7.71
				50% RB High	50 Pos 50	11.00	1	8.64	11.00	2	7.65
		21100	2535	100% RB	100 Pos 0	11.00	1	8.70	11.00	2	7.67
				1RB Low	1 Pos 0	11.00	0	9.64	11.00	1	8.80
				1RB Mid	1 Pos 50	11.00	0	9.73	11.00	1	8.89
				1RB High	1 Pos 99	11.00	0	9.54	11.00	1	8.69
				50% RB Low	50 Pos 0	11.00	1	8.68	11.00	2	7.65
				50% RB Mid	50 Pos 24	11.00	1	8.66	11.00	2	7.61
		21350	2560	50% RB High	50 Pos 50	11.00	1	8.59	11.00	2	7.59
				100% RB	100 Pos 0	11.00	1	8.68	11.00	2	7.61
				1RB Low	1 Pos 0	11.00	0	9.58	11.00	1	8.74
				1RB Mid	1 Pos 50	11.00	0	9.69	11.00	1	8.89
				1RB High	1 Pos 99	11.00	0	9.63	11.00	1	8.81
				50% RB Low	50 Pos 0	11.00	1	8.64	11.00	2	7.63
	15 MHz	20825	2507.5	50% RB Mid	50 Pos 24	11.00	1	8.60	11.00	2	7.61
				50% RB High	50 Pos 50	11.00	1	8.64	11.00	2	7.60
				100% RB	100 Pos 0	11.00	1	8.65	11.00	2	7.58
				1RB Low	1 Pos 0	11.00	0	9.64	11.00	1	8.94
				1RB Mid	1 Pos 38	11.00	0	9.80	11.00	1	9.07
				1RB High	1 Pos 74	11.00	0	9.69	11.00	1	8.99
		21100	2535	50% RB Low	38 Pos 0	11.00	1	8.69	11.00	2	7.68
				50% RB Mid	38 Pos 19	11.00	1	8.70	11.00	2	7.71
				50% RB High	38 Pos 39	11.00	1	8.70	11.00	2	7.68
				100% RB	75 Pos 0	11.00	1	8.73	11.00	2	7.74
				1RB Low	1 Pos 0	11.00	0	9.62	11.00	1	8.92
				1RB Mid	1 Pos 38	11.00	0	9.65	11.00	1	8.95
		21375	2562.5	1RB High	1 Pos 74	11.00	0	9.53	11.00	1	8.83
				50% RB Low	38 Pos 0	11.00	1	8.62	11.00	2	7.64
				50% RB Mid	38 Pos 19	11.00	1	8.62	11.00	2	7.63
				50% RB High	38 Pos 39	11.00	1	8.64	11.00	2	7.62
				100% RB	75 Pos 0	11.00	1	8.65	11.00	2	7.66
				1RB Low	1 Pos 0	11.00	0	9.57	11.00	1	8.85
	10 MHz	20800	2505	1RB Mid	1 Pos 38	11.00	0	9.60	11.00	1	8.91
				1RB High	1 Pos 74	11.00	0	9.61	11.00	1	8.89
				50% RB Low	38 Pos 0	11.00	1	8.54	11.00	2	7.56
				50% RB Mid	38 Pos 19	11.00	1	8.59	11.00	2	7.59
				50% RB High	38 Pos 39	11.00	1	8.65	11.00	2	7.61
				100% RB	75 Pos 0	11.00	1	8.59	11.00	2	7.58
		21100	2535	1RB Low	1 Pos 0	11.00	0	9.72	11.00	1	8.97
				1RB Mid	1 Pos 24	11.00	0	9.81	11.00	1	9.06
				1RB High	1 Pos 49	11.00	0	9.80	11.00	1	9.06
				50% RB Low	25 Pos 0	11.00	1	8.70	11.00	2	7.80
				50% RB Mid	25 Pos 12	11.00	1	8.73	11.00	2	7.80
				50% RB High	25 Pos 25	11.00	1	8.75	11.00	2	7.81
21400		2565	100% RB	50 Pos0	11.00	1	8.79	11.00	2	7.76	
			1RB Low	1 Pos 0	11.00	0	9.65	11.00	1	8.97	
			1RB Mid	1 Pos 24	11.00	0	9.72	11.00	1	8.98	
			1RB High	1 Pos 49	11.00	0	9.62	11.00	1	8.91	
			50% RB Low	25 Pos 0	11.00	1	8.65	11.00	2	7.74	
			50% RB Mid	25 Pos 12	11.00	1	8.65	11.00	2	7.75	
21400	2565	50% RB High	25 Pos 25	11.00	1	8.67	11.00	2	7.71		
		100% RB	50 Pos0	11.00	1	8.69	11.00	2	7.65		
		1RB Low	1 Pos 0	11.00	0	9.62	11.00	1	8.89		
		1RB Mid	1 Pos 24	11.00	0	9.68	11.00	1	8.97		
		1RB High	1 Pos 49	11.00	0	9.66	11.00	1	8.97		
		50% RB Low	25 Pos 0	11.00	1	8.60	11.00	2	7.65		
21400	2565	50% RB Mid	25 Pos 12	11.00	1	8.63	11.00	2	7.72		
		50% RB High	25 Pos 25	11.00	1	8.68	11.00	2	7.74		
		100% RB	50 Pos0	11.00	1	8.65	11.00	2	7.64		

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 7	5 MHz	20775	2502.5	1RB Low	1 Pos 0	11.00	0	9.77	11.00	1	9.00
				1RB Mid	1 Pos 12	11.00	0	9.83	11.00	1	9.04
				1RB High	1 Pos 24	11.00	0	9.82	11.00	1	9.04
				50% RB Low	12 Pos 0	11.00	1	8.67	11.00	2	7.63
				50% RB Mid	12 Pos 6	11.00	1	8.71	11.00	2	7.68
				50% RB High	12 Pos 11	11.00	1	8.70	11.00	2	7.65
				100% RB	25 Pos 0	11.00	1	8.73	11.00	2	7.74
		21100	2535	1RB Low	1 Pos 0	11.00	0	9.70	11.00	1	8.94
				1RB Mid	1 Pos 12	11.00	0	9.68	11.00	1	8.93
				1RB High	1 Pos 24	11.00	0	9.69	11.00	1	8.90
				50% RB Low	12 Pos 0	11.00	1	8.69	11.00	2	7.62
				50% RB Mid	12 Pos 6	11.00	1	8.67	11.00	2	7.63
				50% RB High	12 Pos 11	11.00	1	8.63	11.00	2	7.57
				100% RB	25 Pos 0	11.00	1	8.67	11.00	2	7.65
		21425	2567.5	1RB Low	1 Pos 0	11.00	0	9.72	11.00	1	8.93
				1RB Mid	1 Pos 12	11.00	0	9.74	11.00	1	8.89
				1RB High	1 Pos 24	11.00	0	9.72	11.00	1	8.91
				50% RB Low	12 Pos 0	11.00	1	8.68	11.00	2	7.65
				50% RB Mid	12 Pos 6	11.00	1	8.67	11.00	2	7.63
				50% RB High	12 Pos 11	11.00	1	8.67	11.00	2	7.62
				100% RB	25 Pos 0	11.00	1	8.71	11.00	2	7.70

B.4.2.6 LTE band 12 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 12	10 MHz	23095	707.5	1RB Low	1 Pos 0	13.50	0	12.98	13.50	1	12.22
				1RB Mid	1 Pos 24	13.50	0	12.98	13.50	1	12.22
				1RB High	1 Pos 49	13.50	0	12.93	13.50	1	12.17
				50% RB Low	25 Pos 0	13.50	1	11.84	13.50	2	10.93
				50% RB Mid	25 Pos 12	13.50	1	11.90	13.50	2	10.98
				50% RB High	25 Pos 24	13.50	1	11.80	13.50	2	10.93
	5 MHz	23035	701.5	1RB Low	1 Pos 0	13.50	0	12.99	13.50	1	12.15
				1RB Mid	1 Pos 12	13.50	0	13.04	13.50	1	12.22
				1RB High	1 Pos 24	13.50	0	13.02	13.50	1	12.15
				50% RB Low	12 Pos 0	13.50	1	11.97	13.50	2	10.93
				50% RB Mid	12 Pos 6	13.50	1	11.94	13.50	2	10.91
				50% RB High	12 Pos 11	13.50	1	11.91	13.50	2	10.83
		23095	707.5	100% RB	25 Pos 0	13.50	1	11.95	13.50	2	10.99
				1RB Low	1 Pos 0	13.50	0	12.97	13.50	1	12.20
				1RB Mid	1 Pos 12	13.50	0	12.98	13.50	1	12.17
				1RB High	1 Pos 24	13.50	0	12.97	13.50	1	12.15
				50% RB Low	12 Pos 0	13.50	1	11.84	13.50	2	10.83
				50% RB Mid	12 Pos 6	13.50	1	11.86	13.50	2	10.84
		23155	713.5	50% RB High	12 Pos 11	13.50	1	11.91	13.50	2	10.88
				100% RB	25 Pos 0	13.50	1	11.90	13.50	2	10.91
				1RB Low	1 Pos 0	13.50	0	12.99	13.50	1	12.18
				1RB Mid	1 Pos 12	13.50	0	13.06	13.50	1	12.21
				1RB High	1 Pos 24	13.50	0	13.10	13.50	1	12.23
				50% RB Low	12 Pos 0	13.50	1	11.96	13.50	2	10.88
	3 MHz	23025	700.5	50% RB Mid	12 Pos 6	13.50	1	11.94	13.50	2	10.86
				50% RB High	12 Pos 11	13.50	1	11.94	13.50	2	10.90
				100% RB	25 Pos 0	13.50	1	11.98	13.50	2	10.97
				1RB Low	1 Pos 0	13.50	0	13.00	13.50	1	12.25
				1RB Mid	1 Pos 7	13.50	0	12.98	13.50	1	12.31
				1RB High	1 Pos 14	13.50	0	12.98	13.50	1	12.27
		23095	707.5	50% RB Low	8 Pos 0	13.50	1	11.93	13.50	2	10.91
				50% RB Mid	8 Pos 4	13.50	1	11.92	13.50	2	10.94
				50% RB High	8 Pos 7	13.50	1	11.90	13.50	2	10.89
				100% RB	15 Pos 0	13.50	1	11.91	13.50	2	10.88
				1RB Low	1 Pos 0	13.50	0	12.94	13.50	1	12.22
				1RB Mid	1 Pos 7	13.50	0	12.92	13.50	1	12.27
		23165	714.5	1RB High	1 Pos 14	13.50	0	12.87	13.50	1	12.20
				50% RB Low	8 Pos 0	13.50	1	11.84	13.50	2	10.84
				50% RB Mid	8 Pos 4	13.50	1	11.89	13.50	2	10.90
				50% RB High	8 Pos 7	13.50	1	11.90	13.50	2	10.87
				100% RB	15 Pos 0	13.50	1	11.90	13.50	2	10.86
				1RB Low	1 Pos 0	13.50	0	12.96	13.50	1	12.24
	23095	707.5	1RB Mid	1 Pos 7	13.50	0	13.01	13.50	1	12.31	
			1RB High	1 Pos 14	13.50	0	12.97	13.50	1	12.26	
			50% RB Low	8 Pos 0	13.50	1	11.95	13.50	2	10.96	
			50% RB Mid	8 Pos 4	13.50	1	11.94	13.50	2	10.96	
			50% RB High	8 Pos 7	13.50	1	11.94	13.50	2	10.96	
			100% RB	15 Pos 0	13.50	1	11.95	13.50	2	10.92	

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 12	1.4 MHz	23017	699.7	1RB Low	1 Pos 0	13.50	0	12.93	13.50	1	11.84
				1RB Mid	1 Pos 2	13.50	0	13.05	13.50	1	12.00
				1RB High	1 Pos 5	13.50	0	12.93	13.50	1	11.85
				50% RB Low	3 Pos 0	13.50	0	12.93	13.50	1	12.13
				50% RB Mid	3 Pos 1	13.50	0	12.94	13.50	1	12.12
				50% RB High	3 Pos 2	13.50	0	12.95	13.50	1	12.17
		23095	707.5	100% RB	6 Pos 0	13.50	1	11.94	13.50	2	10.98
				1RB Low	1 Pos 0	13.50	0	12.94	13.50	1	11.87
				1RB Mid	1 Pos 2	13.50	0	13.00	13.50	1	11.93
				1RB High	1 Pos 5	13.50	0	12.96	13.50	1	11.88
				50% RB Low	3 Pos 0	13.50	0	12.88	13.50	1	12.07
				50% RB Mid	3 Pos 1	13.50	0	12.89	13.50	1	12.07
		23173	715.3	50% RB High	3 Pos 2	13.50	0	12.84	13.50	1	12.05
				100% RB	6 Pos 0	13.50	1	11.89	13.50	2	10.93
				1RB Low	1 Pos 0	13.50	0	12.97	13.50	1	11.86
				1RB Mid	1 Pos 2	13.50	0	13.00	13.50	1	11.94
				1RB High	1 Pos 5	13.50	0	12.97	13.50	1	11.88
				50% RB Low	3 Pos 0	13.50	0	12.91	13.50	1	12.13
		50% RB Mid	3 Pos 1	13.50	0	12.95	13.50	1	12.14		
		50% RB High	3 Pos 2	13.50	0	12.94	13.50	1	12.16		
		100% RB	6 Pos 0	13.50	1	11.96	13.50	2	11.00		

B.4.2.7 LTE band 13 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 13	10 MHz	23230	782	1RB Low	1 Pos 0	14.50	0	13.99	14.50	1	13.28
				1RB Mid	1 Pos 24	14.50	0	13.98	14.50	1	13.26
				1RB High	1 Pos 49	14.50	0	13.93	14.50	1	13.22
				50% RB Low	25 Pos 0	14.50	1	12.84	14.50	2	11.93
				50% RB Mid	25 Pos 12	14.50	1	12.91	14.50	2	12.00
				50% RB High	25 Pos 24	14.50	1	12.94	14.50	2	12.02
	5.0 MHz	23230	782	100% RB	50 Pos 0	14.50	1	12.91	14.50	2	11.90
				1RB Low	1 Pos 0	14.50	0	13.93	14.50	1	13.17
				1RB Mid	1 Pos 12	14.50	0	13.94	14.50	1	13.17
				1RB High	1 Pos 24	14.50	0	13.88	14.50	1	13.11
				50% RB Low	12 Pos 0	14.50	1	12.87	14.50	2	11.90
				50% RB Mid	12 Pos 6	14.50	1	12.85	14.50	2	11.90
				50% RB High	12 Pos 11	14.50	1	12.84	14.50	2	11.91
				100% RB	25 Pos 0	14.50	1	12.88	14.50	2	11.90

B.4.2.8 LTE band 14 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 14	10 MHz	23330	793	1RB Low	1 Pos 0	14.50	0	13.94	14.50	1	13.27
				1RB Mid	1 Pos 24	14.50	0	13.96	14.50	1	13.30
				1RB High	1 Pos 49	14.50	0	13.89	14.50	1	13.23
				50% RB Low	25 Pos 0	14.50	1	12.95	14.50	2	12.03
				50% RB Mid	25 Pos 12	14.50	1	12.96	14.50	2	12.03
				50% RB High	25 Pos 24	14.50	1	13.01	14.50	2	12.06
	5.0 MHz	23330	793	100% RB	50 Pos 0	14.50	1	12.98	14.50	2	11.95
				1RB Low	1 Pos 0	14.50	0	13.93	14.50	1	13.21
				1RB Mid	1 Pos 12	14.50	0	13.93	14.50	1	13.23
				1RB High	1 Pos 24	14.50	0	13.91	14.50	1	13.19
				50% RB Low	12 Pos 0	14.50	1	12.89	14.50	2	11.89
				50% RB Mid	12 Pos 6	14.50	1	12.91	14.50	2	11.90
				50% RB High	12 Pos 11	14.50	1	12.91	14.50	2	11.85
				100% RB	25 Pos 0	14.50	1	12.92	14.50	2	11.96

B.4.2.9 LTE band 17 FDD – Antenna 5

SAR Measurement for LTE Band 17 FDD (Frequency range: 704 – 716MHz) is covered by LTE Band 12 FDD (Frequency range: 699 – 716MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.10 LTE band 25 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 25	20 MHz	26140	1860.0	1RB Low	1 Pos 0	12.50	0	11.57	12.50	1	10.73
				1RB Mid	1 Pos 50	12.50	0	11.57	12.50	1	10.71
				1RB High	1 Pos 99	12.50	0	11.35	12.50	1	10.53
				50% RB Low	50 Pos 0	12.50	1	10.61	12.50	2	9.58
				50% RB Mid	50 Pos 24	12.50	1	10.55	12.50	2	9.53
				50% RB High	50 Pos 50	12.50	1	10.51	12.50	2	9.52
		100% RB	100 Pos 0	12.50	1	10.57	12.50	2	9.50		
		26365	1882.5	1RB Low	1 Pos 0	12.50	0	11.40	12.50	1	10.56
				1RB Mid	1 Pos 50	12.50	0	11.59	12.50	1	10.72
				1RB High	1 Pos 99	12.50	0	11.36	12.50	1	10.49
				50% RB Low	50 Pos 0	12.50	1	10.45	12.50	2	9.44
				50% RB Mid	50 Pos 24	12.50	1	10.51	12.50	2	9.46
				50% RB High	50 Pos 50	12.50	1	10.43	12.50	2	9.38
		100% RB	100 Pos 0	12.50	1	10.41	12.50	2	9.36		
		26590	1905.0	1RB Low	1 Pos 0	12.50	0	11.47	12.50	1	10.62
				1RB Mid	1 Pos 50	12.50	0	11.64	12.50	1	10.75
				1RB High	1 Pos 99	12.50	0	11.38	12.50	1	10.50
				50% RB Low	50 Pos 0	12.50	1	10.57	12.50	2	9.53
	50% RB Mid			50 Pos 24	12.50	1	10.59	12.50	2	9.55	
	50% RB High			50 Pos 50	12.50	1	10.42	12.50	2	9.43	
	100% RB	100 Pos 0	12.50	1	10.41	12.50	2	9.46			
	15 MHz	26115	1857.5	1RB Low	1 Pos 0	12.50	0	11.46	12.50	1	10.73
				1RB Mid	1 Pos 38	12.50	0	11.58	12.50	1	10.80
				1RB High	1 Pos 74	12.50	0	11.41	12.50	1	10.69
				50% RB Low	38 Pos 0	12.50	1	10.40	12.50	2	9.41
				50% RB Mid	38 Pos 19	12.50	1	10.46	12.50	2	9.49
				50% RB High	38 Pos 39	12.50	1	10.42	12.50	2	9.35
		100% RB	75 Pos 0	12.50	1	10.45	12.50	2	9.40		
		26365	1882.5	1RB Low	1 Pos 0	12.50	0	11.60	12.50	1	10.87
				1RB Mid	1 Pos 38	12.50	0	11.50	12.50	1	10.78
				1RB High	1 Pos 74	12.50	0	11.33	12.50	1	10.67
				50% RB Low	38 Pos 0	12.50	1	10.51	12.50	2	9.54
				50% RB Mid	38 Pos 19	12.50	1	10.49	12.50	2	9.45
				50% RB High	38 Pos 39	12.50	1	10.44	12.50	2	9.38
		100% RB	75 Pos 0	12.50	1	10.54	12.50	2	9.49		
		26615	1907.5	1RB Low	1 Pos 0	12.50	0	11.54	12.50	1	10.80
				1RB Mid	1 Pos 38	12.50	0	11.58	12.50	1	10.84
				1RB High	1 Pos 74	12.50	0	11.44	12.50	1	10.71
				50% RB Low	38 Pos 0	12.50	1	10.57	12.50	2	9.55
	50% RB Mid			38 Pos 19	12.50	1	10.57	12.50	2	9.54	
	50% RB High			38 Pos 39	12.50	1	10.44	12.50	2	9.41	
	100% RB	75 Pos 0	12.50	1	10.53	12.50	2	9.59			
	10 MHz	26090	1855.0	1RB Low	1 Pos 0	12.50	0	11.59	12.50	1	10.82
				1RB Mid	1 Pos 24	12.50	0	11.60	12.50	1	10.84
				1RB High	1 Pos 49	12.50	0	11.49	12.50	1	10.74
				50% RB Low	25 Pos 0	12.50	1	10.52	12.50	2	9.57
				50% RB Mid	25 Pos 12	12.50	1	10.48	12.50	2	9.55
				50% RB High	25 Pos 25	12.50	1	10.44	12.50	2	9.50
		100% RB	50 Pos0	12.50	1	10.50	12.50	2	9.46		
		26365	1882.5	1RB Low	1 Pos 0	12.50	0	11.65	12.50	1	10.92
				1RB Mid	1 Pos 24	12.50	0	11.63	12.50	1	10.87
				1RB High	1 Pos 49	12.50	0	11.46	12.50	1	10.78
				50% RB Low	25 Pos 0	12.50	1	10.53	12.50	2	9.61
				50% RB Mid	25 Pos 12	12.50	1	10.48	12.50	2	9.56
				50% RB High	25 Pos 25	12.50	1	10.43	12.50	2	9.47
		100% RB	50 Pos0	12.50	1	10.49	12.50	2	9.47		
		26640	1910.0	1RB Low	1 Pos 0	12.50	0	11.59	12.50	1	10.78
				1RB Mid	1 Pos 24	12.50	0	11.60	12.50	1	10.86
				1RB High	1 Pos 49	12.50	0	11.49	12.50	1	10.73
				50% RB Low	25 Pos 0	12.50	1	10.60	12.50	2	9.64
50% RB Mid	25 Pos 12			12.50	1	10.52	12.50	2	9.60		
50% RB High	25 Pos 25			12.50	1	10.45	12.50	2	9.48		
100% RB	50 Pos0	12.50	1	10.55	12.50	2	9.53				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE25	5 MHz	26065	1852.5	1RB Low	1 Pos 0	12.50	0	11.57	12.50	1	10.74
				1RB Mid	1 Pos 38	12.50	0	11.60	12.50	1	10.76
				1RB High	1 Pos 74	12.50	0	11.53	12.50	1	10.70
				50% RB Low	38 Pos 0	12.50	1	10.46	12.50	2	9.43
				50% RB Mid	38 Pos 19	12.50	1	10.47	12.50	2	9.43
				50% RB High	38 Pos 39	12.50	1	10.41	12.50	2	9.37
		100% RB	75 Pos 0	12.50	1	10.48	12.50	2	9.50		
		26365	1882.5	1RB Low	1 Pos 0	12.50	0	11.65	12.50	1	10.86
				1RB Mid	1 Pos 38	12.50	0	11.64	12.50	1	10.80
				1RB High	1 Pos 74	12.50	0	11.59	12.50	1	10.76
				50% RB Low	38 Pos 0	12.50	1	10.50	12.50	2	9.44
				50% RB Mid	38 Pos 19	12.50	1	10.49	12.50	2	9.45
				50% RB High	38 Pos 39	12.50	1	10.48	12.50	2	9.42
		100% RB	75 Pos 0	12.50	1	10.50	12.50	2	9.51		
		26665	1912.5	1RB Low	1 Pos 0	12.50	0	11.61	12.50	1	10.79
				1RB Mid	1 Pos 38	12.50	0	11.61	12.50	1	10.78
				1RB High	1 Pos 74	12.50	0	11.53	12.50	1	10.69
				50% RB Low	38 Pos 0	12.50	1	10.51	12.50	2	9.47
	50% RB Mid			38 Pos 19	12.50	1	10.49	12.50	2	9.45	
	50% RB High			38 Pos 39	12.50	1	10.47	12.50	2	9.39	
	100% RB	75 Pos 0	12.50	1	10.49	12.50	2	9.52			
	3 MHz	26055	1851.5	1RB Low	1 Pos 0	12.50	0	11.50	12.50	1	10.76
				1RB Mid	1 Pos 24	12.50	0	11.51	12.50	1	10.81
				1RB High	1 Pos 49	12.50	0	11.45	12.50	1	10.75
				50% RB Low	25 Pos 0	12.50	1	10.43	12.50	2	9.43
				50% RB Mid	25 Pos 12	12.50	1	10.40	12.50	2	9.42
				50% RB High	25 Pos 24	12.50	1	10.37	12.50	2	9.38
		100% RB	50 Pos 0	12.50	1	10.40	12.50	2	9.38		
		26365	1882.5	1RB Low	1 Pos 0	12.50	0	11.60	12.50	1	10.88
				1RB Mid	1 Pos 24	12.50	0	11.60	12.50	1	10.94
				1RB High	1 Pos 49	12.50	0	11.49	12.50	1	10.80
				50% RB Low	25 Pos 0	12.50	1	10.53	12.50	2	9.51
				50% RB Mid	25 Pos 12	12.50	1	10.52	12.50	2	9.51
				50% RB High	25 Pos 24	12.50	1	10.47	12.50	2	9.47
		100% RB	50 Pos 0	12.50	1	10.48	12.50	2	9.46		
		26675	1913.5	1RB Low	1 Pos 0	12.50	0	11.49	12.50	1	10.79
				1RB Mid	1 Pos 24	12.50	0	11.48	12.50	1	10.81
				1RB High	1 Pos 49	12.50	0	11.40	12.50	1	10.71
				50% RB Low	25 Pos 0	12.50	1	10.48	12.50	2	9.45
	50% RB Mid			25 Pos 12	12.50	1	10.44	12.50	2	9.44	
	50% RB High			25 Pos 24	12.50	1	10.39	12.50	2	9.41	
	100% RB	50 Pos 0	12.50	1	10.45	12.50	2	9.42			
	1.4 MHz	26047	1850.7	1RB Low	1 Pos 0	12.50	0	11.58	12.50	1	10.52
				1RB Mid	1 Pos 12	12.50	0	11.64	12.50	1	10.53
				1RB High	1 Pos 24	12.50	0	11.57	12.50	1	10.50
				50% RB Low	12 Pos 0	12.50	0	11.59	12.50	1	10.49
				50% RB Mid	12 Pos 6	12.50	0	11.59	12.50	1	10.50
				50% RB High	12 Pos 11	12.50	0	11.57	12.50	1	10.49
100% RB		25 Pos 0	12.50	1	10.52	12.50	2	9.49			
26365		1882.5	1RB Low	1 Pos 0	12.50	0	11.46	12.50	1	10.34	
			1RB Mid	1 Pos 12	12.50	0	11.50	12.50	1	10.43	
			1RB High	1 Pos 24	12.50	0	11.48	12.50	1	10.35	
			50% RB Low	12 Pos 0	12.50	0	11.44	12.50	1	10.58	
			50% RB Mid	12 Pos 6	12.50	0	11.43	12.50	1	10.61	
			50% RB High	12 Pos 11	12.50	0	11.39	12.50	1	10.59	
100% RB		25 Pos 0	12.50	1	10.42	12.50	2	9.46			
26683		1914.3	1RB Low	1 Pos 0	12.50	0	11.44	12.50	1	10.33	
			1RB Mid	1 Pos 12	12.50	0	11.50	12.50	1	10.40	
			1RB High	1 Pos 24	12.50	0	11.46	12.50	1	10.33	
			50% RB Low	12 Pos 0	12.50	0	11.44	12.50	1	10.58	
	50% RB Mid		12 Pos 6	12.50	0	11.45	12.50	1	10.59		
	50% RB High		12 Pos 11	12.50	0	11.43	12.50	1	10.60		
100% RB	25 Pos 0	12.50	1	10.44	12.50	2	9.47				

B.4.2.12 LTE band 26 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE26	15 MHz	26775	821.5	1RB Low	1 Pos 0	16.00	0	14.98	16.00	1	14.22
				1RB Mid	1 Pos 38	16.00	0	14.93	16.00	1	14.23
				1RB High	1 Pos 74	16.00	0	14.85	16.00	1	14.12
				50% RB Low	38 Pos 0	16.00	1	13.95	16.00	2	13.02
				50% RB Mid	38 Pos 19	16.00	1	13.92	16.00	2	12.98
				50% RB High	38 Pos 39	16.00	1	13.84	16.00	2	12.98
		26865	831.5	100% RB	75 Pos 0	16.00	1	13.90	16.00	2	13.00
				1RB Low	1 Pos 0	16.00	0	14.88	16.00	1	14.14
				1RB Mid	1 Pos 38	16.00	0	14.91	16.00	1	14.18
				1RB High	1 Pos 74	16.00	0	14.74	16.00	1	14.07
				50% RB Low	38 Pos 0	16.00	1	13.89	16.00	2	12.92
				50% RB Mid	38 Pos 19	16.00	1	13.86	16.00	2	12.91
		26965	841.5	50% RB High	38 Pos 39	16.00	1	13.79	16.00	2	12.84
				100% RB	75 Pos 0	16.00	1	13.87	16.00	2	12.89
				1RB Low	1 Pos 0	16.00	0	14.82	16.00	1	14.09
				1RB Mid	1 Pos 38	16.00	0	14.85	16.00	1	14.15
				1RB High	1 Pos 74	16.00	0	14.85	16.00	1	14.10
				50% RB Low	38 Pos 0	16.00	1	13.91	16.00	2	12.93
	10 MHz	26750	820	50% RB Mid	38 Pos 19	16.00	1	13.88	16.00	2	12.97
				50% RB High	38 Pos 39	16.00	1	13.87	16.00	2	12.98
				100% RB	75 Pos 0	16.00	1	13.89	16.00	2	12.95
				1RB Low	1 Pos 0	16.00	0	15.05	16.00	1	14.29
				1RB Mid	1 Pos 24	16.00	0	14.98	16.00	1	14.24
				1RB High	1 Pos 49	16.00	0	14.87	16.00	1	14.16
		26865	831.5	50% RB Low	25 Pos 0	16.00	1	13.96	16.00	2	13.09
				50% RB Mid	25 Pos 12	16.00	1	13.91	16.00	2	13.09
				50% RB High	25 Pos 24	16.00	1	13.89	16.00	2	13.06
				100% RB	50 Pos 0	16.00	1	13.96	16.00	2	13.01
				1RB Low	1 Pos 0	16.00	0	14.94	16.00	1	14.19
				1RB Mid	1 Pos 24	16.00	0	14.99	16.00	1	14.24
		26990	844	1RB High	1 Pos 49	16.00	0	14.86	16.00	1	14.13
				50% RB Low	25 Pos 0	16.00	1	13.87	16.00	2	13.05
				50% RB Mid	25 Pos 12	16.00	1	13.89	16.00	2	13.00
				50% RB High	25 Pos 24	16.00	1	13.81	16.00	2	13.01
				100% RB	50 Pos 0	16.00	1	13.90	16.00	2	12.95
				1RB Low	1 Pos 0	16.00	0	14.88	16.00	1	14.19
	5.0 MHz	26715	816.5	1RB Mid	1 Pos 24	16.00	0	14.98	16.00	1	14.19
				1RB High	1 Pos 49	16.00	0	14.91	16.00	1	14.15
				50% RB Low	25 Pos 0	16.00	1	13.90	16.00	2	13.04
				50% RB Mid	25 Pos 12	16.00	1	13.87	16.00	2	13.06
				50% RB High	25 Pos 24	16.00	1	13.89	16.00	2	13.01
				100% RB	50 Pos 0	16.00	1	13.91	16.00	2	13.00
		26865	831.5	1RB Low	1 Pos 0	16.00	0	15.05	16.00	1	14.25
				1RB Mid	1 Pos 12	16.00	0	15.03	16.00	1	14.18
				1RB High	1 Pos 24	16.00	0	15.01	16.00	1	14.21
				50% RB Low	12 Pos 0	16.00	1	13.94	16.00	2	13.02
				50% RB Mid	12 Pos 6	16.00	1	13.90	16.00	2	12.99
				50% RB High	12 Pos 11	16.00	1	13.89	16.00	2	12.96
27015		846.5	100% RB	25 Pos 0	16.00	1	13.92	16.00	2	13.04	
			1RB Low	1 Pos 0	16.00	0	15.00	16.00	1	14.21	
			1RB Mid	1 Pos 12	16.00	0	14.93	16.00	1	14.16	
			1RB High	1 Pos 24	16.00	0	14.92	16.00	1	14.13	
			50% RB Low	12 Pos 0	16.00	1	13.88	16.00	2	12.94	
			50% RB Mid	12 Pos 6	16.00	1	13.88	16.00	2	12.93	
27015	846.5	50% RB High	12 Pos 11	16.00	1	13.88	16.00	2	12.91		
		100% RB	25 Pos 0	16.00	1	13.87	16.00	2	12.98		
		1RB Low	1 Pos 0	16.00	0	14.96	16.00	1	14.18		
		1RB Mid	1 Pos 12	16.00	0	14.97	16.00	1	14.14		
		1RB High	1 Pos 24	16.00	0	15.01	16.00	1	14.11		
		50% RB Low	12 Pos 0	16.00	1	13.89	16.00	2	12.94		
27015	846.5	50% RB Mid	12 Pos 6	16.00	1	13.84	16.00	2	12.90		
		50% RB High	12 Pos 11	16.00	1	13.89	16.00	2	12.92		
		100% RB	25 Pos 0	16.00	1	13.89	16.00	2	13.02		

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE26	3.0 MHz	26705	815.5	1RB Low	1 Pos 0	16.00	0	14.98	16.00	1	14.27	
				1RB Mid	1 Pos 7	16.00	0	15.00	16.00	1	14.37	
				1RB High	1 Pos 14	16.00	0	14.88	16.00	1	14.20	
				50% RB Low	8 Pos 0	16.00	1	13.90	16.00	2	13.04	
				50% RB Mid	8 Pos 4	16.00	1	13.91	16.00	2	13.03	
				50% RB High	8 Pos 7	16.00	1	13.90	16.00	2	12.99	
		100% RB	15 Pos 0	16.00	1	13.91	16.00	2	12.96			
		26865	831.5	1RB Low	1 Pos 0	16.00	0	14.96	16.00	1	14.22	
				1RB Mid	1 Pos 7	16.00	0	14.92	16.00	1	14.24	
				1RB High	1 Pos 14	16.00	0	14.88	16.00	1	14.17	
				50% RB Low	8 Pos 0	16.00	1	13.88	16.00	2	12.96	
				50% RB Mid	8 Pos 4	16.00	1	13.84	16.00	2	12.94	
				50% RB High	8 Pos 7	16.00	1	13.82	16.00	2	12.94	
		100% RB	15 Pos 0	16.00	1	13.86	16.00	2	12.93			
		27025	847.5	1RB Low	1 Pos 0	16.00	0	14.92	16.00	1	14.26	
				1RB Mid	1 Pos 7	16.00	0	14.97	16.00	1	14.25	
				1RB High	1 Pos 14	16.00	0	14.88	16.00	1	14.18	
				50% RB Low	8 Pos 0	16.00	1	13.88	16.00	2	12.99	
				50% RB Mid	8 Pos 4	16.00	1	13.88	16.00	2	12.98	
				50% RB High	8 Pos 7	16.00	1	13.82	16.00	2	12.95	
		100% RB	15 Pos 0	16.00	1	13.87	16.00	2	12.91			
		1.4 MHz	26697	814.7	1RB Low	1 Pos 0	16.00	0	14.95	16.00	1	13.84
					1RB Mid	1 Pos 2	16.00	0	14.99	16.00	1	13.95
					1RB High	1 Pos 5	16.00	0	14.94	16.00	1	13.84
	50% RB Low				3 Pos 0	16.00	0	14.92	16.00	1	14.09	
	50% RB Mid				3 Pos 1	16.00	0	14.94	16.00	1	14.10	
	50% RB High				3 Pos 2	16.00	0	14.93	16.00	1	14.11	
	100% RB			6 Pos 0	16.00	1	13.93	16.00	2	13.04		
	26865			831.5	1RB Low	1 Pos 0	16.00	0	14.90	16.00	1	13.80
					1RB Mid	1 Pos 2	16.00	0	14.95	16.00	1	13.87
					1RB High	1 Pos 5	16.00	0	14.92	16.00	1	13.82
					50% RB Low	3 Pos 0	16.00	0	14.84	16.00	1	14.04
					50% RB Mid	3 Pos 1	16.00	0	14.86	16.00	1	14.00
			50% RB High		3 Pos 2	16.00	0	14.84	16.00	1	14.01	
	100% RB		6 Pos 0	16.00	1	13.86	16.00	2	12.97			
	27033		848.3	1RB Low	1 Pos 0	16.00	0	14.89	16.00	1	13.79	
				1RB Mid	1 Pos 2	16.00	0	14.93	16.00	1	13.85	
				1RB High	1 Pos 5	16.00	0	14.85	16.00	1	13.77	
				50% RB Low	3 Pos 0	16.00	0	14.84	16.00	1	14.02	
				50% RB Mid	3 Pos 1	16.00	0	14.87	16.00	1	14.03	
				50% RB High	3 Pos 2	16.00	0	14.87	16.00	1	14.07	
	100% RB		6 Pos 0	16.00	1	13.85	16.00	2	13.00			

B.4.2.13 LTE band 30 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE30	10 MHz	27710	2310	1RB Low	1 Pos 0	12.50	0	11.71	12.50	1	10.00
				1RB Mid	1 Pos 24	12.50	0	11.95	12.50	1	10.01
				1RB High	1 Pos 49	12.50	0	11.25	12.50	1	9.94
				50% RB Low	25 Pos 0	12.50	1	10.63	12.50	2	8.69
				50% RB Mid	25 Pos 12	12.50	1	10.88	12.50	2	8.80
				50% RB High	25 Pos 24	12.50	1	9.59	12.50	2	8.64
	5.0 MHz	27710	2310	100% RB	50 Pos 0	12.50	1	9.67	12.50	2	8.61
				1RB Low	1 Pos 0	12.50	0	10.67	12.50	1	9.94
				1RB Mid	1 Pos 12	12.50	0	10.77	12.50	1	9.97
				1RB High	1 Pos 24	12.50	0	10.74	12.50	1	9.94
				50% RB Low	12 Pos 0	12.50	1	9.73	12.50	2	8.66
				50% RB Mid	12 Pos 6	12.50	1	9.74	12.50	2	8.68
				50% RB High	12 Pos 11	12.50	1	9.70	12.50	2	8.61
				100% RB	25 Pos 0	12.50	1	9.72	12.50	2	8.72

B.4.2.15 LTE band 38 FDD – Antenna 5

SAR Measurement for LTE Band 38 TDD (Frequency range: 2570 – 2620MHz) is covered by LTE Band 41 TDD (Frequency range: 2496 – 2690MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.2.6 LTE band 41 TDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	20 MHz	39750	2506	1RB Low	1 Pos 0	16.50	0	15.69	16.50	1	14.87	
				1RB Mid	1 Pos 50	16.50	0	15.76	16.50	1	14.93	
				1RB High	1 Pos 99	16.50	0	15.58	16.50	1	14.76	
				50% RB Low	50 Pos 0	16.50	1	14.63	16.50	2	13.63	
				50% RB Mid	50 Pos 24	16.50	1	14.72	16.50	2	13.70	
				50% RB High	50 Pos 50	16.50	1	14.69	16.50	2	13.68	
		40185	2549.5	100% RB	100 Pos 0	16.50	1	14.68	16.50	2	13.67	
				1RB Low	1 Pos 0	16.50	0	15.42	16.50	1	14.64	
				1RB Mid	1 Pos 50	16.50	0	15.49	16.50	1	14.65	
				1RB High	1 Pos 99	16.50	0	15.50	16.50	1	14.68	
				50% RB Low	50 Pos 0	16.50	1	14.39	16.50	2	13.46	
				50% RB Mid	50 Pos 24	16.50	1	14.51	16.50	2	13.50	
		40620	2593	50% RB High	50 Pos 50	16.50	1	14.53	16.50	2	13.52	
				100% RB	100 Pos 0	16.50	1	14.45	16.50	2	13.48	
				1RB Low	1 Pos 0	16.50	0	15.70	16.50	1	14.89	
				1RB Mid	1 Pos 50	16.50	0	15.49	16.50	1	14.95	
				1RB High	1 Pos 99	16.50	0	15.61	16.50	1	14.78	
				50% RB Low	50 Pos 0	16.50	1	15.60	16.50	2	13.78	
		41055	2636.5	50% RB Mid	50 Pos 24	16.50	1	15.51	16.50	2	13.75	
				50% RB High	50 Pos 50	16.50	1	15.65	16.50	2	13.64	
				100% RB	100 Pos 0	16.50	1	15.72	16.50	2	13.70	
				1RB Low	1 Pos 0	16.50	0	15.60	16.50	1	14.80	
				1RB Mid	1 Pos 50	16.50	0	15.66	16.50	1	14.85	
				1RB High	1 Pos 99	16.50	0	15.48	16.50	1	14.67	
		41490	2680	50% RB Low	50 Pos 0	16.50	1	14.56	16.50	2	13.55	
				50% RB Mid	50 Pos 24	16.50	1	14.60	16.50	2	13.60	
				50% RB High	50 Pos 50	16.50	1	14.60	16.50	2	13.60	
				100% RB	100 Pos 0	16.50	1	14.59	16.50	2	13.58	
				1RB Low	1 Pos 0	16.50	0	15.72	16.50	1	14.93	
				1RB Mid	1 Pos 50	16.50	0	15.82	16.50	1	15.00	
				1RB High	1 Pos 99	16.50	0	15.68	16.50	1	14.87	
				50% RB Low	50 Pos 0	16.50	1	14.83	16.50	2	13.82	
				50% RB Mid	50 Pos 24	16.50	1	14.82	16.50	2	13.80	
				50% RB High	50 Pos 50	16.50	1	14.78	16.50	2	13.76	
				100% RB	100 Pos 0	16.50	1	14.82	16.50	2	13.77	

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE41	15 MHz	39750	2506	1RB Low	1 Pos 0	16.50	0	15.65	16.50	1	15.01
				1RB Mid	1 Pos 38	16.50	0	15.73	16.50	1	15.06
				1RB High	1 Pos 74	16.50	0	15.59	16.50	1	14.94
				50% RB Low	38 Pos 0	16.50	1	14.63	16.50	2	13.64
				50% RB Mid	38 Pos 19	16.50	1	14.67	16.50	2	13.66
				50% RB High	38 Pos 39	16.50	1	14.69	16.50	2	13.70
		100% RB	75 Pos 0	16.50	1	14.71	16.50	2	13.66		
		40185	2549.5	1RB Low	1 Pos 0	16.50	0	15.39	16.50	1	14.73
				1RB Mid	1 Pos 38	16.50	0	15.46	16.50	1	14.79
				1RB High	1 Pos 74	16.50	0	15.45	16.50	1	14.79
				50% RB Low	38 Pos 0	16.50	1	14.39	16.50	2	13.47
				50% RB Mid	38 Pos 19	16.50	1	14.46	16.50	2	13.39
				50% RB High	38 Pos 39	16.50	1	14.45	16.50	2	13.45
		100% RB	75 Pos 0	16.50	1	14.49	16.50	2	13.46		
		40620	2593	1RB Low	1 Pos 0	16.50	0	15.71	16.50	1	15.03
				1RB Mid	1 Pos 38	16.50	0	15.75	16.50	1	15.09
				1RB High	1 Pos 74	16.50	0	15.63	16.50	1	14.97
				50% RB Low	38 Pos 0	16.50	1	14.76	16.50	2	13.77
				50% RB Mid	38 Pos 19	16.50	1	14.70	16.50	2	13.71
				50% RB High	38 Pos 39	16.50	1	14.65	16.50	2	13.65
		100% RB	75 Pos 0	16.50	1	14.72	16.50	2	13.73		
		41055	2636.5	1RB Low	1 Pos 0	16.50	0	15.58	16.50	1	14.93
				1RB Mid	1 Pos 38	16.50	0	15.61	16.50	1	14.96
				1RB High	1 Pos 74	16.50	0	15.53	16.50	1	14.84
				50% RB Low	38 Pos 0	16.50	1	14.61	16.50	2	13.59
				50% RB Mid	38 Pos 19	16.50	1	14.56	16.50	2	13.55
				50% RB High	38 Pos 39	16.50	1	14.58	16.50	2	13.58
		100% RB	75 Pos 0	16.50	1	14.64	16.50	2	13.60		
		41490	2680.0	1RB Low	1 Pos 0	16.50	0	15.71	16.50	1	15.04
				1RB Mid	1 Pos 38	16.50	0	15.78	16.50	1	15.13
				1RB High	1 Pos 74	16.50	0	15.71	16.50	1	15.06
				50% RB Low	38 Pos 0	16.50	1	14.80	16.50	2	13.78
				50% RB Mid	38 Pos 19	16.50	1	14.77	16.50	2	13.76
				50% RB High	38 Pos 39	16.50	1	14.77	16.50	2	13.77
		100% RB	75 Pos 0	16.50	1	14.79	16.50	2	13.77		

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	10 MHz	39750	2506	1RB Low	1 Pos 0	16.50	0	15.74	16.50	1	15.06	
				1RB Mid	1 Pos 24	16.50	0	15.77	16.50	1	15.09	
				1RB High	1 Pos 49	16.50	0	15.71	16.50	1	15.04	
				50% RB Low	25 Pos 0	16.50	1	14.65	16.50	2	13.69	
				50% RB Mid	25 Pos 12	16.50	1	14.72	16.50	2	13.76	
				50% RB High	25 Pos 24	16.50	1	14.72	16.50	2	13.77	
		40185	2549.5	2506	100% RB	50 Pos 0	16.50	1	14.74	16.50	2	13.67
					1RB Low	1 Pos 0	16.50	0	15.49	16.50	1	14.84
					1RB Mid	1 Pos 24	16.50	0	15.51	16.50	1	14.81
					1RB High	1 Pos 49	16.50	0	15.48	16.50	1	14.85
					50% RB Low	25 Pos 0	16.50	1	14.45	16.50	2	13.51
					50% RB Mid	25 Pos 12	16.50	1	14.45	16.50	2	13.52
		40620	2593	2593	50% RB High	25 Pos 24	16.50	1	14.42	16.50	2	13.49
					100% RB	50 Pos 0	16.50	1	14.53	16.50	2	13.48
					1RB Low	1 Pos 0	16.50	0	15.78	16.50	1	15.10
					1RB Mid	1 Pos 24	16.50	0	15.77	16.50	1	15.07
					1RB High	1 Pos 49	16.50	0	15.70	16.50	1	15.04
					50% RB Low	25 Pos 0	16.50	1	14.75	16.50	2	13.83
		41055	2636.5	2636.5	50% RB Mid	25 Pos 12	16.50	1	14.75	16.50	2	13.81
					100% RB	50 Pos 0	16.50	1	14.64	16.50	2	13.73
					1RB Low	1 Pos 0	16.50	1	14.75	16.50	2	13.75
					1RB Mid	1 Pos 24	16.50	0	15.66	16.50	1	14.97
					1RB High	1 Pos 49	16.50	0	15.66	16.50	1	14.95
					50% RB Low	25 Pos 0	16.50	0	15.60	16.50	1	14.95
		41490	2680	2680	50% RB Mid	25 Pos 12	16.50	1	14.58	16.50	2	13.67
					100% RB	50 Pos 0	16.50	1	14.58	16.50	2	13.65
					1RB Low	1 Pos 0	16.50	1	14.57	16.50	2	13.64
					1RB Mid	1 Pos 24	16.50	1	14.62	16.50	2	13.59
					1RB High	1 Pos 49	16.50	0	15.77	16.50	1	15.10
					50% RB Low	25 Pos 0	16.50	0	15.82	16.50	1	15.15
		41490	2680	2680	50% RB Mid	25 Pos 12	16.50	0	15.78	16.50	1	15.16
					100% RB	50 Pos 0	16.50	1	14.80	16.50	2	13.85
					1RB Low	1 Pos 0	16.50	1	14.77	16.50	2	13.83
					1RB Mid	1 Pos 24	16.50	1	14.75	16.50	2	13.81
					1RB High	1 Pos 49	16.50	1	14.80	16.50	2	13.78
					50% RB Low	25 Pos 0	16.50	0	15.82	16.50	1	15.15

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE41	5.0 MHz	39750	2506	1RB Low	1 Pos 0	16.50	0	15.80	16.50	1	15.14	
				1RB Mid	1 Pos 12	16.50	0	15.82	16.50	1	15.13	
				1RB High	1 Pos 24	16.50	0	15.79	16.50	1	15.11	
				50% RB Low	12 Pos 0	16.50	1	14.72	16.50	2	13.69	
				50% RB Mid	12 Pos 6	16.50	1	14.72	16.50	2	13.68	
				50% RB High	12 Pos 11	16.50	1	14.73	16.50	2	13.66	
		40185	2549.5	100% RB	25 Pos 0	16.50	1	14.78	16.50	2	13.75	
				1RB Low	1 Pos 0	16.50	0	15.55	16.50	1	14.88	
				1RB Mid	1 Pos 12	16.50	0	15.52	16.50	1	14.85	
				1RB High	1 Pos 24	16.50	0	15.55	16.50	1	14.86	
				50% RB Low	12 Pos 0	16.50	1	14.49	16.50	2	13.44	
				50% RB Mid	12 Pos 6	16.50	1	14.46	16.50	2	13.41	
		40620	2593	50% RB High	12 Pos 11	16.50	1	14.46	16.50	2	13.42	
				100% RB	25 Pos 0	16.50	1	14.51	16.50	2	13.49	
				1RB Low	1 Pos 0	16.50	0	15.84	16.50	1	15.16	
				1RB Mid	1 Pos 12	16.50	0	15.80	16.50	1	15.14	
				1RB High	1 Pos 24	16.50	0	15.83	16.50	1	15.12	
				50% RB Low	12 Pos 0	16.50	1	14.76	16.50	2	13.74	
		41055	2636.5	50% RB Mid	12 Pos 6	16.50	1	14.76	16.50	2	13.70	
				50% RB High	12 Pos 11	16.50	1	14.70	16.50	2	13.65	
				100% RB	25 Pos 0	16.50	1	14.74	16.50	2	13.75	
				1RB Low	1 Pos 0	16.50	0	15.69	16.50	1	15.05	
				1RB Mid	1 Pos 12	16.50	0	15.72	16.50	1	15.01	
				1RB High	1 Pos 24	16.50	0	15.68	16.50	1	14.98	
		41490	2680	50% RB Low	12 Pos 0	16.50	1	14.59	16.50	2	13.55	
				50% RB Mid	12 Pos 6	16.50	1	14.58	16.50	2	13.53	
				50% RB High	12 Pos 11	16.50	1	14.57	16.50	2	13.53	
				100% RB	25 Pos 0	16.50	1	14.62	16.50	2	13.62	
				1RB Low	1 Pos 0	16.50	0	15.84	16.50	1	15.18	
				1RB Mid	1 Pos 12	16.50	0	15.85	16.50	1	15.17	
				1RB High	1 Pos 24	16.50	0	15.85	16.50	1	15.18	
				50% RB Low	12 Pos 0	16.50	1	14.82	16.50	2	13.76	
				50% RB Mid	12 Pos 6	16.50	1	14.75	16.50	2	13.72	
				50% RB High	12 Pos 11	16.50	1	14.75	16.50	2	13.71	
				100% RB	25 Pos 0	16.50	1	14.79	16.50	2	13.81	

B.4.2.18 LTE band 48 TDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	20 MHz	55340	3560	1RB Low	1 Pos 0	17.00	0	15.15	17.00	0	14.26
				1RB Mid	1 Pos 50	17.00	0	15.27	17.00	0	14.75
				1RB High	1 Pos 99	17.00	0	15.14	17.00	0	14.50
				50% RB Low	50 Pos 0	17.00	1	14.35	17.00	1	13.34
				50% RB Mid	50 Pos 24	17.00	1	14.36	17.00	1	13.32
				50% RB High	50 Pos 50	17.00	1	14.28	17.00	1	13.32
		55990	3625	100% RB	100 Pos 0	17.00	1	14.35	17.00	1	13.34
				1RB Low	1 Pos 0	17.00	0	16.22	17.00	0	14.64
				1RB Mid	1 Pos 50	17.00	0	16.52	17.00	0	14.80
				1RB High	1 Pos 99	17.00	0	16.26	17.00	0	14.60
				50% RB Low	50 Pos 0	17.00	1	15.44	17.00	1	13.45
				50% RB Mid	50 Pos 24	17.00	1	15.75	17.00	1	13.48
		56640	3690	50% RB High	50 Pos 50	17.00	1	15.44	17.00	1	13.46
				100% RB	100 Pos 0	17.00	1	15.37	17.00	1	13.40
				1RB Low	1 Pos 0	17.00	0	15.32	17.00	0	14.31
				1RB Mid	1 Pos 50	17.00	0	15.41	17.00	0	14.45
				1RB High	1 Pos 99	17.00	0	15.30	17.00	0	14.29
				50% RB Low	50 Pos 0	17.00	1	14.50	17.00	1	13.46
	15 MHz	55315	3557.5	50% RB Mid	50 Pos 24	17.00	1	14.52	17.00	1	13.56
				50% RB High	50 Pos 50	17.00	1	14.51	17.00	1	13.57
				100% RB	100 Pos 0	17.00	1	14.49	17.00	1	13.53
				1RB Low	1 Pos 0	17.00	0	15.20	17.00	1	14.36
				1RB Mid	1 Pos 38	17.00	0	15.26	17.00	1	14.53
				1RB High	1 Pos 74	17.00	0	15.14	17.00	1	14.42
		55990	3625	50% RB Low	38 Pos 0	17.00	1	14.27	17.00	2	13.41
				50% RB Mid	38 Pos 19	17.00	1	14.26	17.00	2	13.35
				50% RB High	38 Pos 39	17.00	1	14.23	17.00	2	13.37
				100% RB	75 Pos 0	17.00	1	14.28	17.00	2	13.28
				1RB Low	1 Pos 0	17.00	0	15.25	17.00	1	14.86
				1RB Mid	1 Pos 38	17.00	0	15.40	17.00	1	14.90
		56665	3692.5	1RB High	1 Pos 74	17.00	0	15.34	17.00	1	14.86
				50% RB Low	38 Pos 0	17.00	1	14.41	17.00	2	13.42
				50% RB Mid	38 Pos 19	17.00	1	14.43	17.00	2	13.46
				50% RB High	38 Pos 39	17.00	1	14.47	17.00	2	13.44
				100% RB	75 Pos 0	17.00	1	14.45	17.00	2	13.43
				1RB Low	1 Pos 0	17.00	0	15.28	17.00	1	14.72
	10 MHz	55290	3555	1RB Mid	1 Pos 38	17.00	0	15.37	17.00	1	14.56
				1RB High	1 Pos 74	17.00	0	15.28	17.00	1	14.80
				50% RB Low	38 Pos 0	17.00	1	14.51	17.00	2	13.46
				50% RB Mid	38 Pos 19	17.00	1	14.47	17.00	2	13.50
				50% RB High	38 Pos 39	17.00	1	14.40	17.00	2	13.46
				100% RB	75 Pos 0	17.00	1	14.51	17.00	2	13.55
		55990	3625	1RB Low	1 Pos 0	17.00	0	15.28	17.00	1	14.47
				1RB Mid	1 Pos 24	17.00	0	15.29	17.00	1	14.53
				1RB High	1 Pos 49	17.00	0	15.26	17.00	1	14.45
				50% RB Low	25 Pos 0	17.00	1	14.40	17.00	2	13.34
				50% RB Mid	25 Pos 12	17.00	1	14.35	17.00	2	13.37
				50% RB High	25 Pos 25	17.00	1	14.34	17.00	2	13.39
		56690	3695	100% RB	50 Pos0	17.00	1	14.38	17.00	2	13.41
				1RB Low	1 Pos 0	17.00	0	15.40	17.00	1	14.83
				1RB Mid	1 Pos 24	17.00	0	15.50	17.00	1	14.93
				1RB High	1 Pos 49	17.00	0	15.44	17.00	1	14.90
				50% RB Low	25 Pos 0	17.00	1	14.47	17.00	2	13.50
				50% RB Mid	25 Pos 12	17.00	1	14.46	17.00	2	13.51
56690	3695	50% RB High	25 Pos 25	17.00	1	14.44	17.00	2	13.49		
		100% RB	50 Pos0	17.00	1	14.49	17.00	2	13.44		
		1RB Low	1 Pos 0	17.00	0	15.44	17.00	1	14.63		
		1RB Mid	1 Pos 24	17.00	0	15.50	17.00	1	14.60		
		1RB High	1 Pos 49	17.00	0	15.38	17.00	1	14.36		
		50% RB Low	25 Pos 0	17.00	1	14.47	17.00	2	13.48		
56690	3695	50% RB Mid	25 Pos 12	17.00	1	14.46	17.00	2	13.47		
		50% RB High	25 Pos 25	17.00	1	14.51	17.00	2	13.50		
		100% RB	50 Pos0	17.00	1	14.48	17.00	2	13.53		

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE 48	5 MHz	55265	3552.5	1RB Low	1 Pos 0	17.00	0	15.36	17.00	1	15.20
				1RB Mid	1 Pos 12	17.00	0	15.33	17.00	1	15.17
				1RB High	1 Pos 24	17.00	0	15.33	17.00	1	15.15
				50% RB Low	12 Pos 0	17.00	1	14.26	17.00	2	13.20
				50% RB Mid	12 Pos 6	17.00	1	14.28	17.00	2	13.34
				50% RB High	12 Pos 11	17.00	1	14.30	17.00	2	13.21
		55990	3625	100% RB	25 Pos 0	17.00	1	14.33	17.00	2	13.33
				1RB Low	1 Pos 0	17.00	0	15.30	17.00	1	14.50
				1RB Mid	1 Pos 12	17.00	0	15.39	17.00	1	14.90
				1RB High	1 Pos 24	17.00	0	15.33	17.00	1	14.97
				50% RB Low	12 Pos 0	17.00	1	14.36	17.00	2	13.44
				50% RB Mid	12 Pos 6	17.00	1	14.41	17.00	2	13.47
		56715	3697.5	50% RB High	12 Pos 11	17.00	1	14.36	17.00	2	13.40
				100% RB	25 Pos 0	17.00	1	14.38	17.00	2	13.41
				1RB Low	1 Pos 0	17.00	0	15.45	17.00	1	14.85
				1RB Mid	1 Pos 12	17.00	0	15.57	17.00	1	14.90
				1RB High	1 Pos 24	17.00	0	15.47	17.00	1	14.91
				50% RB Low	12 Pos 0	17.00	1	14.54	17.00	2	13.48
		56715	3697.5	50% RB Mid	12 Pos 6	17.00	1	14.52	17.00	2	13.48
				50% RB High	12 Pos 11	17.00	1	14.52	17.00	2	13.35
				100% RB	25 Pos 0	17.00	1	14.49	17.00	2	13.51

B.4.2.19 LTE band 66 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE66	20 MHz	132072	1720	1RB Low	1 Pos 0	13.00	0	11.75	13.00	1	10.93
				1RB Mid	1 Pos 50	13.00	0	11.77	13.00	1	10.94
				1RB High	1 Pos 99	13.00	0	11.62	13.00	1	10.76
				50% RB Low	50 Pos 0	13.00	1	10.62	13.00	2	9.59
				50% RB Mid	50 Pos 24	13.00	1	10.71	13.00	2	9.66
				50% RB High	50 Pos 50	13.00	1	10.68	13.00	2	9.64
		100% RB	100 Pos 0	13.00	1	10.60	13.00	2	9.59		
		132322	1745	1RB Low	1 Pos 0	13.00	0	11.65	13.00	1	10.91
				1RB Mid	1 Pos 50	13.00	0	11.71	13.00	1	10.89
				1RB High	1 Pos 99	13.00	0	11.56	13.00	1	10.75
				50% RB Low	50 Pos 0	13.00	1	10.74	13.00	2	9.73
				50% RB Mid	50 Pos 24	13.00	1	10.66	13.00	2	9.62
				50% RB High	50 Pos 50	13.00	1	10.61	13.00	2	9.58
		100% RB	100 Pos 0	13.00	1	10.69	13.00	2	9.64		
		132572	1770	1RB Low	1 Pos 0	13.00	0	11.66	13.00	1	10.84
				1RB Mid	1 Pos 50	13.00	0	11.77	13.00	1	10.95
				1RB High	1 Pos 99	13.00	0	11.61	13.00	1	10.78
				50% RB Low	50 Pos 0	13.00	1	10.55	13.00	2	9.56
	50% RB Mid			50 Pos 24	13.00	1	10.71	13.00	2	9.72	
	50% RB High			50 Pos 50	13.00	1	10.66	13.00	2	9.67	
	100% RB	100 Pos 0	13.00	1	10.61	13.00	2	9.60			
	15 MHz	132047	1717.5	1RB Low	1 Pos 0	13.00	0	11.70	13.00	1	11.03
				1RB Mid	1 Pos 38	13.00	0	11.73	13.00	1	11.05
				1RB High	1 Pos 74	13.00	0	11.60	13.00	1	10.92
				50% RB Low	38 Pos 0	13.00	1	10.56	13.00	2	9.57
				50% RB Mid	38 Pos 19	13.00	1	10.64	13.00	2	9.65
				50% RB High	38 Pos 39	13.00	1	10.65	13.00	2	9.63
		100% RB	75 Pos 0	13.00	1	10.62	13.00	2	9.63		
		132422	1755	1RB Low	1 Pos 0	13.00	0	11.69	13.00	1	10.77
				1RB Mid	1 Pos 38	13.00	0	11.63	13.00	1	10.94
				1RB High	1 Pos 74	13.00	0	11.61	13.00	1	10.91
				50% RB Low	38 Pos 0	13.00	1	10.64	13.00	2	9.63
				50% RB Mid	38 Pos 19	13.00	1	10.59	13.00	2	9.57
				50% RB High	38 Pos 39	13.00	1	10.59	13.00	2	9.54
		100% RB	75 Pos 0	13.00	1	10.63	13.00	2	9.64		
		132597	1772.5	1RB Low	1 Pos 0	13.00	0	11.66	13.00	1	10.98
				1RB Mid	1 Pos 38	13.00	0	11.74	13.00	1	11.04
				1RB High	1 Pos 74	13.00	0	11.65	13.00	1	10.98
				50% RB Low	38 Pos 0	13.00	1	10.60	13.00	2	9.63
	50% RB Mid			38 Pos 19	13.00	1	10.71	13.00	2	9.70	
	50% RB High			38 Pos 39	13.00	1	10.68	13.00	2	9.70	
	100% RB	75 Pos 0	13.00	1	10.71	13.00	2	9.66			
	10 MHz	132022	1715	1RB Low	1 Pos 0	13.00	0	11.78	13.00	1	11.08
				1RB Mid	1 Pos 24	13.00	0	11.73	13.00	1	11.02
				1RB High	1 Pos 49	13.00	0	11.71	13.00	1	10.98
				50% RB Low	25 Pos 0	13.00	1	10.63	13.00	2	9.69
				50% RB Mid	25 Pos 12	13.00	1	10.62	13.00	2	9.69
				50% RB High	25 Pos 24	13.00	1	10.69	13.00	2	9.73
		100% RB	50 Pos 0	13.00	1	10.70	13.00	2	9.64		
		132422	1755	1RB Low	1 Pos 0	13.00	0	11.72	13.00	1	11.00
				1RB Mid	1 Pos 24	13.00	0	11.71	13.00	1	10.98
				1RB High	1 Pos 49	13.00	0	11.66	13.00	1	10.98
				50% RB Low	25 Pos 0	13.00	1	10.68	13.00	2	9.73
				50% RB Mid	25 Pos 12	13.00	1	10.62	13.00	2	9.70
				50% RB High	25 Pos 24	13.00	1	10.54	13.00	2	9.66
		100% RB	50 Pos 0	13.00	1	10.64	13.00	2	9.62		
		132622	1775	1RB Low	1 Pos 0	13.00	0	11.74	13.00	1	11.04
				1RB Mid	1 Pos 24	13.00	0	11.79	13.00	1	11.06
				1RB High	1 Pos 49	13.00	0	11.73	13.00	1	11.03
				50% RB Low	25 Pos 0	13.00	1	10.70	13.00	2	9.74
50% RB Mid	25 Pos 12			13.00	1	10.73	13.00	2	9.79		
50% RB High	25 Pos 24			13.00	1	10.71	13.00	2	9.76		
100% RB	50 Pos 0	13.00	1	10.75	13.00	2	9.69				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM			
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	
LTE66	5.0 MHz	131997	1712.5	1RB Low	1 Pos 0	13.00	0	11.83	13.00	1	11.06	
				1RB Mid	1 Pos 12	13.00	0	11.77	13.00	1	11.05	
				1RB High	1 Pos 24	13.00	0	11.75	13.00	1	10.97	
				50% RB Low	12 Pos 0	13.00	1	10.68	13.00	2	9.64	
				50% RB Mid	12 Pos 6	13.00	1	10.68	13.00	2	9.62	
				50% RB High	12 Pos 11	13.00	1	10.68	13.00	2	9.65	
		100% RB	25 Pos 0	13.00	1	10.67	13.00	2	9.70			
		132422	1755	1RB Low	1 Pos 0	13.00	0	11.66	13.00	1	10.94	
				1RB Mid	1 Pos 12	13.00	0	11.67	13.00	1	10.94	
				1RB High	1 Pos 24	13.00	0	11.67	13.00	1	10.90	
				50% RB Low	12 Pos 0	13.00	1	10.63	13.00	2	9.59	
				50% RB Mid	12 Pos 6	13.00	1	10.63	13.00	2	9.53	
				50% RB High	12 Pos 11	13.00	1	10.58	13.00	2	9.52	
		100% RB	25 Pos 0	13.00	1	10.63	13.00	2	9.58			
		132647	1777.5	1RB Low	1 Pos 0	13.00	0	11.77	13.00	1	11.01	
				1RB Mid	1 Pos 12	13.00	0	11.83	13.00	1	11.05	
				1RB High	1 Pos 24	13.00	0	11.80	13.00	1	11.01	
				50% RB Low	12 Pos 0	13.00	1	10.76	13.00	2	9.73	
	50% RB Mid			12 Pos 6	13.00	1	10.76	13.00	2	9.70		
	50% RB High			12 Pos 11	13.00	1	10.71	13.00	2	9.66		
	100% RB	25 Pos 0	13.00	1	10.74	13.00	2	9.76				
	3.0 MHz	131987	1711.5	1RB Low	1 Pos 0	13.00	0	11.75	13.00	1	11.07	
				1RB Mid	1 Pos 7	13.00	0	11.80	13.00	1	11.10	
				1RB High	1 Pos 14	13.00	0	11.64	13.00	1	10.99	
				50% RB Low	8 Pos 0	13.00	1	10.69	13.00	2	9.67	
				50% RB Mid	8 Pos 4	13.00	1	10.71	13.00	2	9.71	
				50% RB High	8 Pos 7	13.00	1	10.66	13.00	2	9.67	
			100% RB	15 Pos 0	13.00	1	10.67	13.00	2	9.63		
			132422	1755	1RB Low	1 Pos 0	13.00	0	11.58	13.00	1	10.94
					1RB Mid	1 Pos 7	13.00	0	11.67	13.00	1	10.97
					1RB High	1 Pos 14	13.00	0	11.54	13.00	1	10.93
					50% RB Low	8 Pos 0	13.00	1	10.60	13.00	2	9.61
					50% RB Mid	8 Pos 4	13.00	1	10.66	13.00	2	9.56
		50% RB High			8 Pos 7	13.00	1	10.60	13.00	2	9.55	
		100% RB	15 Pos 0	13.00	1	10.61	13.00	2	9.54			
		132657	1778.5	1RB Low	1 Pos 0	13.00	0	11.70	13.00	1	11.05	
				1RB Mid	1 Pos 7	13.00	0	11.74	13.00	1	11.06	
				1RB High	1 Pos 14	13.00	0	11.66	13.00	1	11.02	
				50% RB Low	8 Pos 0	13.00	1	10.73	13.00	2	9.73	
	50% RB Mid			8 Pos 4	13.00	1	10.74	13.00	2	9.73		
	50% RB High			8 Pos 7	13.00	1	10.71	13.00	2	9.72		
	100% RB	15 Pos 0	13.00	1	10.72	13.00	2	9.68				
	1.4 MHz	131979	1710	1RB Low	1 Pos 0	13.00	0	11.80	13.00	1	10.71	
				1RB Mid	1 Pos 2	13.00	0	11.87	13.00	1	10.77	
				1RB High	1 Pos 5	13.00	0	11.84	13.00	1	10.71	
				50% RB Low	3 Pos 0	13.00	0	11.74	13.00	1	10.87	
				50% RB Mid	3 Pos 1	13.00	0	11.75	13.00	1	10.88	
				50% RB High	3 Pos 2	13.00	0	11.73	13.00	1	10.90	
			100% RB	6 Pos 0	13.00	1	10.72	13.00	2	9.68		
			132422	1755	1RB Low	1 Pos 0	13.00	0	11.67	13.00	1	10.59
					1RB Mid	1 Pos 2	13.00	0	11.74	13.00	1	10.64
					1RB High	1 Pos 5	13.00	0	11.68	13.00	1	10.58
					50% RB Low	3 Pos 0	13.00	0	11.64	13.00	1	10.73
					50% RB Mid	3 Pos 1	13.00	0	11.64	13.00	1	10.75
		50% RB High			3 Pos 2	13.00	0	11.62	13.00	1	10.77	
		100% RB	6 Pos 0	13.00	1	10.56	13.00	2	9.65			
		132665	1779.3	1RB Low	1 Pos 0	13.00	0	11.77	13.00	1	10.68	
				1RB Mid	1 Pos 2	13.00	0	11.84	13.00	1	10.74	
				1RB High	1 Pos 5	13.00	0	11.76	13.00	1	10.71	
				50% RB Low	3 Pos 0	13.00	0	11.76	13.00	1	10.89	
50% RB Mid	3 Pos 1			13.00	0	11.78	13.00	1	10.89			
50% RB High	3 Pos 2			13.00	0	11.77	13.00	1	10.90			
100% RB	6 Pos 0	13.00	1	10.73	13.00	2	9.75					

B.4.2.21 LTE band 71 FDD – Antenna 5

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM		
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)
LTE71	20 MHz	133222	673	1RB Low	1 Pos 0	19.00	0	17.80	19.00	1	17.13
				1RB Mid	1 Pos 50	19.00	0	18.02	19.00	1	17.30
				1RB High	1 Pos 99	19.00	0	17.87	19.00	1	17.22
				50% RB Low	50 Pos 0	19.00	1	16.83	19.00	2	15.78
				50% RB Mid	50 Pos 24	19.00	1	16.89	19.00	2	15.85
				50% RB High	50 Pos 50	19.00	1	16.70	19.00	2	15.66
		100% RB	100 Pos 0	19.00	1	16.77	19.00	2	15.71		
		133297	680.5	1RB Low	1 Pos 0	19.00	0	18.88	19.00	1	17.25
				1RB Mid	1 Pos 50	19.00	0	18.95	19.00	1	17.46
				1RB High	1 Pos 99	19.00	0	18.89	19.00	1	17.33
				50% RB Low	50 Pos 0	19.00	1	16.91	19.00	2	16.00
				50% RB Mid	50 Pos 24	19.00	1	17.88	19.00	2	15.94
				50% RB High	50 Pos 50	19.00	1	17.02	19.00	2	15.90
		100% RB	100 Pos 0	19.00	1	16.92	19.00	2	15.96		
		133372	688	1RB Low	1 Pos 0	19.00	0	17.76	19.00	1	16.75
				1RB Mid	1 Pos 50	19.00	0	18.05	19.00	1	16.92
				1RB High	1 Pos 99	19.00	0	17.86	19.00	1	16.79
				50% RB Low	50 Pos 0	19.00	1	16.93	19.00	2	15.96
	50% RB Mid			50 Pos 24	19.00	1	16.94	19.00	2	15.94	
	50% RB High			50 Pos 50	19.00	1	16.91	19.00	2	15.92	
	100% RB	100 Pos 0	19.00	1	16.91	19.00	2	15.87			
	15 MHz	133197	670.5	1RB Low	1 Pos 0	19.00	0	17.74	19.00	1	16.80
				1RB Mid	1 Pos 38	19.00	0	18.01	19.00	1	17.02
				1RB High	1 Pos 74	19.00	0	17.80	19.00	1	17.00
				50% RB Low	38 Pos 0	19.00	1	16.85	19.00	2	15.92
				50% RB Mid	38 Pos 19	19.00	1	16.83	19.00	2	15.84
				50% RB High	38 Pos 39	19.00	1	16.88	19.00	2	15.86
		100% RB	75 Pos 0	19.00	1	16.90	19.00	2	15.9		
		133297	680.5	1RB Low	1 Pos 0	19.00	0	17.84	19.00	1	17.11
				1RB Mid	1 Pos 38	19.00	0	17.95	19.00	1	17.24
				1RB High	1 Pos 74	19.00	0	17.86	19.00	1	17.01
				50% RB Low	38 Pos 0	19.00	1	16.94	19.00	2	16.05
				50% RB Mid	38 Pos 19	19.00	1	16.89	19.00	2	16.03
				50% RB High	38 Pos 39	19.00	1	16.92	19.00	2	16.01
		100% RB	75 Pos 0	19.00	1	16.98	19.00	2	15.96		
		133397	690.5	1RB Low	1 Pos 0	19.00	0	17.94	19.00	1	17.16
				1RB Mid	1 Pos 38	19.00	0	18.01	19.00	1	17.26
				1RB High	1 Pos 74	19.00	0	17.72	19.00	1	17.30
				50% RB Low	38 Pos 0	19.00	1	16.80	19.00	2	15.86
	50% RB Mid			38 Pos 19	19.00	1	16.91	19.00	2	15.97	
	50% RB High			38 Pos 39	19.00	1	16.85	19.00	2	15.9	
	100% RB	75 Pos 0	19.00	1	16.88	19.00	2	15.82			
	10 MHz	133172	668	1RB Low	1 Pos 0	19.00	0	17.94	19.00	1	16.77
				1RB Mid	1 Pos 24	19.00	0	18.02	19.00	1	16.90
				1RB High	1 Pos 49	19.00	0	17.86	19.00	1	16.70
				50% RB Low	25 Pos 0	19.00	1	16.88	19.00	2	15.90
				50% RB Mid	25 Pos 12	19.00	1	16.85	19.00	2	15.88
				50% RB High	25 Pos 24	19.00	1	16.93	19.00	2	15.93
		100% RB	50 Pos 0	19.00	1	16.97	19.00	2	15.98		
		133297	680.5	1RB Low	1 Pos 0	19.00	0	17.97	19.00	1	17.13
				1RB Mid	1 Pos 24	19.00	0	17.96	19.00	1	17.30
				1RB High	1 Pos 49	19.00	0	17.90	19.00	1	17.18
				50% RB Low	25 Pos 0	19.00	1	16.99	19.00	2	15.99
				50% RB Mid	25 Pos 12	19.00	1	16.92	19.00	2	15.94
				50% RB High	25 Pos 24	19.00	1	16.85	19.00	2	15.88
		100% RB	50 Pos 0	19.00	1	16.98	19.00	2	15.95		
		133422	693	1RB Low	1 Pos 0	19.00	0	17.93	19.00	1	17.46
				1RB Mid	1 Pos 24	19.00	0	18.01	19.00	1	17.20
				1RB High	1 Pos 49	19.00	0	17.98	19.00	1	17.22
				50% RB Low	25 Pos 0	19.00	1	16.91	19.00	2	16.00
50% RB Mid	25 Pos 12			19.00	1	16.94	19.00	2	15.99		
50% RB High	25 Pos 24			19.00	1	16.83	19.00	2	15.9		
100% RB	50 Pos 0	19.00	1	16.89	19.00	2	15.87				

Band	BW	Channel #	Freq (MHz)	% RB Allocation	RB Position	QPSK			16 QAM				
						Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)	Factory Upper Tolerance (dBm)	M P R	Measured Output Power (dBm)		
LTE71	5.0 MHz	133147	665.5	1RB Low	1 Pos 0	19.00	0	17.90	19.00	1	17.72		
				1RB Mid	1 Pos 12	19.00	0	18.00	19.00	1	17.71		
				1RB High	1 Pos 24	19.00	0	17.95	19.00	1	17.68		
				50% RB Low	12 Pos 0	19.00	1	16.77	19.00	2	15.79		
				50% RB Mid	12 Pos 6	19.00	1	16.83	19.00	2	15.85		
				50% RB High	12 Pos 11	19.00	1	16.85	19.00	2	15.80		
		133297	680.5	100% RB	25 Pos 0	19.00	1	16.86	19.00	2	15.83		
				1RB Low	1 Pos 0	19.00	0	18.02	19.00	1	17.52		
				1RB Mid	1 Pos 12	19.00	0	17.94	19.00	1	17.54		
				1RB High	1 Pos 24	19.00	0	17.90	19.00	1	17.49		
				50% RB Low	12 Pos 0	19.00	1	16.92	19.00	2	15.93		
				50% RB Mid	12 Pos 6	19.00	1	16.85	19.00	2	15.85		
		133447	695.5	50% RB High	12 Pos 11	19.00	1	16.87	19.00	2	15.90		
				100% RB	25 Pos 0	19.00	1	16.91	19.00	2	15.91		
				1RB Low	1 Pos 0	19.00	0	18.06	19.00	1	17.80		
				1RB Mid	1 Pos 12	19.00	0	18.05	19.00	1	17.58		
				1RB High	1 Pos 24	19.00	0	18.00	19.00	1	17.50		
				50% RB Low	12 Pos 0	19.00	1	17.00	19.00	2	15.90		
						50% RB Mid	12 Pos 6	19.00	1	16.95	19.00	2	15.92
						50% RB High	12 Pos 11	19.00	1	16.98	19.00	2	15.80
						100% RB	25 Pos 0	19.00	1	17.00	19.00	2	15.97

B.4.3 UL Carrier Aggregation

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The UL CA mode power measurements represent the total power across both carriers.

According to November 2017 TCB workshop, the following needs to be performed: The maximum measured output power, RB allocation, CC offsets, CC channel BWs, MPR, modulation and other relevant information for all UL CA SAR configurations are required in SAR reports to support the test setup and results, including explanations, call box configurations and certain testing restriction

1) When the maximum output for UL CA is \leq standalone LTE mode

- The primary carrier is configured according to the highest standalone SAR configuration tested
- The secondary carrier and subsequent CCs are configured according to procedures used for power measurement and parameters similar to that used for the PCC

2) When the Reported SAR for UL CA configuration, is > 1.2 W/kg, UL CA SAR is also required for all the other test channels

B.4.3.2 LTE CA 5B – Antenna 5:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 5B	QPSK / 10MHz	26775	822.5	1RB High	20476	831.6	1RB Low	16.00	14.86

B.4.3.3 LTE CA 7C – Antenna 5:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 7C	QPSK / 20MHz	21100	2535	1RB High	21100	2535	1RB Low	11.00	9.73

B.4.3.4 LTE CA 38C – Antenna 5:

SAR Measurement for LTE Band 38 TDD (Frequency range: 2570 – 2620MHz) is covered by LTE Band 41 TDD (Frequency range: 2496 – 2690MHz) due to overlapping frequency range, same maximum tune-up, and same bandwidth.

B.4.3.5 LTE CA 41C – Antenna 5:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 41C	QPSK / 20MHz	40521	2583.1	1RB High	40719	2602.9	1RB Low	16.50	15.49

B.4.3.7 LTE CA 66B, 66C – Antenna 5:

Band	Modulation / BW	PCC			SCC			Pwr Avg (dBm)	Factory Upper Tolerance (dBm)
		Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation		
LTE 66B	QPSK / 10MHz	132373	1750.1	1RB High	132472	1760	1RB Low	13.00	11.71
LTE 66C	QPSK / 20MHz	132323	1745.1	1RB High	132521	1764.9	1RB Low	13.00	11.71

B.5 Tissue Parameters Measurement

Body TSL

Body TSL	Target TSL		Measured TSL		Deviation %		Date
	Freq (MHz)	$\epsilon'(F/m)$	$\sigma(S/m)$	$\epsilon'(F/m)$	$\sigma(S/m)$	Deviation ϵ'	
750	55.53	0.96	53.90	0.97	-2.94	1.04	2024-01-03
835	53.43	1.49	52.12	1.47	-2.45	-1.34	2024-01-03
	53.43	1.49	53.18	1.43	-0.47	-4.03	2024-01-08
1750	53.30	1.52	51.93	1.58	-2.57	3.95	2024-01-03
	53.30	1.52	52.98	1.54	-0.60	1.32	2024-01-08
1900	52.90	1.81	51.93	1.58	-2.57	3.95	2024-01-03
	52.90	1.81	52.98	1.54	-0.6	1.32	2024-01-08
2300	52.51	2.16	51.50	1.91	-2.65	5.52	2024-01-03
2600	51.05	3.55	51.07	2.20	-2.74	1.85	
3700	50.91	3.66	49.09	3.40	-3.84	-4.23	

See Annex D below for more details.

B.6 System Check Measurements

Body Measurements

Frequency (MHz)	Forwarded power (mW)	Average	Target SAR (W/kg)	Measured SAR (W/kg)	Deviation to target (%)	Deviation to target limit	Date
750	50	1g	8.75	8.20	-6.29	±10%	2024-01-04
		10g	5.72	5.20	-9.09		2024-01-04
835		1g	9.65	9.80	1.55		2024-01-09
		10g	6.32	6.20	-1.90		2024-01-09
		1g	9.65	10.40	7.77		2024-01-05
1750		10g	6.32	6.48	2.53		2024-01-05
		1g	37.10	36.60	-1.35		2024-01-09
		10g	19.60	18.80	-4.08		2024-01-09
		1g	37.10	36.80	-0.81		2024-01-05
1900		10g	19.60	19.20	-2.04		2024-01-05
		1g	40.30	44.20	9.68		2024-01-09
		10g	21.00	22.00	4.76		2024-01-09
		1g	40.30	38.60	-4.22		2024-01-05
2300		10g	21.00	19.60	-6.67		2024-01-05
		1g	47.90	50.20	4.80		2024-01-04
2600		10g	23.20	23.40	0.86		2024-01-04
		1g	54.10	53.60	-0.92		2024-01-05
3700		10g	24.10	23.40	-2.90		2024-01-05
		1g	62.10	67.20	8.21		2024-01-05
			10g	22.20	24.40		9.91

See Annex D for more details.

B.7 SAR Test Results**B.7.1 WCDMA****B.7.1.1 WCDMA II**

Band	BW (MHz)	Rate	Channel Number	Freq (MHz)	Antenna Vendor	Position	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band II	5	RMC 12.2kbps	9400	1880	1	Top Edge	1.50	0.30	0.43	
						Right Edge	1.50	0.08	0.11	
						Back Face	1.50	0.05	0.07	
					2	Top Edge	1.50	0.35	0.49	1
						Right Edge	1.50	0.01	0.01	
Back Face	1.50	0.06	0.09							

B.7.1.2 WCDMA IV

Band	BW (MHz)	Rate	Channel Number	Freq (MHz)	Antenna Vendor	Position	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band IV	5	RMC 12.2kbps	1413	1732.6	1	Top Edge	1.40	0.37	0.51	2
						Right Edge	1.40	0.06	0.09	
						Back Face	1.40	0.05	0.06	
					2	Top Edge	1.40	0.20	0.28	
						Right Edge	1.40	0.01	0.01	
Back Face	1.40	0.05	0.07							

B.7.1.3 WCDMA V

Band	BW (MHz)	Rate	Channel Number	Freq (MHz)	Antenna Vendor	Position	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band V	5	RMC 12.2kbps	4183	836.6	1	Top Edge	1.50	0.26	0.36	3
						Right Edge	1.50	0.04	0.05	
						Back Face	1.50	0.03	0.04	
					2	Top Edge	1.50	0.05	0.07	
						Right Edge	1.50	0.03	0.05	
Back Face	1.50	0.03	0.04							

B.7.2 LTE

B.7.2.1 LTE Band 5 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant.	% RB Allocation	Position	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 5	5	QPSK	10	20525	836.5	1	1RB Mid	Top Edge	1.14	0.33	0.43	4
							50RB Mid	Top Edge	1.24	0.32	0.43	
							1RB Mid	Right Edge	1.14	0.05	0.06	
							50RB Mid	Right Edge	1.24	0.07	0.09	
							1RB Mid	Back Face	1.14	0.03	0.04	
							50RB Mid	Back Face	1.24	0.03	0.04	
						2	1RB Mid	Top Edge	1.14	0.27	0.34	
							50RB Mid	Top Edge	1.24	0.27	0.35	
							1RB Mid	Right Edge	1.14	0.12	0.16	
							50RB Mid	Right Edge	1.24	0.06	0.07	
							1RB Mid	Back Face	1.14	0.03	0.04	
							50RB Mid	Back Face	1.24	0.03	0.05	

B.7.2.1.1 UL CA 5B

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band5, antenna vendor 1 configuration that gives the highest SAR, thus, the same is used for UL CA testing

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 5	5	QPSK / 10MHz	20476	831.6	1RB High	20575	841.2	1RB Low	1	1.14	0.06	0.08

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.7.2.2 LTE Band 7 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Position	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 7	5	QPSK	20	21100	2535	1	1RB Mid	Top Edge	1.27	0.18	0.24	
							50RB Mid	Top Edge	1.34	0.18	0.24	
							1RB Mid	Right Edge	1.27	0.01	0.02	
							50RB Mid	Right Edge	1.34	0.01	0.01	
							1RB Mid	Back Face	1.27	0.03	0.04	
							50RB Mid	Back Face	1.34	0.02	0.03	
				21100	2535	2	1RB Mid	Top Edge	1.27	0.18	0.25	5
							50RB Mid	Top Edge	1.34	0.17	0.24	
							1RB Mid	Right Edge	1.27	0.01	0.02	
							50RB Mid	Right Edge	1.34	0.01	0.01	
							1RB Mid	Back Face	1.27	0.03	0.04	
							50RB Mid	Back Face	1.34	0.02	0.03	

B.7.2.2.1 UL CA 7C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band7, antenna vendor 2 configuration that gives the highest SAR, thus, the same is used for UL CA testing

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 7	5	QPSK / 20MHz	21100	2535	1RB High	21199	2544.9	1RB Low	2	1.27	0.08	0.11

PCC RB allocation settings for UL CA have been adjusted based on the worst-case power

B.7.2.3 LTE Band 12 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 12	5	QPSK	10	23095	707.5	1	1RB Mid	Top Edge	0.52	0.22	0.24	6
							50RB Mid	Top Edge	0.60	0.21	0.24	
							1RB Mid	Right Edge	0.52	0.02	0.02	
							50RB Mid	Right Edge	0.60	0.01	0.02	
							1RB Mid	Back Face	0.52	0.02	0.02	
						2	50RB Mid	Back Face	0.60	0.02	0.02	
							1RB Mid	Top Edge	0.52	0.14	0.16	
							50RB Mid	Top Edge	0.60	0.14	0.16	
							1RB Mid	Right Edge	0.52	0.02	0.02	
							50RB Mid	Right Edge	0.60	0.01	0.01	

B.7.2.4 LTE Band 13 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 13	5	QPSK	10	23230	782	1	1RB Mid	Top Edge	0.52	0.26	0.30	7
							50RB Mid	Top Edge	0.59	0.26	0.30	
							1RB Mid	Right Edge	0.52	0.03	0.03	
							50RB Mid	Right Edge	0.59	0.02	0.03	
							1RB Mid	Back Face	0.52	0.03	0.03	
						2	50RB Mid	Back Face	0.59	0.02	0.02	
							1RB Mid	Top Edge	0.52	0.25	0.28	
							50RB Mid	Top Edge	0.59	0.24	0.27	
							1RB Mid	Right Edge	0.52	0.03	0.03	
							50RB Mid	Right Edge	0.59	0.02	0.03	

B.7.2.5 LTE Band 14 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 14	5	QPSK	10	23330	793	1	1RB Mid	Top Edge	0.54	0.24	0.27	
							50RB Mid	Top Edge	0.54	0.24	0.27	
							1RB Mid	Right Edge	0.54	0.03	0.03	
							50RB Mid	Right Edge	0.54	0.03	0.03	
							1RB Mid	Back Face	0.54	0.03	0.03	
						50RB Mid	Back Face	0.54	0.02	0.02		
						2	1RB Mid	Top Edge	0.54	0.26	0.29	8
							50RB Mid	Top Edge	0.54	0.24	0.27	
							1RB Mid	Right Edge	0.54	0.02	0.03	
							50RB Mid	Right Edge	0.54	0.02	0.03	
1RB Mid	Back Face	0.54	0.03	0.03								
50RB Mid	Back Face	0.54	0.02	0.02								

B.7.2.6 LTE Band 25 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 25	5	QPSK	20	26365	1882.5	1	1RB Mid	Top Edge	0.91	0.29	0.36	
							50RB Mid	Top Edge	0.99	0.29	0.37	
							1RB Mid	Right Edge	0.91	0.02	0.02	
							50RB Mid	Right Edge	0.99	0.01	0.02	
							1RB Mid	Back Face	0.91	0.06	0.07	
						50RB Mid	Back Face	0.99	0.04	0.06		
						2	1RB Mid	Top Edge	0.91	0.40	0.49	9
							50RB Mid	Top Edge	0.99	0.32	0.40	
							1RB Mid	Right Edge	0.91	0.02	0.02	
							50RB Mid	Right Edge	0.99	0.01	0.02	
1RB Mid	Back Face	0.91	0.05	0.07								
50RB Mid	Back Face	0.99	0.04	0.05								

B.7.2.7 LTE Band 26 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 26	5	QPSK	15	26865	831.5	1	1RB Mid	Top Edge	1.09	0.33	0.43	10
							50RB Mid	Top Edge	1.14	0.33	0.43	
							1RB Mid	Right Edge	1.09	0.07	0.08	
							50RB Mid	Right Edge	1.14	0.05	0.07	
							1RB Mid	Back Face	1.09	0.03	0.04	
						50RB Mid	Back Face	1.14	0.03	0.03		
						2	1RB Mid	Top Edge	1.09	0.27	0.35	
							50RB Mid	Top Edge	1.14	0.27	0.35	
							1RB Mid	Right Edge	1.09	0.06	0.07	
							50RB Mid	Right Edge	1.14	0.04	0.06	
1RB Mid	Back Face	1.09	0.03	0.04								
50RB Mid	Back Face	1.14	0.03	0.03								

B.7.2.8 LTE Band 30 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 30	5	QPSK	10	27710	2310	1	1RB Mid	Top Edge	0.55	0.70	0.79	11
							50RB Mid	Top Edge	0.62	0.69	0.79	
							1RB Mid	Right Edge	0.55	0.03	0.04	
							50RB Mid	Right Edge	0.74	0.02	0.03	
							1RB Mid	Back Face	0.55	0.02	0.02	
						50RB Mid	Back Face	0.74	0.02	0.02		
						2	1RB Mid	Top Edge	0.55	0.50	0.57	
							50RB Mid	Top Edge	0.72	0.39	0.46	
							1RB Mid	Right Edge	0.55	0.03	0.03	
							50RB Mid	Right Edge	0.74	0.02	0.02	
1RB Mid	Back Face	0.55	0.02	0.02								
50RB Mid	Back Face	0.74	0.01	0.02								

B.7.2.9 LTE Band 41 TDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 41	5	QPSK	20	40620	2593	1	1RB Mid	Top Edge	1.01	0.41	0.52	
							50RB Mid	Top Edge	0.99	0.40	0.51	
							1RB Mid	Right Edge	1.01	0.05	0.06	
							50RB Mid	Right Edge	0.99	0.04	0.05	
							1RB Mid	Back Face	1.01	0.06	0.08	
						50RB Mid	Back Face	0.99	0.05	0.07		
						2	1RB Mid	Top Edge	1.01	0.44	0.55	12
							50RB Mid	Top Edge	0.99	0.43	0.54	
							1RB Mid	Right Edge	1.01	0.04	0.06	
							50RB Mid	Right Edge	0.99	0.03	0.04	
1RB Mid	Back Face	1.01	0.07	0.08								
50RB Mid	Back Face	0.99	0.04	0.05								

B.7.2.9.1 UL CA 41C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band41, antenna vendor 1 configuration that gives the highest SAR, thus, the same is used for UL CA testing

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 41	5	QPSK / 20MHz	40521	2583.1	1RB High	40719	2602.9	1RB Low	1	1.01	0.16	0.20

B.7.2.10 LTE Band 48 TDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 48	5	QPSK	20	55990	3625	1	1RB Mid	Top Edge	0.48	0.70	0.78	
							50RB Mid	Top Edge	0.25	0.75	0.79	13
							1RB Mid	Right Edge	0.48	0.16	0.17	
							50RB Mid	Right Edge	0.25	0.12	0.13	
							1RB Mid	Back Face	0.48	0.03	0.03	
						50RB Mid	Back Face	0.25	0.03	0.03		
						2	1RB Mid	Top Edge	0.48	0.35	0.39	
							50RB Mid	Top Edge	0.25	0.28	0.30	
							1RB Mid	Right Edge	0.48	0.15	0.16	
							50RB Mid	Right Edge	0.25	0.11	0.12	
1RB Mid	Back Face	0.48	0.03	0.03								
50RB Mid	Back Face	0.25	0.02	0.02								

B.7.2.11 LTE Band 66 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 66	5	QPSK	20	132322	1745	1	1RB Mid	Top Edge	1.29	0.30	0.41	
							50RB Mid	Top Edge	1.34	0.30	0.40	
							1RB Mid	Right Edge	1.29	0.03	0.03	
							50RB Mid	Right Edge	1.34	0.02	0.03	
							1RB Mid	Back Face	1.29	0.05	0.07	
				50RB Mid	Back Face	1.34	0.04	0.05				
				132322	1745	2	1RB Mid	Top Edge	1.29	0.41	0.55	14
							50RB Mid	Top Edge	1.34	0.32	0.44	
							1RB Mid	Right Edge	1.29	0.03	0.03	
							50RB Mid	Right Edge	1.34	0.02	0.02	
1RB Mid	Back Face	1.29	0.04				0.06					
50RB Mid	Back Face	1.34	0.04	0.05								

B.7.2.11.1 LTE ULCA 66B, 66C

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

From the above table on standalone testing on LTE Band66, antenna vendor 2 configuration that gives the highest SAR, thus, the same is used for UL CA testing, thus the same is used for UL CA testing for the 66C mode. Since the 10MHz was not tested in standalone, due to KDB 941225 reduction list, the initial configuration for the 66B mode was taken from the worst-case scenario of the 20MHz

Band	Tx Ant	Modulation / BW	PCC			SCC			Antenna Vendor	Scaling Factor (dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)
			Ch	Freq (MHz)	RB Allocation	Ch	Freq (MHz)	RB Allocation				
LTE 66B	5	QPSK / 10MHz	132373	1750.1	1RB High	132472	1760.0	1RB Low	2	1.29	0.03	0.04
LTE 66C	5	QPSK / 20MHz	132323	1745.1	1RB High	132521	1764.9	1RB Low	2	1.29	0.39	0.52

B.7.2.12 LTE Band 71 FDD

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Band 71	5	QPSK	20	133297	680.5	1	1RB Mid	Top Edge	0.05	0.78	0.79	15
							50RB Mid	Top Edge	0.12	0.77	0.79	
							1RB Mid	Right Edge	0.05	0.07	0.07	
							50RB Mid	Right Edge	0.12	0.05	0.06	
							1RB Mid	Back Face	0.05	0.08	0.08	
						50RB Mid	Back Face	0.12	0.06	0.06		
						2	1RB Mid	Top Edge	0.05	0.68	0.69	
							50RB Mid	Top Edge	0.12	0.66	0.68	
							1RB Mid	Right Edge	0.05	0.07	0.07	
							50RB Mid	Right Edge	0.12	0.05	0.05	
1RB Mid	Back Face	0.05	0.08	0.08								
50RB Mid	Back Face	0.12	0.08	0.08								

B.7.3 Bystander evaluation

According to RSS-102 issue 5 SPR-001, bystander evaluation should be performed at a distance not exceeding 25mm. Bystander was evaluated on the worst-case SAR configuration determined at 25mm. As tablet config was already evaluated, only laptop config has been considered In this section.

From the section B.7 tables on standalone testing LTE Band71, antenna vendor 1 configuration gives the highest SAR, thus, the same is used for Bystander evaluation.

Band	Tx Ant	Mod.	BW (MHz)	Channel Number	Freq (MHz)	Ant. Vendor	% RB Allocation	Positions	Factory Upper Tolerance (dBm)	Pwr Avg (dBm)	Scaling Factor(dB)	Measured SAR 1g (W/kg)	Reported SAR 1g (W/kg)
Band 71	5	QPSK	20	133297	680.5	1	1RB Mid	Laptop*	19.00	18.95	0.05	0.04	0.04
							1RB Mid	Laptop**	19.00	18.95	0.05	0.01	0.01
							1RB Mid	Laptop***	19.00	18.95	0.05	0.01	0.01

*Top of screen toward phantom / **Right edge of the screen toward phantom / ***Back side toward phantom
See Annex F for more details

B.8 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is ≥ 0.8 W/kg for a certain band/mode. No variability measurement required.

B.9 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

This report only evaluates SAR for cellular transmission on the module, nevertheless in order to consider all possible simultaneous transmissions on the device for compliance, WLAN SAR and NFC SAR values are considered.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

	Antenna	Highest Reported SAR (1g) (W/kg)				
		WWAN	WLAN 2.4GHz	WLAN 5/6GHz	Bluetooth	**NFC
Top Edge	WWAN (Ant5 TX/RX)	0.79				
	Main WLAN2		1.02	1.53		
	Aux WLAN1		0.86	1.04	0.27	
	NFC					<0.003
Right Edge	WWAN (Ant5 TX/RX)	0.16				
	Main WLAN2		0.40*	0.40*		
	Aux WLAN1		0.40*	0.40*	0.40*	
	NFC					<0.003
Back Face	WWAN (Ant5 TX/RX)	0.08				
	Main WLAN2		0.40*	0.40*		
	Aux WLAN1		0.40*	0.40*	0.40*	
	NFC					<0.003

*According to FCC OET KDB 447498, when standalone test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated to 0.4 W/kg for 1-g SAR when the test separation is > 50mm to determine simultaneous transmission test exclusion.

** Refer to these test reports for NFC Wireless Charging Module.

- FA2N1807-02
- CA2N1807-02

SAR simultaneous combinations eschewed the NFC SAR results as per their low values.

Position	Simultaneous Tx Antenna Combination				Σ SAR 1g (W/kg)	Limit (W/kg)
	#	WWAN (Ant5 TX/RX)	Main WLAN2	Aux WLAN1		
Top Edge	1	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	3.36	1.6
	2	Cellular	WLAN 5/6GHz	WLAN 5/6GHz + BT	3.63	
	3	Cellular	WLAN 5/6GHz	BT	2.59	
	4	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	2.67	
	5	Cellular	WLAN 2.4GHz	BT	2.08	
Right Edge	6	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	0.96	
	7	Cellular	WLAN 5/6GHz	WLAN 5/6GHz + BT	1.23	
	8	Cellular	WLAN 5/6GHz	BT	0.83	
	9	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	0.96	
	10	Cellular	WLAN 2.4GHz	BT	0.96	
Back Face	11	Cellular	WLAN 5/6GHz	WLAN 5/6GHz	0.88	
	12	Cellular	WLAN 5/6GHz	WLAN 5/6GHz + BT	1.28	
	13	Cellular	WLAN 5/6GHz	BT	0.88	
	14	Cellular	WLAN 2.4GHz	WLAN 2.4GHz	0.88	
	15	Cellular	WLAN 2.4GHz	BT	0.88	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. According to the last table possible simultaneous transmission combinations are identified for each position from 1 to 5, each combination will be analyzed by antenna pairs. Antenna pairs considered in one configuration won't be performed again in case they are repeated on the next simultaneous configuration:

Position	Ant. Pair case	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Top Edge	1a	WWAN (Main 5)	0.79	2.32	(0.3,124.5,-177.1)	0.02	0.04
		Main WLAN 5/6GHz	1.53		(3.1,-52.6,-177.1)		
	1b	WWAN (Main 5)	0.79	1.83	(0.3,124.5,-177.1)	0.01	
		Aux WLAN 5/6GHz	1.04		(6.6,-123.6,-177.1)		
	1c	WWAN (Main 5)	0.79	1.06			
		Aux WLAN1 BT	0.27				
	1f	WWAN (Main 5)	0.79	1.81	(0.3,124.5,-177.1)	0.01	
		Main WLAN 2.4GHz	1.02		(1.5,-46.0,-177.1)		
	2a	WWAN (Main 5)	0.79	1.65	(0.3,124.5,-177.1)	0.01	
		Aux WLAN 2.4GHz	0.86		(5.3,-118.7,-177.1)		
	4a	Main WLAN 2.4GHz	1.02	1.88	(1.5,-46.0,-177.1)	0.04	
		Aux WLAN1 2.4GHz	0.86		(5.3,-118.7,-177.1)		

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498, no enlarged zoom scan measurements are required

Annex C. Test System Plots

1. WCDMA II, RMC 12.2kbps, 5MHz, CH9400 Vendor 2	70
2. WCDMA IV, RMC 12.2kbps, 5MHz, CH1413 Vendor 1	71
3. WCDMA V, RMC 12.2kbps, 5MHz, CH4183 Vendor 1	72
4. LTE Band 5, QPSK - 10MHz, CH20525 Vendor 1	73
5. LTE Band 7, QPSK - 20MHz, CH21100 Vendor 2	74
6. LTE Band 12, QPSK - 10MHz, CH23095 Vendor 1	75
7. LTE Band 13, QPSK - 10MHz, CH23230 Vendor 1	76
8. LTE Band 14, QPSK - 10MHz, CH23330 Vendor 2	77
9. LTE Band 25, QPSK - 20MHz, CH26365 Vendor 2	78
10. LTE Band 26, QPSK - 15MHz, CH26865 Vendor 1	79
11. LTE Band 30 QPSK - 10MHz, CH27710 Vendor 1	80
12. LTE Band 41, QPSK - 20MHz, CH40620 Vendor 2	81
13. LTE Band 48, QPSK - 20MHz, CH55990 Vendor 1	82
14. LTE Band 66, QPSK - 20MHz, CH132322 Vendor 2	83
15. LTE Band 71, QPSK - 20MHz, CH133297 vendor 1	84
16. System Check Body Liquid 750MHz – 2024-01-04	85
17. System Check Body Liquid 835MHz – 2024-01-04	86
18. System Check Body Liquid 835MHz – 2024-01-09	87
19. System Check Body Liquid 1750MHz – 2024-01-05	88
20. Check Body Liquid 1750MHz – 2024-01-09	89
21. System Check Body Liquid 1900MHz – 2024-01-05	90
22. System Check Body Liquid 1900MHz – 2024-01-09	91
23. System Check Body Liquid 2300MHz – 2024-01-05	92
24. System Check Body Liquid 2600MHz – 2024-01-04	93
25. System Check Body Liquid 3700MHz – 2024-01-05	94

1. WCDMA II, RMC 12.2kbps, 5MHz, CH9400 Vendor 2

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDC	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 2, UTRA/FDD	WCDMA, 10457-AAA	1880.0, 9400	8.72	1.52	53.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2024-Jan-08	EX2DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-09, 16:08	2024-01-09, 16:14
psSAR1g [W/kg]	0.176	0.346
psSAR10g [W/kg]	0.088	0.143
Power Drift [dB]	-0.04	0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.4
Dist 3dB Peak [mm]		8.7

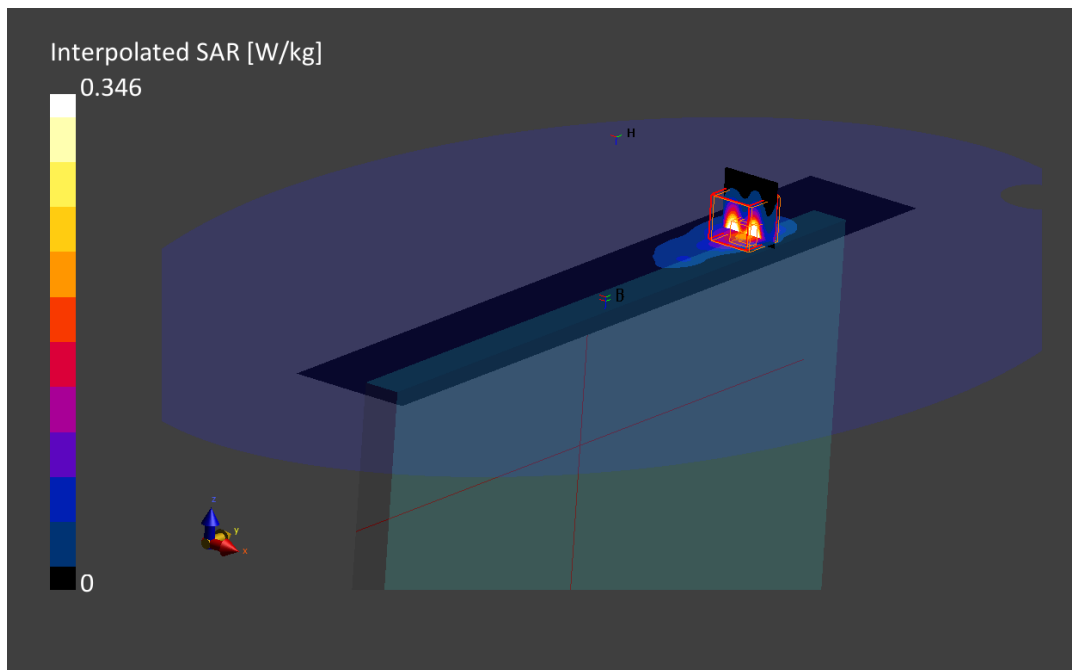

2. WCDMA IV, RMC 12.2kbps, 5MHz, CH1413 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band4, UTRA/FDD	WCDMA, 10457-AAA	1752.6, 1413	9.04	1.43	53.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MABL-600-6000, 2024-Jan-08	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-09, 12:45	2024-01-09, 12:56
psSAR1g [W/kg]	0.206	0.370
psSAR10g [W/kg]	0.101	0.132
Power Drift [dB]	0.17	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.9
Dist 3dB Peak [mm]		9.1

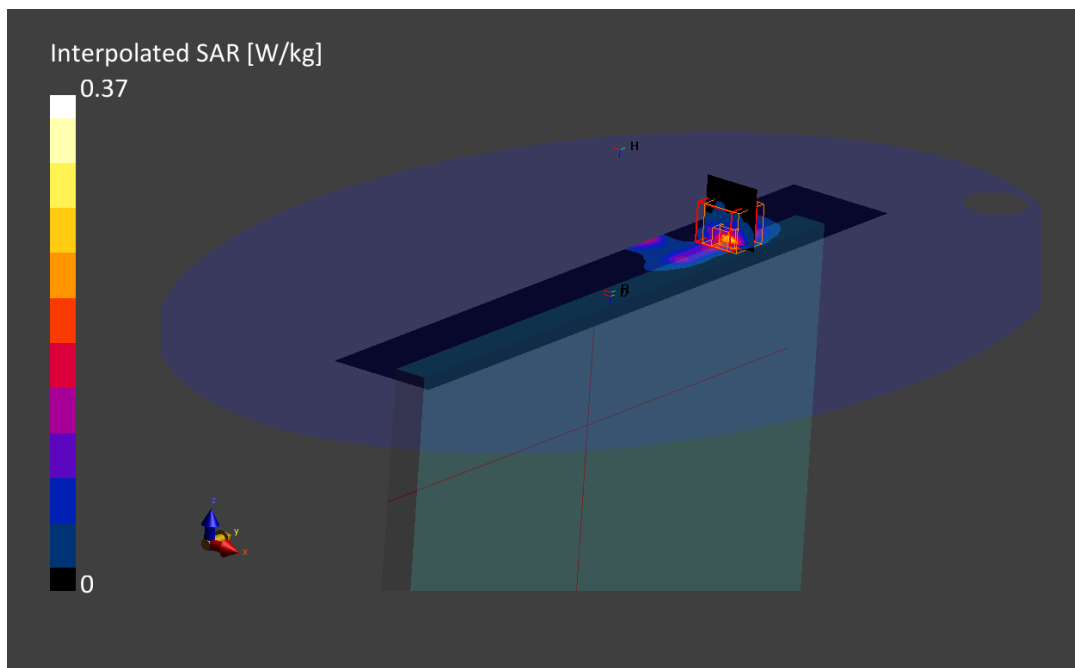

3. WCDMA V, RMC 12.2kbps, 5MHz, CH4183 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 5, UTRA/FDD	WCDMA, 10097-CAB	836.6, 4183	10.78	0.927	54.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2024-Jan-08	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-09, 14:33	2024-01-09, 15:15
psSAR1g [W/kg]	0.174	0.256
psSAR10g [W/kg]	0.108	0.092
Power Drift [dB]	-0.13	0.04
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.8
Dist 3dB Peak [mm]		10.8

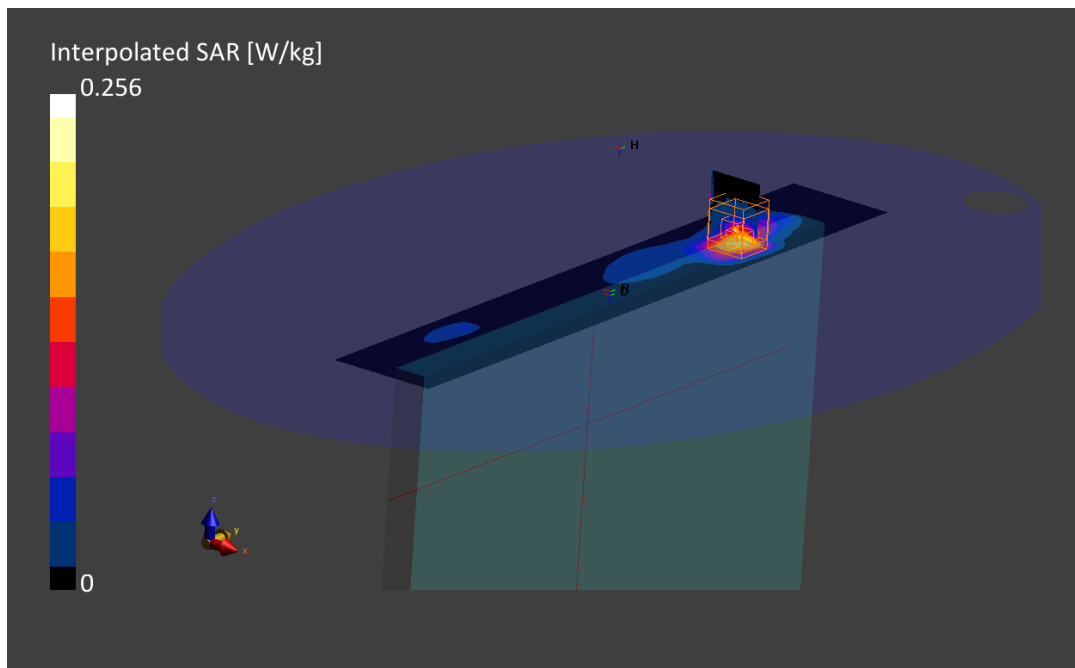

4. LTE Band 5, QPSK - 10MHz, CH20525 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 5, E-UTRA/FDD	LTE-FDD, 10175-CAG	836.5, 20525	10.78	0.997	53.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 14:41	2024-01-04, 14:51
psSAR1g [W/kg]	0.333	0.333
psSAR10g [W/kg]	0.188	0.149
Power Drift [dB]	-0.04	0.03
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		77.5
Dist 3dB Peak [mm]		10.0

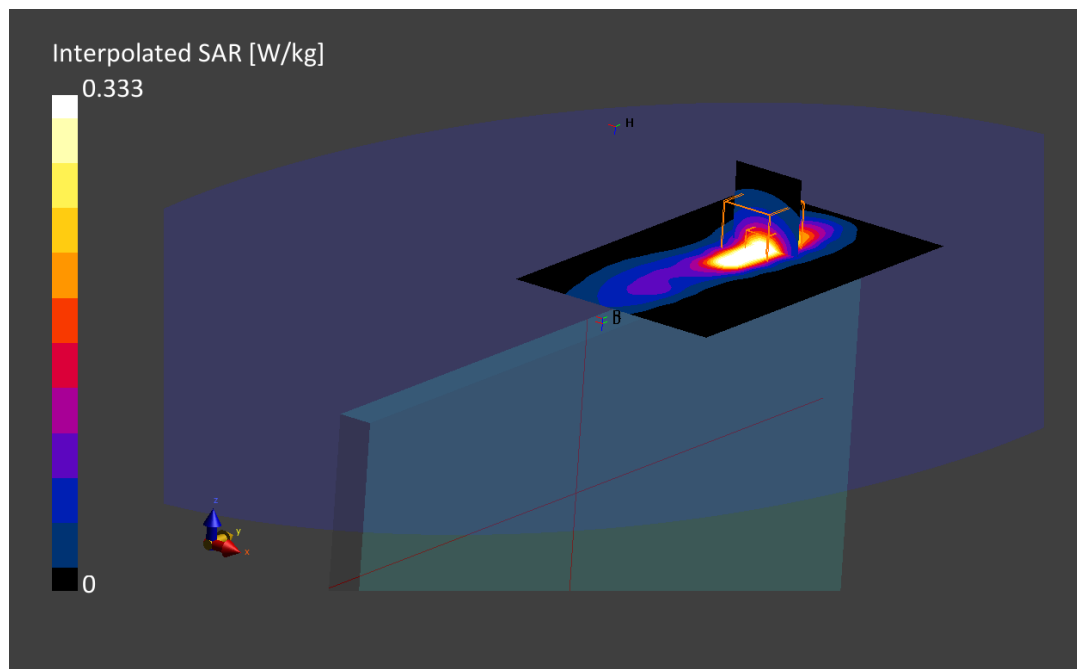

5. LTE Band 7, QPSK - 20MHz, CH21100 Vendor 2

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDC	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 7, E-UTRA/FDD	LTE-FDD, 10169-CAE	2535.0, 21100	7.92	2.13	51.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 18:56	2024-01-04, 19:05
psSAR1g [W/kg]	0.096	0.182
psSAR10g [W/kg]	0.044	0.068
Power Drift [dB]	0.15	0.18
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		77.5
Dist 3dB Peak [mm]		10.0

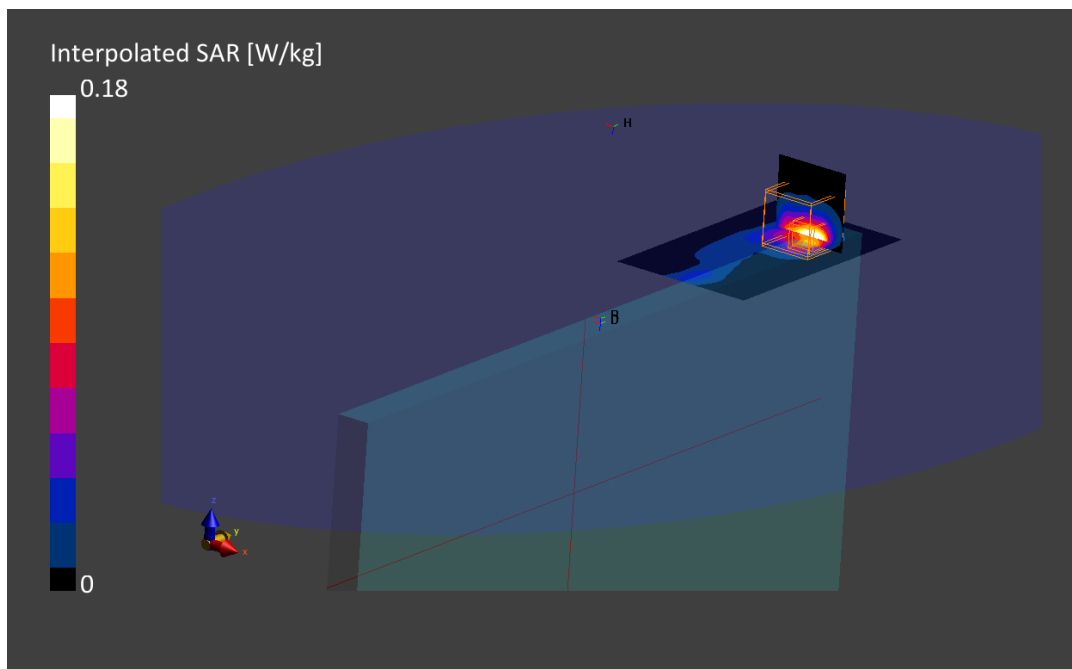

6. LTE Band 12, QPSK - 10MHz, CH23095 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 12, E-UTRA/FDD	LTE-FDD, 10175-CAG	707.5, 23095	11.32	0.950	54.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 10:44	2024-01-04, 10:51
psSAR1g [W/kg]	0.216	0.215
psSAR10g [W/kg]	0.126	0.101
Power Drift [dB]	-0.08	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.1
Dist 3dB Peak [mm]		10.9

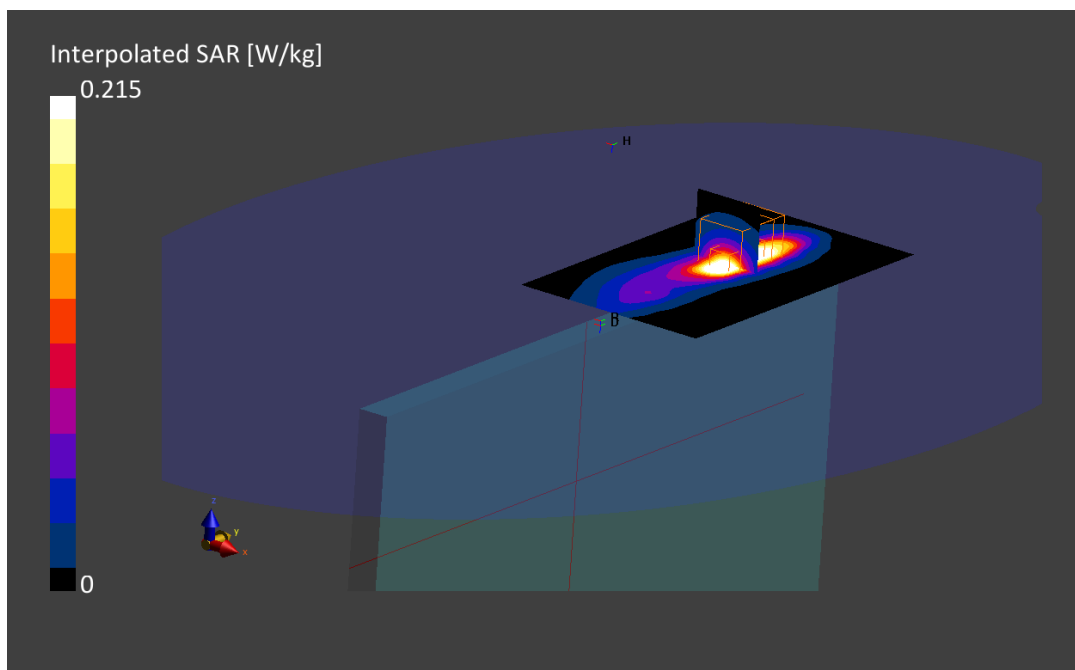

7. LTE Band 13, QPSK - 10MHz, CH23230 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 13, E-UTRA/FDD	LTE-FDD, 10175-CAG	782.0, 23230	11.32	0.977	53.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 12:01	2024-01-04, 12:11
psSAR1g [W/kg]	0.162	0.262
psSAR10g [W/kg]	0.093	0.118
Power Drift [dB]	0.18	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.1
Dist 3dB Peak [mm]		11.8

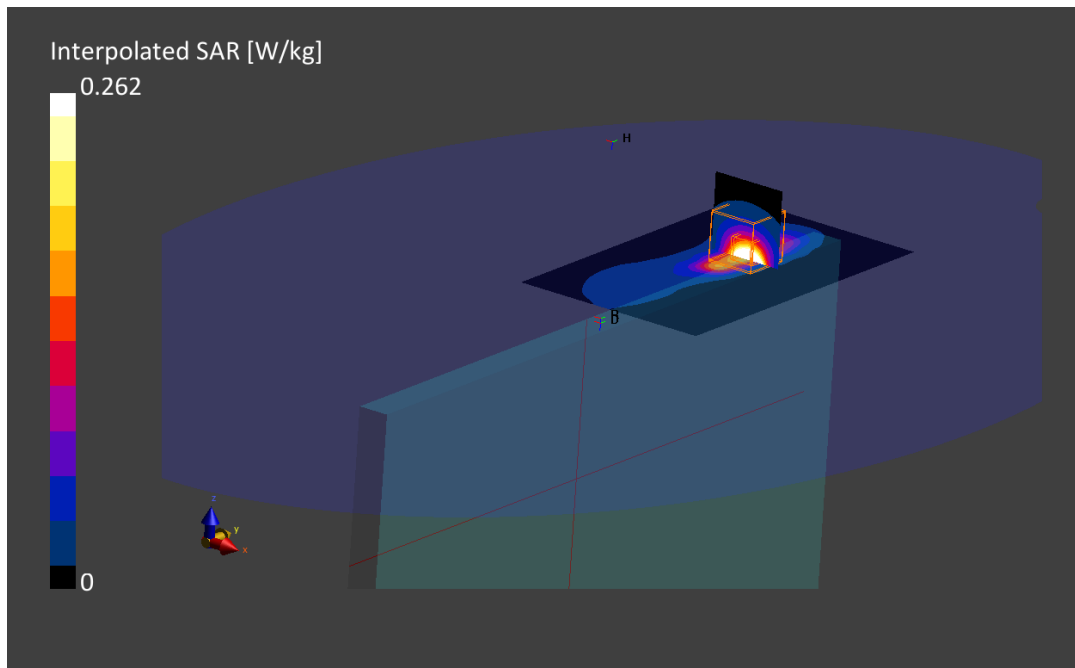

8. LTE Band 14, QPSK - 10MHz, CH23330 Vendor 2

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDC	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 14, E-UTRA/FDD	LTE-FDD, 10175-CAG	793.0, 23330	11.32	0.981	53.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio MAIA	1.5	1.5
Surface Detection	Confirmed by MAIA	Confirmed by MAIA
Scan Method	VMS + 6p Measured	VMS + 6p Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 09:05	2024-01-04, 09:13
psSAR1g [W/kg]	0.279	0.264
psSAR10g [W/kg]	0.156	0.120
Power Drift [dB]	-0.20	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.5
Dist 3dB Peak [mm]		11.8

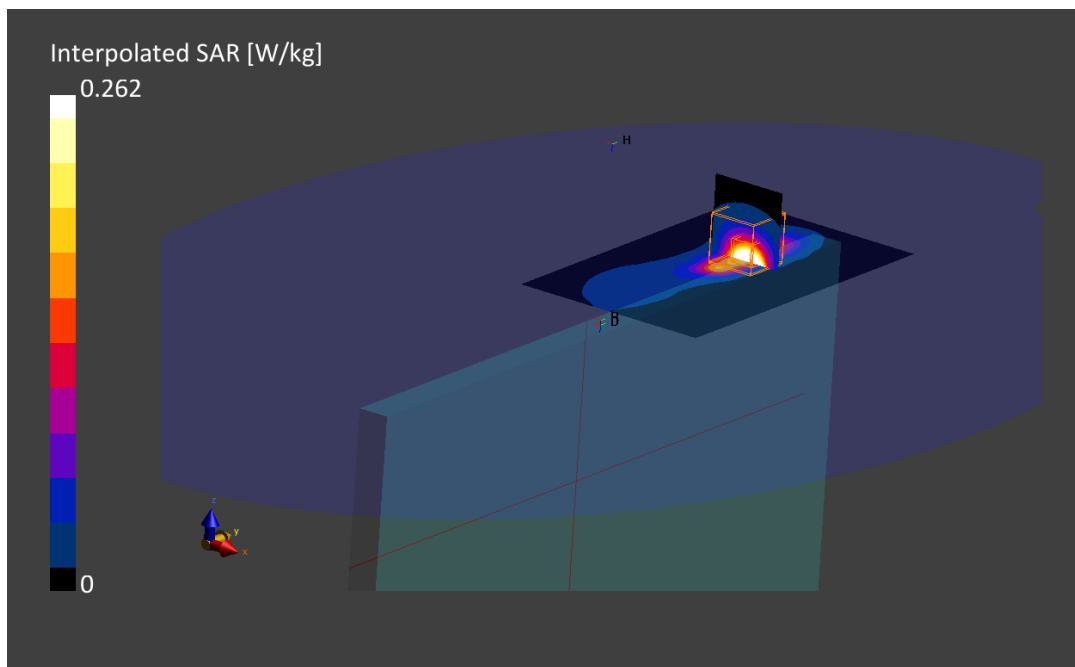

9. LTE Band 25, QPSK - 20MHz, CH26365 Vendor 2

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDC	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 25, E-UTRA/FDD	LTE-FDD, 10169-CAE	1882.5, 26365	8.72	1.57	52.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio MAIA	1.5	1.5
Surface Detection	Confirmed by MAIA	Confirmed by MAIA
Scan Method	VMS + 6p Measured	VMS + 6p Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-05, 12:26	2024-01-05, 12:32
psSAR1g [W/kg]	0.183	0.396
psSAR10g [W/kg]	0.097	0.160
Power Drift [dB]	-0.04	0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		81.2
Dist 3dB Peak [mm]		8.7

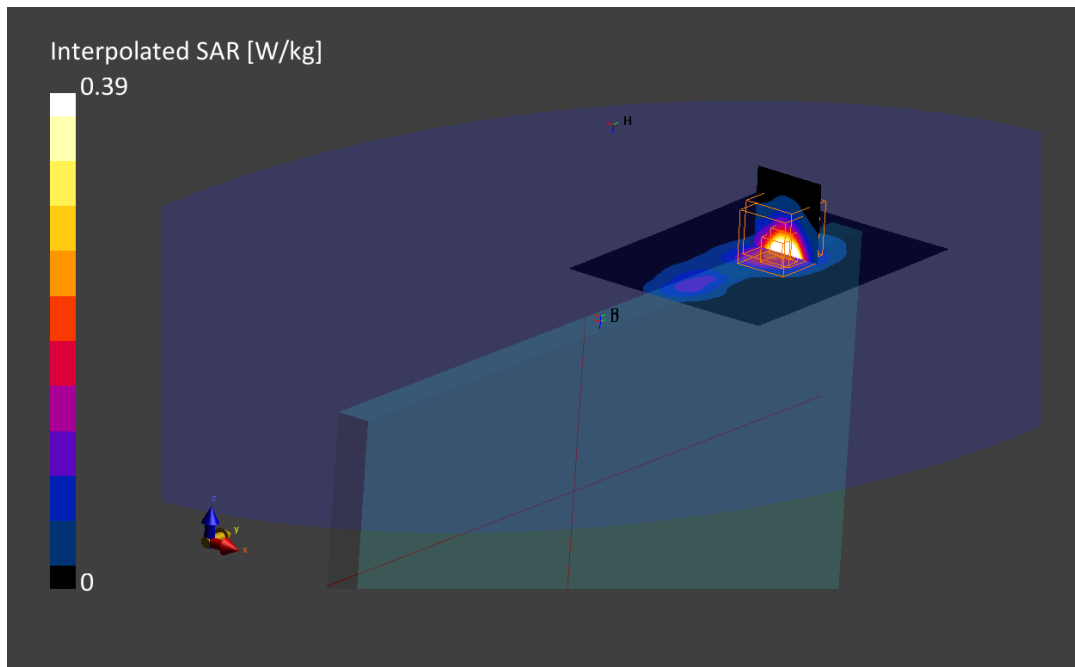

10. LTE Band 26, QPSK - 15MHz, CH26865 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 26 E-UTRA/FDD	LTE-FDD, 10181-CAE	831.5, 26865	10.78	0.995	53.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 15:19	2024-01-04, 15:28
psSAR1g [W/kg]	0.334	0.332
psSAR10g [W/kg]	0.189	0.149
Power Drift [dB]	0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.1
Dist 3dB Peak [mm]		11.4

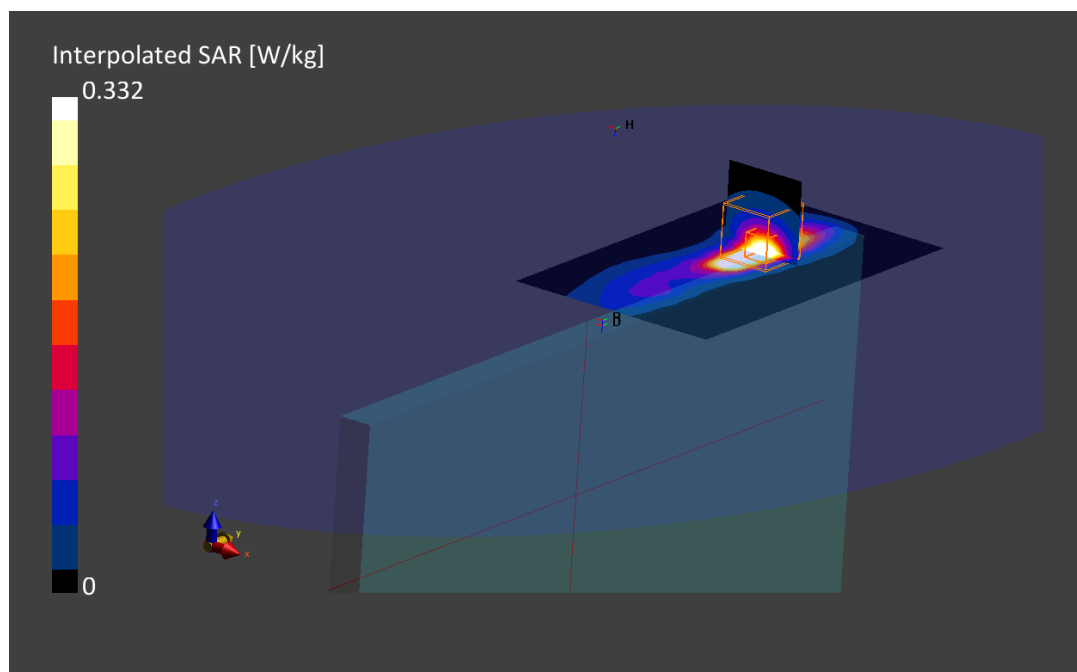

11. LTE Band 30 QPSK - 10MHz, CH27710 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	EDGE TOP, 0.00	Band 30, E-UTRA/FDD	LTE-FDD, 10175-CAG	2310.0, 27710	8.4	1.92	51.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-05, 11:19	2024-01-05, 11:28
psSAR1g [W/kg]	0.611	0.699
psSAR10g [W/kg]	0.254	0.249
Power Drift [dB]	0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.6
Dist 3dB Peak [mm]		10.0

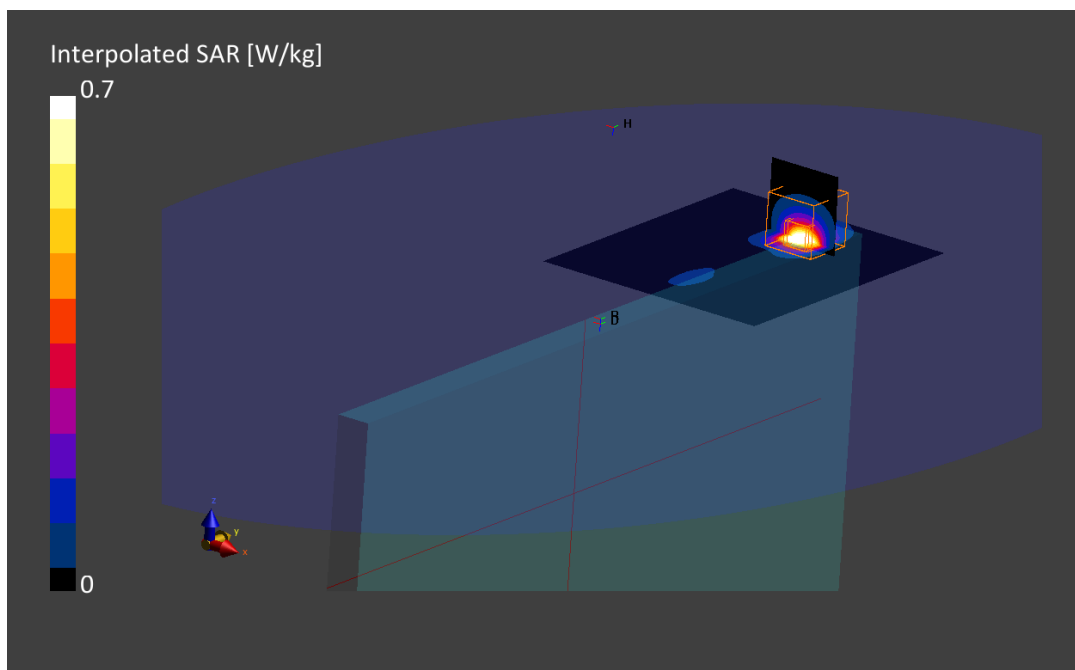

12. LTE Band 41, QPSK - 20MHz, CH40620 Vendor 2

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDC	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 41, E-UTRA/TDD	LTE-TDD, 10435-AAF	2593.0, 40620	7.92	2.19	51.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 19:29	2024-01-04, 19:38
psSAR1g [W/kg]	0.350	0.437
psSAR10g [W/kg]	0.153	0.163
Power Drift [dB]	0.21	0.17
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		78.2
Dist 3dB Peak [mm]		11.2

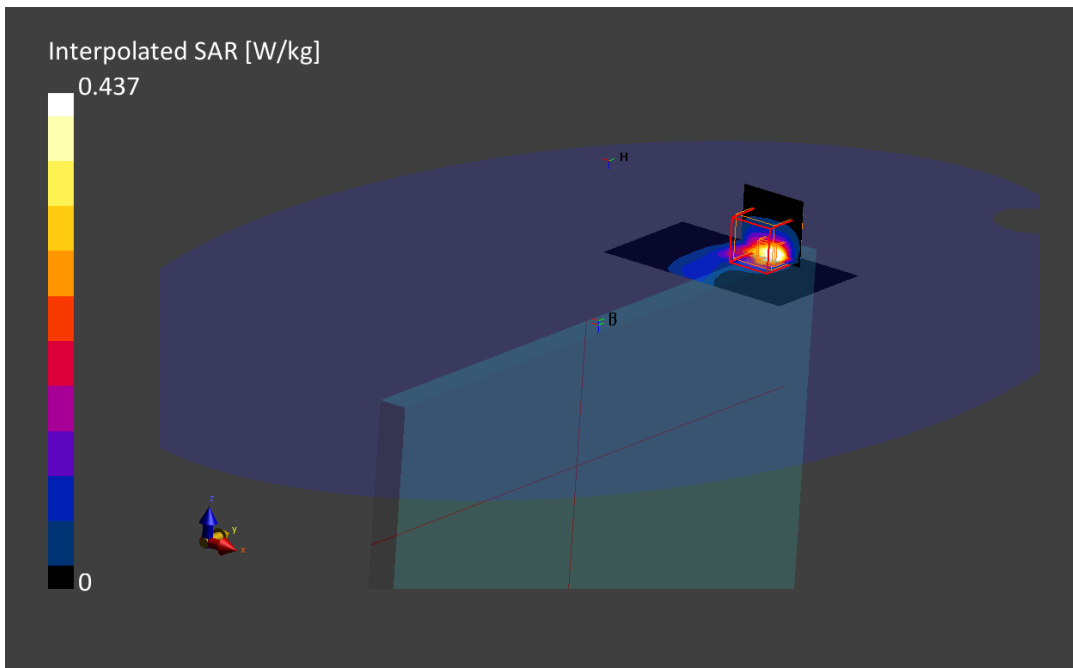

13. LTE Band 48, QPSK - 20MHz, CH55990 Vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 48, E-UTRA/TDD	LTE-TDD, 10172-CAG	3625.0, 55990	6.62	3.31	49.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	160.0 x 120.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-05, 10:17	2024-01-05, 10:27
psSAR1g [W/kg]	0.728	0.750
psSAR10g [W/kg]	0.263	0.237
Power Drift [dB]	-0.07	0.16
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		75.6
Dist 3dB Peak [mm]		6.7

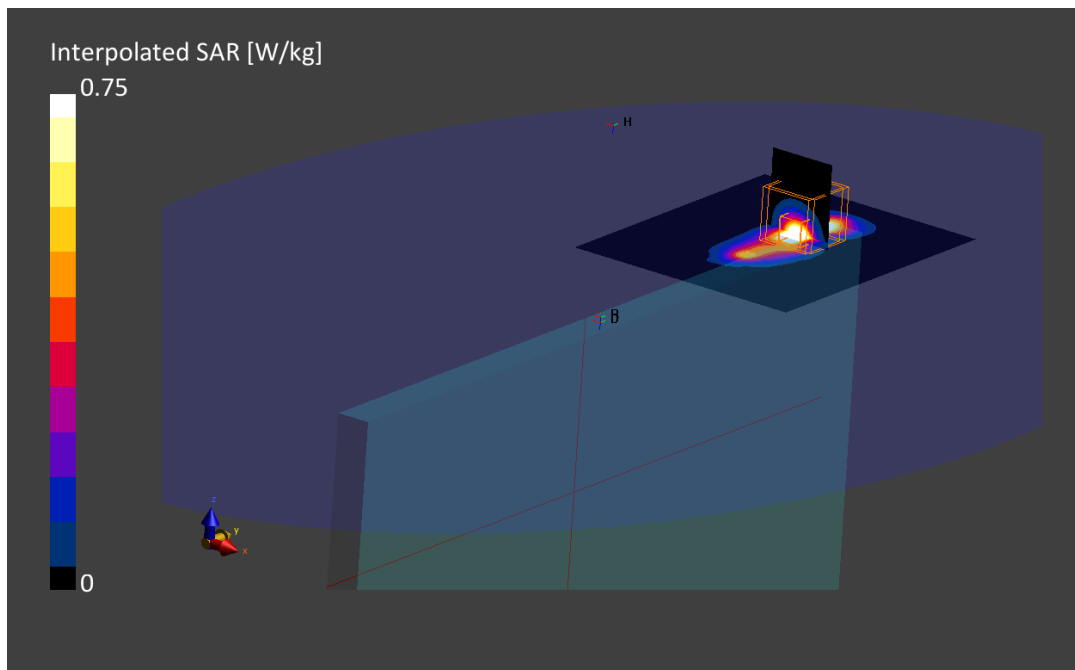

14. LTE Band 66, QPSK - 20MHz, CH132322 Vendor 2

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDC	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Laptop, 0.00	Band 66, E-UTRA/FDD	LTE-FDD, 10297-AAD	1745.0, 132322	9.04	1.47	52.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-05, 12:35	2024-01-05, 12:45
psSAR1g [W/kg]	0.306	0.409
psSAR10g [W/kg]	0.166	0.179
Power Drift [dB]	0.07	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.0
Dist 3dB Peak [mm]		8.5

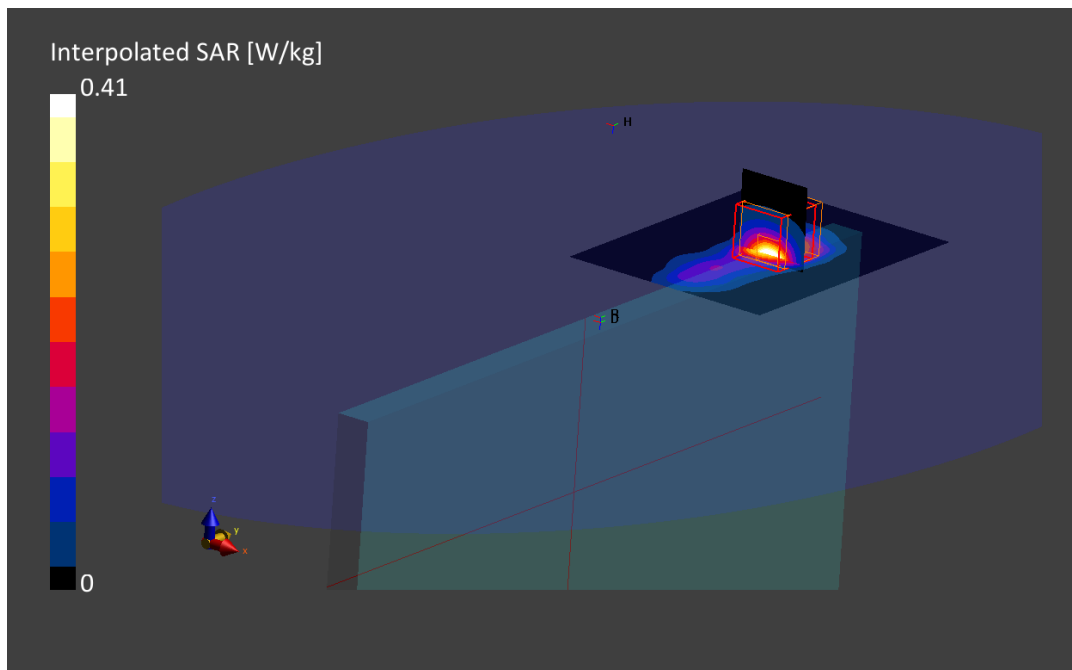

15. LTE Band 71, QPSK - 20MHz, CH133297 vendor 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
HSN-I61C	320.0 x 220.0 x 8.0	0003770DDM	Convertible

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	Top Edge, 0.00	Band 71, E-UTRA/FDD	LTE-FDD, 10100-CAE	680.5, 133297	11.32	0.941	54.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 11:12	2024-01-04, 11:22
psSAR1g [W/kg]	0.831	0.777
psSAR10g [W/kg]	0.476	0.348
Power Drift [dB]	-0.07	-0.14
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.4
Dist 3dB Peak [mm]		9.9

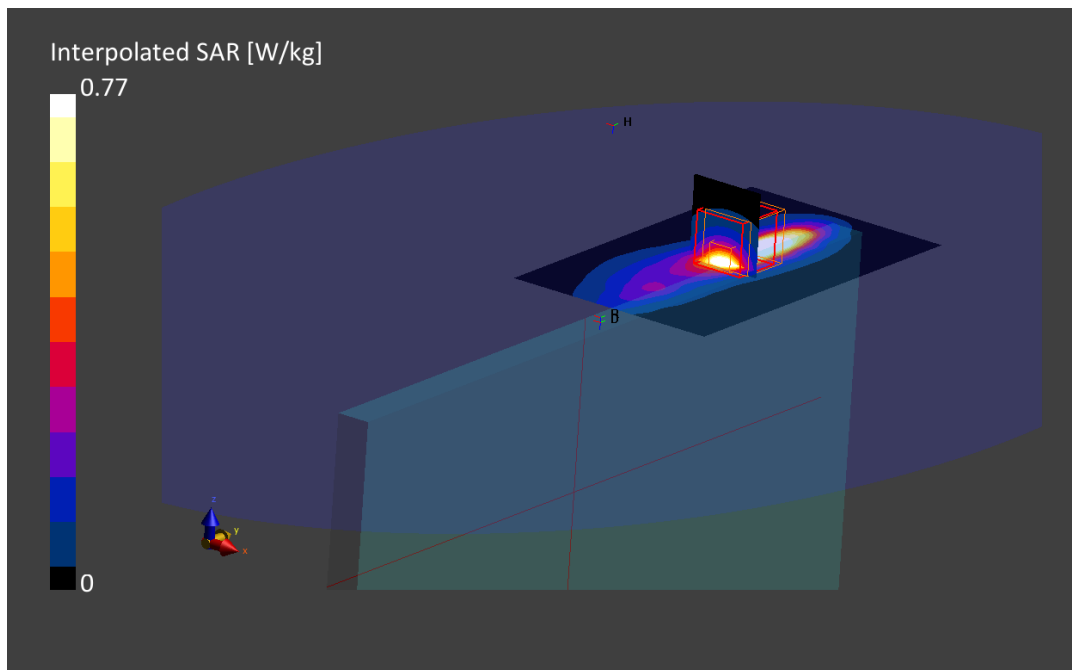

16. System Check Body Liquid 750MHz – 2024-01-04

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 750MHz, SPEAG	50.0 x 10.0 x 8.0	1136	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	750.0, 0	11.32	0.965	53.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 20:02	2024-01-04, 20:07
psSAR1g [W/kg]	0.413	0.409
psSAR10g [W/kg]	0.276	0.258
Power Drift [dB]	-0.02	-0.21
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.3
Dist 3dB Peak [mm]		17.2

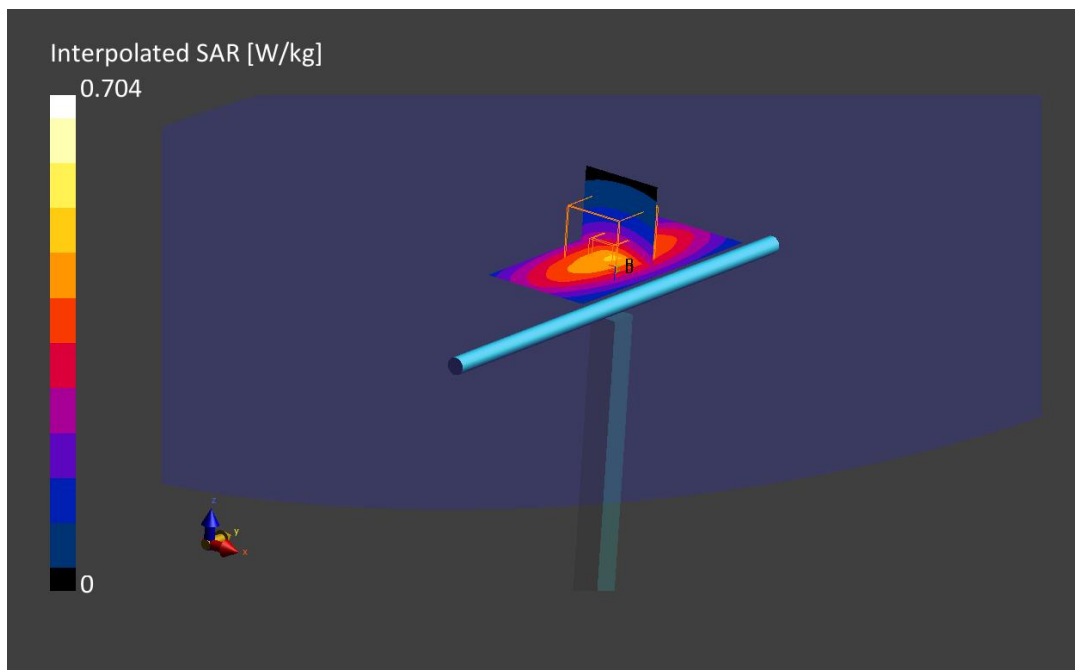

17. System Check Body Liquid 835MHz – 2024-01-04

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 835MHz, SPEAG	50.0 x 10.0 x 10.0	4d192	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	835.0, 0	10.78	0.996	53.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 20:40	2024-01-04, 20:45
psSAR1g [W/kg]	0.499	0.491
psSAR10g [W/kg]	0.328	0.307
Power Drift [dB]	-0.05	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.5
Dist 3dB Peak [mm]		17.2

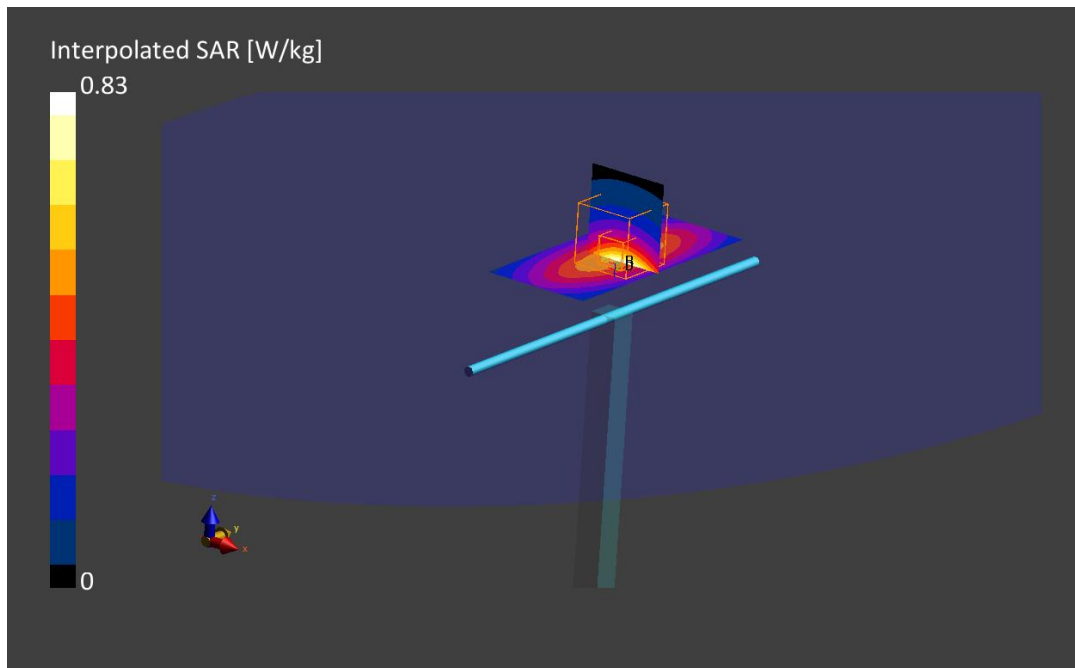

18. System Check Body Liquid 835MHz – 2024-01-09

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 835MHz, SPEAG	50.0 x 10.0 x 10.0	4d192	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	835.0, 0	10.78	0.926	54.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-08	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-09, 15:49	2024-01-09, 15:54
psSAR1g [W/kg]	0.521	0.517
psSAR10g [W/kg]	0.340	0.324
Power Drift [dB]	-0.03	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		86.8
Dist 3dB Peak [mm]		17.2

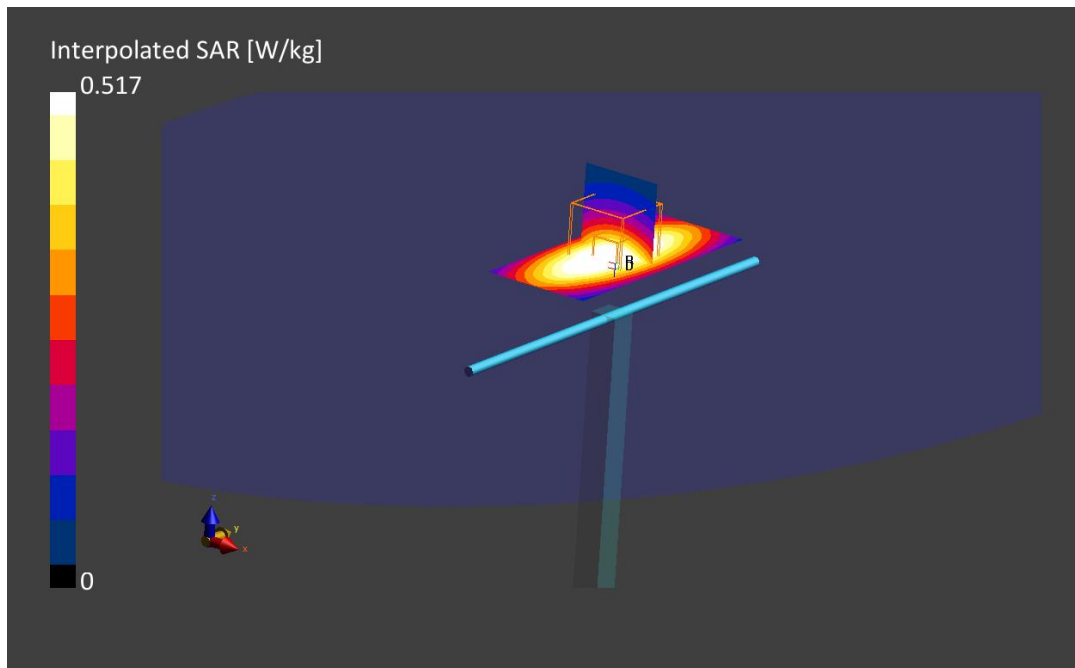

19. System Check Body Liquid 1750MHz – 2024-01-05

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1750MHz, SPEAG	50.0 x 10.0 x 8.0	1133	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	1750.0, 0	9.04	1.47	52.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBSL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-05, 19:39	2024-01-05, 19:44
psSAR1g [W/kg]	1.91	1.83
psSAR10g [W/kg]	1.02	0.935
Power Drift [dB]	-0.13	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.7
Dist 3dB Peak [mm]		9.6

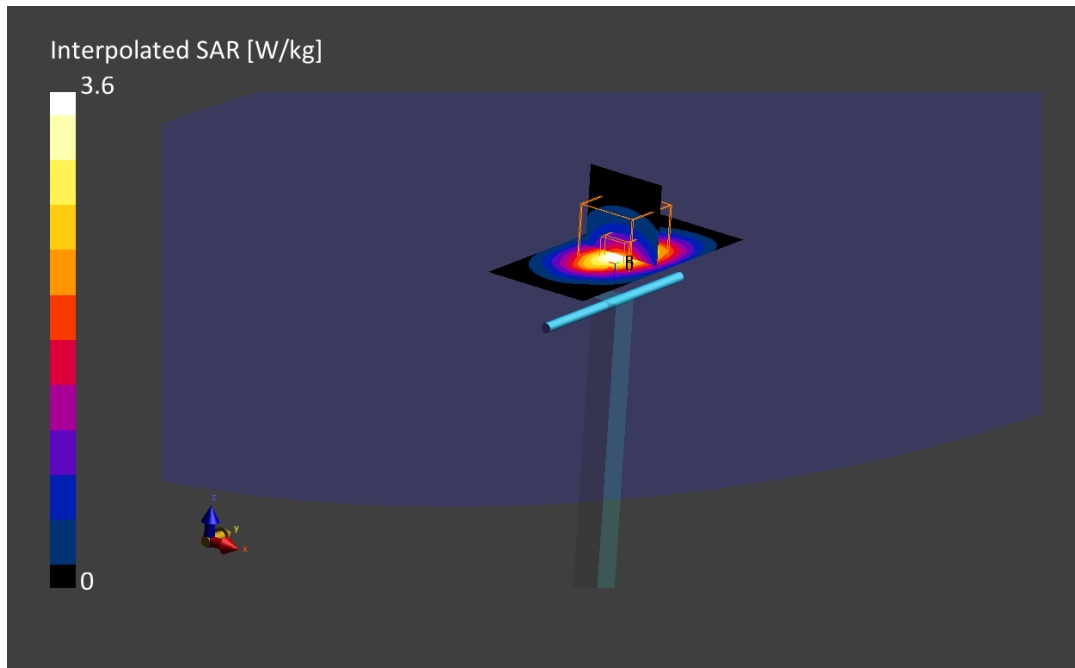

20. Check Body Liquid 1750MHz – 2024-01-09

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1750MHz, SPEAG	50.0 x 10.0 x 8.0	1133	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		, 0--	1750.0, 0	9.04	1.43	53.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBSL-600-6000, 2024-Jan-08	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-09, 15:28	2024-01-09, 15:33
psSAR1g [W/kg]	1.93	1.84
psSAR10g [W/kg]	1.02	0.957
Power Drift [dB]	-0.13	-0.21
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		83.7
Dist 3dB Peak [mm]		9.6

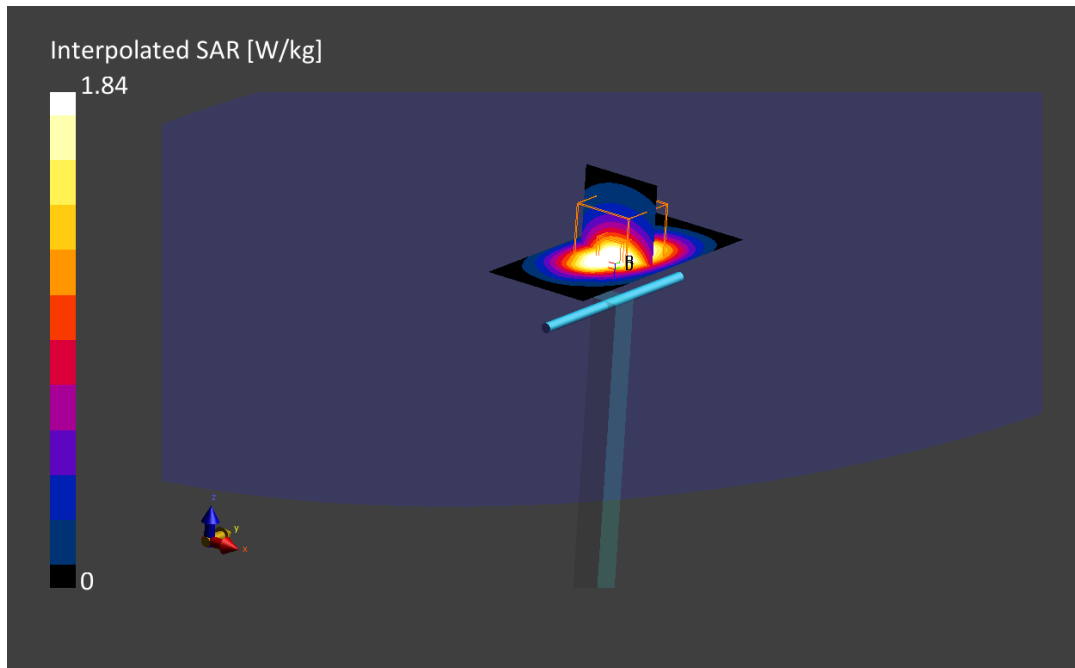

21. System Check Body Liquid 1900MHz – 2024-01-05

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 8.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1900.0, 0	8.72	1.58	51.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-05, 19:10	2024-01-05, 19:15
psSAR1g [W/kg]	2.17	2.21
psSAR10g [W/kg]	1.15	1.10
Power Drift [dB]	-0.11	-0.14
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		9.6

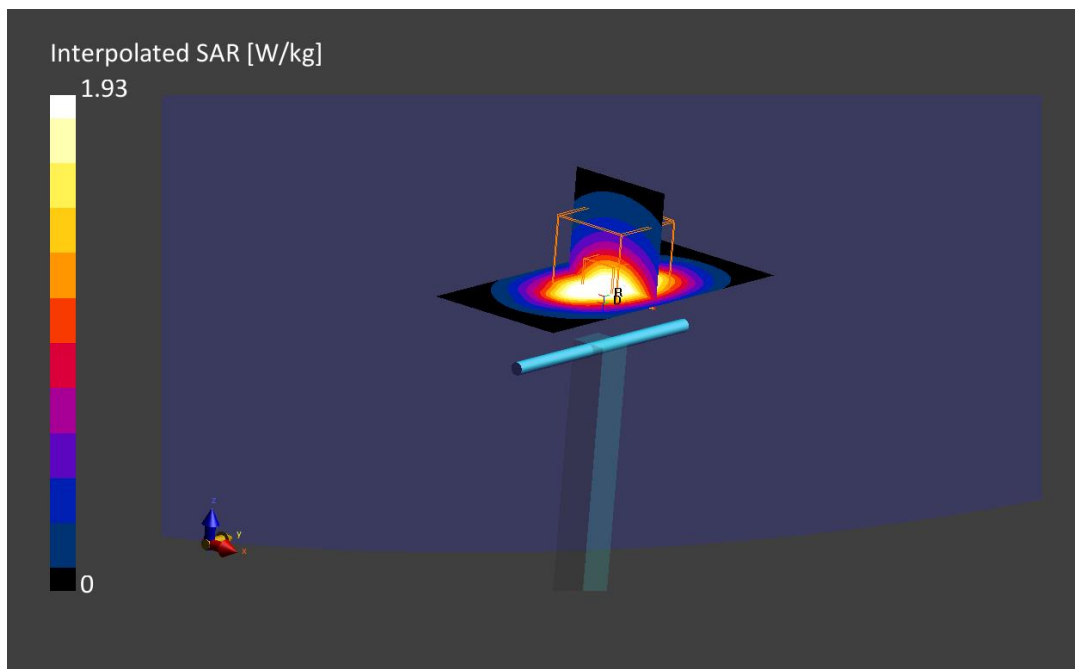

22. System Check Body Liquid 1900MHz – 2024-01-09

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
Dipole 1900MHz, SPEAG	50.0 x 10.0 x 8.0	5d197	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	1900.0, 0	8.72	1.54	53.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-08	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-09, 15:38	2024-01-09, 15:43
psSAR1g [W/kg]	2.02	1.93
psSAR10g [W/kg]	1.04	0.982
Power Drift [dB]	-0.09	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		82.7
Dist 3dB Peak [mm]		9.6

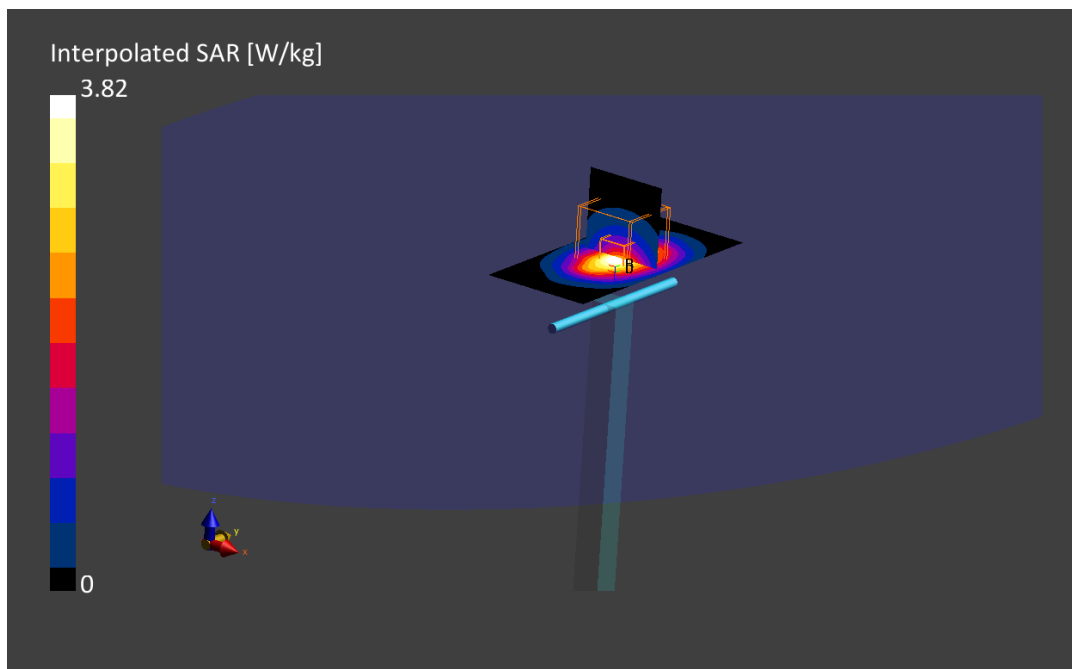

23. System Check Body Liquid 2300MHz – 2024-01-05

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D2300MHZ, SPEAG	50.0 x 10.0 x 8.0	1046	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	2300.0, 0	8.4	1.91	51.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-05, 19:26	2024-01-05, 19:33
psSAR1g [W/kg]	2.59	2.51
psSAR10g [W/kg]	1.23	1.17
Power Drift [dB]	-0.20	-0.15
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.3
Dist 3dB Peak [mm]		9.1

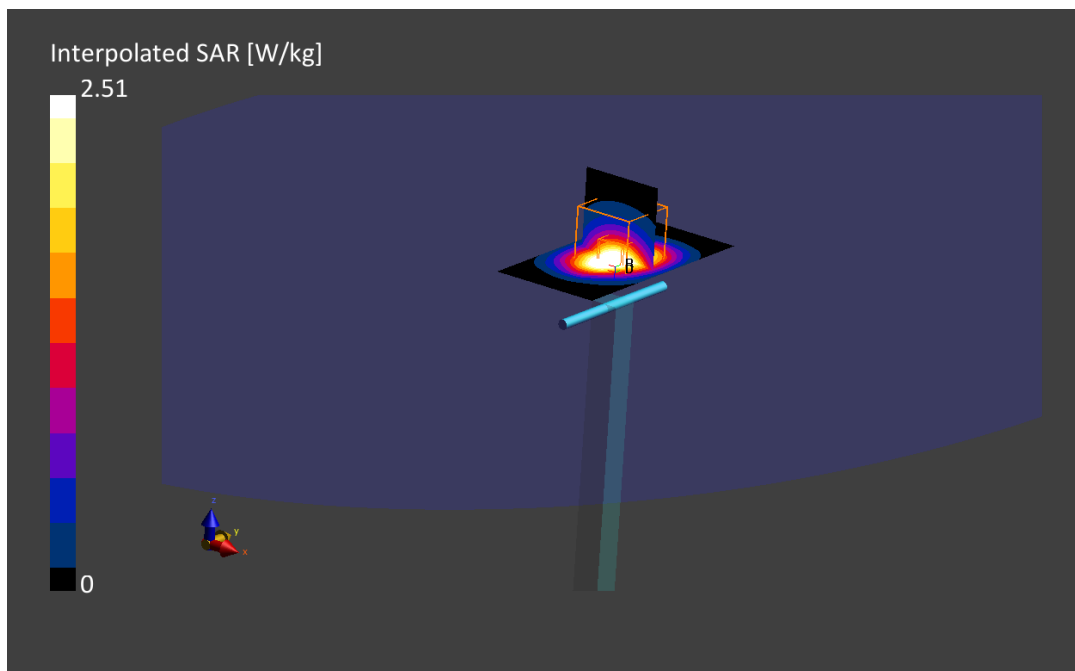

24. System Check Body Liquid 2600MHz – 2024-01-04

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D2600MHz, SPEAG	50.0 x 10.0 x 8.0	1100	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,		0--	2600.0, 0	7.92	2.20	51.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) -	MBBL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-01-04, 20:15	2024-01-04, 20:22
psSAR1g [W/kg]	2.70	2.68
psSAR10g [W/kg]	1.21	1.17
Power Drift [dB]	-0.08	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		80.2
Dist 3dB Peak [mm]		8.9

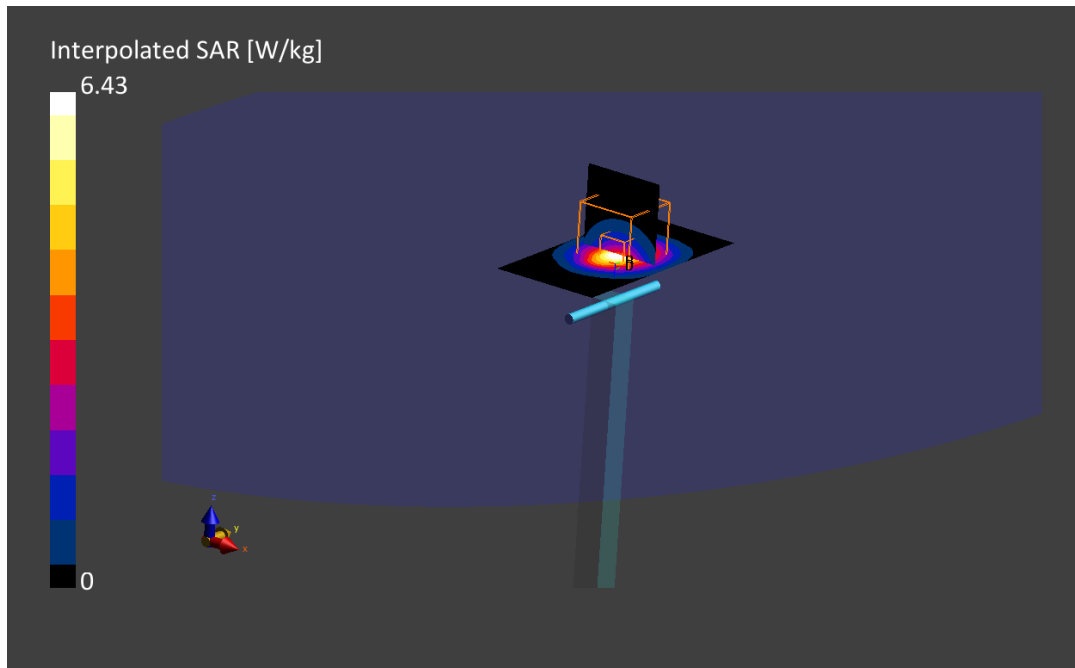

25. System Check Body Liquid 3700MHz – 2024-01-05

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	S/N	DUT Type
D3700MHz, SPEAG	50.0 x 10.0 x 17.0	1093	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MSL	,	,	0--	3700.0, 0	6.62	3.40	49.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt)	MABL-600-6000, 2024-Jan-03	EX3DV4 - SN7604, 2023-09-08	DAE4ip Sn1704, 2023-04-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	28.0 x 28.0 x 28.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results


	Area Scan	Zoom Scan
Date	2024-01-05, 19:49	2024-01-05, 19:55
psSAR1g [W/kg]	3.41	3.36
psSAR10g [W/kg]	1.25	1.22
Power Drift [dB]	-0.19	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive Only	Positive Only
M2/M1 [%]		75.7
Dist 3dB Peak [mm]		8.0

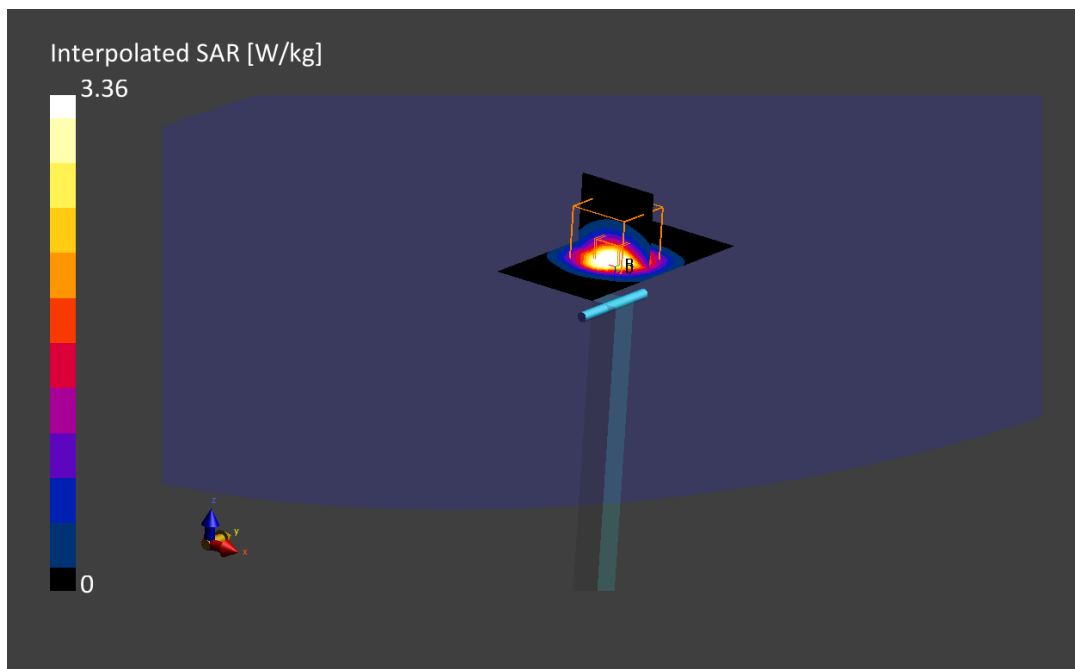

Annex D. TSL Dielectric Parameters

D.1 Body 650MHz-1950MHz

Freq.(MHz)	Target		2024-01-03 Measured		2024-01-08 Measured	
	ϵ' (F/m)	σ (S/m)	$\epsilon'1$ (F/m)	$\epsilon'1$ (F/m)	$\epsilon'2$ (F/m)	$\epsilon'2$ (F/m)
650.0	55.92	0.96	54.16	0.93	55.2	0.86
700.0	55.73	0.96	54.03	0.95	55.08	0.88
750.0	55.53	0.96	53.90	0.97	54.95	0.89
800.0	55.34	0.97	53.78	0.98	54.82	0.91
850.0	55.15	0.99	53.66	1.00	54.70	0.93
900.0	55.0	1.05	53.54	1.02	54.58	0.95
950.0	54.93	1.08	53.43	1.04	54.47	0.97
1000.0	54.84	1.10	53.32	1.06	54.36	0.99
1050.0	54.75	1.12	53.23	1.08	54.26	1.02
1100.0	54.65	1.14	53.13	1.11	54.17	1.04
1150.0	54.56	1.17	53.04	1.13	54.08	1.07
1200.0	54.47	1.19	52.95	1.15	53.99	1.09
1250.0	54.37	1.21	52.86	1.18	53.91	1.12
1300.0	54.28	1.23	52.78	1.20	53.83	1.14
1350.0	54.19	1.26	52.7	1.23	53.75	1.17
1400.0	54.09	1.28	52.62	1.26	53.68	1.20
1450.0	54.00	1.30	52.54	1.29	53.60	1.23
1500.0	53.94	1.33	52.46	1.31	53.53	1.26
1550.0	53.88	1.36	52.39	1.34	53.46	1.29
1600.0	53.81	1.39	52.32	1.38	53.39	1.32
1650.0	53.69	1.43	52.25	1.41	53.32	1.36
1700.0	53.56	1.46	52.18	1.44	53.25	1.39
1750.0	53.43	1.49	52.12	1.47	53.18	1.43
1800.0	53.30	1.52	52.05	1.51	53.12	1.46
1850.0	53.30	1.52	51.99	1.54	53.05	1.50
1900.0	53.30	1.52	51.93	1.58	52.98	1.54
1950.0	53.30	1.52	51.88	1.62	52.92	1.57

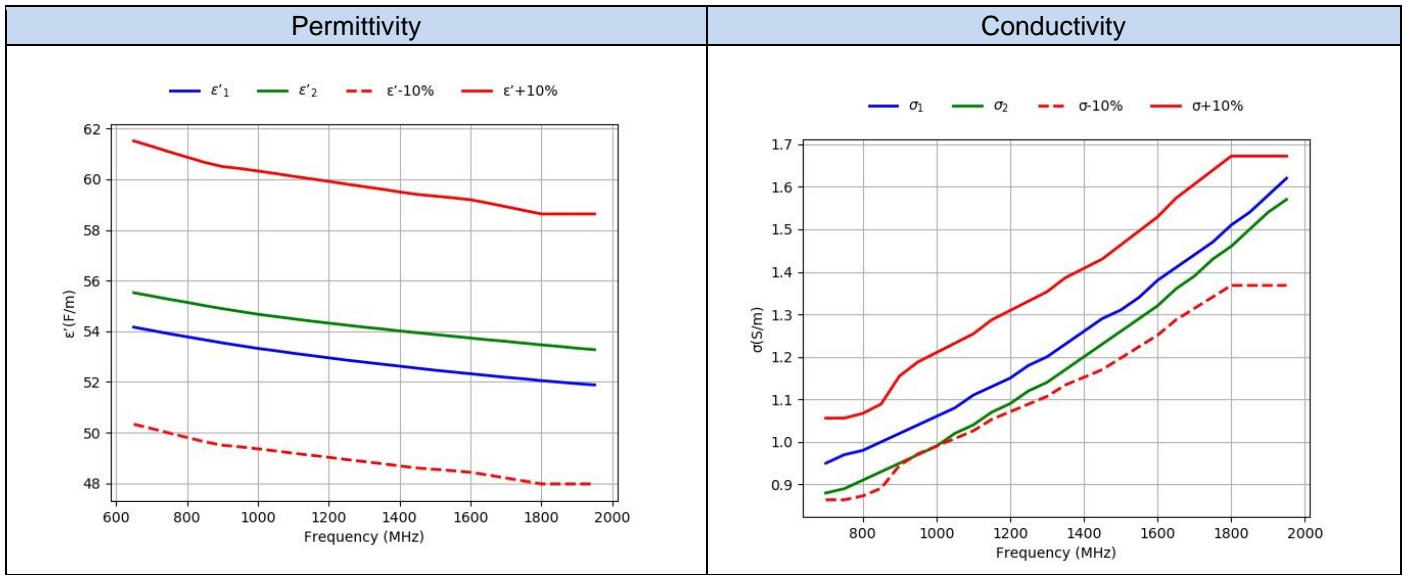

D.2 Body 2250MHz-3800MHz

			2024-01-03		2024-01-08	
Target			Measured		Measured	
Freq.(MHz)	ϵ' (F/m)	σ (S/m)	Freq.(MHz)	ϵ' (F/m)	Freq.(MHz)	ϵ' (F/m)
2250.0	52.97	1.76	51.56	1.87	52.55	1.83
2300.0	52.9	1.81	51.50	1.91	52.48	1.88
2350.0	52.83	1.85	51.44	1.96	52.41	1.92
2400.0	52.77	1.90	51.37	2.00	52.33	1.97
2450.0	52.70	1.95	51.3	2.05	52.25	2.02
2500.0	52.64	2.02	51.22	2.10	52.17	2.07
2550.0	52.57	2.09	51.15	2.15	52.08	2.12
2600.0	52.51	2.16	51.07	2.20	51.99	2.17
2650.0	52.45	2.23	50.98	2.25	51.90	2.22
2700.0	52.38	2.30	50.89	2.300	51.80	2.28
2750.0	52.32	2.38	50.8	2.35	51.70	2.33
2800.0	52.25	2.45	50.71	2.40	51.60	2.38
2850.0	52.19	2.52	50.62	2.45	51.50	2.43
2900.0	52.13	2.59	50.52	2.5	51.40	2.49
2950.0	52.06	2.66	50.43	2.55	51.29	2.54
3000.0	52.0	2.73	50.33	2.60	51.19	2.60
3050.0	51.93	2.79	50.23	2.66	51.09	2.65
3100.0	51.86	2.85	50.14	2.71	50.99	2.70
3150.0	51.80	2.91	50.04	2.76	50.89	2.76
3200.0	51.73	2.96	49.95	2.82	50.80	2.82
3250.0	51.66	3.02	49.85	2.87	50.70	2.87
3300.0	51.59	3.08	49.76	2.93	50.60	2.93
3350.0	51.52	3.14	49.67	2.99	50.51	2.98
3400.0	51.46	3.20	49.58	3.04	50.42	3.04
3450.0	51.39	3.26	49.50	3.10	50.32	3.10
3500.0	51.32	3.31	49.42	3.16	50.23	3.16
3550.0	51.25	3.37	49.33	3.22	50.14	3.21
3600.0	51.19	3.43	49.25	3.28	50.06	3.27
3650.0	51.12	3.49	49.17	3.34	49.97	3.34
3700.0	51.05	3.55	49.09	3.40	49.88	3.40
3750.0	50.98	3.61	49.02	3.47	49.79	3.46
3800.0	50.91	3.66	48.94	3.53	49.71	3.52

