

## FCC Test Report

### (PART 24)

**Report No.:** RF180704C01-1

**FCC ID:** ZMOL850GLD

**Test Model:** L850-GL

**Received Date:** Jul. 04, 2018

**Test Date:** Jul. 10, 2018 ~ Jul. 17, 2018

**Issued Date:** Jul. 19, 2018

**Applicant:** Fibocom Wireless Inc.

**Address:** 5/F, Tower A, Technology Building II, 1057 Nanhai Blvd, Nanshan, Shenzhen, China

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

**Test Location:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

**FCC Registration /**  
**Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results.....</b>	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments .....	7
<b>3 General Information .....</b>	<b>8</b>
3.1 General Description of EUT .....	8
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail .....	10
3.4 EUT Operating Conditions .....	12
3.5 General Description of Applied Standards.....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement.....	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	13
4.1.4 Test Results .....	14
4.2 Modulation Characteristics Measurement .....	18
4.2.1 Limits of Modulation Characteristics.....	18
4.2.2 Test Setup.....	18
4.2.3 Test Procedure .....	18
4.2.4 Test Results .....	19
4.3 Frequency Stability Measurement .....	20
4.3.1 Limits of Frequency Stability Measurement .....	20
4.3.2 Test Procedure .....	20
4.3.3 Test Setup.....	20
4.3.4 Test Results .....	21
4.4 Occupied Bandwidth Measurement.....	28
4.4.1 Test Procedure .....	28
4.4.2 Test Setup.....	28
4.4.3 Test Result .....	29
4.5 Band Edge Measurement.....	33
4.5.1 Limits of Band Edge Measurement .....	33
4.5.2 Test Setup.....	33
4.5.3 Test Procedures.....	33
4.5.4 Test Results .....	34
4.6 Peak to Average Ratio .....	41
4.6.1 Limits of Peak to Average Ratio Measurement .....	41
4.6.2 Test Setup.....	41
4.6.3 Test Procedures.....	41
4.6.4 Test Results .....	42
4.7 Conducted Spurious Emissions.....	46
4.7.1 Limits of Conducted Spurious Emissions Measurement.....	46
4.7.2 Test Setup.....	46
4.7.3 Test Procedure .....	46
4.7.4 Test Results .....	47
4.8 Radiated Emission Measurement.....	68
4.8.1 Limits of Radiated Emission Measurement .....	68
4.8.2 Test Procedure .....	68
4.8.3 Deviation from Test Standard .....	68
4.8.4 Test Setup.....	69
4.8.5 Test Results .....	70

<b>5 Pictures of Test Arrangements.....</b>	<b>82</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>83</b>

### Release Control Record

Issue No.	Description	Date Issued
RF180704C01-1	Original Release	Jul. 19, 2018

## 1 Certificate of Conformity

**Product:** LTE module

**Brand:** Fibocom

**Test Model:** L850-GL

**Sample Status:** Identical Prototype


**Applicant:** Fibocom Wireless Inc.

**Test Date:** Jul. 10, 2018 ~ Jul. 17, 2018

**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.


**Prepared by :**

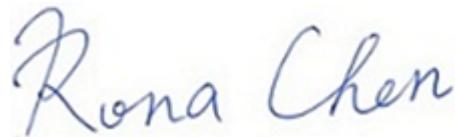

, **Date:** Jul. 19, 2018

Rona Chen / Specialist

**Approved by :**

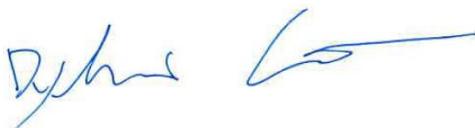

, **Date:** Jul. 19, 2018

Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -30.29 dB at 40.67 MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Double Ridge Guide Horn Antenna EMC	3115	5619	Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 29, 2018	Jun. 28, 2019

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Chamber 10.  
 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.  
 4. The IC Site Registration No. is IC7450F-10.

### 3 General Information


#### 3.1 General Description of EUT

<b>Product</b>	LTE module	
<b>Brand</b>	Fibocom	
<b>Test Model</b>	L850-GL	
<b>Status of EUT</b>	Identical Prototype	
<b>Power Supply Rating</b>	3.3 Vdc (Host equipment)	
<b>Modulation Type</b>	WCDMA	QPSK
	LTE	QPSK, 16QAM
<b>Frequency Range</b>	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
<b>Max. EIRP Power</b>	WCDMA	594.29 mW
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	605.34 mW
	LTE Band 2 (Channel Bandwidth: 3 MHz)	610.94 mW
	LTE Band 2 (Channel Bandwidth: 5 MHz)	622.30 mW
	LTE Band 2 (Channel Bandwidth: 10 MHz)	623.73 mW
	LTE Band 2 (Channel Bandwidth: 15 MHz)	632.41 mW
	LTE Band 2 (Channel Bandwidth: 20 MHz)	639.73 mW
<b>Emission Designator</b>	WCDMA	4M08F9W
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09G7D
	LTE Band 2 (Channel Bandwidth: 3 MHz)	2M71G7D
	LTE Band 2 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 2 (Channel Bandwidth: 10 MHz)	9M90G7D
	LTE Band 2 (Channel Bandwidth: 15 MHz)	13M49W7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	18M00G7D
<b>Antenna Type</b>	External Antenna with 5.0 dBi gain	
<b>Accessory Device</b>	N/A	
<b>Data Cable Supplied</b>	N/A	

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

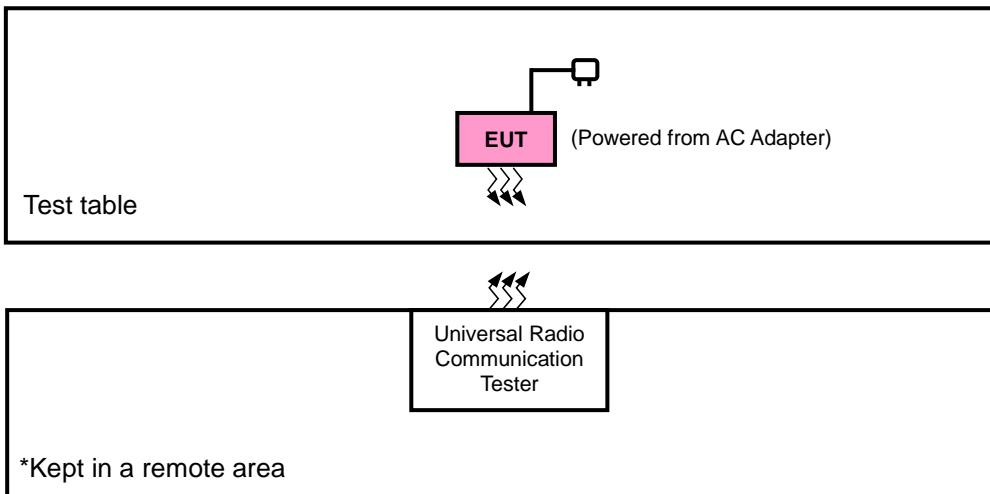

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
WCDMA	Z-axis
LTE Band 2	Z-axis

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Modulation Characteristics	9262 to 9538	9400	WCDMA
-	Frequency Stability	9262 to 9538	9262, 9538	WCDMA
-	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
-	Band Edge	9262 to 9538	9262, 9538	WCDMA
-	Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
-	Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

#### LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

**LTE Band 2**

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19193	1.4 MHz		6 RB / 0 RB Offset
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 5 RB Offset
			19185	3 MHz		6 RB / 0 RB Offset
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset
			19175	5 MHz		25 RB / 0 RB Offset
		18650 to 19150	18650	10 MHz	QPSK	1 RB / 24 RB Offset
			19150	10 MHz		25 RB / 0 RB Offset
		18675 to 19125	18675	15 MHz	QPSK	1 RB / 0 RB Offset
			19125	15 MHz		75 RB / 0 RB Offset
		18700 to 19100	18700	20 MHz	QPSK	1 RB / 74 RB Offset
			19100	20 MHz		75 RB / 0 RB Offset
						1 RB / 0 RB Offset
						100 RB / 0 RB Offset
						1 RB / 99 RB Offset
						100 RB / 0 RB Offset
-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

**Test Condition:**

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	3.3 Vdc	Getaz Yang
Modulation Characteristics	26 deg. C, 58 % RH	3.3 Vdc	Getaz Yang
Frequency Stability	26 deg. C, 58 % RH	3.3 Vdc	Getaz Yang
Occupied Bandwidth	26 deg. C, 58 % RH	3.3 Vdc	Getaz Yang
Band Edge	26 deg. C, 58 % RH	3.3 Vdc	Getaz Yang
Peak to Average Ratio	26 deg. C, 58 % RH	3.3 Vdc	Getaz Yang
Conducted Emission	26 deg. C, 58 % RH	3.3 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Thomas Wei

**3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures

##### **Conducted Power Measurement:**

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

##### **EIRP / ERP Measurement:**

- a. EIRP = Conducted Output power level + Antenna gain.
- b. ERP power can be calculated from EIRP power by subtracting the gain of dipole, ERP power = EIRP power - 2.15dBi.
- c. ERP = Conducted Output power level + Antenna gain (dBi) - Isotropically Factor (2.15dB)

#### 4.1.3 Test Setup



#### 4.1.4 Test Results

##### Conducted Output Power (dBm)

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	22.61	22.71	22.74
HSDPA Subtest-1	20.95	21.05	20.98
HSDPA Subtest-2	20.87	21.06	21.01
HSDPA Subtest-3	20.89	21.02	21.06
HSDPA Subtest-4	20.90	21.00	21.05
HSUPA Subtest-1	18.85	18.90	18.86
HSUPA Subtest-2	18.69	18.63	18.67
HSUPA Subtest-3	18.84	18.76	18.81
HSUPA Subtest-4	18.63	18.59	18.55
HSUPA Subtest-5	18.71	18.66	18.59

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18607	Mid Ch 18900	High Ch 19193		Low Ch 18607	Mid Ch 18900	High Ch 19193	
			1850.7 MHz	1880.0 MHz	1909.3 MHz		1850.7 MHz	1880.0 MHz	1909.3 MHz	
2 / 1.4M	1	0	22.82	22.68	22.57	0	21.70	21.65	21.62	1
	1	2	22.66	22.63	22.43	0	21.67	21.54	21.53	1
	1	5	22.46	22.47	22.24	0	21.36	21.33	21.30	1
	3	0	21.63	21.63	21.45	0	20.60	20.56	20.44	1
	3	1	21.47	21.46	21.33	0	20.43	20.44	20.21	1
	3	3	21.31	21.30	21.23	0	20.41	20.20	20.20	1
	6	0	21.66	21.60	21.51	1	20.59	20.49	20.34	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18615	Mid Ch 18900	High Ch 19185		Low Ch 18615	Mid Ch 18900	High Ch 19185	
			1851.5 MHz	1880.0 MHz	1908.5 MHz		1851.5 MHz	1880.0 MHz	1908.5 MHz	
2 / 3M	1	0	22.86	22.74	22.64	0	21.67	21.45	21.27	1
	1	7	22.69	22.66	22.54	0	21.61	21.59	21.44	1
	1	14	22.47	22.33	22.38	0	21.51	21.42	21.29	1
	8	0	21.65	21.64	21.54	1	20.54	20.47	20.36	2
	8	3	21.49	21.45	21.27	1	20.54	20.26	20.25	2
	8	7	21.48	21.39	21.30	1	20.37	20.22	20.19	2
	15	0	21.62	21.71	21.49	1	20.55	20.61	20.41	2



**EIRP Power (dBm)**

Note: EIRP (dBm) = Max. Conducted Power (dBm) + Gain (dBi)

Band	WCDMA II		
	RMC 12.2K		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
Max. Cond. Power (dBm)	22.61	22.71	22.74
Max. EIRP Power (dBm)	27.61	27.71	27.74
Max. EIRP Power (mW)	576.77	590.20	594.29

**Band 2 / 1.4M, 1RB#0**

Test Mode	QPSK			16QAM		
	Low Ch 18607	Mid Ch 18900	High Ch 19193	Low Ch 18607	Mid Ch 18900	High Ch 19193
	1850.7 MHz	1880.0 MHz	1909.3 MHz	1850.7 MHz	1880.0 MHz	1909.3 MHz
Max. Cond. Power (dBm)	22.82	22.68	22.57	21.70	21.65	21.62
Max. EIRP Power (dBm)	27.82	27.68	27.57	26.70	26.65	26.62
Max. EIRP Power (mW)	605.34	586.14	571.48	467.74	462.38	459.20

**Band 2 / 3M, 1RB#0**

Test Mode	QPSK			16QAM		
	Low Ch 18615	Mid Ch 18900	High Ch 19185	Low Ch 18615	Mid Ch 18900	High Ch 19185
	1851.5 MHz	1880.0 MHz	1908.5 MHz	1851.5 MHz	1880.0 MHz	1908.5 MHz
Max. Cond. Power (dBm)	22.86	22.74	22.64	21.67	21.45	21.27
Max. EIRP Power (dBm)	27.86	27.74	27.64	26.67	26.45	26.27
Max. EIRP Power (mW)	610.94	594.29	580.76	464.52	441.57	423.64

**Band 2 / 5M, 1RB#0**

Test Mode	QPSK			16QAM		
	Low Ch 18625	Mid Ch 18900	High Ch 19175	Low Ch 18625	Mid Ch 18900	High Ch 19175
	1852.5 MHz	1880.0 MHz	1907.5 MHz	1852.5 MHz	1880.0 MHz	1907.5 MHz
Max. Cond. Power (dBm)	22.94	22.82	22.68	21.56	21.70	21.43
Max. EIRP Power (dBm)	27.94	27.82	27.68	26.56	26.70	26.43
Max. EIRP Power (mW)	622.30	605.34	586.14	452.90	467.74	439.54

**Band 2 / 10M, 1RB#0**

Test Mode	QPSK			16QAM		
	Low Ch 18650	Mid Ch 18900	High Ch 19150	Low Ch 18650	Mid Ch 18900	High Ch 19150
	1855.0 MHz	1880.0 MHz	1905.0 MHz	1855.0 MHz	1880.0 MHz	1905.0 MHz
Max. Cond. Power (dBm)	22.95	22.90	22.81	21.77	21.75	21.50
Max. EIRP Power (dBm)	27.95	27.90	27.81	26.77	26.75	26.50
Max. EIRP Power (mW)	623.73	616.60	603.95	475.34	473.15	446.68

**Band 2 / 15M, 1RB#0**

Test Mode	QPSK			16QAM		
	Low Ch 18675	Mid Ch 18900	High Ch 19125	Low Ch 18675	Mid Ch 18900	High Ch 19125
	1857.5 MHz	1880.0 MHz	1902.5 MHz	1857.5 MHz	1880.0 MHz	1902.5 MHz
<b>Max. Cond. Power (dBm)</b>	23.01	22.89	22.79	21.89	21.81	21.73
<b>Max. EIRP Power (dBm)</b>	28.01	27.89	27.79	26.89	26.81	26.73
<b>Max. EIRP Power (mW)</b>	632.41	615.18	601.17	488.65	479.73	470.98

**Band 2 / 20M, 1RB#0**

Test Mode	QPSK			16QAM		
	Low Ch 18700	Mid Ch 18900	High Ch 19100	Low Ch 18700	Mid Ch 18900	High Ch 19100
	1860.0 MHz	1880.0 MHz	1900.0 MHz	1860.0 MHz	1880.0 MHz	1900.0 MHz
<b>Max. Cond. Power (dBm)</b>	23.06	22.97	22.87	22.01	21.94	21.80
<b>Max. EIRP Power (dBm)</b>	28.06	27.97	27.87	27.01	26.94	26.80
<b>Max. EIRP Power (mW)</b>	639.73	626.61	612.35	502.34	494.31	478.63

## 4.2 Modulation Characteristics Measurement

### 4.2.1 Limits of Modulation Characteristics

N/A



### 4.2.2 Test Setup



### 4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

#### 4.2.4 Test Results

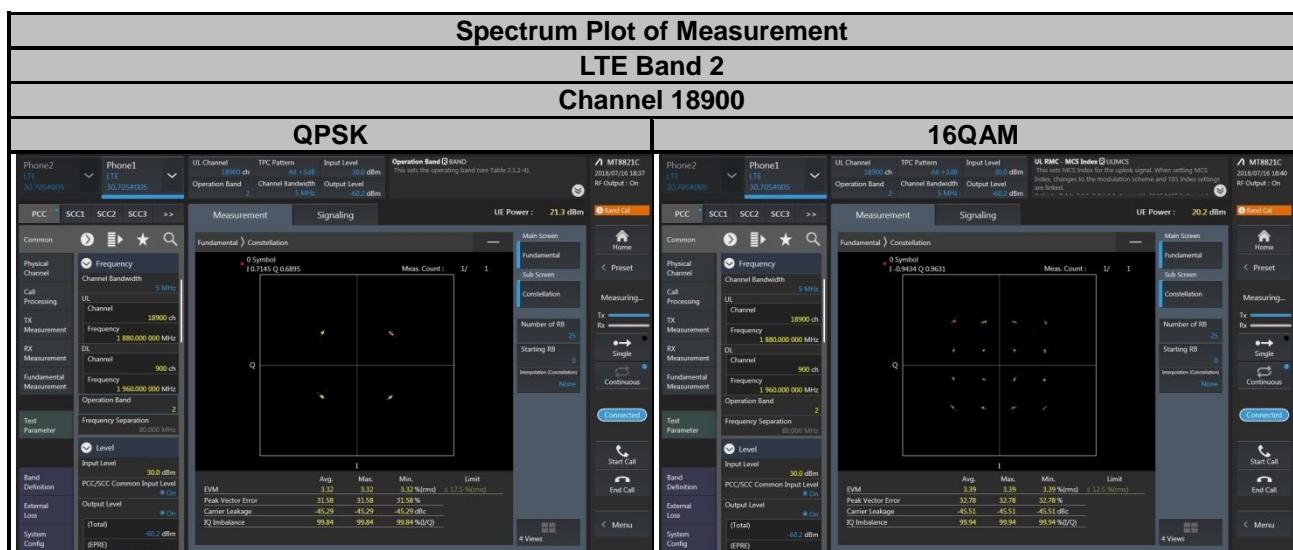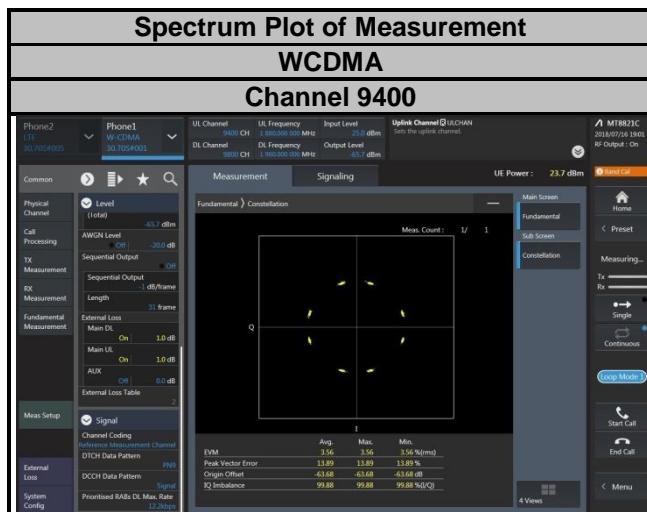

### **4.3 Frequency Stability Measurement**

#### **4.3.1 Limits of Frequency Stability Measurement**


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### **4.3.2 Test Procedure**

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### **4.3.3 Test Setup**

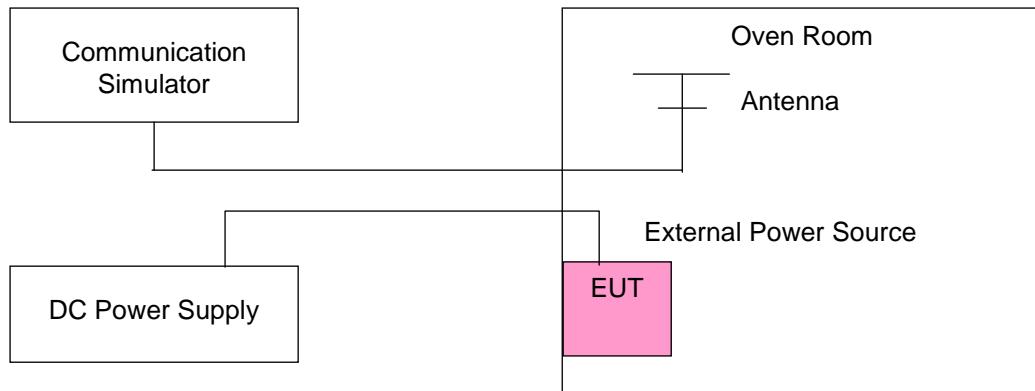

#### 4.3.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)	
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.3	1852.400004	0.002	1907.600004	0.002	2.5	
3.135	1852.400004	0.002	1907.600003	0.002	2.5	
4.4	1852.400003	0.002	1907.600002	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

##### Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)	
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1852.400003	0.002	1907.600003	0.002	2.5	
-20	1852.400003	0.001	1907.600001	0.001	2.5	
-10	1852.400002	0.001	1907.600002	0.001	2.5	
0	1852.400003	0.002	1907.600003	0.002	2.5	
10	1852.400003	0.002	1907.600001	0.001	2.5	
20	1852.399998	-0.001	1907.599998	-0.001	2.5	
30	1852.399997	-0.002	1907.599996	-0.002	2.5	
40	1852.399997	-0.002	1907.599997	-0.002	2.5	
50	1852.399998	-0.001	1907.599999	-0.001	2.5	
55	1852.399997	-0.002	1907.599998	-0.001	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.3	1850.700001	0.001	1909.300002	0.001	2.5	
3.135	1850.700002	0.001	1909.300003	0.001	2.5	
4.4	1850.700003	0.002	1909.300002	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 1.4 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1850.700003	0.002	1909.300002	0.001	2.5	
-20	1850.700003	0.002	1909.300002	0.001	2.5	
-10	1850.700002	0.001	1909.300003	0.001	2.5	
0	1850.700003	0.001	1909.300003	0.002	2.5	
10	1850.700003	0.001	1909.300003	0.002	2.5	
20	1850.699999	-0.001	1909.299998	-0.001	2.5	
30	1850.699998	-0.001	1909.299999	-0.001	2.5	
40	1850.699998	-0.001	1909.299997	-0.001	2.5	
50	1850.699998	-0.001	1909.299999	-0.001	2.5	
55	1850.699996	-0.002	1909.299999	-0.001	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.3	1851.500002	0.001	1908.500002	0.001	2.5	
3.135	1851.500003	0.002	1908.500002	0.001	2.5	
4.4	1851.500001	0.001	1908.500002	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 3 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1851.500003	0.002	1908.500003	0.001	2.5	
-20	1851.500001	0.001	1908.500002	0.001	2.5	
-10	1851.500001	0.001	1908.500001	0.001	2.5	
0	1851.500004	0.002	1908.500002	0.001	2.5	
10	1851.500003	0.001	1908.500004	0.002	2.5	
20	1851.499996	-0.002	1908.499999	-0.001	2.5	
30	1851.499997	-0.002	1908.499998	-0.001	2.5	
40	1851.499998	-0.001	1908.499997	-0.001	2.5	
50	1851.499997	-0.002	1908.499998	-0.001	2.5	
55	1851.499999	-0.001	1908.499997	-0.002	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.3	1852.500002	0.001	1907.500002	0.001	2.5	
3.135	1852.500003	0.002	1907.500004	0.002	2.5	
4.4	1852.500002	0.001	1907.500001	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 5 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1852.500001	0.001	1907.500001	0.001	2.5	
-20	1852.500003	0.002	1907.500002	0.001	2.5	
-10	1852.500004	0.002	1907.500003	0.002	2.5	
0	1852.500004	0.002	1907.500003	0.001	2.5	
10	1852.500002	0.001	1907.500004	0.002	2.5	
20	1852.499998	-0.001	1907.499999	-0.001	2.5	
30	1852.499998	-0.001	1907.499998	-0.001	2.5	
40	1852.499996	-0.002	1907.499999	-0.001	2.5	
50	1852.499997	-0.002	1907.499997	-0.002	2.5	
55	1852.499996	-0.002	1907.499997	-0.001	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 10 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.3	1855.000002	0.001	1905.000002	0.001	2.5	
3.135	1855.000002	0.001	1905.000002	0.001	2.5	
4.4	1855.000003	0.001	1905.000003	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 10 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1855.000002	0.001	1905.000002	0.001	2.5	
-20	1855.000003	0.002	1905.000003	0.002	2.5	
-10	1855.000002	0.001	1905.000002	0.001	2.5	
0	1855.000002	0.001	1905.000001	0.001	2.5	
10	1855.000001	0.001	1905.000003	0.001	2.5	
20	1854.999997	-0.002	1904.999998	-0.001	2.5	
30	1854.999998	-0.001	1904.999998	-0.001	2.5	
40	1854.999999	-0.001	1904.999996	-0.002	2.5	
50	1854.999997	-0.001	1904.999999	-0.001	2.5	
55	1854.999996	-0.002	1904.999997	-0.001	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 15 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.3	1857.500003	0.002	1902.500002	0.001	2.5	
3.135	1857.500003	0.002	1902.500003	0.002	2.5	
4.4	1857.500003	0.002	1902.500004	0.002	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 15 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1857.500004	0.002	1902.500004	0.002	2.5	
-20	1857.500003	0.001	1902.500003	0.001	2.5	
-10	1857.500002	0.001	1902.500002	0.001	2.5	
0	1857.500004	0.002	1902.500001	0.001	2.5	
10	1857.500001	0.001	1902.500002	0.001	2.5	
20	1857.499998	-0.001	1902.499998	-0.001	2.5	
30	1857.499996	-0.002	1902.499997	-0.002	2.5	
40	1857.499996	-0.002	1902.499997	-0.002	2.5	
50	1857.499999	-0.001	1902.499997	-0.001	2.5	
55	1857.499998	-0.001	1902.499996	-0.002	2.5	

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 20 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
3.3	1860.000001	0.001	1900.000003	0.002	2.5	
3.135	1860.000002	0.001	1900.000003	0.002	2.5	
4.4	1860.000003	0.002	1900.000002	0.001	2.5	

**Note:** The applicant defined the normal working voltage of the battery is from 3.135 Vdc to 4.4 Vdc.

## Frequency Error vs. Temperature


Temp. (°C)	LTE Band 2				Limit (ppm)	
	Channel Bandwidth: 20 MHz					
	Low Channel		High Channel			
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)		
-30	1860.000003	0.002	1900.000002	0.001	2.5	
-20	1860.000001	0.001	1900.000003	0.001	2.5	
-10	1860.000003	0.002	1900.000002	0.001	2.5	
0	1860.000002	0.001	1900.000003	0.001	2.5	
10	1860.000003	0.002	1900.000001	0.001	2.5	
20	1859.999997	-0.002	1899.999999	-0.001	2.5	
30	1859.999996	-0.002	1899.999997	-0.001	2.5	
40	1859.999999	-0.001	1899.999996	-0.002	2.5	
50	1859.999997	-0.002	1899.999998	-0.001	2.5	
55	1859.999999	-0.001	1899.999996	-0.002	2.5	

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

### 4.4.2 Test Setup

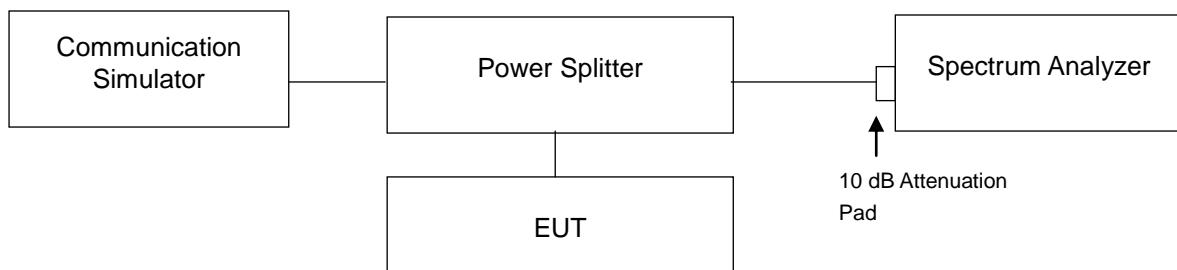


#### 4.4.3 Test Result


Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
		WCDMA
9262	1852.4	4.0807
9400	1880.0	4.0799
9538	1907.6	4.0775

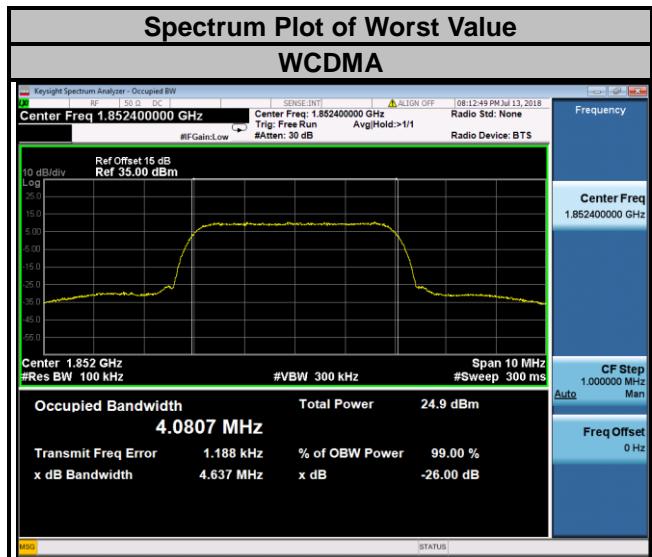


LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.09	1.09	18615	1851.5	2.71	2.70
18900	1880.0	1.09	1.09	18900	1880.0	2.70	2.70
19193	1909.3	1.09	1.09	19185	1908.5	2.70	2.70

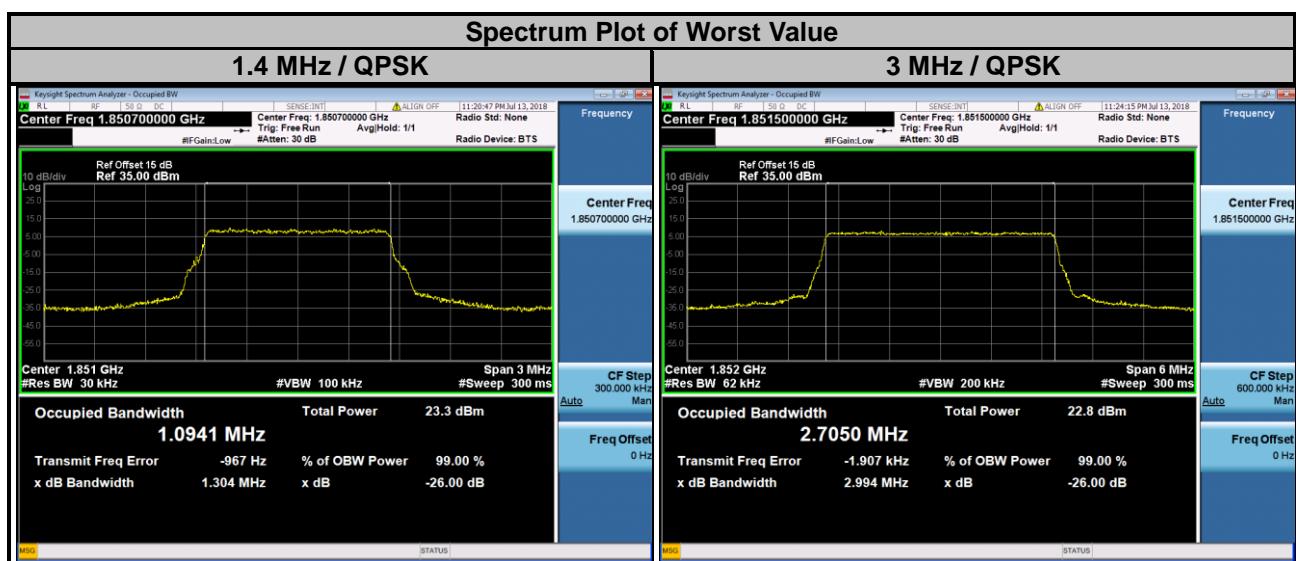

LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.49	4.50	18650	1855.0	9.00	8.99
18900	1880.0	4.49	4.50	18900	1880.0	8.99	8.98
19175	1907.5	4.49	4.50	19150	1905.0	8.99	8.98

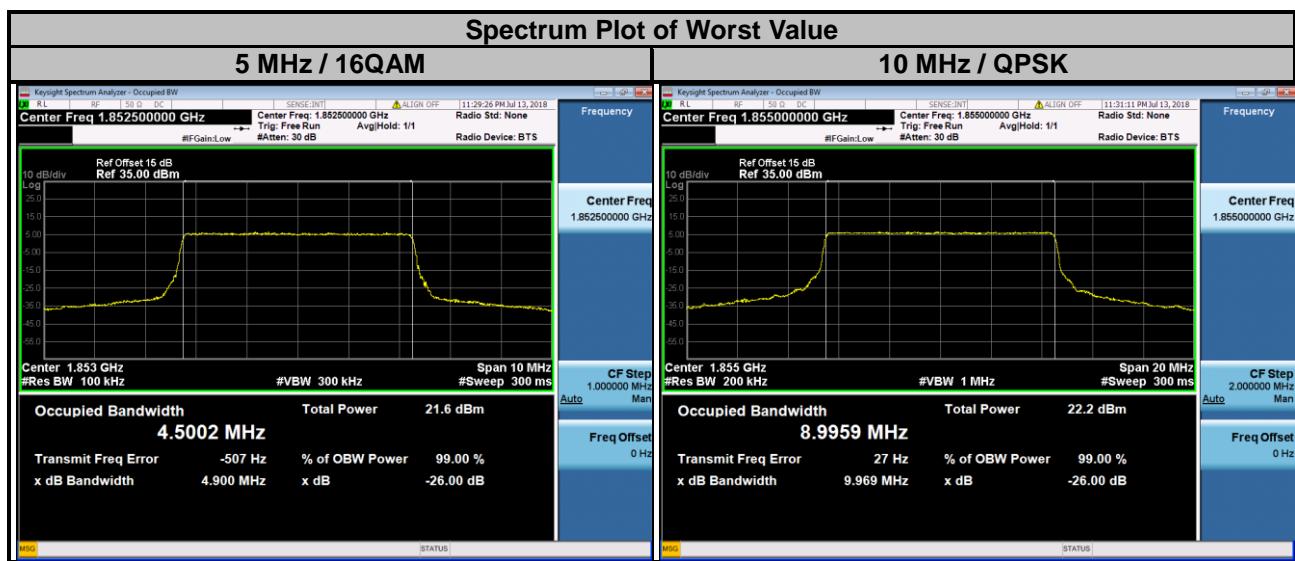

LTE Band 2							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.47	13.49	18700	1860.0	18.00	18.00
18900	1880.0	13.45	13.48	18900	1880.0	17.95	17.95
19125	1902.5	13.45	13.46	19100	1900.0	17.96	17.97

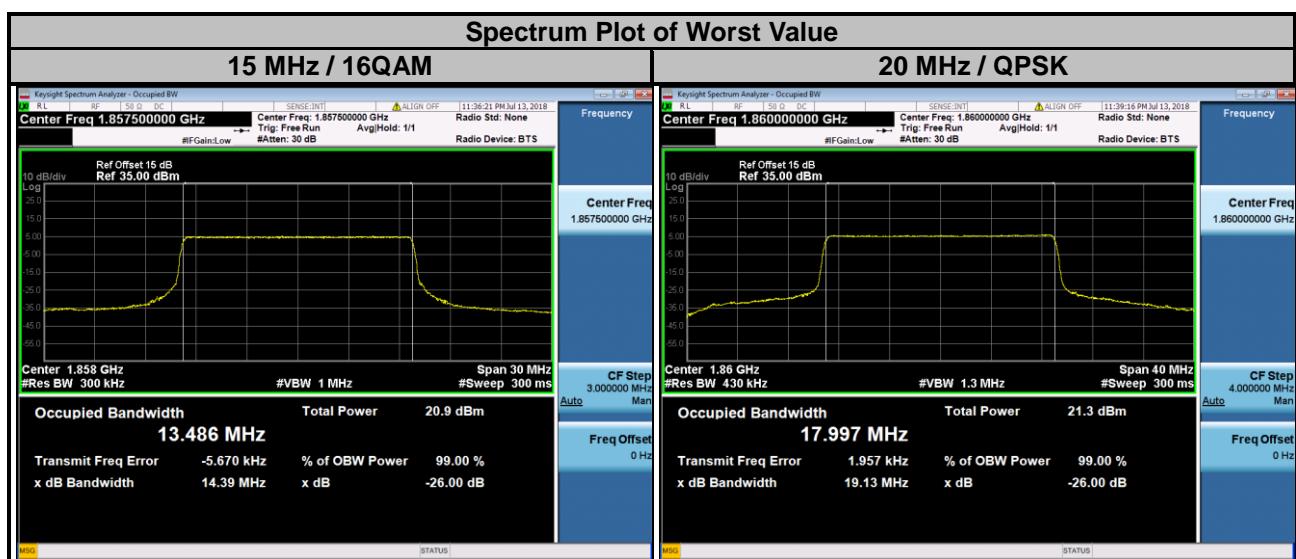


## 4.5 Band Edge Measurement

### 4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### 4.5.2 Test Setup

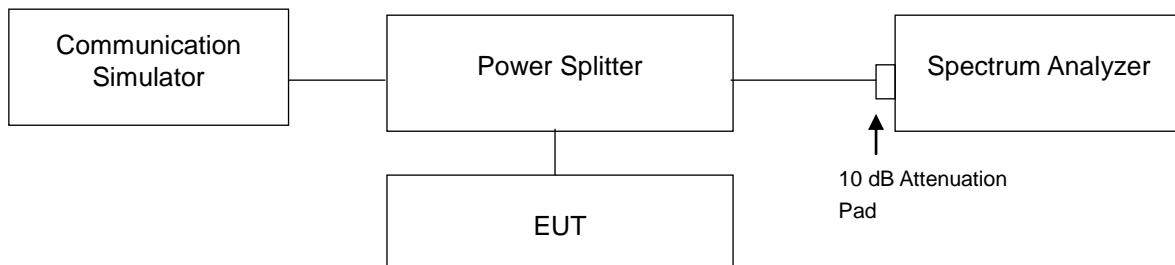



### 4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 300 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 300 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max trace plot into the test report.


#### 4.5.4 Test Results

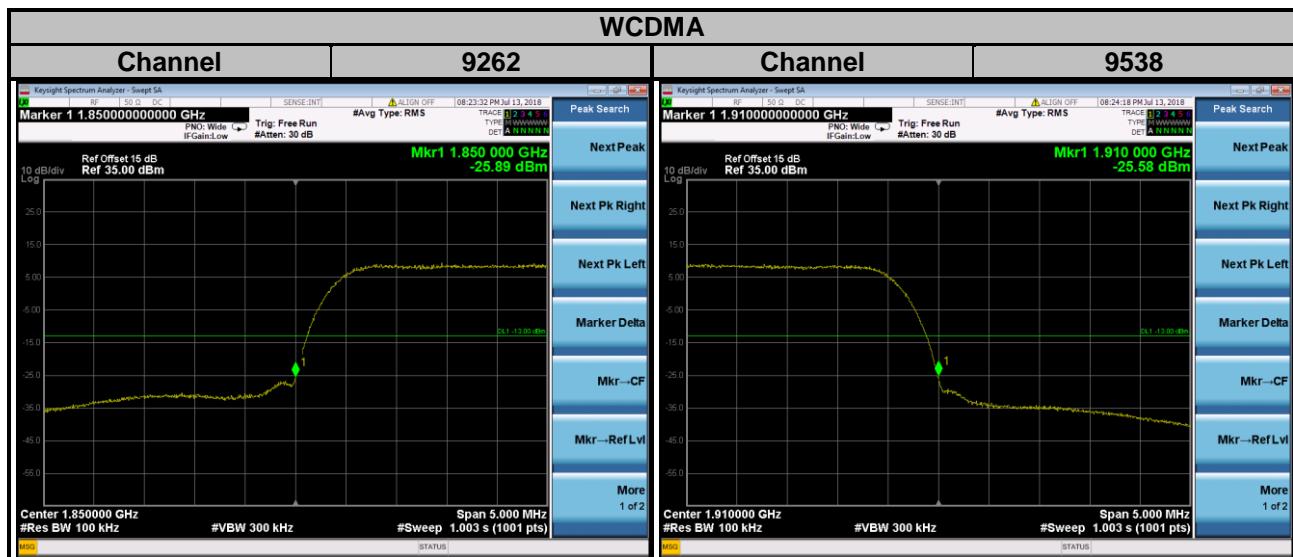


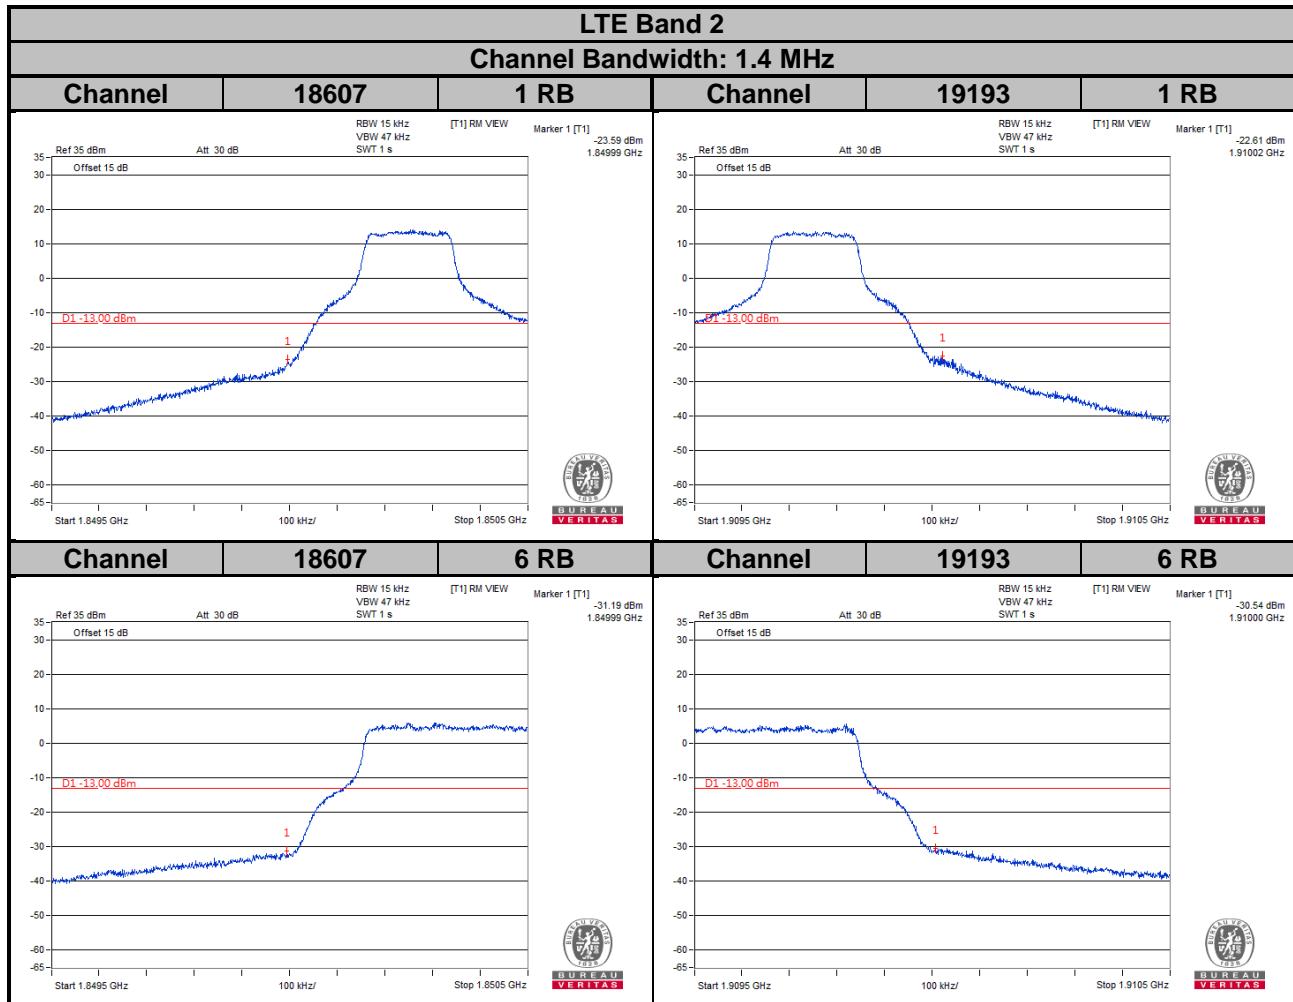


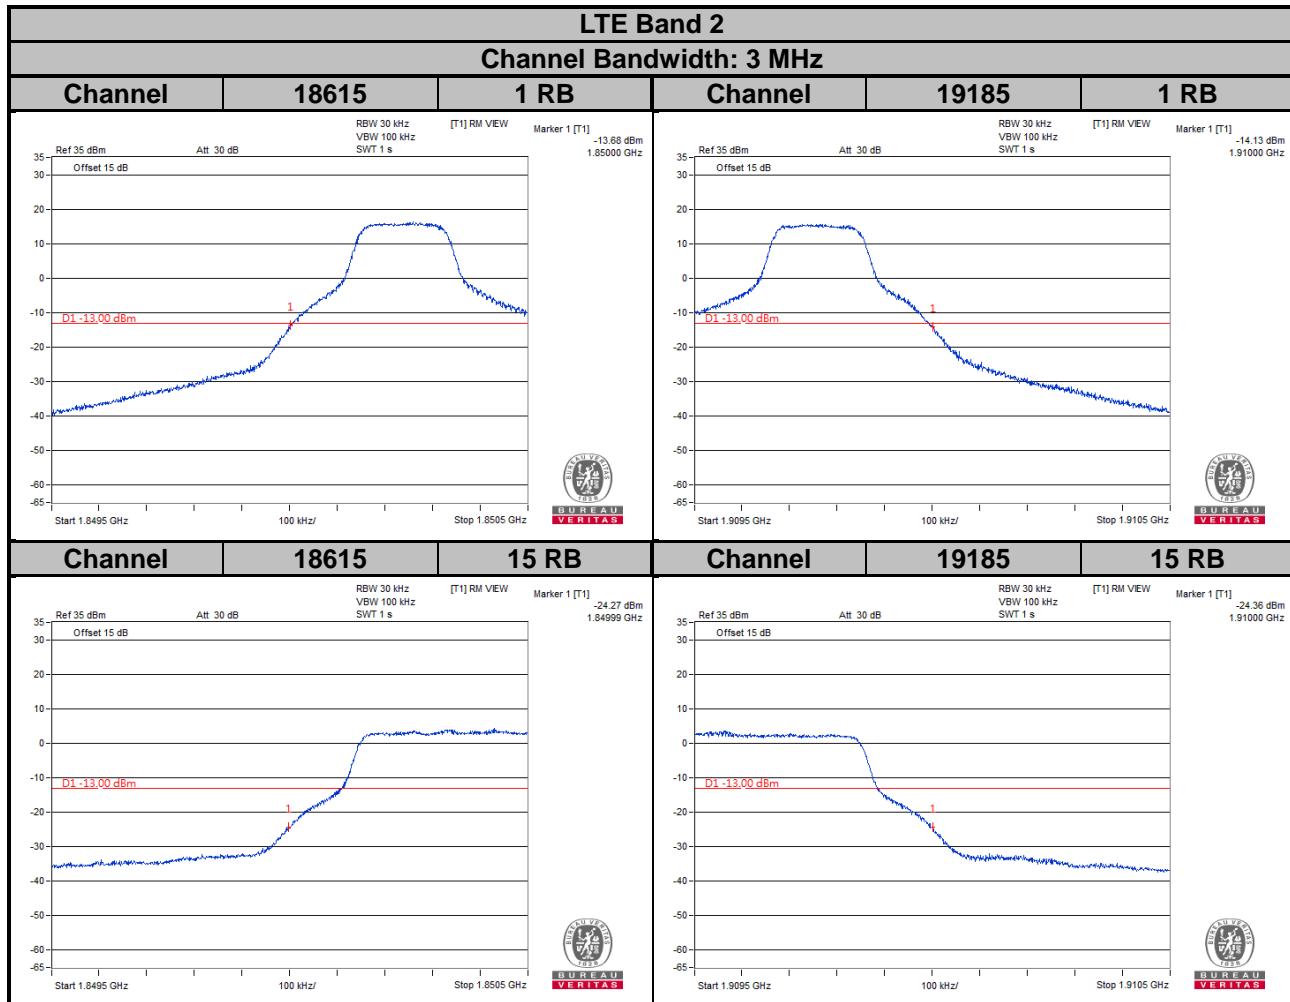

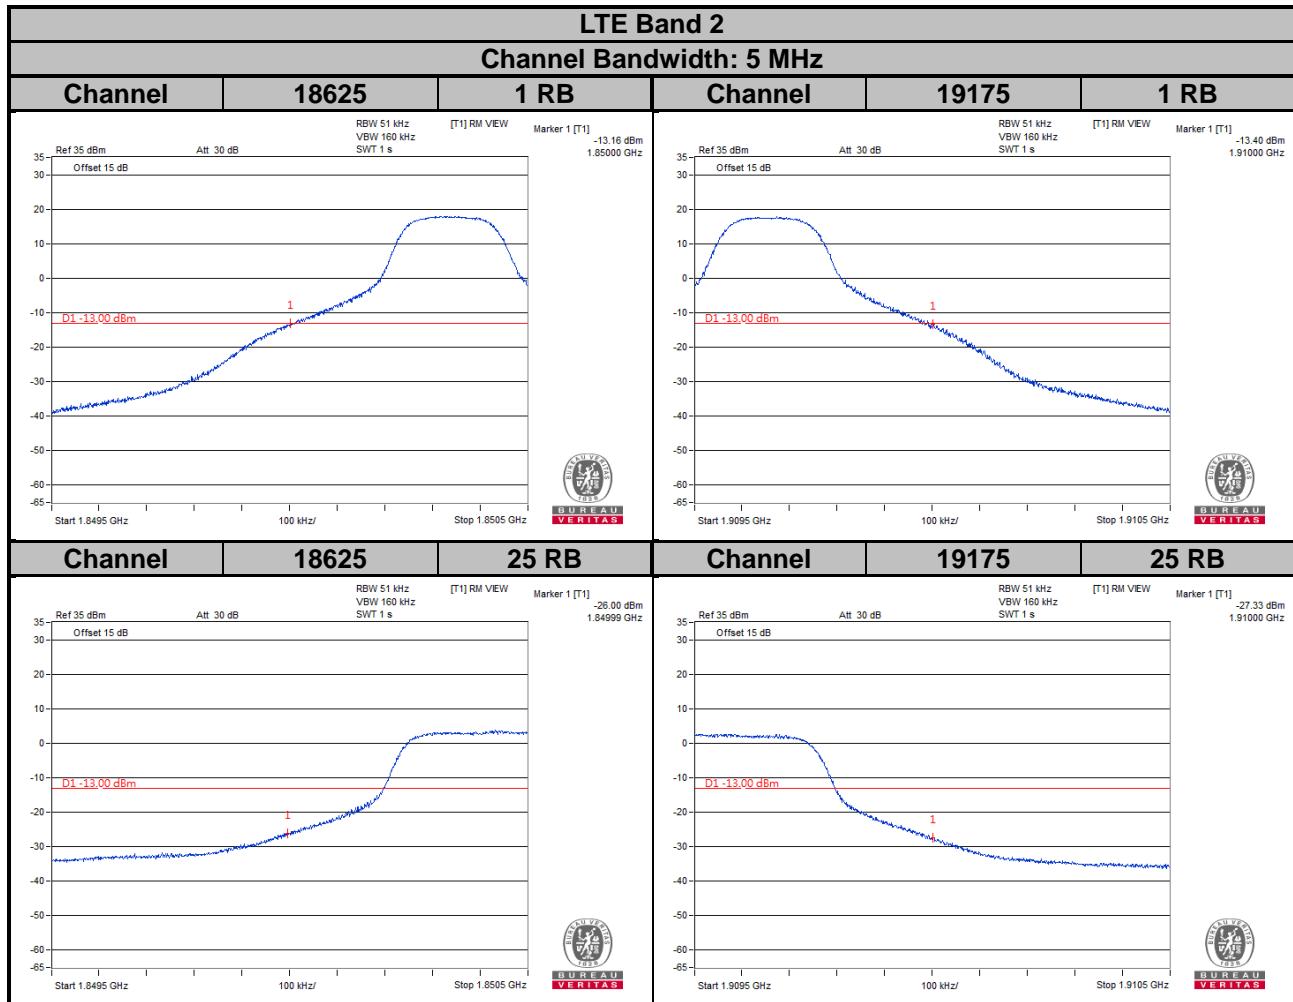

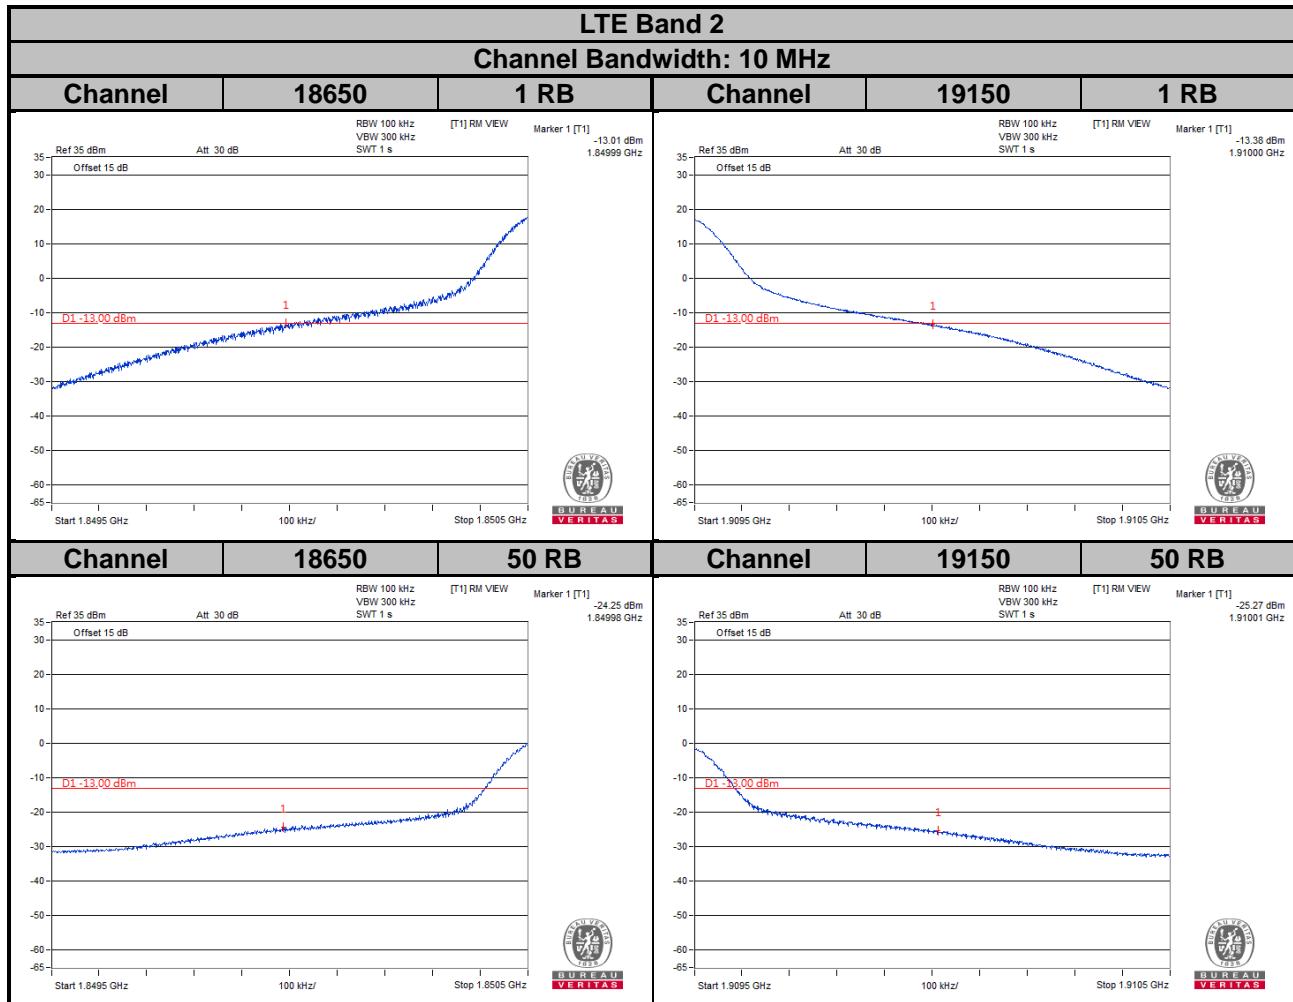

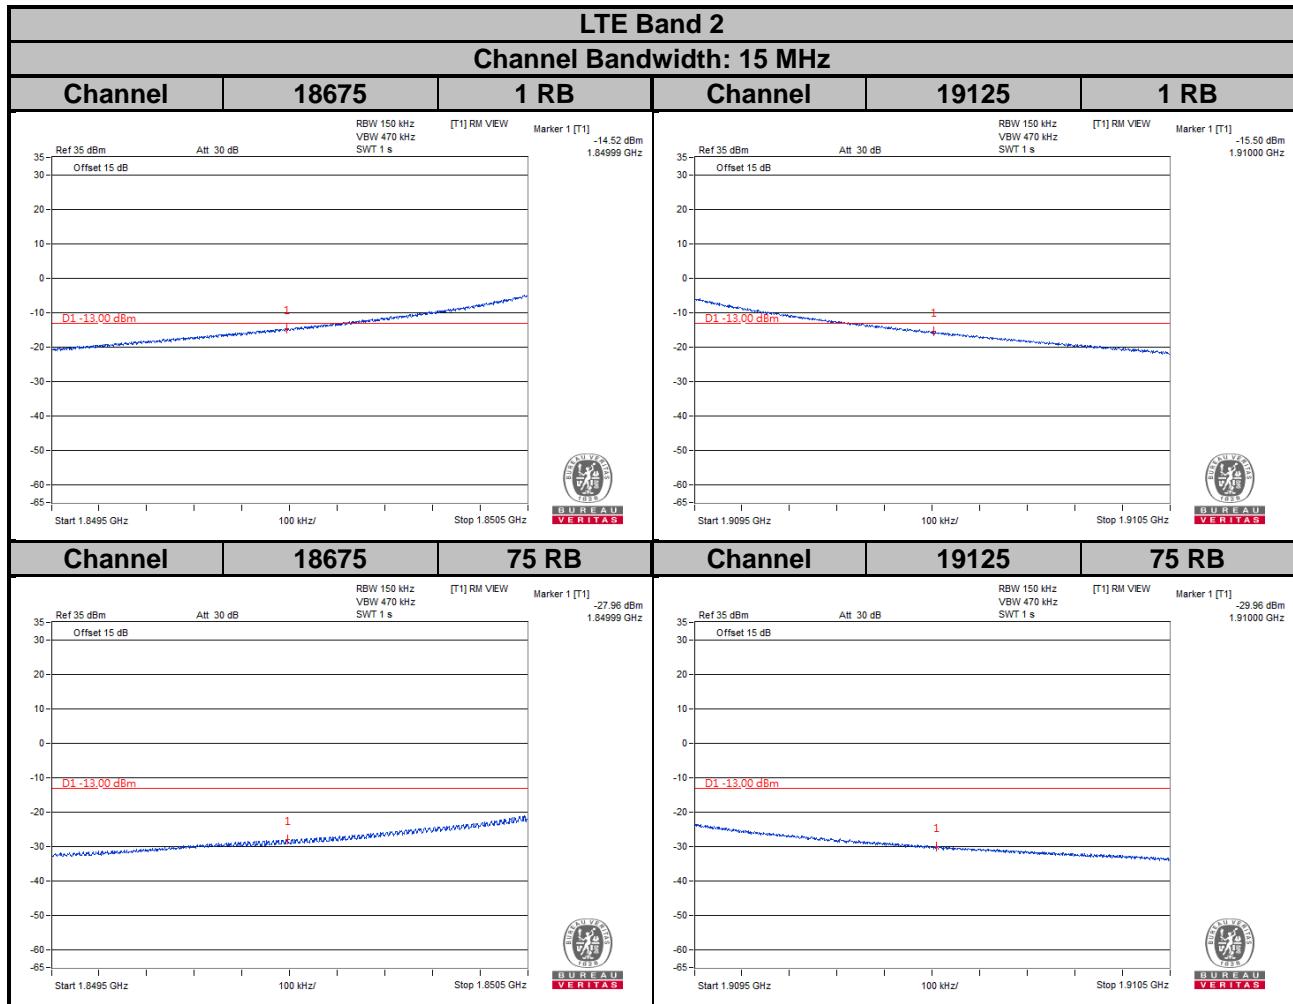

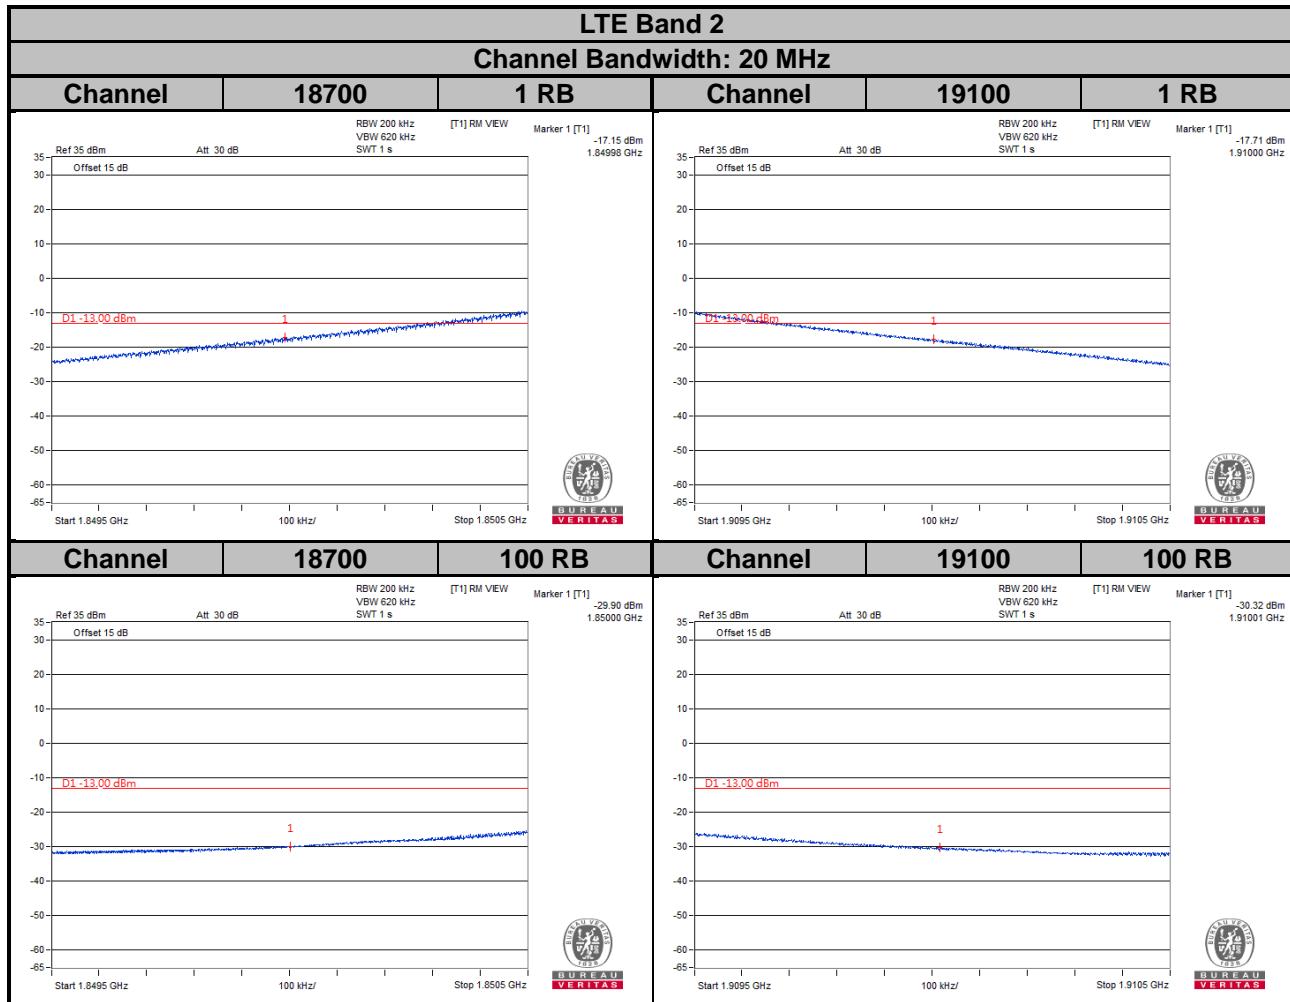


## 4.6 Peak to Average Ratio

### 4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.6.2 Test Setup

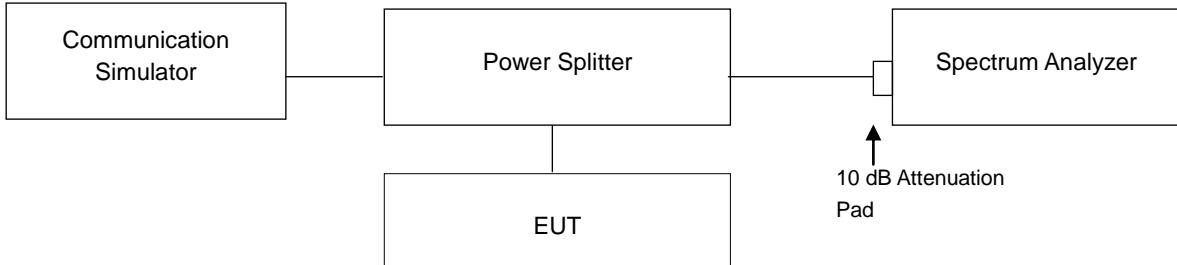


### 4.6.3 Test Procedures


1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

#### 4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
9262	1852.4	3.47
9400	1880.0	3.45
9538	1907.6	3.40

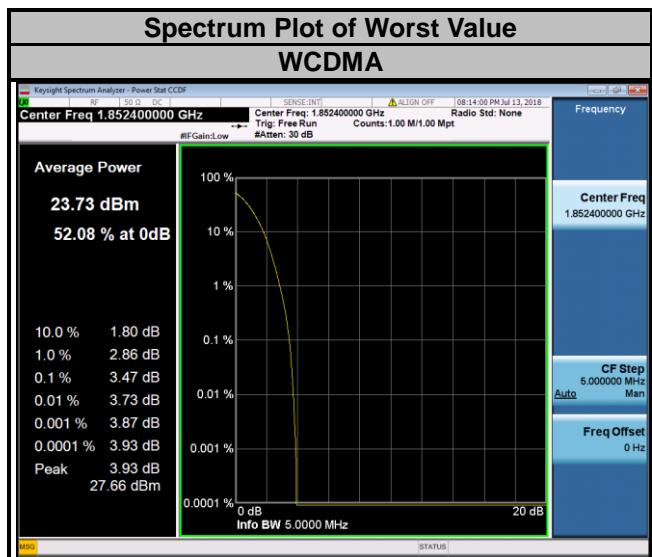


LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	5.72	6.60	18615	1851.5	5.69	6.56
18900	1880.0	5.86	5.86	18900	1880.0	5.95	5.93
19193	1909.3	5.16	5.81	19185	1908.5	5.29	5.96

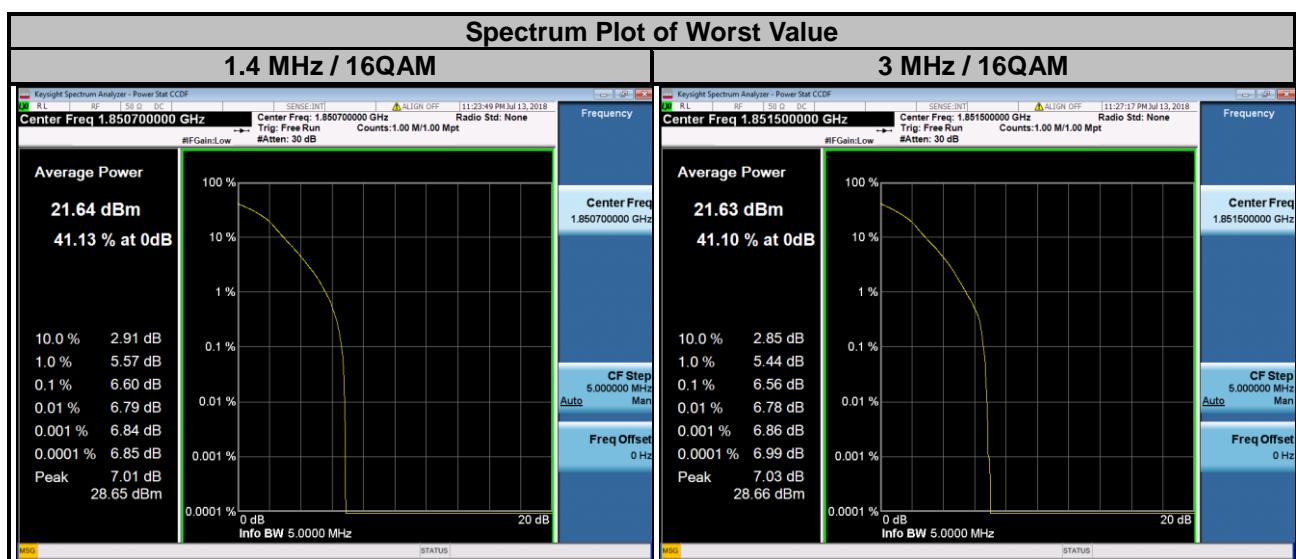

LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	5.71	6.50	18650	1855.0	5.74	6.52
18900	1880.0	5.90	5.87	18900	1880.0	5.96	5.88
19175	1907.5	5.42	6.23	19150	1905.0	5.98	6.63

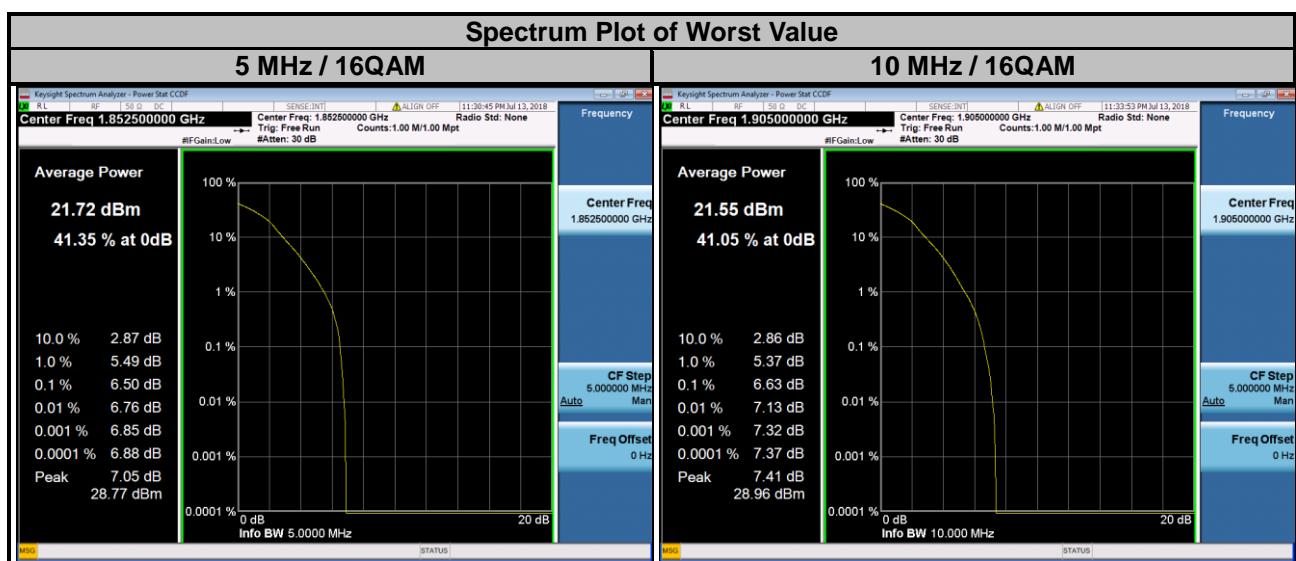

LTE Band 2							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	5.96	6.66	18700	1860.0	5.80	6.46
18900	1880.0	6.08	6.03	18900	1880.0	6.24	6.86
19125	1902.5	6.03	6.77	19100	1900.0	6.31	6.78

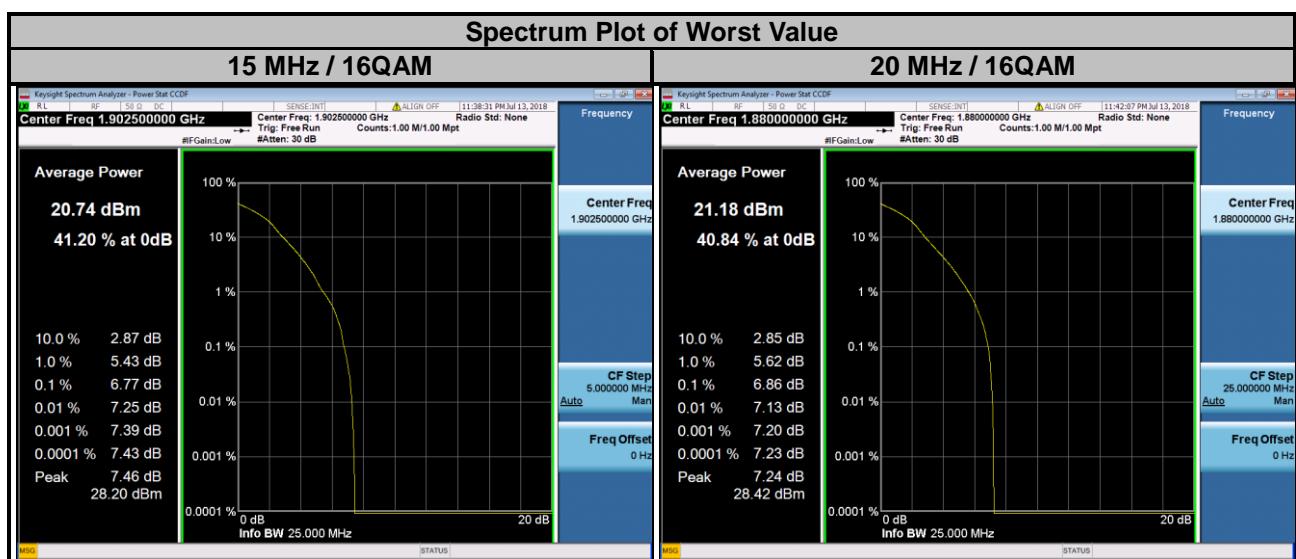


## 4.7 Conducted Spurious Emissions

### 4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13 dBm.


### 4.7.2 Test Setup

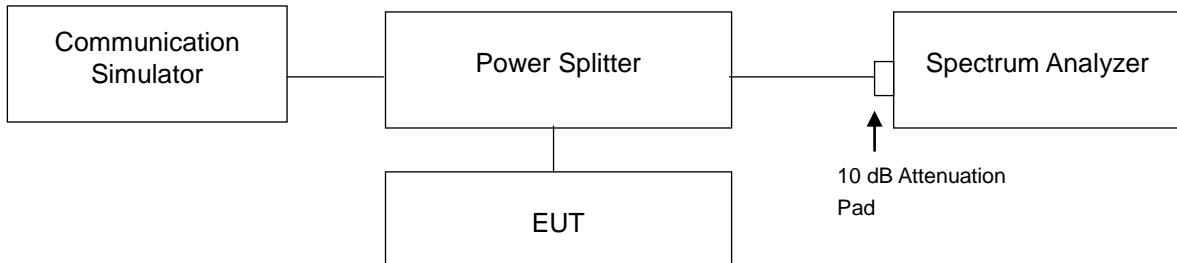

### 4.7.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz for 9 kHz to 1 GHz and RBW = 1 MHz and VBW = 3 MHz for 1 GHz to 27 GHz is used for conducted emission measurement.

#### 4.7.4 Test Results

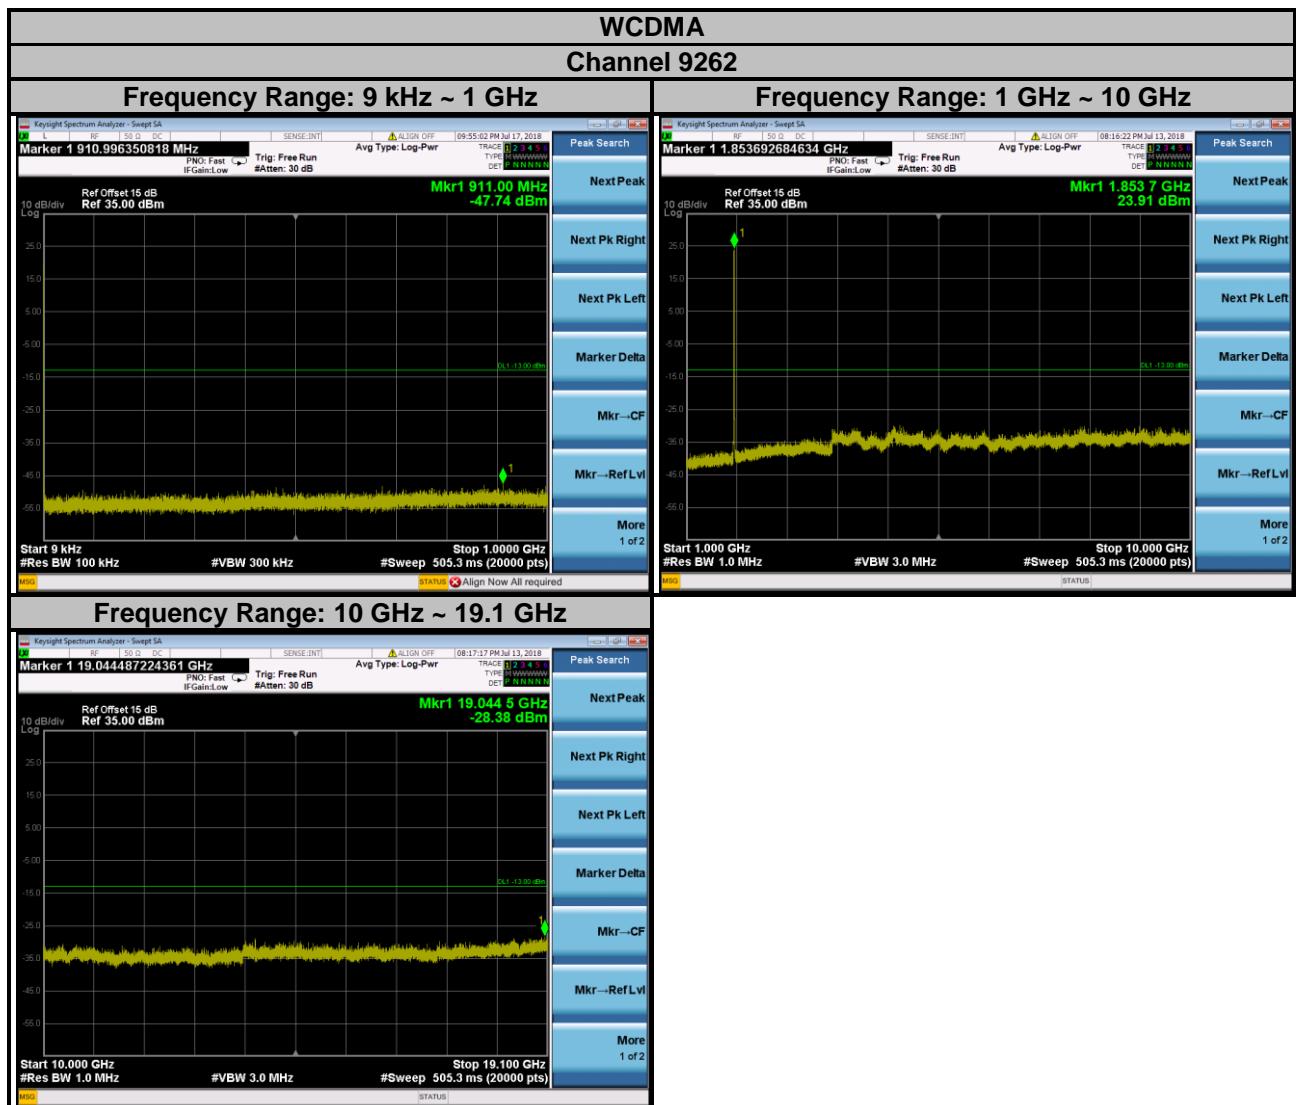


## WCDMA Channel 9400


### Frequency Range: 9 kHz ~ 1 GHz


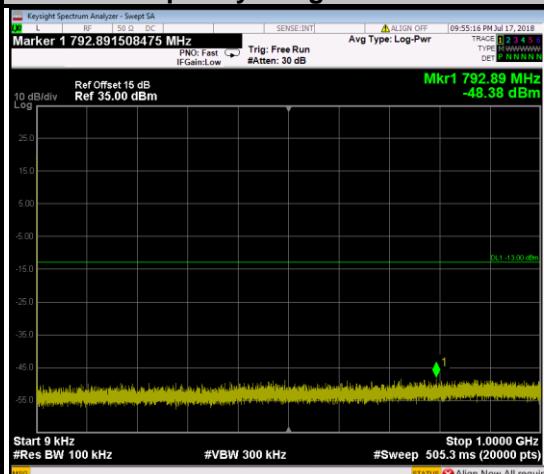


### Frequency Range: 1 GHz ~ 10 GHz

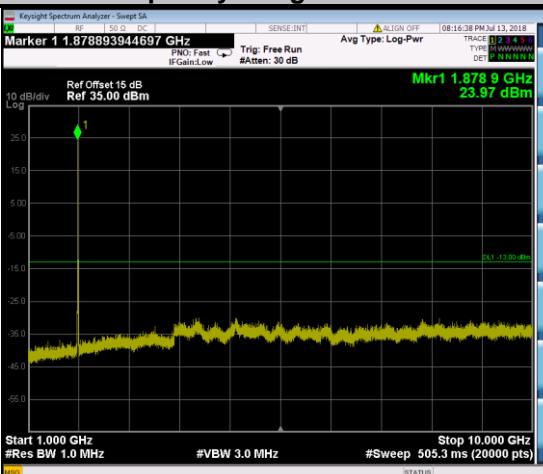

### Frequency Range: 10 GHz ~ 19.1 GHz

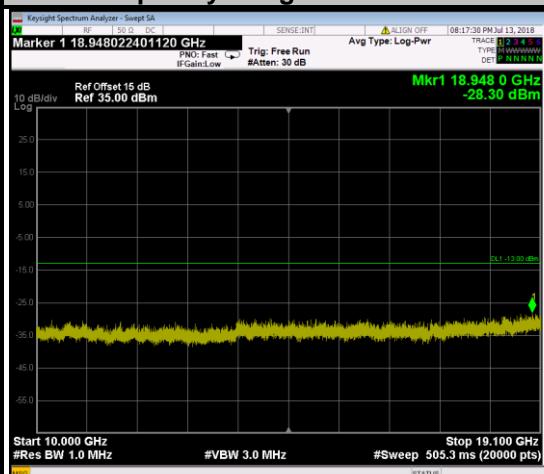

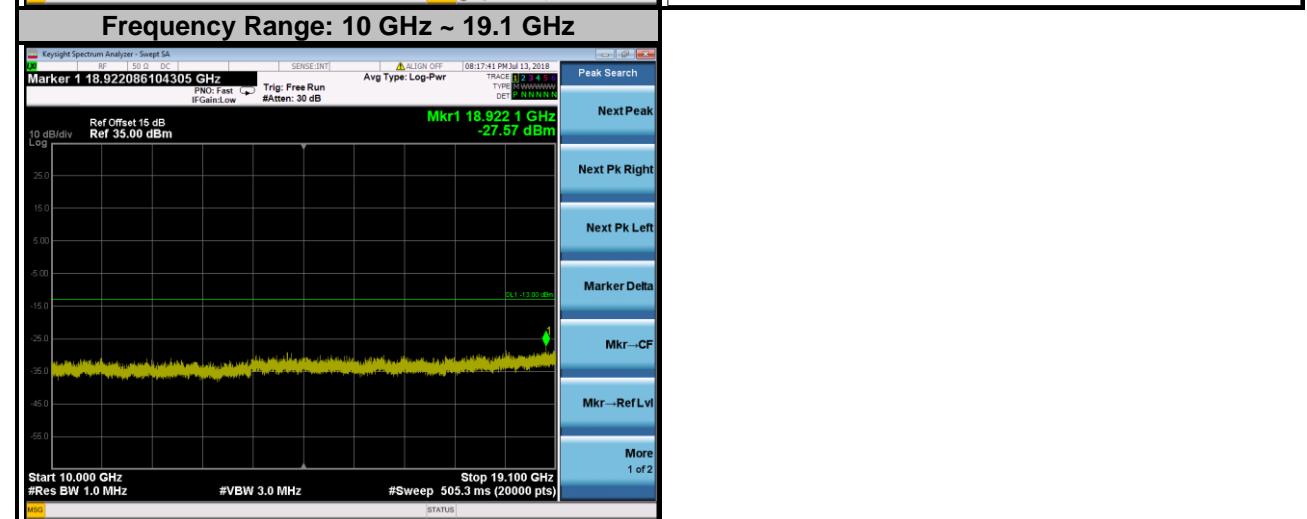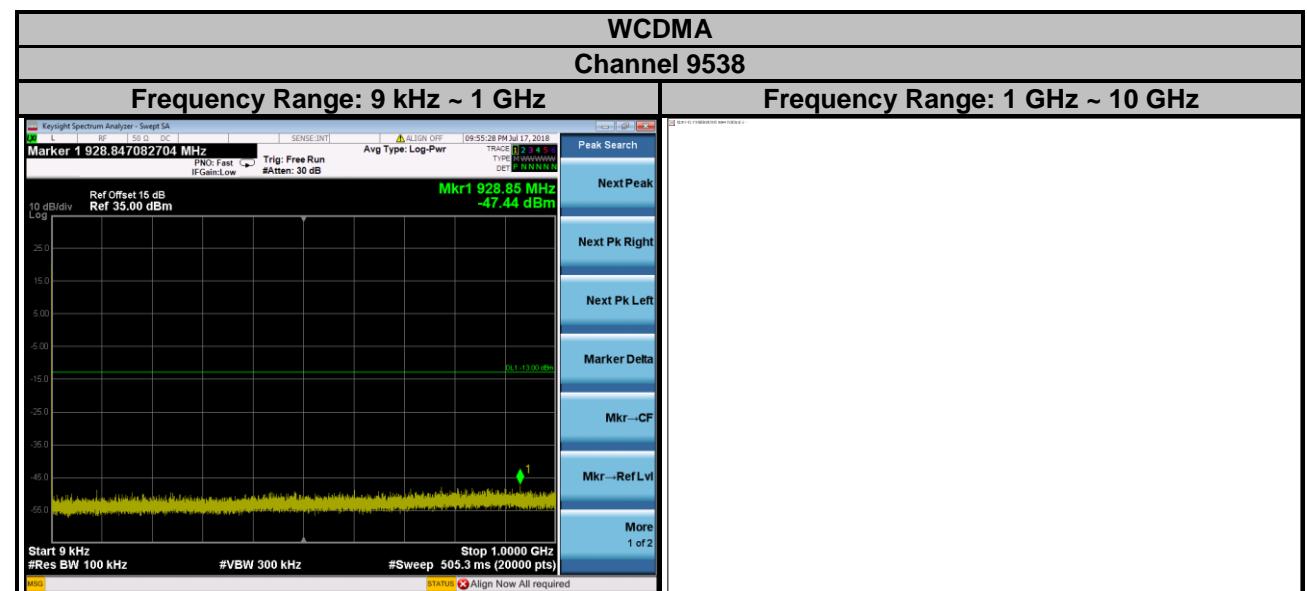


## LTE Band 2


Channel Bandwidth: 1.4 MHz

Channel 18607


Frequency Range: 9 kHz ~ 1 GHz

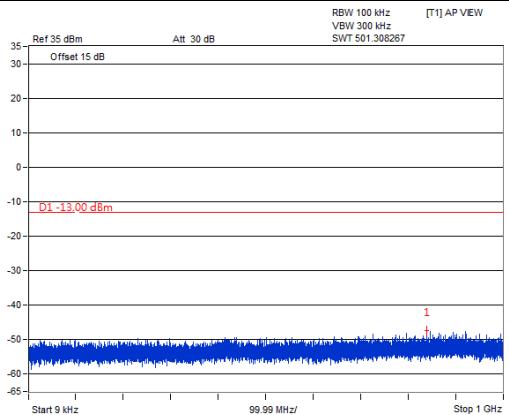

Frequency Range: 1 GHz ~ 10 GHz

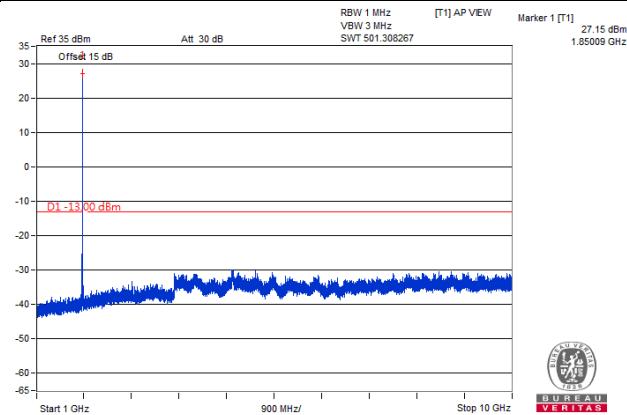

Frequency Range: 10 GHz ~ 27 GHz

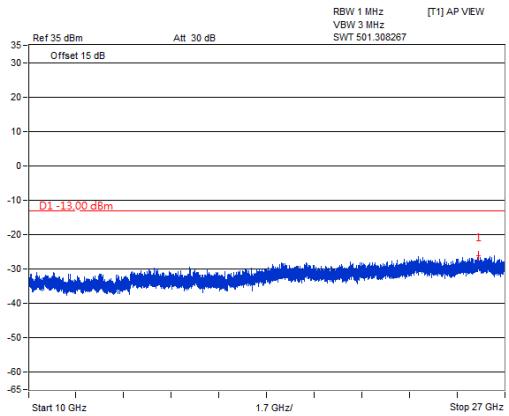


## LTE Band 2


Channel Bandwidth: 1.4 MHz

Channel 18900


Frequency Range: 9 kHz ~ 1 GHz

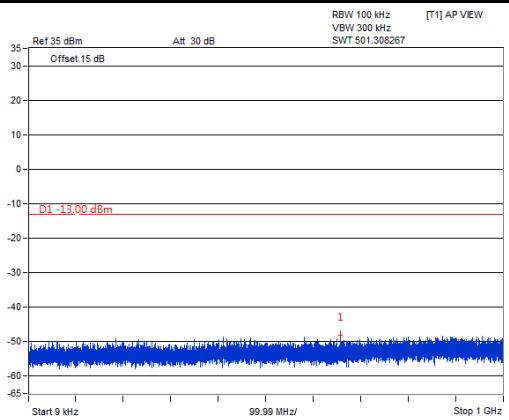

Frequency Range: 1 GHz ~ 10 GHz

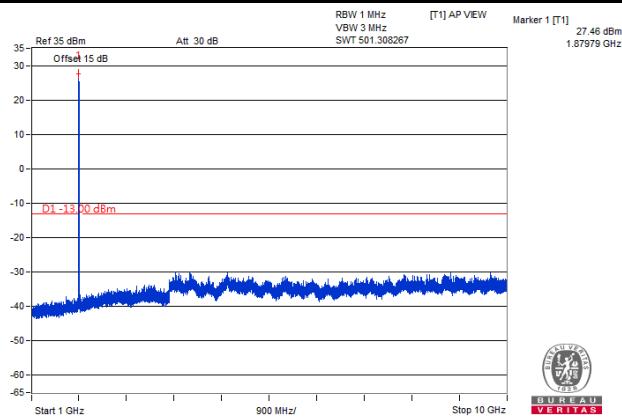

Frequency Range: 10 GHz ~ 27 GHz

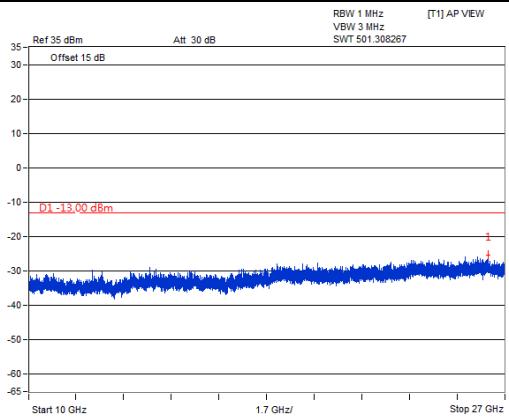


## LTE Band 2


Channel Bandwidth: 1.4 MHz

Channel 19193


Frequency Range: 9 kHz ~ 1 GHz

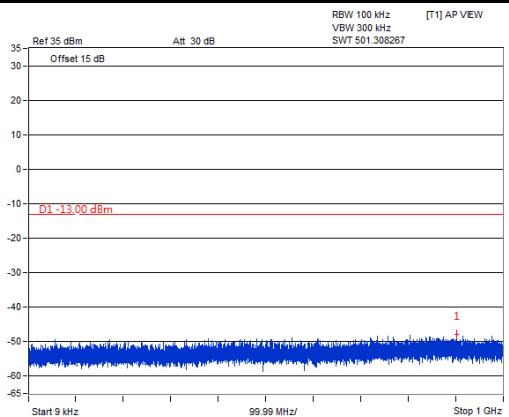


Frequency Range: 1 GHz ~ 10 GHz

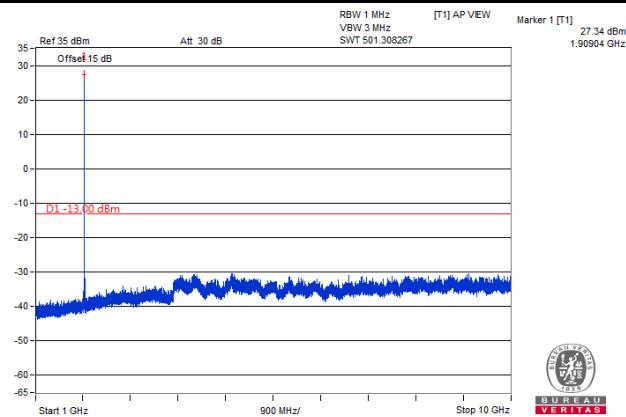


Frequency Range: 10 GHz ~ 27 GHz

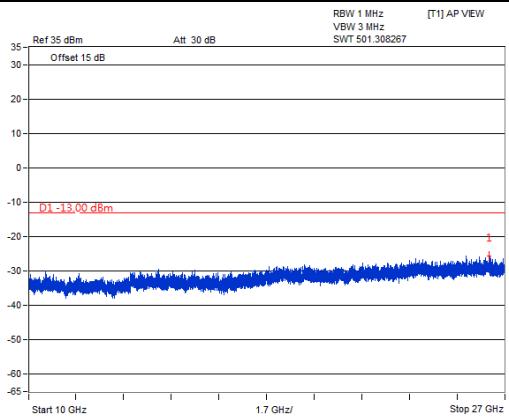

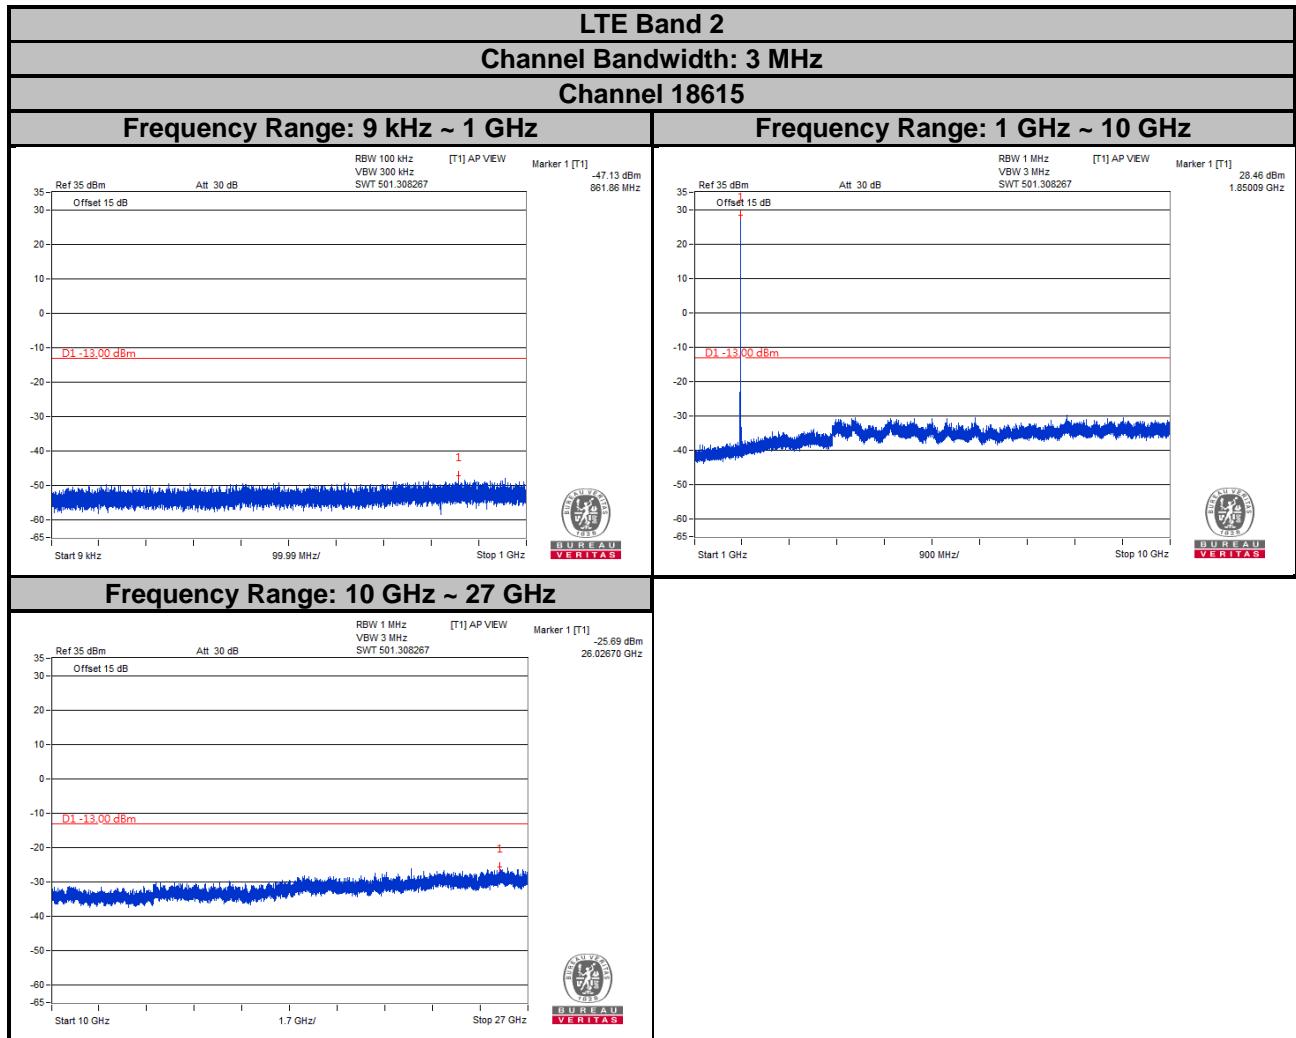


**LTE Band 2**  
**Channel Bandwidth: 3 MHz**  
**Channel 18900**


**Frequency Range: 9 kHz ~ 1 GHz**

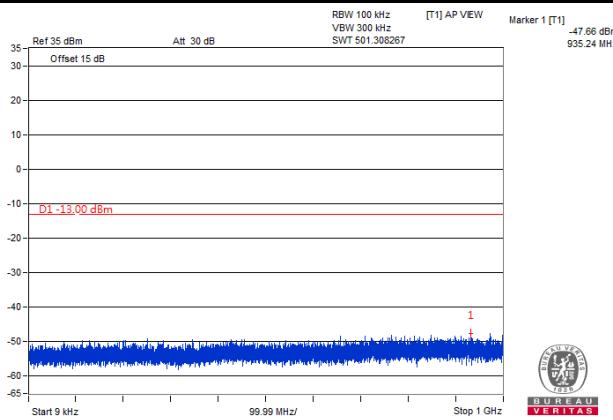


**Frequency Range: 1 GHz ~ 10 GHz**

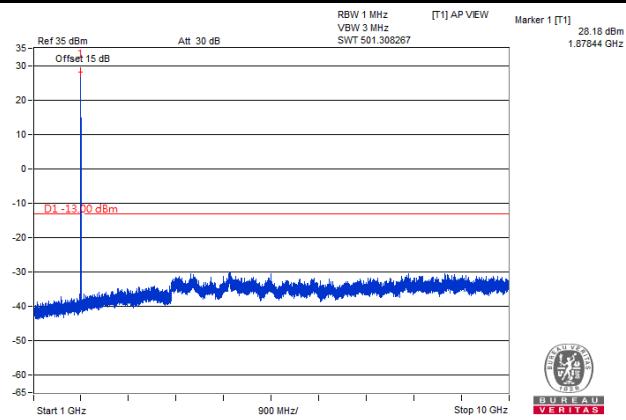


**Frequency Range: 10 GHz ~ 27 GHz**

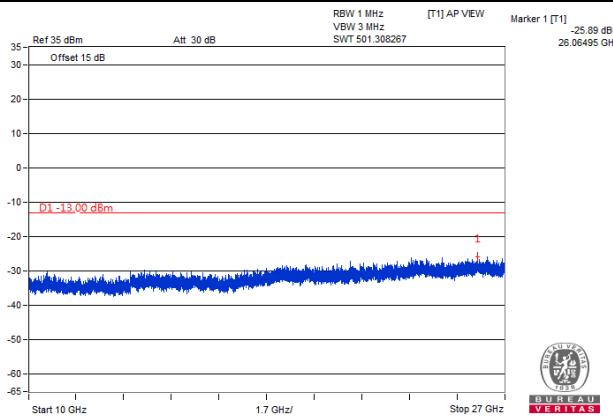

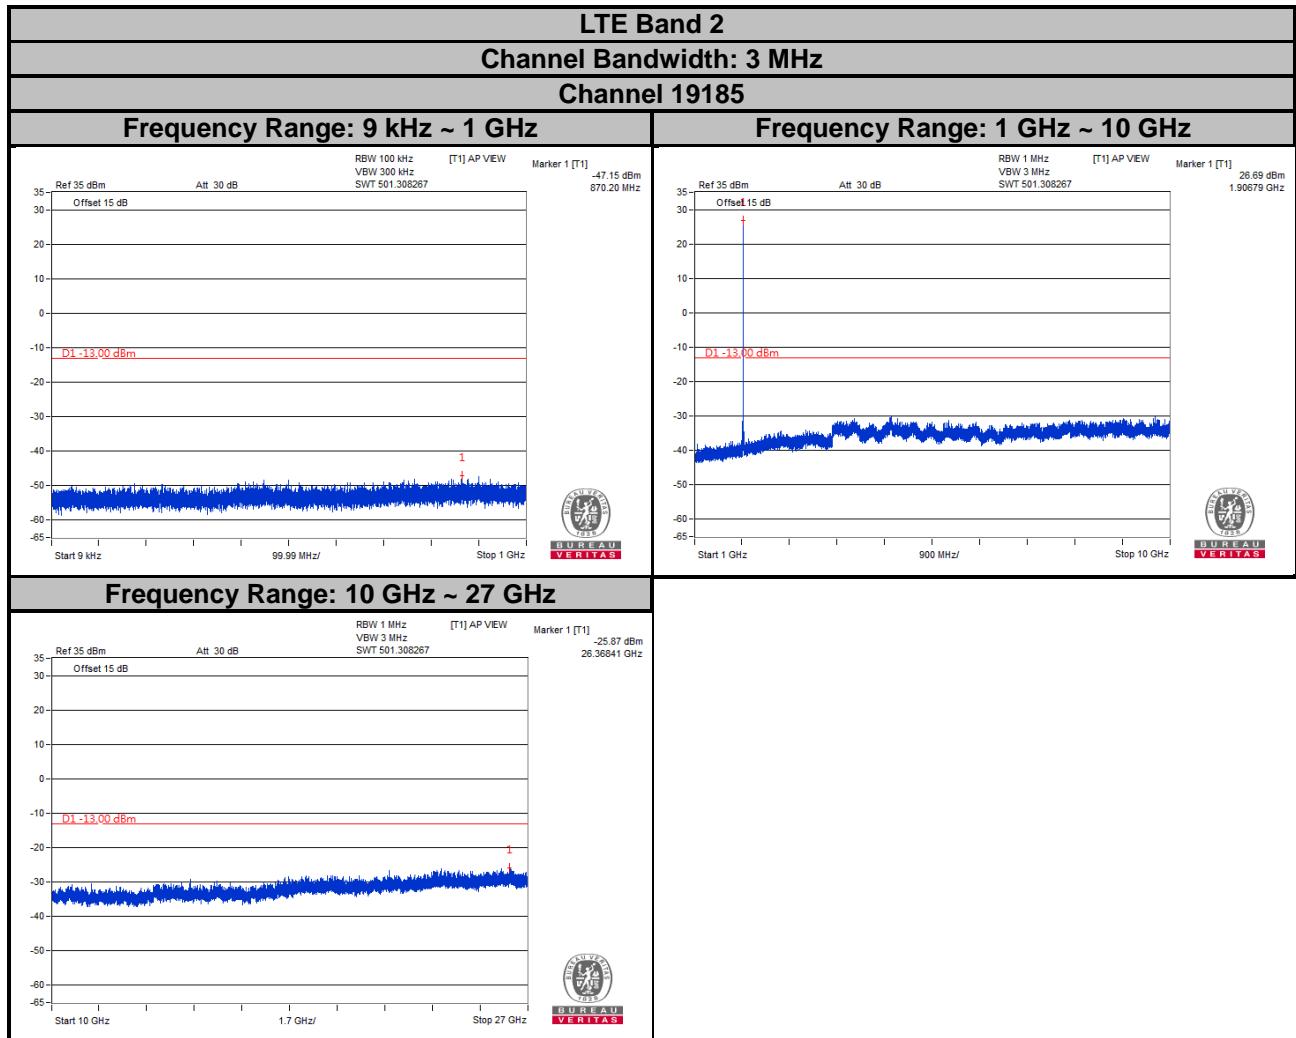


**LTE Band 2**  
**Channel Bandwidth: 5 MHz**  
**Channel 18625**


**Frequency Range: 9 kHz ~ 1 GHz**

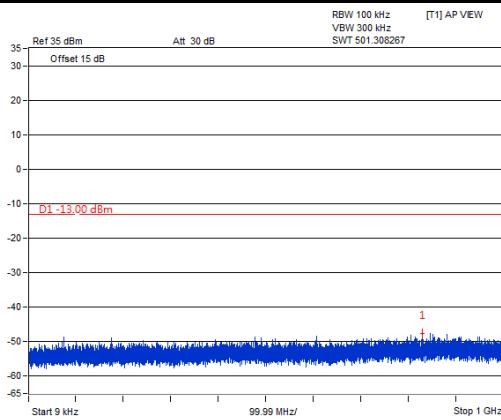



**Frequency Range: 1 GHz ~ 10 GHz**

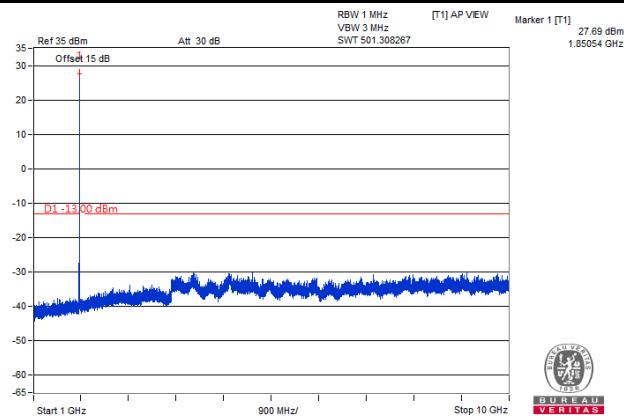



**Frequency Range: 10 GHz ~ 27 GHz**

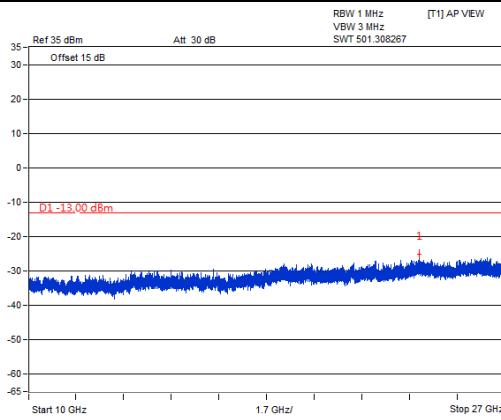


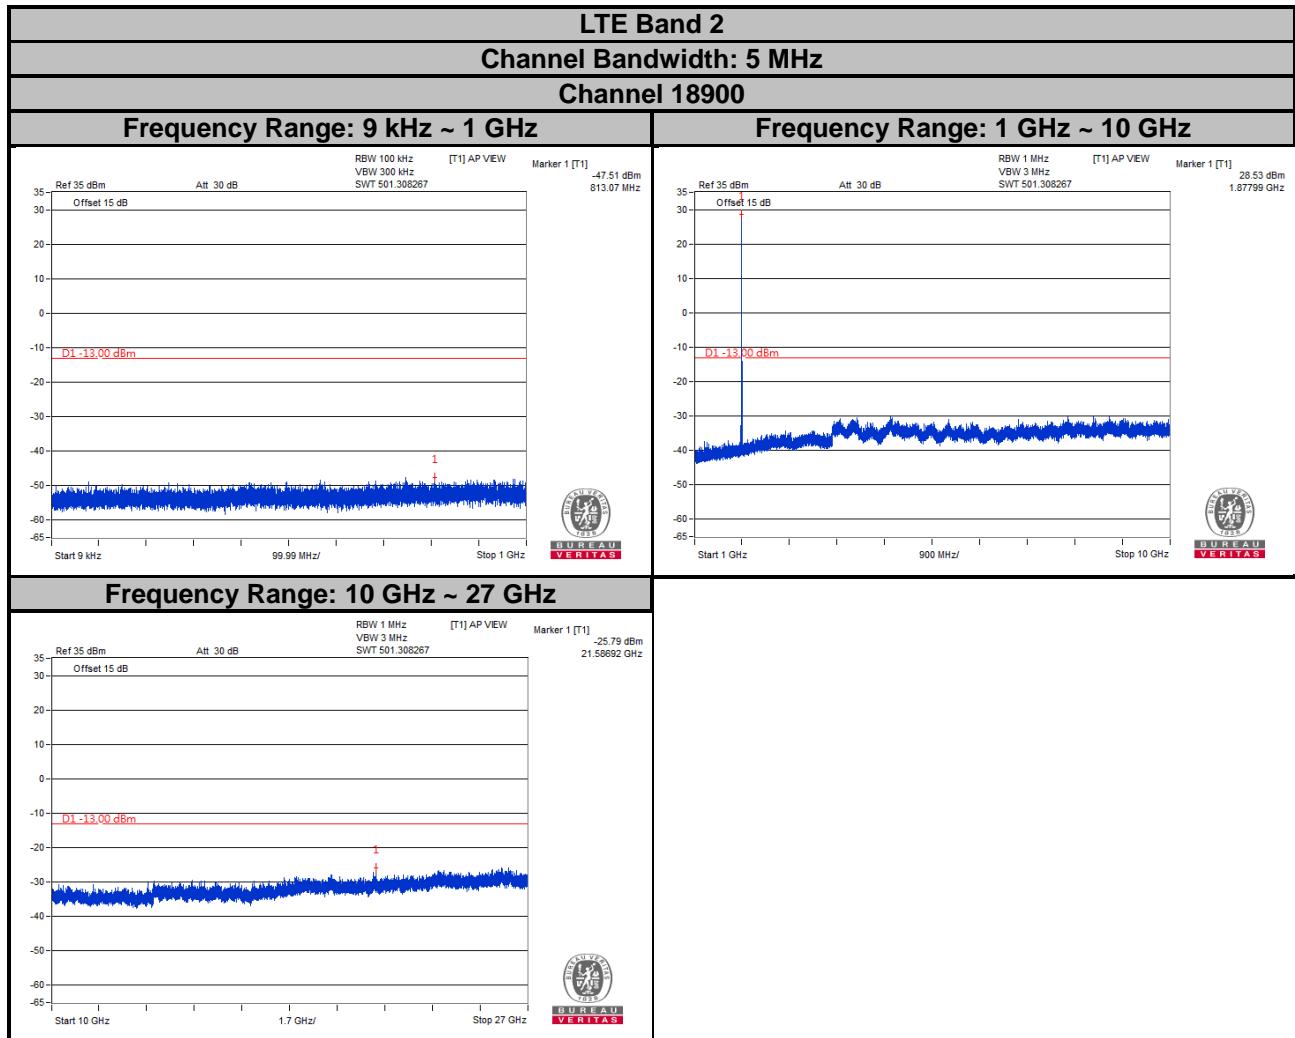


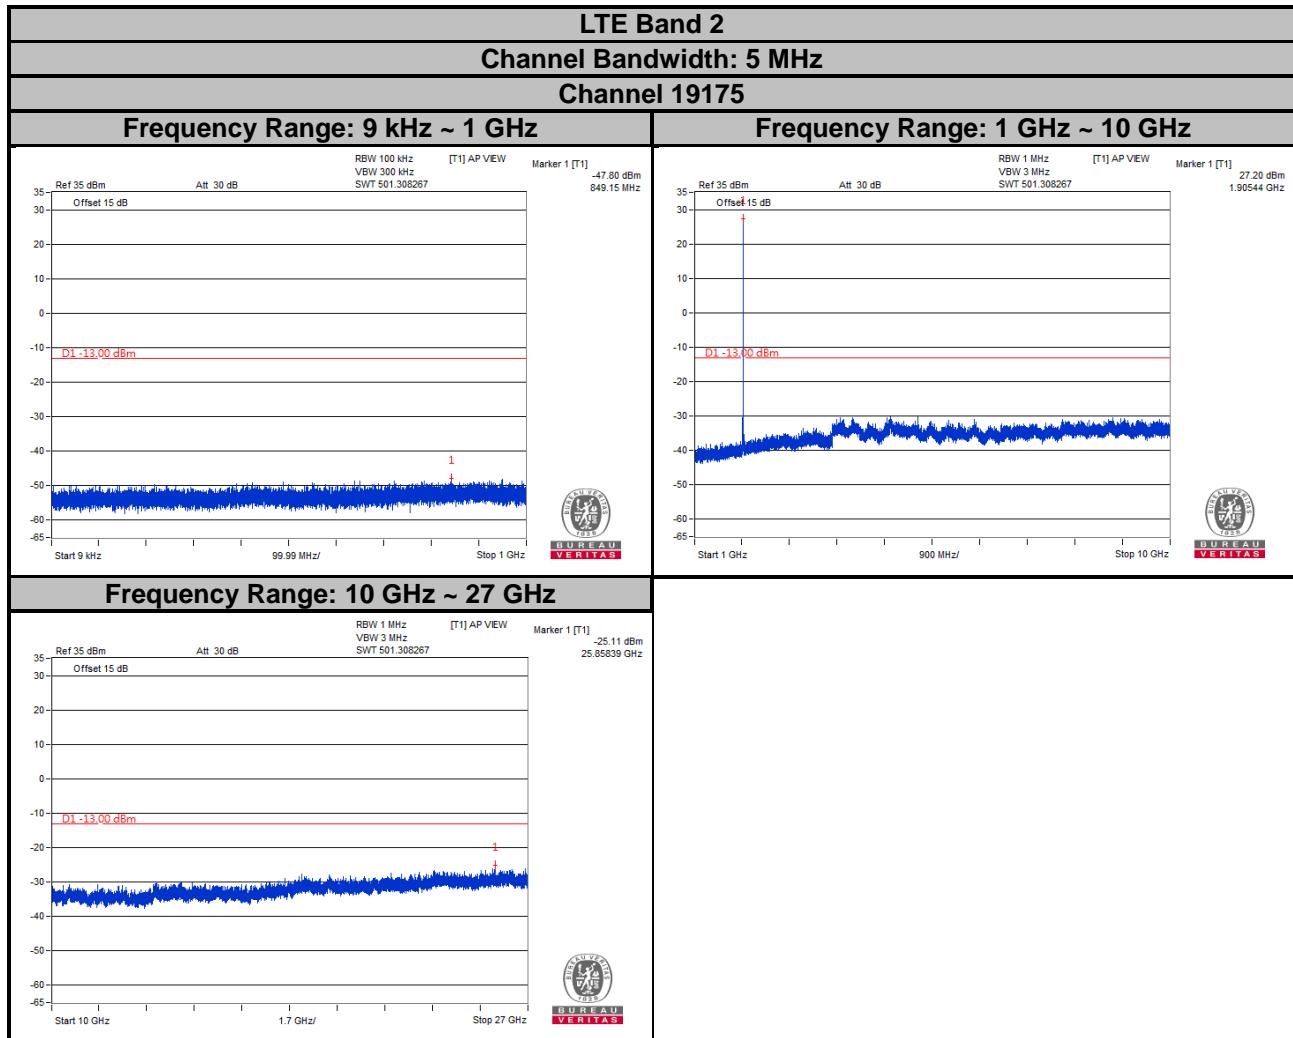

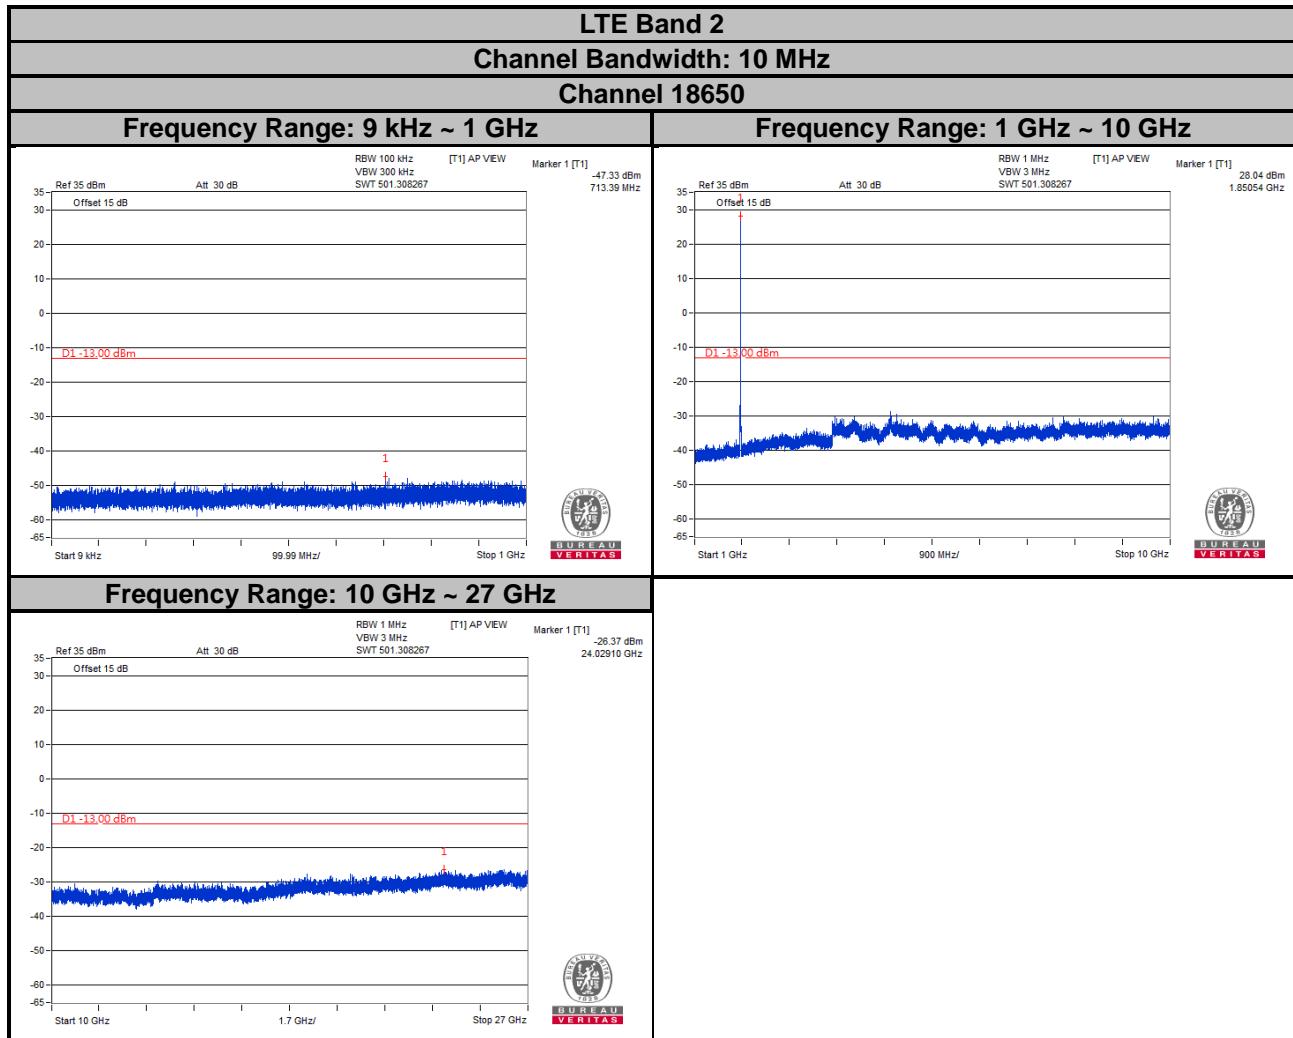

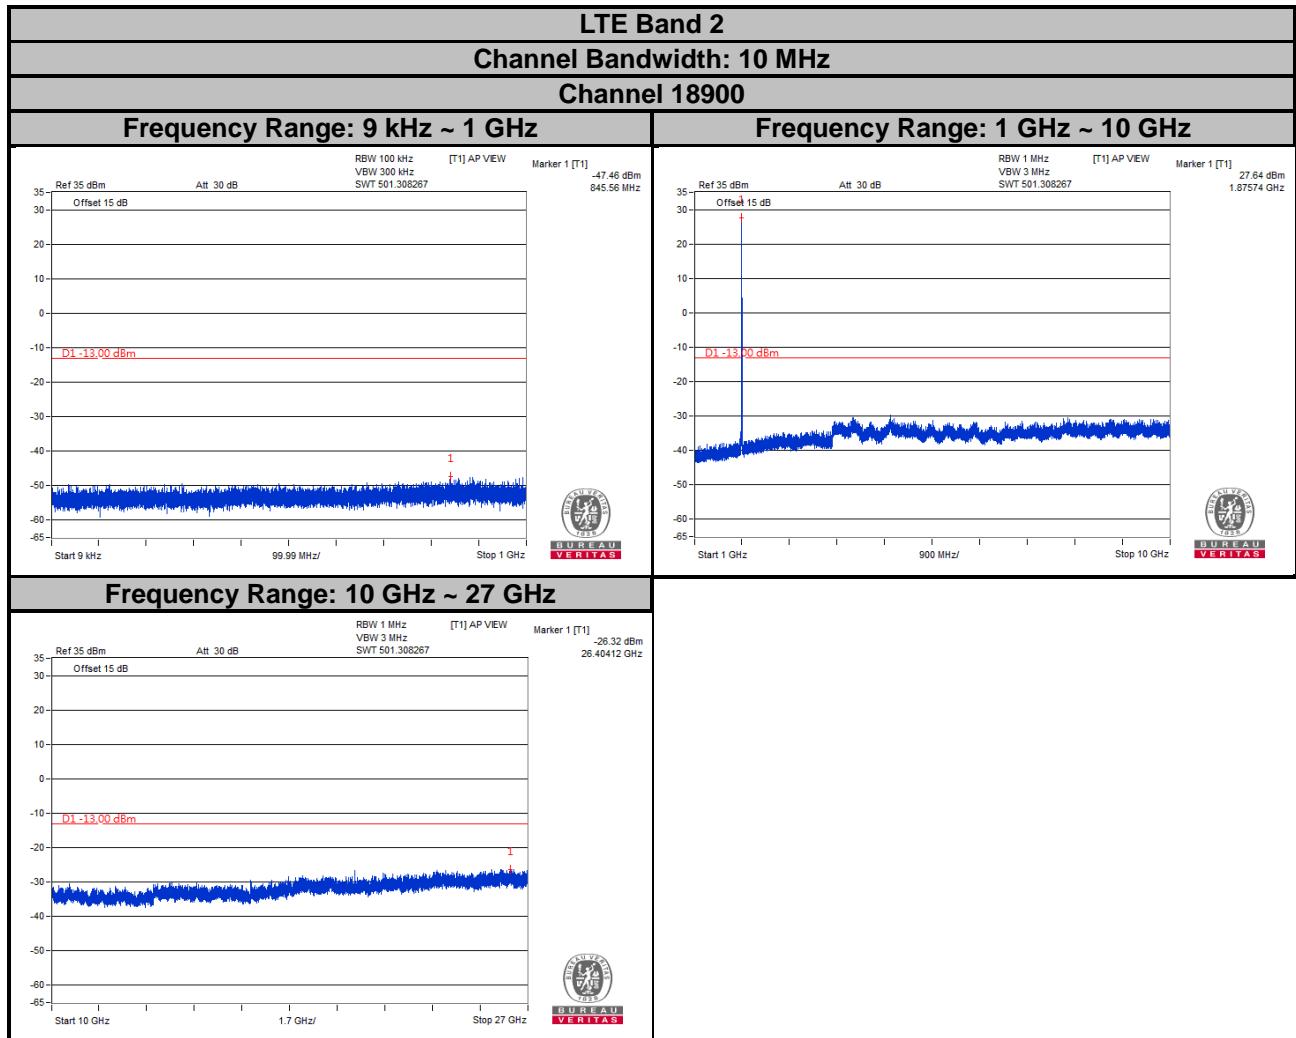


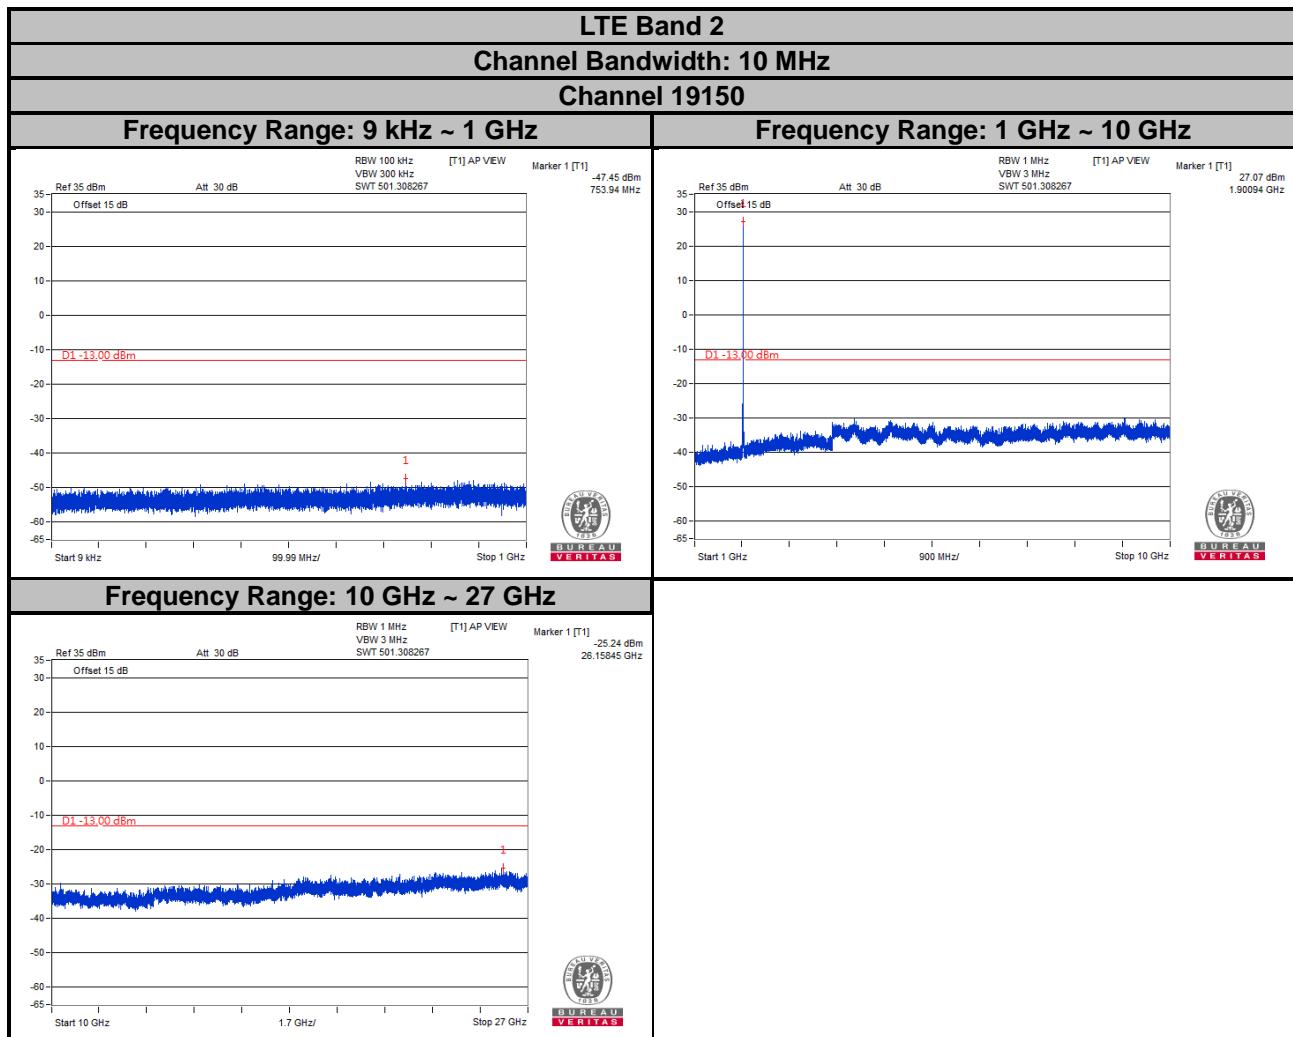

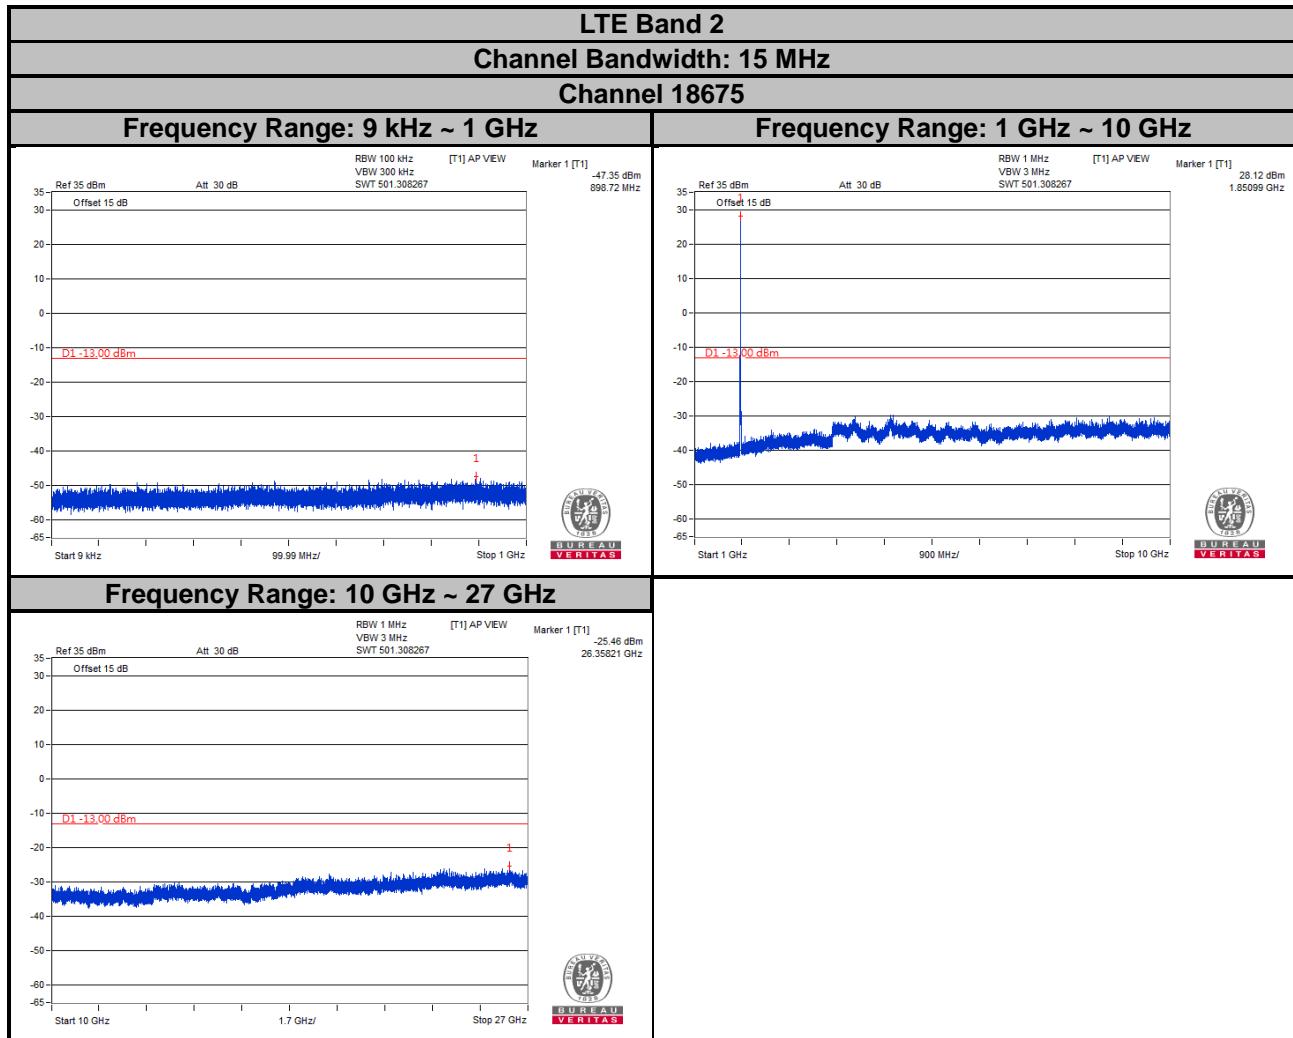


**LTE Band 2**  
**Channel Bandwidth: 15 MHz**  
**Channel 18900**


**Frequency Range: 9 kHz ~ 1 GHz**

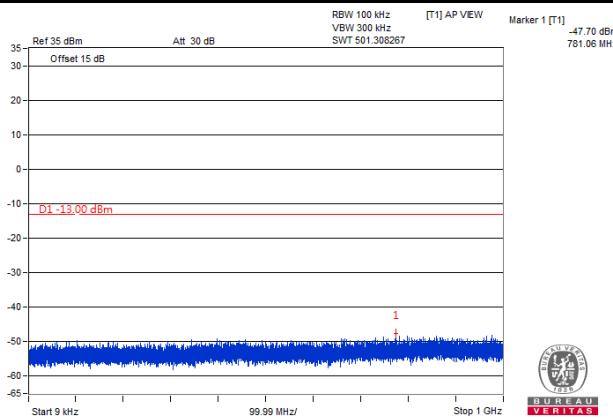



**Frequency Range: 1 GHz ~ 10 GHz**

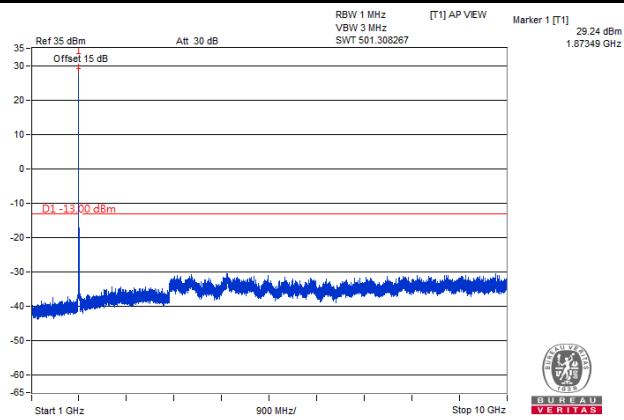

**Frequency Range: 10 GHz ~ 27 GHz**

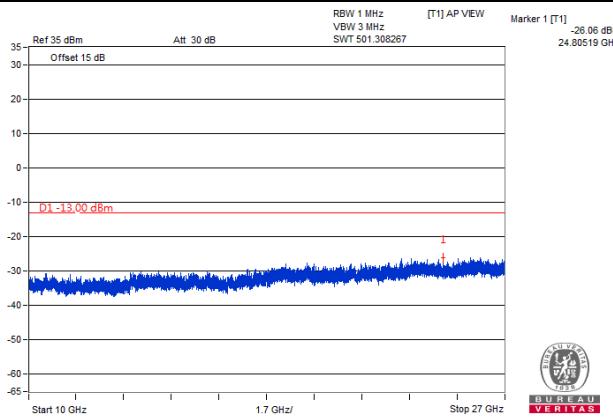


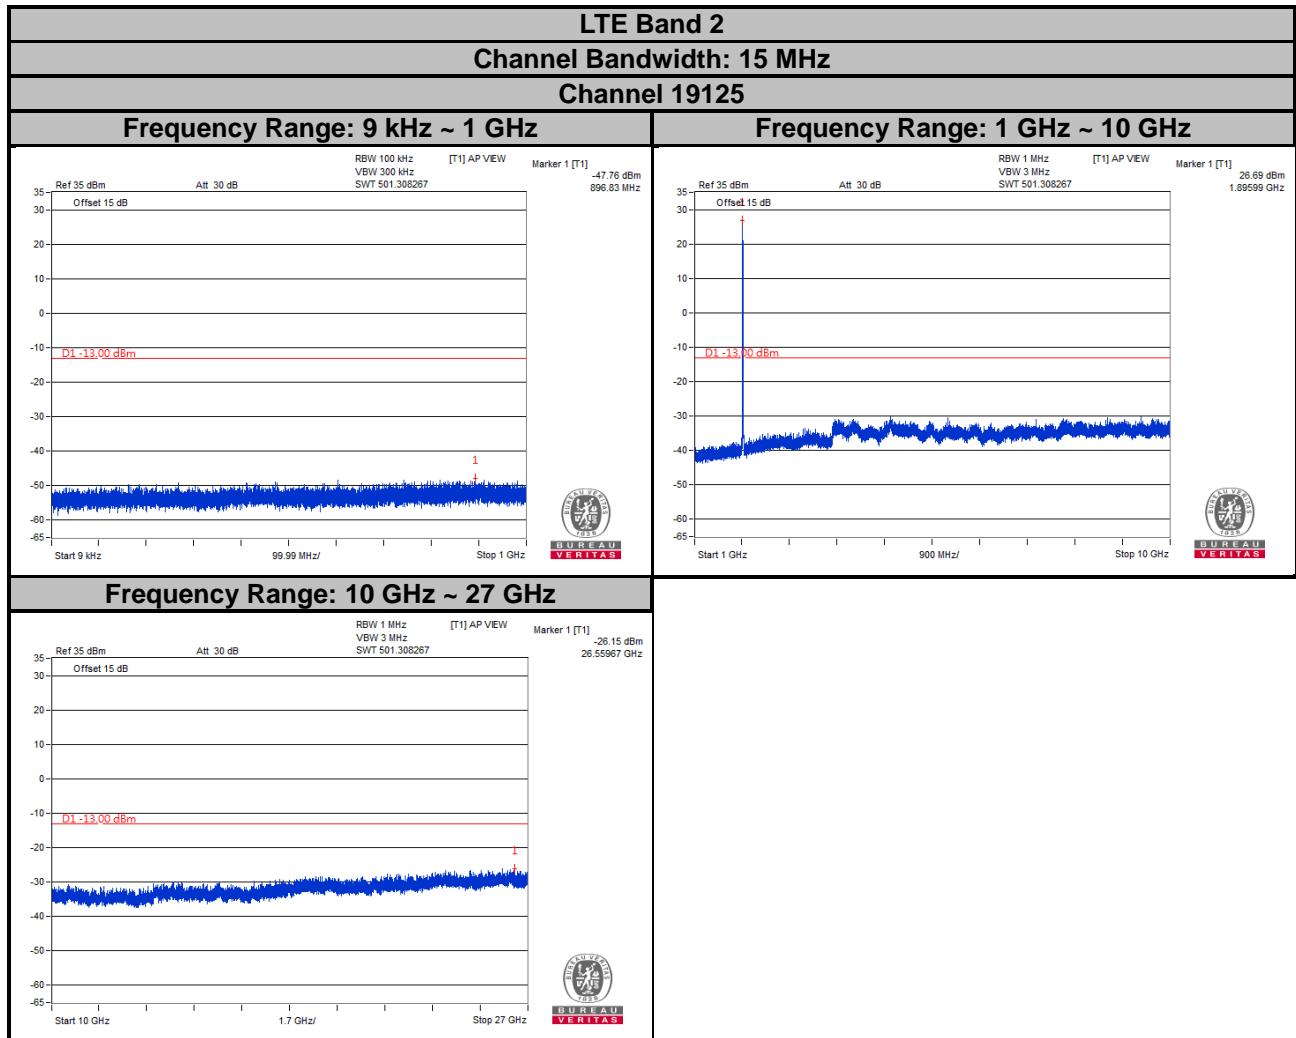

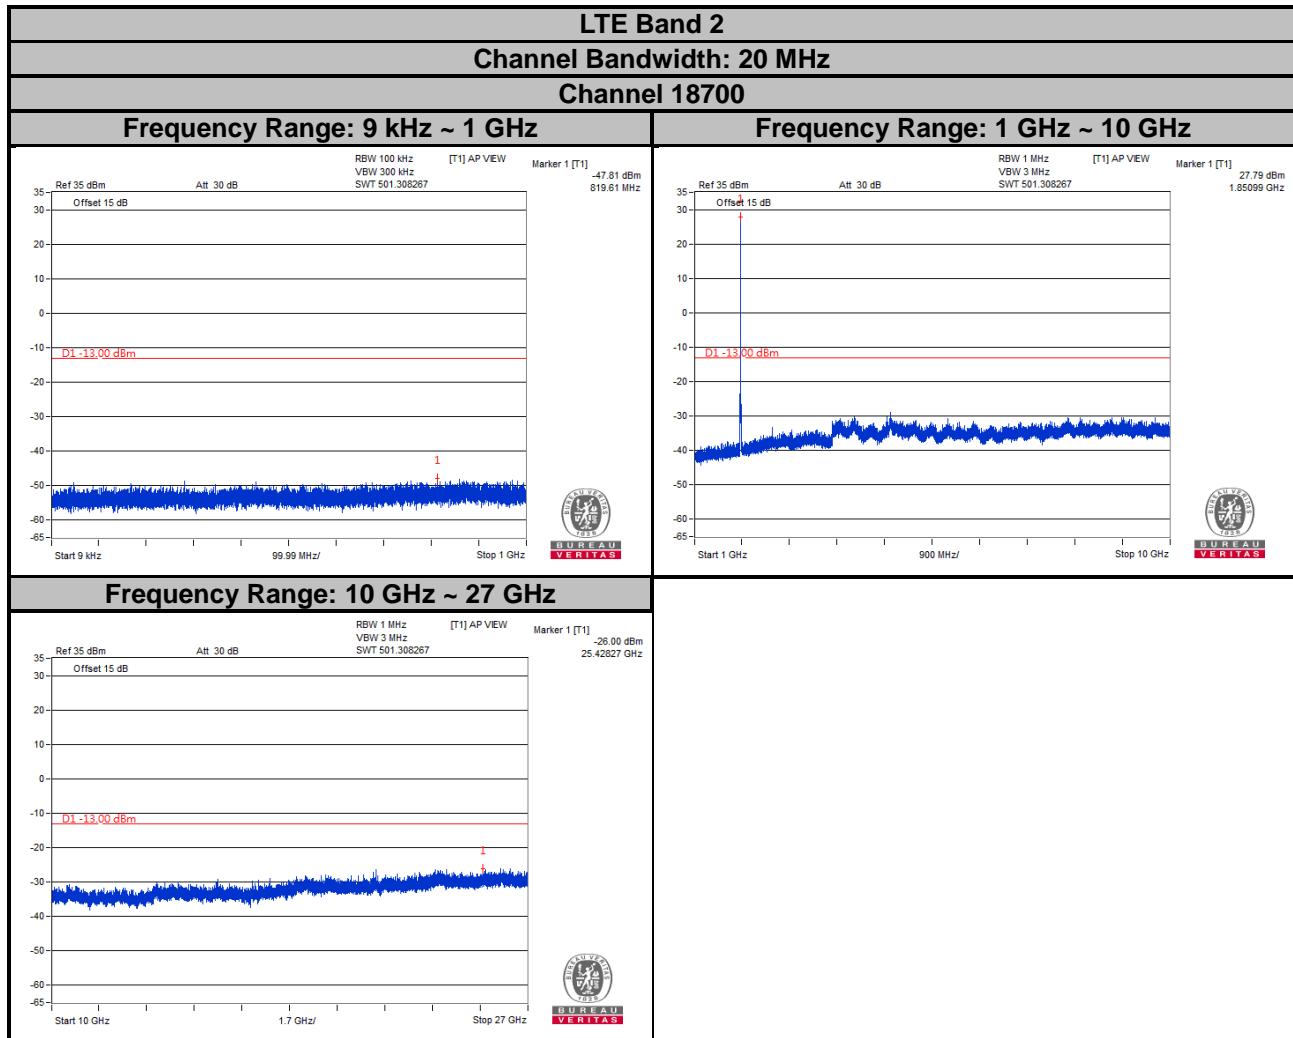


**LTE Band 2**  
**Channel Bandwidth: 20 MHz**  
**Channel 18900**


**Frequency Range: 9 kHz ~ 1 GHz**

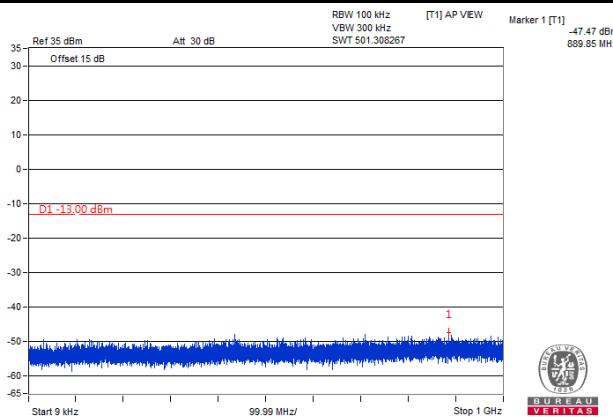

**Frequency Range: 1 GHz ~ 10 GHz**

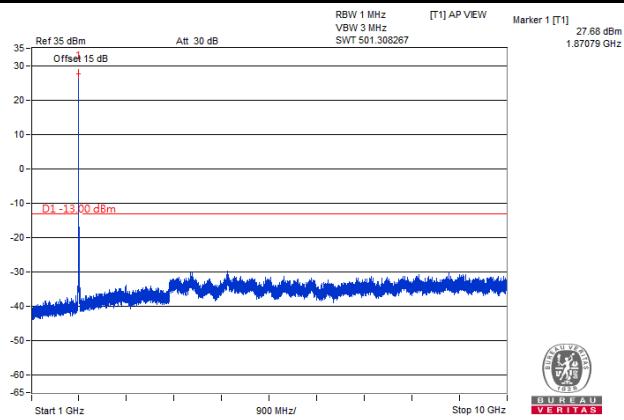


**Frequency Range: 10 GHz ~ 27 GHz**

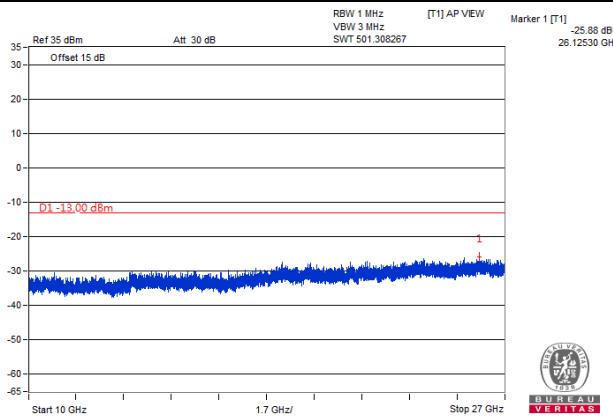


**LTE Band 2**  
**Channel Bandwidth: 20 MHz**  
**Channel 19100**


**Frequency Range: 9 kHz ~ 1 GHz**

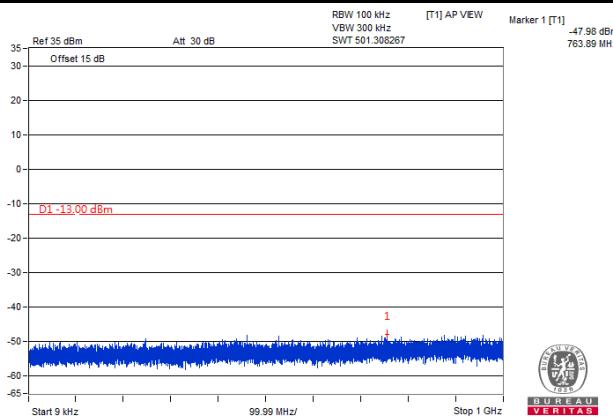

**Frequency Range: 1 GHz ~ 10 GHz**

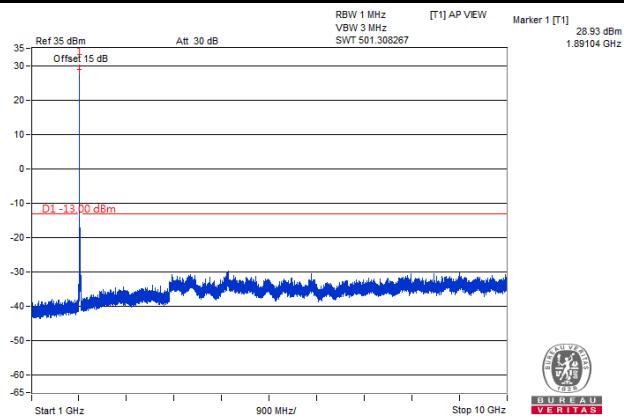

**Frequency Range: 10 GHz ~ 27 GHz**

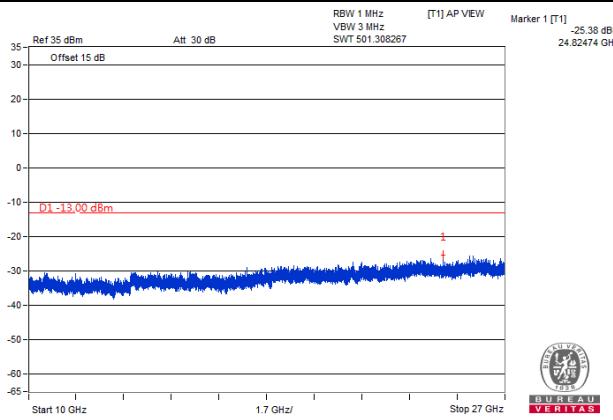

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to -13 dBm.

### 4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

### 4.8.3 Deviation from Test Standard


No deviation.

#### 4.8.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

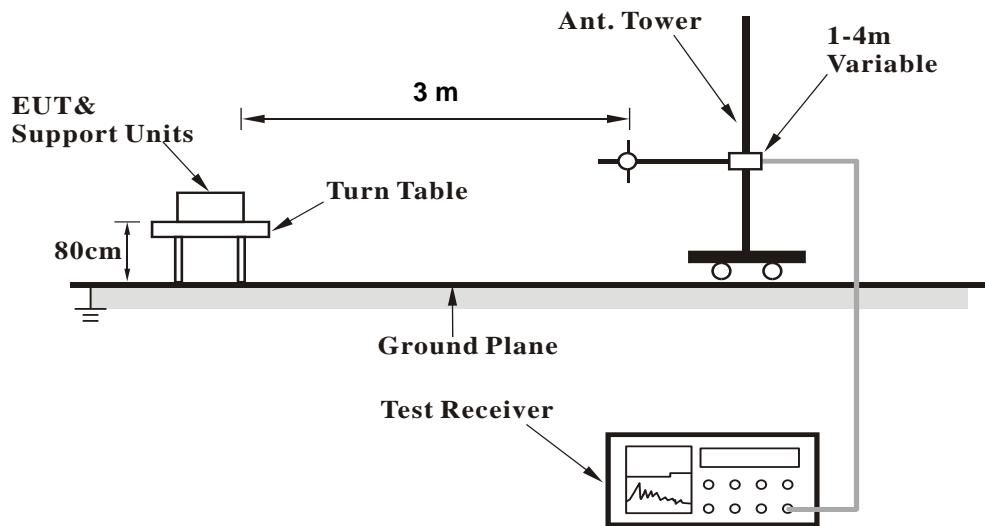

##### <Radiated Emission above 1 GHz>

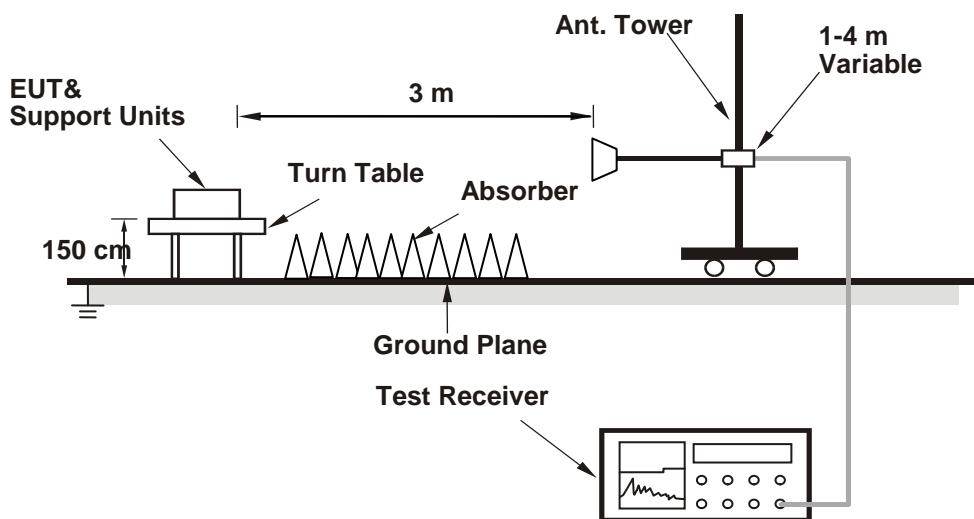

For the actual test configuration, please refer to the attached file (Test Setup Photo).


## 4.8.5 Test Results

**WCDMA:****Low Channel**

Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

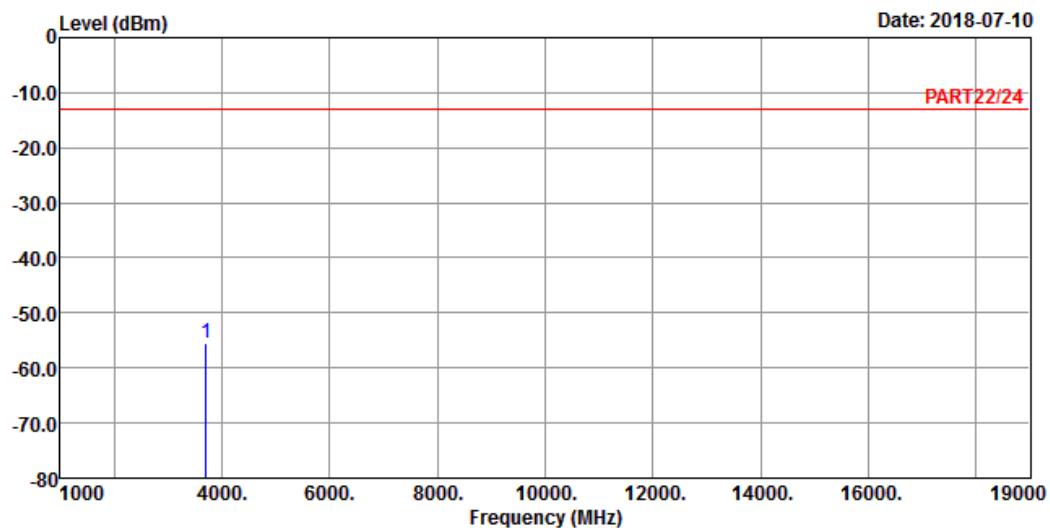

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : WCDMA Band II\_L-CH Link

Tested by: Jisyong Wang


Freq	Level	Read	Limit	Over	Factor	Remark
		MHz	dBm	dBm	dB	dB
1 pp	3704.80	-55.50	-48.57	-13.00	-42.50	-6.93 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

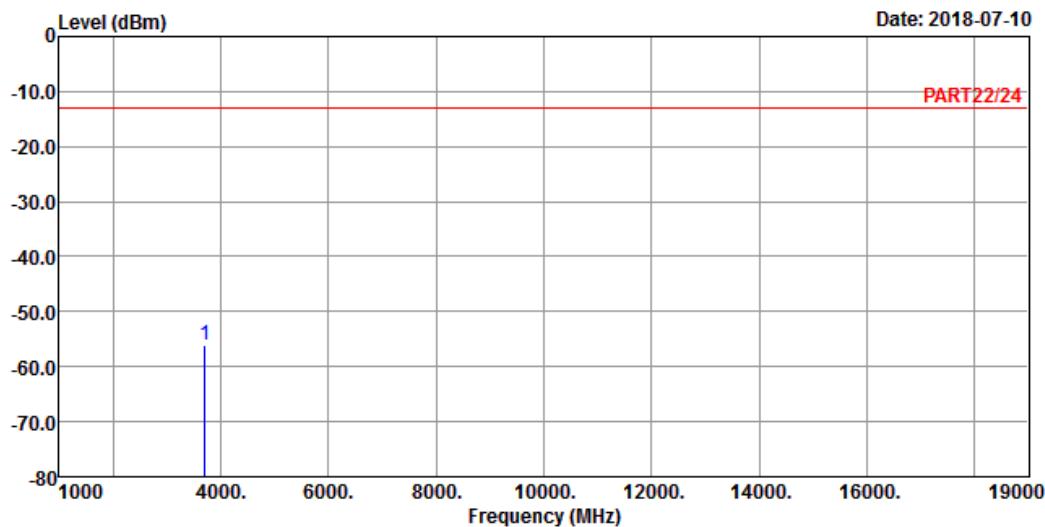

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band II\_L-CH Link

Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		MHz	dBm	dBm	dBm	dB
1 pp	3704.80	-56.16	-49.23	-13.00	-43.16	-6.93 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

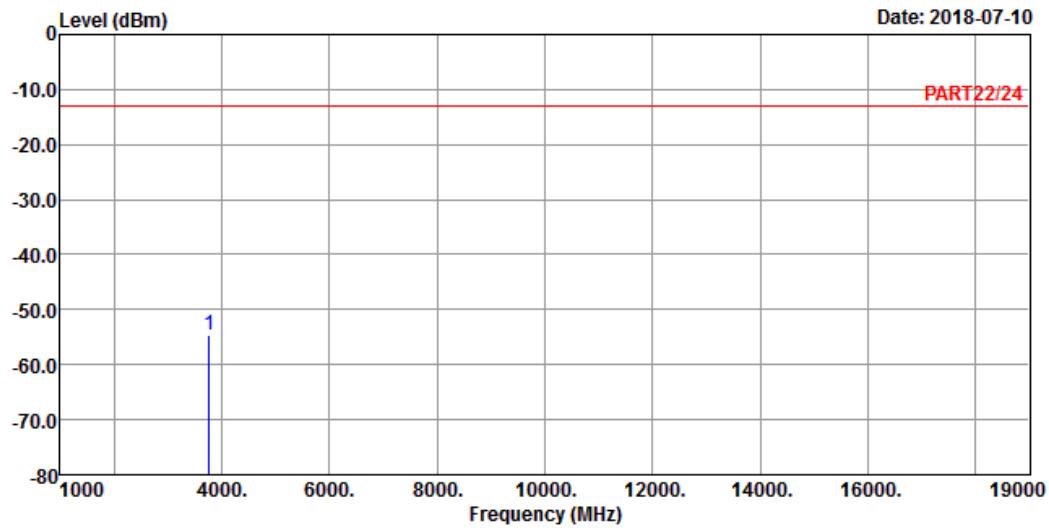

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : WCDMA Band II\_M-CH Link

Tested by: Jisyong Wang


Freq	Read	Limit	Over		
	Level	Level	Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp	3760.00	-54.75	-48.10	-13.00	-41.75 -6.65 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

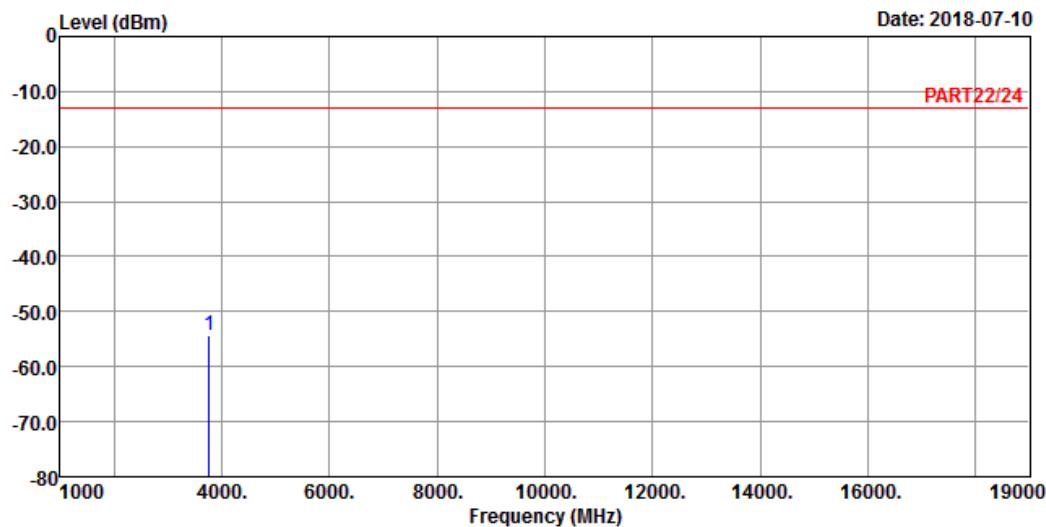

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band II\_M-CH Link

Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Remark
		MHz	dBm	dBm	
1 pp	3760.00	-54.28	-47.63	-13.00	-41.28 -6.65 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

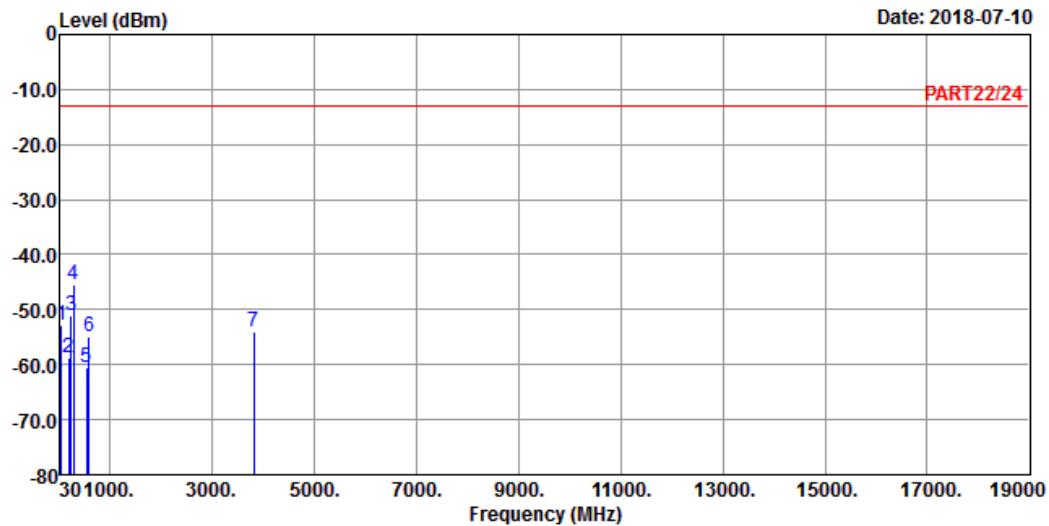

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : WCDMA Band II\_H-CH Link


Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Over			Remark
			Line	Limit	Factor	
MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-52.75	-50.76	-13.00	-39.75	-1.99 Peak
2	196.84	-58.84	-51.10	-13.00	-45.84	-7.74 Peak
3	233.70	-51.19	-44.53	-13.00	-38.19	-6.66 Peak
4 pp	286.08	-45.46	-38.73	-13.00	-32.46	-6.73 Peak
5	546.04	-60.58	-57.59	-13.00	-47.58	-2.99 Peak
6	598.42	-54.94	-54.11	-13.00	-41.94	-0.83 Peak
7	3815.20	-54.06	-47.66	-13.00	-41.06	-6.40 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

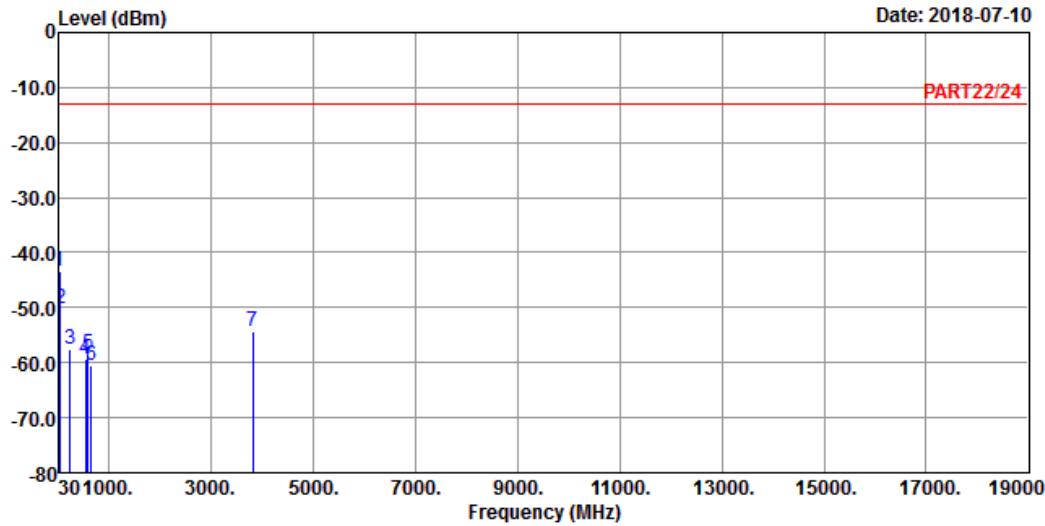**Data: 6**


Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : WCDMA Band II\_H-CH Link

Tested by: Jisyong Wang

Freq	Read Level	Limit Level	Read	Limit	Over	Remark
			Line	Line	Factor	
MHz	dBm	dBm	dBm	dB	dB	
1 pp	40.67	-43.29	-43.41	-13.00	-30.29	0.12 Peak
2	46.49	-50.30	-47.30	-13.00	-37.30	-3.00 Peak
3	234.67	-57.65	-51.03	-13.00	-44.65	-6.62 Peak
4	546.04	-59.34	-56.35	-13.00	-46.34	-2.99 Peak
5	598.42	-58.52	-57.69	-13.00	-45.52	-0.83 Peak
6	650.80	-60.52	-59.65	-13.00	-47.52	-0.87 Peak
7	3815.20	-54.22	-47.82	-13.00	-41.22	-6.40 Peak

## LTE Band 2

Channel Bandwidth: 20 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 1

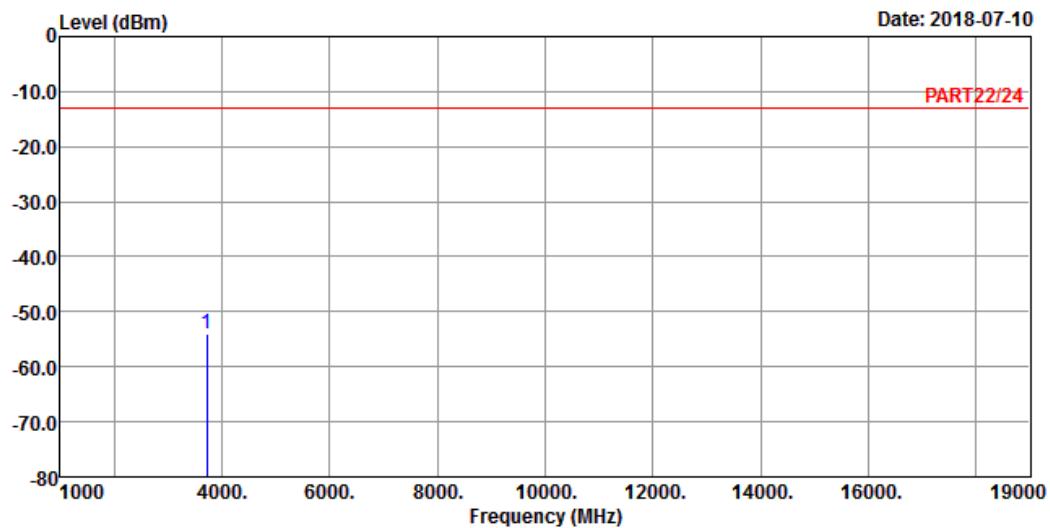

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 2 QPSK\_20M Link\_L-CH

Tested by: Thomas Wei

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
------	------------	-------------	-----------	--------------	--------

MHz	dBm	dBm	dBm	dB	dB
-----	-----	-----	-----	----	----


1 pp	3720.00	-54.03	-47.21	-13.00	-41.03	-6.82 Peak
------	---------	--------	--------	--------	--------	------------



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 2

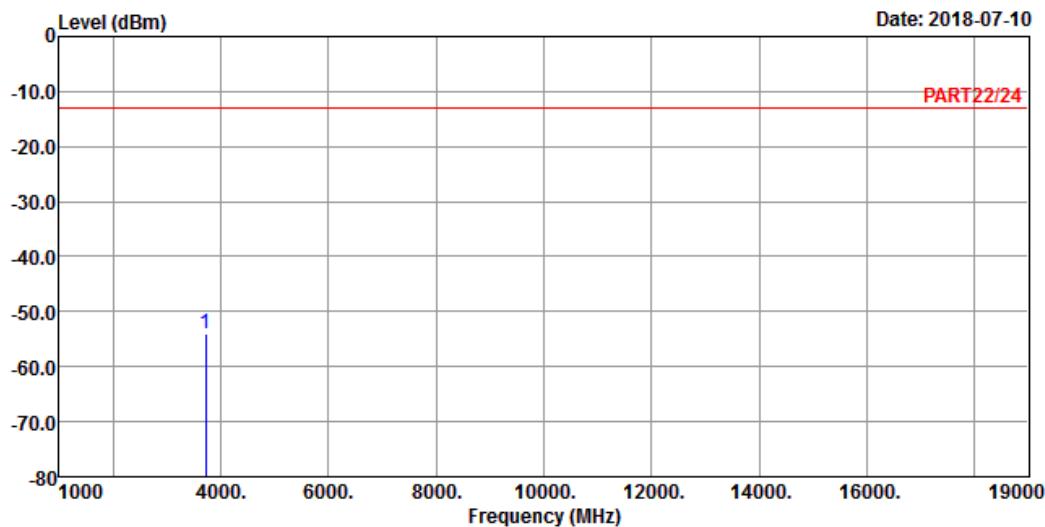

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_20M Link\_L-CH

Tested by: Thomas Wei

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 3720.00 -54.15 -47.33 -13.00 -41.15 -6.82 Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

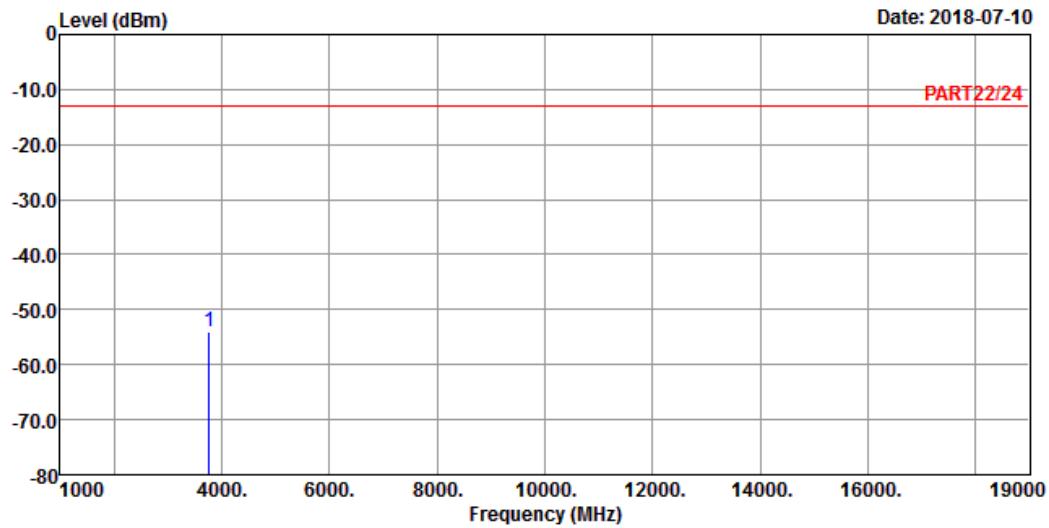

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 2 QPSK\_20M Link\_M-CH

Tested by: Thomas Wei


Freq	Read	Limit	Over		
	Level	Level	Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp	3760.00	-53.92	-47.27	-13.00	-40.92 -6.65 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

## Data: 2

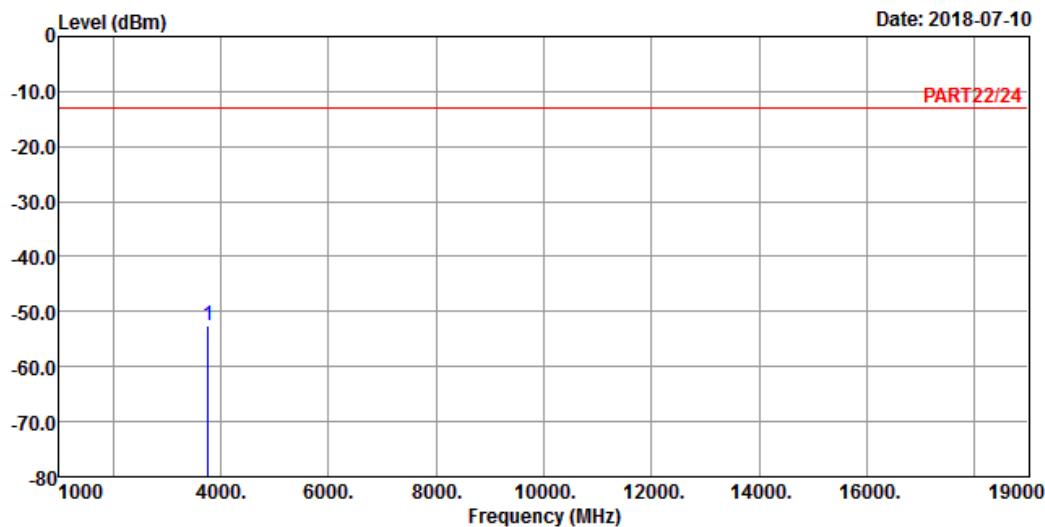

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_20M Link\_M-CH

Tested by: Thomas Wei

Freq	Read Level	Limit Level	Over Line	Limit Factor	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 3760.00 -52.51 -45.86 -13.00 -39.51 -6.65 Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 5

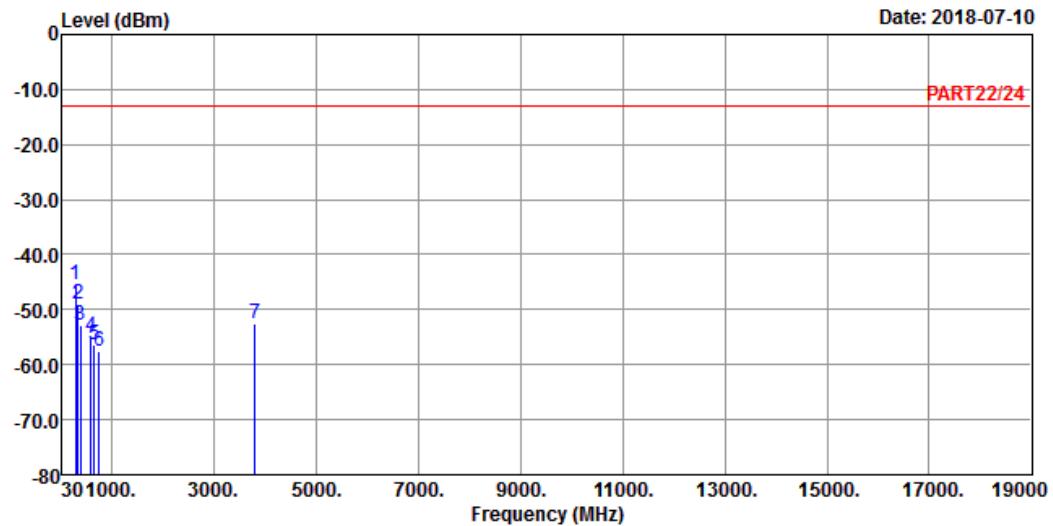

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 2 QPSK\_20M Link\_H-CH

Tested by: Thomas Wei


Freq	Read		Limit		Over	
	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB
1 pp	286.08	-45.46	-38.73	-13.00	-32.46	-6.73 Peak
2	338.46	-49.04	-42.62	-13.00	-36.04	-6.42 Peak
3	389.87	-52.85	-46.85	-13.00	-39.85	-6.00 Peak
4	598.42	-54.94	-54.11	-13.00	-41.94	-0.83 Peak
5	650.80	-56.39	-55.52	-13.00	-43.39	-0.87 Peak
6	754.59	-57.59	-58.46	-13.00	-44.59	0.87 Peak
7	3800.00	-52.69	-46.26	-13.00	-39.69	-6.43 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

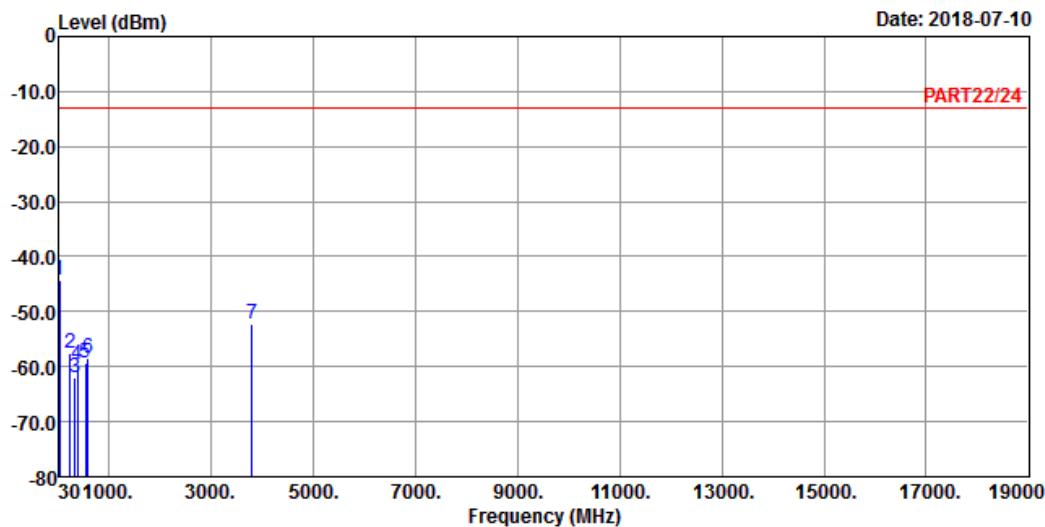

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_20M Link\_H-CH

Tested by: Thomas Wei

	Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor
	MHz	dBm	dBm	dBm	dB
1 pp	42.61	-44.40	-43.46	-13.00	-31.40
2	234.67	-57.65	-51.03	-13.00	-44.65
3	338.46	-62.07	-55.65	-13.00	-49.07
4	390.84	-59.76	-53.76	-13.00	-46.76
5	546.04	-59.34	-56.35	-13.00	-46.34
6	598.42	-58.52	-57.69	-13.00	-45.52
7	3800.00	-52.32	-45.89	-13.00	-39.32

Peak

Peak

Peak

Peak

Peak

Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---