



FCC RADIO TEST REPORT

FCC ID : B94TNQ296PC
Equipment : Notebook PC
Brand Name : HP
Model Name : TPN-Q296
Applicant : HP Inc.
1501 Page Mill Road, Palo Alto CA, 94304, USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Aug. 22, 2023 and testing was performed from Sep. 18, 2023 to Sep. 18, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 6

 1.1 Product Feature of Equipment Under Test 6

 1.2 Modification of EUT 6

 1.3 Testing Location 7

 1.4 Applicable Standards 7

2 Test Configuration of Equipment Under Test 8

 2.1 Test Mode..... 8

 2.2 Frequency List of Low/Middle/High Channels..... 8

3 Conducted Test Result 9

 3.1 Measuring Instruments..... 9

 3.2 Conducted Output Power and ERP/EIRP 10

4 List of Measuring Equipment..... 11

Appendix A. Test Results of Conducted Test



History of this test report

Report No.	Version	Description	Issue Date
FG382109-04E	01	Initial issue of report	Oct. 06, 2023
FG382109-04E	02	Revise Product Feature of Equipment Under Test This report is an updated version, replacing the report issued on Oct. 06, 2023.	Oct. 19, 2023



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	-	See Note
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	-	See Note
-	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note

Remark:

- For host device, Field Strength of Spurious Radiation, Effective Radiated Power and Equivalent Isotropic Radiated Power are verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: FM101-GL)



Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Michelle Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n /ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11ax
Sample 1	EUT with Vendor 1
Sample 2	EUT with Vendor 2
Integrated WLAN Module	Brand Name: Intel® Wi-Fi 6E AX211 Model Name: AX211NGW FCC ID: PD9AX211NG
Integrated WLAN Module	Brand Name: MediaTek Model Name: MT7921 FCC ID: B94-MT7921S
Integrated WWAN Module	Brand Name: Fibocom Model Name: FM101-GL
Antenna Type	WWAN: PIFA Antenna WLAN: <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna Bluetooth: PIFA Antenna

WWAN Antenna Information				
Main Antenna	Manufacturer	Vendor 1	Peak gain (dBi)	Cellular Band: 1.50 dBi PCS Band: 0.10 dBi AWS Band: -0.50 dBi
	Part number	DQ6E1LTE100 (MDA-LTE1LTE1-01-001)	Type	PIFA
	Manufacturer	Vendor 2	Peak gain (dBi)	Cellular Band: 1.49 dBi PCS Band: 0.13 dBi AWS Band: 0.17 dBi
	Part number	DQ6915G0200 (81ELA915.G02)	Type	PIFA

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Cotty Hsu
Temperature (°C)	22.2~23.1
Relative Humidity (%)	51~56

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link

2.2 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

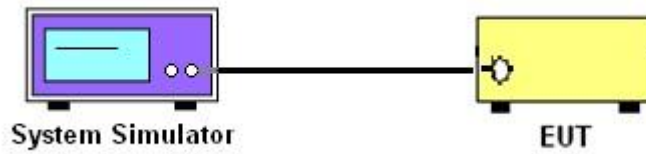

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Sep. 18, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 06, 2023	Sep. 18, 2023	Jan. 05, 2024	Conducted (TH03-HY)



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

WCDMA Band V Maximum Average Power [dBm] (GT - LC = 1.5 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.58	23.75	23.74	23.10	0.2042
HSDPA Subtest-1	22.49	22.79	22.73		
HSDPA Subtest-2	22.60	22.70	22.71		
HSDPA Subtest-3	22.07	22.16	22.17		
HSDPA Subtest-4	21.97	22.24	22.17		
HSUPA Subtest-1	22.56	22.73	22.63		
HSUPA Subtest-2	20.40	20.74	20.58		
HSUPA Subtest-3	21.42	21.71	21.66		
HSUPA Subtest-4	20.44	20.75	20.68		
HSUPA Subtest-5	22.30	22.50	22.50		
Limit	ERP < 7W				

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 0.13 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	24.17	24.08	23.92	24.30	0.2692
HSDPA Subtest-1	23.13	23.16	23.01		
HSDPA Subtest-2	23.11	23.14	23.05		
HSDPA Subtest-3	22.61	22.59	22.52		
HSDPA Subtest-4	22.57	22.59	22.40		
HSUPA Subtest-1	23.15	23.05	22.98		
HSUPA Subtest-2	21.12	21.18	20.91		
HSUPA Subtest-3	22.17	22.08	21.99		
HSUPA Subtest-4	21.18	21.11	21.05		
HSUPA Subtest-5	23.00	23.10	22.90		
Limit	EIRP < 2W				

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 0.17 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.04	23.92	24.13	24.30	0.2692
HSDPA Subtest-1	22.97	23.02	23.11		
HSDPA Subtest-2	22.86	22.89	23.12		
HSDPA Subtest-3	22.89	22.87	22.56		
HSDPA Subtest-4	22.88	22.91	22.59		
HSUPA Subtest-1	22.96	22.93	23.06		
HSUPA Subtest-2	21.02	20.93	21.03		
HSUPA Subtest-3	21.91	21.98	22.08		
HSUPA Subtest-4	20.93	20.99	21.15		
HSUPA Subtest-5	22.90	22.80	22.90		
Limit	EIRP < 1W				