



RADIO TEST REPORT


Test Report No. : 11723070H-A

Applicant : FUJITSU TEN LIMITED
Type of Equipment : Car Audio
Model No. : 73R0
FCC ID : BAB73R0
Test regulation : FCC Part 15 Subpart C: 2017
Test Result : Complied


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

Date of test: April 18 to 25, 2017

Representative test engineer:

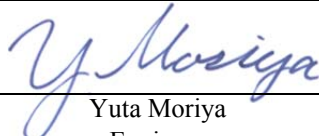
Yuta Moriya
Engineer
Consumer Technology Division

Approved by:


Tsubasa Takayama
Engineer
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated Spurious Emission	10
SECTION 6: Antenna Terminal Conducted Tests.....	11
APPENDIX 1: Test data	12
20dB Bandwidth and Carrier Frequency Separation.....	12
Number of Hopping Frequency	15
Dwell time.....	17
Maximum Peak Output Power	20
Average Output Power	21
Radiated Spurious Emission	24
Conducted Spurious Emission	35
Conducted Emission Band Edge compliance	41
99%Occupied Bandwidth	43
APPENDIX 2: Test instruments	45
APPENDIX 3: Photographs of test setup	46
Radiated Spurious Emission	46

SECTION 1: Customer information

Company Name : FUJITSU TEN LIMITED
Address : 2-28, Goshō-dori 1-Chome, Hyogo-ku, Kobe, 652-8510 JAPAN
Telephone Number : +81-78-682-2159
Facsimile Number : +81-78-671-7160
Contact Person : DAISUKE FUKII

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Car Audio
Model No. : 73R0
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC 12 V
Receipt Date of Sample : April 16, 2017
Country of Mass-production : Indonesia, India
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model: 73R0 (referred to as the EUT in this report) is a Car Audio.

General Specification

System clock frequency(ies) : 216 MHz (Max)

Radio Specification

Bluetooth (Ver.2.1 + EDR)

Equipment Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Type of Modulation : FHSS, GFSK, $\pi/4$ DQPSK, 8 DPSK
Power Supply (inner) : DC 3.3 V
Antenna Type : Inverted F PCB Antenna
Antenna Gain : -3.75 dBi Peak
Crystal : 26 MHz

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on June 14, 2017 and effective July 14, 2017

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

- * The revision on June 14, 2017, does not affect the test specification applied to the EUT.
- * Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods IC: RSS-Gen 8.8	FCC: Section 15.207 IC: RSS-Gen 8.8	-	N/A *1)	-
Carrier Frequency Separation	FCC: FCC Public Notice DA 00-705 IC: -	FCC: Section15.247(a)(1) IC: RSS-247 5.1 (b)	See data.	Complied	Conducted
20dB Bandwidth	FCC: FCC Public Notice DA 00-705 IC: -	FCC: Section15.247(a)(1) IC: RSS-247 5.1 (a)		Complied	Conducted
Number of Hopping Frequency	FCC: FCC Public Notice DA 00-705 IC: -	FCC: Section15.247(a)(1)(iii) IC: RSS-247 5.1 (d)		Complied	Conducted
Dwell time	FCC: FCC Public Notice DA 00-705 IC: -	FCC: Section15.247(a)(1)(iii) IC: RSS-247 5.1 (d)		Complied	Conducted
Maximum Peak Output Power	FCC: FCC Public Notice DA 00-705 IC: RSS-Gen 6.12	FCC: Section15.247(a)(b)(1) IC: RSS-247 5.4 (b)		Complied	Conducted
Spurious Emission & Band Edge Compliance	FCC: FCC Public Notice DA 00-705 IC: RSS-Gen 6.13	FCC: Section15.247(d) IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10		2.6 dB 4882.000 MHz, Horizontal, AV	Complied

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

*2) Radiated test was selected over 30 MHz based on section 15.247(d).

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

This EUT provides stable voltage (DC 3.3 V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 6.6	IC: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Antenna terminal test Uncertainty (+/-)							
Power meter		Conducted emission and Power density			Conducted emission		Channel power
Below 1 GHz	Above 1 GHz	Below 1 GHz	1 GHz - 3 GHz	3 GHz - 18 GHz	18 GHz - 26.5 GHz	26.5 GHz - 40 GHz	
0.9 dB	1.0 dB	1.4 dB	1.5 dB	2.8 dB	2.8 dB	2.9 dB	2.6 dB

Test distance	Radiated emission (+/-) 9 kHz - 30 MHz
3 m	3.8 dB
10 m	3.7 dB

Polarity	Radiated emission (Below 1 GHz)			
	(3 m*) (+/-)		(10 m*) (+/-)	
	30 MHz - 200 MHz	200 MHz - 1000 MHz	30 MHz - 200 MHz	200 MHz - 1000 MHz
Horizontal	5.0 dB	5.3 dB	5.0 dB	5.0 dB
Vertical	4.7 dB	5.9 dB	5.0 dB	5.1 dB

Radiated emission (Above 1 GHz)				
(3 m*) (+/-)		(1 m*) (+/-)		(10 m*) (+/-)
1 GHz - 6 GHz	6 GHz - 18 GHz	10 GHz - 26.5 GHz	26.5 GHz - 40 GHz	1 GHz - 18 GHz
5.2 dB	5.4 dB	5.5 dB	5.5 dB	5.4 dB

*Measurement distance

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing


4.1 Operating Mode(s)

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Spurious Emission (Conducted/Radiated)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx (Hopping On) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx (Hopping On) DH5, 3DH5	-
Dwell time	Tx (Hopping On), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5	-
Maximum Peak Output Power	Tx (Hopping Off) DH5, 2DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2441 MHz 2480 MHz
<p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)</p> <p>*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.</p> <p>* It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.</p> <p>*EUT has the power settings by the software as follows; Power settings: BDR: Ext.=255, Int.=50 EDR: Ext.=255, Int.=50 Software: Version 1.0</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>		

4.2 Configuration and peripherals

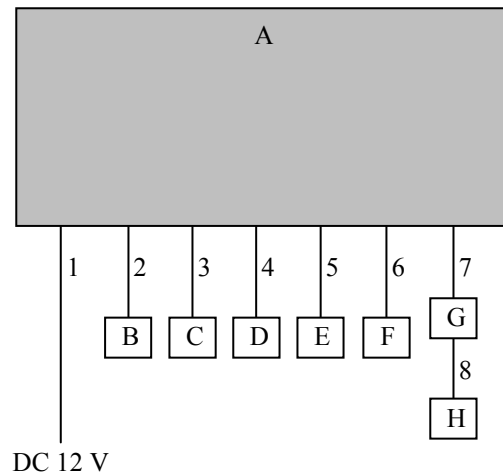

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Car Audio	73R0	12A17A000081	FUJITSU TEN LIMITED	EUT
B	Jig	-	-	FUJITSU TEN LIMITED	-
C	Speaker Load	4ROK	-	JRM	-
D	AUX Load	-	-	-	-
E	Microphone	-	15110400056	FUJITSU TEN LIMITED	-
F	FM / AM Antenna	001	1	SUZUKI	-
G	USB Port	39105-57L10	16325	KINGMAX	-
H	USB Memory	PD07-WH4GB	C090000000014303	KINGMAX	-

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	1.0	Unshielded	Unshielded	-
2	Signal Cable	1.0	Unshielded	Unshielded	-
3	Speaker Cable	1.0	Unshielded	Unshielded	-
4	Signal Cable	1.0	Unshielded	Unshielded	-
5	Microphone Cable	3.1	Unshielded	Unshielded	-
6	FM / AM Antenna Cable	4.0	Unshielded	Unshielded	-
7	USB Cable	0.3	Shielded	Shielded	-
8	USB Cable	3.0	Shielded	Shielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 10 Hz *1)	RBW: 100 kHz VBW: 300 kHz
Test Distance	3 m	4.4 m*2) (1 GHz - 10 GHz), 1 m*3) (10 GHz - 26.5 GHz)		4.4 m*2) (1 GHz - 10 GHz), 1 m*3) (10 GHz - 26.5 GHz)

*1) Although DA 00-705 accepts VBW = 10 Hz for AV measurements, it was confirmed that superfluous smoothing was not performed.

*2) Distance Factor: $20 \times \log(4.4 \text{ m}/3.0 \text{ m}) = 3.33 \text{ dB}$

*3) Distance Factor: $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz

Test data : APPENDIX

Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	300 kHz	1 MHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

(9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz)

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

20dB Bandwidth and Carrier Frequency Separation


Test place Ise EMC Lab. No.6 Measurement Room
Report No. 11723070H
Date April 21, 2017
Temperature / Humidity 22 deg. C / 43 % RH
Engineer Tomoki Matsui
Mode Tx, Hopping Off/On, DH5/3DH5

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.923	1.000	≥ 0.615
DH5	2441.0	0.930	1.000	≥ 0.620
DH5	2480.0	0.921	0.998	≥ 0.614
3DH5	2402.0	1.255	1.000	≥ 0.837
3DH5	2441.0	1.280	1.000	≥ 0.853
3DH5	2480.0	1.295	1.000	≥ 0.863

Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).

No limit applies to 20dB Bandwidth.

20dB Bandwidth and Carrier Frequency Separation

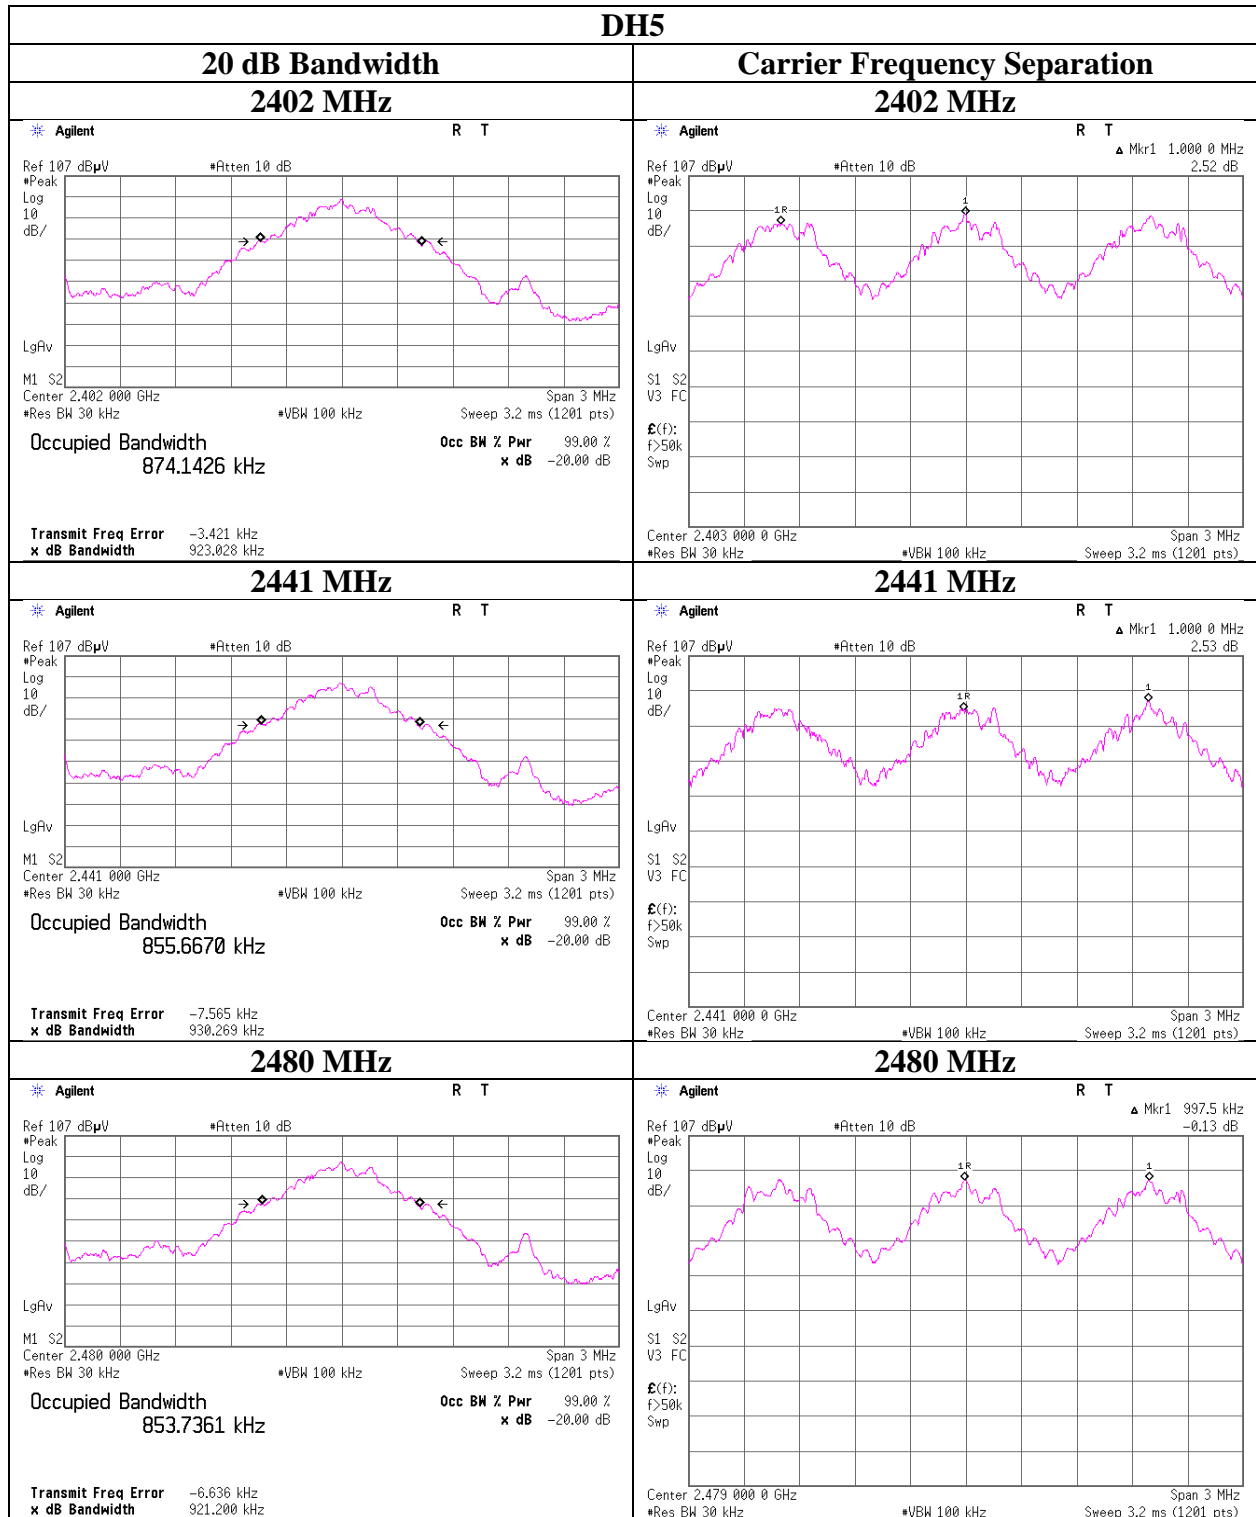

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Number of Hopping Frequency

Test place Ise EMC Lab. No.6 Measurement Room
Report No. 11723070H
Date April 21, 2017
Temperature / Humidity 22 deg. C / 43 % RH
Engineer Tomoki Matsui
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

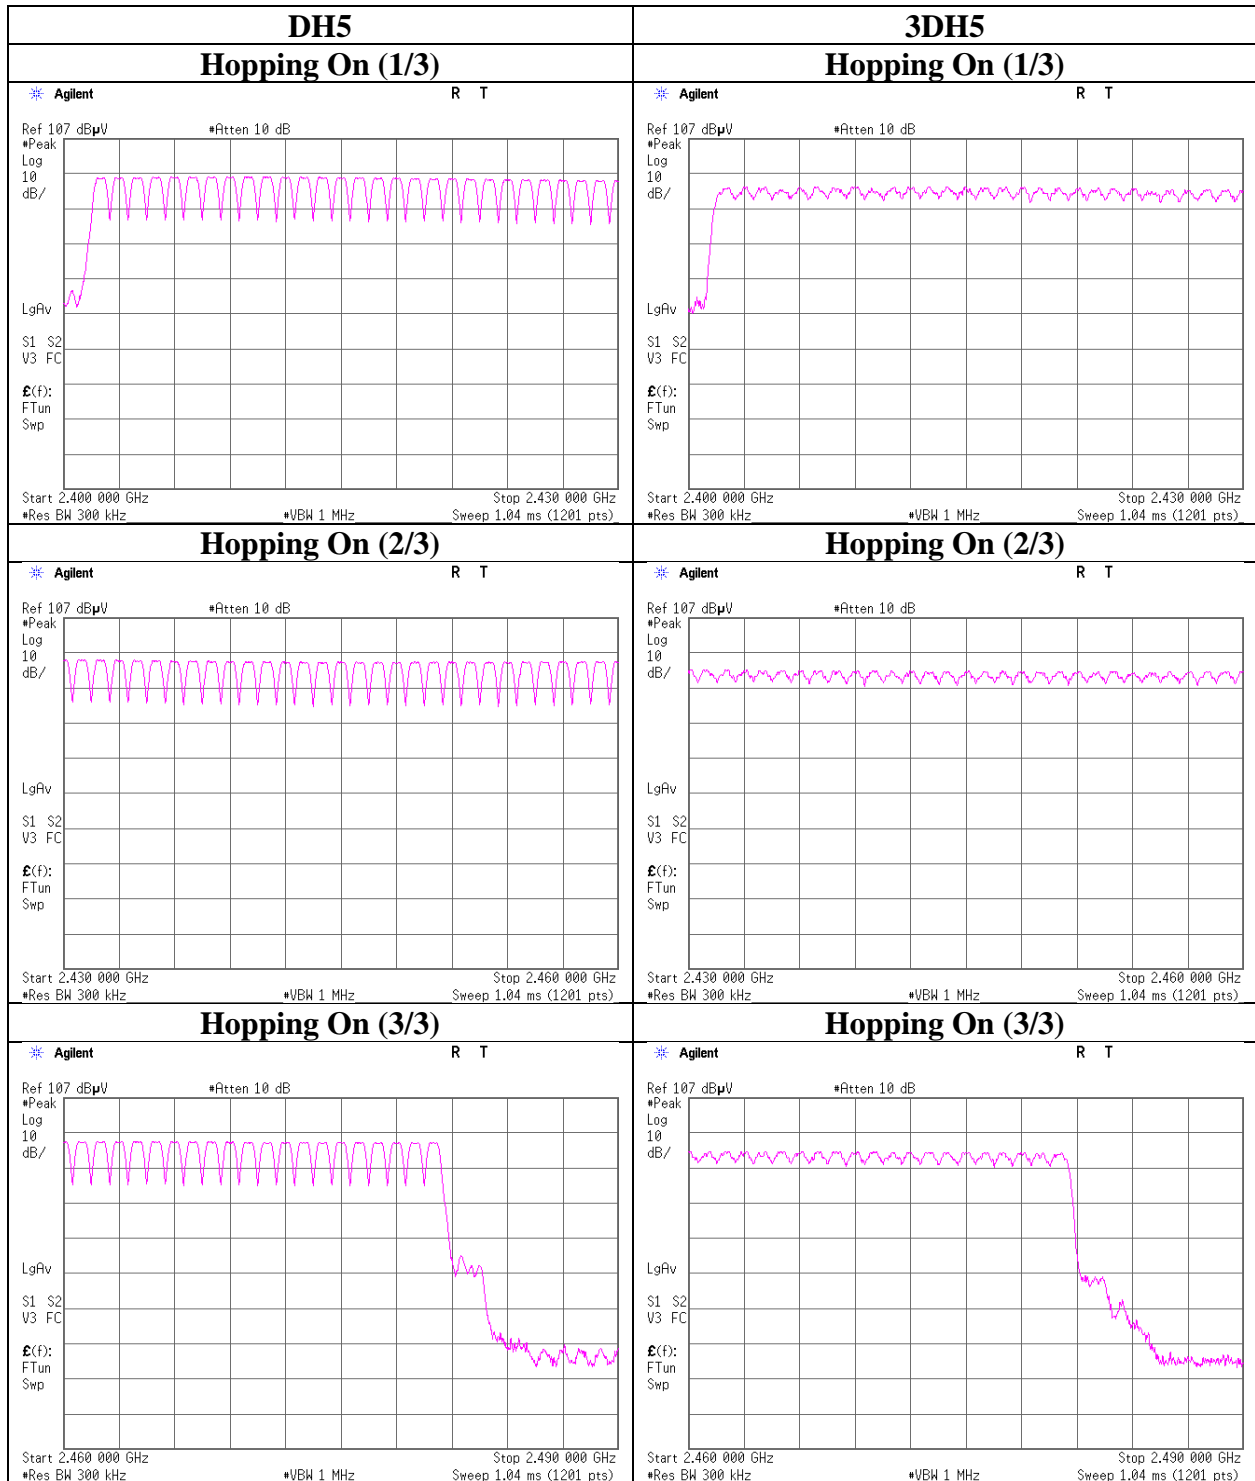

Dwell time

Test place : Ise EMC Lab. No.6 Measurement Room
Report No. : 11723070H
Date : April 21, 2017
Temperature / Humidity : 25 deg. C / 35 % RH
Engineer : Tomoki Matsui
Mode : Tx, Hopping On

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period				Length of transmission [msec]	Result [msec]	Limit [msec]
	50.8 times / 5 sec.	x	31.6 sec. =	322 times			
DH1	50.8 times / 5 sec.	x	31.6 sec. =	322 times	0.431	139	400
DH3	25.0 times / 5 sec.	x	31.6 sec. =	158 times	1.698	268	400
DH5	17.0 times / 5 sec.	x	31.6 sec. =	108 times	2.944	318	400
3DH1	50.6 times / 5 sec.	x	31.6 sec. =	320 times	0.444	142	400
3DH3	25.0 times / 5 sec.	x	31.6 sec. =	158 times	1.696	268	400
3DH5	17.0 times / 5 sec.	x	31.6 sec. =	108 times	2.953	319	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	51	50	51	51	51	50.8
DH3	25	25	25	25	25	25
DH5	17	17	17	17	17	17
3DH1	51	50	50	51	51	50.6
3DH3	25	25	25	25	25	25
3DH5	17	17	17	17	17	17

Sample Calculation

Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4s$, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than $0.4s$ regardless of packet size. This is confirmed in the test report for $N = 79$.

Dwell time

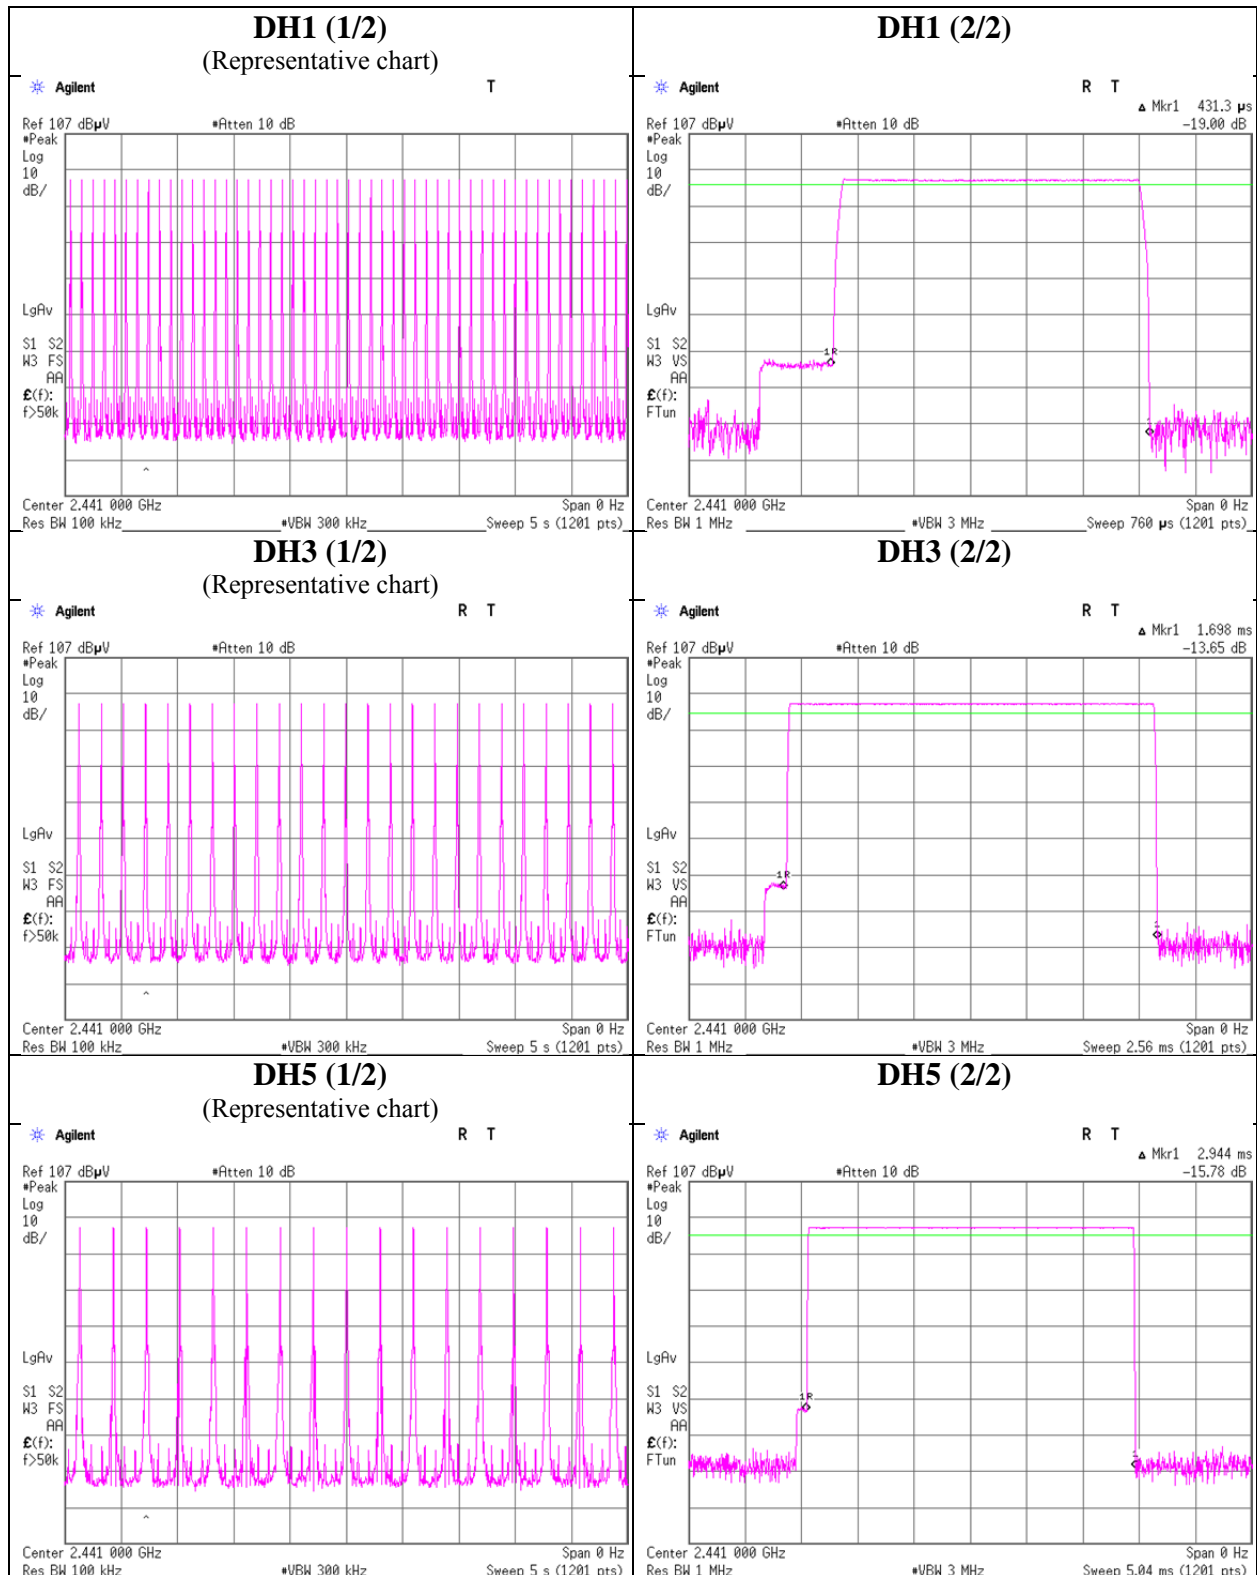

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Dwell time

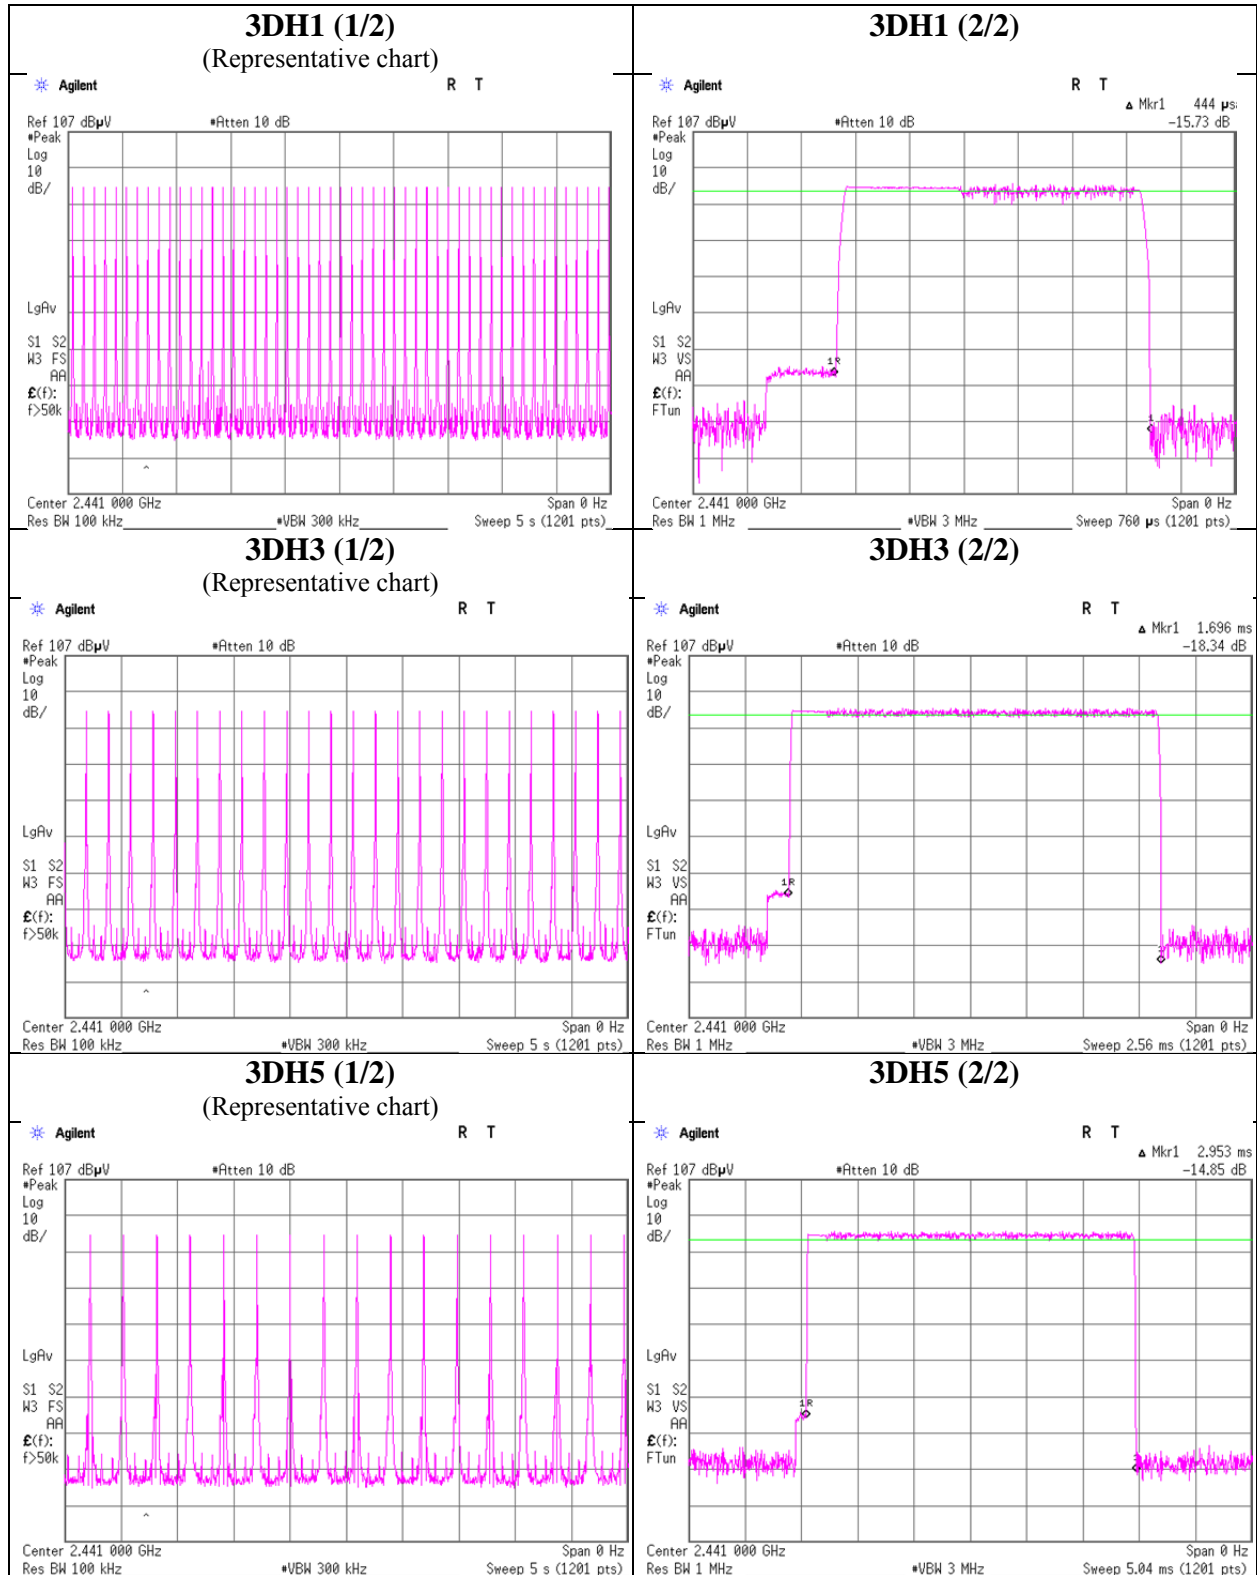

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Peak Output Power

Test place : Ise EMC Lab. No.6 Measurement Room
Report No. : 11723070H
Date : April 21, 2017
Temperature / Humidity : 22 deg. C / 43 % RH
Engineer : Tomoki Matsui
Mode : Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-11.01	1.40	10.01	0.40	1.10	20.96	125	20.56
DH5	2441.0	-12.27	1.41	10.01	-0.85	0.82	20.96	125	21.81
DH5	2480.0	-12.44	1.42	10.01	-1.01	0.79	20.96	125	21.97
2DH5	2402.0	-12.77	1.40	10.01	-1.36	0.73	20.96	125	22.32
2DH5	2441.0	-13.94	1.41	10.01	-2.52	0.56	20.96	125	23.48
2DH5	2480.0	-14.32	1.42	10.01	-2.89	0.51	20.96	125	23.85
3DH5	2402.0	-12.37	1.40	10.01	-0.96	0.80	20.96	125	21.92
3DH5	2441.0	-13.74	1.41	10.01	-2.32	0.59	20.96	125	23.28
3DH5	2480.0	-14.10	1.42	10.01	-2.67	0.54	20.96	125	23.63

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

Average Output Power
(Reference data for RF Exposure)

Test place : Ise EMC Lab. No.6 Measurement Room
Report No. : 11723070H
Date : April 21, 2017
Temperature / Humidity : 22 deg. C / 43 % RH
Engineer : Tomoki Matsui
Mode : Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-12.51	1.40	10.01	-1.10	0.78	1.13	0.03	1.01
DH5	2441.0	-13.90	1.41	10.01	-2.48	0.57	1.13	-1.35	0.73
DH5	2480.0	-14.05	1.42	10.01	-2.62	0.55	1.13	-1.49	0.71
2DH5	2402.0	-16.19	1.40	10.01	-4.78	0.33	1.05	-3.73	0.42
2DH5	2441.0	-17.51	1.41	10.01	-6.09	0.25	1.05	-5.04	0.31
2DH5	2480.0	-18.13	1.42	10.01	-6.70	0.21	1.05	-5.65	0.27
3DH5	2402.0	-16.16	1.40	10.01	-4.75	0.34	1.06	-3.69	0.43
3DH5	2441.0	-17.46	1.41	10.01	-6.04	0.25	1.06	-4.98	0.32
3DH5	2480.0	-18.10	1.42	10.01	-6.67	0.22	1.06	-5.61	0.27

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.


Burst Rate Confirmation

Test place	Ise EMC Lab. No.4 and 6 Measurement Room	
Report No.	11723070H	
Date	April 18, 2017	April 21, 2017
Temperature / Humidity	23 deg. C / 64 % RH	22 deg. C / 43 % RH
Engineer	Yuta Moriya	Tomoki Matsui
Mode	Tx, Hopping Off	


DH5

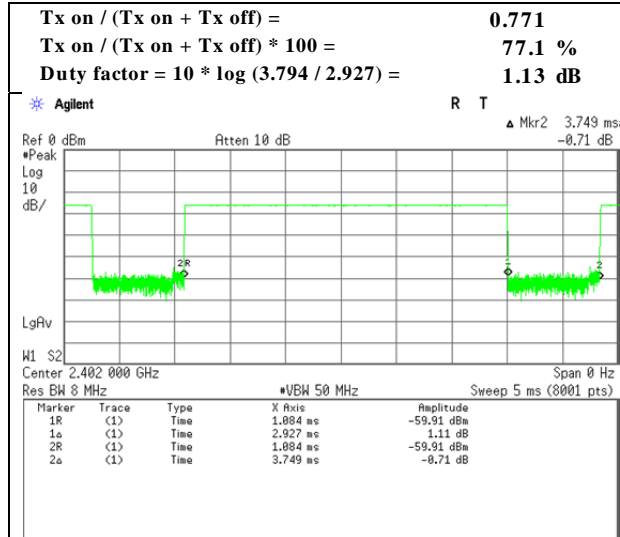

2DH5

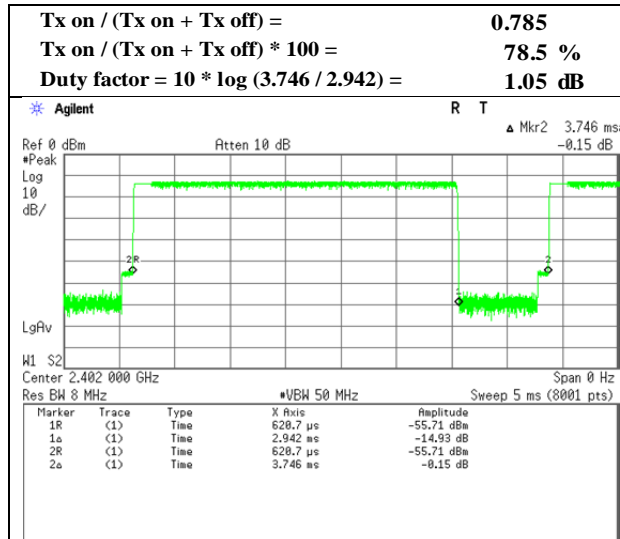


3DH5

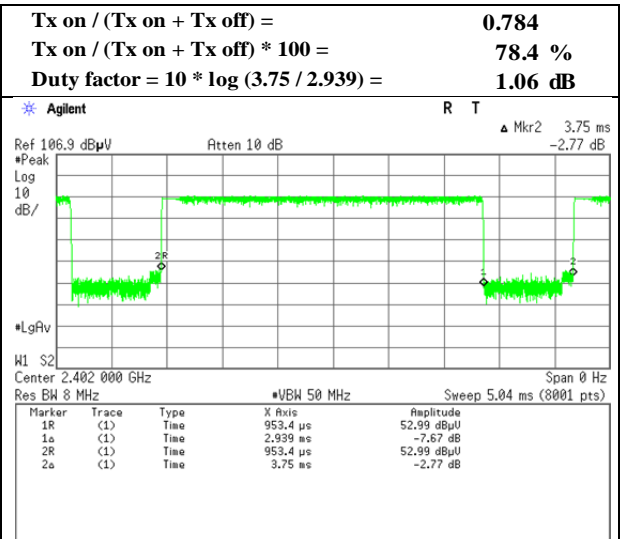

Dwell time factor

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No. : 11723070H
Date : April 18, 2017
Temperature / Humidity : 23 deg. C / 64 % RH
Engineer : Yuta Moriya
Mode : Tx, Hopping On

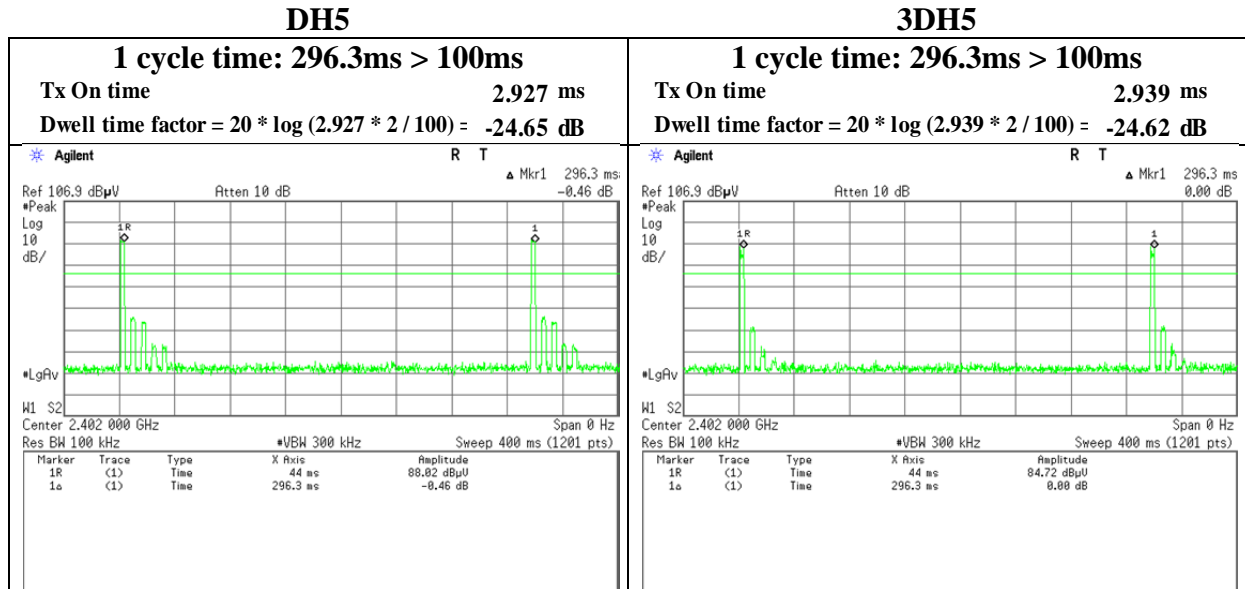

A hopping channel might be occupied 2 times within 100 ms on minimum hopping mode (AFH). Therefore Tx On time was multiplied by 2. As for Tx On time, refer to “Burst Rate Confirmation”.

Radiated Spurious Emission

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4 No.4
Date April 18, 2017 April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH 23 deg. C / 64 % RH
Engineer Yuta Moriya Hiroyuki Furutaka
(1 GHz - 10 GHz) (except for 1 GHz - 10 GHz)
Mode Tx, Hopping Off, DH5 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	34.355	QP	29.9	16.1	7.4	32.1	21.3	40.0	18.7	
Hori	60.010	QP	46.8	7.8	7.8	32.1	30.3	40.0	9.7	
Hori	84.010	QP	45.7	7.0	8.1	32.1	28.7	40.0	11.3	
Hori	240.000	QP	34.8	11.6	9.4	31.9	23.9	46.0	22.1	
Hori	480.000	QP	34.7	17.3	11.0	32.1	30.9	46.0	15.1	
Hori	959.947	QP	30.8	22.3	13.3	30.8	35.6	46.0	10.4	
Hori	1604.330	PK	47.3	25.7	6.0	33.1	45.9	73.9	28.0	
Hori	2390.000	PK	41.1	27.4	6.5	32.1	42.9	73.9	31.0	
Hori	4804.000	PK	56.0	30.8	9.1	31.2	64.7	73.9	9.2	
Hori	7206.000	PK	42.1	36.2	10.0	32.4	55.9	73.9	18.0	Floor noise
Hori	9608.000	PK	41.2	38.4	10.9	32.7	57.8	73.9	16.1	Floor noise
Hori	1604.330	AV	41.3	25.7	6.0	33.1	39.9	53.9	14.0	
Hori	2390.000	AV	29.2	27.4	6.5	32.1	31.0	53.9	22.9	
Hori	7206.000	AV	28.9	36.2	10.0	32.4	42.7	53.9	11.2	Floor noise
Hori	9608.000	AV	27.9	38.4	10.9	32.7	44.5	53.9	9.4	Floor noise
Vert	34.355	QP	45.0	16.1	7.4	32.1	36.4	40.0	3.6	
Vert	60.010	QP	50.0	7.8	7.8	32.1	33.5	40.0	6.5	
Vert	88.819	QP	40.5	7.9	8.1	32.1	24.4	43.5	19.1	
Vert	240.000	QP	32.3	11.6	9.4	31.9	21.4	46.0	24.6	
Vert	480.000	QP	34.2	17.3	11.0	32.1	30.4	46.0	15.6	
Vert	959.947	QP	29.8	22.3	13.3	30.8	34.6	46.0	11.4	
Vert	1604.330	PK	50.4	25.7	6.0	33.1	49.0	73.9	24.9	
Vert	2390.000	PK	41.7	27.4	6.5	32.1	43.5	73.9	30.4	
Vert	4804.000	PK	56.2	30.8	9.1	31.2	64.9	73.9	9.0	
Vert	7206.000	PK	42.3	36.2	10.0	32.4	56.1	73.9	17.8	Floor noise
Vert	9608.000	PK	41.4	38.4	10.9	32.7	58.0	73.9	15.9	Floor noise
Vert	1604.330	AV	47.7	25.7	6.0	33.1	46.3	53.9	7.6	
Vert	2390.000	AV	29.3	27.4	6.5	32.1	31.1	53.9	22.8	
Vert	7206.000	AV	29.3	36.2	10.0	32.4	43.1	53.9	10.8	Floor noise
Vert	9608.000	AV	28.0	38.4	10.9	32.7	44.6	53.9	9.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	91.9	27.4	6.5	32.1	93.7	-	-	Carrier
Hori	2400.000	PK	59.3	27.4	6.5	32.1	61.1	73.7	12.6	
Vert	2402.000	PK	94.2	27.4	6.5	32.1	96.0	-	-	Carrier
Vert	2400.000	PK	60.9	27.4	6.5	32.1	62.7	76.0	13.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4804.000	AV	48.0	30.8	9.1	31.2	-24.7	32.1	53.9	21.9	*
Vert	4804.000	AV	48.1	30.8	9.1	31.2	-24.7	32.2	53.9	21.8	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH
Engineer Yuta Moriya
(1 GHz - 10 GHz)
Mode Tx, Hopping Off, DH5 2402 MHz

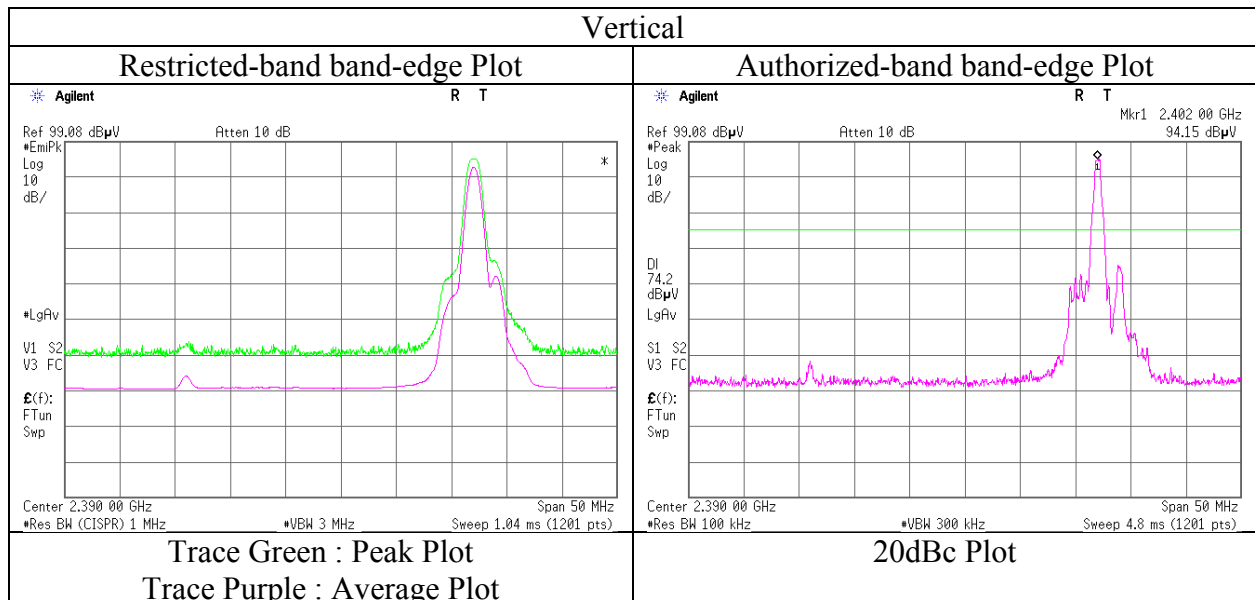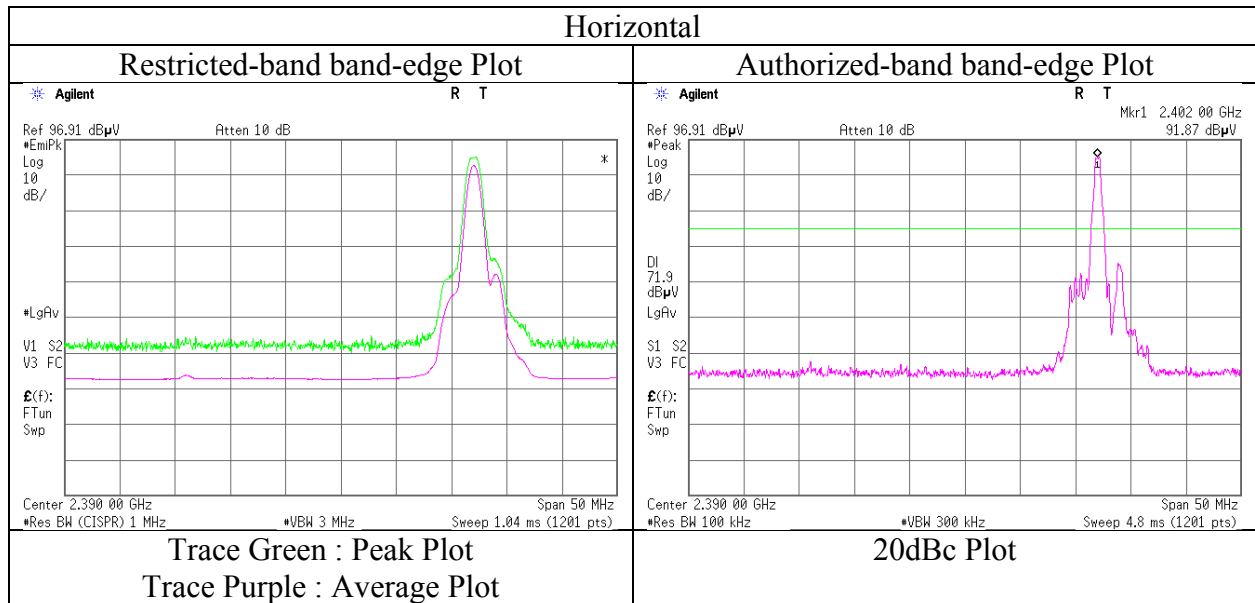

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH
Engineer Hiroyuki Furutaka
Mode Tx, Hopping Off, DH5 2441 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	34.355	QP	29.7	16.1	7.4	32.1	21.1	40.0	18.9	
Hori	60.010	QP	50.1	7.8	7.8	32.1	33.6	40.0	6.4	
Hori	84.010	QP	45.8	7.0	8.1	32.1	28.8	40.0	11.2	
Hori	240.000	QP	29.8	11.6	9.4	31.9	18.9	46.0	27.1	
Hori	480.000	QP	34.1	17.3	11.0	32.1	30.3	46.0	15.7	
Hori	959.947	QP	31.2	22.3	13.3	30.8	36.0	46.0	10.0	
Hori	1627.980	PK	46.9	25.8	6.1	33.1	45.7	73.9	28.2	
Hori	4882.000	PK	59.4	31.1	9.0	31.2	68.3	73.9	5.6	
Hori	7323.000	PK	41.8	36.4	10.0	32.5	55.7	73.9	18.2	Floor noise
Hori	9764.000	PK	41.8	38.6	10.9	32.8	58.5	73.9	15.4	Floor noise
Hori	1627.980	AV	41.0	25.8	6.1	33.1	39.8	53.9	14.1	
Hori	7323.000	AV	30.0	36.4	10.0	32.5	43.9	53.9	10.0	Floor noise
Hori	9764.000	AV	29.4	38.6	10.9	32.8	46.1	53.9	7.8	Floor noise
Vert	34.355	QP	44.7	16.1	7.4	32.1	36.1	40.0	3.9	
Vert	60.010	QP	50.5	7.8	7.8	32.1	34.0	40.0	6.0	
Vert	88.819	QP	41.2	7.9	8.1	32.1	25.1	43.5	18.4	
Vert	240.000	QP	24.3	11.6	9.4	31.9	13.4	46.0	32.6	
Vert	480.000	QP	35.2	17.3	11.0	32.1	31.4	46.0	14.6	
Vert	959.947	QP	32.8	22.3	13.3	30.8	37.6	46.0	8.4	
Vert	1627.980	PK	52.3	25.8	6.1	33.1	51.1	73.9	22.8	
Vert	4882.000	PK	58.4	31.1	9.0	31.2	67.3	73.9	6.6	
Vert	7323.000	PK	42.7	36.4	10.0	32.5	56.6	73.9	17.3	Floor noise
Vert	9764.000	PK	42.0	38.6	10.9	32.8	58.7	73.9	15.2	Floor noise
Vert	1627.980	AV	49.5	25.8	6.1	33.1	48.3	53.9	5.6	
Vert	7323.000	AV	29.9	36.4	10.0	32.5	43.8	53.9	10.1	Floor noise
Vert	9764.000	AV	29.4	38.6	10.9	32.8	46.1	53.9	7.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4882.000	AV	55.0	31.1	9.0	31.2	-24.7	39.3	53.9	14.7	*
Vert	4882.000	AV	54.1	31.1	9.0	31.2	-24.7	38.4	53.9	15.6	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH
Engineer Hiroyuki Furutaka
Mode Tx, Hopping Off, DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	34.355	QP	29.6	16.1	7.4	32.1	21.0	40.0	19.0	
Hori	60.010	QP	49.7	7.8	7.8	32.1	33.2	40.0	6.8	
Hori	84.010	QP	45.9	7.0	8.1	32.1	28.9	40.0	11.1	
Hori	240.000	QP	29.9	11.6	9.4	31.9	19.0	46.0	27.0	
Hori	480.000	QP	34.8	17.3	11.0	32.1	31.0	46.0	15.0	
Hori	959.947	QP	31.7	22.3	13.3	30.8	36.5	46.0	9.5	
Hori	1653.990	PK	46.2	25.9	6.1	33.0	45.2	73.9	28.7	
Hori	2483.500	PK	48.2	27.4	6.7	32.0	50.3	73.9	23.6	
Hori	4960.000	PK	58.4	31.4	9.1	31.1	67.8	73.9	6.1	
Hori	7440.000	PK	42.3	36.5	10.0	32.5	56.3	73.9	17.6	Floor noise
Hori	9920.000	PK	41.3	38.8	11.0	32.9	58.2	73.9	15.7	Floor noise
Hori	1653.990	AV	40.0	25.9	6.1	33.0	39.0	53.9	14.9	
Hori	2483.500	AV	37.3	27.4	6.7	32.0	39.4	53.9	14.5	
Hori	7440.000	AV	30.4	36.5	10.0	32.5	44.4	53.9	9.5	Floor noise
Hori	9920.000	AV	29.5	38.8	11.0	32.9	46.4	53.9	7.5	Floor noise
Vert	34.355	QP	44.7	16.1	7.4	32.1	36.1	40.0	3.9	
Vert	60.010	QP	50.3	7.8	7.8	32.1	33.8	40.0	6.2	
Vert	88.819	QP	41.2	7.9	8.1	32.1	25.1	43.5	18.4	
Vert	240.000	QP	26.7	11.6	9.4	31.9	15.8	46.0	30.2	
Vert	480.000	QP	35.8	17.3	11.0	32.1	32.0	46.0	14.0	
Vert	959.947	QP	33.6	22.3	13.3	30.8	38.4	46.0	7.6	
Vert	1653.990	PK	51.1	25.9	6.1	33.0	50.1	73.9	23.8	
Vert	2483.500	PK	46.2	27.4	6.7	32.0	48.3	73.9	25.6	
Vert	4960.000	PK	56.4	31.4	9.1	31.1	65.8	73.9	8.1	
Vert	7440.000	PK	42.1	36.5	10.0	32.5	56.1	73.9	17.8	Floor noise
Vert	9920.000	PK	40.1	38.8	11.0	32.9	57.0	73.9	16.9	Floor noise
Vert	1653.990	AV	50.2	25.9	6.1	33.0	49.2	53.9	4.7	
Vert	2483.500	AV	33.5	27.4	6.7	32.0	35.6	53.9	18.3	
Vert	7440.000	AV	28.9	36.5	10.0	32.5	42.9	53.9	11.0	Floor noise
Vert	9920.000	AV	28.1	38.8	11.0	32.9	45.0	53.9	8.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Dwell time factor relaxation

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Dwell Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4960.000	AV	54.1	31.4	9.1	31.1	-24.7	38.9	53.9	15.1	*
Vert	4960.000	AV	48.2	31.4	9.1	31.1	-24.7	33.0	53.9	21.0	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz))

- Gain(Amplifier) + Dwell time factor (Refer to dwell time data sheet)

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No.	11723070H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	April 18, 2017
Temperature / Humidity	23 deg. C / 64 % RH
Engineer	Hiroyuki Furutaka
Mode	Tx, Hopping Off, DH5 2480 MHz

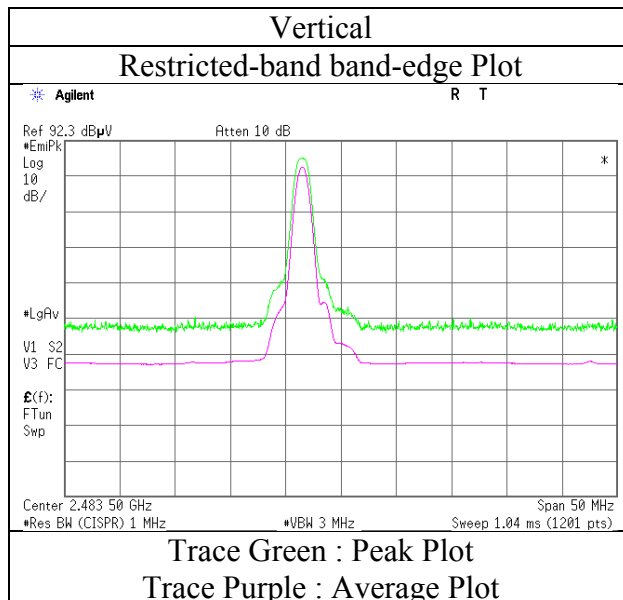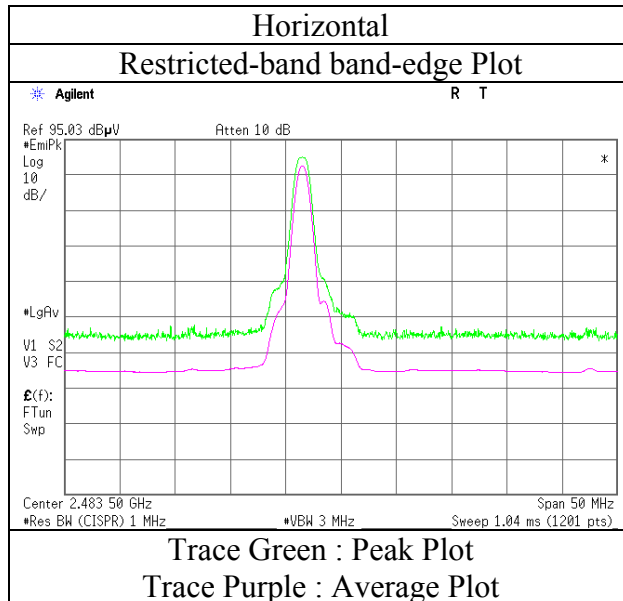

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH
Engineer Hiroyuki Furutaka
Mode Tx, Hopping Off, 3DH5 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	34.355	QP	29.5	16.1	7.4	32.1	20.9	40.0	19.1	
Hori	60.010	QP	48.6	7.8	7.8	32.1	32.1	40.0	7.9	
Hori	84.010	QP	45.9	7.0	8.1	32.1	28.9	40.0	11.1	
Hori	295.968	QP	40.7	13.4	9.8	31.8	32.1	46.0	13.9	
Hori	480.000	QP	36.3	17.3	11.0	32.1	32.5	46.0	13.5	
Hori	959.947	QP	30.6	22.3	13.3	30.8	35.4	46.0	10.6	
Hori	1602.000	PK	47.2	25.7	6.0	33.1	45.8	73.9	28.1	
Hori	2390.000	PK	41.1	27.4	6.5	32.1	42.9	73.9	31.0	
Hori	4804.000	PK	49.8	30.8	9.1	31.2	58.5	73.9	15.4	
Hori	7206.000	PK	42.0	36.2	10.0	32.4	55.8	73.9	18.1	Floor noise
Hori	9608.000	PK	41.7	38.4	10.9	32.7	58.3	73.9	15.6	Floor noise
Hori	1602.000	AV	40.2	25.7	6.0	33.1	38.8	53.9	15.1	
Hori	2390.000	AV	29.1	27.4	6.5	32.1	30.9	53.9	23.0	
Hori	4804.000	AV	39.8	30.8	9.1	31.2	48.5	53.9	5.4	
Hori	7206.000	AV	30.2	36.2	10.0	32.4	44.0	53.9	9.9	Floor noise
Hori	9608.000	AV	29.3	38.4	10.9	32.7	45.9	53.9	8.0	Floor noise
Vert	34.355	QP	44.6	16.1	7.4	32.1	36.0	40.0	4.0	
Vert	60.010	QP	50.2	7.8	7.8	32.1	33.7	40.0	6.3	
Vert	88.819	QP	41.3	7.9	8.1	32.1	25.2	43.5	18.3	
Vert	287.982	QP	31.7	13.1	9.8	31.9	22.7	46.0	23.3	
Vert	480.000	QP	35.6	17.3	11.0	32.1	31.8	46.0	14.2	
Vert	959.947	QP	33.4	22.3	13.3	30.8	38.2	46.0	7.8	
Vert	1602.000	PK	51.7	25.7	6.0	33.1	50.3	73.9	23.6	
Vert	2390.000	PK	40.9	27.4	6.5	32.1	42.7	73.9	31.2	
Vert	4804.000	PK	49.0	30.8	9.1	31.2	57.7	73.9	16.2	
Vert	7206.000	PK	42.8	36.2	10.0	32.4	56.6	73.9	17.3	Floor noise
Vert	9608.000	PK	40.9	38.4	10.9	32.7	57.5	73.9	16.4	Floor noise
Vert	1602.000	AV	48.9	25.7	6.0	33.1	47.5	53.9	6.4	
Vert	2390.000	AV	29.4	27.4	6.5	32.1	31.2	53.9	22.7	
Vert	4804.000	AV	39.1	30.8	9.1	31.2	47.8	53.9	6.1	
Vert	7206.000	AV	30.2	36.2	10.0	32.4	44.0	53.9	9.9	Floor noise
Vert	9608.000	AV	29.3	38.4	10.9	32.7	45.9	53.9	8.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

20dBc Data Sheet



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	87.9	27.4	6.5	32.1	89.7	-	-	Carrier
Hori	2400.000	PK	44.8	27.4	6.5	32.1	46.6	69.7	23.1	
Vert	2402.000	PK	93.1	27.4	6.5	32.1	94.9	-	-	Carrier
Vert	2400.000	PK	49.6	27.4	6.5	32.1	51.4	74.9	23.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH
Engineer Hiroyuki Furutaka
Mode Tx, Hopping Off, 3DH5 2402 MHz

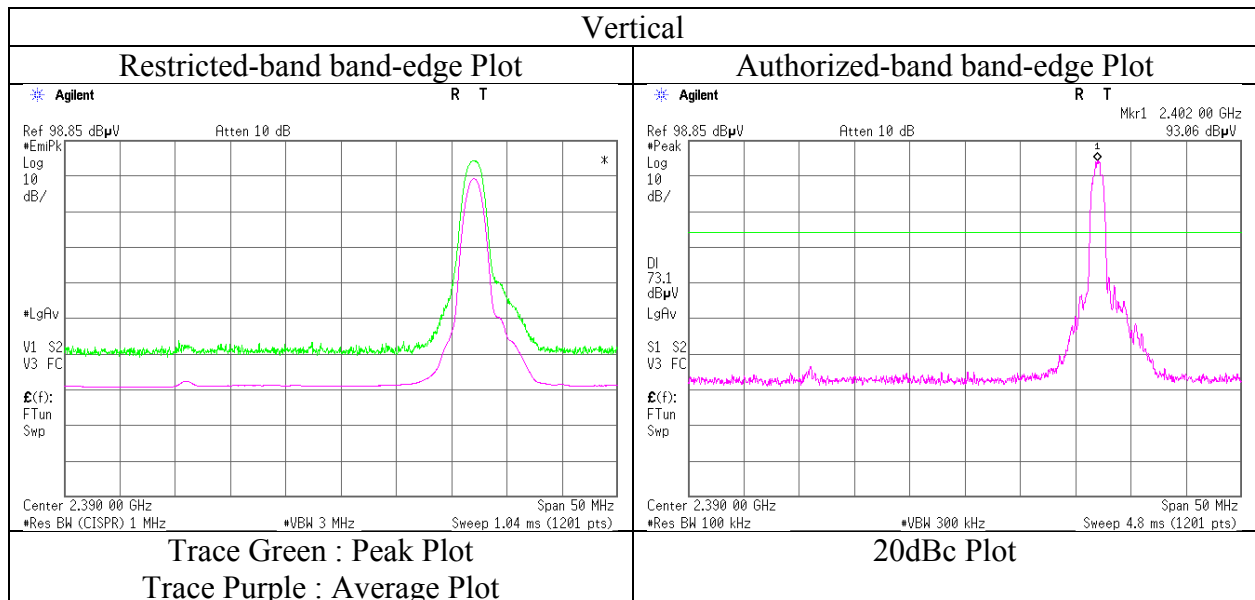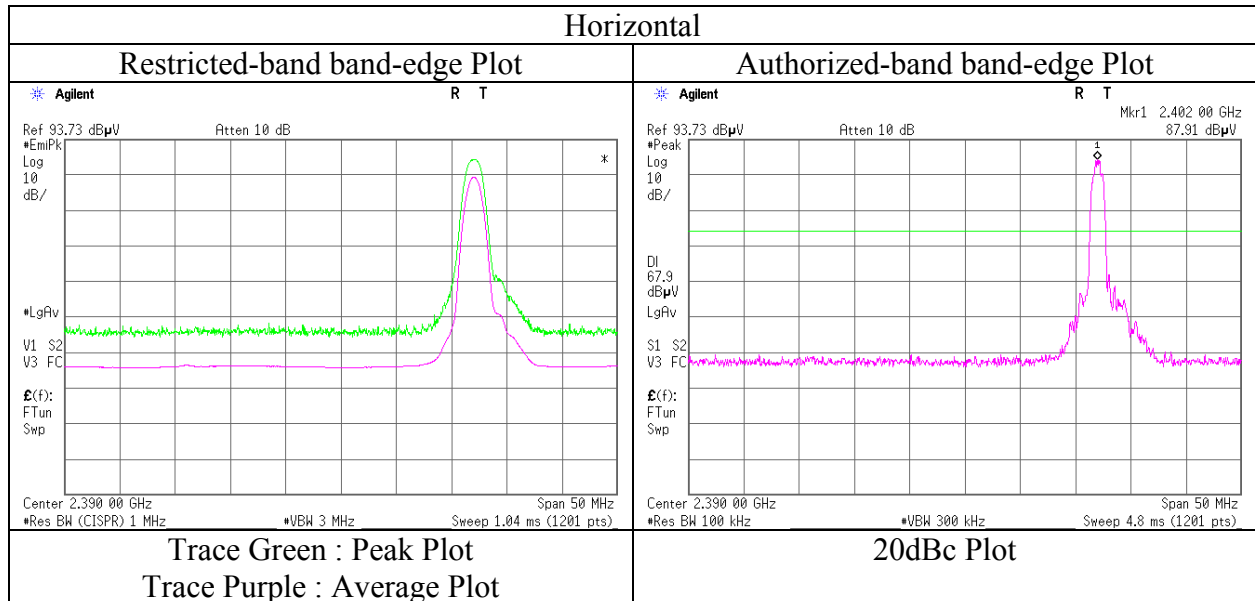

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH
Engineer Hiroyuki Furutaka
Mode Tx, Hopping Off, 3DH5 2441 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	34.355	QP	29.7	16.1	7.4	32.1	21.1	40.0	18.9	
Hori	60.010	QP	50.2	7.8	7.8	32.1	33.7	40.0	6.3	
Hori	84.010	QP	45.6	7.0	8.1	32.1	28.6	40.0	11.4	
Hori	295.968	QP	41.0	13.4	9.8	31.8	32.4	46.0	13.6	
Hori	480.000	QP	36.0	17.3	11.0	32.1	32.2	46.0	13.8	
Hori	959.947	QP	30.5	22.3	13.3	30.8	35.3	46.0	10.7	
Hori	1627.980	PK	46.4	25.8	6.1	33.1	45.2	73.9	28.7	
Hori	4882.000	PK	51.7	31.1	9.0	31.2	60.6	73.9	13.3	
Hori	7323.000	PK	41.7	36.4	10.0	32.5	55.6	73.9	18.3	Floor noise
Hori	9764.000	PK	40.9	38.6	10.9	32.8	57.6	73.9	16.3	Floor noise
Hori	1627.980	AV	40.4	25.8	6.1	33.1	39.2	53.9	14.7	
Hori	4882.000	AV	42.4	31.1	9.0	31.2	51.3	53.9	2.6	
Hori	7323.000	AV	29.8	36.4	10.0	32.5	43.7	53.9	10.2	Floor noise
Hori	9764.000	AV	29.3	38.6	10.9	32.8	46.0	53.9	7.9	Floor noise
Vert	34.355	QP	44.8	16.1	7.4	32.1	36.2	40.0	3.8	
Vert	60.010	QP	50.7	7.8	7.8	32.1	34.2	40.0	5.8	
Vert	88.819	QP	38.9	7.9	8.1	32.1	22.8	43.5	20.7	
Vert	287.982	QP	32.0	13.1	9.8	31.9	23.0	46.0	23.0	
Vert	480.000	QP	35.7	17.3	11.0	32.1	31.9	46.0	14.1	
Vert	959.947	QP	33.7	22.3	13.3	30.8	38.5	46.0	7.5	
Vert	1627.980	PK	51.8	25.8	6.1	33.1	50.6	73.9	23.3	
Vert	4882.000	PK	51.0	31.1	9.0	31.2	59.9	73.9	14.0	
Vert	7323.000	PK	41.8	36.4	10.0	32.5	55.7	73.9	18.2	Floor noise
Vert	9764.000	PK	41.4	38.6	10.9	32.8	58.1	73.9	15.8	Floor noise
Vert	1627.980	AV	49.1	25.8	6.1	33.1	47.9	53.9	6.0	
Vert	4882.000	AV	41.8	31.1	9.0	31.2	50.7	53.9	3.2	
Vert	7323.000	AV	29.8	36.4	10.0	32.5	43.7	53.9	10.2	Floor noise
Vert	9764.000	AV	29.4	38.6	10.9	32.8	46.1	53.9	7.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Report No. 11723070H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date April 18, 2017
Temperature / Humidity 23 deg. C / 64 % RH
Engineer Hiroyuki Furutaka
Mode Tx, Hopping Off, 3DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	34.355	QP	29.5	16.1	7.4	32.1	20.9	40.0	19.1	
Hori	60.010	QP	50.1	7.8	7.8	32.1	33.6	40.0	6.4	
Hori	84.010	QP	44.8	7.0	8.1	32.1	27.8	40.0	12.2	
Hori	269.986	QP	33.3	12.5	9.7	31.9	23.6	46.0	22.4	
Hori	480.000	QP	35.8	17.3	11.0	32.1	32.0	46.0	14.0	
Hori	959.947	QP	30.2	22.3	13.3	30.8	35.0	46.0	11.0	
Hori	1653.990	PK	46.1	25.9	6.1	33.0	45.1	73.9	28.8	
Hori	2483.500	PK	47.9	27.4	6.7	32.0	50.0	73.9	23.9	
Hori	4960.000	PK	49.4	31.4	9.1	31.1	58.8	73.9	15.1	
Hori	7440.000	PK	42.8	36.5	10.0	32.5	56.8	73.9	17.1	Floor noise
Hori	9920.000	PK	41.9	38.8	11.0	32.9	58.8	73.9	15.1	Floor noise
Hori	1653.990	AV	40.3	25.9	6.1	33.0	39.3	53.9	14.6	
Hori	2483.500	AV	35.7	27.4	6.7	32.0	37.8	53.9	16.1	
Hori	4960.000	AV	39.8	31.4	9.1	31.1	49.2	53.9	4.7	
Hori	7440.000	AV	30.3	36.5	10.0	32.5	44.3	53.9	9.6	Floor noise
Hori	9920.000	AV	29.6	38.8	11.0	32.9	46.5	53.9	7.4	Floor noise
Vert	34.355	QP	44.9	16.1	7.4	32.1	36.3	40.0	3.7	
Vert	60.010	QP	50.3	7.8	7.8	32.1	33.8	40.0	6.2	
Vert	88.819	QP	38.5	7.9	8.1	32.1	22.4	43.5	21.1	
Vert	287.982	QP	28.6	13.1	9.8	31.9	19.6	46.0	26.4	
Vert	480.000	QP	36.4	17.3	11.0	32.1	32.6	46.0	13.4	
Vert	959.947	QP	33.7	22.3	13.3	30.8	38.5	46.0	7.5	
Vert	1653.990	PK	53.2	25.9	6.1	33.0	52.2	73.9	21.7	
Vert	2483.500	PK	46.8	27.4	6.7	32.0	48.9	73.9	25.0	
Vert	4960.000	PK	47.4	31.4	9.1	31.1	56.8	73.9	17.1	
Vert	7440.000	PK	42.5	36.5	10.0	32.5	56.5	73.9	17.4	Floor noise
Vert	9920.000	PK	40.8	38.8	11.0	32.9	57.7	73.9	16.2	Floor noise
Vert	1653.990	AV	50.8	25.9	6.1	33.0	49.8	53.9	4.1	
Vert	2483.500	AV	34.7	27.4	6.7	32.0	36.8	53.9	17.1	
Vert	4960.000	AV	37.1	31.4	9.1	31.1	46.5	53.9	7.4	
Vert	7440.000	AV	30.2	36.5	10.0	32.5	44.2	53.9	9.7	Floor noise
Vert	9920.000	AV	29.6	38.8	11.0	32.9	46.5	53.9	7.4	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4.4 m / 3.0 m) = 3.33 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission
(Reference Plot for band-edge)



Report No.	11723070H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	April 18, 2017
Temperature / Humidity	23 deg. C / 64 % RH
Engineer	Hiroyuki Furutaka
Mode	Tx, Hopping Off, 3DH5 2480 MHz

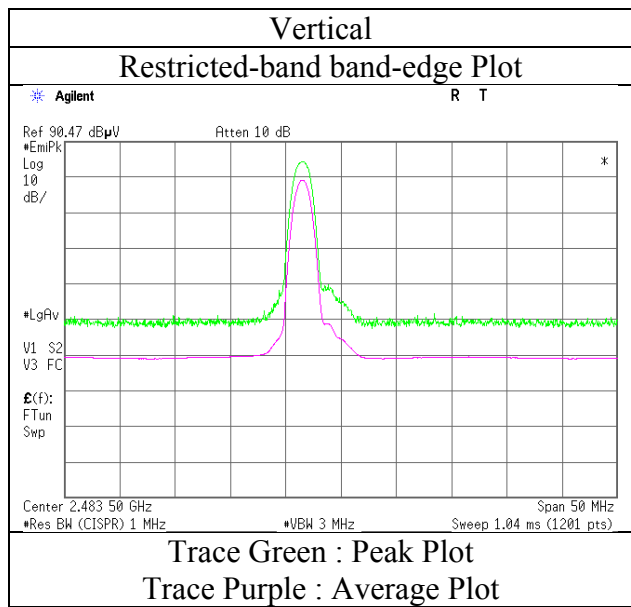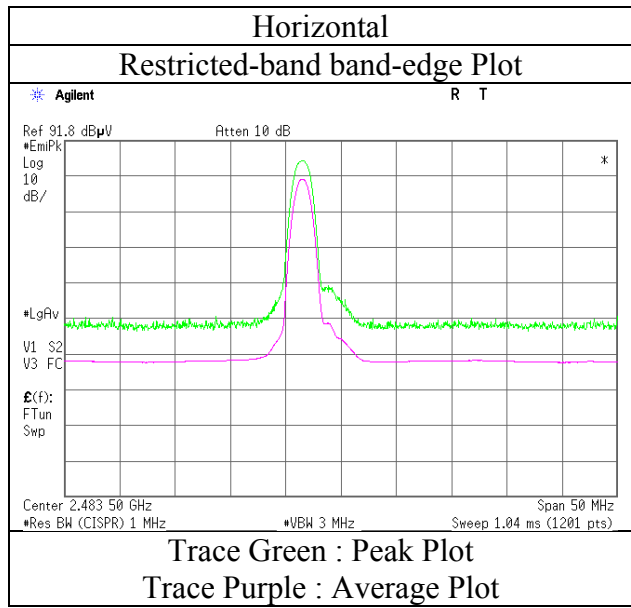

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)

Report No.	11723070H	
Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.4	No.4
Date	April 18, 2017	April 18, 2017
Temperature / Humidity	23 deg. C / 64 % RH	23 deg. C / 64 % RH
Engineer	Yuta Moriya	Hiroyuki Furutaka
	(1 GHz - 10 GHz)	(except for 1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz	

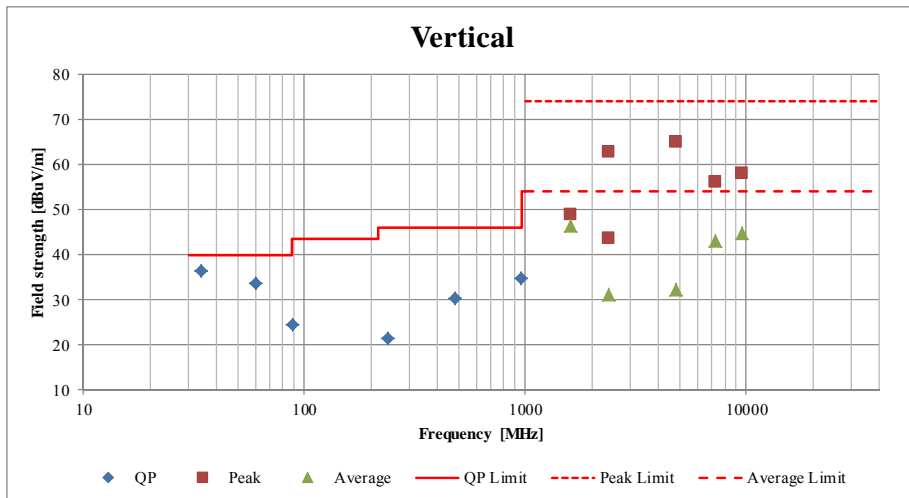
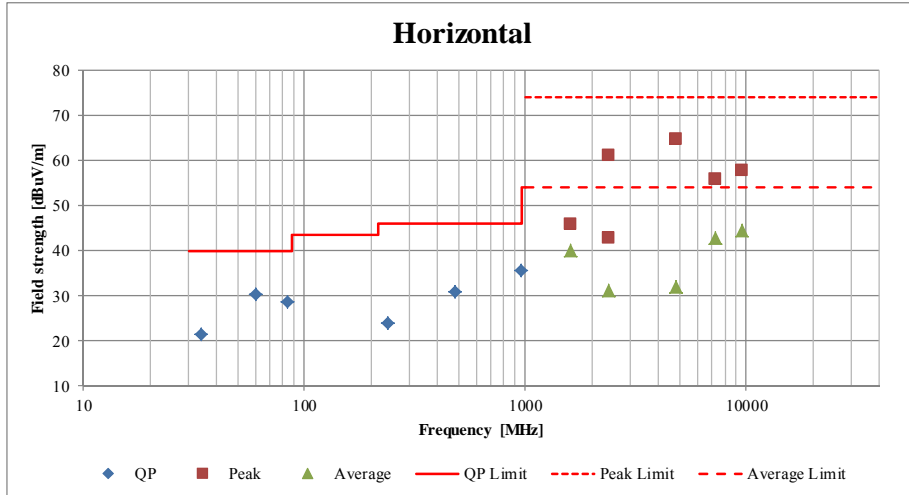


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx, Hopping Off, DH5



2402 MHz

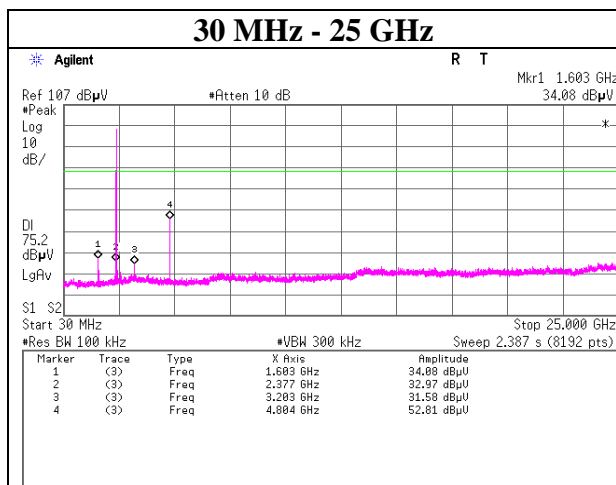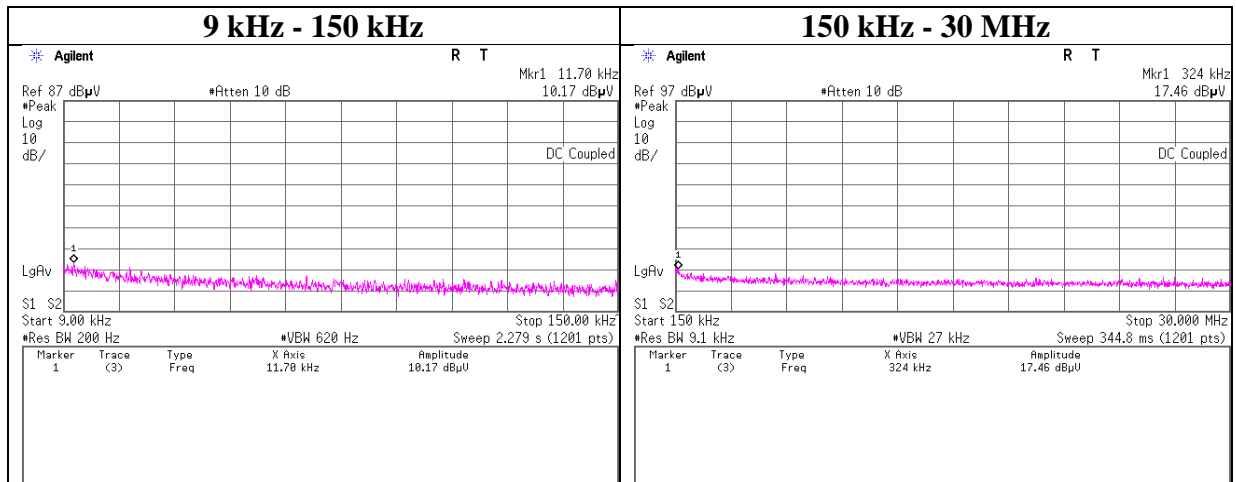

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx, Hopping Off, DH5

2441 MHz

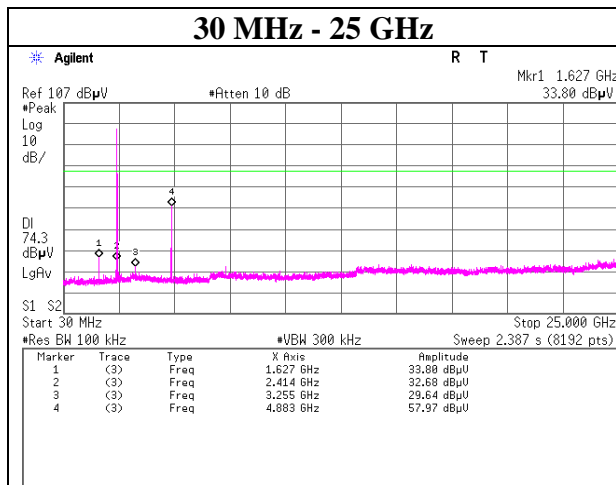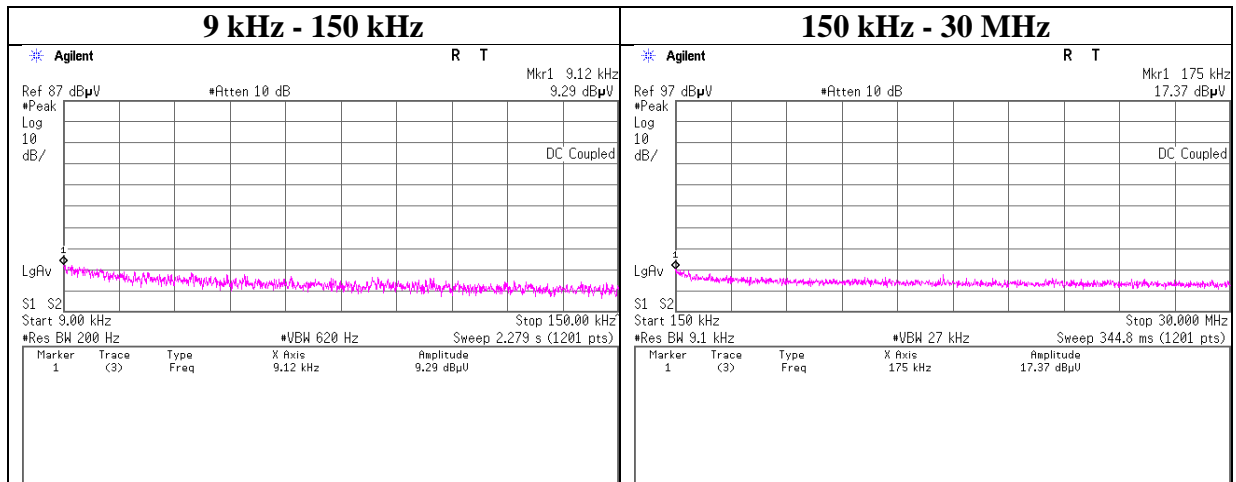

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx, Hopping Off, DH5

2480 MHz

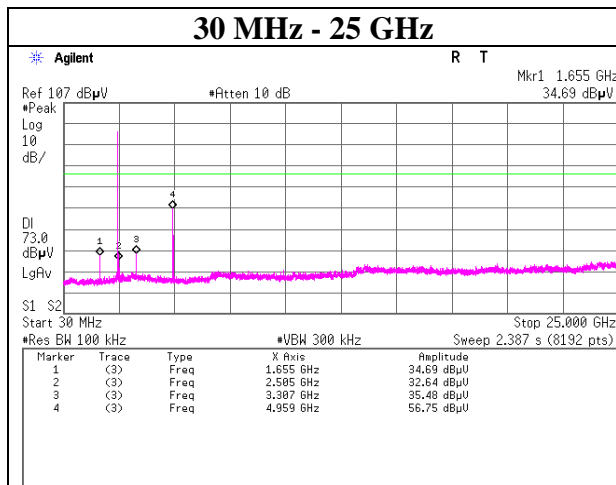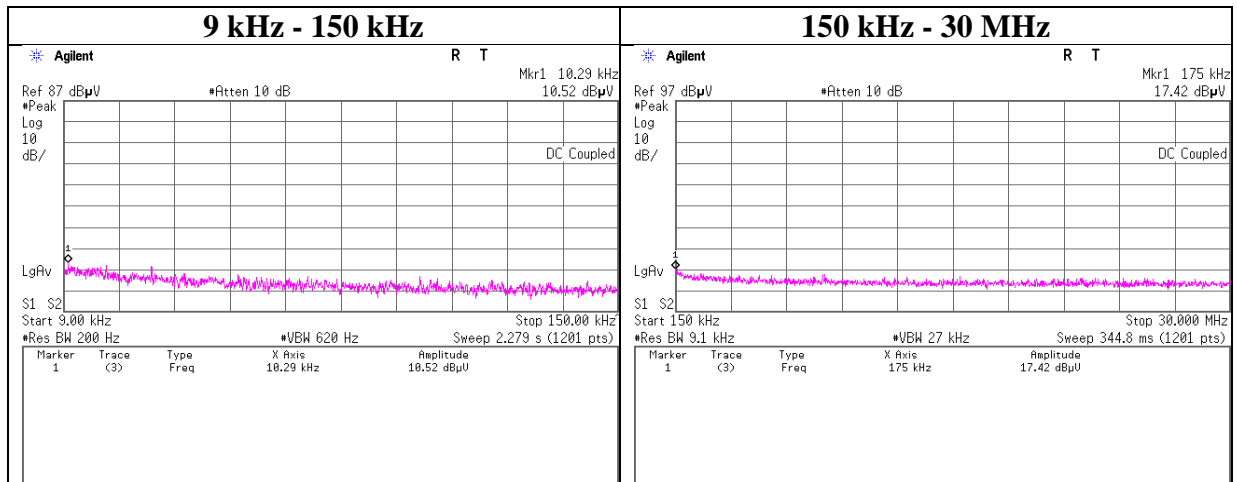

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx, Hopping Off, 3DH5



2402 MHz

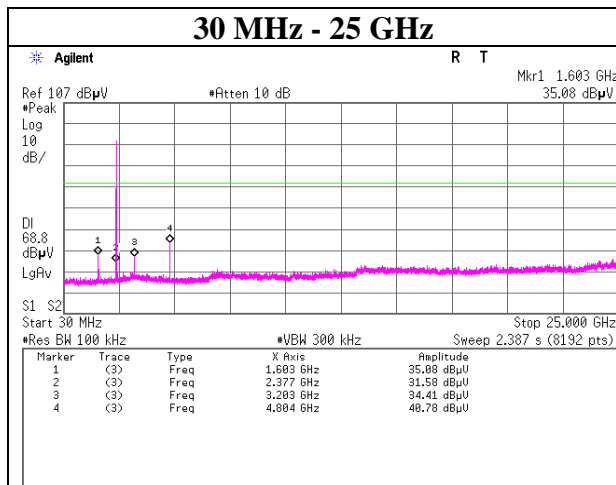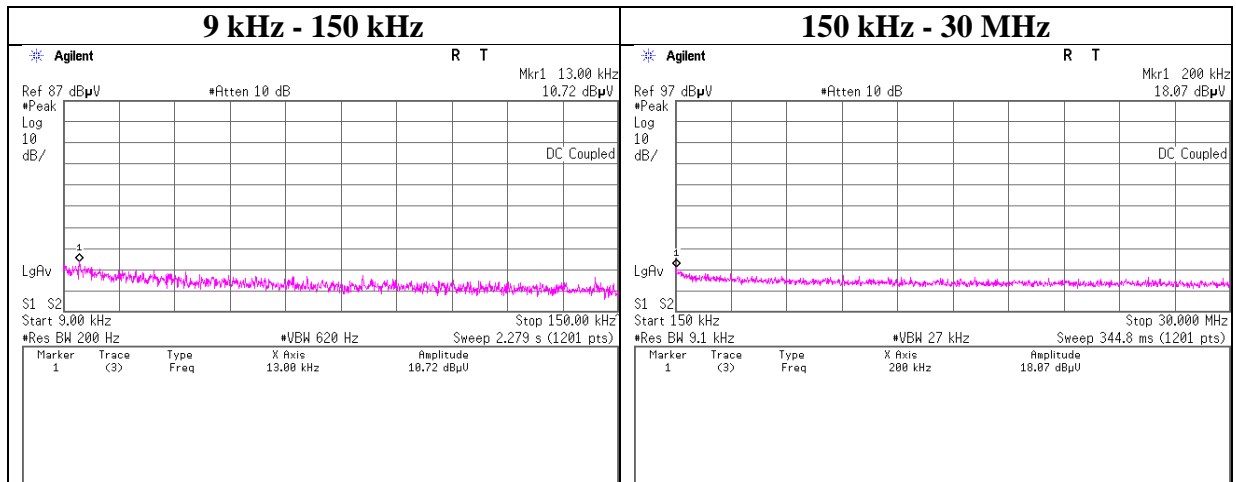

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx, Hopping Off, 3DH5

2441 MHz

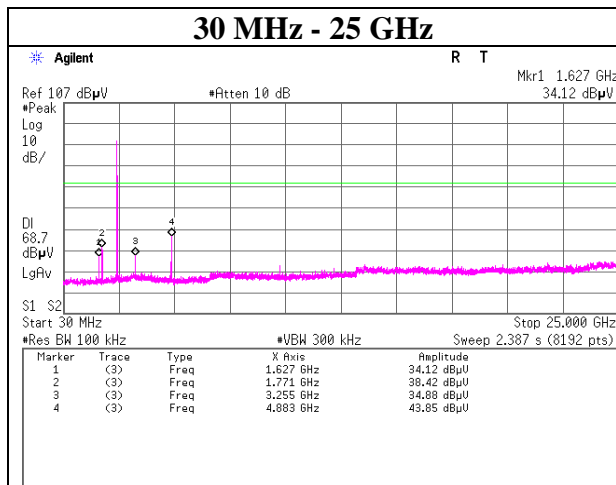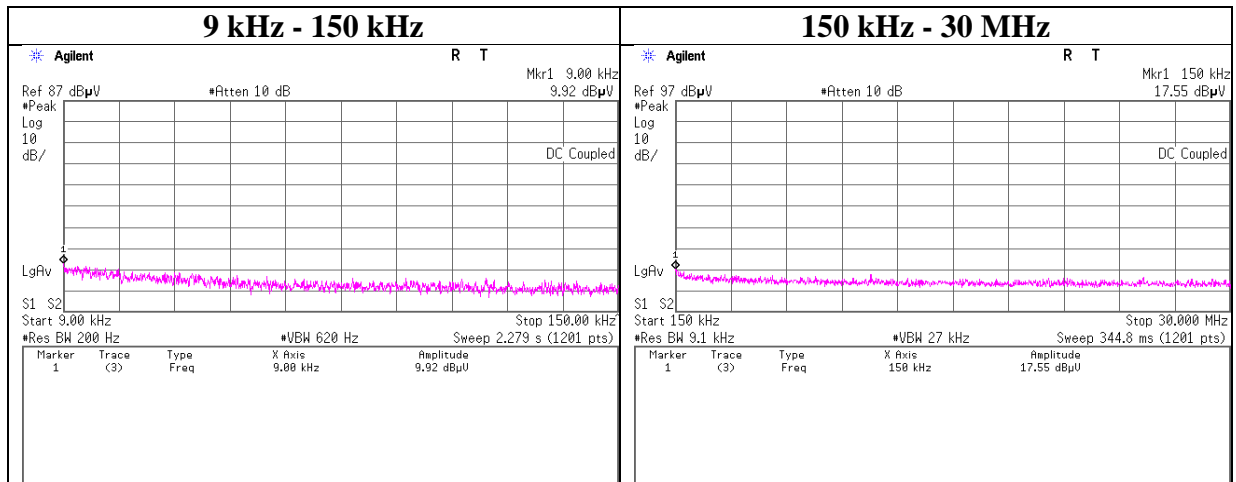

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx, Hopping Off, 3DH5

2480 MHz

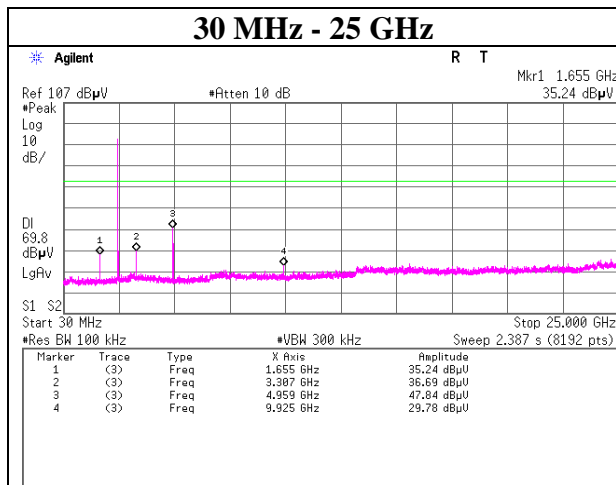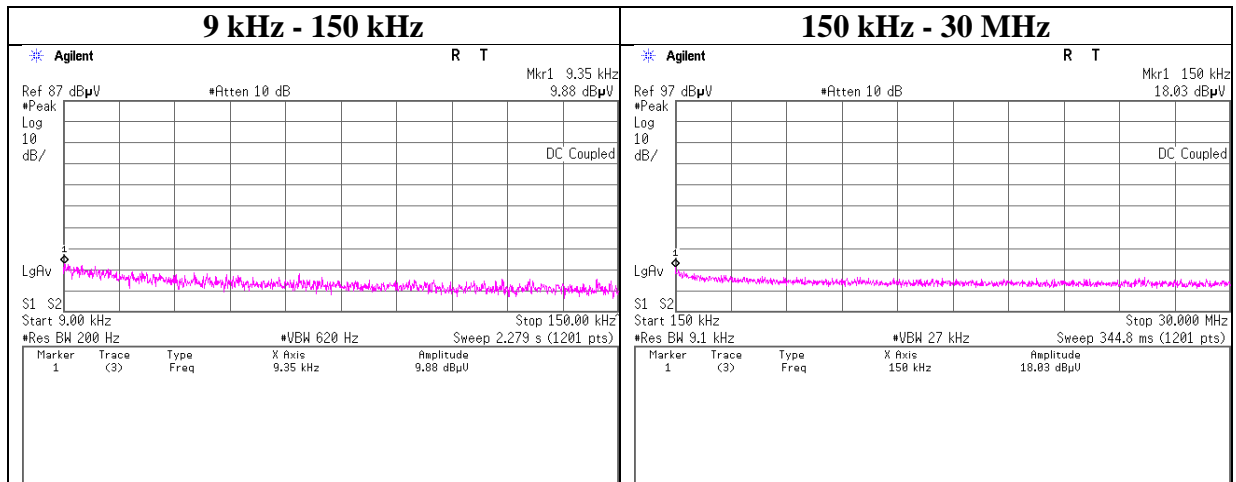

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Conducted Emission Band Edge compliance

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx DH5

Hopping On

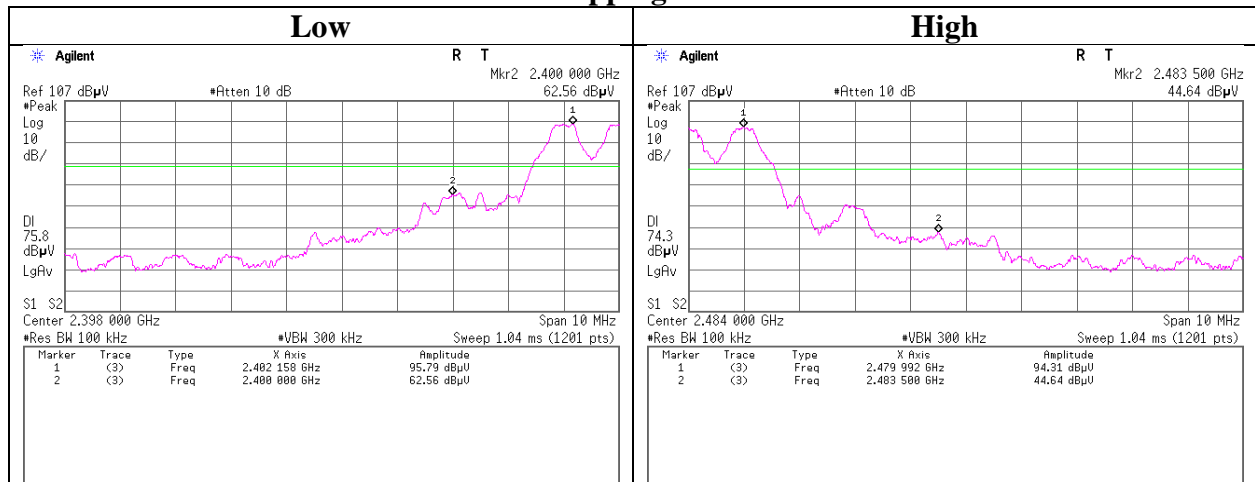

Hopping Off

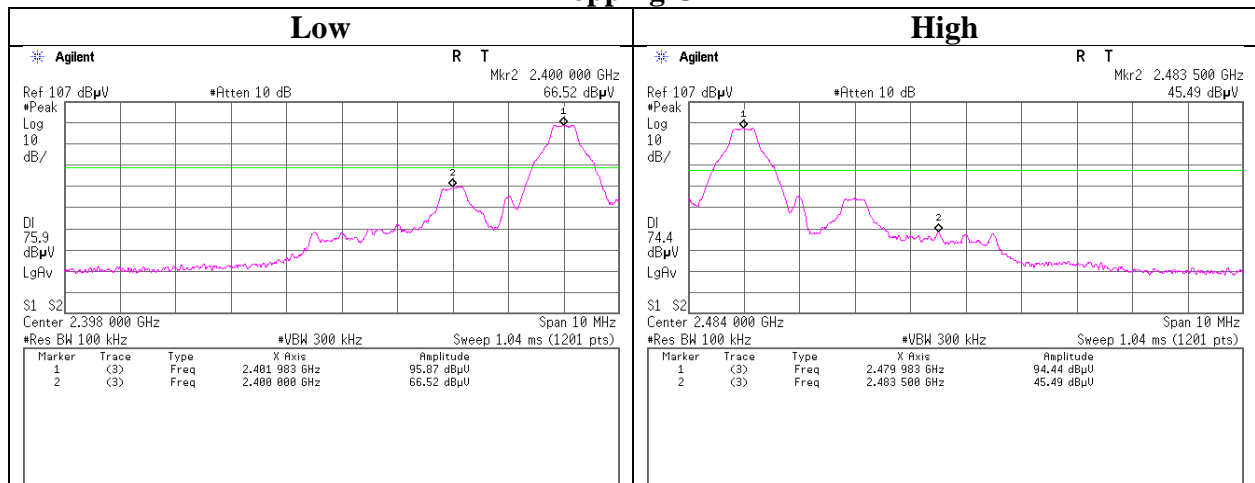

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


Conducted Emission Band Edge compliance

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx 3DH5

Hopping On

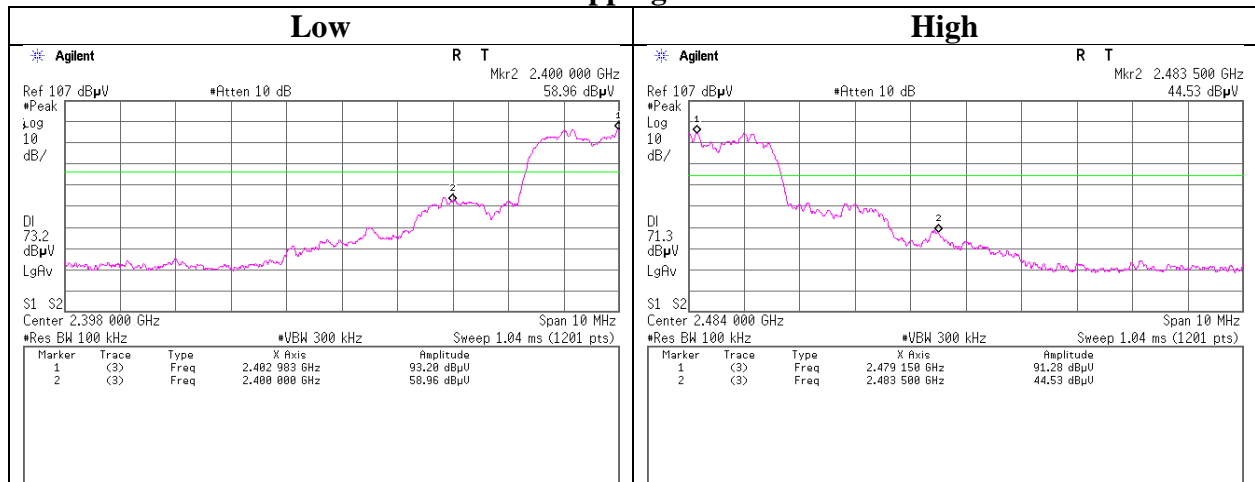

Hopping Off

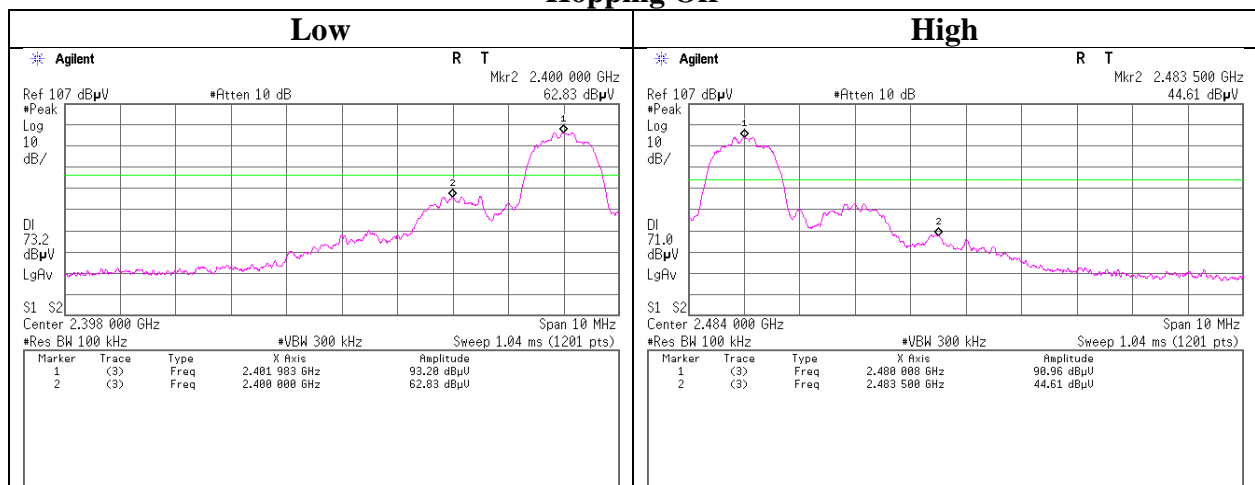

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

99% Occupied Bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx Hopping Off

Hopping Off, DH5

Hopping Off, 3DH5

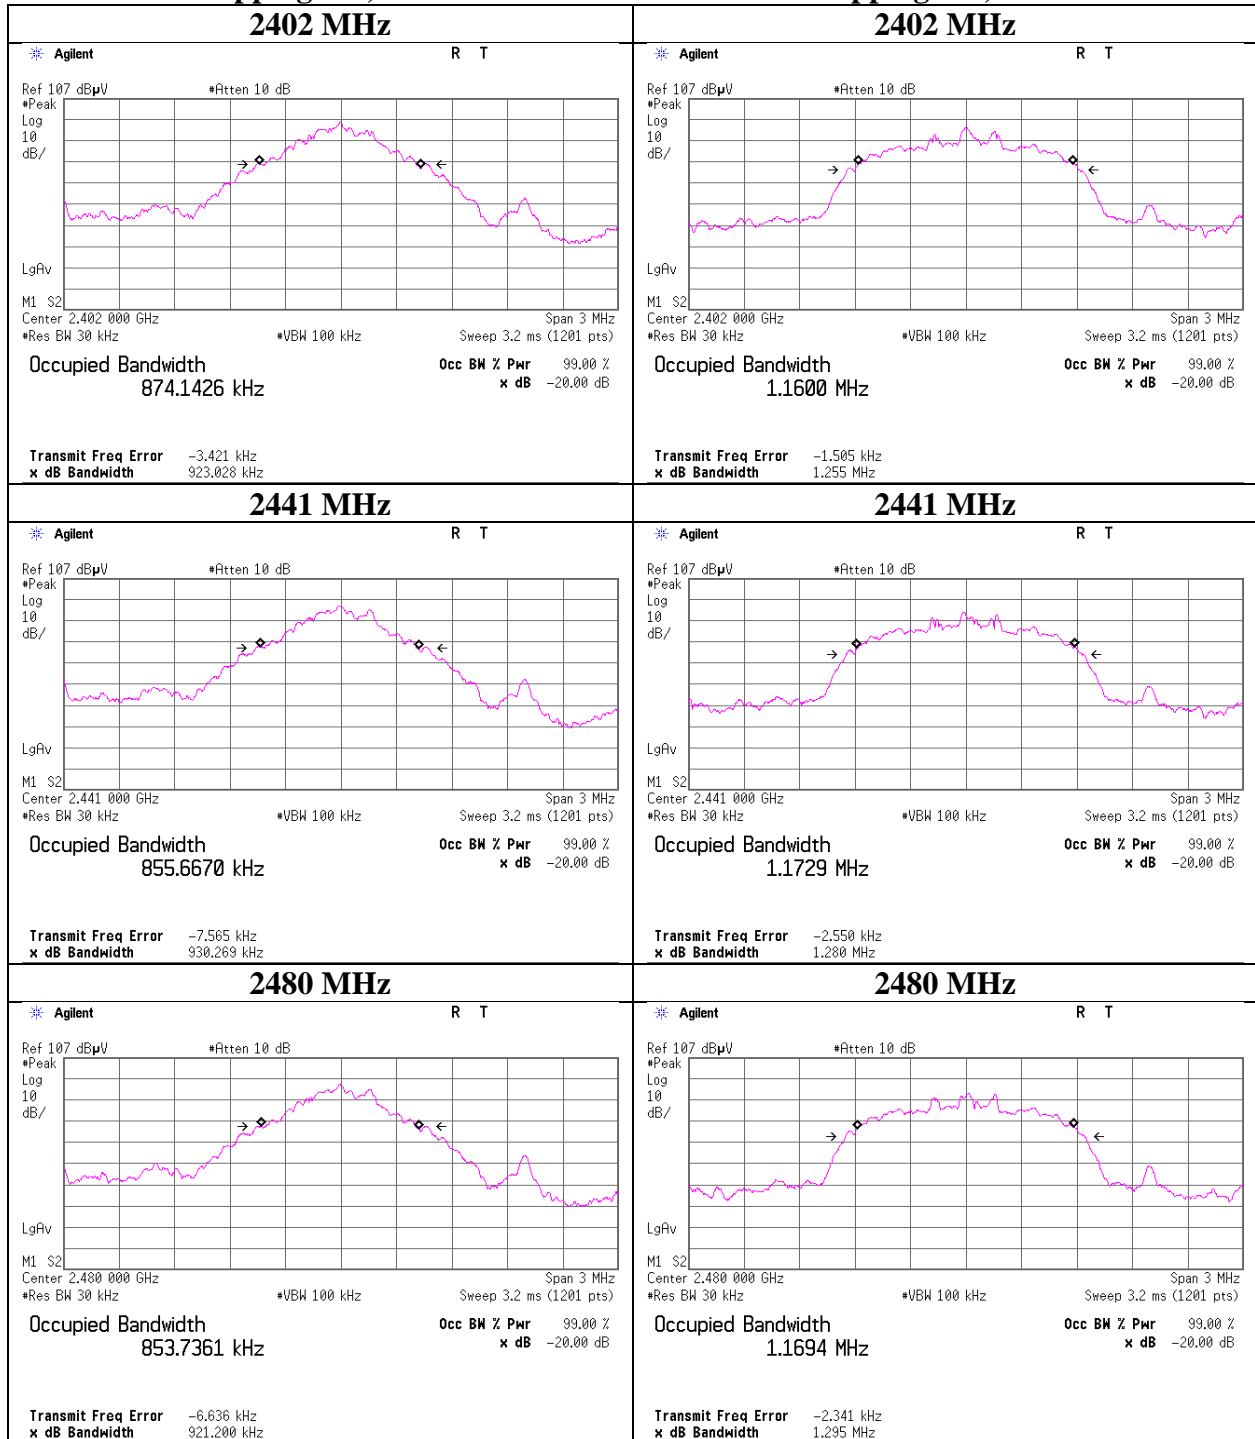

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

99% Occupied Bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11723070H
Date	April 21, 2017
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Tomoki Matsui
Mode	Tx Hopping On

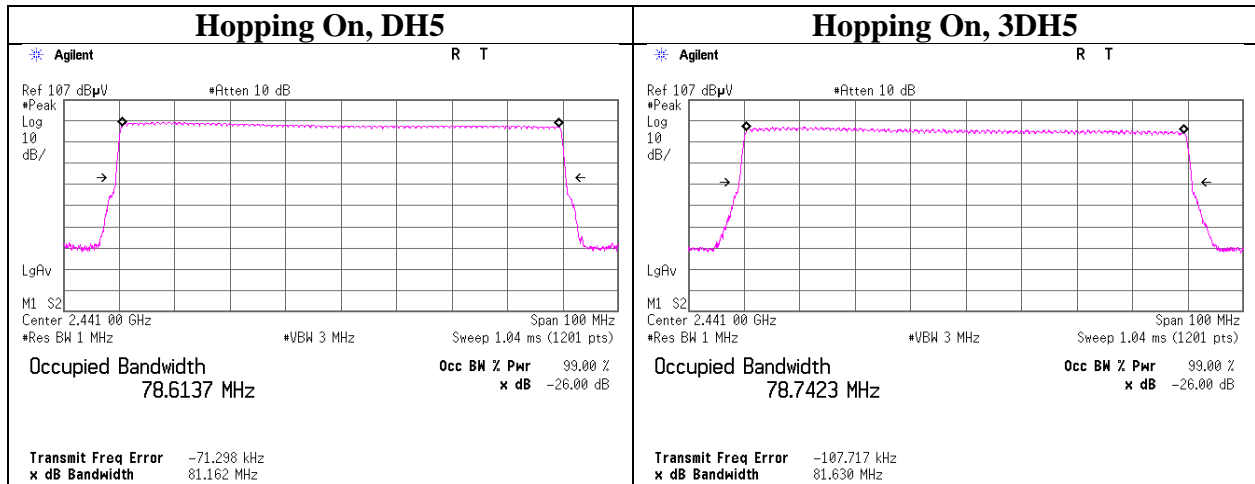

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2016/10/19 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	1501	RE	2017/01/20 * 12
MJM-26	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	RE	2016/08/17 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2016/09/28 * 12
MCC-141	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	RE	2016/06/21 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	00650	RE	2016/10/21 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2016/06/24 * 12
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	RE	2017/01/19 * 12
MHF-26	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	RE	2016/09/19 * 12
MTR-10	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	RE	2017/01/12 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2016/11/23 * 12
MLA-23	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	RE	2017/01/26 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2016/06/20 * 12
MAT-97	Attenuator	KEYSIGHT	8491A	MY52462282	RE	2016/10/31 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2017/03/27 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	AT	2016/05/19 * 12
MCC-173	Microwave Cable	Junkosha	MWX221	1409S496	AT	2017/03/13 * 12
MAT-22	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2017/03/21 * 12
MPM-13	Power Meter	Anritsu	ML2495A	0824014	AT	2016/11/02 * 12
MPSE-18	Power sensor	Anritsu	MA2411B	0738174	AT	2016/11/02 * 12
MOS-14	Thermo-Hygrometer	Custom	CTH-201	1401	AT	2017/01/20 * 12
MBM-10	Barometer	Sunoh	SBR121	832	AT	2016/12/12 * 36
MMM-12	DIGITAL HiTESTER	Hioki	3805	060500120	AT	2017/02/15 * 12
MCC-64	Coaxial Cable	UL Japan	-	-	AT	2017/03/24 * 12
MAT-10	Attenuator(10dB)	Weinschel Corp	2	BL1173	AT	2016/11/28 * 12
MSA-15	Spectrum Analyzer	Agilent	E4440A	MY46187105	AT	2016/10/13 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

**Test Item: RE: Radiated Emission test
AT: Antenna Terminal Conducted test**

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124