



# RADIO TEST REPORT

## Test Report No. 14299869H-A-R2

<b>Customer</b>	DENSO TEN Limited
<b>Description of EUT</b>	Car Audio
<b>Model Number of EUT</b>	TN0036A
<b>FCC ID</b>	BABTN0036A
<b>Test Regulation</b>	FCC Part 15 Subpart C
<b>Test Result</b>	Complied (Refer to SECTION 3)
<b>Issue Date</b>	November 27, 2023
<b>Remarks</b>	-

Representative Test Engineer

Yuichiro Yamazaki  
Engineer

Approved By

Ryota Yamanaka  
Engineer



CERTIFICATE 5107.02

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 20.0

## **ANNOUNCEMENT**

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

## **REVISION HISTORY**

### **Original Test Report No.: 14299869H-A**

This report is a revised version of 14299869H-A-R1. 14299869H-A-R1 is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14299869H-A	May 20, 2022	-
1	14299869H-A-R1	November 7, 2023	P.5 Section 2.2 Correction of Antenna Gain: Bluetooth: from -0.86 dBi to -0.84 dBi WLAN: from 4.31 dBi to 2.90 dBi
1	14299869H-A-R1	November 7, 2023	P.24 Maximum Peak Output Power Recalculation of e.i.r.p. by Antenna Gain changed
2	14299869H-A-R2	November 27, 2023	P.5 SECTION 2.1 Correction of Sample Receipt Date from November 20, 2021 to April 24, 2024
2	14299869H-A-R2	November 27, 2023	P.5 SECTION 2.2 Deletion of sentence about simultaneous transmission
2	14299869H-A-R2	November 27, 2023	P.11 Correction of No.10 Cable information: - Cable name: from Signal Cable to USB Cable - Shield (Cable and Connector) from Unshielded to Shielded

**Reference: Abbreviations (Including words undescribed in this report)**

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer Information .....</b>	<b>5</b>
<b>SECTION 2: Equipment Under Test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test Specification, Procedures &amp; Results.....</b>	<b>6</b>
<b>SECTION 4: Operation of EUT during testing .....</b>	<b>9</b>
<b>SECTION 5: Radiated Spurious Emission .....</b>	<b>12</b>
<b>SECTION 6: Antenna Terminal Conducted Tests.....</b>	<b>14</b>
<b>APPENDIX 1: Test data .....</b>	<b>15</b>
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation .....	15
Number of Hopping Frequency .....	19
Dwell time.....	21
Maximum Peak Output Power.....	24
Average Output Power.....	25
Radiated Spurious Emission .....	27
Conducted Spurious Emission .....	38
Conducted Emission Band Edge compliance .....	44
<b>APPENDIX 2: Test Instruments.....</b>	<b>46</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>48</b>
Radiated Spurious Emission .....	48
Antenna Terminal Conducted Tests.....	49

## **SECTION 1: Customer Information**

Company Name	DENSO TEN Limited
Address	2-28, Gosho-dori 1-Chome, Hyogo-ku, Kobe 652-8510 JAPAN
Telephone Number	+81-78-682-2159
Contact Person	Kaoru Abe

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
  - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
  - SECTION 1: Customer Information
  - SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
  - SECTION 4: Operation of EUT during testing
- \* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment Under Test (EUT)**

### **2.1 Identification of EUT**

Description	Car Audio
Model Number	TN0036A
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	April 24, 2022
Test Date	April 24 to May 10, 2022

### **2.2 Product Description**

#### **General Specification**

Rating	DC 12 V
Operating temperature	-20 deg. C to +65 deg. C (Performance assured temperature range)

#### **Radio Specification**

##### **Bluetooth (BR / EDR)**

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK)
Antenna Gain	-0.84 dBi (peak)

##### **WLAN (IEEE802.11a/11n-20)**

Equipment Type	Transceiver
Frequency of Operation	20 MHz Band: 5765 MHz
Type of Modulation	OFDM
Antenna Gain	2.90 dBi (peak)

\* This test report applies to Bluetooth part.

## **SECTION 3: Test Specification, Procedures & Results**

### **3.1 Test Specification**

Test Specification	FCC Part 15 Subpart C FCC Part 15 final revised on April 1, 2022 and effective May 2, 2022
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

\* The revision does not affect the test result conducted before its effective date.

### **3.2 Procedures and Results**

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	ANSI C63.10-2013 6. Standard test methods	Section 15.207	N/A	N/A	*1)
Carrier Frequency Separation	KDB 558074 D01 15.247 Meas Guidance v05r02	Section15.247(a)(1)	See data.	Complied a)	Conducted
20dB Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05r02	Section15.247(a)(1)		Complied a)	Conducted
Number of Hopping Frequency	KDB 558074 D01 15.247 Meas Guidance v05r02	Section15.247(a)(1)(iii)		Complied b)	Conducted
Dwell time	KDB 558074 D01 15.247 Meas Guidance v05r02	Section15.247(a)(1)(iii)		Complied c)	Conducted
Maximum Peak Output Power	KDB 558074 D01 15.247 Meas Guidance v05r02	Section15.247(a)(b)(1)		Complied d)	Conducted
Spurious Emission & Band Edge Compliance	KDB 558074 D01 15.247 Meas Guidance v05r02	Section15.247(d)	11.5 dB 926.3 MHz, QP, Hori.	Complied e) / f)	Conducted/ Radiated (above 30 MHz) *1)
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.  *1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line. *2) Radiated test was selected over 30 MHz based on section 15.247(d). a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation) b) Refer to APPENDIX 1 (data of Number of Hopping Frequency) c) Refer to APPENDIX 1 (data of Dwell time) d) Refer to APPENDIX 1 (data of Maximum Peak Output Power) e) Refer to APPENDIX 1 (data of Conducted Spurious Emission) f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)					
Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration					

#### **FCC Part 15.31 (e)**

This EUT provides stable voltage constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

### 3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .

#### Radiated emission

Measurement distance	Frequency range		Uncertainty (+/-)
3 m	9 kHz to 30 MHz		3.2 dB
10 m			3.0 dB
3 m	30 MHz to 200 MHz	Horizontal	4.8 dB
		Vertical	5.0 dB
	200 MHz to 1000 MHz	Horizontal	5.1 dB
		Vertical	6.2 dB
10 m	30 MHz to 200 MHz	Horizontal	4.8 dB
		Vertical	4.8 dB
	200 MHz to 1000 MHz	Horizontal	5.0 dB
		Vertical	5.0 dB
3 m	1 GHz to 6 GHz		4.9 dB
	6 GHz to 18 GHz		5.2 dB
1 m	10 GHz to 26.5 GHz		5.4 dB
	26.5 GHz to 40 GHz		5.4 dB
10 m	1 GHz to 18 GHz		5.4 dB

#### Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.5 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.7 dB

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

\*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

### 3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.



## SECTION 4: Operation of EUT during testing

### 4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
<p>*EUT has the power settings by the software as follows;            Power Setting:      BDR:   +6.5 dBm                                      EDR:   +6.0 dBm            Software:            Diagnostics Mode Version: 1.0                                      (Date: November 25, 2021, Storage location: EUT memory)</p> <p>*This setting of software is the worst case.            Any conditions under the normal use do not exceed the condition of setting.            In addition, end users cannot change the settings of the output power of the product.</p>	

#### Details of Operating Mode(s)

Test Item	Mode	Hopping	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx 3DH5 *1)	Off	2402 MHz
Radiated Spurious Emission (Above 1 GHz) Conducted Spurious Emission	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	-
Maximum Peak Output Power	Tx DH5 Tx 2DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2441 MHz 2480 MHz

\*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)


\*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.

\*It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.

\*1) Conducted emissions and Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.

## 4.2 Configuration and Peripherals

### for Antenna Terminal test

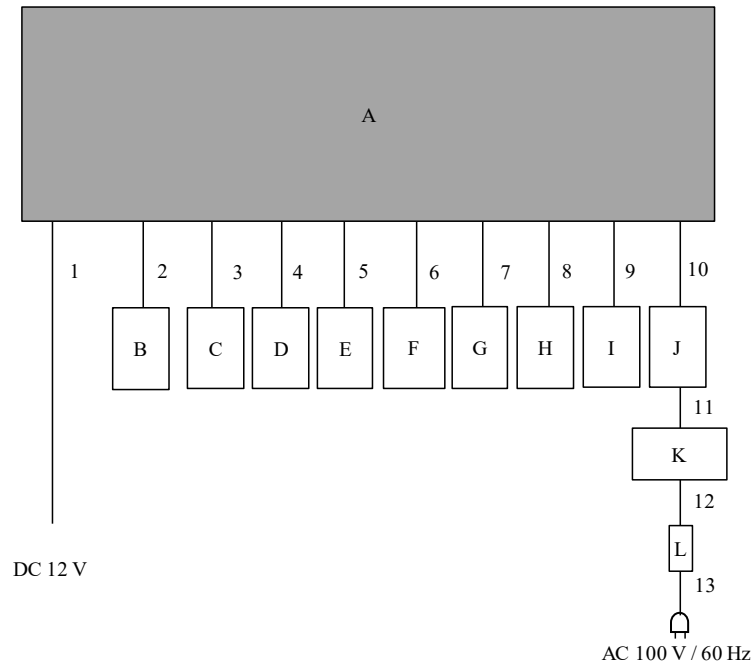

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.


### Description of EUT and Support Equipment

No.	Item	Model Number	Serial Number	Manufacturer	Remarks
A	Car Audio	TN0036A	114000-83790000	DENSO TEN Limited	EUT
B	Steering switch	84250-58150-B0	No.1	TOKAI RIKA	-
C	Microphone module	86730-78010	No.10	Panasonic	-
D	Back camera	867B0-78070	No.5	Panasonic	-
E	Speaker Dummy Load	SP Dummy	No.4	DENSO TEN Limited	-
F	AM/FM Sharkfin AMP	86760-K0010	No.4	YOKOWO	-
G	DAB Antenna AMP	863C0-60050	No.PQB02919	DENSO TEN Limited	-
H	GNSS Antenna	86880-78010	UI034347	HARADA	-
I	USB I/F Box	86190-78020	500881	Panasonic	-
J	Jig Board	-	-	-	-
K	Laptop PC	PR63PBAA337AD7X	6F053913H	TOSHIBA	-
L	AC Adapter	PA51770-1ACA	FX10800NSKACC	TOSHIBA	-

### List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	4.0	Unshielded	Unshielded	-
2	Signal Cable	3.0	Unshielded	Unshielded	-
3	Audio Cable	3.0	Shielded	Shielded	-
4	Signal Cable	5.0	Unshielded	Unshielded	-
5	Speaker Cable	3.0	Unshielded	Unshielded	-
6	Antenna Cable	2.0	Shielded	Shielded	-
7	Antenna Cable	2.0	Shielded	Shielded	-
8	Antenna Cable	2.0	Shielded	Shielded	-
9	Signal Cable	2.0	Unshielded	Unshielded	-
10	Signal Cable	2.3	Unshielded	Unshielded	-
11	USB Cable	1.0	Shielded	Shielded	-
12	DC Cable	1.7	Unshielded	Unshielded	-
13	AC Cable	0.8	Unshielded	Unshielded	-

**for Radiated emission test**

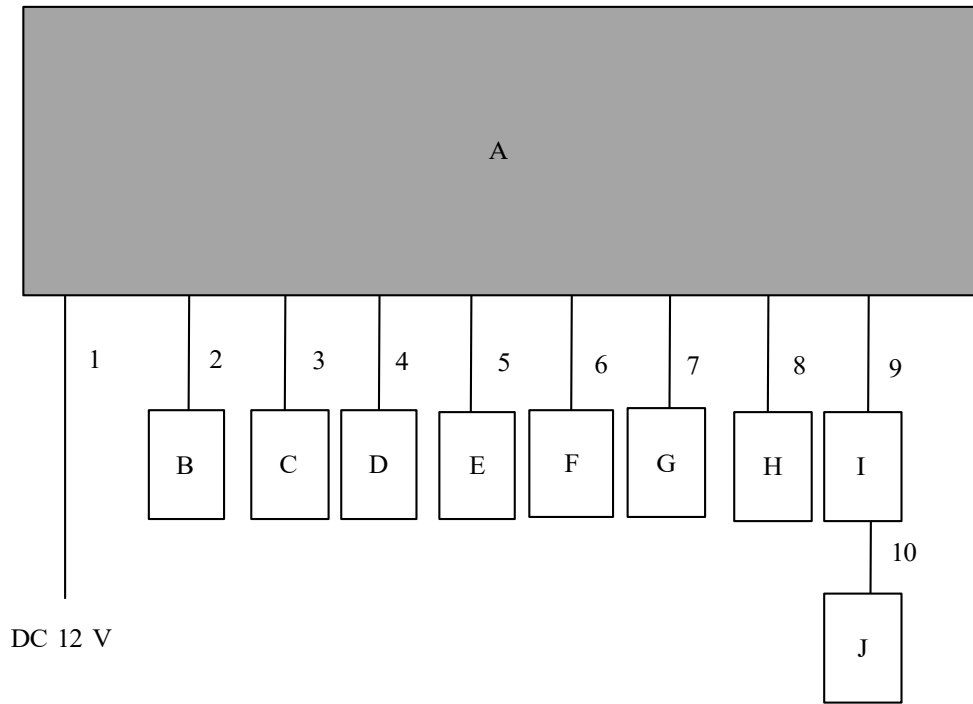

\* Cabling and setup(s) were taken into consideration and test data was taken under worst case conditions.

**Description of EUT and Support Equipment**

No.	Item	Model Number	Serial Number	Manufacturer	Remarks
A	Car Audio	TN0036A	114000-83790000	DENSO TEN Limited	EUT
B	Steering switch	84250-58150-B0	No.1	TOKAI RIKA	-
C	Microphone module	86730-78010	No.10	Panasonic	-
D	Back camera	867B0-78070	No.5	Panasonic	-
E	Speaker Dummy Load	SP Dummy	No.4	DENSO TEN Limited	-
F	AM/FM Sharkfin AMP	86760-K0010	No.4	YOKOWO	-
G	DAB Antenna AMP	863C0-60050	No.PQB02919	DENSO TEN Limited	-
H	GNSS Antenna	86880-78010	UI034347	HARADA	-
I	USB I/F Box	86190-78020	500881	Panasonic	-
J	iPhone	MD297B/A	C34JJ55EDTWD	Apple	-

**List of Cables Used**

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	4.0	Unshielded	Unshielded	-
2	Signal Cable	3.0	Unshielded	Unshielded	-
3	Audio Cable	3.0	Shielded	Shielded	-
4	Signal Cable	5.0	Unshielded	Unshielded	-
5	Speaker Cable	3.0	Unshielded	Unshielded	-
6	Antenna Cable	2.0	Shielded	Shielded	-
7	Antenna Cable	2.0	Shielded	Shielded	-
8	Antenna Cable	2.0	Shielded	Shielded	-
9	Signal Cable	2.0	Unshielded	Unshielded	-
10	USB Cable	1.0	Shielded	Shielded	-

## **SECTION 5: Radiated Spurious Emission**

### **Test Procedure**

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

\*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

**Figure 2: Test Setup**


Below 1 GHz

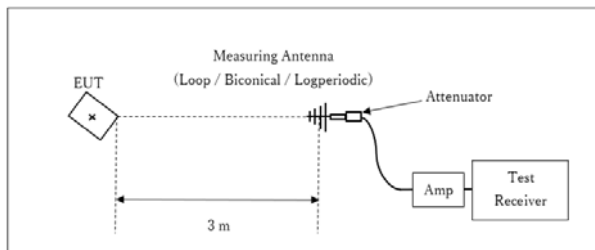

× : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

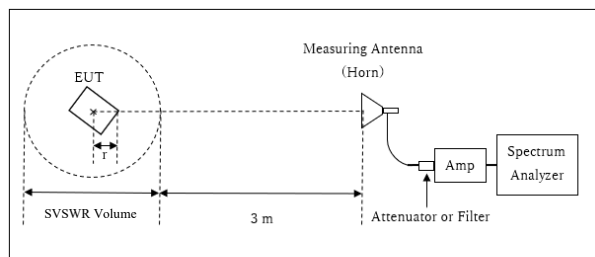

r : Radius of an outer periphery of EUT  
× : Center of turn table

other than DH5 2402 MHz

Distance Factor:  $20 \times \log(3.85 \text{ m} / 3.0 \text{ m}) = 2.17 \text{ dB}$

\* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 3.85 \text{ m}$

SVSWR Volume : 2.0 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r = 0.15 m

DH5 2402 MHz

Distance Factor:  $20 \times \log(3.60 \text{ m} / 3.0 \text{ m}) = 1.59 \text{ dB}$


\* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 3.60 \text{ m}$

SVSWR Volume : 1.5 m

(SVSWR Volume has been calibrated based on CISPR 16-1-4.)

r = 0.15 m

10 GHz to 26.5 GHz

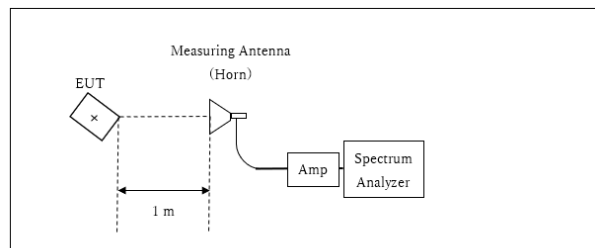

× : Center of turn table

Distance Factor:  $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

\* Test Distance: 1 m

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement Range** : 30 MHz to 26.5 GHz  
**Test Data** : APPENDIX  
**Test Result** : Pass

## **SECTION 6: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

<b>Test</b>	<b>Span</b>	<b>RBW</b>	<b>VBW</b>	<b>Sweep time</b>	<b>Detector</b>	<b>Trace</b>	<b>Instrument Used</b>
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	200 kHz	620 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

\*1) Peak hold was applied as Worst-case measurement.

\*2) Reference data

\*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

(9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz) \*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.  
The equipment and cables were not used for factor 0 dB of the data sheets.

**Test Data** : **APPENDIX**  
**Test Result** : **Pass**

**APPENDIX 1: Test data**

**20dB Bandwidth, 99% Occupied Bandwidth and Carrier Frequency Separation**


Test place	Ise EMC Lab. No.6 Measurement Room	
Date	May 9, 2022	May 10, 2022
Temperature / Humidity	26 deg. C / 33 % RH	24 deg. C / 39 % RH
Engineer	Nachi Konegawa	Takumi Nishida
Mode	Tx, Hopping Off, Tx, Hopping On	

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.944	884.768	1.000	$\geq 0.629$
DH5	2441.0	0.942	876.833	1.000	$\geq 0.628$
DH5	2480.0	0.992	881.433	1.000	$\geq 0.661$
DH5	Hopping On	-	78623.200	-	-
3DH5	2402.0	1.313	1207.900	1.000	$\geq 0.875$
3DH5	2441.0	1.311	1203.200	1.000	$\geq 0.874$
3DH5	2480.0	1.309	1202.600	1.000	$\geq 0.873$
3DH5	Hopping On	-	78666.400	-	-

Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).


No limit applies to 20 dB Bandwidth.

**20dB Bandwidth and 99% Occupied Bandwidth**

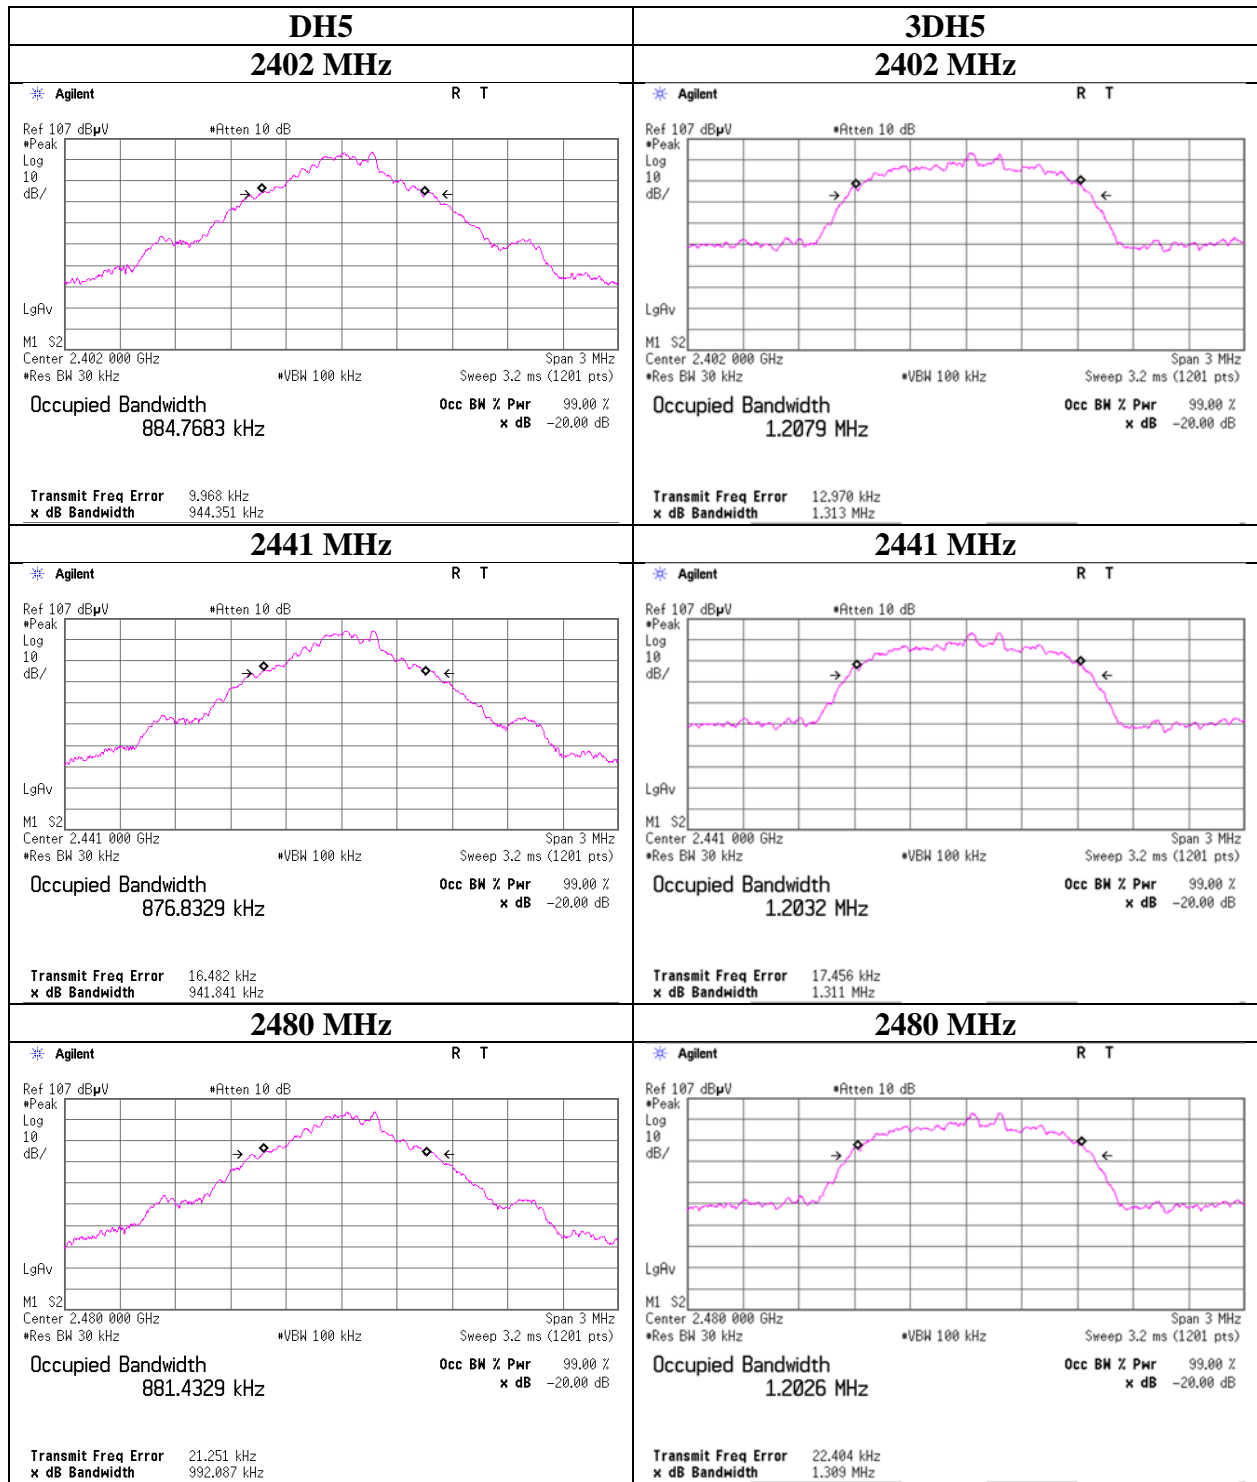




### 20dB Bandwidth and 99% Occupied Bandwidth

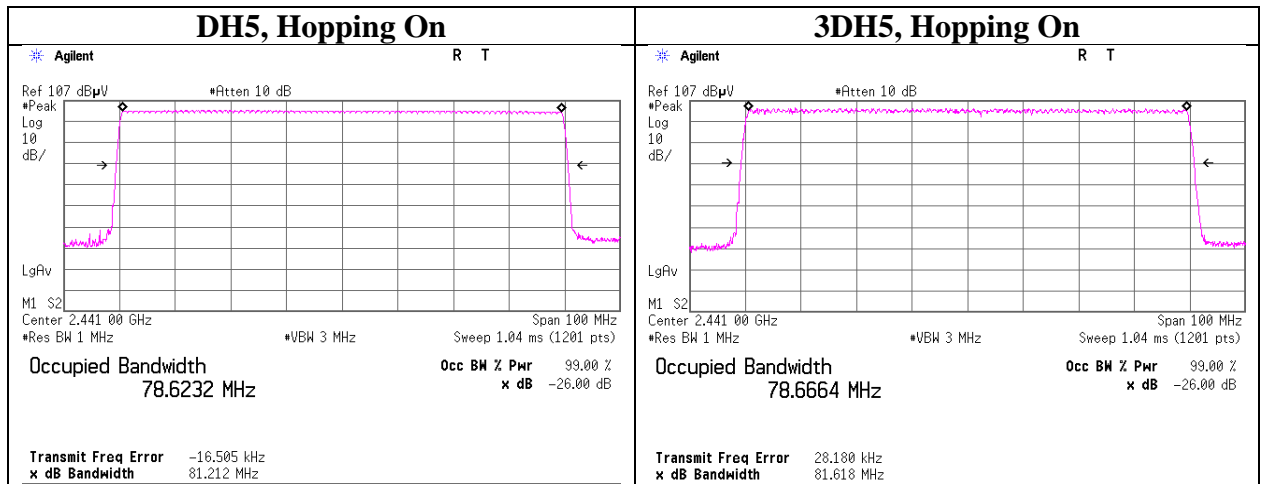

### Carrier Frequency Separation

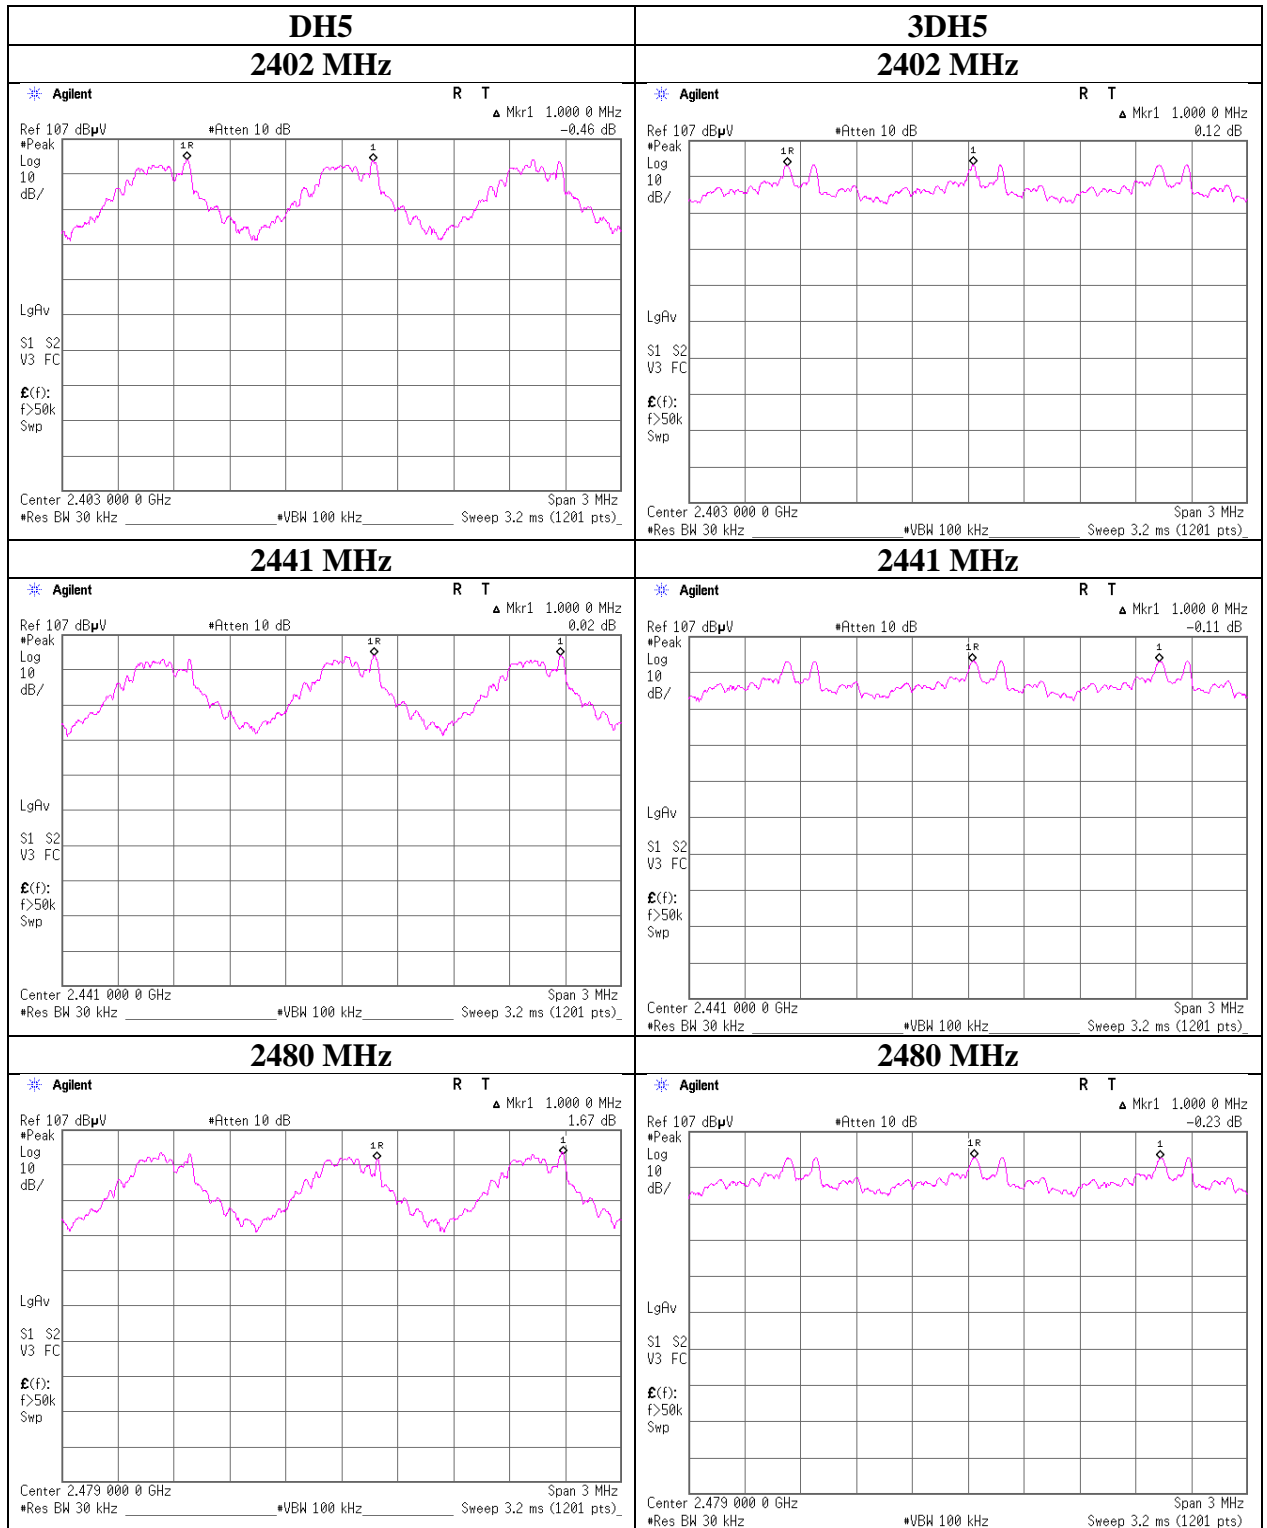

---


### Number of Hopping Frequency

Test place	Ise EMC Lab. No.6 Measurement Room	
Date	May 9, 2022	May 10, 2022
Temperature / Humidity	26 deg. C / 33 % RH	24 deg. C / 39 % RH
Engineer	Nachi Konegawa	Takumi Nishida
Mode	Tx, Hopping On	

Mode	Number of channel [channels]	Limit [channels]
DH5	79	$\geq 15$
3DH5	79	$\geq 15$

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

**Number of Hopping Frequency**

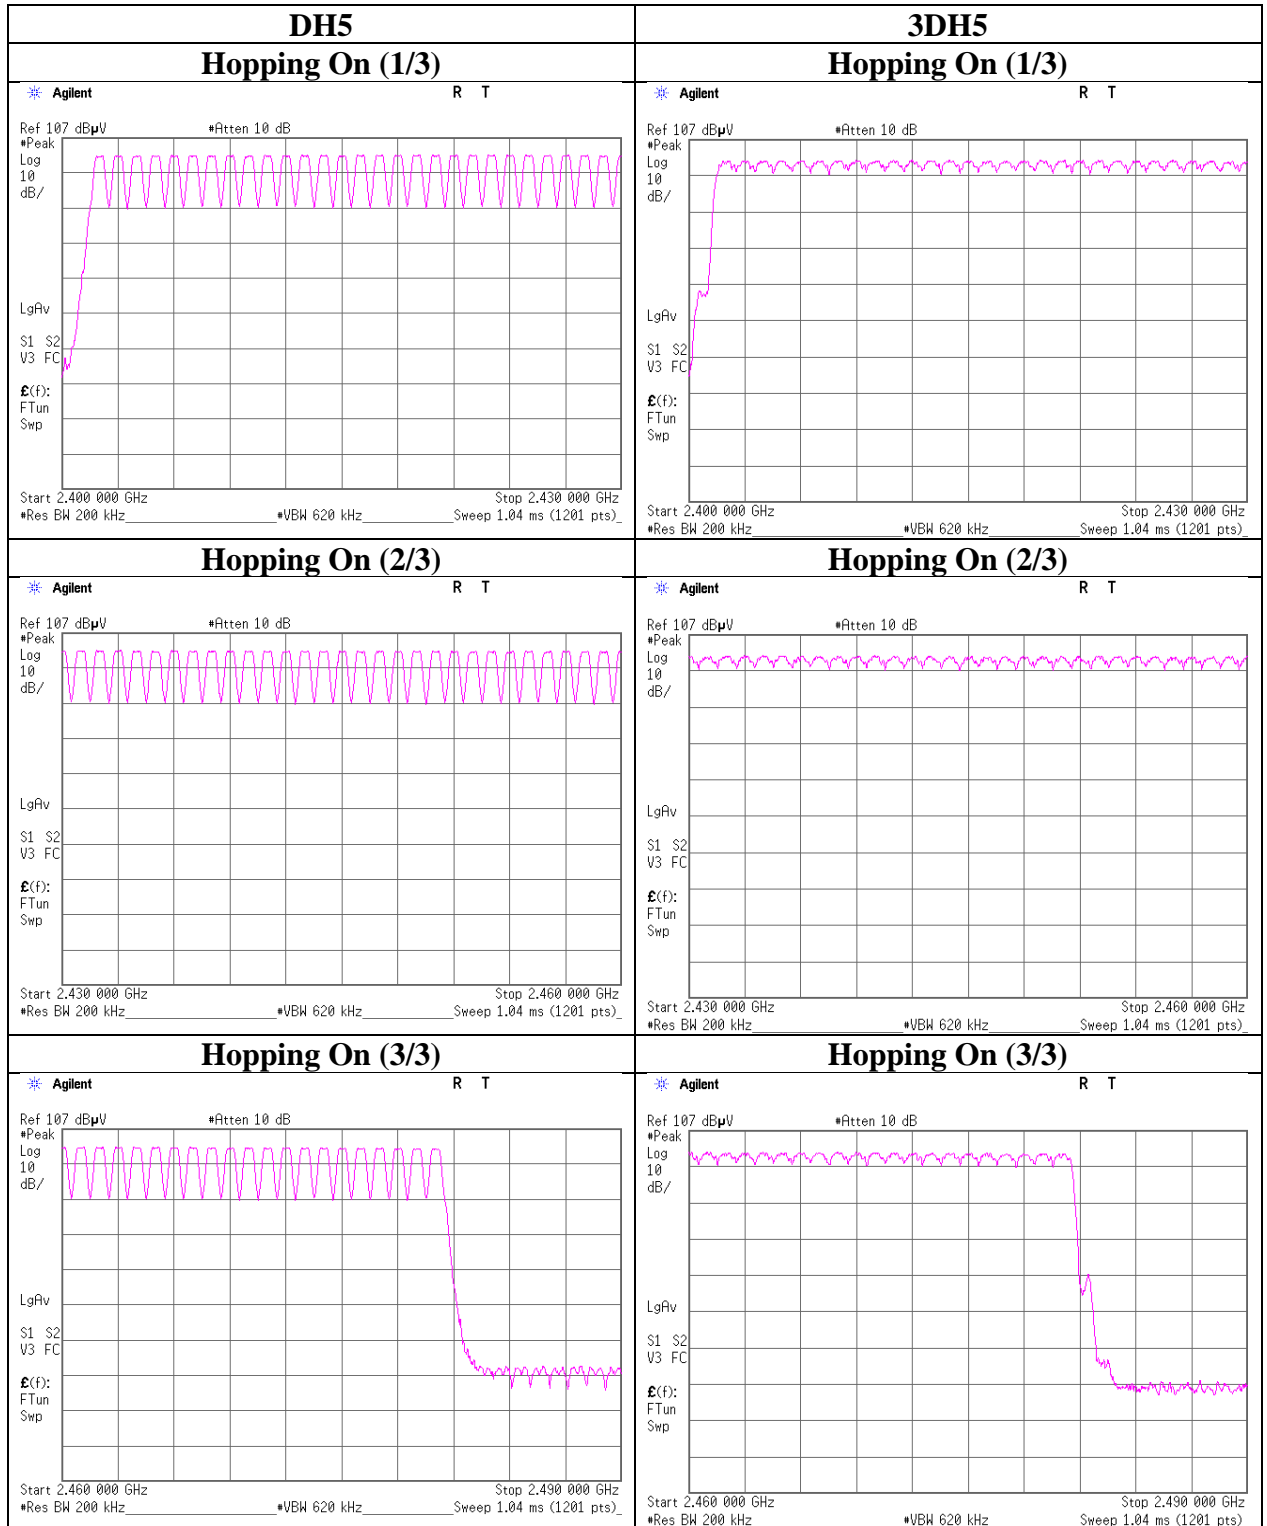

### Dwell time

Test place	Ise EMC Lab. No.6 Measurement Room	
Date	May 9, 2022	May 10, 2022
Temperature / Humidity	26 deg. C / 33 % RH	24 deg. C / 39 % RH
Engineer	Nachi Konegawa	Takumi Nishida
Mode	Tx, Hopping On	

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period	Length of transmission [ms]	Result [ms]	Limit [ms]
DH1	50.8 times / 5 s x 31.6 s = 322 times	0.422	136	400
DH3	25.8 times / 5 s x 31.6 s = 164 times	1.685	276	400
DH5	20.8 times / 5 s x 31.6 s = 132 times	2.940	388	400
3DH1	50.0 times / 5 s x 31.6 s = 316 times	0.426	135	400
3DH3	26.6 times / 5 s x 31.6 s = 169 times	1.685	285	400
3DH5	20.8 times / 5 s x 31.6 s = 132 times	2.940	388	400

Sample Calculation

Result = Number of transmission x Length of transmission

\*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	51	50	51	50	52	50.8
DH3	27	26	23	26	27	25.8
DH5	18	20	22	22	22	20.8
3DH1	49	51	49	51	50	50
3DH3	28	27	28	23	27	26.6
3DH5	22	19	19	22	22	20.8

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in  $N \times 0.4$  s, where  $N$  is the number of channels being used in the hopping sequence ( $20 \leq N \leq 79$ ), is always less than 0.4 s regardless of packet size. This is confirmed in the test report for  $N = 79$ .

**Dwell time**

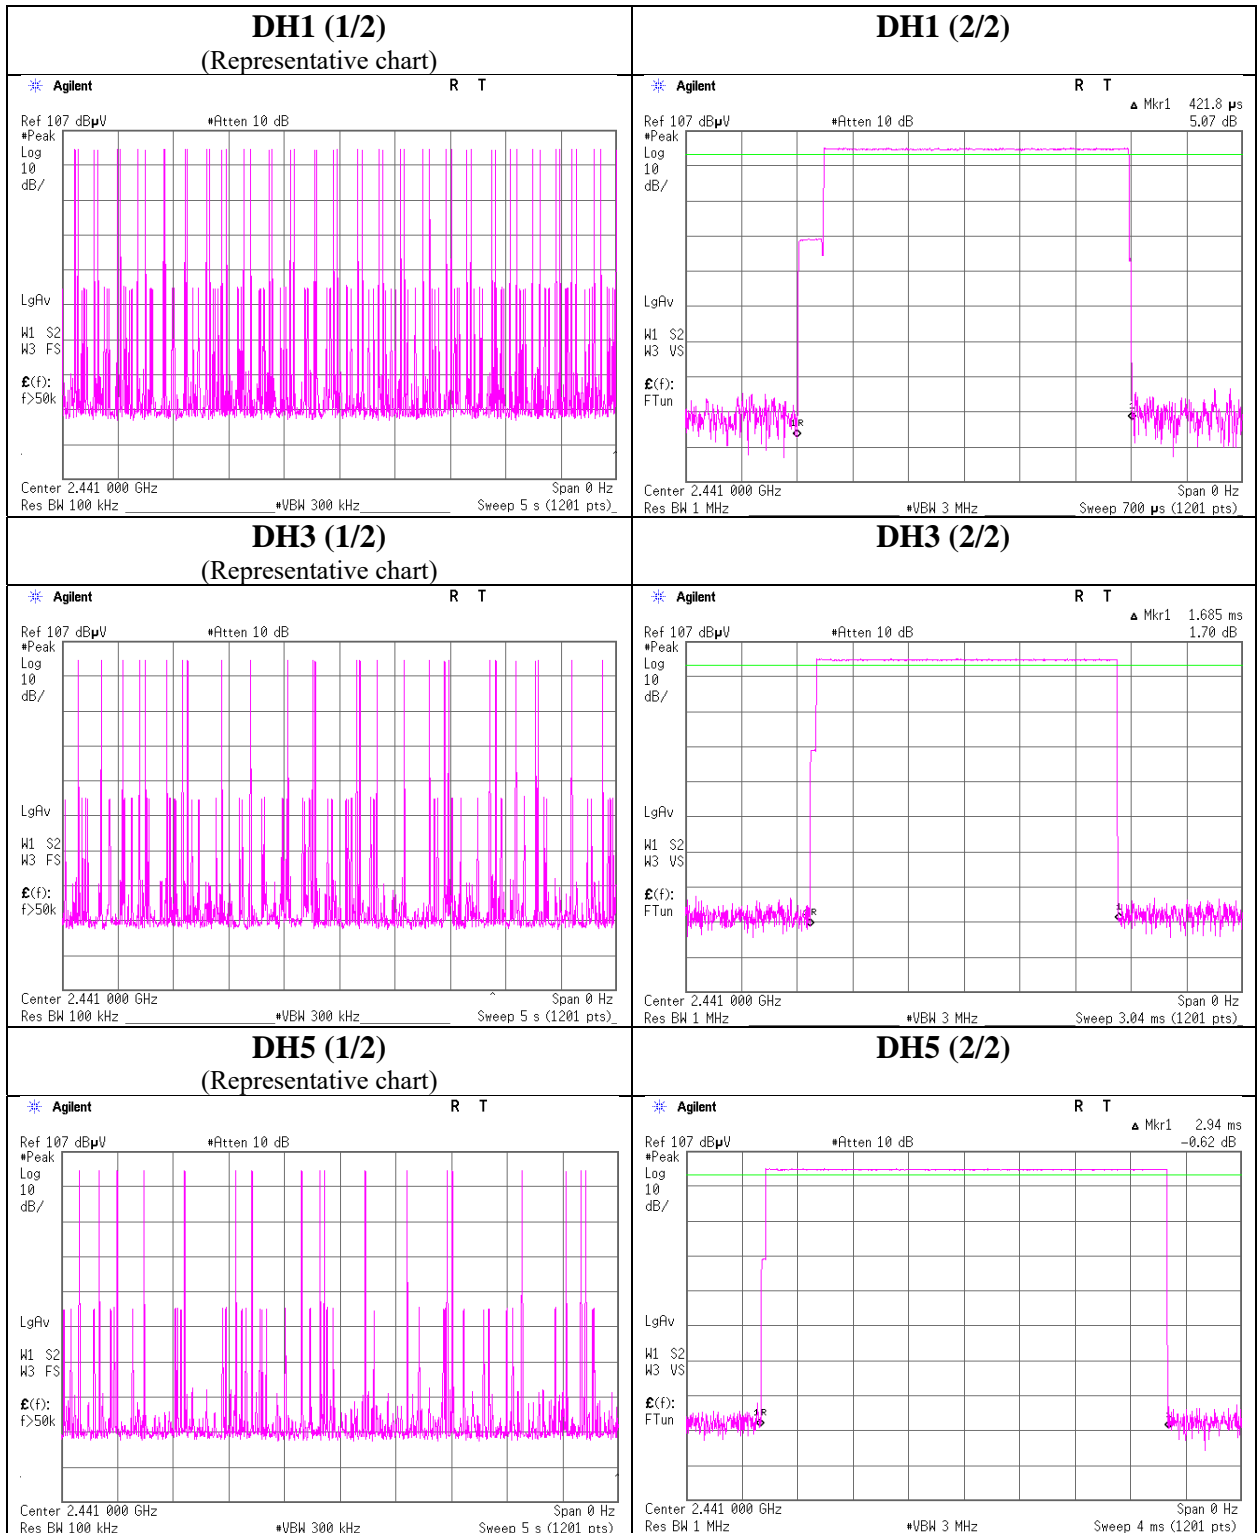

Dwell time

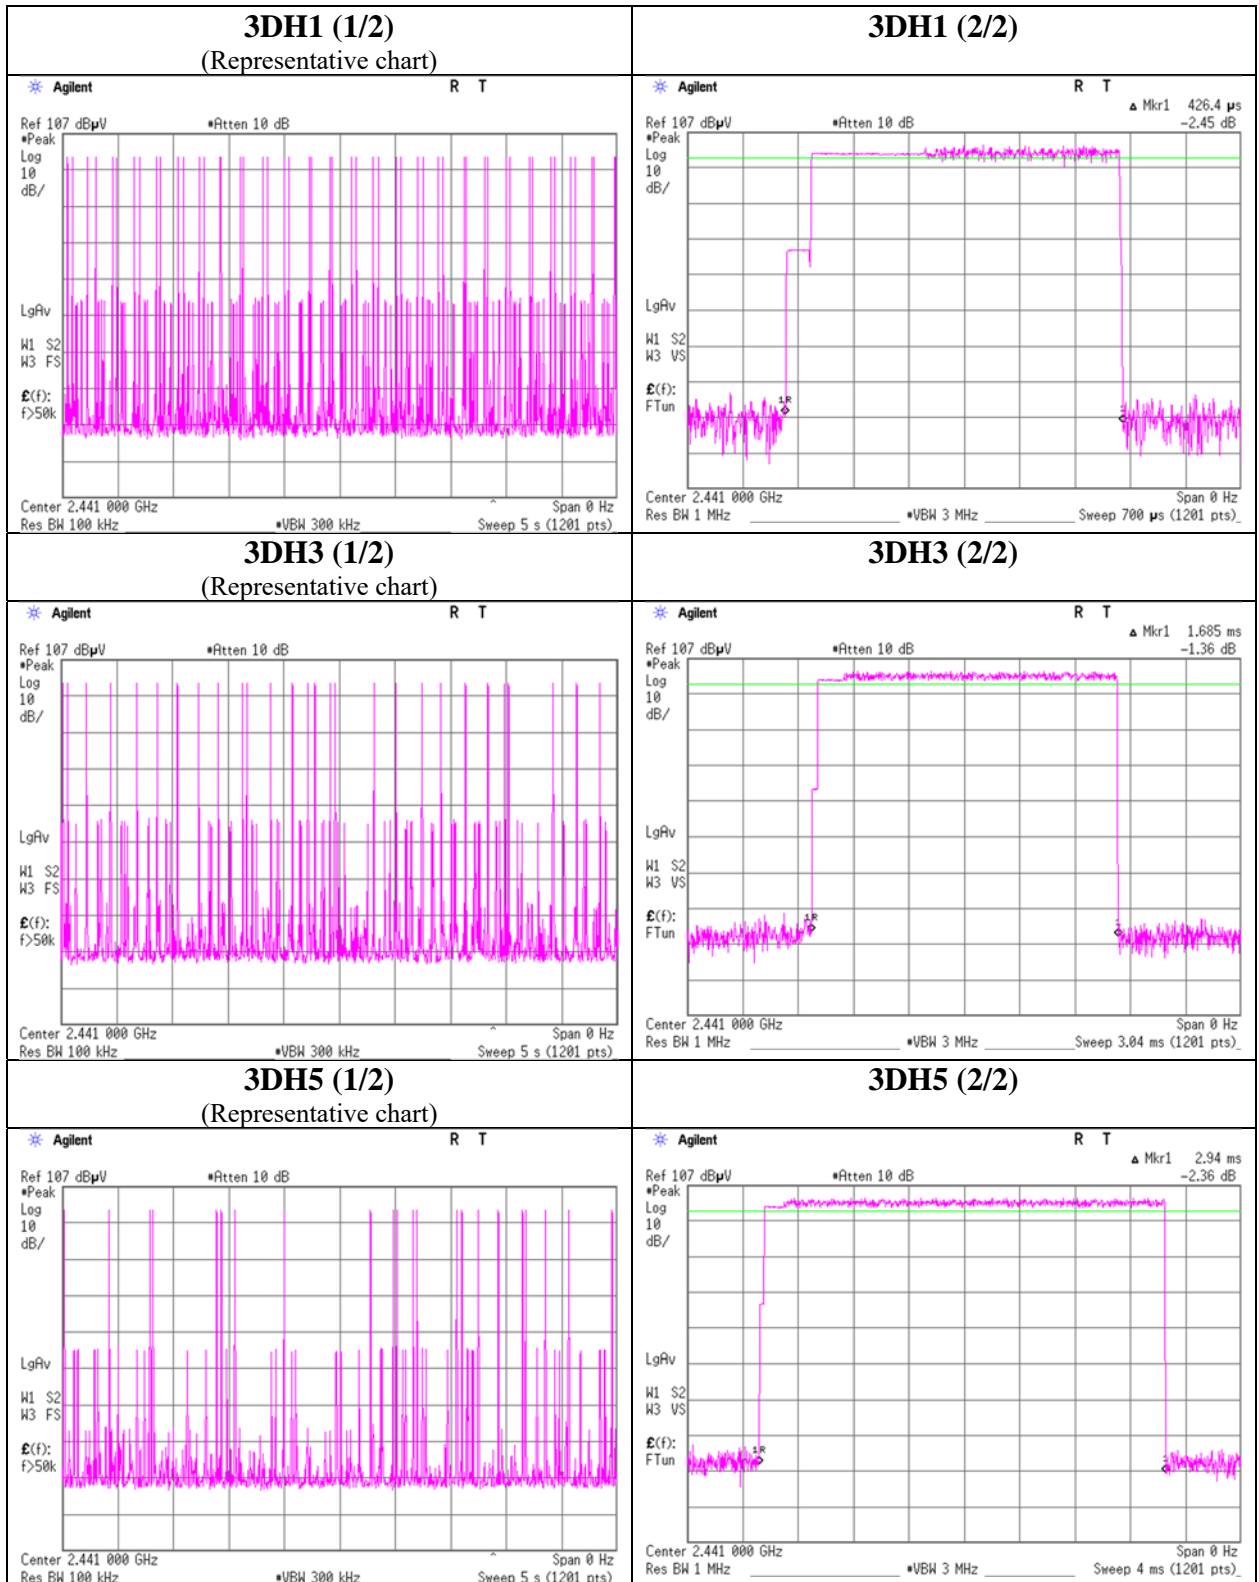

## Maximum Peak Output Power

Test place	Ise EMC Lab. No.2 Measurement Room
Date	April 24, 2022
Temperature / Humidity	21 deg. C / 58 % RH
Engineer	Kiyoshiro Okazaki
Mode	Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-5.81	1.03	10.11	5.33	3.41	20.96	125	15.63	-0.84	4.49	2.81	36.02	4000	31.53
DH5	2441.0	-4.88	1.03	10.11	6.26	4.23	20.96	125	14.70	-0.84	5.42	3.48	36.02	4000	30.60
DH5	2480.0	-5.76	1.04	10.11	5.39	3.46	20.96	125	15.58	-0.84	4.55	2.85	36.02	4000	31.48
2DH5	2402.0	-3.16	1.03	10.11	7.98	6.28	20.96	125	12.98	-0.84	7.14	5.17	36.02	4000	28.88
2DH5	2441.0	-3.29	1.03	10.11	7.85	6.10	20.96	125	13.11	-0.84	7.01	5.02	36.02	4000	29.01
2DH5	2480.0	-3.67	1.04	10.11	7.48	5.59	20.96	125	13.49	-0.84	6.64	4.61	36.02	4000	29.39
3DH5	2402.0	-2.91	1.03	10.11	8.23	6.65	20.96	125	12.73	-0.84	7.39	5.48	36.02	4000	28.63
3DH5	2441.0	-3.02	1.03	10.11	8.12	6.49	20.96	125	12.84	-0.84	7.28	5.35	36.02	4000	28.74
3DH5	2480.0	-3.46	1.04	10.11	7.69	5.87	20.96	125	13.28	-0.84	6.85	4.84	36.02	4000	29.18

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20 ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20 dB BW without 2/3 relaxation, 125 mW power limit was applied to it.



**Average Output Power**  
**(Reference data for RF Exposure)**

Test place                    Ise EMC Lab. No.2 Measurement Room  
Date                            April 24, 2022  
Temperature / Humidity      21 deg. C / 58 % RH  
Engineer                      Kiyoshiro Okazaki  
Mode                            Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-7.42	1.03	10.11	3.72	2.36	1.08	4.80	3.02
DH5	2441.0	-6.49	1.03	10.11	4.65	2.92	1.08	5.73	3.74
DH5	2480.0	-7.24	1.04	10.11	3.91	2.46	1.08	4.99	3.16
2DH5	2402.0	-6.76	1.03	10.11	4.38	2.74	1.08	5.46	3.52
2DH5	2441.0	-6.91	1.03	10.11	4.23	2.65	1.08	5.31	3.40
2DH5	2480.0	-7.35	1.04	10.11	3.80	2.40	1.08	4.88	3.08
3DH5	2402.0	-6.74	1.03	10.11	4.40	2.75	1.08	5.48	3.53
3DH5	2441.0	-6.83	1.03	10.11	4.31	2.70	1.08	5.39	3.46
3DH5	2480.0	-7.34	1.04	10.11	3.81	2.40	1.08	4.89	3.08

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.


### Burst Rate Confirmation

Test place Ise EMC Lab. No.2 Measurement Room  
 Date April 24, 2022  
 Temperature / Humidity 21 deg. C / 58 % RH  
 Engineer Kiyoshiro Okazaki  
 Mode Tx, Hopping Off


#### DH5

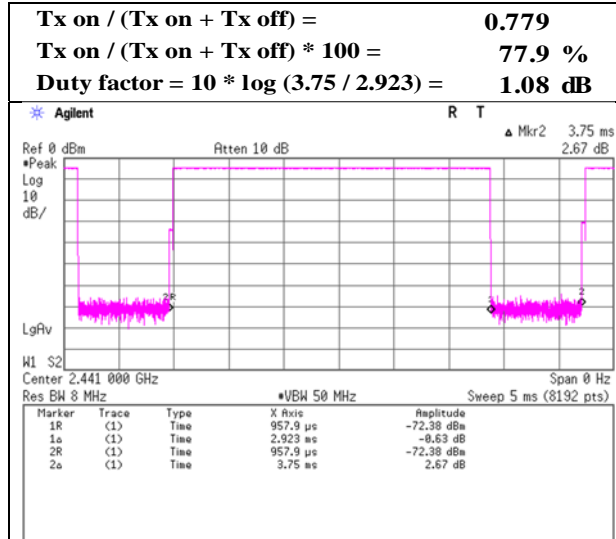

#### 2DH5

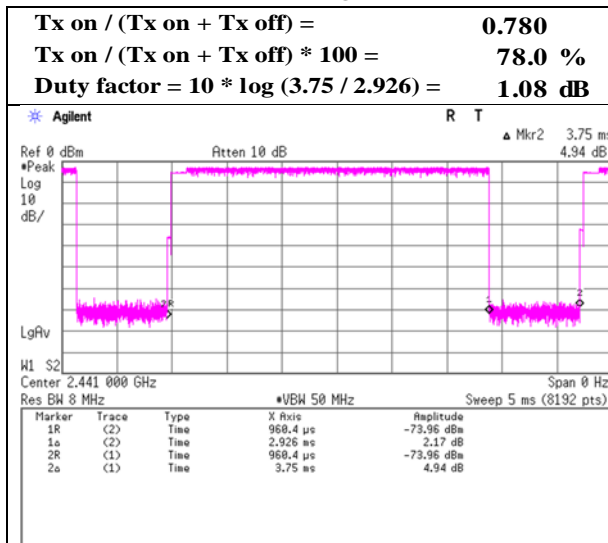

#### 3DH5

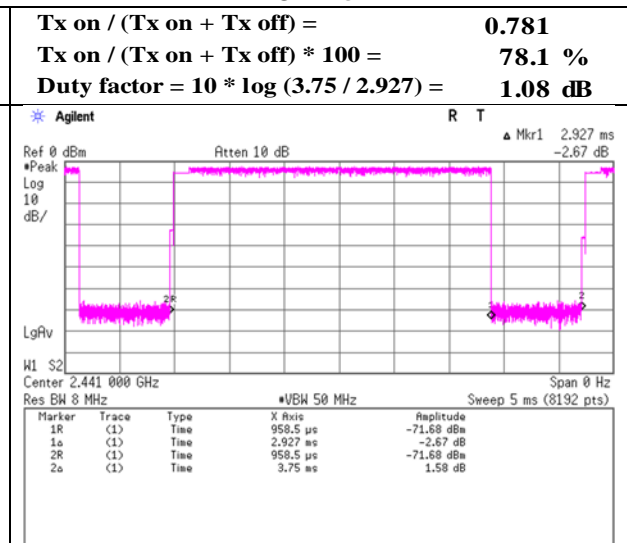

## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.2	No.3
Date	April 24, 2022	April 26, 2022
Temperature / Humidity	21 deg. C / 58 % RH	22 deg. C / 66 % RH
Engineer	Kiyoshiro Okazaki (1 GHz -10 GHz)	Yuichiro Yamazaki (Above 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2390.0	44.3	32.5	27.6	4.6	34.9	1.1	41.6	30.9	73.9	53.9	32.3	23.0	*1)
Hori.	4804.0	42.3	34.0	31.5	6.9	34.1	-	46.6	38.3	73.9	53.9	27.3	15.6	Floor noise
Hori.	7206.0	42.5	33.4	35.9	8.3	34.1	-	52.6	43.5	73.9	53.9	21.3	10.4	Floor noise
Hori.	9608.0	43.0	34.4	38.7	8.8	34.7	-	55.9	47.3	73.9	53.9	18.0	6.6	Floor noise
Vert.	2390.0	45.3	35.8	27.6	4.6	34.9	1.1	42.6	34.3	73.9	53.9	31.3	19.6	*1)
Vert.	4804.0	43.6	34.7	31.5	6.9	34.1	-	47.9	39.0	73.9	53.9	26.0	14.9	Floor noise
Vert.	7206.0	44.0	35.3	35.9	8.3	34.1	-	54.1	45.4	73.9	53.9	19.8	8.5	Floor noise
Vert.	9608.0	44.1	34.4	38.7	8.8	34.7	-	57.0	47.3	73.9	53.9	16.9	6.6	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet

Polarity [Hori/Vert]	Frequency [MHz]	Reading (PK) [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.0	99.5	27.6	4.6	34.9	96.8	-	-	Carrier
Hori.	2400.0	41.1	27.6	4.6	34.9	38.4	76.8	38.4	
Vert.	2402.0	101.2	27.6	4.6	34.9	98.5	-	-	Carrier
Vert.	2400.0	41.8	27.6	4.6	34.9	39.1	78.5	39.4	



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor:  
 1 GHz - 10 GHz      20log(3.6 m / 3.0 m) = 1.59 dB  
 10 GHz - 40 GHz    20log(1.0 m / 3.0 m) = -9.5 dB

**\*These results have sufficient margin without taking account Duty cycle correction factor.**

### Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	April 24, 2022
Temperature / Humidity	21 deg. C / 58 % RH
Engineer	Kiyoshiro Okazaki
	(1 GHz -10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

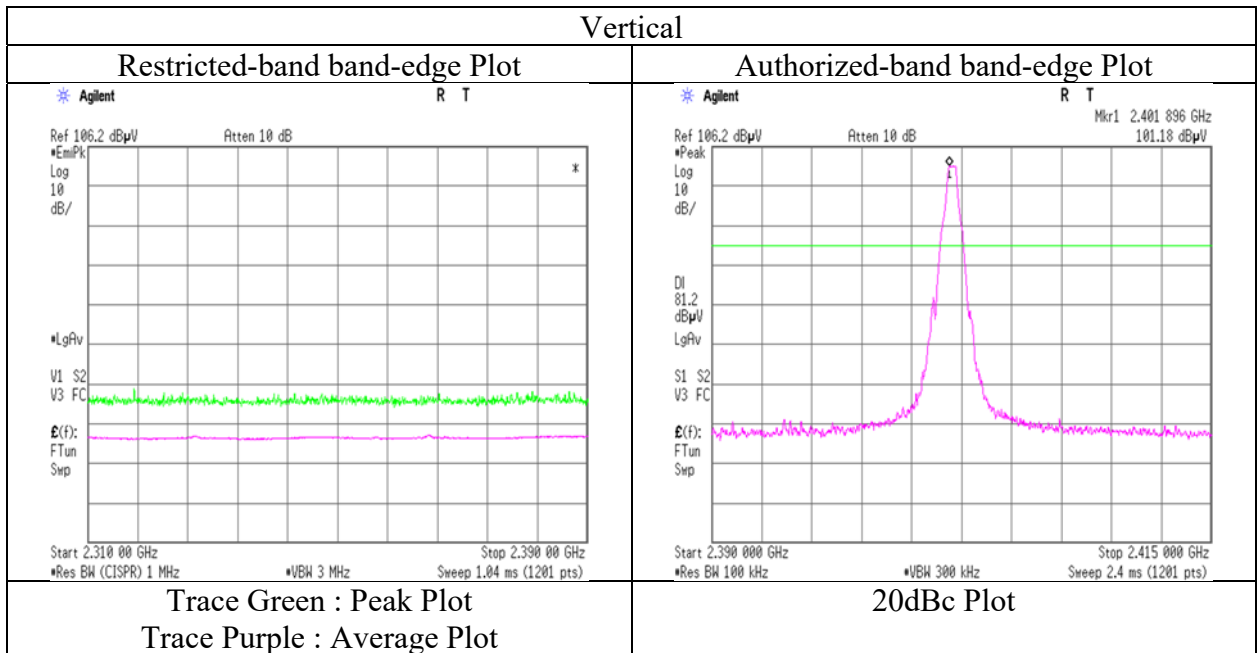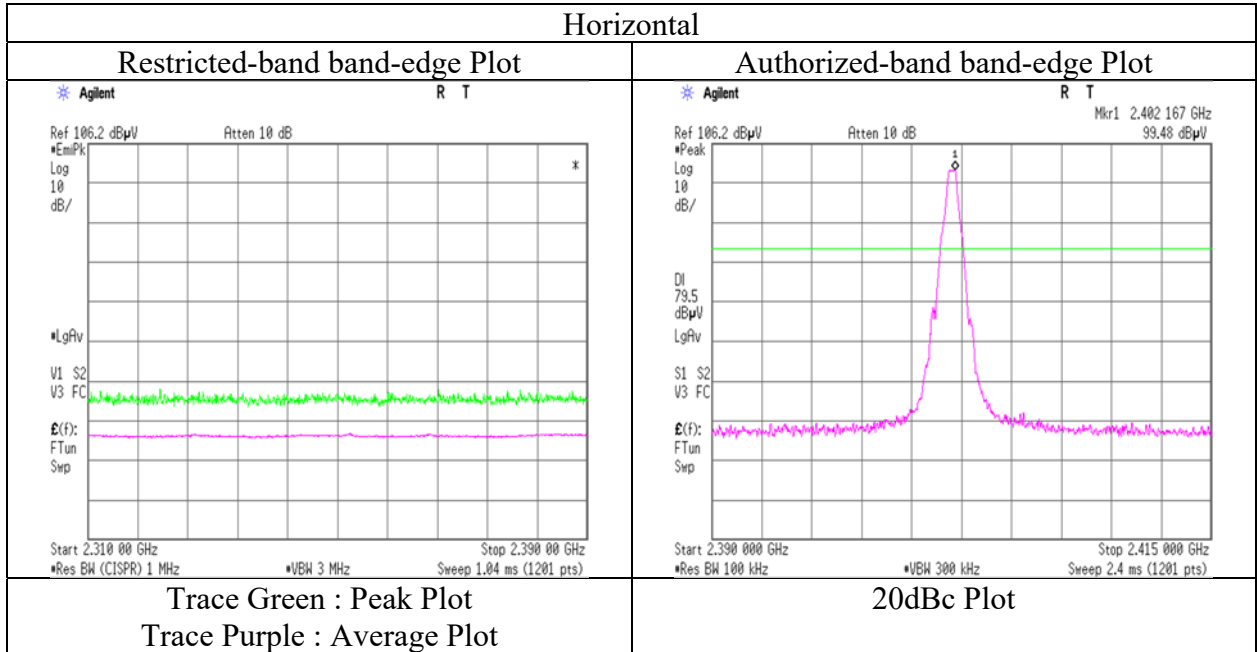

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.1	No.3
Date	April 25, 2022	April 26, 2022
Temperature / Humidity	22 deg. C / 44 % RH	22 deg. C / 66 % RH
Engineer	Hiroyuki Furutaka (1 GHz -10 GHz)	Yuichiro Yamazaki (Above 10 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	4882.0	43.7	34.4	31.3	6.6	35.7	-	45.8	36.5	73.9	53.9	28.1	17.4	Floor noise
Hori.	7323.0	44.0	35.0	36.1	7.5	35.9	-	51.8	42.8	73.9	53.9	22.2	11.2	Floor noise
Hori.	9764.0	45.0	35.6	39.1	8.4	36.4	-	56.1	46.7	73.9	53.9	17.8	7.2	Floor noise
Vert.	4882.0	44.6	34.9	31.3	6.6	35.7	-	46.7	37.0	73.9	53.9	27.2	16.9	Floor noise
Vert.	7323.0	45.4	35.1	36.1	7.5	35.9	-	53.2	42.9	73.9	53.9	20.8	11.1	Floor noise
Vert.	9764.0	44.8	35.7	39.1	8.4	36.4	-	55.9	46.8	73.9	53.9	18.0	7.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)  
 Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor  
 \*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).  
 \*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.85\text{ m} / 3.0\text{ m}) = 2.17\text{ dB}$   
                           10 GHz - 26.5 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.1	No.3
Date	April 25, 2022	April 26, 2022
Temperature / Humidity	22 deg. C / 44 % RH	22 deg. C / 66 % RH
Engineer	Hiroyuki Furutaka	Yuichiro Yamazaki
	(1 GHz -10 GHz)	(Above 10 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2483.5	48.0	37.6	27.6	4.7	36.3	1.1	44.0	34.7	73.9	53.9	29.9	19.2	*1)
Hori.	4960.0	42.8	34.8	31.4	6.6	35.7	-	45.0	37.0	73.9	53.9	28.9	16.9	Floor noise
Hori.	7440.0	43.8	35.0	36.3	7.6	35.9	-	51.8	43.0	73.9	53.9	22.2	11.0	Floor noise
Hori.	9920.0	44.6	36.2	39.0	8.5	36.4	-	55.6	47.2	73.9	53.9	18.3	6.7	Floor noise
Vert.	2483.5	49.2	38.5	27.6	4.7	36.3	1.1	45.2	35.6	73.9	53.9	28.7	18.3	*1)
Vert.	4960.0	43.2	34.6	31.4	6.6	35.7	-	45.4	36.8	73.9	53.9	28.5	17.1	Floor noise
Vert.	7440.0	44.2	35.5	36.3	7.6	35.9	-	52.2	43.5	73.9	53.9	21.8	10.5	Floor noise
Vert.	9920.0	44.0	35.8	39.0	8.5	36.4	-	55.0	46.8	73.9	53.9	18.9	7.1	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:      1 GHz - 10 GHz       $20\log(3.85\text{ m} / 3.0\text{ m}) = 2.17\text{ dB}$   
                              10 GHz - 26.5 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	April 25, 2022
Temperature / Humidity	22 deg. C / 44 % RH
Engineer	Hiroyuki Furutaka
Mode	Tx, Hopping Off, DH5 2480 MHz

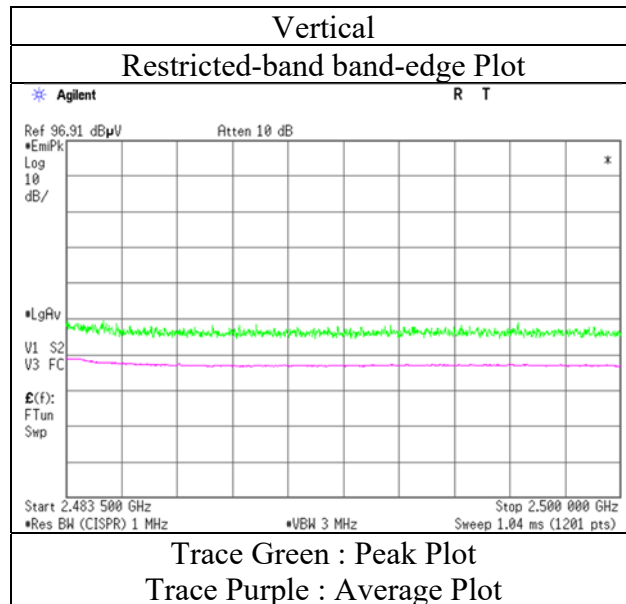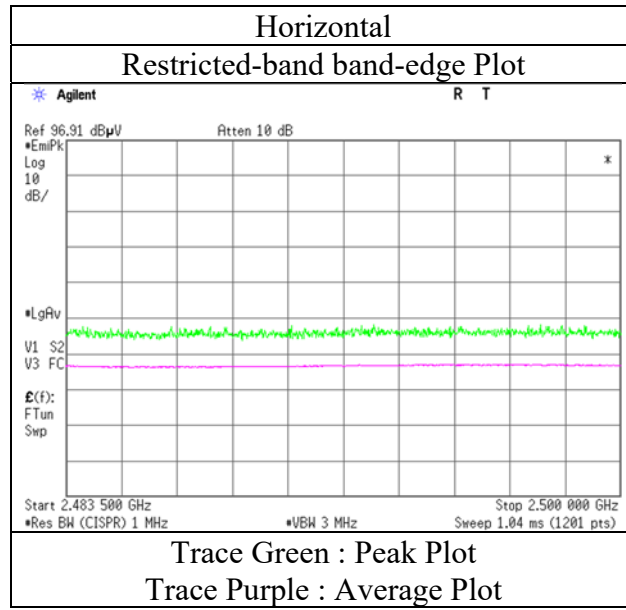

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.1	No.3	No.3
Date	April 25, 2022	April 26, 2022	May 9, 2022
Temperature / Humidity	22 deg. C / 44 % RH	22 deg. C / 66 % RH	21 deg. C / 34 % RH
Engineer	Hiroyuki Furutaka (1 GHz - 10 GHz)	Yuichiro Yamazaki (Above 10 GHz)	Junki Nagatomi (Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz		

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	87.8	29.1	-	8.2	8.0	32.2	-	13.1	-	40.0	-	26.9	-	
Hori.	264.2	33.1	-	12.9	9.7	32.0	-	23.7	-	46.0	-	22.4	-	
Hori.	416.0	31.0	-	16.3	10.8	32.0	-	26.2	-	46.0	-	19.8	-	
Hori.	600.0	28.3	-	19.4	12.0	32.0	-	27.7	-	46.0	-	18.3	-	
Hori.	926.3	29.4	-	22.2	13.7	30.8	-	34.6	-	46.0	-	11.5	-	
Hori.	1000.0	28.3	-	22.5	14.1	30.4	-	34.5	-	53.9	-	19.4	-	
Hori.	2390.0	45.4	36.3	27.7	4.7	36.3	1.1	41.5	33.5	73.9	53.9	32.4	20.4	*1)
Hori.	4804.0	42.9	34.0	31.2	6.6	35.8	-	45.0	36.1	73.9	53.9	29.0	17.9	Floor noise
Hori.	7206.0	44.1	34.8	35.9	7.5	35.9	-	51.7	42.4	73.9	53.9	22.3	11.6	Floor noise
Hori.	9608.0	44.7	35.4	38.7	8.4	36.3	-	55.5	46.2	73.9	53.9	18.4	7.7	Floor noise
Vert.	86.4	27.6	-	7.9	8.0	32.2	-	11.3	-	40.0	-	28.7	-	
Vert.	264.2	34.2	-	12.9	9.7	32.0	-	24.8	-	46.0	-	21.3	-	
Vert.	416.0	34.1	-	16.3	10.8	32.0	-	29.3	-	46.0	-	16.7	-	
Vert.	600.0	31.1	-	19.4	12.0	32.0	-	30.5	-	46.0	-	15.5	-	
Vert.	926.2	28.3	-	22.2	13.7	30.8	-	33.5	-	46.0	-	12.6	-	
Vert.	1000.0	31.5	-	22.5	14.1	30.4	-	37.7	-	53.9	-	16.2	-	
Vert.	2390.0	45.6	36.4	27.7	4.7	36.3	1.1	41.7	33.6	73.9	53.9	32.2	20.3	*1)
Vert.	4804.0	42.5	33.8	31.2	6.6	35.8	-	44.6	35.9	73.9	53.9	29.4	18.1	Floor noise
Vert.	7206.0	44.1	34.6	35.9	7.5	35.9	-	51.7	42.2	73.9	53.9	22.2	11.8	Floor noise
Vert.	9608.0	44.3	35.3	38.7	8.4	36.3	-	55.1	46.1	73.9	53.9	18.8	7.8	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet

Polarity [Hori/Vert]	Frequency [MHz]	Reading (PK) [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.0	101.3	27.6	4.7	36.3	97.3	-	-	Carrier
Hori.	2400.0	44.6	27.6	4.7	36.3	40.7	77.3	36.7	
Vert.	2402.0	101.5	27.6	4.7	36.3	97.6	-	-	Carrier
Vert.	2400.0	43.9	27.6	4.7	36.3	40.0	77.6	37.6	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)



Distance factor: 1 GHz - 10 GHz      20log(3.85 m / 3.0 m) = 2.17 dB

10 GHz - 26.5 GHz      20log(1.0 m / 3.0 m) = -9.5 dB



## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	April 25, 2022
Temperature / Humidity	22 deg. C / 44 % RH
Engineer	Hiroyuki Furutaka
Mode	Tx, Hopping Off, 3DH5 2402 MHz

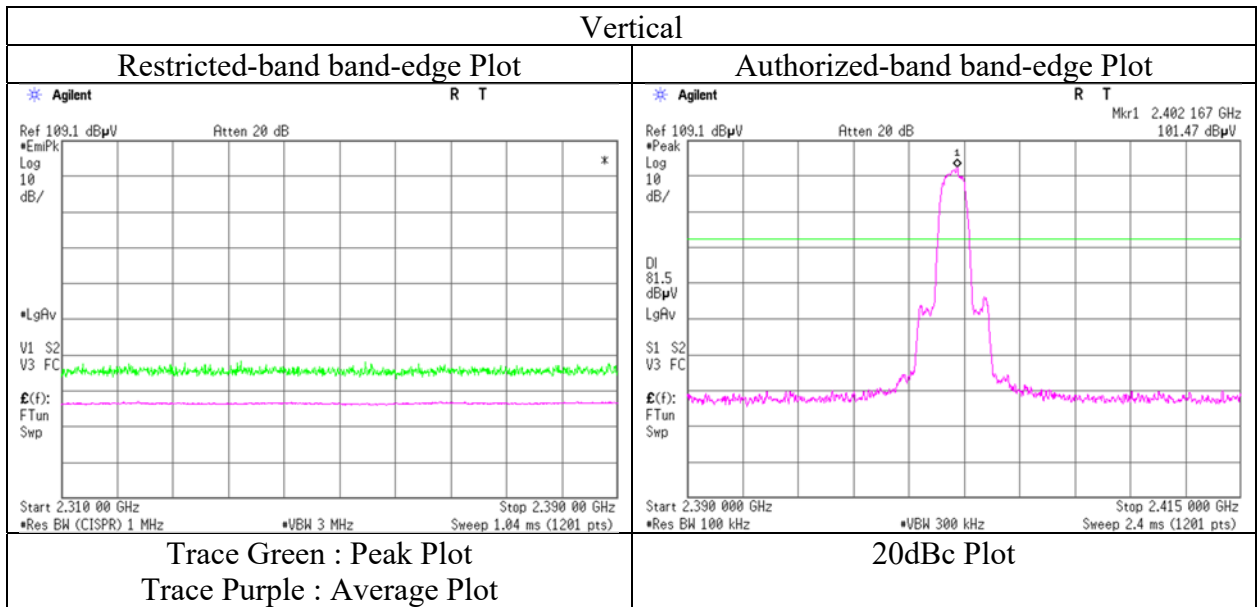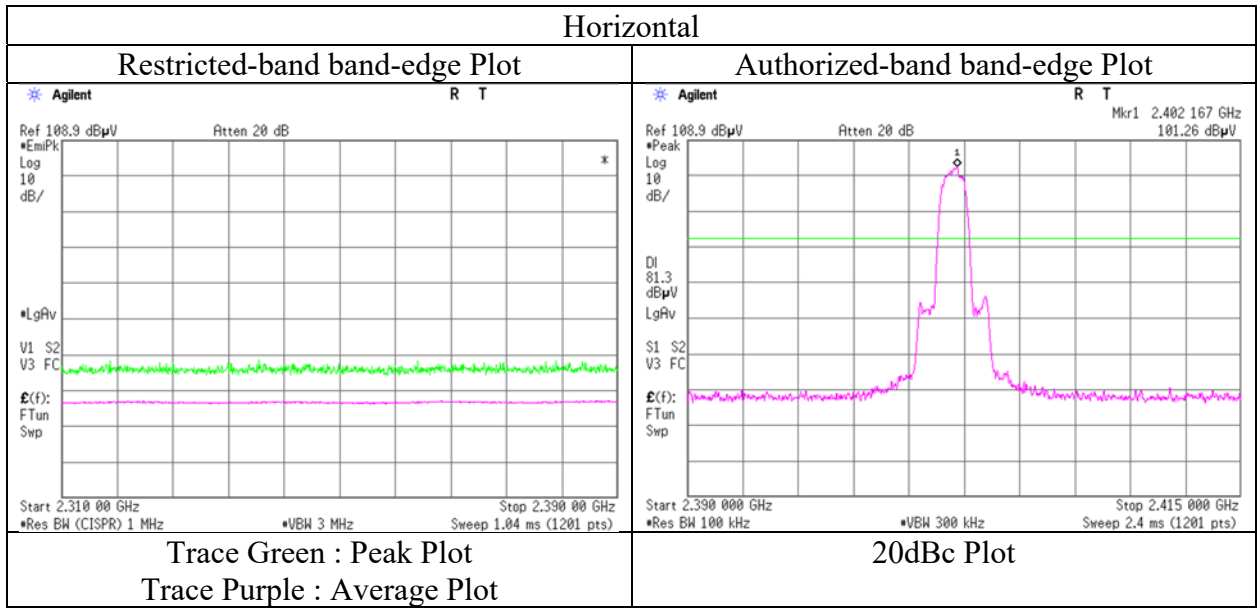

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.1	No.3
Date	April 25, 2022	April 26, 2022
Temperature / Humidity	22 deg. C / 44 % RH	22 deg. C / 66 % RH
Engineer	Hiroyuki Furutaka	Yuichiro Yamazaki
	(1 GHz - 10 GHz)	(Above 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz	

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	4882.0	43.0	34.2	31.3	6.6	35.7	-	45.1	36.3	73.9	53.9	28.8	17.6	Floor noise
Hori.	7323.0	44.6	34.9	36.1	7.5	35.9	-	52.4	42.7	73.9	53.9	21.6	11.3	Floor noise
Hori.	9764.0	45.1	35.3	39.1	8.4	36.4	-	56.2	46.4	73.9	53.9	17.7	7.5	Floor noise
Vert.	4882.0	43.6	35.4	31.3	6.6	35.7	1.1	45.7	38.6	73.9	53.9	28.2	15.3	
Vert.	7323.0	43.8	34.7	36.1	7.5	35.9	-	51.6	42.5	73.9	53.9	22.4	11.5	Floor noise
Vert.	9764.0	45.0	35.4	39.1	8.4	36.4	-	56.1	46.5	73.9	53.9	17.8	7.4	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.85\text{ m} / 3.0\text{ m}) = 2.17\text{ dB}$   
                                  10 GHz - 26.5 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

## Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.1	No.3
Date	April 25, 2022	April 26, 2022
Temperature / Humidity	22 deg. C / 44 % RH	22 deg. C / 66 % RH
Engineer	Hiroyuki Furutaka	Yuichiro Yamazaki
	(1 GHz - 10 GHz)	(Above 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz	

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	2483.5	47.9	38.0	27.6	4.7	36.3	1.1	43.9	35.1	73.9	53.9	30.0	18.8	*1)
Hori.	4960.0	44.0	34.6	31.4	6.6	35.7	-	46.2	36.8	73.9	53.9	27.7	17.1	Floor noise
Hori.	7440.0	43.9	35.2	36.3	7.6	35.9	-	51.9	43.2	73.9	53.9	22.1	10.8	Floor noise
Hori.	9920.0	44.0	35.9	39.0	8.5	36.4	-	55.0	46.9	73.9	53.9	18.9	7.0	Floor noise
Vert.	2483.5	48.5	38.7	27.6	4.7	36.3	1.1	44.5	35.8	73.9	53.9	29.4	18.1	*1)
Vert.	4960.0	42.9	34.5	31.4	6.6	35.7	-	45.1	36.7	73.9	53.9	28.8	17.2	Floor noise
Vert.	7440.0	43.3	35.1	36.3	7.6	35.9	-	51.3	43.1	73.9	53.9	22.7	10.9	Floor noise
Vert.	9920.0	44.0	35.7	39.0	8.5	36.4	-	55.0	46.7	73.9	53.9	18.9	7.2	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:      1 GHz - 10 GHz       $20\log(3.85\text{ m} / 3.0\text{ m}) = 2.17\text{ dB}$   
                                  10 GHz - 26.5 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission (Reference Plot for band-edge)



Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	April 25, 2022
Temperature / Humidity	22 deg. C / 44 % RH
Engineer	Hiroyuki Furutaka (1 GHz - 10 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

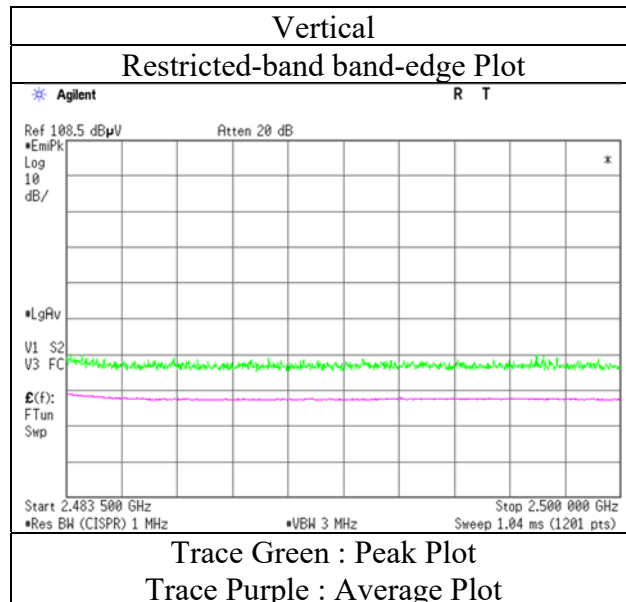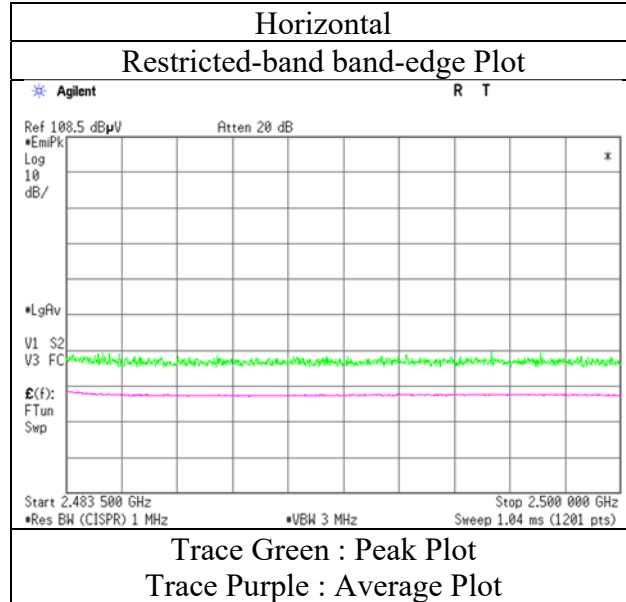

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case mode for Maximum Peak Output Power)**

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.1	No.3	No.3
Date	April 25, 2022	April 26, 2022	May 9, 2022
Temperature / Humidity	22 deg. C / 44 % RH	22 deg. C / 66 % RH	21 deg. C / 34 % RH
Engineer	Hiroyuki Furutaka (1 GHz - 10 GHz)	Yuichiro Yamazaki (Above 10 GHz)	Junki Nagatomi (Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz		

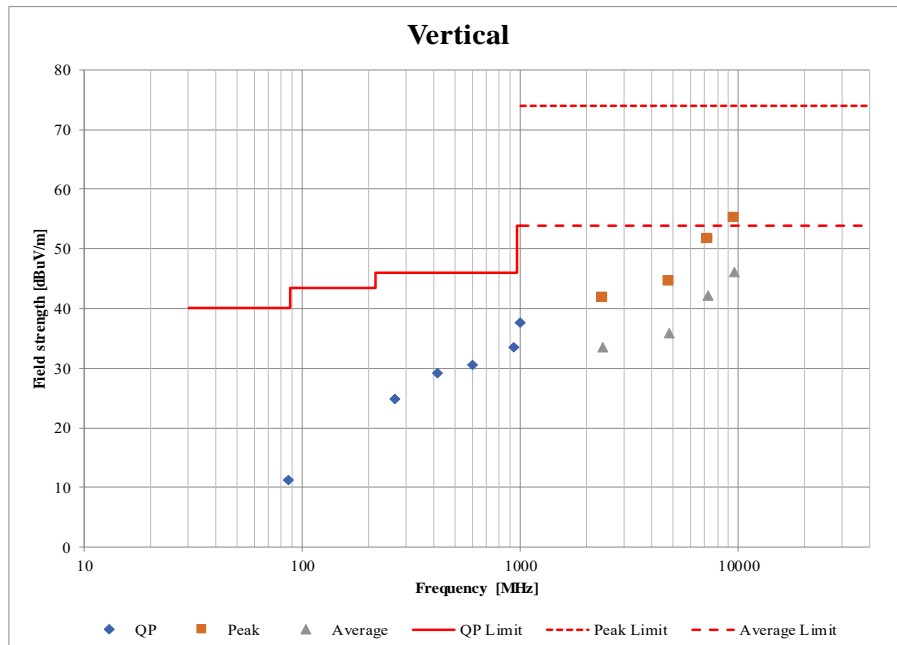
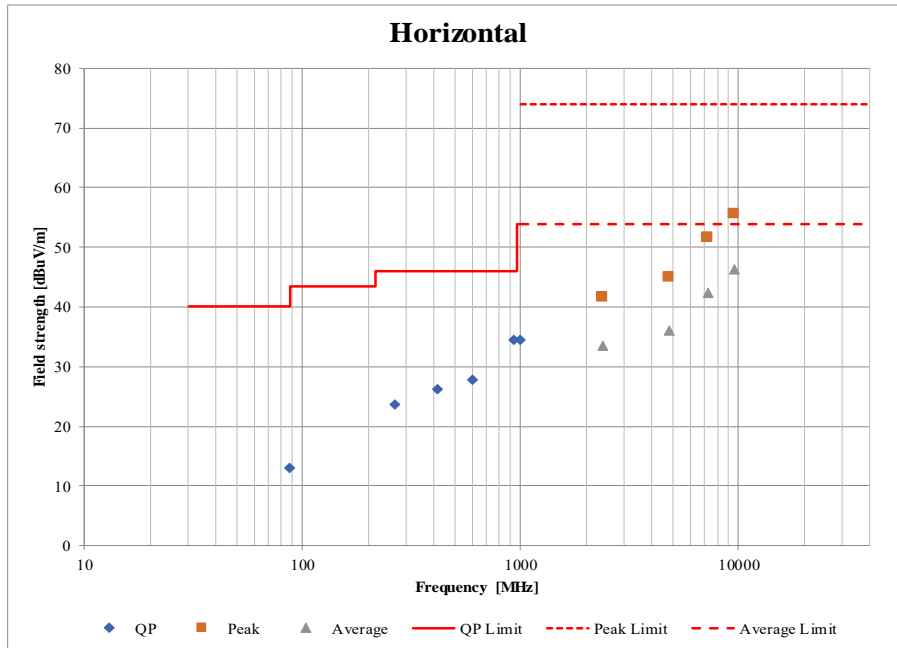


\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	May 9, 2022
Temperature / Humidity	26 deg. C / 33 % RH
Engineer	Nachi Konegawa
Mode	Tx, Hopping Off, DH5



### 2402 MHz

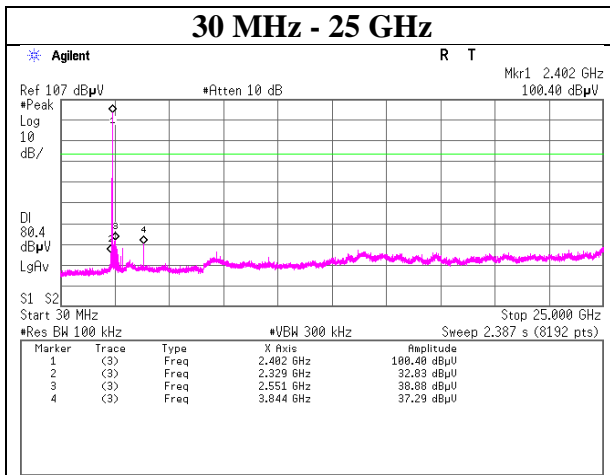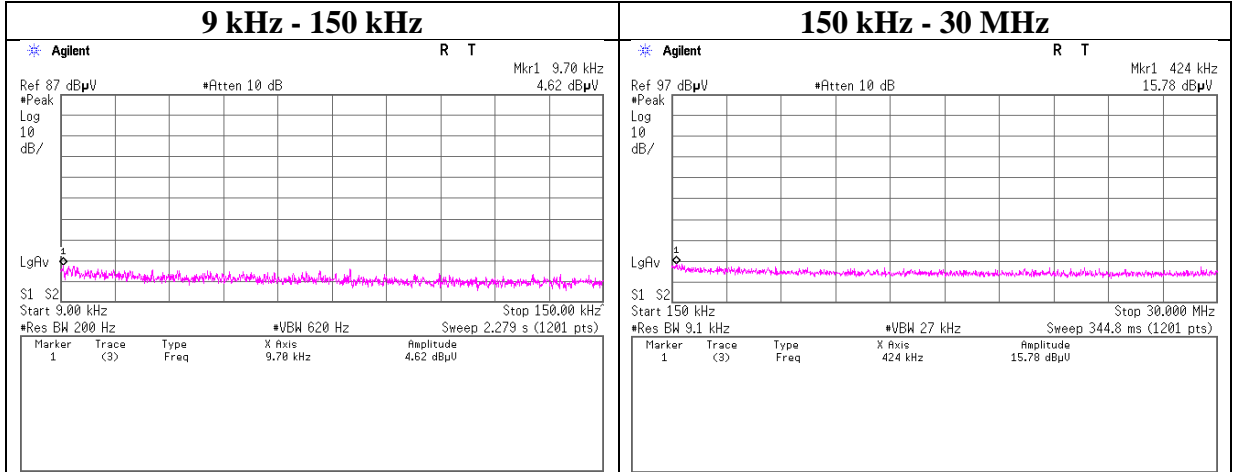

## Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	May 9, 2022
Temperature / Humidity	26 deg. C / 33 % RH
Engineer	Nachi Konegawa
Mode	Tx, Hopping Off, DH5



### 2441 MHz

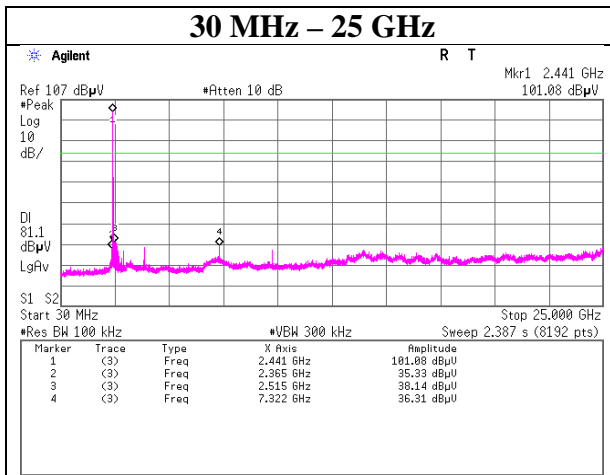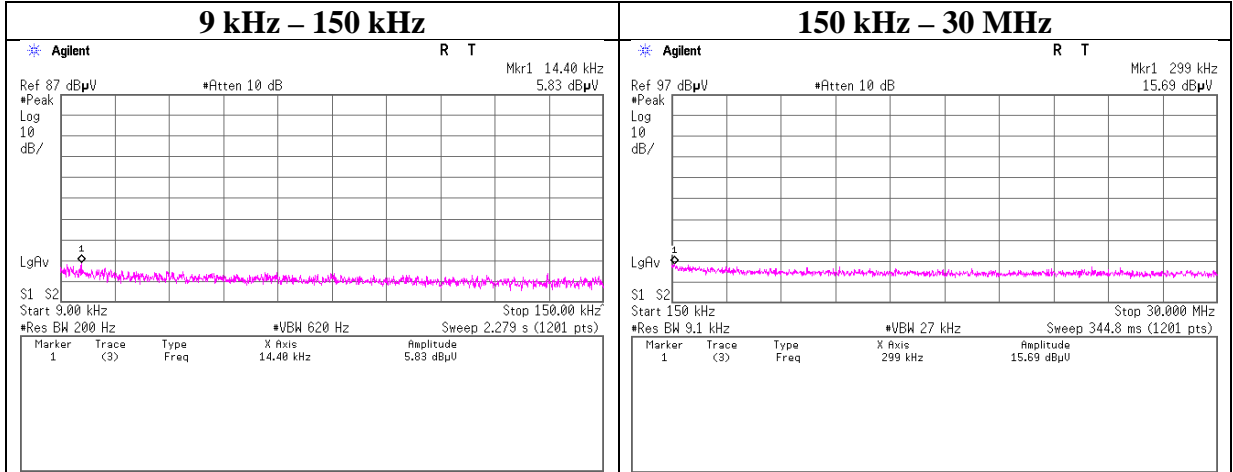

## Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	May 9, 2022
Temperature / Humidity	26 deg. C / 33 % RH
Engineer	Nachi Konegawa
Mode	Tx, Hopping Off, DH5

### 2480 MHz

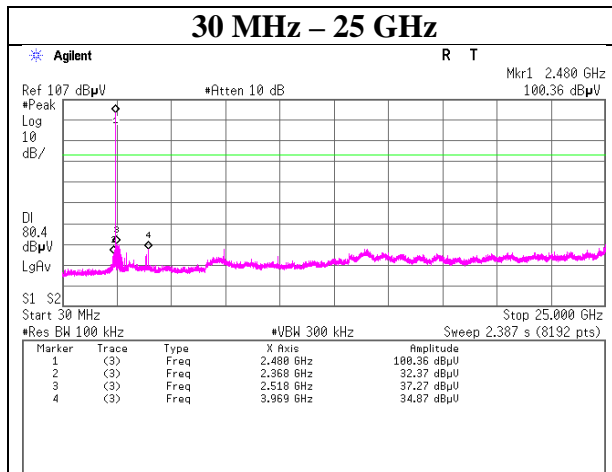
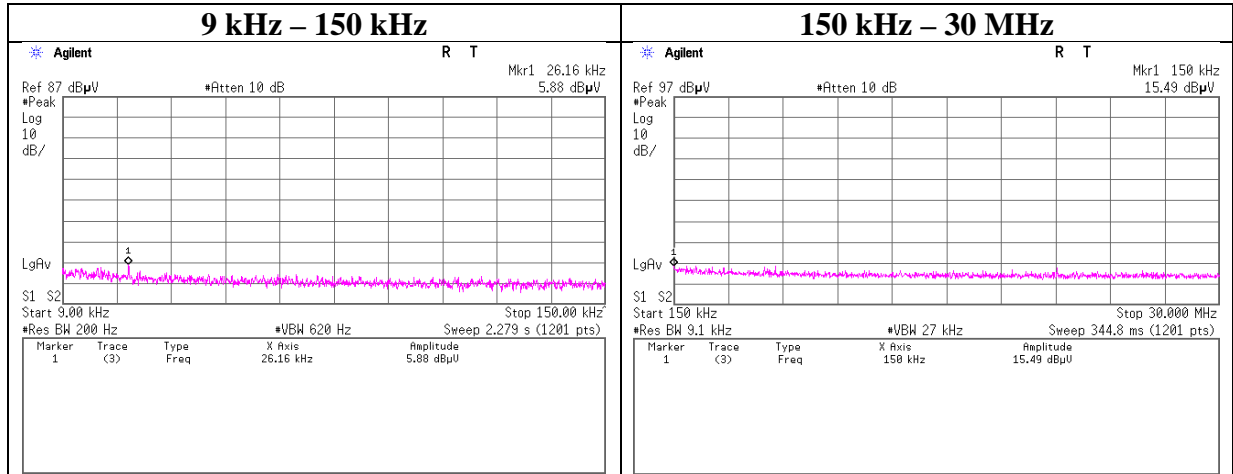




## Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	May 10, 2022
Temperature / Humidity	24 deg. C / 39 % RH
Engineer	Takumi Nishida
Mode	Tx, Hopping Off, 3DH5



### 2402 MHz

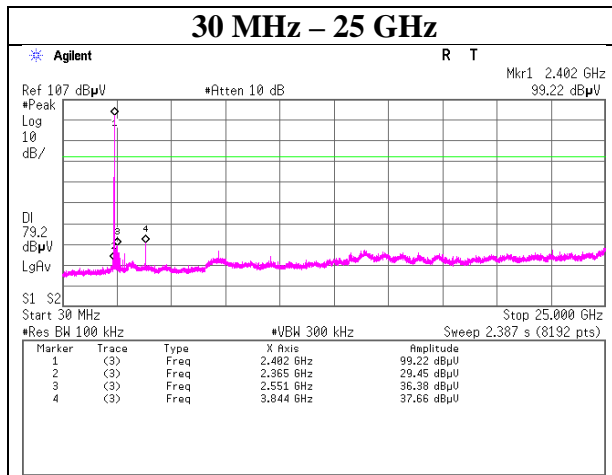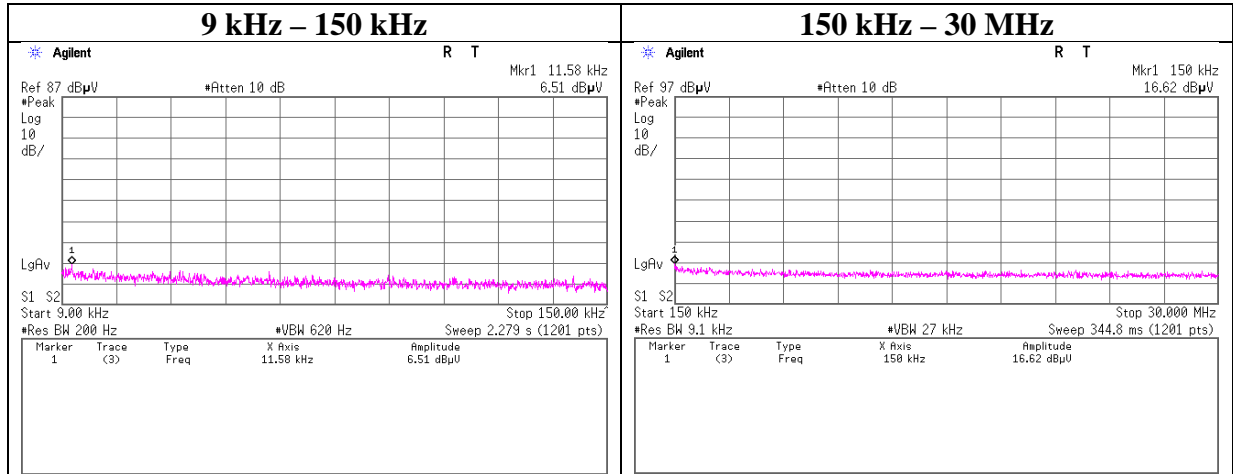

## Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Date	May 10, 2022
Temperature / Humidity	24 deg. C / 39 % RH
Engineer	Takumi Nishida
Mode	Tx, Hopping Off, 3DH5



### 2441 MHz

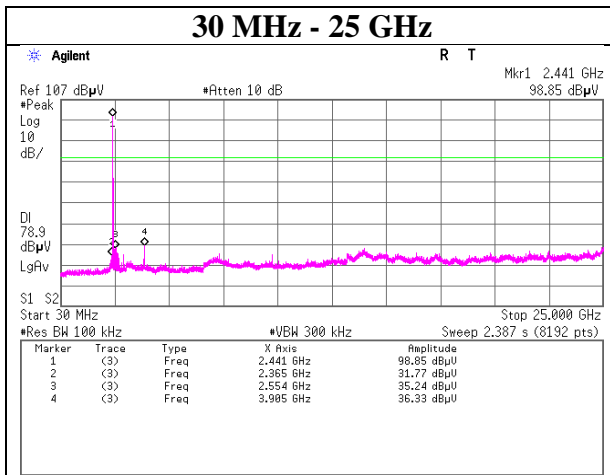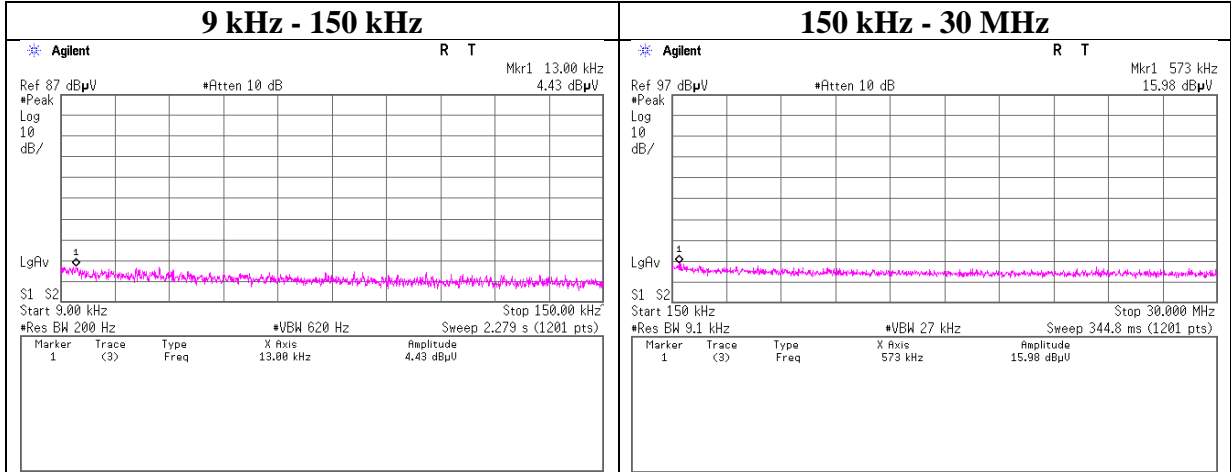

### Conducted Spurious Emission

Test place Ise EMC Lab. No.6 Measurement Room  
 Date May 10, 2022  
 Temperature / Humidity 24 deg. C / 39 % RH  
 Engineer Takumi Nishida  
 Mode Tx, Hopping Off, 3DH5


#### 2480 MHz

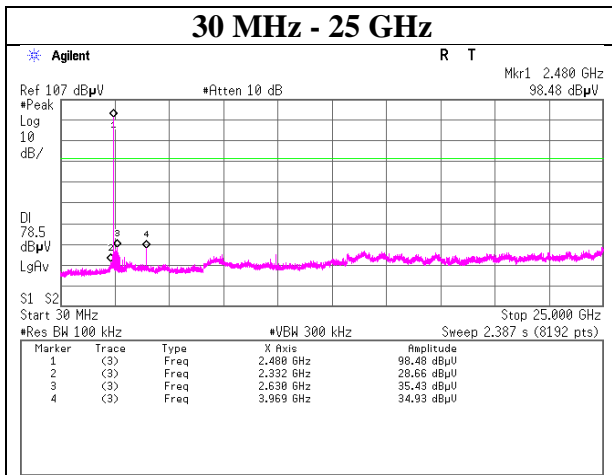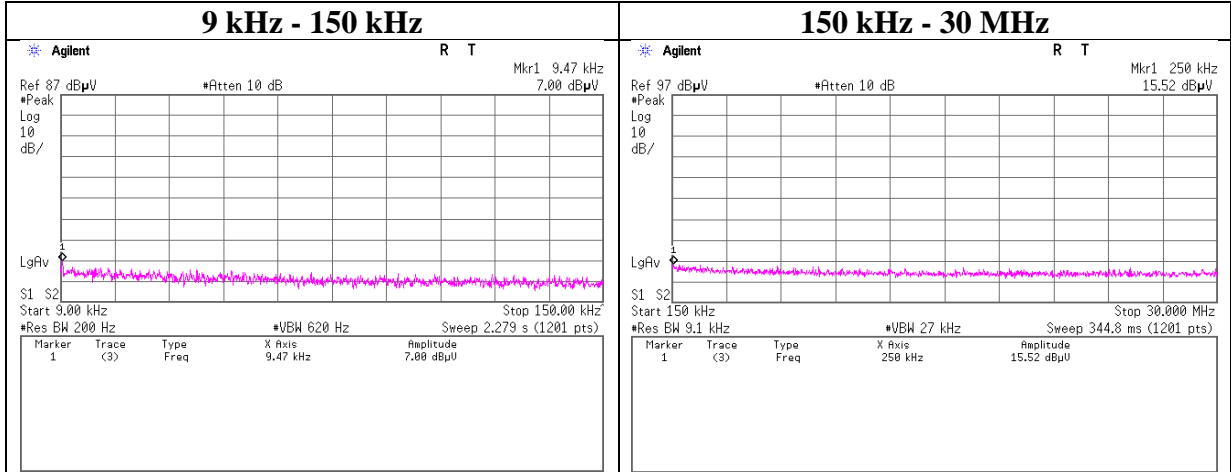


### Conducted Emission Band Edge compliance

Test place	Ise EMC Lab. No.6 Measurement Room
Date	May 9, 2022
Temperature / Humidity	26 deg. C / 33 % RH
Engineer	Nachi Konegawa
Mode	Tx DH5

#### Hopping On

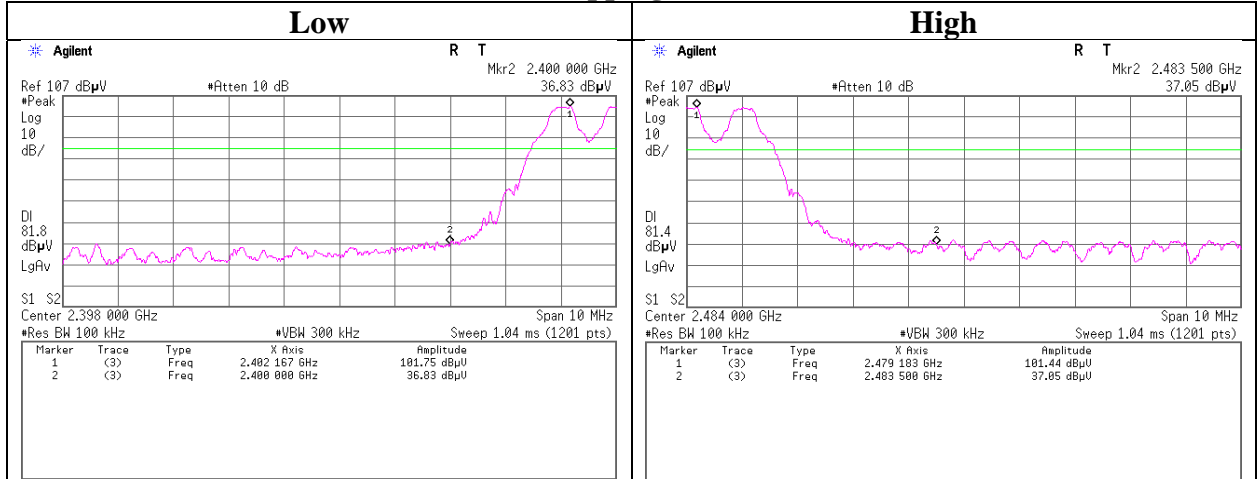


#### Hopping Off

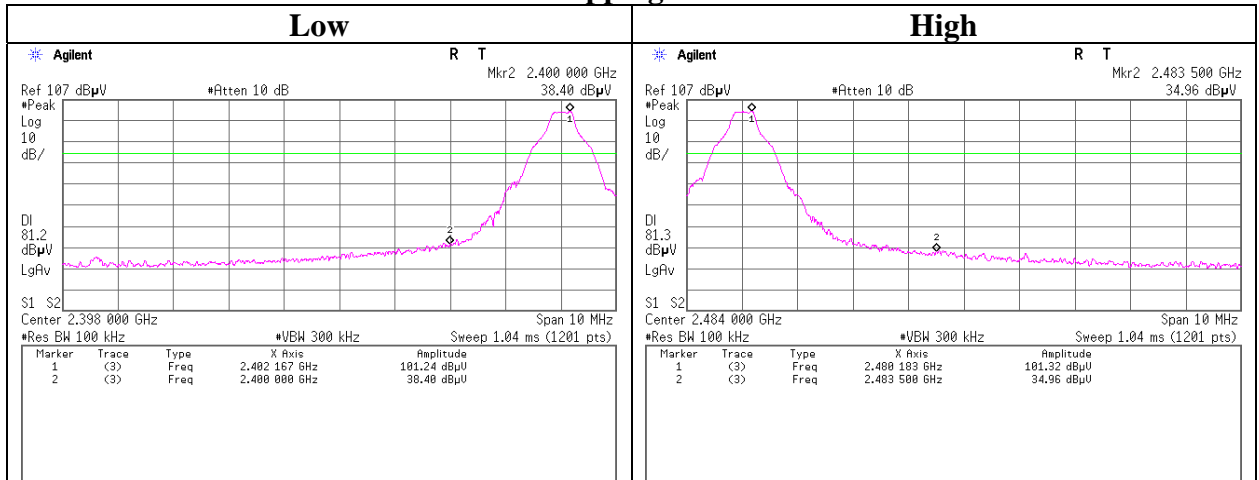


### Conducted Emission Band Edge compliance

Test place                    Ise EMC Lab. No.6 Measurement Room  
Date                            May 10, 2022  
Temperature / Humidity    24 deg. C / 39 % RH  
Engineer                     Takumi Nishida  
Mode                          Tx 3DH5

#### Hopping On

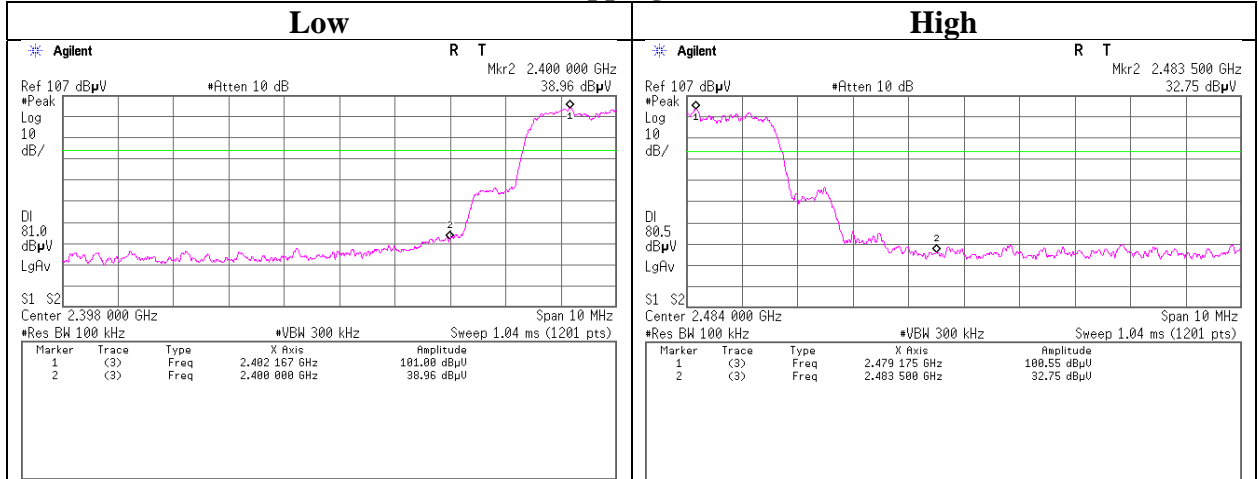

#### Hopping Off

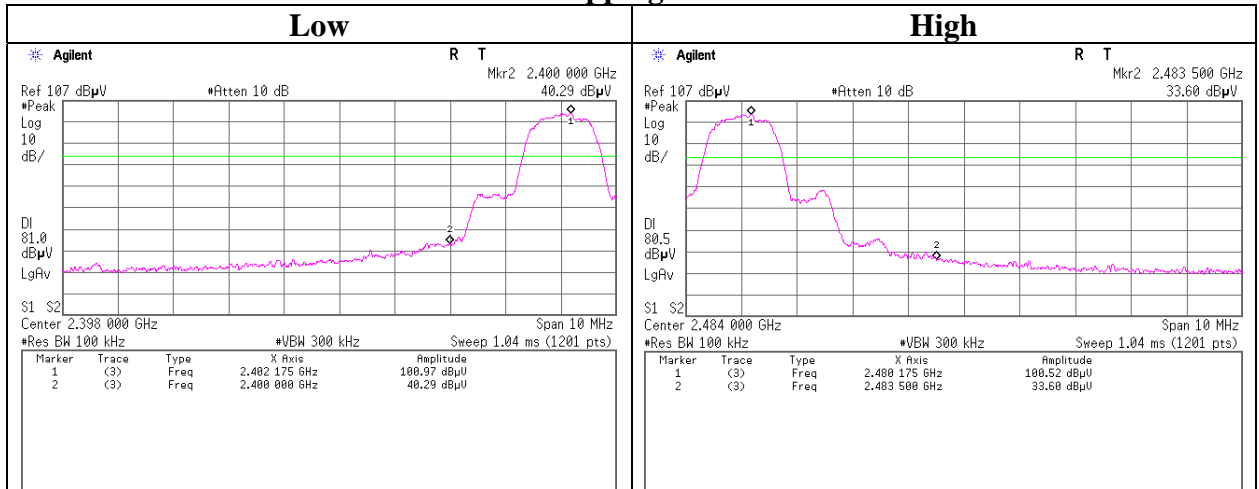

## APPENDIX 2: Test Instruments

### Test Equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MAT-23	141361	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	04/06/2022	12
AT	MAT-89	141419	Attenuator	Weinschel Associates	WA56-10	56100305	05/14/2021	12
AT	MCC-244	197219	Microwave cable	Huber+Suhner	SF126E/11PC35/ 11PC35/2000MM	536999/126E	03/17/2022	12
AT	MCC-96	141375	Microwave Cable 1G-40GHz	Suhner	SUCOFLEX102	30817/2	05/08/2022	12
AT	MMM-18	141558	Digital Tester(TRUE RMS MULTIMETER)	Fluke Corporation	115	17930030	05/24/2021	12
AT	MOS-14	141561	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1401	01/10/2022	12
AT	MPM-16	141812	Power Meter	Keysight Technologies Inc	8990B	MY51000271	08/11/2021	12
AT	MPSE-22	141842	Power sensor	Keysight Technologies Inc	N1923A	MY54070003	08/11/2021	12
AT	MSA-22	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	03/24/2022	12
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-01	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	06/08/2020	24
RE	MAEC-01-SVSWR	141994	AC1_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 10m	DA-06881	04/05/2021	24
RE	MAEC-02	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	05/26/2020	24
RE	MAEC-02-SVSWR	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/09/2021	24
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/22/2020	24
RE	MAEC-03-SVSWR	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/01/2021	24
RE	MAT-95	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/09/2021	12
RE	MBA-08	141427	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103B+ BBA9106	08031	07/10/2021	12
RE	MCC-177	141226	Microwave Cable	Junkosha	MMX221- 00500DMSDMS	1502S304	03/17/2022	12
RE	MCC-217	141393	Microwave Cable	Junkosha	MWX221	1604S254(1 m) / 1608S088(5 m)	08/04/2021	12
RE	MCC-218	141394	Microwave Cable	Junkosha	MWX221	1607S141(1 m) / 1608S264(5 m)	09/30/2021	12
RE	MCC-231	177964	Microwave Cable	Junkosha INC.	MMX221	1901S329(1m) / 1902S579(5m)	03/15/2022	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	07/19/2021	12
RE	MHA-05	141511	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	253	09/24/2021	12
RE	MHA-06	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	254	10/21/2021	12
RE	MHA-16	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	06/07/2021	12
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	11/09/2021	12
RE	MHF-06	141404	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	05/18/2021	12
RE	MHF-22	141293	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCB	602	02/24/2022	12
RE	MHF-25	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	09/30/2021	12

**Test Equipment (2/2)**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
RE	MJM-25	142226	Measure	KOMELON	KMC-36	-	-	-
RE	MJM-27	142228	Measure	KOMELON	KMC-36	-	-	-
RE	MLA-22	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	9111B-191	08/21/2021	12
RE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/10/2021	12
RE	MMM-03	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	08/10/2021	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/16/2022	12
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/10/2022	12
RE	MOS-27	141566	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	A08Q26	01/10/2022	12
RE	MOS-41	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/19/2021	12
RE	MPA-01	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	02/22/2022	12
RE	MPA-10	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	02/22/2022	12
RE	MPA-11	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/17/2022	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/25/2022	12
RE	MRENT-130	141855	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187750	11/28/2021	12
RE	MSA-22	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	03/24/2022	12
RE	MTR-08	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	08/05/2021	12

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission  
AT: Antenna Terminal Conducted