

RADIO TEST REPORT

Test Report No. 15398805H-C-R1

Customer	DENSO TEN Limited
Description of EUT	Car Audio
Model Number of EUT	TN0047A
FCC ID	BABTN0047A
Test Regulation	FCC Part 15 Subpart E
Test Result	Complied
Issue Date	November 1, 2024
Remarks	-

Representative Test EngineerTomoya Sone
Engineer**Approved By**Ryota Yamanaka
Engineer

CERTIFICATE 5107.02

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
- ☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15398805H-C

This report is a revised version of 15398805H-C. 15398805H-C is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15398805H-C	October 15, 2024	-
1	15398805H-C-R1	November 1, 2024	P.15 Correction of SVSWR Volume for 1 GHz to 10 GHz band from 2 m to 1.5 m, and recalculation Test distance result

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	IEC	International Electrotechnical Commission
AC	Alternating Current	IEEE	Institute of Electrical and Electronics Engineers
AFH	Adaptive Frequency Hopping	IF	Intermediate Frequency
AM	Amplitude Modulation	ILAC	International Laboratory Accreditation Conference
Amp, AMP	Amplifier	ISED	Innovation, Science and Economic Development Canada
ANSI	American National Standards Institute	ISO	International Organization for Standardization
Ant, ANT	Antenna	JAB	Japan Accreditation Board
AP	Access Point	LAN	Local Area Network
ASK	Amplitude Shift Keying	LIMS	Laboratory Information Management System
Atten., ATT	Attenuator	MCS	Modulation and Coding Scheme
AV	Average	MRA	Mutual Recognition Arrangement
BPSK	Binary Phase-Shift Keying	N/A	Not Applicable
BR	Bluetooth Basic Rate	NIST	National Institute of Standards and Technology
BT	Bluetooth	NS	No signal detect.
BT LE	Bluetooth Low Energy	NSA	Normalized Site Attenuation
BW	BandWidth	NVLAP	National Voluntary Laboratory Accreditation Program
Cal Int	Calibration Interval	OBW	Occupied Band Width
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
Ch., CH	Channel	OFDMA	Orthogonal Frequency Division Multiple Access
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PP	Preamble Puncturing
DSSS	Direct Sequence Spread Spectrum	PRBS	Pseudo-Random Bit Sequence
EDR	Enhanced Data Rate	PSD	Power Spectral Density
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QAM	Quadrature Amplitude Modulation
EMC	ElectroMagnetic Compatibility	QP	Quasi-Peak
EMI	ElectroMagnetic Interference	QPSK	Quadri-Phase Shift Keying
EN	European Norm	RBW	Resolution Band Width
ERP, e.r.p.	Effective Radiated Power	RDS	Radio Data System
EU	European Union	RE	Radio Equipment
EUT	Equipment Under Test	RF	Radio Frequency
Fac.	Factor	RMS	Root Mean Square
FCC	Federal Communications Commission	RSS	Radio Standards Specifications
FHSS	Frequency Hopping Spread Spectrum	Rx	Receiving
FM	Frequency Modulation	SA, S/A	Spectrum Analyzer
Freq.	Frequency	SG	Signal Generator
FSK	Frequency Shift Keying	SVSWR	Site-Voltage Standing Wave Ratio
GFSK	Gaussian Frequency-Shift Keying	TR	Test Receiver
GNSS	Global Navigation Satellite System	Tx	Transmitting
GPS	Global Positioning System	VBW	Video BandWidth
Hori.	Horizontal	Vert.	Vertical
ICES	Interference-Causing Equipment Standard	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing	10
SECTION 5: Radiated Spurious Emission and Band Edge Compliance	13
SECTION 6: Antenna Terminal Conducted Tests	16
APPENDIX 1: Test Data	17
99 % Occupied Bandwidth.....	17
6 dB Bandwidth.....	19
Maximum Conducted Output Power	21
Maximum Power Spectral Density	35
Radiated Spurious Emission.....	38
Conducted Spurious Emission.....	49
APPENDIX 2: Test Instruments	50
APPENDIX 3: Photographs of Test Setup	52
Radiated Spurious Emission.....	52
Antenna Terminal Conducted Tests	53

SECTION 1: Customer Information

Company Name	DENSO TEN Limited
Address	2-28, Goshō-dori 1-Chome, Hyogo-ku, KOBE 652-8510 JAPAN
Telephone Number	+81 78 682 2159
Contact Person	Kaoru Abe

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Car Audio
Model Number	TN0047A
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	August 9, 2024
Test Date	August 22 to September 12, 2024

2.2 Product Description

General Specification

Rating	DC 12 V
Operating temperature	-20 deg. C to +65 deg. C

Radio Specification-1/2

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

[WLAN (IEEE802.11b/11g/11n-20)]

Equipment Type	Transceiver
Frequency of Operation	2437 MHz
Type of Modulation	DSSS, OFDM
Antenna Gain	-0.57 dBi

[Bluetooth (BR/EDR)]

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK)
Antenna Gain	-0.49 dBi

Radio Specification-2/2

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band	5765 MHz
	40 MHz Band	5755 MHz
	80 MHz Band	5775 MHz
Type of Modulation	OFDM	
Antenna Gain ^{a)}	0.31 dBi	

[AM/FM/DAB]

Equipment Type	Receiver
Frequency of Operation	AM: 530 kHz to 1625 kHz FM: Band II: 87.5 MHz to 108.0 MHz DAB (Band III): 174.928 MHz to 239.200 MHz
Type of Modulation	AM FM DAB: OFDM
Antenna Connector Type	HFC IV
Impedance	AM, FM: 75 ohm DAB: 50 ohm

* WLAN and Bluetooth do not transmit simultaneously.

2.3 Variant models

There has five types; A, B, C, D, E and H. Tests were performed to Type A (base model) as representative model.

Frequency of Operation for WLAN is as following table.

	Type A (EUT)	Type B	Type C		Type D		Type E	Type H
	A-1	B-1	C-1 C-2	C-3 C-4	D-1 D-2	D-3 D-4	E-1 E-2	H-1, H-2
5735 MHz to 5815 MHz	Y	Y	Y	-	Y	-	Y	Y
2426 MHz to 2448 MHz	Y	-	-	Y	-	Y	-	-

*Wireless block hardware is the same as Type A.

Wifi frequency can be selected between 2.4 GHz or 5 GHz by the product's built-in software.

SECTION 3: Test specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart E The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart E Unlicensed National Information Infrastructure Devices Section 15.407 General technical requirements

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 ISED: RSS-Gen 8.8	FCC: 15.407 (b) (9) / 15.207 ISED: RSS-Gen 8.8	-	N/A	*1)
26 dB Emission Bandwidth	FCC: KDB Publication Number 789033 ISED: -	FCC: 15.407 (a) (1) (2) (3) ISED: -	See data	N/A	*2)
Maximum Conducted Output Power	FCC: KDB Publication Number 789033 ISED: -	FCC: 15.407 (a) (1) (2) (3) ISED: RSS-247 6.2		Complied	Conducted
Maximum Power Spectral Density	FCC: KDB Publication Number 789033 ISED: -	FCC: 15.407 (a) (1) (2) (3) ISED: RSS-247 6.2		Complied	Conducted
Spurious Emission Restricted Band Edge	FCC: ANSI C63.10-2013 KDB Publication Number 789033 ISED: -	FCC: 15.407 (b), 15.205 and 15.209 ISED: RSS-247 6.2	7.8 dB 400.0 MHz, QP, Vertical	Complied	Conducted (below 30 MHz) / Radiated (above 30 MHz) *3)
6 dB Emission Bandwidth	FCC: ANSI C63.10-2013 ISED: -	FCC: 15.407 (e) ISED: RSS-247 6.2	See data	Complied	Conducted

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.
* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.
*2) The test is not applicable since this product is a 5.8 GHz band product.
*3) Radiated test was selected over 30 MHz based on FCC 15.407 (b) and KDB 789033 D02 G.3.b).

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF part regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99 % Occupied Band Width	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Radiated emission

Measurement distance	Frequency range		Unit	Calculated Uncertainty (+/-)
3 m	9 kHz to 30 MHz		dB	3.3
10 m			dB	3.1
3 m	30 MHz to 200 MHz	Horizontal	dB	5.0
		Vertical	dB	5.0
	200 MHz to 1000 MHz	Horizontal	dB	5.2
		Vertical	dB	6.2
10 m	30 MHz to 200 MHz	Horizontal	dB	5.5
		Vertical	dB	5.4
	200 MHz to 1000 MHz	Horizontal	dB	5.5
		Vertical	dB	5.5
3 m	1 GHz to 6 GHz		dB	5.1
	6 GHz to 18 GHz		dB	5.4
1 m	10 GHz to 18 GHz		dB	5.4
	18 GHz to 26.5 GHz		dB	5.3
	26.5 GHz to 40 GHz		dB	4.8
0.5 m	26.5 GHz to 40 GHz		dB	5.0

Antenna Terminal Conducted

Item	Unit	Calculated Uncertainty (+/-)
Antenna terminated conducted emission / Power density / Burst power	dB	3.47
Adjacent channel power (ACP)	dB	2.28
Bandwidth (OBW)	%	0.96
Time readout (time span upto 100 msec)	%	0.11
Time readout (time span upto 1000 msec)	%	0.11
Time readout (time span upto 60 sec)	%	0.02
Power measurement (Power meter < 8 GHz)	dB	1.46
Power measurement (Call box < 6 GHz)	dB	1.69
Frequency readout (Frequency counter)	ppm	0.67
Frequency readout (Spectrum analyzer frequency readout function)	ppm	2.13
Temperature (constant temperature bath)	deg. C	0.69
Humidity (constant temperature bath)	%RH	2.98
Modulation characteristics	%	6.93
Frequency for mobile	ppm	0.08
Contention-based protocol	dB	2.26

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan

Telephone: +81-596-24-8999

A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing


4.1 Operating Mode(s)

Mode	Remarks*
IEEE 802.11a (11a)	48 Mbps, PN9
IEEE 802.11n 20 MHz BW (11n-20)	MCS 4 (Long GI), PN9
IEEE 802.11ac 20 MHz BW (11ac-20)	MCS 8 (Long GI), PN9
IEEE 802.11n 40 MHz BW (11n-40)	MCS 6 (Long GI), PN9
IEEE 802.11ac 40 MHz BW (11ac-40)	MCS 8 (Long GI), PN9
IEEE 802.11ac 80 MHz BW (11ac-80)	MCS 3 (Long GI), PN9
*The worst condition was determined based on the test result of Maximum Conducted Output Power.	
*Power of the EUT was set by the software as follows; Power Setting: 11a: 6.5 dBm 11n-20: 6.5 dBm 11ac-20: 6.5 dBm 11n-40: 6.5 dBm 11ac-40: 6.5 dBm 11ac-80: 6.5 dBm Software: Wi-Fi Test FW_WF1 Version: WF1 (Date: August 8, 2024, Storage location: EUT memory)	
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	
Test operating mode was determined as follows according to "Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - " of TCB Council Workshop October 2009 and also was judged the necessity of 802.11ac mode by the pre-test.	

*The Details of Operation Mode(s)

Test Item	Operating Mode	Tested Frequency			
		Lower Band	Middle Band	Additional Band	Upper Band
99 % Occupied Bandwidth, 6 dB Bandwidth, Maximum Conducted Output Power, Maximum Power Spectral Density	Tx 11a	-	-	-	5765 MHz
	Tx 11n-20	-	-	-	-
	Tx 11ac-20	-	-	-	-
	Tx 11n-40	-	-	-	5755 MHz
Radiated Spurious Emission (Below 1 GHz)	Tx 11ac-40	-	-	-	-
	Tx 11ac-80	-	-	-	5775 MHz
	Tx 11ac-80 *1)	-	-	-	5775 MHz
	Tx 11a	-	-	-	5765 MHz
Radiated Spurious Emission (Above 1 GHz)	Tx 11ac-20 *2)	-	-	-	-
	Tx 11n-40	-	-	-	5755 MHz
	Tx 11ac-40	-	-	-	-
	Tx 11ac-80	-	-	-	5775 MHz
Conducted Spurious Emission	Tx 11a	-	-	-	5765 MHz
*1) The mode was tested as a representative, because it had the highest power at antenna terminal test.					
*2) Since each of 20 MHz BW (11n-20 / 11ac-20) have the same modulation method and no differences in transmitting specification, the test was performed on the representative mode that had the highest output power.					

4.2 Configuration and Peripherals

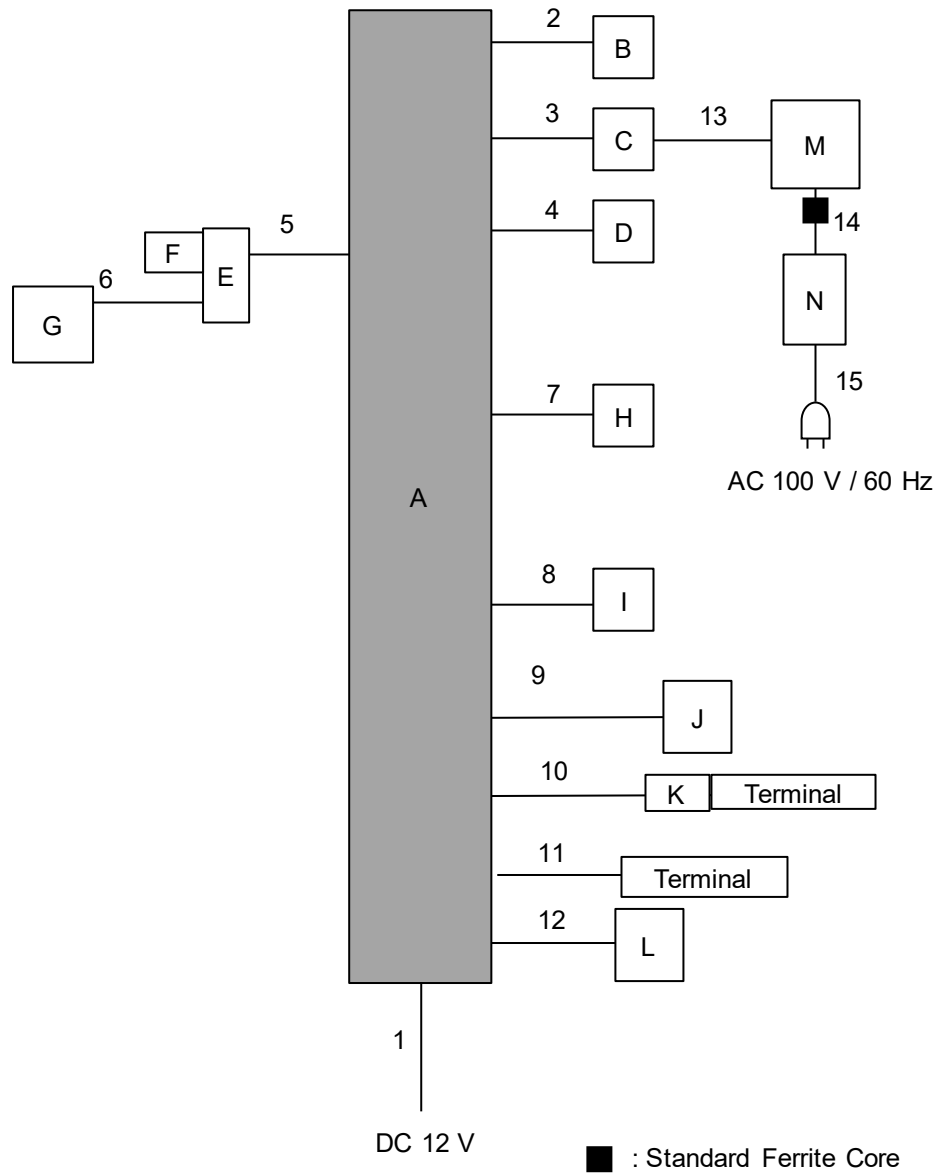

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Car Audio	TN0047A	100292248-0004	DENSO TEN Limited	EUT
B	Micro Phone	86730-78010	31C043761	Panasonic	-
C	Jig board	-	-	-	-
D	Digital Camera	867B0-78070	THX4235Q05385	Panasonic	-
E	USB I/F BOX	86190-78020	500870	Panasonic	-
F	USB Memory	RUF3-K16GB	P10416	Buffalo Inc.	-
G	iPod touch	MC540J/A	C3RJ4SLADT75	Apple	-
H	Steering Switch	84250-58150-BO	NO2	-	-
I	GNSS Antenna	86880-78010	34347	Harada Industry Co., Ltd.	-
J	Speaker Dummy	SP Dummy	DUMMY-210810-001	DENSO TEN Limited	-
K	AM / FM Dummy	AM / FM Dummy	NO1	DENSO TEN Limited	-
L	Analog Camera	86790-60670	D310026	Panasonic	-
M	Laptop PC	CF-N8HWCDPS	0BKSA08729	Panasonic	*1)
N	AC Adapter	CF-AA6372B	6372BM610909023E	Panasonic	*1)

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	5.0	Unshielded	Unshielded	-
2	Signal Cable	3.0	Unshielded	Unshielded	-
3	Flat Cable	0.1	Unshielded	Unshielded	-
4	Signal Cable	5.0	Unshielded	Unshielded	-
5	Signal Cable	3.0	Unshielded	Unshielded	-
6	USB Cable	1.0	Shielded	Shielded	-
7	Signal Cable	3.0	Unshielded	Unshielded	-
8	GNSS Antenna Cable	3.0	Shielded	Shielded	-
9	Speaker Cable	3.0	Unshielded	Unshielded	-
10	AM / FM Cable	0.2	Shielded	Shielded	-
11	DAB Cable	3.5	Unshielded	Unshielded	-
12	Signal Cable	3.0	Unshielded	Unshielded	-
13	USB Cable	0.9	Shielded	Shielded	*1)
14	DC Cable	1.0	Unshielded	Unshielded	*1)
15	AC Cable	0.8	Unshielded	Unshielded	*1)

*1) Antenna Terminal Conducted test only

SECTION 5: Radiated Spurious Emission and Band Edge Compliance

Test Procedure

< Below 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1 GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1 GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1 GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p.*) in the Section 15.407 (b) (1) (2) (3).

For 5.8 GHz band Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ (uV/m)} \quad : P \text{ is the e.i.r.p. (Watts)}$$


Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1 GHz	
Instrument Used	Test Receiver	Spectrum Analyzer	
Detector	QP	Peak	Average
IF Bandwidth	BW: 120 kHz	RBW: 1 MHz VBW: 3 MHz	Method AD RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: ≥ 100 traces If duty cycle was less than 98%, a duty factor was added to the results.

Figure 1: Test Setup


Below 1 GHz

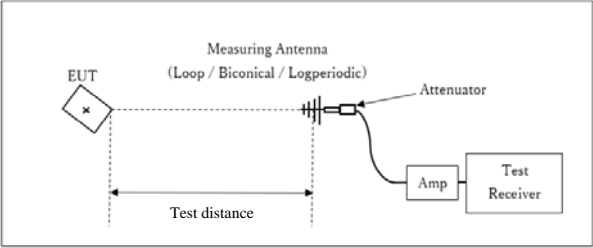

x : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

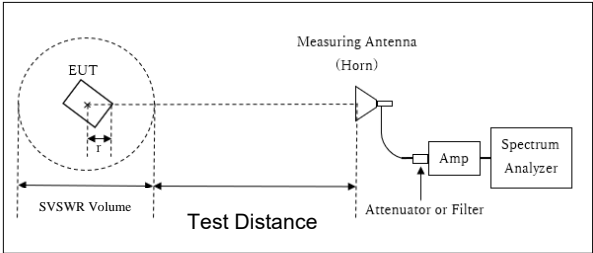

r : Radius of an outer periphery of EUT
x : Center of turn table


[1 GHz to 6 GHz]
Distance Factor: $20 \times \log (3.55 \text{ m} / 3.0 \text{ m}) = 1.47 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.55 \text{ m}$

SVSWR Volume : 1.5 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.2 \text{ m}$

[6 GHz to 10 GHz]
Distance Factor: $20 \times \log (3.55 \text{ m} / 3.0 \text{ m}) = 1.47 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.55 \text{ m}$

SVSWR Volume : 1.5 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.2 \text{ m}$

10 GHz to 40 GHz

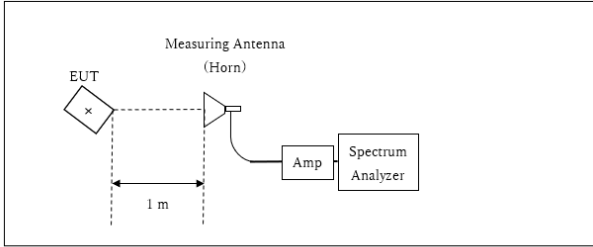

x : Center of turn table

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$
*Test Distance: 1 m

The test was made on EUT at the normal use position.

Test results are rounded off and limit are rounded down, so some differences might be observed.

Measurement Range : 30 MHz to 40 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used and Test method
26 dB Bandwidth	Enough to capture the emission	Close to 1 % of EBW	> RBW	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 % to 5 % of OBW	≥ 3 RBW	Auto	Peak	Max Hold	Spectrum Analyzer
6 dB Bandwidth	Enough to capture the emission	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Conducted Output Power	-	-	-	Auto	Average	-	Power Meter (Sensor: 80 MHz BW) (Method PM)
Maximum Power Spectral Density	Encompass the entire EBW	470 kHz *2)	≥ 3 RBW	Auto	RMS Power Averaging (200 times)	Clear Write	Spectrum Analyzer
Conducted Spurious Emission*3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
*1) Peak hold was applied as Worst-case measurement.							
*2) KDB 789033 D02 says that RBW is set to be 500 kHz for 5.725 GHz to 5.850 GHz, but it is not possible with spectrum analyzer, so RBW Correction Factor (10 log(500 kHz / 470 kHz)) was added to the test result.							
*3) In the frequency range below 30 MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9 kHz to 150 kHz: RBW = 200 Hz, 150 kHz to 30 MHz: RBW = 10 kHz)							
*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to 45.5 – 51.5 = -6.0 dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.							

Test results are rounded off and limit are rounded down, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test Data

99 % Occupied Bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Date	September 12, 2024
Temperature / Humidity	24 deg. C / 48 % RH
Engineer	Nachi Konegawa
Mode	Tx

11a

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 1	5765	-	16580.9

11n-20

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 1	5765	-	17773.1

11ac-20

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 1	5765	-	17752.3

11n-40

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 1	5755	-	36227.4


11ac-40

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 1	5755	-	36254.7

11ac-80

Antenna	Tested Frequency [MHz]	26 dB Emission Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]
Antenna 1	5775	-	75650.5

99 % Occupied Bandwidth

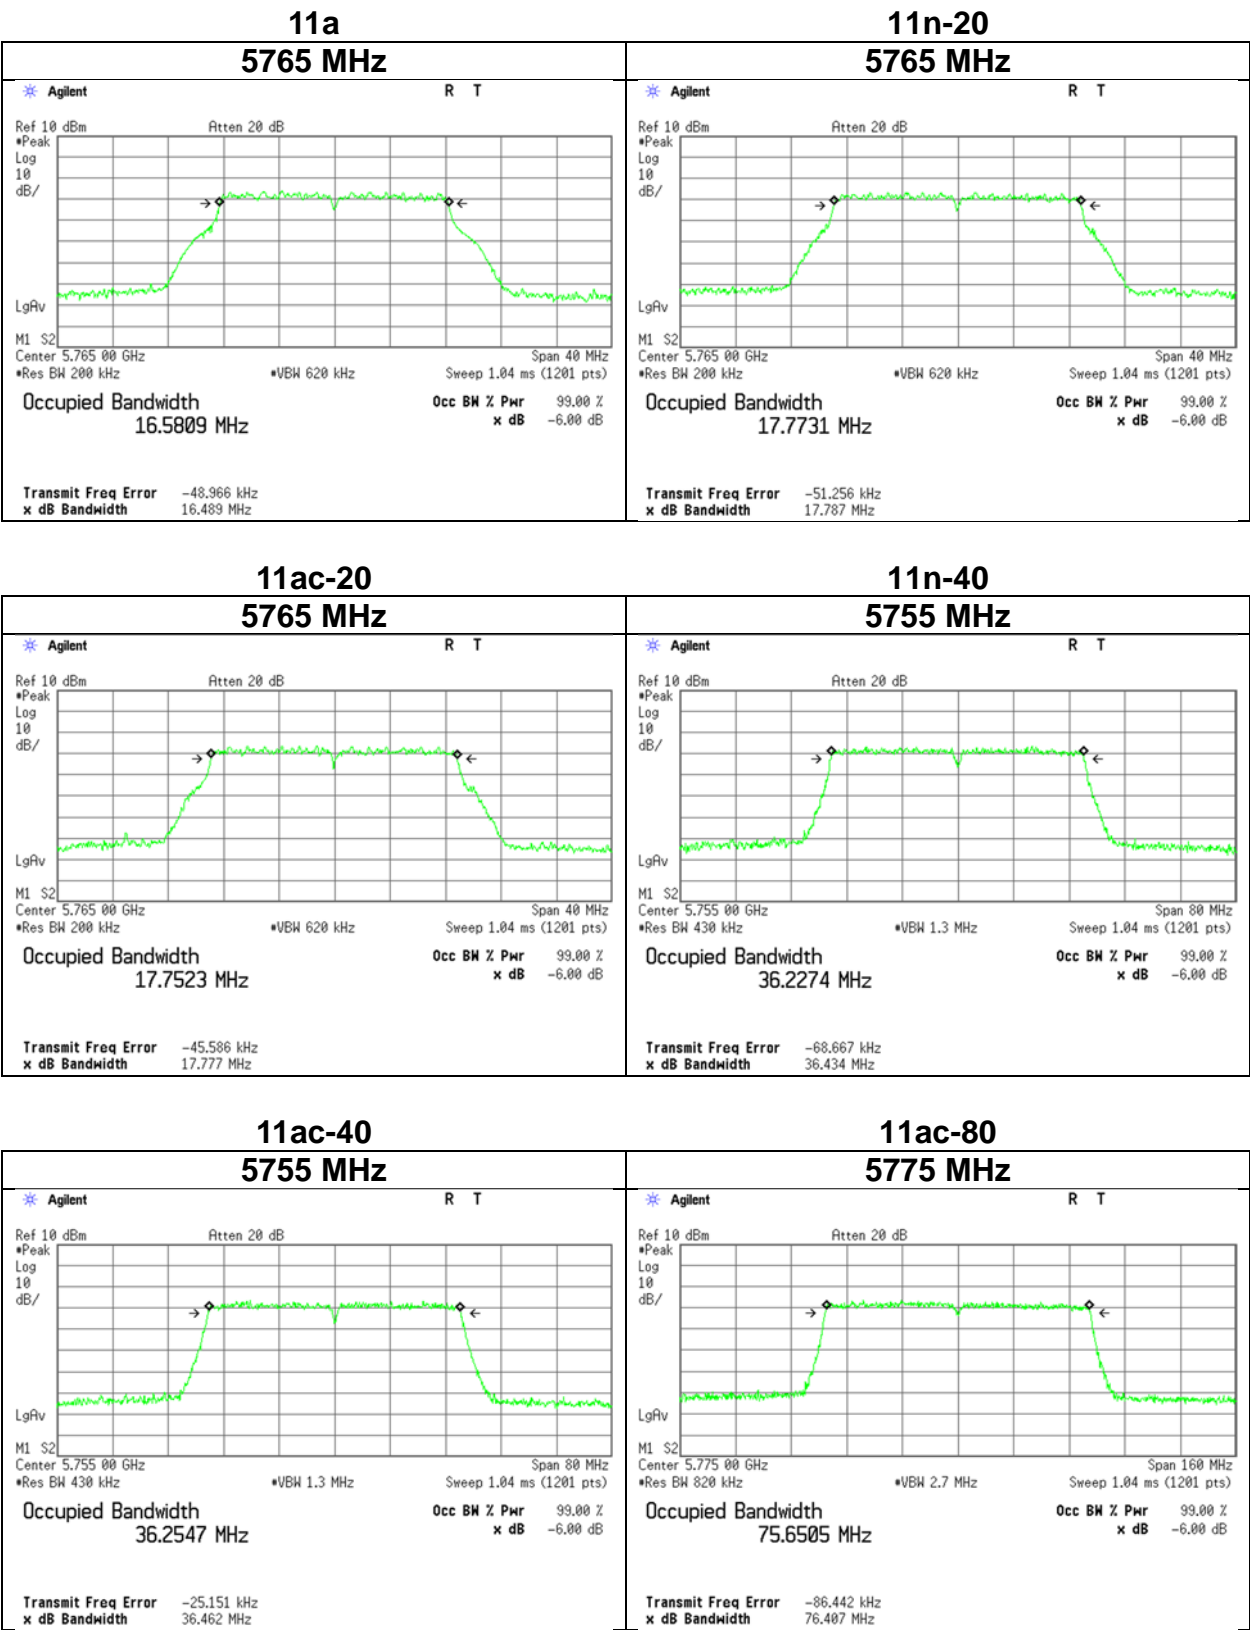

6 dB Bandwidth

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
September 12, 2024
24 deg. C / 48 % RH
Nachi Konegawa
Tx

11a

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 1	5765	16.468	> 0.500

11n-20

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 1	5765	17.737	> 0.500

11ac-20

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 1	5765	17.721	> 0.500

11n-40

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 1	5755	36.470	> 0.500


11ac-40

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 1	5755	36.281	> 0.500

11ac-80

Antenna	Tested Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
Antenna 1	5775	76.042	> 0.500

6 dB Bandwidth

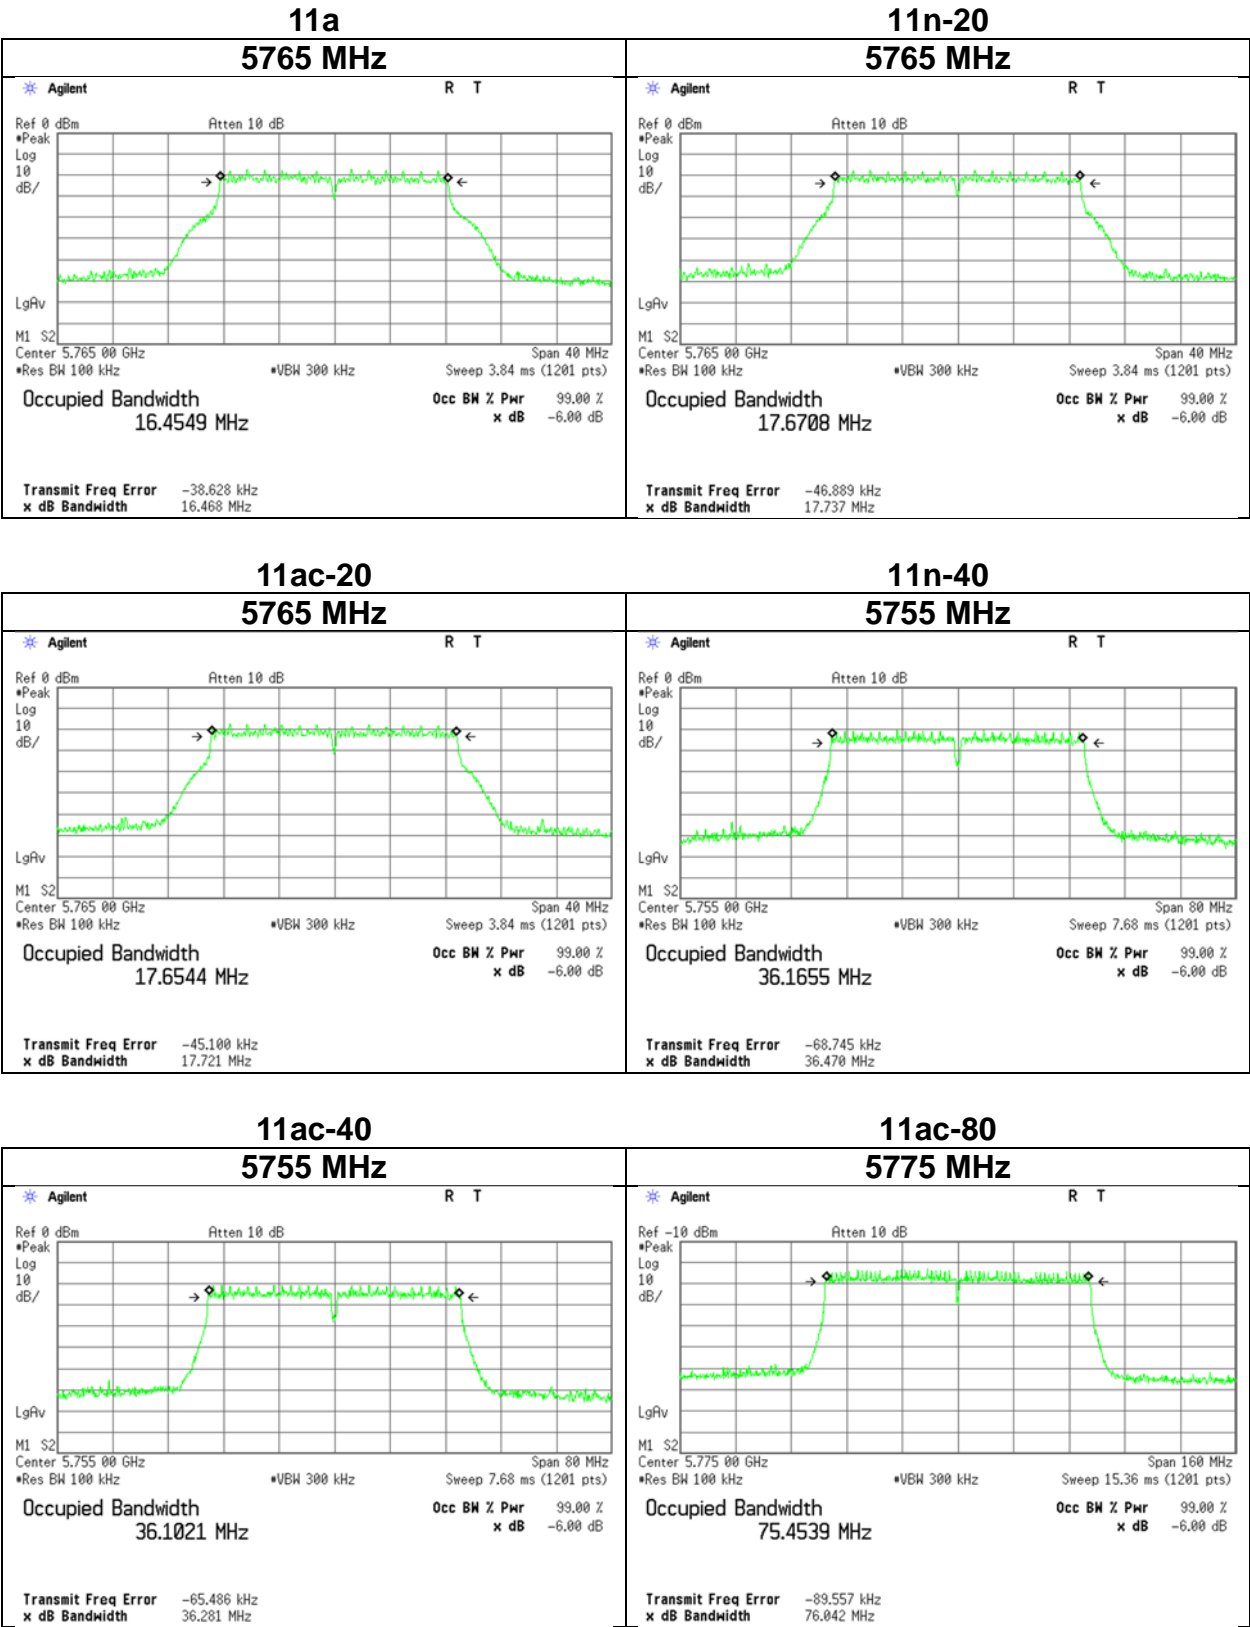

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11a

11a

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	Conducted Power								e.i.r.p.					
						Result		FCC 15.407		RSS-247		Result		FCC 15.407		RSS-247			
						Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin		
						[dBm]	[dB]	[dBm]	[dB]	[dBm]	[dB]	[dBm]	[dB]	[dBm]	[dB]	[dBm]	[dB]	[dBm]	[dB]
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[dB]		
5765	4.42	1.12	0.00	1.72	0.31	7.26	5.32	30.00	22.74	30.00	22.74	7.57	5.71	36.00	28.43	36.00	28.43		

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

$$e.i.r.p. \text{ Result} = \text{Conducted Power Result} + \text{Antenna Gain}$$

15.407 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or $(11 + 10\log B)$ dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

For all test frequencies, B was applied the minimum value (18.000 MHz) as conservative limit.

RSS-247 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

e.i.r.p. Limit (5150 MHz-5250 MHz) = 200mW or (10 + 10logB) dBm, whichever is lower

e.i.r.p. Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 1W or (17 + 10logB) dBm, whichever is lower

For all test frequencies, B was applied the minimum value (16.581 MHz) as conservative limit.

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for IC)

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11n-20

11n-20

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	Conducted Power						e.i.r.p.					
						Result		FCC 15.407		RSS-247		Result		FCC 15.407		RSS-247	
						[dBm]	[mW]	[dBm]	Margin [dB]	[dBm]	Margin [dB]	[dBm]	[mW]	[dBm]	Margin [dB]	[dBm]	Margin [dB]
5765	4.25	1.12	0.00	1.35	0.31	6.72	4.70	30.00	23.28	30.00	23.28	7.03	5.04	36.00	28.97	36.00	28.97

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

15.407 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or $(11 + 10\log B)$ dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

For all test frequencies, B was applied the minimum value (18.000 MHz) as conservative limit.

RSS-247 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

e.i.r.p. Limit (5150 MHz-5250 MHz) = 200mW or $(10 + 10\log B)$ dBm, whichever is lower

e.i.r.p. Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 1W or (17 + 10logB) dBm, whichever is lower

For all test frequencies, B was applied the minimum value (17773.100 MHz) as conservative limit.

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for IC)

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11ac-20

11ac-20

Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	Conducted Power						e.i.r.p.					
						Result		FCC 15.407		RSS-247		Result		FCC 15.407		RSS-247	
						Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[dB]
5765	3.94	1.12	0.00	2.09	0.31	7.15	5.19	30.00	22.85	30.00	22.85	7.46	5.57	36.00	28.54	36.00	28.54

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

$$\text{e.i.r.p. Result} = \text{Conducted Power Result} + \text{Antenna Gain}$$

15.407 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or $(11 + 10\log B)$ dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

For all test frequencies, B was applied the minimum value (18.000 MHz) as conservative limit.

RSS-247 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 250 mW or $(11 + 10\log B)$ dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

e.i.r.p. Limit (5150 MHz-5250 MHz) = 200mW or $(10 + 10\log B)$ dBm, whichever is lower

e.i.r.p. Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 1W or $(17 + 10\log B)$ dBm, whichever is lower

For all test frequencies, B was applied the minimum value (17752.300 MHz) as conservative limit.

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for IC)

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11n-40

11n-40

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	Conducted Power						e.i.r.p.					
						Result		FCC 15.407		RSS-247		Result		FCC 15.407		RSS-247	
						[dBm]	[mW]	Limit [dBm]	Margin [dB]	Limit [dBm]	Margin [dB]	[dBm]	[mW]	Limit [dBm]	Margin [dB]	Limit [dBm]	Margin [dB]
5755	3.11	1.09	0.00	2.68	0.31	6.88	4.88	30.00	23.12	30.00	23.12	7.19	5.24	36.00	28.81	36.00	28.81

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

$$e.i.r.p. \text{ Result} = \text{Conducted Power Result} + \text{Antenna Gain}$$

15.407 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or $(11 + 10\log B)$ dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

For all test frequencies, B was applied the minimum value (18.000 MHz) as conservative limit.

RSS-247 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

e.i.r.p. Limit (5150 MHz-5250 MHz) = 200mW or (10 + 10logB) dBm, whichever is lower

e.i.r.p. Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 1W or (17 + 10logB) dBm, whichever is lower

For all test frequencies, B was applied the minimum value (36227.400 MHz) as conservative limit.

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for IC)

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11ac-40

11ac-40

Tested Frequency [MHz]	Power Meter Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Duty Factor [dB]	Antenna Gain [dBi]	Conducted Power						e.i.r.p.					
						Result		FCC 15.407		RSS-247		Result		FCC 15.407		RSS-247	
						[dBm]	[mW]	Limit [dBm]	Margin [dB]	Limit [dBm]	Margin [dB]	[dBm]	[mW]	Limit [dBm]	Margin [dB]	Limit [dBm]	Margin [dB]
5755	2.86	1.09	0.00	2.61	0.31	6.56	4.53	30.00	23.44	30.00	23.44	6.87	4.86	36.00	29.13	36.00	29.13

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

$$e.i.r.p. \text{ Result} = \text{Conducted Power Result} + \text{Antenna Gain}$$

15.407 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or $(11 + 10\log B)$ dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

For all test frequencies, B was applied the minimum value (18.000 MHz) as conservative limit.

RSS-247 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

e.i.r.p. Limit (5150 MHz-5250 MHz) = 200mW or $(10 + 10\log B)$ dBm, whichever is lower

e.i.r.p. Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 1W or (17 + 10logB) dBm, whichever is lower

For all test frequencies, B was applied the minimum value (36254.700 MHz) as conservative limit.

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for IC)

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11ac-80

11ac-80																		
Tested Frequency	Power Meter Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	Conducted Power						e.i.r.p.						
						Result		FCC 15.407		RSS-247		Result		FCC 15.407		RSS-247		
						Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin	Limit	Margin	
[MHz]	[dBm]	[dB]	[dB]	[dB]	[dBi]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[dB]	[dBm]	[mW]	[dBm]	[dB]	[dBm]	[dB]	
5775	2.82	1.14	0.00		3.67	0.31	7.63	5.79	30.00	22.37			30.00	22.37	7.94	6.22	36.00	28.06

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

$$e.i.r.p. \text{ Result} = \text{Conducted Power Result} + \text{Antenna Gain}$$

15.407 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or $(11 + 10\log B)$ dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

For all test frequencies, B was applied the minimum value (18.000 MHz) as conservative limit.

RSS-247 Limit

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

Conducted Power Limit (5725 MHz-5850 MHz) = 1W

e.i.r.p. Limit (5150 MHz-5250 MHz) = 200mW or (10 + 10logB) dBm, whichever is lower

e.i.r.p. Limit (5250 MHz-5350 MHz, 5470 MHz-5600 MHz, 5650 MHz-5725 MHz) = 1W or (17 + 10logB) dBm, whichever is lower

For all test frequencies, B was applied the minimum value (75650.500 MHz) as conservative limit.

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725-5850MHz for IC)

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11a

11a, 5765 MHz

Data rate [Mbps]	Reading Antenna [dBm]	Remark
6	5.29	
9	5.35	
12	5.64	
18	5.68	
24	6.12	
36	5.97	
48	6.20	*
54	5.88	

* Worst data rate
Cable Loss and Attenuator Loss are included in the P/M(AV) Reading
All comparison were carried out on same frequency and measurement factors.
Difference between worst rate check data and formal test result is due to the different test condition.

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11n-20

11n-20, 5765 MHz

Data rate [MCS]	Reading Antenna Long GI [dBm]	Reading Antenna Short GI [dBm]	Remark
0	5.50	-	
1	5.72	-	
2	5.51	-	
3	6.07	-	
4	6.17	6.16	*
5	6.14	-	
6	6.09	-	
7	6.03	-	

* Worst data rate
Cable Loss and Attenuator Loss are included in the P/M(AV) Reading
All comparizon were carried out on same frequency and measurement factors.
Difference between worst rate check data and formal test result is due to the different test condition.

Maximum Conducted Output Power

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.8 Measurement Room
August 22, 2024
22 deg. C / 68 % RH
Junki Nagatomi
Tx 11ac-20

11ac-20, 5765 MHz

Data rate [MCS]	Reading Antenna Long GI [dBm]	Reading Antenna Short GI [dBm]	Remark
0	5.43	-	
1	5.74	-	
2	5.77	-	
3	6.02	-	
4	6.12	-	
5	6.26	-	
6	6.27	-	
7	6.24	-	
8	6.29	6.27	*

* Worst data rate

Cable Loss and Attenuator Loss are included in the P/M(AV) Reading

All comparizon were carried out on same frequency and measurement factors.

Difference between worst rate check data and formal test result is due to the different test condition.

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11n-40

11n-40, 5755 MHz

Data rate [MCS]	Reading Antenna Long GI [dBm]	Reading Antenna Short GI [dBm]	Remark
0	5.54	-	
1	5.49	-	
2	5.60	-	
3	5.98	-	
4	5.79	-	
5	5.92	-	
6	6.00	5.98	*
7	5.98	-	

* Worst data rate
Cable Loss and Attenuator Loss are included in the P/M(AV) Reading
All comparizon were carried out on same frequency and measurement factors.
Difference between worst rate check data and formal test result is due to the different test condition.

Maximum Conducted Output Power

Test place	Ise EMC Lab. No.8 Measurement Room
Date	August 22, 2024
Temperature / Humidity	22 deg. C / 68 % RH
Engineer	Junki Nagatomi
Mode	Tx 11ac-40

11ac-40, 5755 MHz

Data rate [MCS]	Reading Antenna Long GI [dBm]	Reading Antenna Short GI [dBm]	Remark
0	5.93	-	
1	5.56	-	
2	5.61	-	
3	5.95	-	
4	5.78	-	
5	5.92	-	
6	5.88	-	
7	5.90	-	
8	5.97	5.96	*
9	5.69	-	

* Worst data rate

Cable Loss and Attenuator Loss are included in the P/M(AV) Reading

All comparizon were carried out on same frequency and measurement factors.

Difference between worst rate check data and formal test result is due to the different test condition.

[illegible]Worst data rate

Cable Loss and Attenuator Loss are included in the $1/\text{M(AV)}$ Reading

All comparisons were carried out on same frequency and measurement factors.


Difference between Worst-Case Check data and formal test result is due to the different test condition.

Burst rate confirmation


Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.8 Measurement Room
August 22, 2024
22 deg. C / 68 % RH
Junki Nagatomi
Tx


11a 48 Mbps

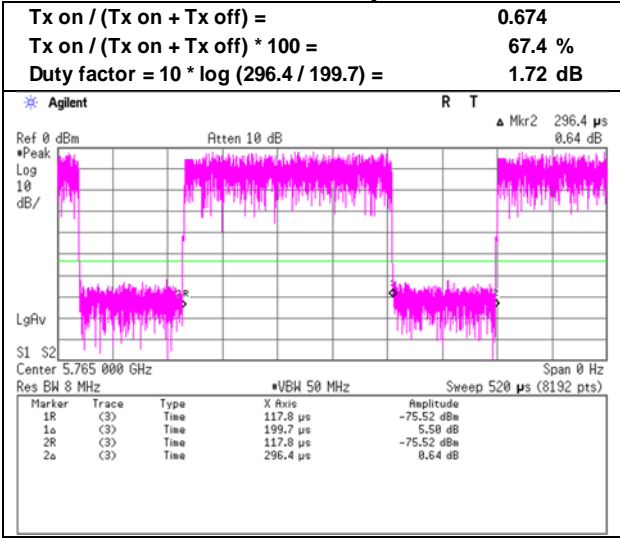

11n-20 MCS 4 (Long GI)

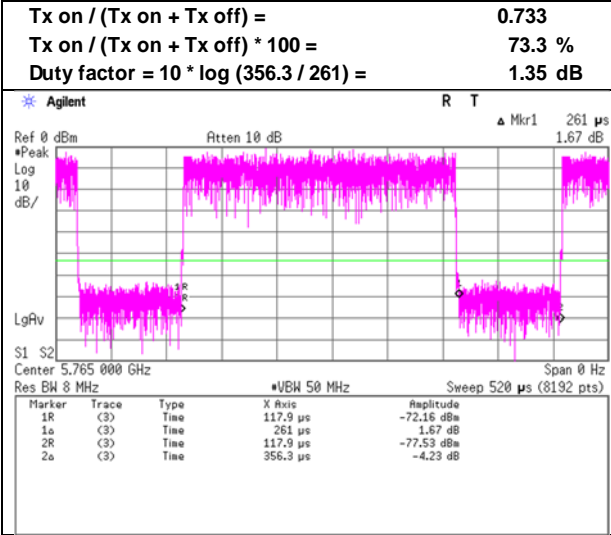

11ac-20 MCS 8 (Long GI)

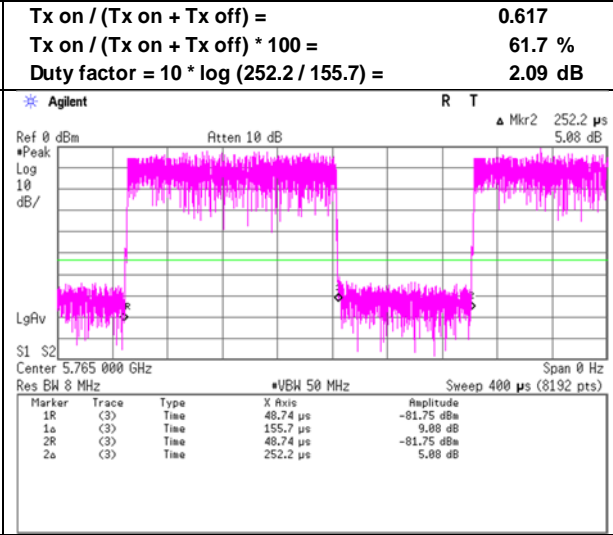


Burst rate confirmation

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.8 Measurement Room
August 22, 2024
22 deg. C / 68 % RH
Junki Nagatomi
Tx


11n-40 MCS 6 (Long GI)

$Tx\ on / (Tx\ on + Tx\ off) =$	0.539
$Tx\ on / (Tx\ on + Tx\ off) * 100 =$	53.9 %
$Duty\ factor = 10 * \log (208.3 / 112.3) =$	2.68 dB

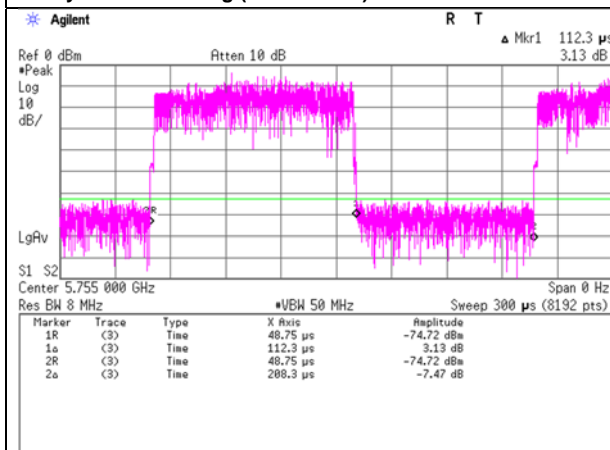


11ac-40 MCS 8 (Long GI)

$Tx\ on / (Tx\ on + Tx\ off) =$	0.548
$Tx\ on / (Tx\ on + Tx\ off) * 100 =$	54.8 %
$Duty\ factor = 10 * \log (212 / 116.2) =$	2.61 dB

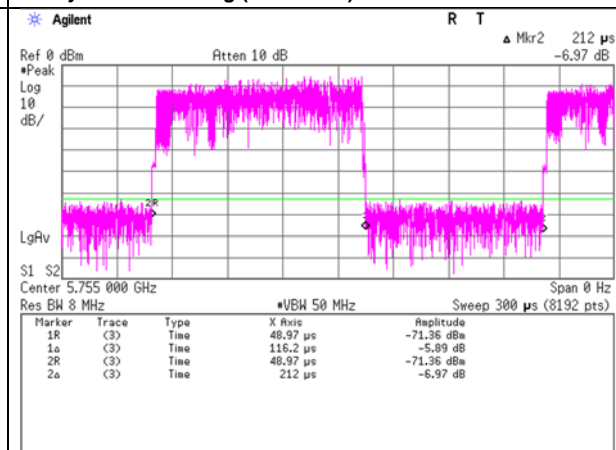

11ac-80 MCS 3 (Long GI)

$Tx\ on / (Tx\ on + Tx\ off) =$	0.429
$Tx\ on / (Tx\ on + Tx\ off) * 100 =$	42.9 %
$Duty\ factor = 10 * \log (168.3 / 72.24) =$	3.67 dB

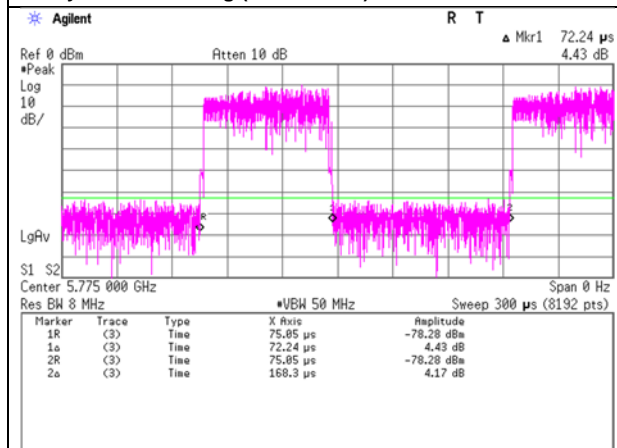

Maximum Power Spectral Density

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
September 12, 2024
24 deg. C / 48 % RH
Nachi Konegawa
Tx

11a

Tested Frequency	PSD Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	RBW Correction Factor	PSD (Conducted)					PSD (e.i.r.p.)				
							Result	FCC 15.407		RSS-247		Result	FCC 15.407		RSS-247	
								Limit	Margin	Limit	Margin		Limit	Margin	Limit	Margin
[MHz]	[dBm/MHz]	[dB]	[dB]	[dB]	[dBi]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]
5765	-21.34	2.76	9.58	1.72	0.31	0.27	-7.01	30.00	37.01	30.00	37.01	-6.70	36.00	42.70	36.00	42.70

11n-20

Tested Frequency	PSD Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	RBW Correction Factor	PSD (Conducted)					PSD (e.i.r.p.)				
							Result	FCC 15.407		RSS-247		Result	FCC 15.407		RSS-247	
								Limit	Margin	Limit	Margin		Limit	Margin	Limit	Margin
[MHz]	[dBm/MHz]	[dB]	[dB]	[dB]	[dBi]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]
5765	-21.48	2.76	9.58	1.35	0.31	0.27	-7.52	30.00	37.52	30.00	37.52	-7.21	36.00	43.21	36.00	43.21

11ac-20

Tested Frequency	PSD Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	RBW Correction Factor	PSD (Conducted)					PSD (e.i.r.p.)				
							Result	FCC 15407		RSS-247		Result	FCC 15407		RSS-247	
								Limit	Margin	Limit	Margin		Limit	Margin		
															[dBm/MHz]	[dB]
[MHz]	[dBm/MHz]	[dB]	[dB]	[dB]	[dBi]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]
5765	-22.56	2.76	9.58	2.09	0.31	0.27	-7.87	30.00	37.87	30.00	37.87	-7.56	36.00	43.56	36.00	43.56

11n-40

Tested Frequency	PSD Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	RBW Correction Factor	PSD (Conducted)					PSD (e.i.r.p.)				
							Result	FCC 15.407		RSS-247		Result	FCC 15.407		RSS-247	
								Limit	Margin	Limit	Margin		Limit	Margin	Limit	Margin
[MHz]	[dBm/MHz]	[dB]	[dB]	[dB]	[dBi]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]
5755	-25.64	2.73	9.58	2.68	0.31	0.27	-10.38	30.00	40.38	30.00	40.38	-10.07	36.00	46.07	36.00	46.07

11ac-40

Tested Frequency	PSD Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	RBW Correction Factor	PSD (Conducted)						PSD (e.i.r.p.)					
							Result	FCC 15.407		RSS-247		Result	FCC 15.407		RSS-247			
								Limit	Margin	Limit	Margin		Limit	Margin	Limit	Margin		
[MHz]	[dBm/MHz]	[dB]	[dB]	[dB]	[dBi]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]		
5755	-25.80	2.73	9.58	2.61	0.31	0.27	-10.61	30.00	40.61	30.00	40.61	-10.30	36.00	46.30	36.00	46.30		

11ac-80

Tested Frequency	PSD Reading	Cable Loss	Atten. Loss	Duty Factor	Antenna Gain	RBW Correction Factor	PSD (Conducted)					PSD (e.i.r.p.)				
							Result	FCC 15.407		RSS-247		Result	FCC 15.407		RSS-247	
								Limit	Margin	Limit	Margin		Limit	Margin	Limit	Margin
[MHz]	[dBm/MHz]	[dB]	[dB]	[dB]	[dBi]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]	[dBm/MHz]	[dBm/MHz]	[dB]	[dBm/MHz]	[dB]
5775	-28.89	2.78	9.58	3.67	0.31	0.27	-12.60	30.00	42.60	30.00	42.60	-12.29	36.00	48.29	36.00	48.29

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = $10 \cdot \log(\text{Specified bandwidth} / \text{Measured bandwidth})$


PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)


Maximum Power Spectral Density

Test place	Ise EMC Lab. No.6 Measurement Room
Date	September 12, 2024
Temperature / Humidity	24 deg. C / 48 % RH
Engineer	Nachi Konegawa
Mode	Tx

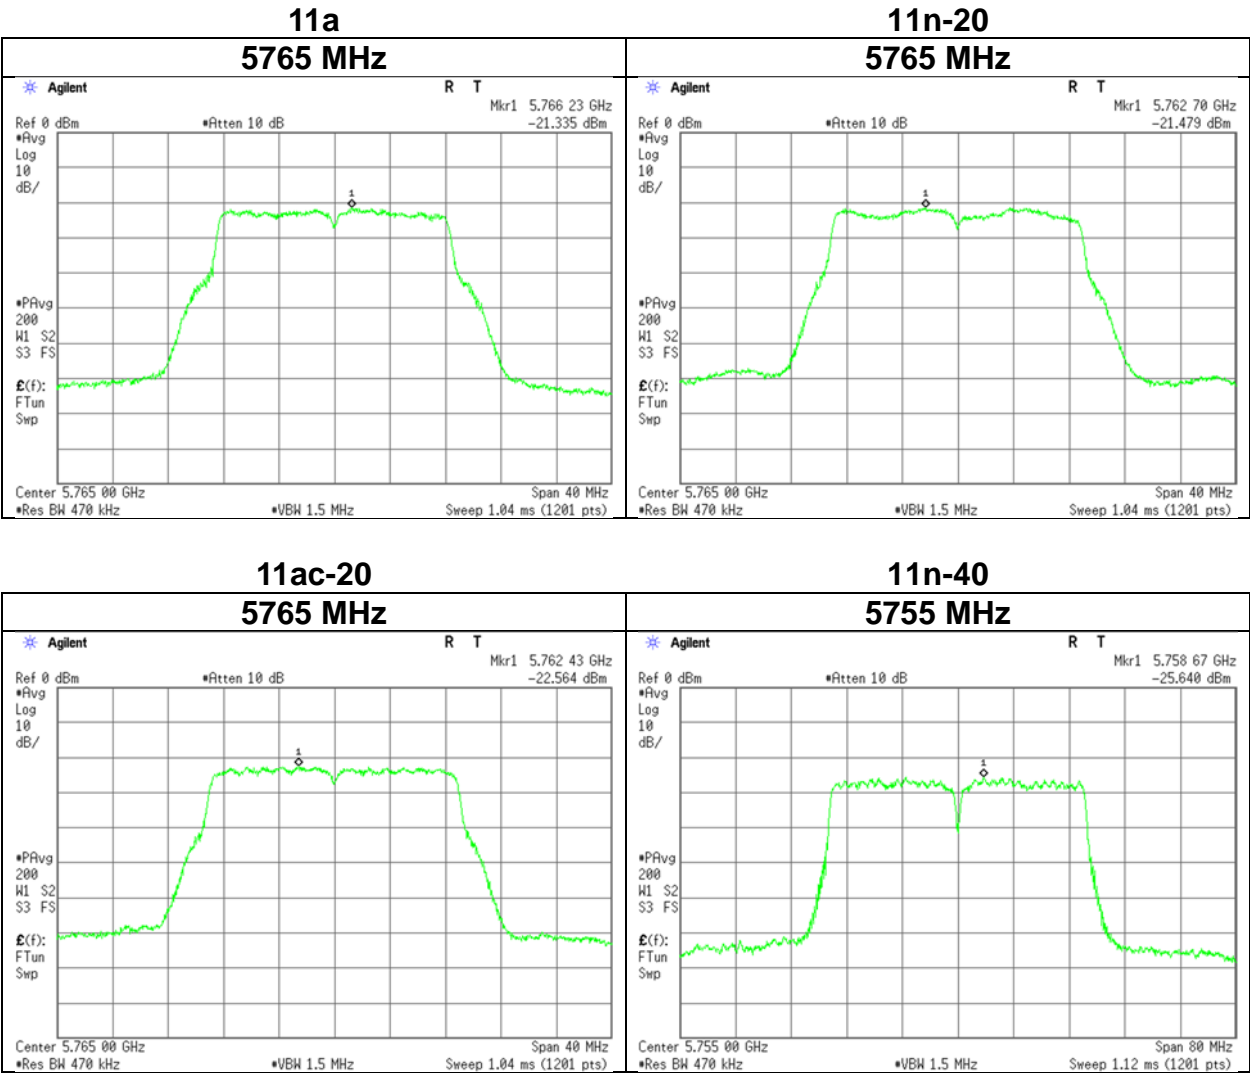

Maximum Power Spectral Density

Test place	Ise EMC Lab. No.6 Measurement Room
Date	September 12, 2024
Temperature / Humidity	24 deg. C / 48 % RH
Engineer	Nachi Konegawa
Mode	Tx

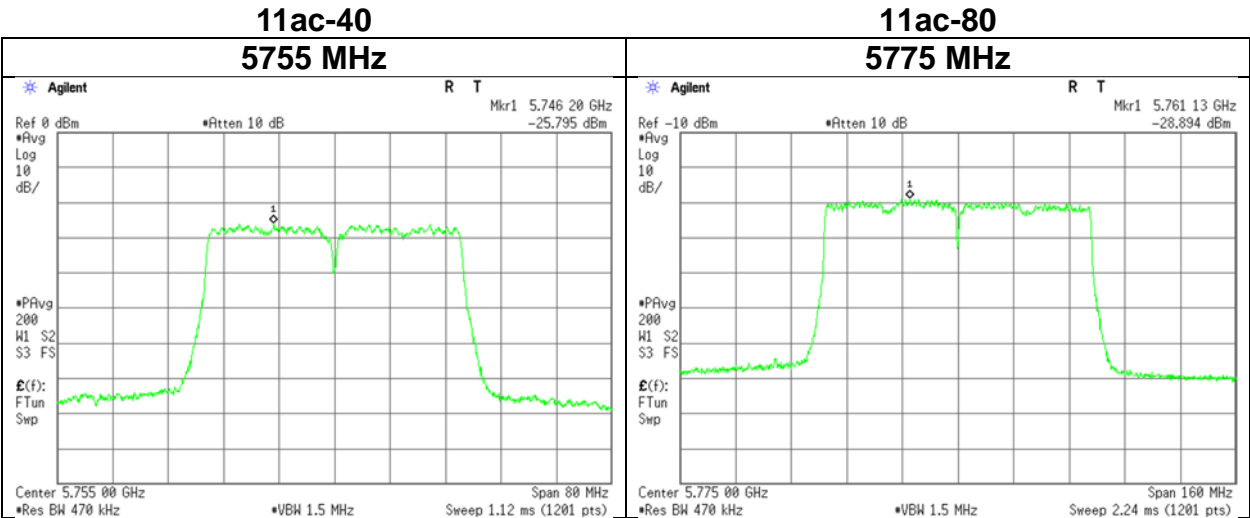

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
August 30, 2024
22 deg. C / 70 % RH
Tomoya Sone
(1 GH to 18 GHz)
Tx 11a 5765 MHz

No.2
September 1, 2024
22 deg. C / 71 % RH
Tetsuro Yoshida
(Above 18 GHz)


Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.9	-	31.8	5.2	31.2	-	46.8	-	68.2	-	21.5	-	
Hori.	5700.0	42.6	-	31.9	5.2	31.2	-	48.6	-	105.2	-	56.6	-	
Hori.	5720.0	42.7	-	32.0	5.3	31.2	-	48.7	-	110.8	-	62.1	-	
Hori.	5725.0	42.0	-	32.0	5.3	31.2	-	48.1	-	122.2	-	74.1	-	
Hori.	5850.0	40.8	-	32.3	5.3	31.2	-	47.2	-	122.2	-	75.0	-	
Hori.	5855.0	40.9	-	32.3	5.3	31.2	-	47.3	-	110.8	-	63.5	-	
Hori.	5875.0	40.7	-	32.3	5.3	31.2	-	47.2	-	105.2	-	58.0	-	
Hori.	5925.0	41.1	-	32.4	5.3	31.2	-	47.7	-	68.2	-	20.5	-	*1)
Hori.	11530.0	41.6	33.8	37.5	-2.2	32.8	-	44.2	36.3	73.9	53.9	29.7	17.6	Floor noise
Hori.	17295.0	42.7	-	39.8	-0.8	31.9	-	49.9	-	68.2	-	18.3	-	Floor noise
Vert.	5650.0	41.8	-	31.8	5.2	31.2	-	47.7	-	68.2	-	20.5	-	
Vert.	5700.0	42.6	-	31.9	5.2	31.2	-	48.6	-	105.2	-	56.7	-	
Vert.	5720.0	44.0	-	32.0	5.3	31.2	-	50.0	-	110.8	-	60.8	-	
Vert.	5725.0	44.4	-	32.0	5.3	31.2	-	50.5	-	122.2	-	71.7	-	
Vert.	5850.0	41.7	-	32.3	5.3	31.2	-	48.1	-	122.2	-	74.1	-	
Vert.	5855.0	41.0	-	32.3	5.3	31.2	-	47.4	-	110.8	-	63.4	-	
Vert.	5875.0	41.5	-	32.3	5.3	31.2	-	47.9	-	105.2	-	57.3	-	
Vert.	5925.0	41.0	-	32.4	5.3	31.2	-	47.6	-	68.2	-	20.6	-	*1)
Vert.	11530.0	41.6	33.8	37.5	-2.2	32.8	-	44.2	36.3	73.9	53.9	29.7	17.6	Floor noise
Vert.	17295.0	42.7	-	39.8	-0.8	31.9	-	49.9	-	68.2	-	18.3	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)

Distance factor:
1 GHz - 6 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
6 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	August 30, 2024
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Tomoya Sone
Mode	Tx 11a 5765 MHz

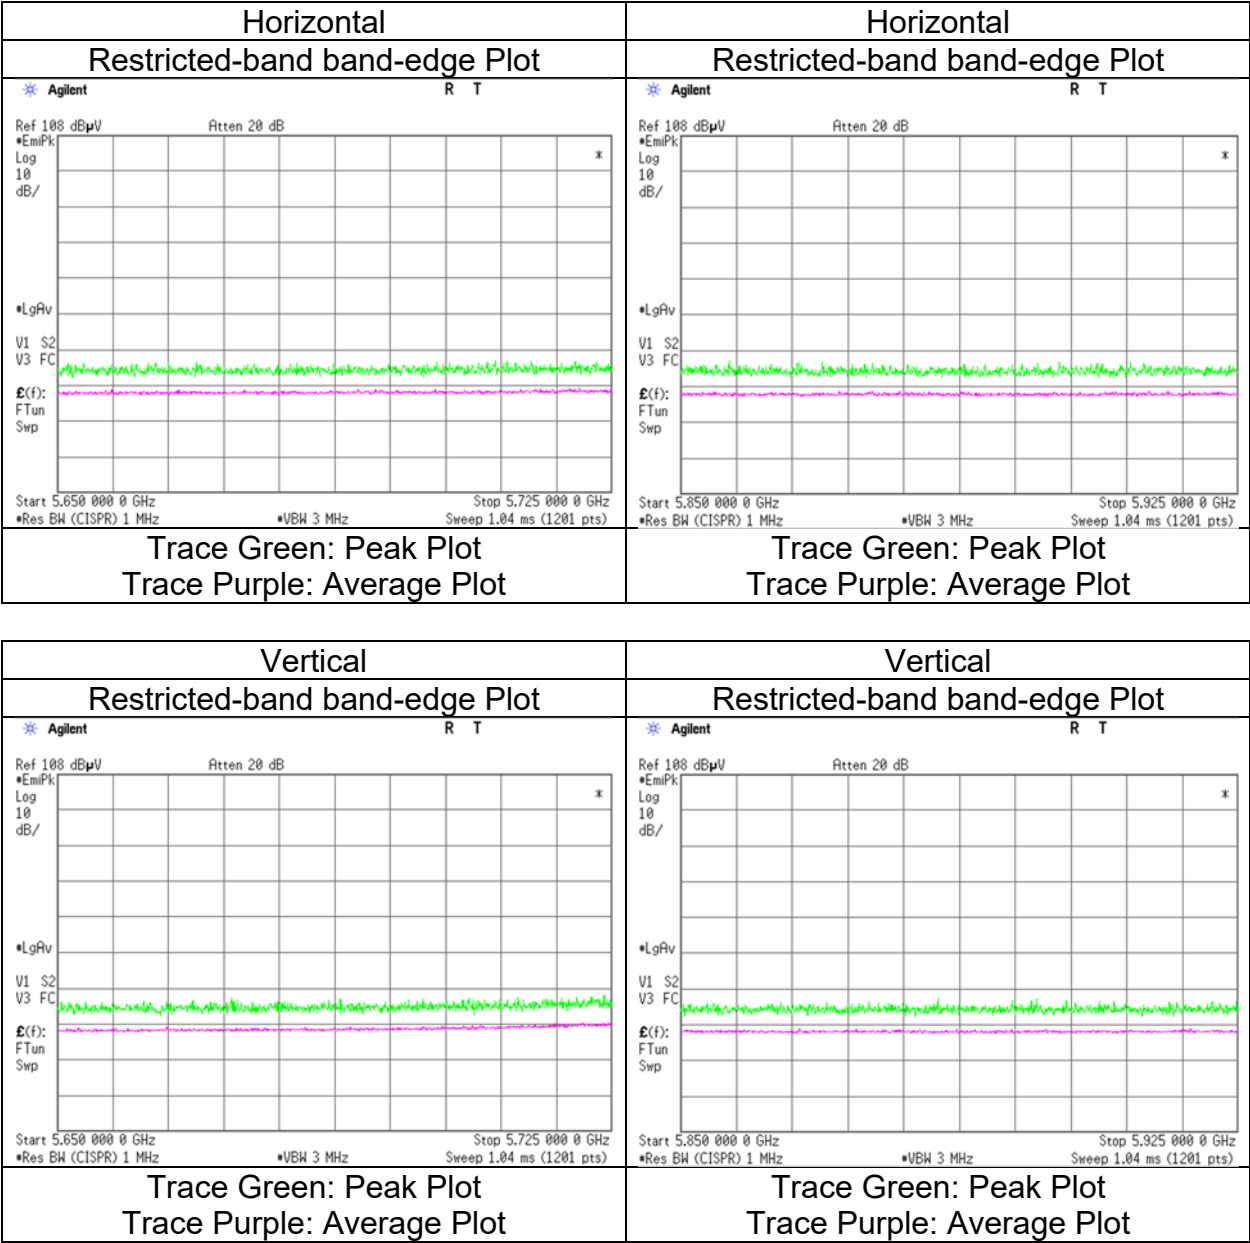

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
August 30, 2024
22 deg. C / 70 % RH
Tomoya Sone
(1 GHz to 18 GHz)
Tx 11ac-20 5765 MHz

No.2
September 1, 2024
22 deg. C / 71 % RH
Tetsuro Yoshida
(Above 18 GHz)


Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	41.9	-	31.8	5.2	31.2	-	47.7	-	68.2	-	20.5	-	
Hori.	5700.0	41.1	-	31.9	5.2	31.2	-	47.1	-	105.2	-	58.1	-	
Hori.	5720.0	43.0	-	32.0	5.3	31.2	-	49.1	-	110.8	-	61.7	-	
Hori.	5725.0	42.6	-	32.0	5.3	31.2	-	48.7	-	122.2	-	73.5	-	
Hori.	5850.0	41.5	-	32.3	5.3	31.2	-	47.9	-	122.2	-	74.3	-	
Hori.	5855.0	42.4	-	32.3	5.3	31.2	-	48.8	-	110.8	-	62.0	-	
Hori.	5875.0	40.8	-	32.3	5.3	31.2	-	47.3	-	105.2	-	57.9	-	
Hori.	5925.0	41.3	-	32.4	5.3	31.2	-	47.9	-	68.2	-	20.4	-	*1)
Hori.	11530.0	41.5	33.4	37.5	-2.2	32.8	-	44.0	35.9	73.9	53.9	29.9	18.0	Floor noise
Hori.	17295.0	42.9	-	39.8	-0.8	31.9	-	50.0	-	68.2	-	18.2	-	Floor noise
Vert.	5650.0	42.2	-	31.8	5.2	31.2	-	48.0	-	68.2	-	20.2	-	
Vert.	5700.0	42.8	-	31.9	5.2	31.2	-	48.8	-	105.2	-	56.4	-	
Vert.	5720.0	44.5	-	32.0	5.3	31.2	-	50.6	-	110.8	-	60.2	-	
Vert.	5725.0	44.7	-	32.0	5.3	31.2	-	50.8	-	122.2	-	71.4	-	
Vert.	5850.0	41.1	-	32.3	5.3	31.2	-	47.5	-	122.2	-	74.7	-	
Vert.	5855.0	41.4	-	32.3	5.3	31.2	-	47.8	-	110.8	-	63.0	-	
Vert.	5875.0	41.5	-	32.3	5.3	31.2	-	48.0	-	105.2	-	57.2	-	
Vert.	5925.0	41.0	-	32.4	5.3	31.2	-	47.5	-	68.2	-	20.7	-	*1)
Vert.	11530.0	41.5	33.4	37.5	-2.2	32.8	-	44.0	35.9	73.9	53.9	29.9	18.0	Floor noise
Vert.	17295.0	42.9	-	39.8	-0.8	31.9	-	50.0	-	68.2	-	18.2	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 6 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	August 30, 2024
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Tomoya Sone
Mode	Tx 11ac-20 5765 MHz

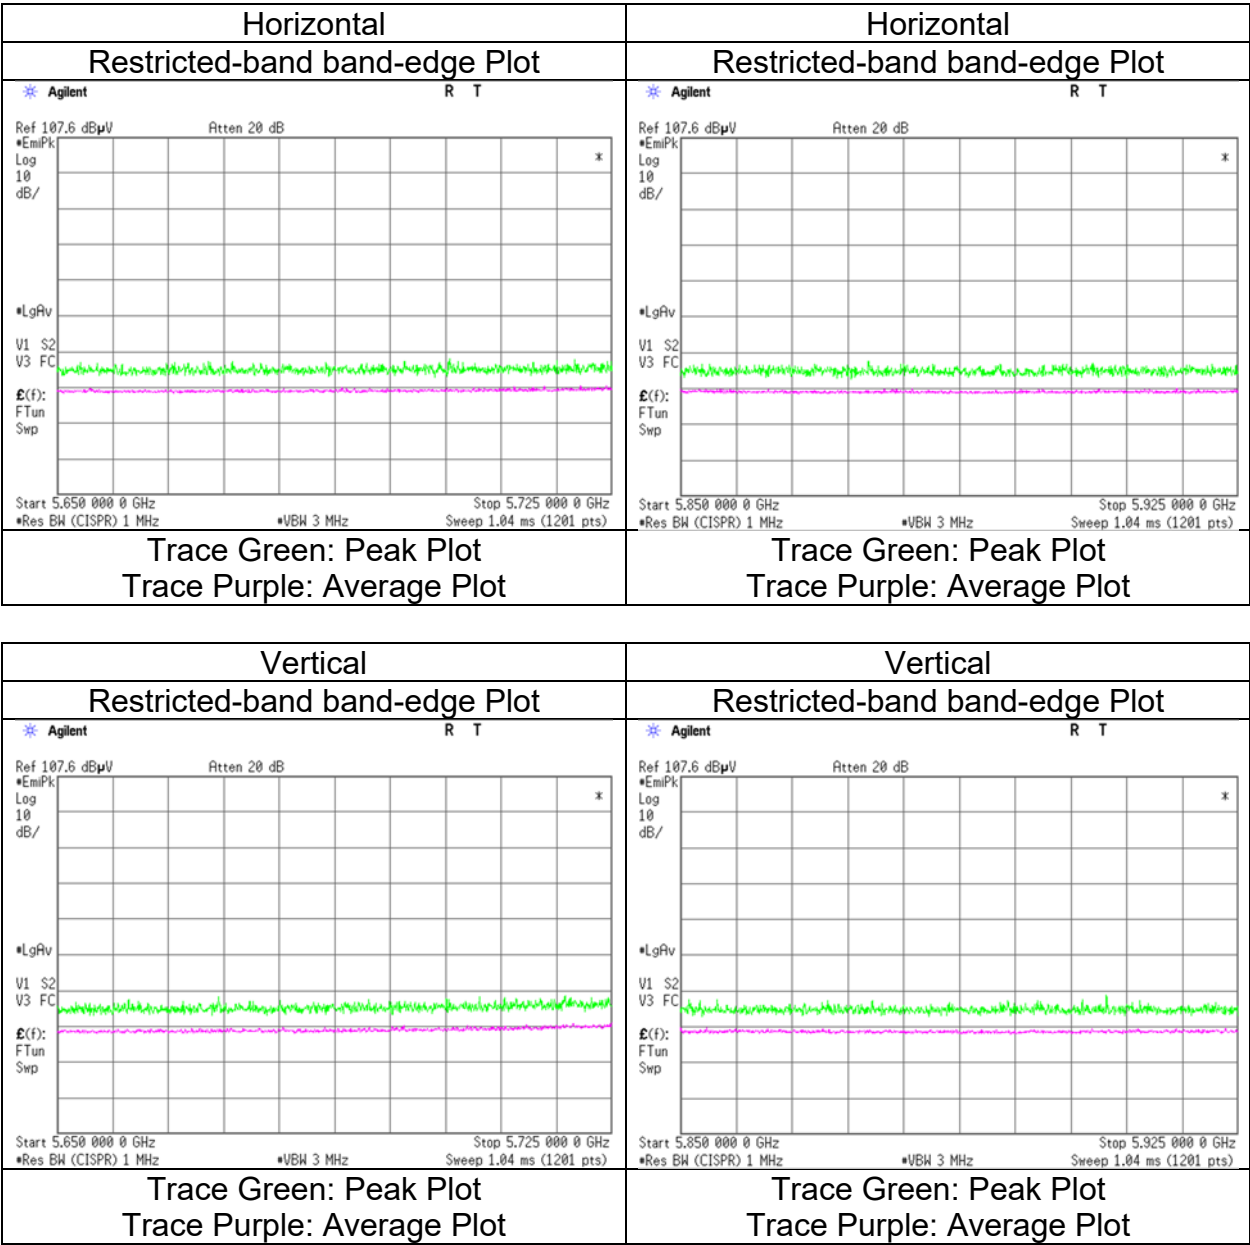

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.2
August 30, 2024
22 deg. C / 70 % RH
Tomoya Sone
(1 GHz to 18 GHz)
Tx 11n-40 5755 MHz

No.2
September 1, 2024
22 deg. C / 71 % RH
Tetsuro Yoshida
(Above 18 GHz)


Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	42.4	-	31.8	5.2	31.2	-	48.2	-	68.2	-	20.0	-	
Hori.	5700.0	42.1	-	31.9	5.2	31.2	-	48.1	-	105.2	-	57.2	-	
Hori.	5720.0	42.5	-	32.0	5.3	31.2	-	48.5	-	110.8	-	62.3	-	
Hori.	5725.0	42.9	-	32.0	5.3	31.2	-	49.0	-	122.2	-	73.2	-	
Hori.	5850.0	40.9	-	32.3	5.3	31.2	-	47.3	-	122.2	-	74.9	-	
Hori.	5855.0	40.6	-	32.3	5.3	31.2	-	47.0	-	110.8	-	63.8	-	
Hori.	5875.0	41.4	-	32.3	5.3	31.2	-	47.9	-	105.2	-	57.3	-	
Hori.	5925.0	40.5	-	32.4	5.3	31.2	-	47.1	-	68.2	-	21.2	-	*1)
Hori.	11510.0	41.2	33.4	37.5	-2.2	32.8	-	43.8	35.9	73.9	53.9	30.2	18.0	Floor noise
Hori.	17265.0	42.7	-	39.7	-0.8	31.9	-	49.8	-	68.2	-	18.4	-	Floor noise
Vert.	5650.0	42.5	-	31.8	5.2	31.2	-	48.3	-	68.2	-	19.9	-	
Vert.	5700.0	44.0	-	31.9	5.2	31.2	-	50.0	-	105.2	-	55.2	-	
Vert.	5720.0	46.5	-	32.0	5.3	31.2	-	52.6	-	110.8	-	58.2	-	
Vert.	5725.0	47.0	-	32.0	5.3	31.2	-	53.0	-	122.2	-	69.2	-	
Vert.	5850.0	42.1	-	32.3	5.3	31.2	-	48.6	-	122.2	-	73.6	-	
Vert.	5855.0	41.4	-	32.3	5.3	31.2	-	47.9	-	110.8	-	62.9	-	
Vert.	5875.0	40.9	-	32.3	5.3	31.2	-	47.4	-	105.2	-	57.8	-	
Vert.	5925.0	41.0	-	32.4	5.3	31.2	-	47.6	-	68.2	-	20.6	-	*1)
Vert.	11510.0	41.2	33.4	37.5	-2.2	32.8	-	43.8	35.9	73.9	53.9	30.2	18.0	Floor noise
Vert.	17265.0	42.7	-	39.7	-0.8	31.9	-	49.8	-	68.2	-	18.4	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 6 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	August 30, 2024
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Tomoya Sone
Mode	Tx 11n-40 5755 MHz

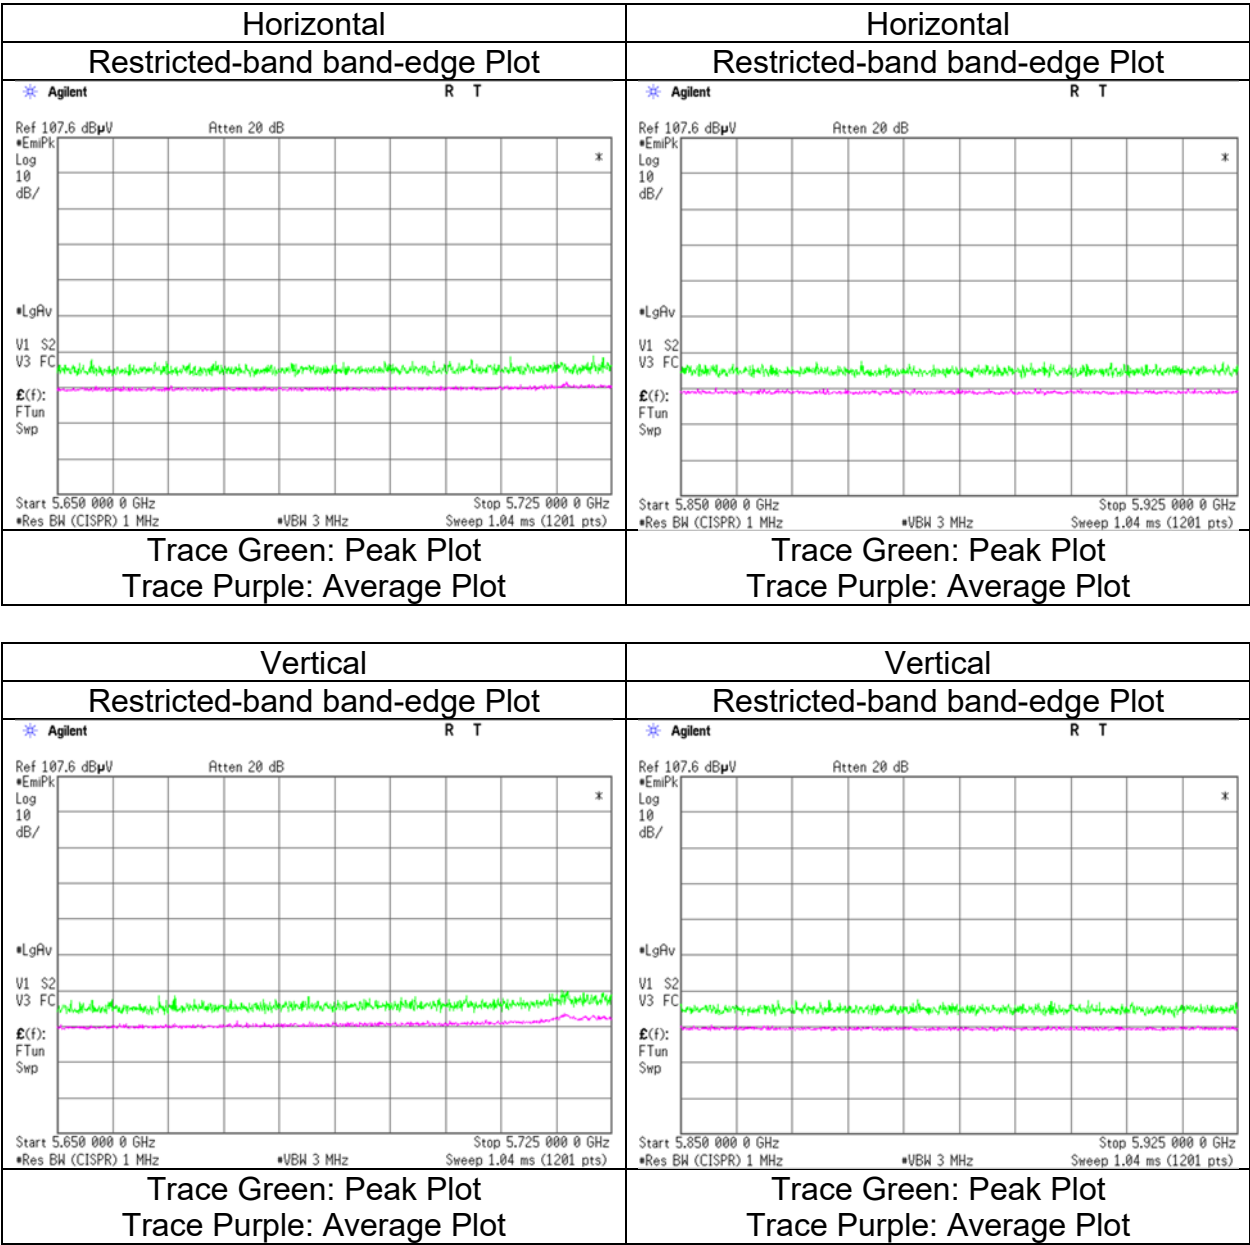

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.2	No.2
Date	August 30, 2024	September 1, 2024
Temperature / Humidity	22 deg. C / 70 % RH	22 deg. C / 71 % RH
Engineer	Tomoya Sone	Tetsuro Yoshida
	(1 GHz to 18 GHz)	(Above 18 GHz)
Mode	Tx 11ac-40 5755 MHz	

Polarity	Frequency	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dBm]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
[Hori/Vert]	[MHz]													
Hori.	5650.0	41.3	-	31.8	5.2	31.2	-	47.2	-	68.2	-	21.0	-	
Hori.	5700.0	41.7	-	31.9	5.2	31.2	-	47.7	-	105.2	-	57.5	-	
Hori.	5720.0	43.0	-	32.0	5.3	31.2	-	49.1	-	110.8	-	61.7	-	
Hori.	5725.0	42.4	-	32.0	5.3	31.2	-	48.5	-	122.2	-	73.7	-	
Hori.	5850.0	41.6	-	32.3	5.3	31.2	-	48.1	-	122.2	-	74.2	-	
Hori.	5855.0	41.5	-	32.3	5.3	31.2	-	47.9	-	110.8	-	62.9	-	
Hori.	5875.0	40.9	-	32.3	5.3	31.2	-	47.4	-	105.2	-	57.8	-	
Hori.	5925.0	41.6	-	32.4	5.3	31.2	-	48.1	-	68.2	-	20.1	-	*1)
Hori.	11510.0	41.1	33.3	37.5	-2.2	32.8	-	43.7	35.8	73.9	53.9	30.3	18.1	Floor noise
Hori.	17265.0	42.6	-	39.7	-0.8	31.9	-	49.7	-	68.2	-	18.5	-	Floor noise
Vert.	5650.0	42.0	-	31.8	5.2	31.2	-	47.9	-	68.2	-	20.3	-	
Vert.	5700.0	44.5	-	31.9	5.2	31.2	-	50.5	-	105.2	-	54.8	-	
Vert.	5720.0	46.7	-	32.0	5.3	31.2	-	52.7	-	110.8	-	58.1	-	
Vert.	5725.0	45.8	-	32.0	5.3	31.2	-	51.9	-	122.2	-	70.3	-	
Vert.	5850.0	41.5	-	32.3	5.3	31.2	-	47.9	-	122.2	-	74.3	-	
Vert.	5855.0	41.3	-	32.3	5.3	31.2	-	47.7	-	110.8	-	63.1	-	
Vert.	5875.0	41.1	-	32.3	5.3	31.2	-	47.5	-	105.2	-	57.7	-	
Vert.	5925.0	41.3	-	32.4	5.3	31.2	-	47.8	-	68.2	-	20.4	-	
Vert.	11510.0	41.1	33.3	37.5	-2.2	32.8	-	43.7	35.8	73.9	53.9	30.3	18.1	*1) Floor noise
Vert.	17265.0	42.6	-	39.7	-0.8	31.9	-	49.7	-	68.2	-	18.5	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

$$\text{Result (AV)} = \text{Reading} + \text{Ant Factor} + \text{Loss (Cable+Attenuator+Filter+Distance factor (above 1 GHz))} - \text{Gain (Amplifier)} + \text{Duty factor}$$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).


*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 6 GHz	$20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
	6 GHz - 10 GHz	$20\log(3.55\text{ m} / 3.0\text{ m}) = 1.47\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	August 30, 2024
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Tomoya Sone
Mode	Tx 11ac-40 5755 MHz

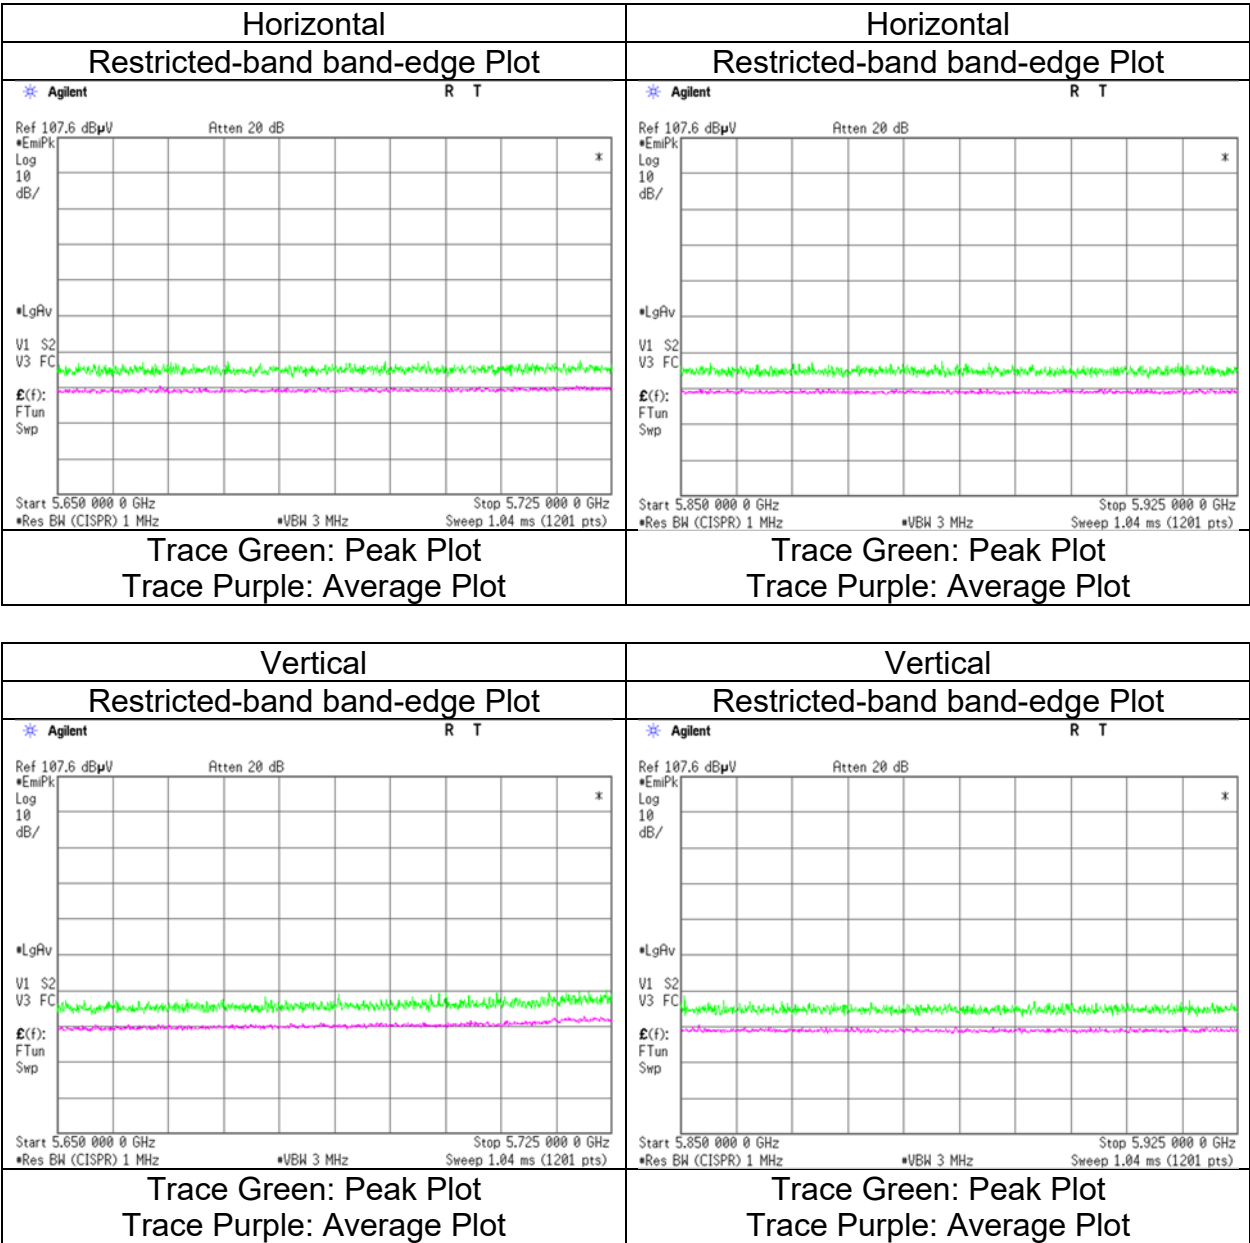

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.	No.2	No.3
Semi Anechoic Chamber	No.2	No.2	No.3
Date	August 30, 2024	September 1, 2024	September 2, 2024
Temperature / Humidity	22 deg. C / 70 % RH	22 deg. C / 71 % RH	22 deg. C / 74% RH
Engineer	Tomoya Sone	Tetsuro Yoshida	Tetsuro Yoshida
	(1 GHz to 18 GHz)	(Above 18 GHz)	(Below 1 GHz)
Mode	Tx 11ac-80 5775 MHz		


Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	65.9	31.6	-	6.8	7.5	32.2	-	13.7	-	40.0	-	26.3	-	
Hori.	200.0	37.4	-	16.6	8.9	32.1	-	30.8	-	43.5	-	12.7	-	
Hori.	400.0	40.4	-	15.6	10.3	32.0	-	34.4	-	46.0	-	11.6	-	
Hori.	438.7	30.1	-	16.2	10.6	32.0	-	24.8	-	46.0	-	21.2	-	
Hori.	891.0	31.4	-	22.0	12.9	31.0	-	35.2	-	46.0	-	10.8	-	
Hori.	1000.0	33.7	-	22.3	13.4	30.4	-	39.0	-	53.9	-	14.9	-	
Hori.	5650.0	42.5	-	31.8	5.2	31.2	-	48.4	-	68.2	-	19.8	-	
Hori.	5700.0	42.3	-	31.9	5.2	31.2	-	48.3	-	105.2	-	56.9	-	
Hori.	5720.0	42.9	-	32.0	5.3	31.2	-	49.0	-	110.8	-	61.8	-	
Hori.	5725.0	42.0	-	32.0	5.3	31.2	-	48.0	-	122.2	-	74.2	-	
Hori.	5850.0	41.5	-	32.3	5.3	31.2	-	47.9	-	122.2	-	74.3	-	
Hori.	5855.0	40.9	-	32.3	5.3	31.2	-	47.3	-	110.8	-	63.5	-	
Hori.	5875.0	41.0	-	32.3	5.3	31.2	-	47.5	-	105.2	-	57.7	-	
Hori.	5925.0	41.5	-	32.4	5.3	31.2	-	48.1	-	68.2	-	20.1	-	*1)
Hori.	11550.0	41.0	33.3	37.5	-2.2	32.8	-	43.6	35.9	73.9	53.9	30.3	18.0	Floor noise
Hori.	17325.0	42.6	-	39.8	-0.8	31.9	-	49.7	-	68.2	-	18.5	-	Floor noise
Vert.	66.0	34.8	-	6.8	7.5	32.2	-	16.9	-	40.0	-	23.2	-	
Vert.	200.0	36.3	-	16.6	8.9	32.1	-	29.7	-	43.5	-	13.8	-	
Vert.	400.0	44.2	-	15.6	10.3	32.0	-	38.2	-	46.0	-	7.8	-	
Vert.	438.7	34.3	-	16.2	10.6	32.0	-	29.0	-	46.0	-	17.0	-	
Vert.	891.0	22.4	-	22.0	12.9	31.0	-	26.2	-	46.0	-	19.8	-	
Vert.	1000.0	32.0	-	22.3	13.4	30.4	-	37.3	-	53.9	-	16.6	-	
Vert.	5650.0	43.8	-	31.8	5.2	31.2	-	49.7	-	68.2	-	18.5	-	
Vert.	5700.0	47.1	-	31.9	5.2	31.2	-	53.1	-	105.2	-	52.1	-	
Vert.	5720.0	48.4	-	32.0	5.3	31.2	-	54.4	-	110.8	-	56.4	-	
Vert.	5725.0	46.6	-	32.0	5.3	31.2	-	52.7	-	122.2	-	69.5	-	
Vert.	5850.0	42.2	-	32.3	5.3	31.2	-	48.6	-	122.2	-	73.6	-	
Vert.	5855.0	41.6	-	32.3	5.3	31.2	-	48.1	-	110.8	-	62.7	-	
Vert.	5875.0	41.2	-	32.3	5.3	31.2	-	47.7	-	105.2	-	57.5	-	
Vert.	5925.0	41.9	-	32.4	5.3	31.2	-	48.5	-	68.2	-	19.8	-	*1)
Vert.	11550.0	41.0	33.3	37.5	-2.2	32.8	-	43.6	35.9	73.9	53.9	30.3	18.0	Floor noise
Vert.	17325.0	42.6	-	39.8	-0.8	31.9	-	49.7	-	68.2	-	18.5	-	Floor noise

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)
Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).
*QP detector was used up to 1GHz.
*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 6 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 6 GHz - 10 GHz 20log (3.55 m / 3.0 m) = 1.47 dB
 10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission


Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	August 30, 2024
Temperature / Humidity	22 deg. C / 70 % RH
Engineer	Tomoya Sone
Mode	Tx 11ac-80 5775 MHz

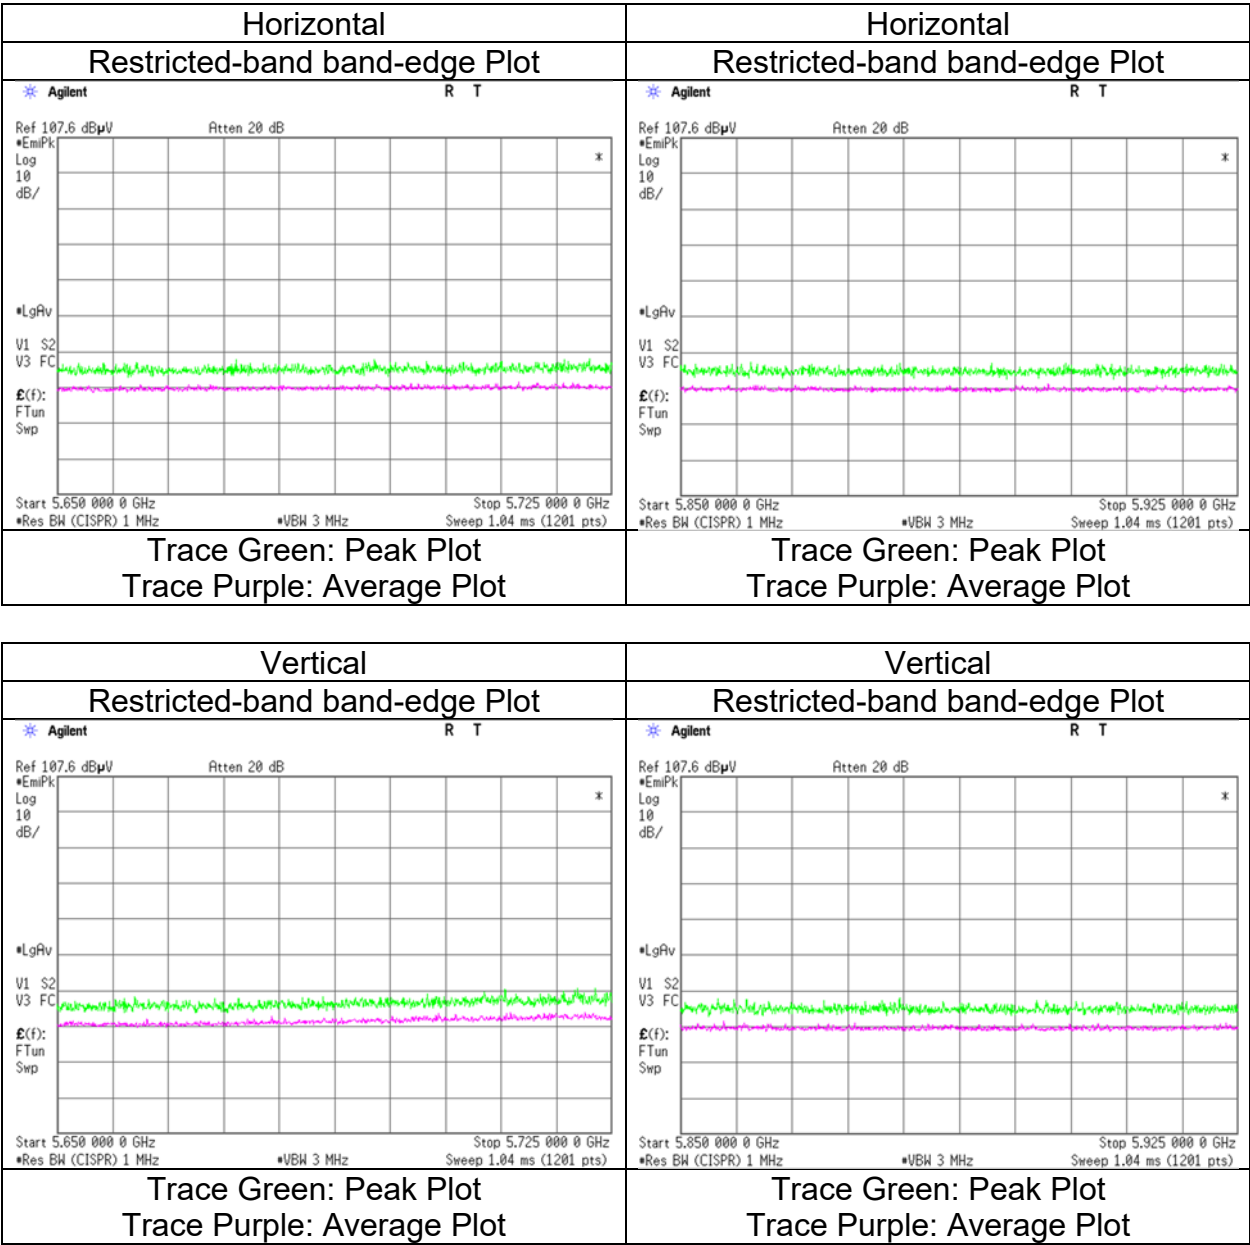

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Conducted Output Power)

Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.2	No.2	No.3
Date	August 30, 2024	September 1, 2024	September 2, 2024
Temperature / Humidity	22 deg. C / 70 % RH	22 deg. C / 71 % RH	22 deg. C / 74 % RH
Engineer	Tomoya Sone (1 GHz to 18 GHz)	Tetsuro Yoshida (Above 18 GHz)	Tetsuro Yoshida (Below 1 GHz)
Mode	Tx 11ac-80 5775 MHz		

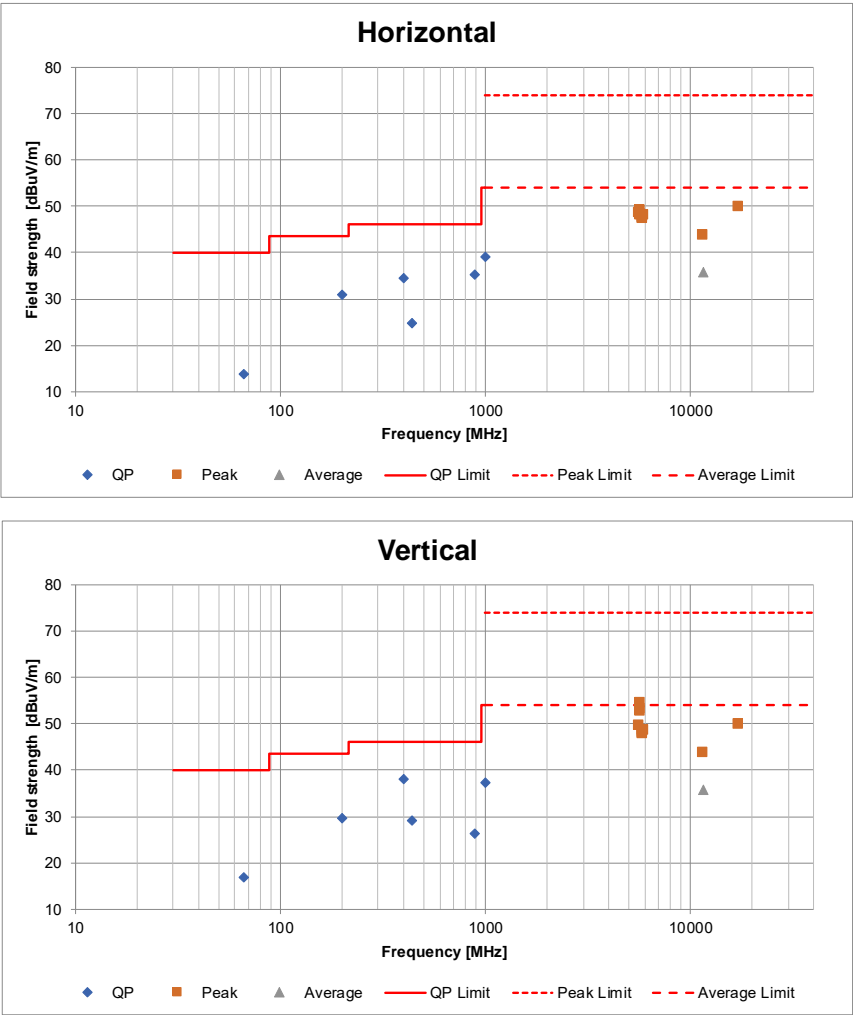


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab. No.6 Measurement Room
September 12, 2024
24 deg. C / 48 % RH
Nachi Konegawa
Tx 11a 5765 MHz

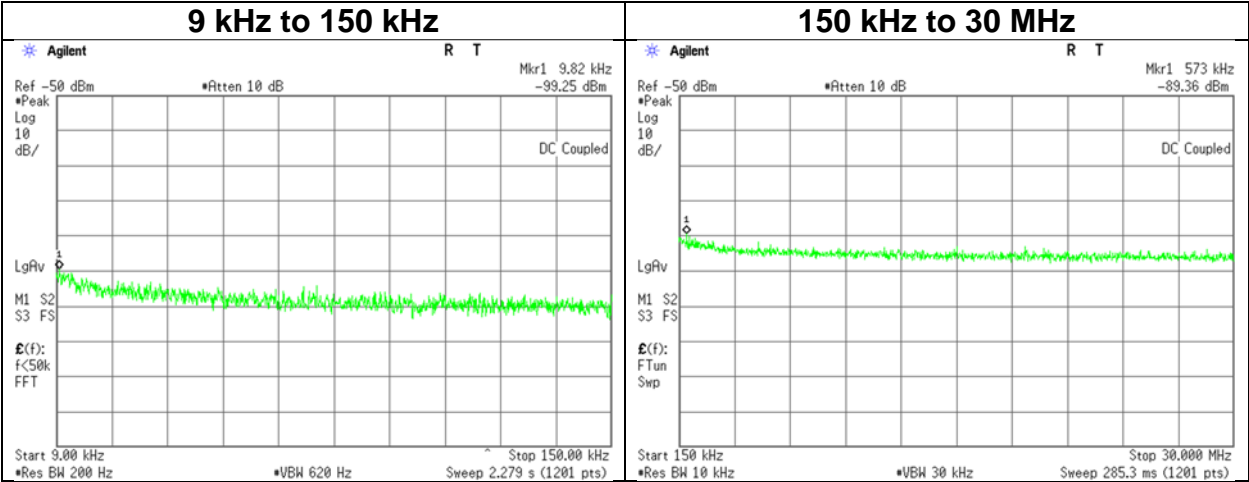

Frequency	Reading	Cable Loss	Attenuator	Antenna Gain*	N	EIRP	Distance	Ground bounce	E	Limit	Margin	Remark
[kHz]	[dBm]	[dB]	[dB]	[dBi]	(Number of Output)	[dBm]	[m]	[dB]	(field strength) [dBuV/m]	[dBuV/m]	[dB]	
9.82	-99.3	1.14	9.8	2.0	1	-86.3	300	6.0	-25.0	47.7	72.7	
573.00	-89.4	1.31	9.9	2.0	1	-76.1	30	6.0	5.1	32.4	27.3	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$
 $EIRP[dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$
N: Number of output
*2.0 dBi was applied to the test result based on KDB 789033 since antenna gain was less than 2.0 dBi.

APPENDIX 2: Test Instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	03/04/2024	12
RE	141323	Coaxial cable	UL Japan	-	-	09/10/2023	12
RE	141406	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCA	7001	09/11/2024	12
RE	141424	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	VHA9103+BBA9106	1915	03/15/2024	12
RE	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	254	10/17/2023	12
RE	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9170	BBHA9170306	07/19/2024	12
RE	141517	Horn Antenna 26.5-40GHz	ETS-Lindgren	3160-10	152399	11/20/2023	12
RE	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	051201197	01/31/2024	12
RE	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/06/2024	12
RE	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/08/2024	12
RE	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/17/2024	12
RE	141588	Pre Amplifier	L3 Narda-MITEQ	AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P	1871355 / 1871328	01/22/2024	12
RE	141902	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187105	05/30/2024	12
RE	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	06/05/2024	12
RE	141978	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180899	05/09/2024	12
RE	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/17/2023	24
RE	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	12/11/2023	24
RE	142183	Measure	KOMELON	KMC-36	-	10/20/2023	12
RE	142228	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
RE	142314	Attenuator	Pasternack Enterprises	PE7390-6	D/C 1504	06/06/2024	12
RE	160324	Coaxial Cable	Huber+Suhner	SUCOFLEX 102A	MY009/2A	10/05/2023	12
RE	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	242170	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	00728	11/29/2023	12
RE	244707	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202102	01/25/2024	12
RE	244709	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202103	01/25/2024	12
RE	245787	Double Ridge Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	689	03/06/2024	12
RE	246001	Microwave Cable	Huber+Suhner	SF103/11PC35/ 11PC35/1000mm / SF126E/5000mm	800673(1m) / 610204(5m)	03/06/2024	12
AT	141156	Attenuator(10dB)	Weinschel Corp	2	BL1173	11/17/2023	12
AT	141334	Attenuator(10dB)	Suhner	6810.19.A	-	12/12/2023	12
AT	141395	Coaxial Cable	UL Japan	-	-	11/21/2023	12
AT	141414	Microwave Cable	Junkosha	MWX221	1207S407	07/06/2024	12
AT	141557	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	070900530	01/31/2024	12
AT	141815	Power Meter	Raditeq (Formerly DARE!! Instruments)	RPR3006W	14I00048SNO 083	10/04/2023	12
AT	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	05/09/2024	12
AT	141903	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186390	01/26/2024	12
AT	244711	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202105	01/25/2024	12
AT	244712	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202106	01/25/2024	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

RE: Radiated Emission