

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## RF EXPOSURE EVALUATION

## SPECIFIC ABSORPTION RATE

### **SAR TEST REPORT**

FOR

**COBRA ELECTRONICS CORPORATION**

**PORATABLE UHF FRS/GMRS PTT RADIO TRANSCEIVER**

**MODEL(S): LI4890 / LI4900 / LI4925 / LI4950**

<b>IDENTIFIER(S)</b>	<b>FCC ID: BBOLI4900A</b>	<b>IC: 906B-LI4900A</b>
<b>Test Standard(s) and Procedure(s)</b>	<b>FCC OET Bulletin 65, Supplement C (01-01)</b>	
	<b>Industry Canada RSS-102 Issue 2</b>	

Test Report Serial No.

121106BBO-T799-S95U

Test Report Revision No.

Revision 1.0 (Initial Release)

Test Lab and Location

Celltech Compliance Testing & Engineering Lab

(Celltech Labs Inc.)

1955 Moss Court

Kelowna, BC

Canada

V1Y 9L3



Certificate No. 2470.01

<u>Test Report Prepared By:</u> <b>Cheri Frangiadakis</b> Test Report Writer Celltech Labs Inc.	<u>Test Report Reviewed By:</u> <b>Jonathan Hughes</b> General Manager Celltech Labs Inc.
--	--

<b>Company:</b>	<b>Cobra Electronics Corporation</b>					<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>					<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 ILAC-MRA ACCREDITED
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

<u>Test Lab and Location</u>	<u>Company Information</u>
<b>CELLTECH LABS INCORPORATED</b> Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250-448-7047 Fax: 250-448-7046 e-mail: <a href="mailto:info@celltechlabs.com">info@celltechlabs.com</a> web site: <a href="http://www.celltechlabs.com">www.celltechlabs.com</a>	<b>COBRA ELECTRONICS CORPORATION</b> 6500 West Cortland Street Chicago, IL 60707 United States
<b>FCC IDENTIFIER:</b> BBOLI4900A <b>IC IDENTIFIER:</b> 906B-LI4900A <b>Device Model(s):</b> LI4890 / LI4900 / LI4925 / LI4950	
<b>Test Requirement(s):</b> <b>Test Procedure(s):</b>	FCC 47 CFR §2.1093; Health Canada Safety Code 6 FCC OET Bulletin 65, Supplement C (Edition 01-01) Industry Canada RSS-102 Issue 2
<b>Device Description:</b> <b>Transmit Frequency Range(s):</b>	Portable FM UHF FRS/GMRS PTT Radio Transceiver 462.5500 - 462.7250 MHz (GMRS Channels 15-22) 462.5625 - 462.7125 MHz (FRS/GMRS Channels 1-7) 467.5625 - 467.7125 MHz (FRS Channels 8-14)
<b>Max. RF Output Power Tested:</b> <b>Antenna Type(s) Tested:</b> <b>Battery Type(s) Tested:</b>	0.962 Watts (29.83 dBm) ERP (462.6375 MHz) GMRS Ch. 4 External Fixed Stubby Li-ion 7.4 V, 950 mAh
<b>Body-Worn Accessories Tested:</b> <b>Audio Accessories Tested:</b>	Plastic Belt-Clip (4 mm thickness) Ear-bud with Lapel-Microphone (P/N: GA-EBM2)
<b>Max. SAR Level(s) Evaluated:</b>	Face-held: 0.581 W/kg (1g) - 50% duty cycle Body-worn: 0.791 W/kg (1g) - 50% duty cycle

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 2 for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.  
 The results and statements contained in this report pertain only to the device(s) evaluated.

### Test Report Approved By:

Sean Johnston  
 SAR Lab Manager  
 Celltech Labs Inc.



<b>Company:</b>	<b>Cobra Electronics Corporation</b>					<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 Cobra ELECTRONICS CORPORATION	
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>					<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>					
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 34				

## TABLE OF CONTENTS

<b>1.0 INTRODUCTION</b>	<b>4</b>
<b>2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)</b>	<b>4</b>
<b>3.0 SAR MEASUREMENT SYSTEM</b>	<b>5</b>
<b>4.0 MEASUREMENT SUMMARY</b>	<b>6</b>
<b>5.0 DETAILS OF SAR EVALUATION</b>	<b>7</b>
<b>6.0 EVALUATION PROCEDURES</b>	<b>7</b>
<b>7.0 SYSTEM PERFORMANCE CHECK</b>	<b>8</b>
<b>8.0 SIMULATED EQUIVALENT TISSUES</b>	<b>9</b>
<b>9.0 SAR SAFETY LIMITS</b>	<b>9</b>
<b>10.0 ROBOT SYSTEM SPECIFICATIONS</b>	<b>10</b>
<b>11.0 PROBE SPECIFICATION (ET3DV6)</b>	<b>11</b>
<b>12.0 SIDE PLANAR PHANTOM</b>	<b>11</b>
<b>13.0 VALIDATION PLANAR PHANTOM</b>	<b>11</b>
<b>14.0 DEVICE HOLDER</b>	<b>11</b>
<b>15.0 TEST EQUIPMENT LIST</b>	<b>12</b>
<b>16.0 MEASUREMENT UNCERTAINTIES</b>	<b>13</b>
<b>MEASUREMENT UNCERTAINTIES (CONT.)</b>	<b>14</b>
<b>17.0 REFERENCES</b>	<b>15</b>
<b>APPENDIX A - SAR MEASUREMENT DATA</b>	<b>16</b>
<b>APPENDIX B - SYSTEM PERFORMANCE CHECK DATA</b>	<b>21</b>
<b>APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS</b>	<b>24</b>
<b>APPENDIX D - SAR TEST SETUP &amp; DUT PHOTOGRAPHS</b>	<b>27</b>
<b>APPENDIX E - SYSTEM VALIDATION</b>	<b>33</b>
<b>APPENDIX F - PROBE CALIBRATION</b>	<b>34</b>

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 ILAC-MRA ACCREDITED Certificate No. 2470.01
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 1.0 INTRODUCTION

This measurement report demonstrates compliance of the Cobra Electronics Corporation Model(s): LI4890 / LI4900 / LI4925 / LI4950 Portable FM UHF FRS/GMRS PTT Radio Transceiver FCC ID: BBOLI4900A with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 2 (see reference [4]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the provisions of the rules are included within this test report.

## 2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)


<b>Test Requirement(s)</b>	FCC Rule Part 47 CFR §2.1093			
	Health Canada Safety Code 6			
<b>Test Procedure(s)</b>	FCC OET Bulletin 65, Supplement C (01-01)			
	Industry Canada RSS-102 Issue 2			
<b>Device Description</b>	Portable FM UHF FRS/GMRS PTT Radio Transceiver			
<b>RF Exposure Category</b>	General Population / Uncontrolled Environment			
<b>FCC IDENTIFIER</b>	BBOLI4900A			
<b>IC IDENTIFIER</b>	906B-LI4900A			
<b>Device Model(s)</b>	LI4890 / LI4900 / LI4925 / LI4950			
<b>Test Sample Serial No.</b>	#1		Identical Prototype	
<b>Transmit Frequency Range(s)</b>	462.5500 - 462.7250 MHz			GMRS Channels 15-22
	462.5625 - 462.7125 MHz			FRS/GMRS Channels 1-7
	467.5625 - 467.7125 MHz			FRS Channels 8-14
<b>Max. RF Output Power Tested</b>	0.962 Watts	29.83 dBm	ERP	462.6375 MHz
<b>Antenna Type(s) Tested</b>	External Fixed Stubby			
<b>Battery Type(s) Tested</b>	Lithium-ion			7.4 V, 950 mAh
<b>Body-Worn Accessories Tested</b>	Plastic Belt-Clip (4 mm thickness)			P/N: n/a
<b>Audio Accessories Tested</b>	Ear-bud with Lapel-Microphone			P/N: GA-EBM2

<b>Company:</b>	<b>Cobra Electronics Corporation</b>		<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 Cobra ELECTRONICS CORPORATION
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>		<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 34

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 ACCREDITED Certificate No. 2470.01
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

### 3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

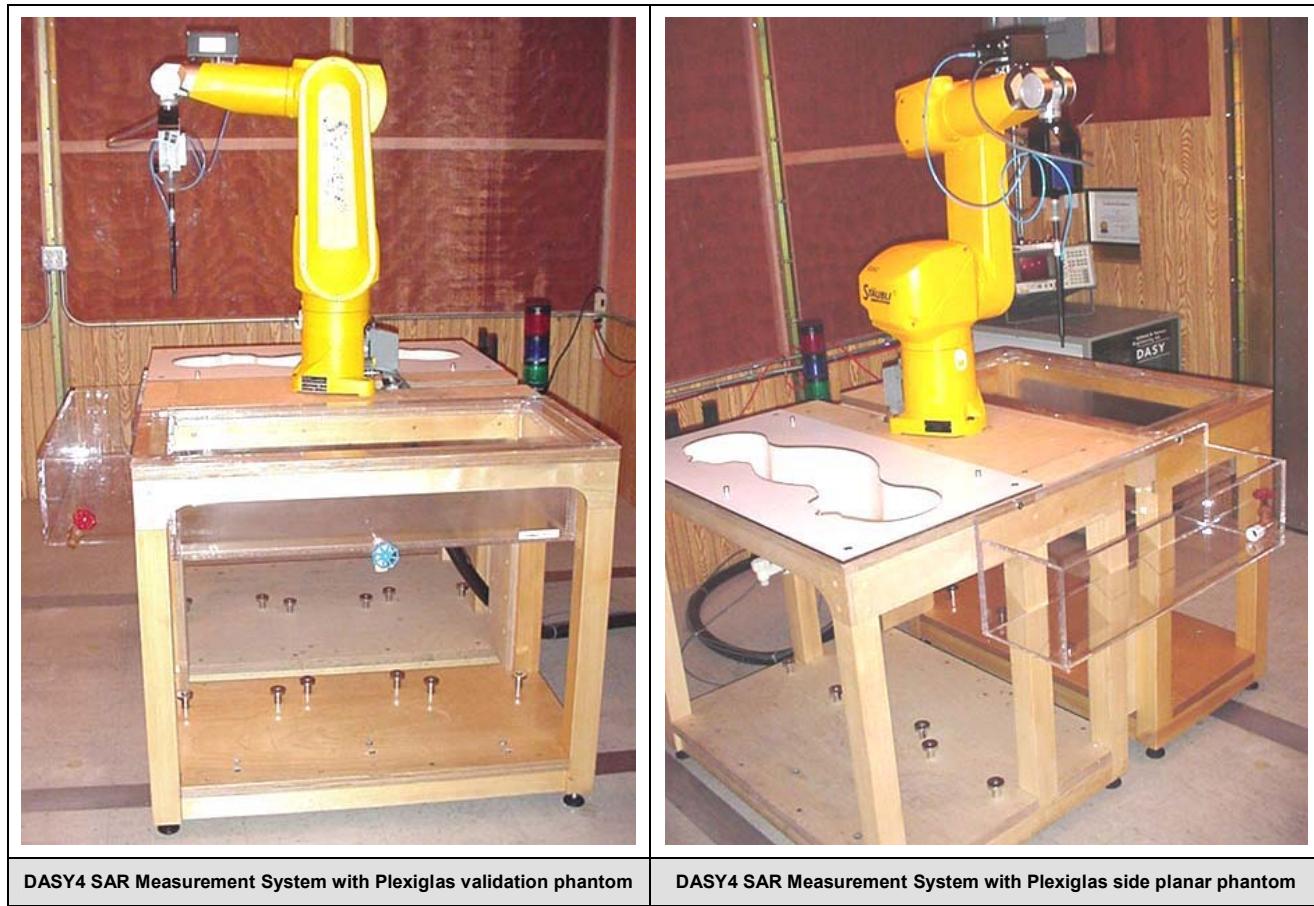

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>	
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 34

	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	  Certificate No. 2470.01
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 4.0 MEASUREMENT SUMMARY

## SAR EVALUATION RESULTS

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>	
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 34

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 <b>ILAC-MRA</b> <small>ACCREDITED</small>
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 5.0 DETAILS OF SAR EVALUATION

The Cobra Electronics Corporation Model(s): LI4890 / LI4900 / LI4925 / LI4950 Portable FM UHF FRS/GMRS PTT Radio Transceiver FCC ID: BBOLI4900A was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front of the DUT and the outer surface of the planar phantom.
2. The DUT was tested in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom and provided a 0.4 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the Cobra supplied ear-bud/lapel-microphone audio accessory connected to the audio port.
3. The RF conducted output power of the DUT could not be measured due to a non-detachable antenna. The DUT was evaluated for SAR at the maximum conducted power level preset by the manufacturer.
4. ERP reference power measurements were made prior to the SAR evaluations at Celltech Labs' 3-meter Open Area Test Site using the signal substitution method in accordance with ANSI/TIA-603-C-2004 (see reference [6]).
5. The power drift of the DUT during the SAR evaluations was measured by the DASY4 system.
6. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
7. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
8. The SAR evaluations were performed using a Plexiglas side-planar phantom.

## 6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
 (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
 An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.  
 A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

<b>Company:</b>	<b>Cobra Electronics Corporation</b>		<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> <small>ELECTRONICS CORPORATION</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>		<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 7 of 34

 Testing and Engineering Services Lab	Date(s) of Evaluation	Test Report Serial No.	Report Revision No.	 ACCREDITED
	Report Issue Date	Description of Test(s)	RF Exposure Category	

January 11, 2007      121106BBO-T799-S95U      Revision 1.0


January 18, 2007      Specific Absorption Rate      General Population

Certificate No. 2470.01

## 7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a Plexiglas planar phantom and 450MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and HP 8753ET Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  (see Appendix B for system performance check test plot).

SYSTEM PERFORMANCE CHECK EVALUATION																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. MHz	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.					
Jan. 11	Brain 450	1.23 $\pm$ 10%	1.17	-4.9%	43.5 $\pm$ 5%	43.5	0.0%	0.87 $\pm$ 5%	0.87	0.0%	1000	24.0	22.0	$\geq$ 15	32	103.7
Note(s)		1. The fluid temperature was measured prior to and after the SAR evaluation to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements. 2. The SAR evaluations were performed within 24 hours of the system performance check.														

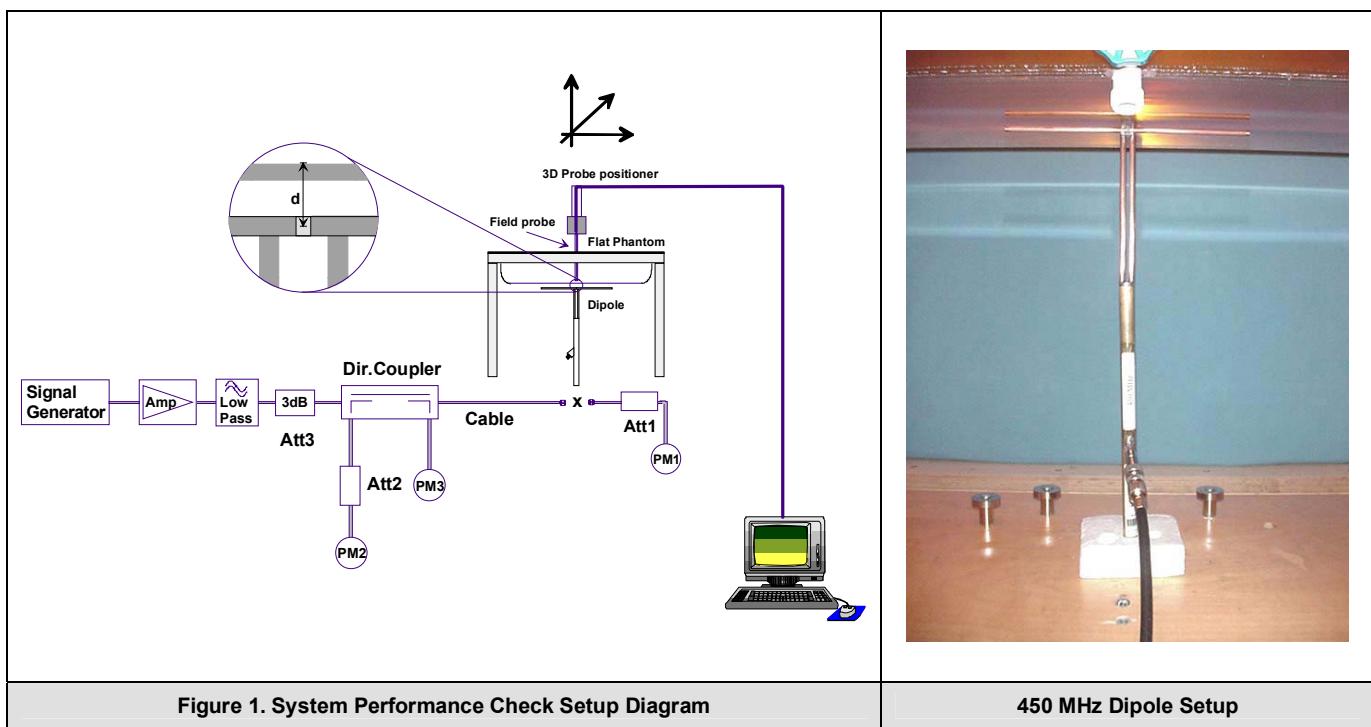

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 8.0 SIMULATED EQUIVALENT TISSUES

The 450MHz brain and body simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures, and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

## 9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI4900A	IC ID:	906B-LI4900A	
Model(s):	LI4890 / LI4900 / LI4925 / LI4950	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 34

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## 10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
<b>Positioner</b>	Stäubli Unimation Corp. Robot Model: RX60L
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6
<u>Data Acquisition Electronic (DAE) System</u>	
<b>Cell Controller</b>	
<b>Processor</b>	AMD Athlon XP 2400+
<b>Clock Speed</b>	2.0 GHz
<b>Operating System</b>	Windows XP Professional
<b>Data Converter</b>	
<b>Features</b>	Signal Amplifier, multiplexer, A/D converter, and control logic
<b>Software</b>	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
<b>Connecting Lines</b>	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
<b>Function</b>	Real-time data evaluation for field measurements and surface detection
<b>Hardware</b>	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
<b>Connections</b>	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<b>E-Field Probe</b>	
<b>Model</b>	ET3DV6
<b>Serial No.</b>	1387
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
<u>Evaluation Phantom</u>	
<b>Type</b>	Side Planar Phantom
<b>Shell Material</b>	Plexiglas
<b>Bottom Thickness</b>	2.0 mm ± 0.1 mm
<b>Outer Dimensions</b>	75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
<b>Type</b>	Planar Phantom
<b>Shell Material</b>	Plexiglas
<b>Bottom Thickness</b>	6.2 mm ± 0.1 mm
<b>Outer Dimensions</b>	86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

<b>Company:</b>	Cobra Electronics Corporation	FCC ID:	BBOLI4900A	IC ID:	906B-LI4900A	 ELECTRONICS CORPORATION						
<b>Model(s):</b>	LI4890 / LI4900 / LI4925 / LI4950	Portable FM UHF FRS/GMRS PTT Radio Transceiver										
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.											
	Page 10 of 34											

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 <b>ILAC-MRA</b> ACCREDITED
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

## 11.0 PROBE SPECIFICATION (ET3DV6)

<p>Construction: Symmetrical design with triangular core Built-in shielding against static charges</p> <p>Calibration: PEEK enclosure material (resistant to organic solvents, glycol) In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy <math>\pm</math> 8%)</p> <p>Frequency: 10 MHz to &gt; 6 GHz; Linearity: <math>\pm</math> 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: <math>\pm</math> 0.2 dB in brain tissue (rotation around probe axis) <math>\pm</math> 0.4 dB in brain tissue (rotation normal to probe axis)</p> <p>Dynamic Range: 5 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm</math> 0.2 dB</p> <p>Surface Detect: <math>\pm</math> 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p>Dimensions: Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm</p> <p>Application: Distance from probe tip to dipole centers: 2.7 mm General dosimetry up to 3 GHz Compliance tests of mobile phone</p>	
<b>ET3DV6 E-Field Probe</b>	

## 12.0 SIDE PLANAR PHANTOM

<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
<b>Side Planar Phantom</b>	

## 13.0 VALIDATION PLANAR PHANTOM

<p>The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.</p>	
<b>Validation Planar Phantom</b>	

## 14.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
<b>Device Holder</b>	

<b>Company:</b>	<b>Cobra Electronics Corporation</b>		<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> ELECTRONICS CORPORATION	
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>		<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>					
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 34		

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 <b>ILAC-MRA</b> ACCREDITED
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

## 15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A
x	-DAE4	00019	353	21Jun06	21Jun07
	-DAE3	00018	370	08Feb06	08Feb07
x	-ET3DV6 E-Field Probe	00016	1387	16Mar06	16Mar07
	-EX3DV4 E-Field Probe	00125	3547	14Feb06	14Feb07
	-300MHz Validation Dipole	00023	135	23Oct06	23Oct07
x	-450MHz Validation Dipole	00024	136	07Dec06	07Dec07
	-835MHz Validation Dipole	00022	411	Brain	28Mar06
				Body	27Mar06
	-900MHz Validation Dipole	00020	054	Brain	06Jun06
				Body	06Jun06
	-1640MHz Validation Dipole	00211	0180	Brain	07Aug06
	-1800MHz Validation Dipole	00021	247	Brain	08Jun06
				Body	09Jun06
	-1900MHz Validation Dipole	00032	151	Brain	09Jun06
				Body	12Jun06
	-2450MHz Validation Dipole	00025	150	Body	24Apr06
	5GHz Validation Dipole	00126	1031	Body	18Jul06
	5200MHz			Body	18Jul06
	5500MHz			Body	14Nov06
	5800MHz			Brain	15Mar06
				Body	18Jul06
	-SAM Phantom V4.0C	00154	1033	N/A	N/A
	-Barski Planar Phantom	00155	03-01	N/A	N/A
x	-Plexiglas Side Planar Phantom	00156	161	N/A	N/A
x	-Plexiglas Validation Planar Phantom	00157	137	N/A	N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A
x	Gigatronics 8652A Power Meter	00110	1835801	12Apr06	12Apr07
	Gigatronics 8652A Power Meter	00007	1835272	03Feb06	03Feb07
x	Gigatronics 80701A Power Sensor	00011	1833542	03Feb06	03Feb07
x	Gigatronics 80701A Power Sensor	00013	1833713	03Feb06	03Feb07
x	HP 8753ET Network Analyzer	00134	US39170292	18Apr06	18Apr07
x	HP 8648D Signal Generator	00005	3847A00611	N/A	N/A
	Rohde & Schwarz SMR40 Signal Generator	00006	100104	06Apr06	06Apr07
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A	N/A

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI4900A	IC ID:	906B-LI4900A	 <b>Cobra</b> ELECTRONICS CORPORATION
Model(s):	LI4890 / LI4900 / LI4925 / LI4950	Portable FM UHF FRS/GMRS PTT Radio Transceiver				

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 <b>ILAC-MRA</b> ACCREDITED
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

## 16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	$V_i$ or $V_{eff}$
<b>Measurement System</b>						
Probe calibration (450 MHz)	8.0	Normal	1	1	8.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
<b>Combined Standard Uncertainty</b>					<b>12.65</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>25.31</b>	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

<b>Company:</b>	<b>Cobra Electronics Corporation</b>		<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> ELECTRONICS CORPORATION
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>		<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 13 of 34

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0	 ILAC-MRA <small>ACCREDITED</small>
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Certificate No. 2470.01

## MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	Vi or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration (450 MHz)	8.0	Normal	1	1	8.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
<b>Combined Standard Uncertainty</b>					11.20	
<b>Expanded Uncertainty (k=2)</b>					22.39	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

<b>Company:</b>	<b>Cobra Electronics Corporation</b>		<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 Cobra <small>Electronics Corporation</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>		<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 34

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## 17.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/TIA-603-C - "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.
- [7] ANSI/IEEE C95.1-2005 - "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz", New York: IEEE, April 2006.

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 ELECTRONICS CORPORATION
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## APPENDIX A - SAR MEASUREMENT DATA

<b>Company:</b>	<b>Cobra Electronics Corporation</b>			<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <small>ELECTRONICS CORPORATION</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 16 of 34

 <b>Celltech</b> Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Date Tested: 01/11/2007

## Face-Held SAR - 462.6375 MHz - Channel 4 - GMRS

**DUT: Cobra Model: LI4900; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: #1**

Ambient Temp: 24.0°C; Fluid Temp: 22.0°C; Barometric Pressure: 103.7 kPa; Humidity: 32%

7.4V 950mAh Li-ion Battery Pack

Communication System: FM UHF

RF Output Power: 0.962 Watts (ERP)

Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 462.6375$  MHz;  $\sigma = 0.87$  mho/m;  $\epsilon_r = 43.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 21/06/2006

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - GMRS Channel 4

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

### Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - GMRS Channel 4


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 36.5 V/m; Power Drift = -0.202 dB

Peak SAR (extrapolated) = 1.78 W/kg

**SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.772 mW/g**

Maximum value of SAR (measured) = 1.16 mW/g

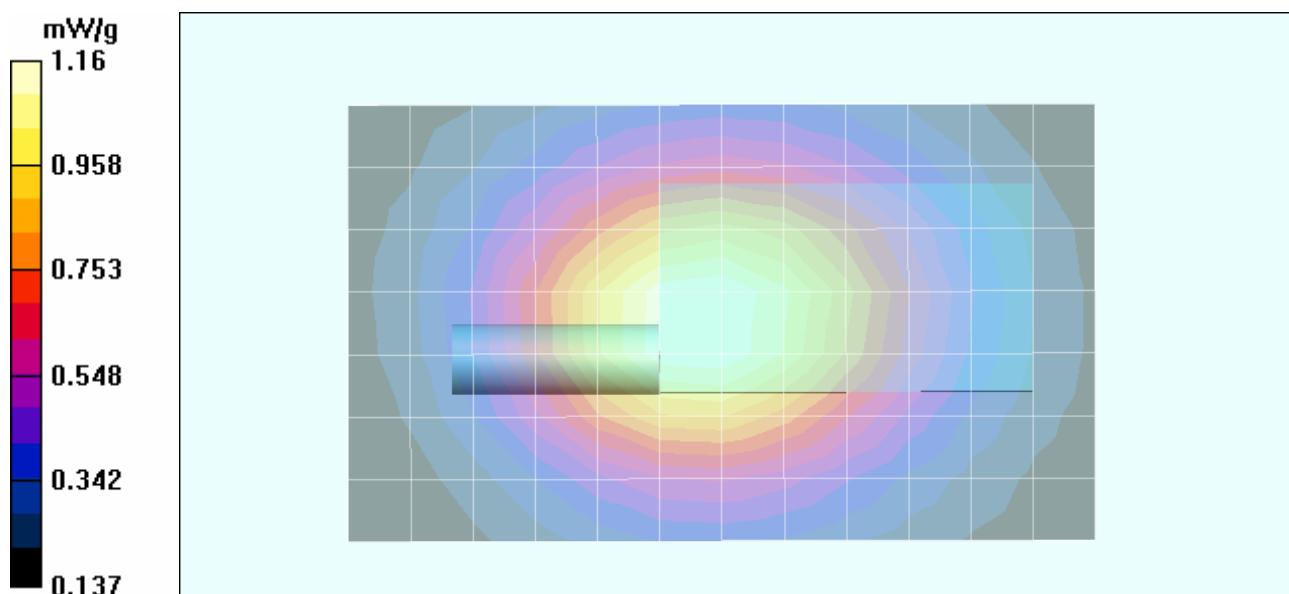


<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> ELECTRONICS CORPORATION
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 34

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## Z-Axis Scan

**SAR(x,y,z,f0)**  
Face SAR; Z Scan:Value Along Z, X=0, Y=0

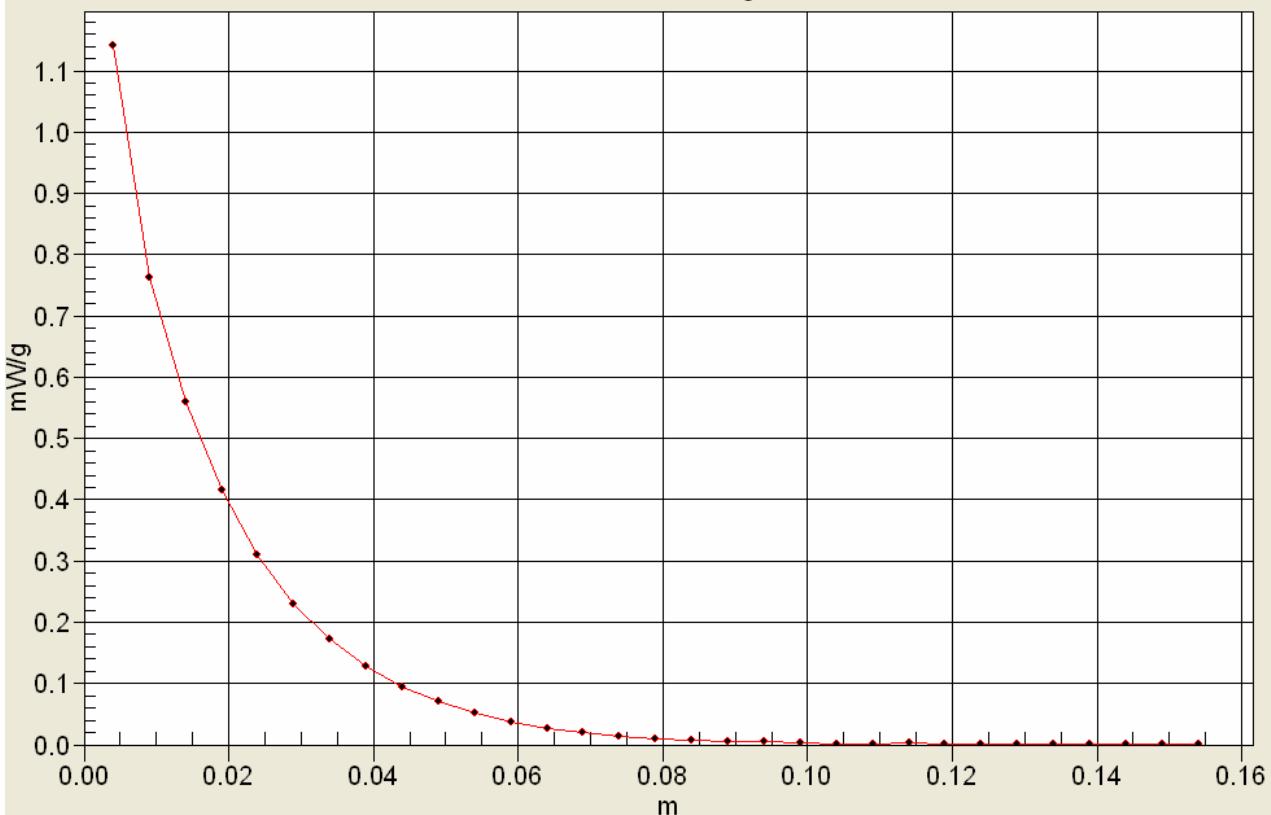

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> <small>ELECTRONICS CORPORATION</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 34

 <b>Celltech</b> Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Date Tested: 01/11/2007

## Body-Worn SAR - 462.6375 MHz - Channel 4 - GMRS

**DUT: Cobra Model: LI4900; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: #1**

**Body-Worn Accessory: Plastic Belt-Clip; Audio Accessory: Ear-bud with Lapel-Microphone (P/N: GA-EBM2)**

Ambient Temp: 24.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 103.7 kPa; Humidity: 32%

7.4V 950mAh Li-ion Battery Pack

Communication System: FM UHF

RF Output Power: 0.962 Watts (ERP)

Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 462.6375$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 57.0$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Body-Worn SAR - 0.4 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - GMRS Channel 4**  
**Area Scan (8x12x1):** Measurement grid: dx=15mm, dy=15mm

**Body-Worn SAR - 0.4 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - GMRS Channel 4**


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.4 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 2.49 W/kg

**SAR(1 g) = 1.52 mW/g; SAR(10 g) = 1.03 mW/g**

Maximum value of SAR (measured) = 1.57 mW/g

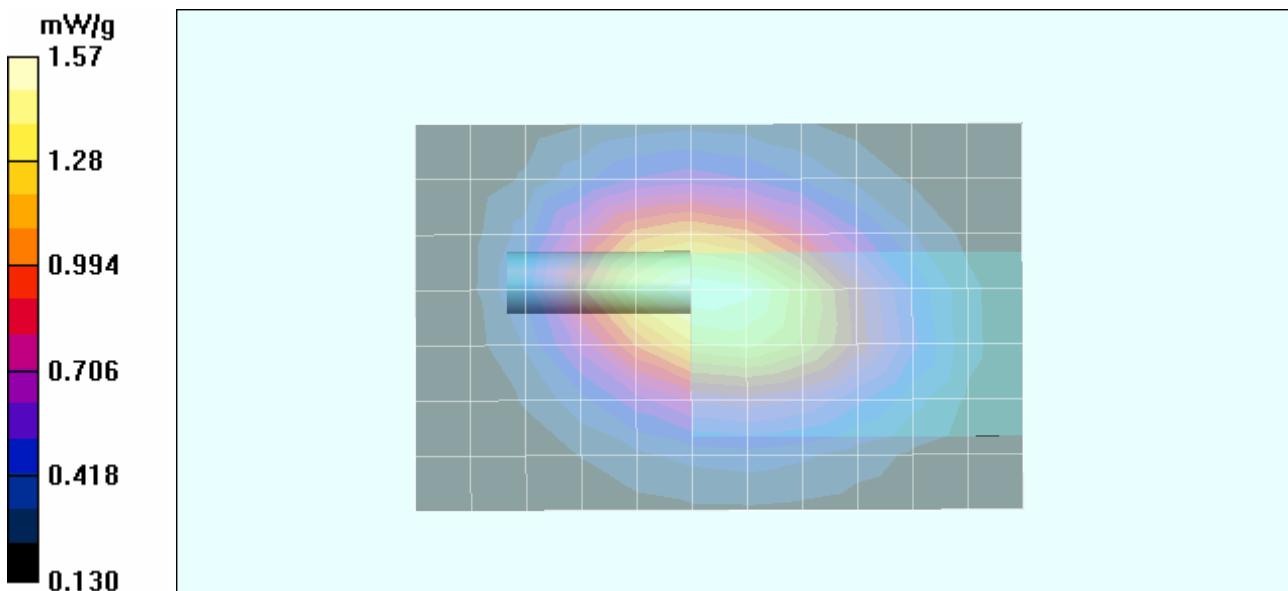


<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> ELECTRONICS CORPORATION
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## Z-Axis Scan

**SAR(x,y,z,f0)**  
Body SAR; Z Scan:Value Along Z, X=0, Y=0

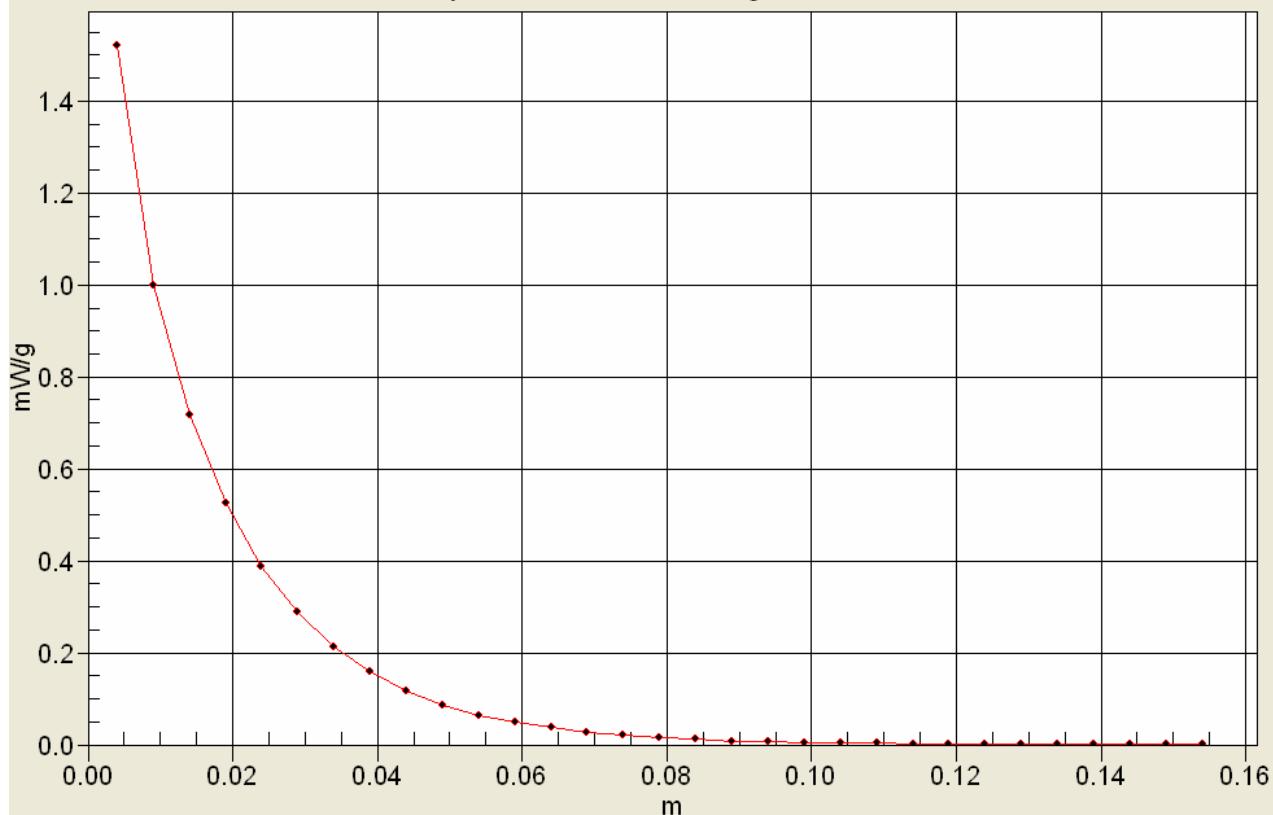

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

<b>Company:</b>	<b>Cobra Electronics Corporation</b>			<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 21 of 34

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Date Tested: 01/11/2007

## System Performance Check - 450 MHz Dipole

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 12/07/2006**

Ambient Temp: 24.0°C; Fluid Temp: 22.0°C; Barometric Pressure: 103.7 kPa; Humidity: 32%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.87$  mho/m;  $\epsilon_r = 43.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### 450 MHz Dipole - System Performance Check/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

### 450 MHz Dipole - System Performance Check/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 37.9 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.749 mW/g**

Maximum value of SAR (measured) = 1.24 mW/g

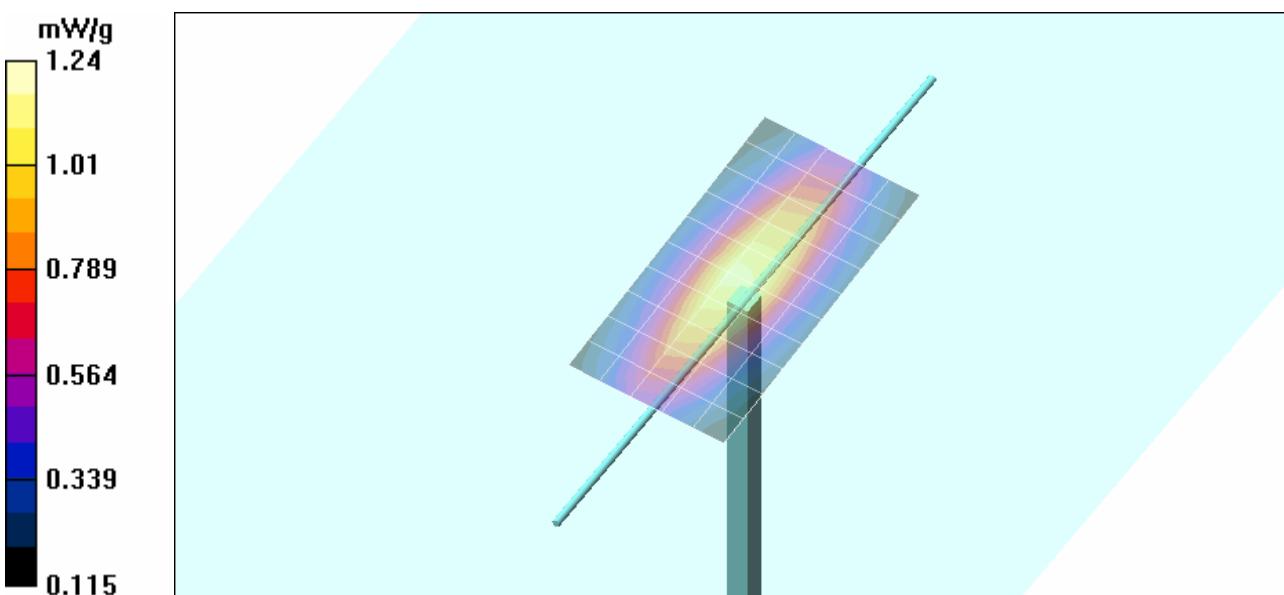


<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> <small>Electronics Corporation</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				

 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## Z-Axis Scan

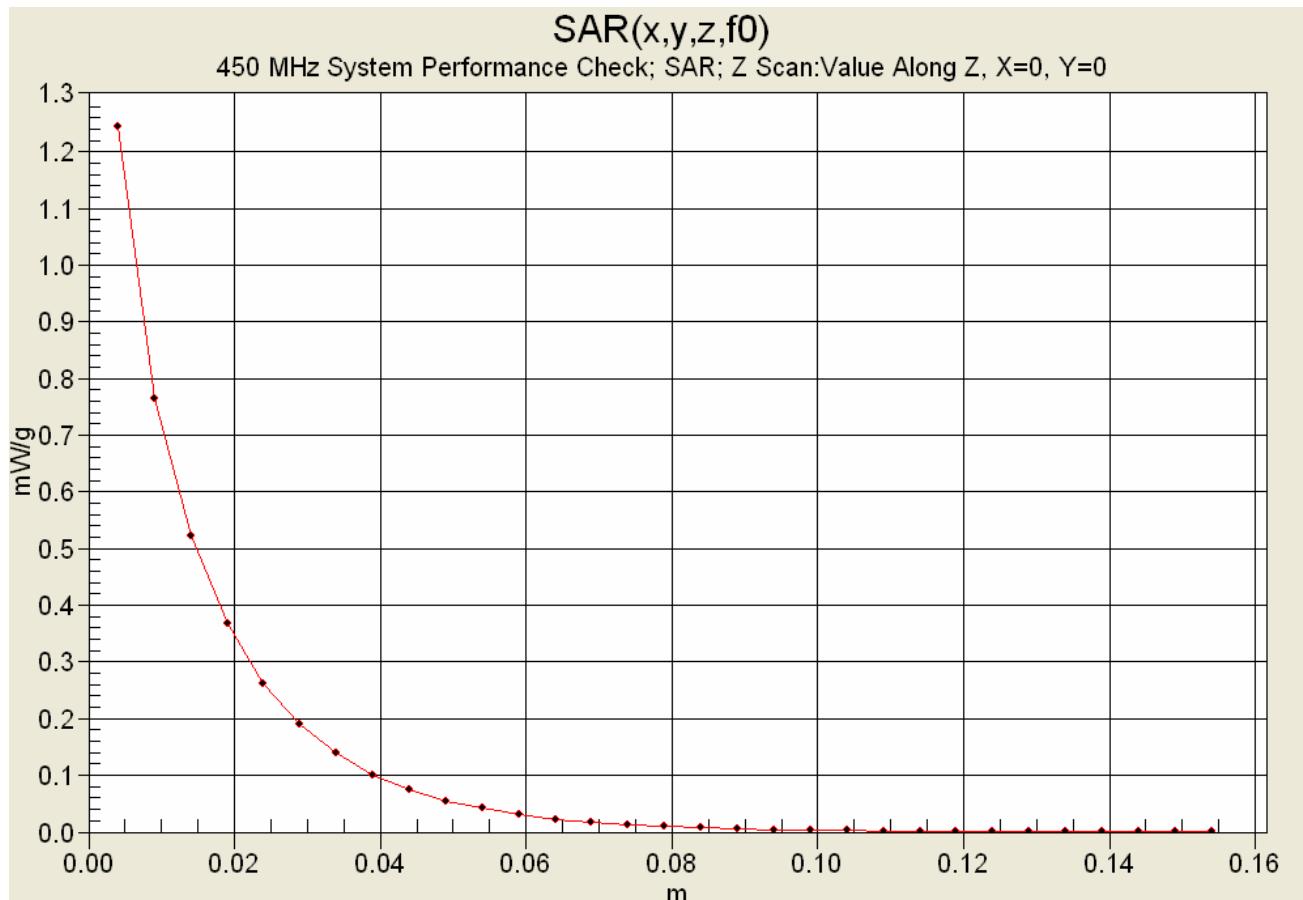

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

<b>Company:</b>	<b>Cobra Electronics Corporation</b>			<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <small>ELECTRONICS CORPORATION</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 24 of 34

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## 450 MHz System Performance Check & DUT Evaluation (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 11/Jan/2007

Frequency (GHz)

FCC\_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.3500	44.70	0.87	46.86
0.3600	44.58	0.87	46.76
0.3700	44.46	0.87	47.07
0.3800	44.34	0.87	47.19
0.3900	44.22	0.87	47.58
0.4000	44.10	0.87	47.27
0.4100	43.98	0.87	46.33
0.4200	43.86	0.87	45.85
0.4300	43.74	0.87	44.91
0.4400	43.62	0.87	44.18
<b>0.4500</b>	<b>43.50</b>	<b>0.87</b>	<b>43.49</b>
0.4600	43.45	0.87	43.25
0.4700	43.40	0.87	43.38
0.4800	43.34	0.87	43.86
0.4900	43.29	0.87	43.84
0.5000	43.24	0.87	44.61
0.5100	43.19	0.87	44.87
0.5200	43.14	0.88	44.50
0.5300	43.08	0.88	43.43
0.5400	43.03	0.88	42.48
0.5500	42.98	0.88	41.31

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 Cobra ELECTRONICS CORPORATION
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 34

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## 450 MHz DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 11/Jan/2007

Frequency (GHz)

FCC\_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.35	0.83
0.3600	57.60	0.93	58.42	0.84
0.3700	57.50	0.93	58.13	0.85
0.3800	57.40	0.93	58.06	0.86
0.3900	57.30	0.93	57.47	0.86
0.4000	57.20	0.93	57.61	0.87
0.4100	57.10	0.93	57.50	0.88
0.4200	57.00	0.94	57.52	0.89
0.4300	56.90	0.94	57.11	0.90
0.4400	56.80	0.94	56.99	0.90
<b>0.4500</b>	<b>56.70</b>	<b>0.94</b>	<b>56.99</b>	<b>0.91</b>
0.4600	56.66	0.94	56.62	0.92
0.4700	56.62	0.94	56.65	0.93
0.4800	56.58	0.94	56.58	0.94
0.4900	56.54	0.94	56.25	0.95
0.5000	56.51	0.94	56.08	0.95
0.5100	56.47	0.94	56.17	0.95
0.5200	56.43	0.95	56.03	0.97
0.5300	56.39	0.95	55.85	0.97
0.5400	56.35	0.95	55.56	0.98
0.5500	56.31	0.95	55.36	0.99

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI4900A	IC ID:	906B-LI4900A	 Cobra ELECTRONICS CORPORATION
Model(s):	LI4890 / LI4900 / LI4925 / LI4950	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 34

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

<b>Company:</b>	<b>Cobra Electronics Corporation</b>			<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 ELECTRONICS CORPORATION
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 27 of 34



Date(s) of Evaluation  
January 11, 2007

Test Report Serial No.  
121106BBO-T799-S95U

Report Revision No.  
Revision 1.0

Report Issue Date  
January 18, 2007

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
General Population




ACCREDITED

Certificate No. 2470.01

## FACE-HELD SAR TEST SETUP PHOTOGRAPHS

2.5 cm Spacing from Front of DUT to Planar Phantom

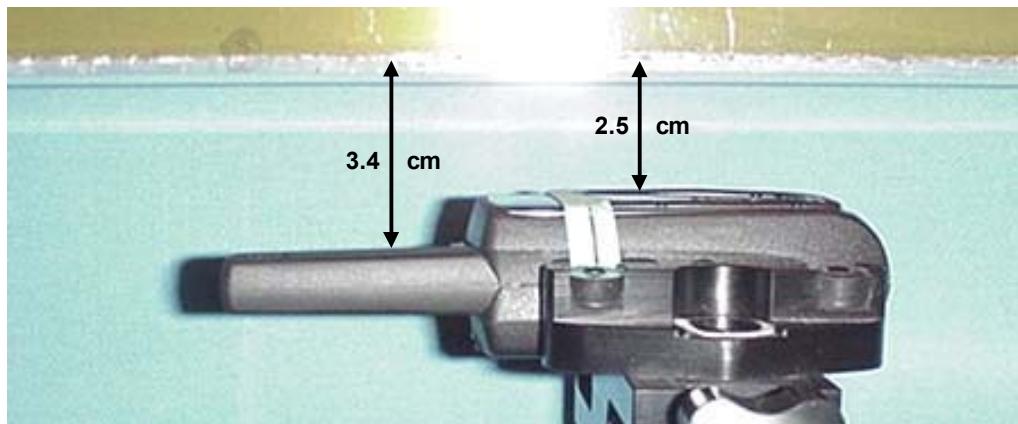

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI4900A	IC ID:	906B-LI4900A	
Model(s):	LI4890 / LI4900 / LI4925 / LI4950	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 28 of 34



 <b>Celltech</b> <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



Certificate No. 2470.01

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS

0.4 cm Belt-Clip Spacing from Back of DUT to Planar Phantom  
With Ear-bud/Lapel-Microphone Audio Accessory (P/N: GA-EBM2)

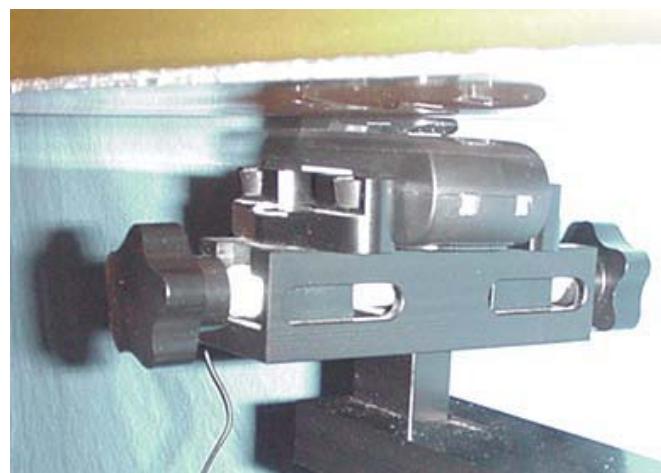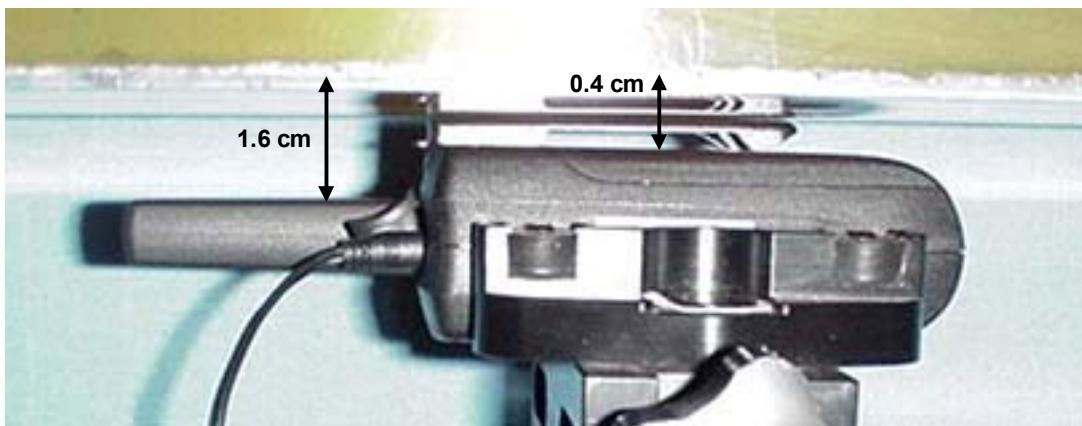

<b>Company:</b>	<b>Cobra Electronics Corporation</b>	<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <b>Cobra</b> <small>ELECTRONICS CORPORATION</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>	<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>				

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## DUT PHOTOGRAPHS



Front of DUT



Back of DUT



Back of DUT with Plastic Belt-Clip



Top end of DUT



Bottom end of DUT

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI4900A	IC ID:	906B-LI4900A	 ELECTRONICS CORPORATION
Model(s):	LI4890 / LI4900 / LI4925 / LI4950	Portable FM UHF FRS/GMRS PTT Radio Transceiver				
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 34

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## DUT PHOTOGRAPHS



Left Side of DUT with Plastic Belt-Clip



Right Side of DUT with Plastic Belt-Clip



DUT Battery Compartment



DUT with Li-ion Battery

<b>Company:</b>	<b>Cobra Electronics Corporation</b>		<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 Cobra <small>ELECTRONICS CORPORATION</small>	
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>		<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>					
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
						Page 31 of 34		

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## DUT PHOTOGRAPHS



DUT with Ear-bud/Lapel-Microphone Audio Accessory (P/N: GA-EBM2)

Company:	Cobra Electronics Corporation	FCC ID:	BBOLI4900A	IC ID:	906B-LI4900A	 Cobra <small>ELECTRONICS CORPORATION</small>	
Model(s):	LI4890 / LI4900 / LI4925 / LI4950	Portable FM UHF FRS/GMRS PTT Radio Transceiver					
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 32 of 34						

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## APPENDIX E - SYSTEM VALIDATION

<b>Company:</b>	<b>Cobra Electronics Corporation</b>			<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <small>ELECTRONICS CORPORATION</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 33 of 34

	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
	Fluid Type:	Brain		

## 450 MHz SYSTEM VALIDATION

Type:

**450 MHz Validation Dipole**

Asset Number:

**00024**

Serial Number:

**136**

Place of Validation:

**Celltech Labs Inc.**

Date of Validation:

**December 07, 2006**

**Celltech Labs Inc. hereby certifies that the system validation was performed on the date indicated above.**

Validated by:



Approved by:




 Celltech <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
			Fluid Type:	Brain

## 1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std "Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques". The electrical properties were measured using an HP 8753ET Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:



Feed point impedance at 450MHz       $\text{Re}\{Z\} = 56.170\Omega$   
 $\text{Im}\{Z\} = 6.2559\Omega$

Return Loss at 450MHz      -21.606dB

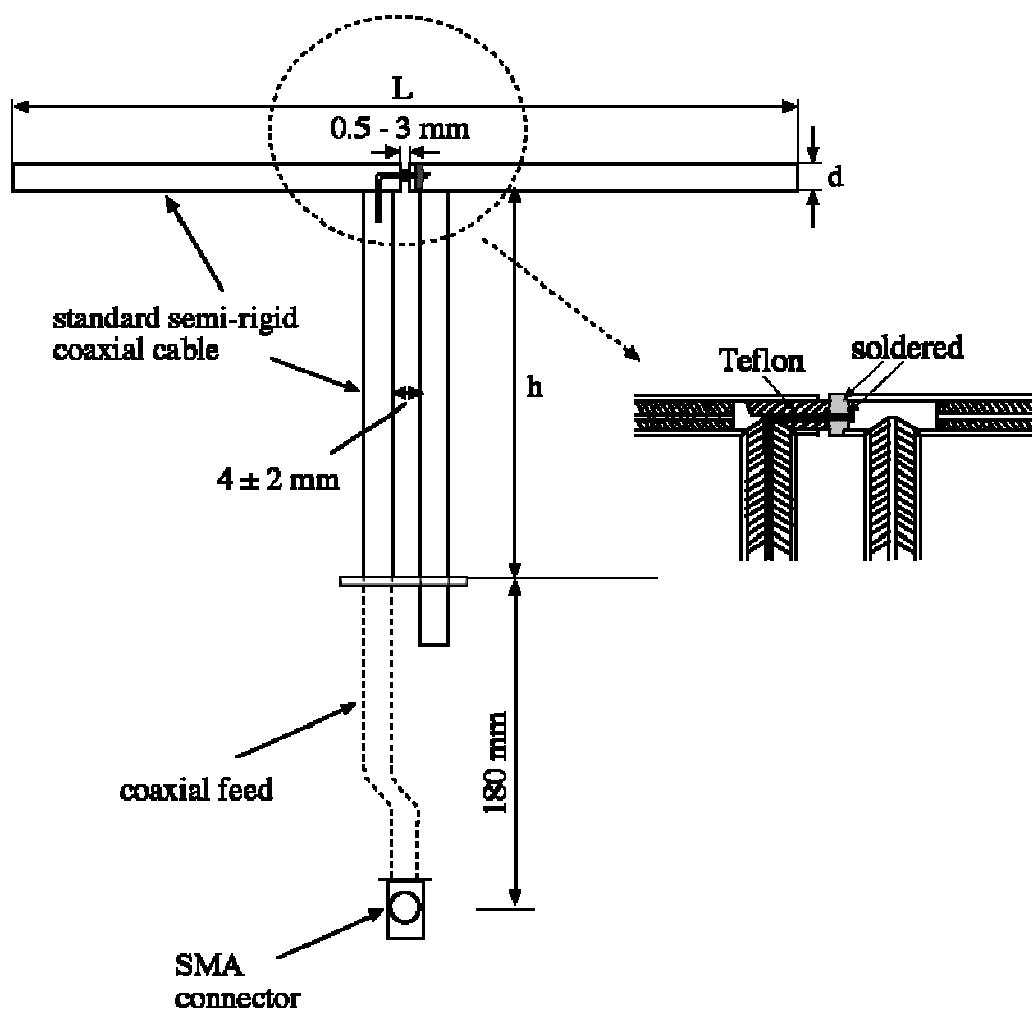

 Celltech <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
	Fluid Type:	Brain		

## 2. Validation Dipole VSWR Data

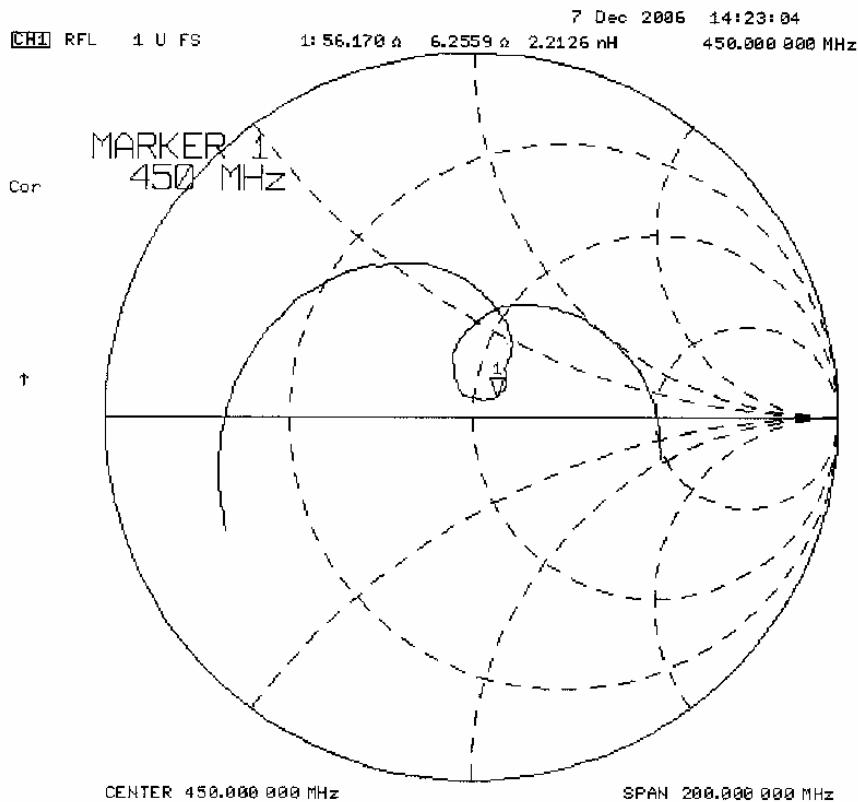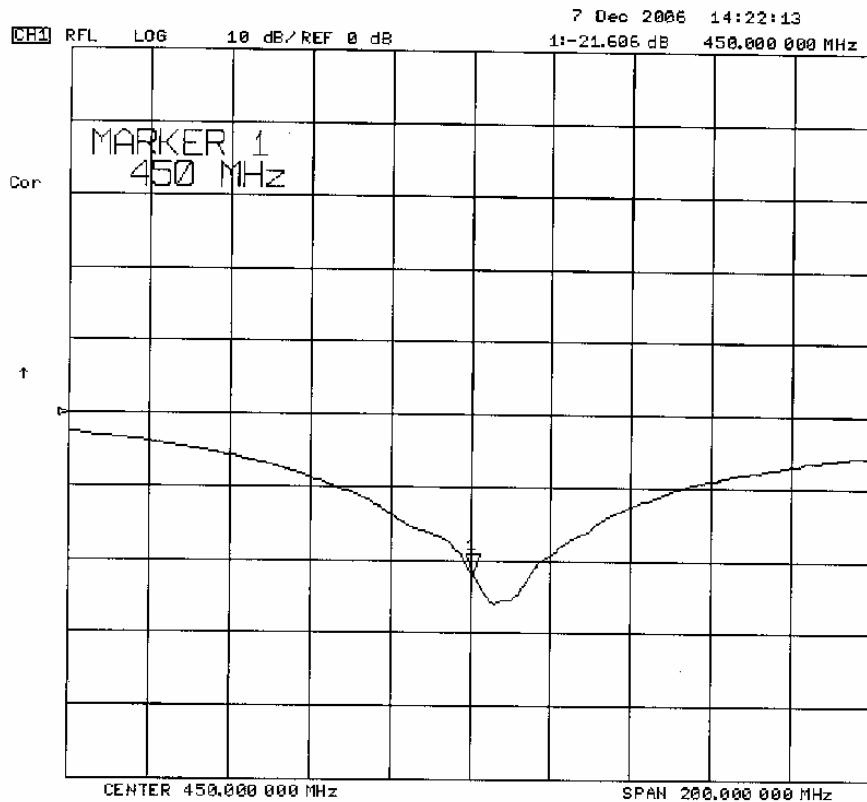

 Celltech <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
			Fluid Type:	Brain

### 3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
<b>450</b>	<b>288.0</b>	<b>167.0</b>	<b>6.2</b>
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

### 4. Validation Phantom

The validation phantom was constructed using relatively low-loss tangent Plexiglas material.




The inner dimensions of the validation phantom are as follows:

Length: 83.5 cm  
 Width: 36.9 cm  
 Height: 21.8 cm

The bottom section of the validation phantom is constructed of  $6.2 \pm 0.1$ mm Plexiglas.

 Celltech <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
			Fluid Type:	Brain

## 5. Dimensions of Plexiglas Planar Phantom

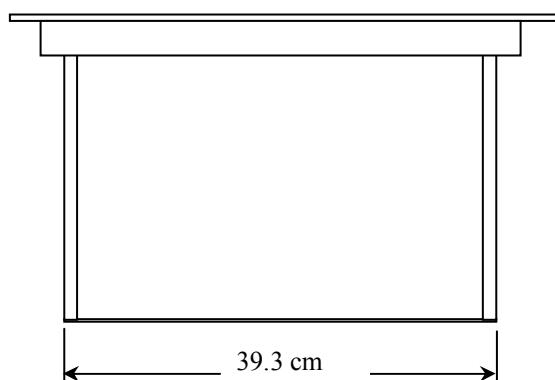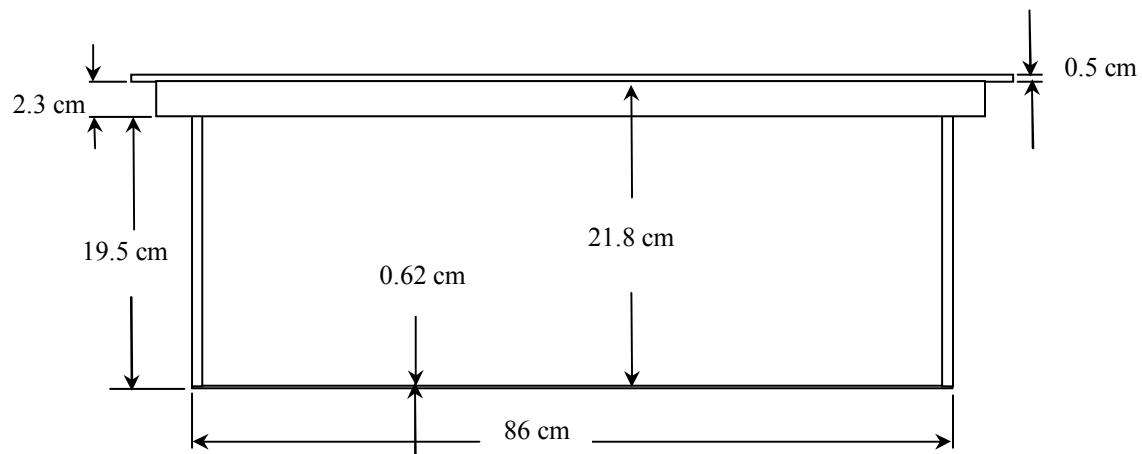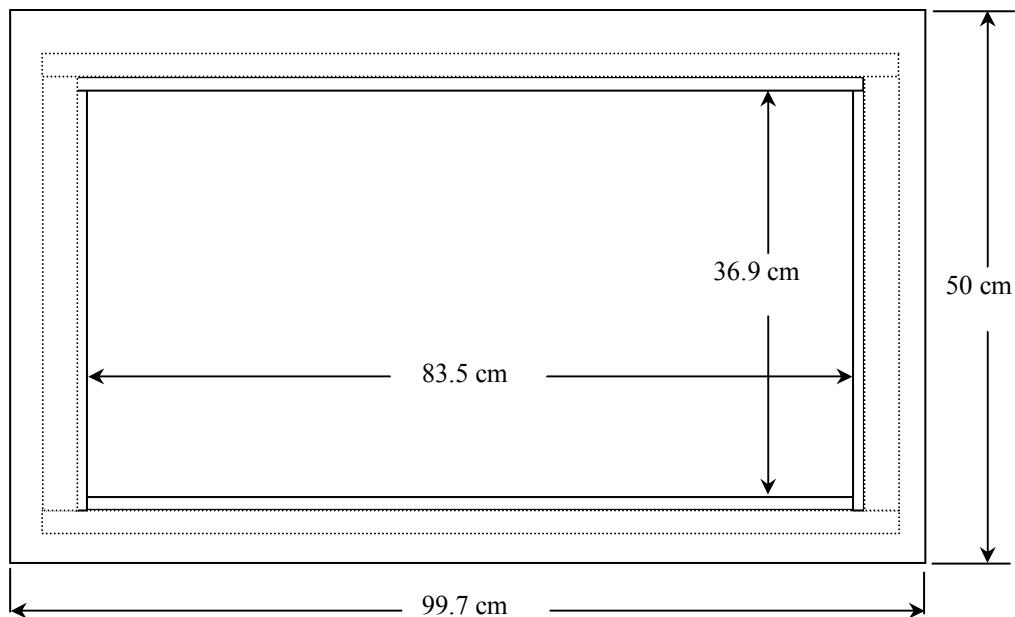

<b>Celltech</b> Testing and Engineering Services Ltd.	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz

## 6. 450 MHz System Validation Setup



<b>Celltech</b> Testing and Engineering Services Ltd.	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
	Fluid Type:	Brain		


## 7. 450 MHz Validation Dipole Setup



 Celltech <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
	Fluid Type:	Brain		

## 8. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

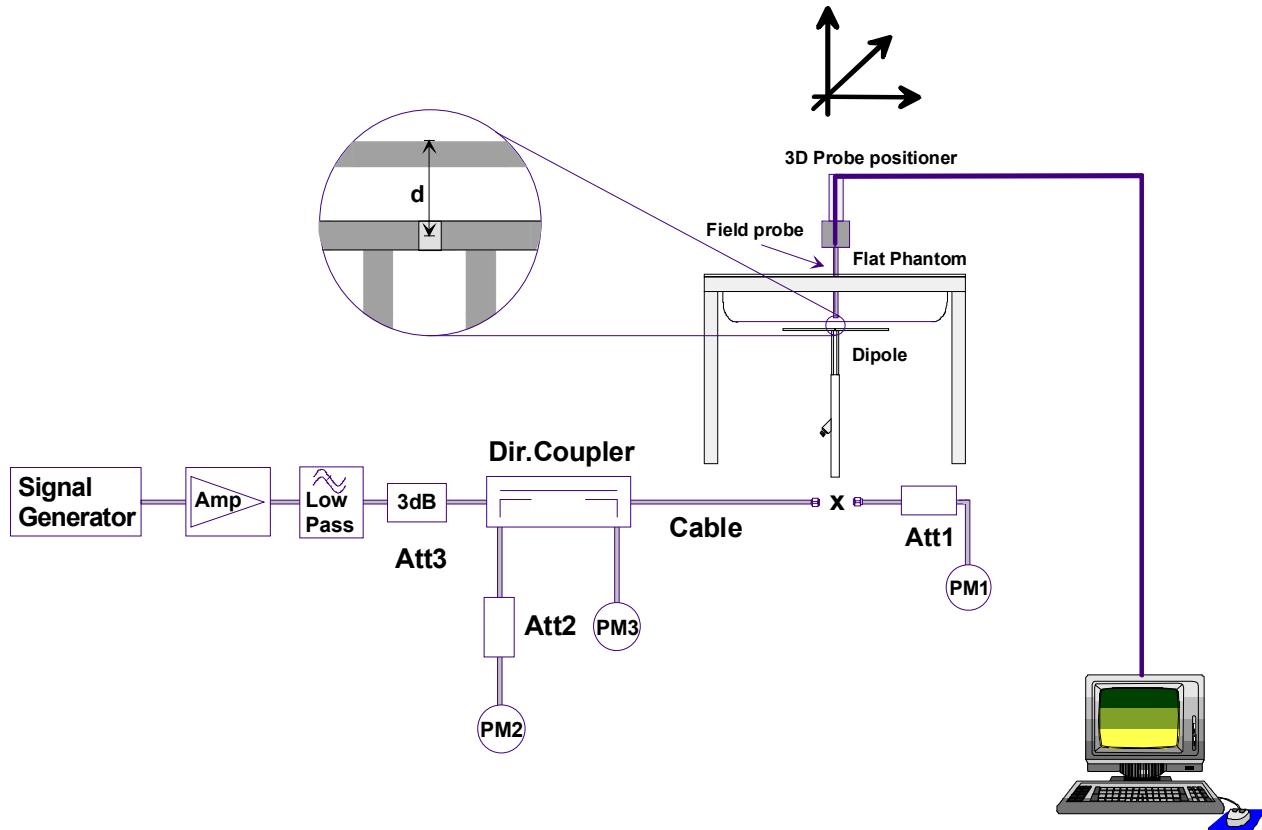

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

 Celltech <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
	Fluid Type:	Brain		

## 9. Measurement Conditions

The planar phantom was filled with 450 MHz brain tissue simulant:

Relative Permittivity: 44.7 (+2.8% deviation from target)  
 Conductivity: 0.90 mho/m (+3.4% deviation from target)  
 Fluid Temperature: 23.3°C  
 Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 24.0°C  
 Humidity: 33 %  
 Barometric Pressure: 102.1kPa

The 450 MHz brain tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight
Water	38.56%
Sugar	56.32%
Salt	3.95%
HEC	0.98%
Dowicil 75	0.19%
450 MHz Target Dielectric Parameters at 22 °C	$\epsilon_r = 43.5 (+/- 5\%)$ $\sigma = 0.87 \text{ S/m} (+/- 5\%)$

## 10. 450 MHz System Validation SAR Test Results

SAR @ 0.25W Input averaged over 1g			SAR @ 1W Input averaged over 1g				
IEEE Target		Measured	Deviation	IEEE Target		Measured	Deviation
1.23	+/- 10%	1.27	+3.3%	4.90	+/- 10%	5.08	+3.7%
SAR @ 0.25W Input averaged over 10g			SAR @ 1W Input averaged over 10g				
IEEE Target		Measured	Deviation	IEEE Target		Measured	Deviation
0.825	+/- 10%	0.810	-1.8%	3.30	+/- 10%	3.24	-1.8%
The results have been normalized to 1W (forward power) into the dipole.							

 Celltech <small>Testing and Engineering Services Ltd.</small>	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
			Fluid Type:	Brain

Date Tested: 12/07/2006

## System Validation - 450 MHz Dipole - Brain Fluid

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 12/07/2006**

Ambient Temp: 24.0°C; Fluid Temp: 23.3°C; Barometric Pressure: 102.1 kPa; Humidity: 33%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450; Medium parameters used:  $\sigma = 0.90 \text{ mho/m}$ ;  $\epsilon_r = 44.7$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### 450 MHz Dipole - System Validation/Area Scan (6x11x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

### 450 MHz Dipole - System Validation/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 38.5 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 2.24 W/kg


**SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.810 mW/g**

Maximum value of SAR (measured) = 1.34 mW/g

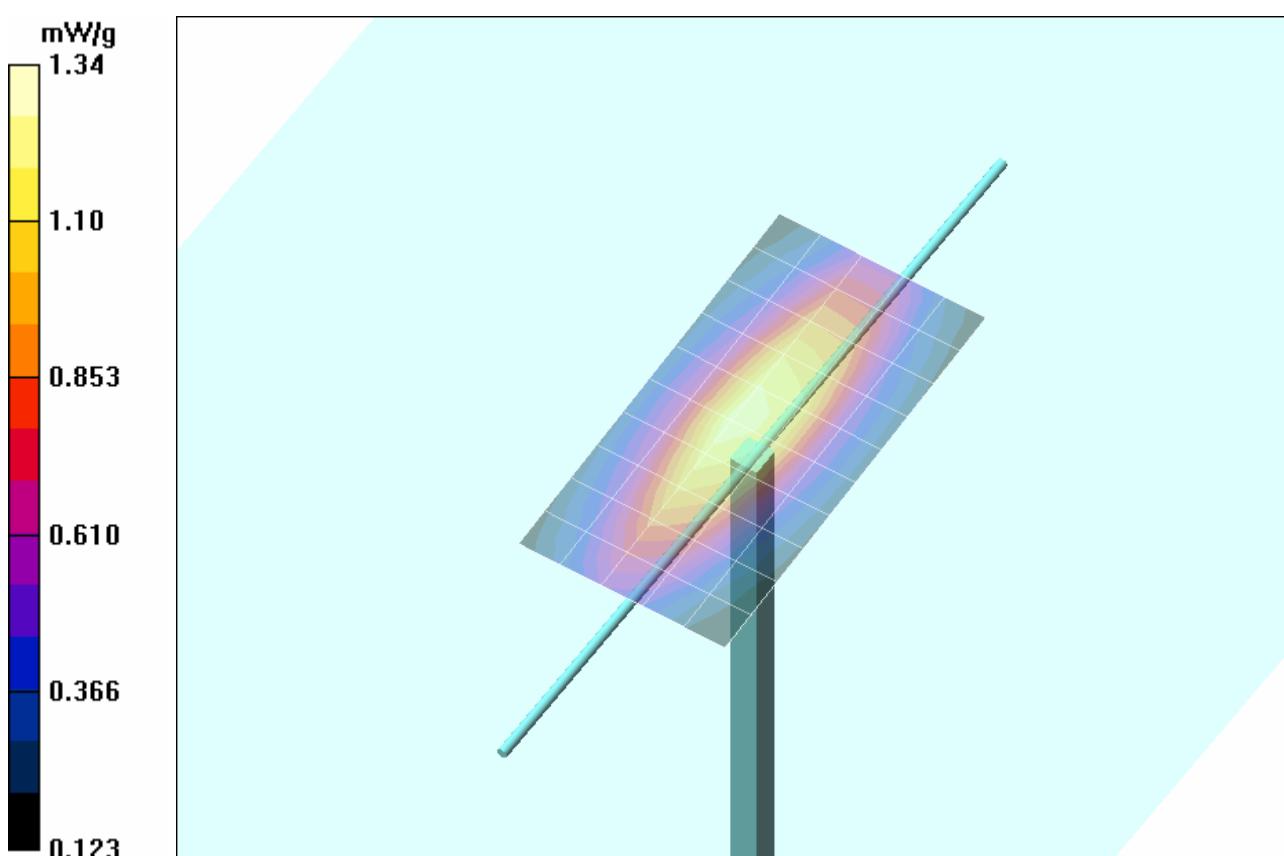

 Celltech Testing and Engineering Services Ltd.	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
			Fluid Type:	Brain

## Z-Axis Scan

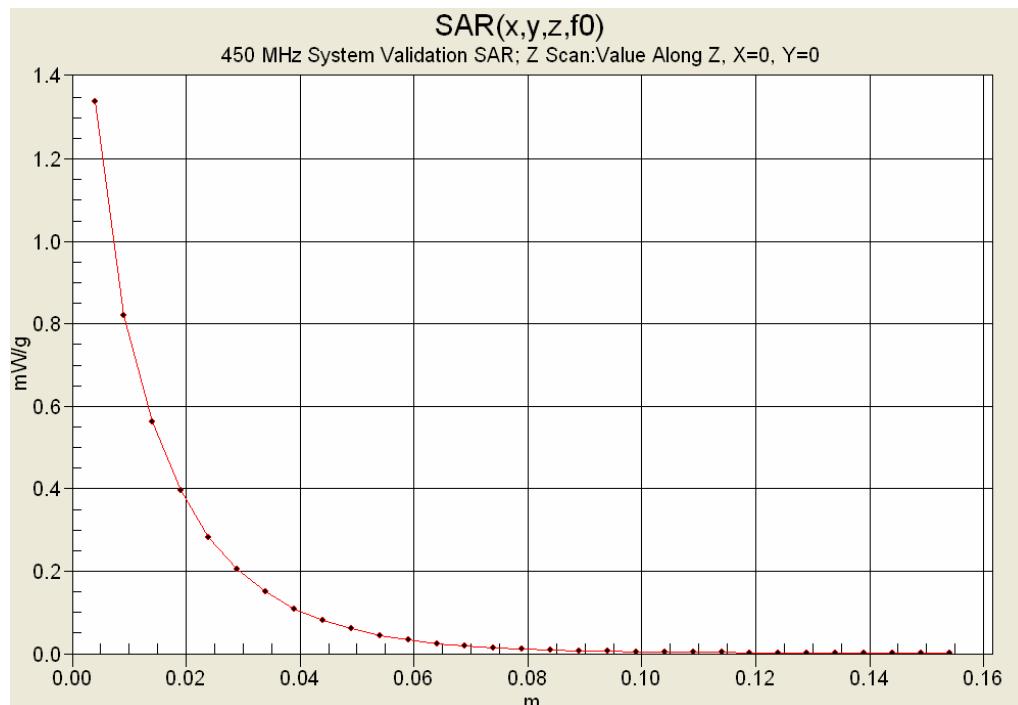

## 11. Measured Fluid Dielectric Parameters

### System Validation (Brain) - 450 MHz Dipole

\*\*\*\*\*

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 07/Dec/2006

Frequency (GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.00	0.81
0.3600	44.58	0.87	47.03	0.82
0.3700	44.46	0.87	46.57	0.83
0.3800	44.34	0.87	46.74	0.84
0.3900	44.22	0.87	46.22	0.85
0.4000	44.10	0.87	45.87	0.86
0.4100	43.98	0.87	45.56	0.87
0.4200	43.86	0.87	45.20	0.88
0.4300	43.74	0.87	45.11	0.88
0.4400	43.62	0.87	44.87	0.89
0.4500	43.50	0.87	44.67	0.90
0.4600	43.45	0.87	44.53	0.91
0.4700	43.40	0.87	44.30	0.92
0.4800	43.34	0.87	43.85	0.92
0.4900	43.29	0.87	43.89	0.94
0.5000	43.24	0.87	43.69	0.94
0.5100	43.19	0.87	43.31	0.95
0.5200	43.14	0.88	43.18	0.96
0.5300	43.08	0.88	43.13	0.97
0.5400	43.03	0.88	42.70	0.98
0.5500	42.98	0.88	42.54	0.98

 Celltech <small>Testing and Engineering Services Lab</small>	<u>Date(s) of Evaluation</u> January 11, 2007	<u>Test Report Serial No.</u> 121106BBO-T799-S95U	<u>Report Revision No.</u> Revision 1.0
	<u>Report Issue Date</u> January 18, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population



## APPENDIX F - PROBE CALIBRATION

<b>Company:</b>	<b>Cobra Electronics Corporation</b>			<b>FCC ID:</b>	<b>BBOLI4900A</b>	<b>IC ID:</b>	<b>906B-LI4900A</b>	 <small>ELECTRONICS CORPORATION</small>
<b>Model(s):</b>	<b>LI4890 / LI4900 / LI4925 / LI4950</b>				<b>Portable FM UHF FRS/GMRS PTT Radio Transceiver</b>			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 34 of 34



Accredited by the Swiss Federal Office of Metrology and Accreditation  
**The Swiss Accreditation Service is one of the signatories to the EA**  
**Multilateral Agreement for the recognition of calibration certificates**

**Accreditation No.: SCS 108**

**Client** **Celltech Labs**

**Certificate No.: ET3-1387\_Mar06**

## **CALIBRATION CERTIFICATE**

**Object** **ET3DV6 - SN:1387**

**Calibration procedure(s)**  
**QA CAL-01.v5**  
**Calibration procedure for dosimetric E-field probes**

**Calibration date:** **March 16, 2006**

**Condition of the calibrated item** **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	2-Feb-06 (SPEAG, No. DAE4-654_Feb06)	Feb-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

Calibrated by: **Katja Pokovic** **Technical Manager**

Approved by: **Niels Kuster** **Quality Manager**

**Issued: March 16, 2006**

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### **Glossary:**

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### **Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

### **Methods Applied and Interpretation of Parameters:**

- $NORMx,y,z$ : Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not effect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1387

Manufactured:	September 21, 1999
Last calibrated:	March 18, 2005
Recalibrated:	March 16, 2006

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

**DASY - Parameters of Probe: ET3DV6 SN:1387**

Sensitivity in Free Space <sup>A</sup>			Diode Compression <sup>B</sup>		
NormX	<b>1.62</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	<b>92</b> mV	
NormY	<b>1.72</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	<b>92</b> mV	
NormZ	<b>1.72</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	<b>92</b> mV	

## Sensitivity in Tissue Simulating Liquid (Conversion Factors)

**Please see Page 8.**

## Boundary Effect

**TSL**      **900 MHz**      **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	9.3	5.0
SAR <sub>be</sub> [%]	With Correction Algorithm	0.1	0.2

## Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Page 8).




<sup>b</sup> Numerical linearization parameter: uncertainty not required.

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

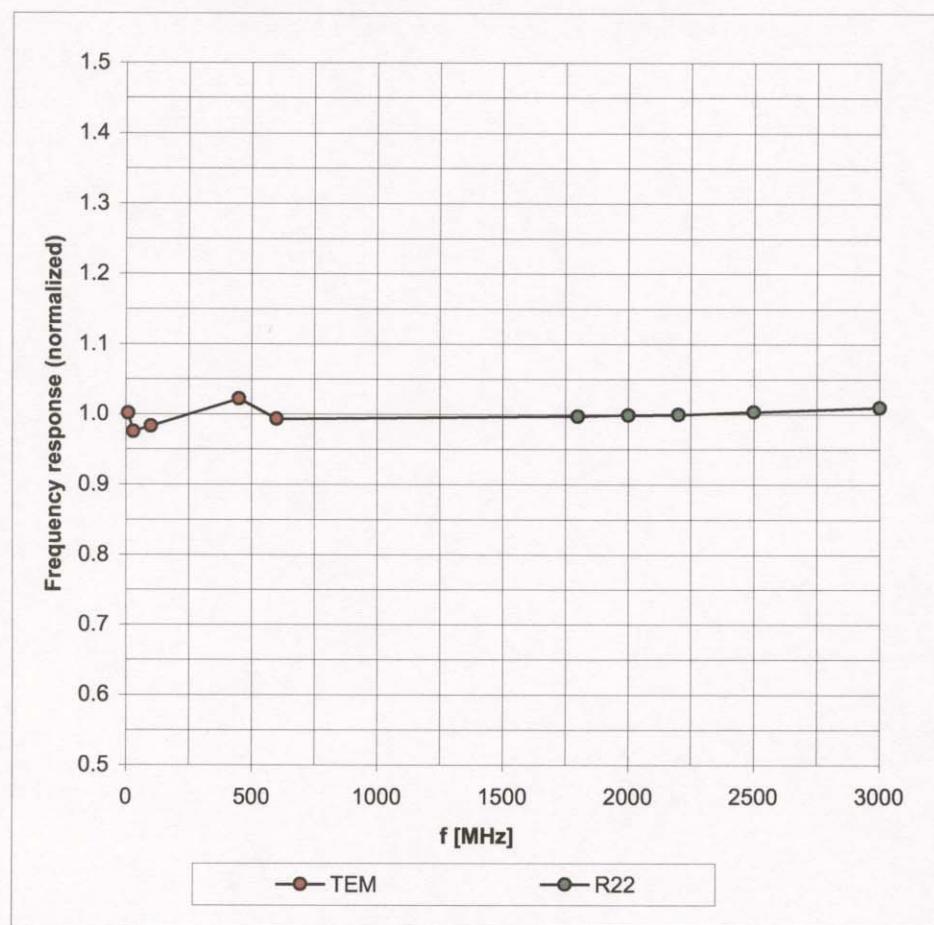


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

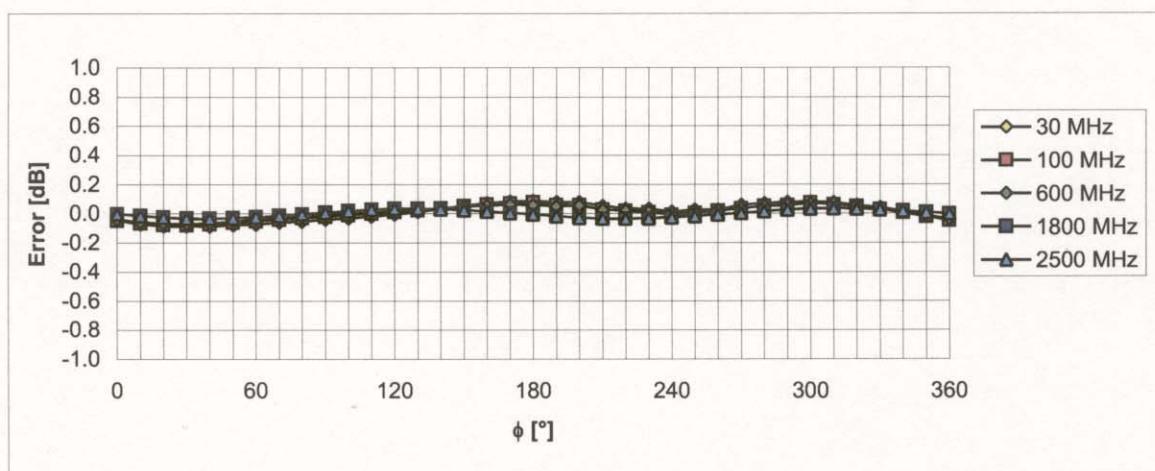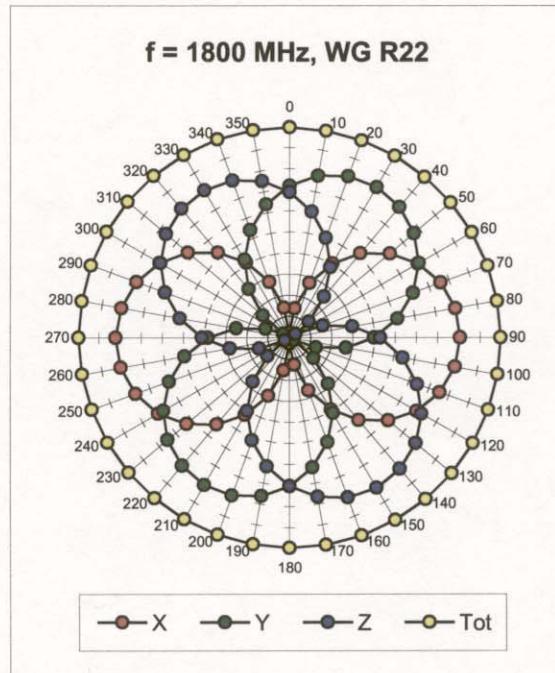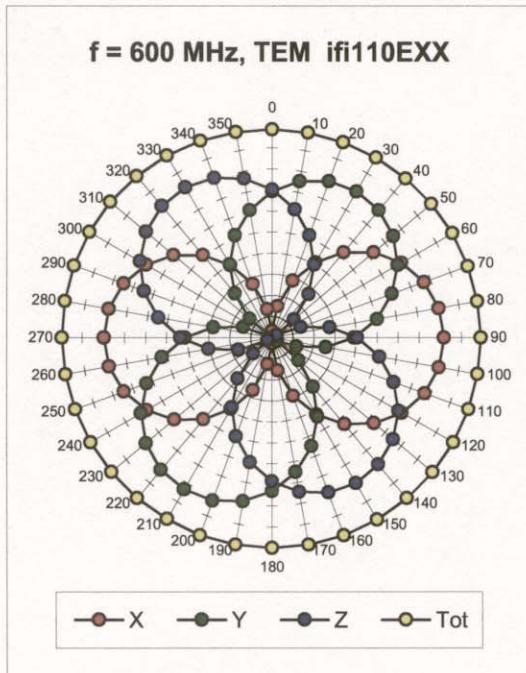Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$ 

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)


## Dynamic Range f(SAR<sub>head</sub>)

(Waveguide R22, f = 1800 MHz)

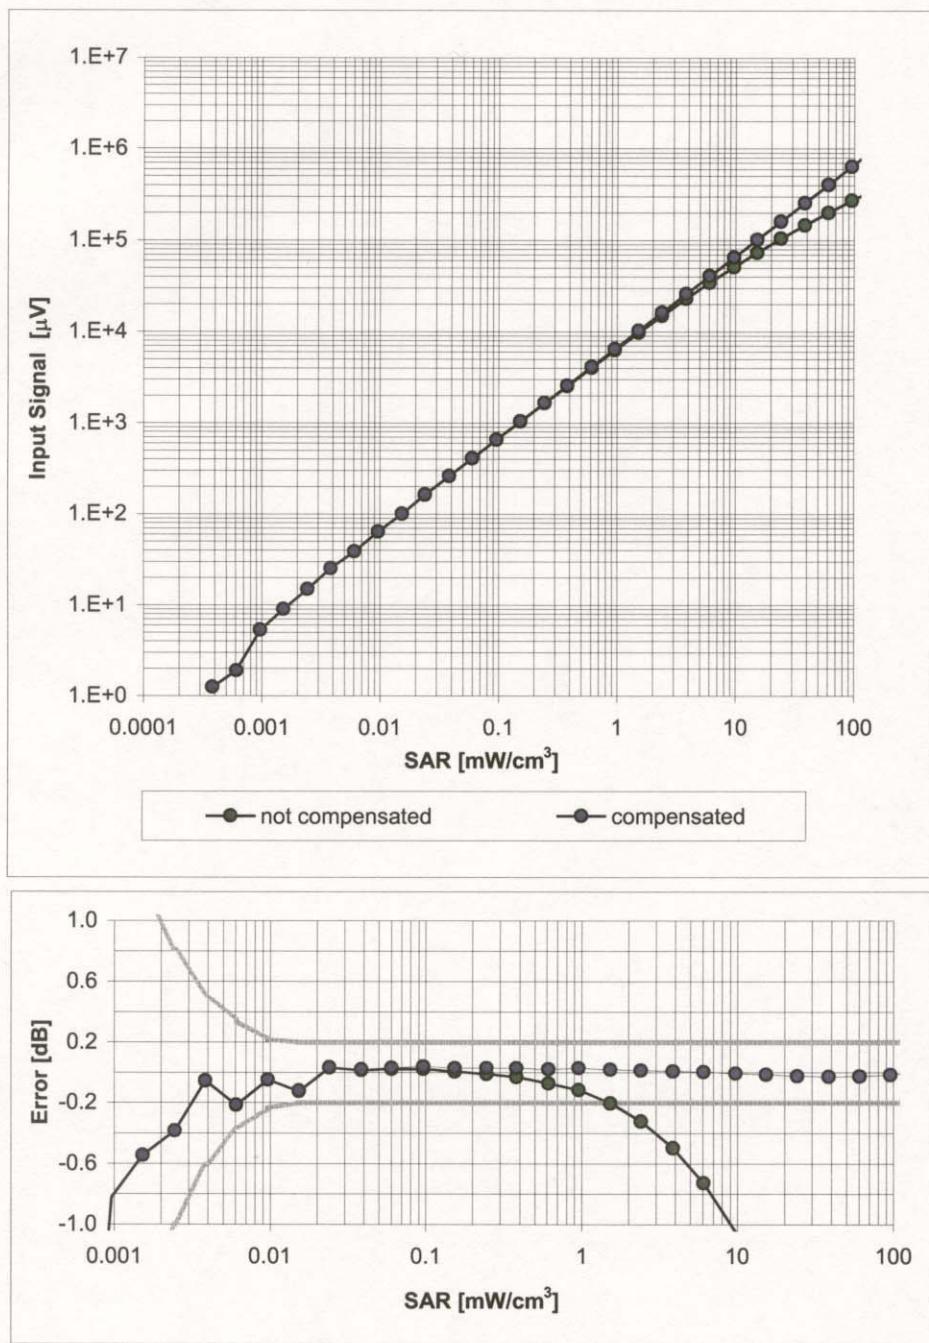

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

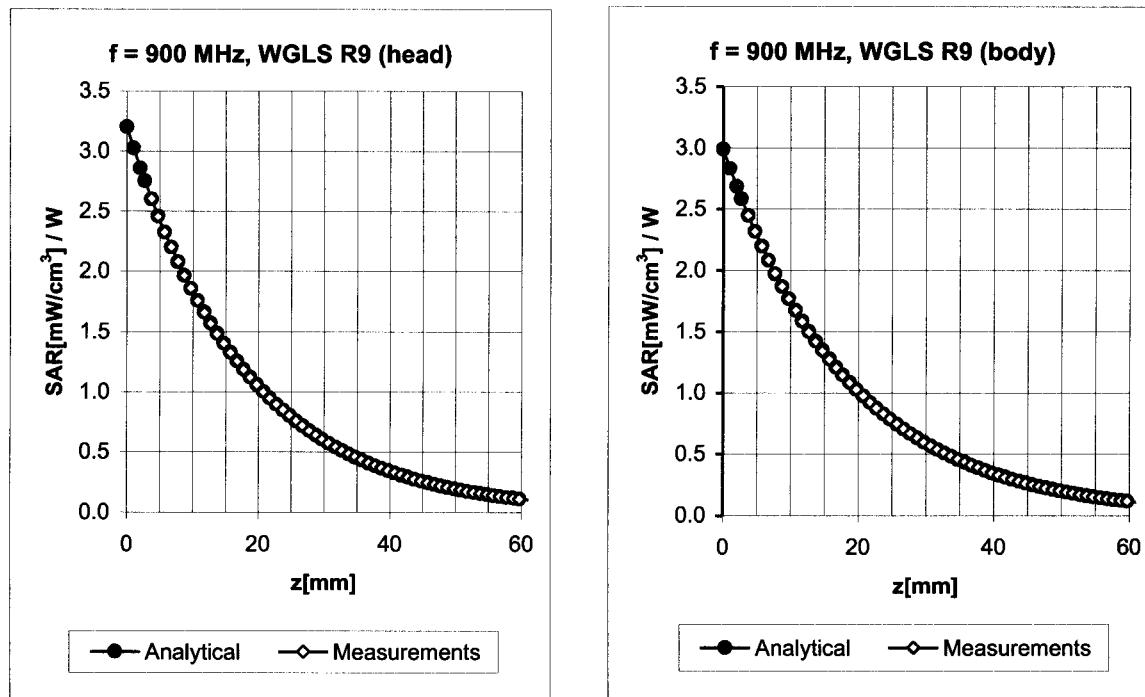


$f$ [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
900	$\pm 50 / \pm 100$	Head	$41.5 \pm 5\%$	$0.97 \pm 5\%$	0.62	1.86	6.35	$\pm 11.0\% (k=2)$
900	$\pm 50 / \pm 100$	Body	$55.0 \pm 5\%$	$1.05 \pm 5\%$	0.59	1.97	6.04	$\pm 11.0\% (k=2)$

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ),  $f = 900$  MHz

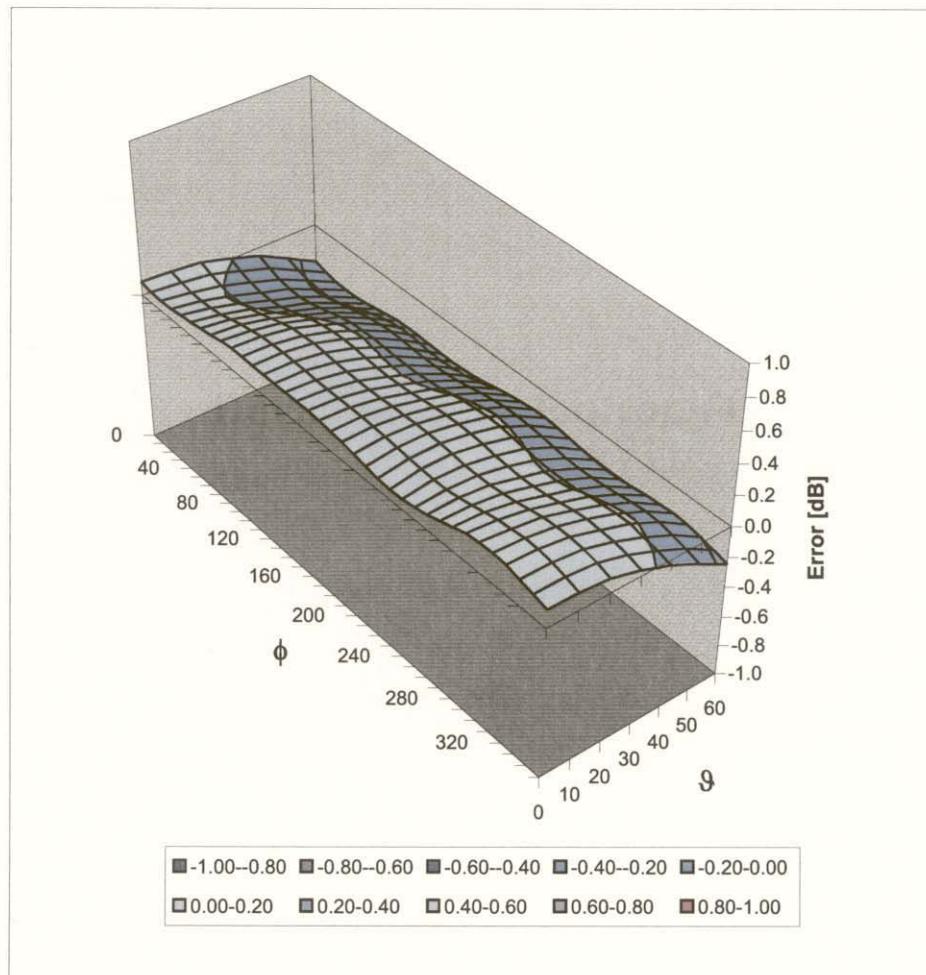

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  (k=2)

## **Additional Conversion Factors for Dosimetric E-Field Probe**

Type:

**ET3DV6**

Serial Number:

**1387**

Place of Assessment:

**Zurich**

Date of Assessment:


**March 18, 2006**

Probe Calibration Date:

**March 16, 2006**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



## Dosimetric E-Field Probe ET3DV6 SN:1387

Conversion factor ( $\pm$  standard deviation)

<b>150 <math>\pm</math> 50 MHz</b>	ConvF	<b>8.6 <math>\pm</math> 10 %</b>	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\% \text{ mho/m}$ (head tissue)
<b>150 <math>\pm</math> 50 MHz</b>	ConvF	<b>8.2 <math>\pm</math> 10 %</b>	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\% \text{ mho/m}$ (body tissue)
<b>300 <math>\pm</math> 50 MHz</b>	ConvF	<b>7.8 <math>\pm</math> 9 %</b>	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\% \text{ mho/m}$ (head tissue)
<b>450 <math>\pm</math> 50 MHz</b>	ConvF	<b>7.4 <math>\pm</math> 8 %</b>	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\% \text{ mho/m}$ (head tissue)
<b>450 <math>\pm</math> 50 MHz</b>	ConvF	<b>7.3 <math>\pm</math> 8 %</b>	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\% \text{ mho/m}$ (body tissue)
<b>750 <math>\pm</math> 50 MHz</b>	ConvF	<b>6.6 <math>\pm</math> 7 %</b>	$\epsilon_r = 41.8 \pm 5\%$ $\sigma = 0.89 \pm 5\% \text{ mho/m}$ (head tissue)
<b>750 <math>\pm</math> 50 MHz</b>	ConvF	<b>6.4 <math>\pm</math> 7 %</b>	$\epsilon_r = 55.4 \pm 5\%$ $\sigma = 0.96 \pm 5\% \text{ mho/m}$ (body tissue)
<b>1925 <math>\pm</math> 50 MHz</b>	ConvF	<b>5.0 <math>\pm</math> 7 %</b>	$\epsilon_r = 39.8 \pm 5\%$ $\sigma = 1.48 \pm 5\% \text{ mho/m}$ (head tissue)
<b>1925 <math>\pm</math> 50 MHz</b>	ConvF	<b>4.7 <math>\pm</math> 7 %</b>	$\epsilon_r = 53.2 \pm 5\%$ $\sigma = 1.60 \pm 5\% \text{ mho/m}$ (body tissue)

### Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.  
 Please see also Section 4.7 of the DASY4 Manual.