



SAR TEST REPORT

Test Report No.: 12344396S-A-r01

Applicant : CASIO COMPUTER CO., LTD.
Type of Equipment : Smart Outdoor Watch
Model No. : WSD-F30
FCC ID : BBQ-WSDF30
Test Standard : FCC 47CFR §2.1093
Test Result : Complied

RF Exposure Condition	Highest Reported SAR Value			Remarks			Output power (average)	
	Type	Tune-up value	Limit	Band	Frequency	Mode	Measured	Maximum
Extremity (Wrist)	SAR (10g)	0.17 W/kg	4	DTS	2412 MHz	11b(1Mbps)	17.19 dBm	18.5 dBm
Next-to-Mouth	SAR (1g)	< 0.1 W/kg	1.6	DTS	2462 MHz	11b(1Mbps)	17.22 dBm	18.5 dBm

*. **Highest reported SAR across all exposure conditions of this device is "0.17 W/kg (10g, Wrist)" and "<0.1 W/kg (1g, Next-of-mouth)".**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: August 30 and 31, 2018

Test engineer: H. Naka
 Hiroshi Naka
 Engineer, Consumer Technology Division

Approved by: T. Amamura
 Toyokazu Imamura
 Leader, Consumer Technology Division

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".



REVISION HISTORY

Revision	Test report No.	Date	Page revised	Contents
Original	12344396S-A	September 19, 2018	-	-
-r01	12344396S-A	September 25, 2018	1,2,3,8,10	(p3,8,10) Error correcting.

*. By issue of new revision report, the report of an old revision becomes invalid.

CONTENTS **PAGE**

REVISION HISTORY 2
CONTENTS 2
SECTION 1: Customer information..... 3
SECTION 2: Equipment under test (EUT)..... 3
 2.1 Identification of EUT 3
 2.2 Product Description 3
SECTION 3: Test specification, procedures and results..... 4
 3.1 Test specification 4
 3.2 Exposure limit 4
 3.3 Procedure and result 4
 3.4 Test location 4
 3.5 Confirmation before SAR testing 5
 3.6 Confirmation after SAR testing 5
 3.7 Test setup of EUT and SAR measurement procedure 6
SECTION 4: Operation of EUT during testing 7
SECTION 5: Uncertainty assessment (SAR measurement) 7
SECTION 6: Confirmation before testing 8
 6.1 SAR reference power measurement (antenna terminal conducted average power of EUT) 8
 6.2 Comparison of power of EMC sample 9
SECTION 7: Measured and reported (scaled) SAR results 10

Contents of appendixes

APPENDIX 1: Photographs of test setup..... 11
 Appendix 1-1 Photograph of Platform and antenna position 11
 Appendix 1-2 EUT and support equipment 12
 Appendix 1-3 Photograph of test setup 13
APPENDIX 2: SAR Measurement data 14
 Appendix 2-1 Evaluation procedure 14
 Appendix 2-2 SAR measurement data 15
APPENDIX 3: Test instruments 21
 Appendix 3-1 Equipment used 21
 Appendix 3-2 Configuration and peripherals 22
 Appendix 3-3 Test system specification 23
 Appendix 3-4 Simulated tissues composition and parameter confirmation 24
 Appendix 3-5 Daily check results 24
 Appendix 3-6 Daily check measurement data 25
 Appendix 3-7 Daily check uncertainty 26
 Appendix 3-8 Calibration certificate: E-Field Probe (EX3DV4) 27
 Appendix 3-9 Calibration certificate: Dipole (D2450V2) 38

SECTION 1: Customer information

Company Name	CASIO COMPUTER CO., LTD.
Address	2-1, Sakaecho 3-chome, Hamura-shi, Tokyo, 205-8555 Japan
Telephone Number	+81-42-579-7249
Contact Person	Munetaka Seo

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type of Equipment	Smart Outdoor Watch
Model Number	WSD-F30
Serial Number	10
Condition of EUT	Production prototype (*. Not for sale: These samples are equivalent to mass-produced items.)
Receipt Date of Sample	June 6, 2018 (*. EUT for power measurement.) *. No modification by the Lab. August 9, 2018 (*. EUT for SAR test.) *. No modification by the Lab. (*: After power measurement, the EUT was returned to the customer, and the RF wiring was changed to the original antenna line from the antenna conducted power measurement line by the customer.)
Country of Mass-production	Japan, Thailand
Rating	DC 3.7 V typical (battery) (DC 3.5 V to 4.2 V), DC 5 V typical (AC Adapter)
Category Identified	Portable device (wristwatch)
Feature of EUT	Model: WSD-F30 (referred to as the EUT in this report) is a Smart Outdoor Watch. The EUT supports some operations and functions (e.g. responding to mail and SMS messages, etc.) by using the voice command.
SAR Accessory	Removable wrist band: non-metallic. *. For the SAR test, the wrist band holder of EUT was cut off and also removed the wrist band to make the back of EUT touch to the flat phantom directly. (Refer to Appendix 1-1 for more detail.)

2.2 Product Description (RF Module)

Equipment type:	Transceiver										
Transmit average power: (*: The measured Tx output power (antenna terminal conducted) refers to section 6 in this report.)	Bluetooth (Ver. 4.1 with EDR function)	BDR	0~78	2402~2480	1	GFSK	1	79	-	-	11.5
		EDR	0~78	2402~2480	2~3	GFSK+ $\pi/4$ -DQPSK, GFSK+8DPSK	1	79	-	-	8.0
		BLE	0~39	2402~2480	1	GFSK	2	79	-	-	9.0
	Wi-Fi:	b	1~11	2412~2462	1~11	DSSS	5	20	-	-	18.5
		g	1~11	2412~2462	6~54	OFDM	5	20	-	-	15.0
		n(20HT)	1~11	2412~2462	MCS0~7	OFDM	5	20	-	-	14.0
Type of modulation:	Bluetooth:	FHSS: GFSK									
	Wi-Fi:	DSSS: DBPSK, DQPSK, CCK / OFDM: BPSK, QPSK, 16QAM, 64QAM									
Quantity of Antenna:	1 piece (*. No simultaneous transmission for Wi-Fi mode and Bluetooth mode.)										
Antenna type:	Inverted F Type	Model:	1019-056A		Connector type:	Physical contact					
Antenna gain (Peak):	-6.81 dBi										

- *. b: IEEE 802.11b, g: IEEE 802.11g, n20: IEEE 802.11n(20HT); BLE: Bluetooth Low Energy; BDR: Basic Data Rate; EDR: Enhanced Data Rate; n/a: not applied.
- *. The EUT do not use the special transmitting technique such as "beam-forming" and "time-space code diversity."
- *. Since Wi-Fi and Bluetooth are used a same antenna, Wi-Fi and Bluetooth do not transmit simultaneously.

SECTION 3: Test specification, procedures and results

3.1 Test specification

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. The device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling in accordance with the following measurement procedures.

KDB 447498 D01 (v06): General RF exposure guidance
KDB 248227 D01 (v02r02): SAR Guidance for IEEE 802.11 (Wi-Fi) transmitters
KDB 865664 D01 (v01r04): SAR measurement 100MHz to 6GHz
IEEE Std. 1528-2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

3.2 Exposure limit

Environments of exposure limit	Whole-Body (averaged over the entire body)	Partial-Body (averaged over any 1g of tissue)	Hands, Wrists, Feet and Ankles (averaged over any 10g of tissue)
(A) Limits for Occupational /Controlled Exposure (W/kg)	0.4	8.0	20.0
(B) Limits for General population /Uncontrolled Exposure (W/kg)	0.08	1.6	4.0

- *. **Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).
*. **General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

The limit applied in this test report is;

<p>General population / uncontrolled exposure, Extremity (averaged over any 10g of tissue) limit: 4 W/kg (Wrist) General population / uncontrolled exposure, Partial-Body (averaged over any 1g of tissue) limit: 1.6 W/kg (Next-to-Mouth)</p>

- *. The platform (smart watch) which has EUT built-in is a wristwatch and the voice command is supported.

3.3 Procedures and Results

Test Procedure	Wi-Fi (DTS)	
	Category	SAR measurement; KDB 447498, KDB 248227, KDB 865664, IEEE Std.1528
RF Exposure condition	FCC 47CFR §2.1093 (Portable device)	
Limit	Extremity (Wrist) 4 W/kg (SAR(10g))	Partial-body (Next-to-Mouth) 1.6 W/kg (SAR(1g))
Results	Complied	Complied
Reported SAR value (*, Scaled)	0.166 W/kg	0.041 W/kg
Measured SAR value	0.122 W/kg	0.030 W/kg
Operation mode, channel	11b (1Mbps, DSSS), 2412 MHz (6ch)	11b (1Mbps, DSSS), 2462 MHz (11ch)
Duty cycle (duty cycle factor)	99.0 % (×1.01)	99.0 % (×1.01)
Power measured/max. (scaled factor)	17.19 dBm / 18.5 dBm (×1.35)	17.22 dBm / 18.5 dBm (×1.34)

Note: UL Japan's SAR Work Procedures No.13-EM-W0429 and 13-EM-W0430. No addition, deviation nor exclusion has been made from standards

- *. b: IEEE 802.11b, n/a: not applied.
*. Since Bluetooth and Wi-Fi are used a same antenna, Bluetooth and Wi-Fi do not transmit simultaneously.
*. (Calculating formula) (Reported SAR value) Corrected SAR to max.power (W/kg) = (Measured SAR (W/kg)) × (Duty scaled) × (Tune-up factor)
where; Tune-up factor [-] = 1 / (10 ^ ("Δmax (max.power - burst average power), dB" / 10)), Duty scaled factor [-] = 100(%) / (duty cycle, %)

3.4 Test Location

UL Japan, Inc., Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN
Telephone number: +81 463 50 6400 / Facsimile number: +81 463 50 6401
JAB Accreditation No. RTL02610
FCC Test Firm Registration Number: 839876

Used?	Place	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m)/ horizontal conducting plane	Maximum measurement distance
<input type="checkbox"/>	No.1 Semi-anechoic chamber	2973D-1	20.6 × 11.3 × 7.65	20.6 × 11.3	10 m
<input type="checkbox"/>	No.2 Semi-anechoic chamber	2973D-2	20.6 × 11.3 × 7.65	20.6 × 11.3	10 m
<input type="checkbox"/>	No.3 Semi-anechoic chamber	2973D-3	12.7 × 7.7 × 5.35	12.7 × 7.7	5 m
<input type="checkbox"/>	No.4 Semi-anechoic chamber	-	8.1 × 5.1 × 3.55	8.1 × 5.1	-
<input type="checkbox"/>	No.1 Shielded room	-	6.8 × 4.1 × 2.7	6.8 × 4.1	-
<input type="checkbox"/>	No.2 Shielded room	-	6.8 × 4.1 × 2.7	6.8 × 4.1	-
<input type="checkbox"/>	No.3 Shielded room	-	6.3 × 4.7 × 2.7	6.3 × 4.7	-
<input type="checkbox"/>	No.4 Shielded room	-	4.4 × 4.7 × 2.7	4.4 × 4.7	-
<input type="checkbox"/>	No.5 Shielded room	-	7.8 × 6.4 × 2.7	7.8 × 6.4	-
<input type="checkbox"/>	No.6 Shielded room	-	7.8 × 6.4 × 2.7	7.8 × 6.4	-
<input checked="" type="checkbox"/>	No.7 Shielded room	2973D-4	2.76 × 3.76 × 2.4	2.76 × 3.76	-
<input type="checkbox"/>	No.8 Shielded room	-	3.45 × 5.5 × 2.4	3.45 × 5.5	-
<input type="checkbox"/>	No.1 Measurement room	-	2.55 × 4.1 × 2.5	2.55 × 4.1	-

3.5 Confirmation before SAR testing

Before SAR test, the RF wiring for the sample had been switched to the antenna conducted power measurement line from the antenna line and the average power was measured. The result is shown in Section 6.

*. The platform transmission power was verified that it was within 2dB lower than the maximum tune-up tolerance limit when it was set the rated power. (Clause 4.1, KDB447498 D01 (v06))

Step.1 Data rate check (*. The power measurement was applied to the following data rate in each operation mode.)

b		g				n20 (SS×1)						Bluetooth			
Modulation	Data rate	Modulation	Data rate	Modulation	Data rate	MCS Index	Data rate	Modulation	MCS Index	Data rate	Modulation	Type	Modulation	Packet type	Data rate
DBPSK/DSSS	1	BPSK/OFDM	6	16QAM/OFDM	24	0	6.5	BPSK/OFDM	4	39	16QAM/OFDM	BLE	GFSK/FHSS	-	1
DQPSK/DSSS	2	BPSK/OFDM	9	16QAM/OFDM	36	1	13	QPSK/OFDM	5	52	64QAM/OFDM	BDR	GFSK/FHSS	DH5	1
CCK/DSSS	5.5	QPSK/OFDM	12	64QAM/OFDM	48	2	19.5	QPSK/OFDM	6	58.5	64QAM/OFDM	EDR2	$\pi/4$ -DQPSK/FHSS	2DH	2
CCK/DSSS	11	QPSK/OFDM	18	64QAM/OFDM	54	3	26	16QAM/OFDM	7	65	64QAM/OFDM	EDR3	8DPSK/FSSS	3DH5	3

*. Data rate: [Mbps]; SS: Spatial Stream; b: IEEE 802.11b, g: IEEE 802.11g, n20: IEEE 802.11n(20HT); BLE: Bluetooth Low Energy; BDR: Basic Data Rate; EDR: Enhanced Data Rate.

Step.2 Consideration of SAR test channel

For the SAR test reference, on each operation band, the average output power was measured on the low/middle/upper and specified channels with the worst data rate condition in step 1 in the above.

3.6 Confirmation after SAR testing

It was checked that the power drift [W] is within $\pm 5\%$ in the evaluation procedure of SAR testing. The verification of power drift during the SAR test is that DASY5 system calculates the power drift by measuring the e-filed at the same location at beginning and the end of the scan measurement for each test position.

The result is shown in APPENDIX 2.

*. DASY5 system calculation Power drift value[dB] = $20\log(E_a)/(E_b)$ (where, Before SAR testing: $E_b[V/m]$ / After SAR testing: $E_a[V/m]$)

Limit of power drift[W] = $\pm 5\%$

Power drift limit (X) [dB] = $10\log(P_drift) = 10\log(1.05/1) = 10\log(1.05) - 10\log(1) = 0.21\text{dB}$
from E-filed relations with power.

$S = E \times H = E^2 / \eta = P / (4 \times \pi \times r^2)$ (η : Space impedance) $\rightarrow P = (E^2 \times 4 \times \pi \times r^2) / \eta$

Therefore, The correlation of power and the E-filed

Power drift limit (X) dB = $10\log(P_drift) = 10\log(E_drift)^2 = 20\log(E_drift)$

From the above mentioned, **the calculated power drift of DASY5 system must be the less than $\pm 0.21\text{dB}$.**

3.7 Test setup of EUT and SAR measurement procedure

Antenna separation distances in each test setup plan are shown as follows.

Setup plan	Explanation of SAR test setup plan (* Refer to Appendix 1 for test setup photographs which had been tested.)	Mode	Wi-Fi		Bluetooth		SAR type (*1, *2)
		D [mm]	SAR Tested /Reduced (*1, *2)	D [mm]	SAR Tested /Reduced (*1, *2)		
Back	When test is required, the back flat-surface of smart watch is touched to the Flat phantom.	2.65	Tested	2.65	Tested	Wrist-touch	
Front	When test is required, the front surface of smart watch is set parallel to the Flat phantom with 10mm separation gap.	8.05	Tested	8.05	Tested	Next-to-Mouth	
Bezel-left	When test is required, the left side of bezel of smart watch is touched to the Flat phantom.	≈10	Reduced	≈10	Reduced	Not applied	
Near side	When test is required, the near side of bezel of smart watch is touched to the Flat phantom.	≈13	Reduced	≈13	Reduced		
Far side	When test is required, the far side of bezel of smart watch is touched to the Flat phantom.	≈34	Reduced	≈34	Reduced		
Bezel-right	When test is required, the right side of bezel of smart watch is touched to the Flat phantom.	≈39	Reduced	≈39	Reduced		

- *. D: Antenna separation distance. It is the distance from the EUT antenna inside a platform to the outer surface of platform which an operator may touch.
- *. Size of EUT (WSD-F30): round shape, 55 mm (length) × 61 mm (width) × 16 mm (thickness) (* excluding wrist band).

***. Consideration for SAR evaluation exemption**

***1. The platform (smart watch) which has EUT built-in is a wristwatch and the voice command is supported.**

According to KDB447498 D01 (v06), Clause 6.2. Wrist watch and wrist-worn transmitters;

Transmitters that are built-in within a wrist watch or similar wrist-worn devices typically operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. Next to the mouth exposure requires 1-g SAR and the wrist-worn condition requires 10-g extremity SAR. The 10-g extremity and 1-g SAR test exclusions may be applied to the wrist and face exposure conditions. When SAR evaluation is required, next to the mouth use is evaluated with the front of the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The wrist bands should be strapped together to represent normal use conditions. SAR for wrist exposure is evaluated with the back of the device positioned in direct contact against a flat phantom filled with body tissue-equivalent medium. The wrist bands should be unstrapped and touching the phantom. The space introduced by the watch or wrist bands and the phantom must be representative of actual use conditions; otherwise, if applicable, the neck or a curved head region of the SAM phantom may be used, provided the device positioning and SAR probe access issues have been addressed through a KDB inquiry. When other device positioning and SAR measurement considerations are necessary, a KDB inquiry is also required for the test results to be acceptable; for example, devices with rigid wrist bands or electronic circuitry and/or antenna(s) incorporated in the wrist bands. These test configurations are applicable only to devices that are worn on the wrist and cannot support other use conditions; therefore, the operating restrictions must be fully demonstrated in both the test reports and user manuals.

***2. SAR test exclusion considerations according to KDB447498 D01**

Step 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min.test separation distance, mm})] \times [\sqrt{f}(\text{GHz})] \leq 3.0 \text{ (for SAR(1g)), 7.5 (for SAR(10g))} \dots \text{formula (1)}$$

If power is calculated from the upper formula (1);

$$[\text{SAR(1g) test exclusion thresholds, mW}] = 3 \times [\text{test separation distance, mm}] / [\sqrt{f}(\text{GHz})] \dots \text{formula (2)}$$

1. The upper frequency of the frequency band was used in order to calculate standalone SAR test exclusion considerations.
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison
4. The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the calculated threshold value by a numerical formula above-mentioned in the following table is 3.0 or less, SAR test can be excluded.

[SAR exclusion calculations for step 1) antenna ≤ 50mm from the user]

Antenna	Tx mode	Upper Freq. [MHz]	Maximum output power		Step 1) SAR exclusion calculations for antenna ≤ 50mm from the user.						
					Calculated threshold value						
					Setup D[mm]	Back ≤ 5 (2.65)	Front 8	Bezel-right ≈10	Near-side ≈13	Far-side ≈34	Bezel-right ≈39
Main	b	2462	18.5	71	Judge	22, Measure	14, Measure	Reduce, KDB 447498 D01, Clause 6.2			
Main	g	2462	15.0	32	Judge	10, Measure	6.3, Measure	Reduce, KDB 447498 D01, Clause 6.2			
Main	n20	2462	14.0	25	Judge	7.8, Measure	4.9, Measure	Reduce, KDB 447498 D01, Clause 6.2			
Main	BDR	2480	11.5	14	Judge	4.4, Measure	2.8, Reduce	Reduce, KDB 447498 D01, Clause 6.2			
Main	BLE	2480	9.0	8	Judge	2.5, Reduce	1.6, Reduce	Reduce, KDB 447498 D01, Clause 6.2			
Main	EDR	2480	8.0	6	Judge	1.9, Reduce	1.2, Reduce	Reduce, KDB 447498 D01, Clause 6.2			

- *. Freq: Frequency, D: Antenna separation distance, b: IEEE 802.11b, g: IEEE 802.11g, n20: IEEE 802.11n(20HT); BLE: Bluetooth Low Energy; BDR: Basic Data Rate; EDR: Enhanced Data Rate.

<Conclusion for consideration for SAR test reduction>

- 1) EUT is a wristwatch with the watch-wristband which can't be removed easily. EUT is usually worn on the wrist. Since EUT has sound responsive function, EUT is used in front of the mouth when a voice input is operated.
- 2) So, the "Back" setup is considered extremity (wrist) SAR (touch) and is applied the SAR test in body-liquid.
- 3) So, the "Front" setup is considered partial body SAR (next-to-mouth, 10 mm separation gap) and is applied the SAR test in head-liquid.

By the determined test setup shown above, the SAR test was applied in the following procedures.

Step 1	Worst extremity SAR(10g) (wrist) search of DSSS mode; Determine the highest reported SAR(10g) of DSSS mode. (* Change the channel and mode, if it is necessary.)
Step 2	Worst partial body SAR(1g) (next-to-mouth) search of DSSS mode; Determine the highest reported SAR(1g) of DSSS mode. (* Change the channel and mode, if it is necessary.)

- *. During SAR test, the radiated power is always monitored by Spectrum Analyzer.

SECTION 4: Operation of EUT during testing

4.1 Operating modes for SAR testing

This EUT has IEEE.802.11b, 11g and 11n(20HT) and Bluetooth (BDR/EDR/BLE) continuous transmitting modes. The frequency and the modulation used in the SAR testing are shown as a following.

Operation mode		BDR	EDR		BLE	b	g	n20
Tx frequency band		2402-2480MHz			2412-2462MHz			
Maximum power [dBm]		11.5	8.0	8.0	9.0	18.5	15.0	14.0
		(*. lower power than BDR.)				(*. lower power than 11b mode)		
SAR tested condition	Frequency [MHz]	2441	n/a (lower power)			2412, 2437, 2462	2412, 2437	2412, 2437
	Modulation	GFSK	GFSK+ $\pi/4$ -DQPSK	GFSK+8DPSK	GFSK	DSSS	OFDM	OFDM
	Data rate [Mbps]	1	2	3	1	1	6	6.5(MCS0)
SAR tested/reduced?		Tested	Reduced	Reduced	Reduced	Tested	Tested	Tested
Controlled software		WSD-F30-radio ver1.0 *. This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.						
Power setting	Power measurement	fix	fix	fix	fix	fix	fix	fix
	SAR	fix	n/a	n/a	n/a	fix	fix	fix

- *. b: IEEE 802.11b, g: IEEE 802.11g, n20: IEEE 802.11n(20HT); BLE: Bluetooth Low Energy; BDR: Basic Data Rate; EDR: Enhanced Data Rate; n/a: not applied.
- *. Any output power reducing for channel 1 and 11 to meet restricted band requirements was not observed.
- *. (KDB248227 D01 (v02r02)) Since the reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, the SAR testing for other channels were omitted. However, the SAR testing was applied to lower, middle and upper channels for the worst SAR condition.

SECTION 5: Uncertainty Assessment (SAR measurement)

Uncertainty of SAR measurement (2.4-6GHz) (*. ϵ & σ : $\leq \pm 5\%$, DAK3.5, Tx: $\approx 100\%$ duty cycle) (v08)							1g SAR	10g SAR	
Combined measurement uncertainty of the measurement system (k=1)							$\pm 13.7\%$	$\pm 13.6\%$	
Expanded uncertainty (k=2)							$\pm 27.4\%$	$\pm 27.2\%$	
	Error Description (2.4-6GHz) (v08)	Uncertainty Value	Probability distribution	Divisor	ci (1g)	ci (10g)	ui (1g) (std. uncertainty)	ui (10g) (std. uncertainty)	V _i , v _{eff}
A	Measurement System (DASY5)						(std. uncertainty)	(std. uncertainty)	
1	Probe Calibration Error	$\pm 6.55\%$	Normal	1	1	1	$\pm 6.55\%$	$\pm 6.55\%$	∞
2	Axial isotropy Error	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	$\pm 1.9\%$	$\pm 1.9\%$	∞
3	Hemispherical isotropy Error	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	$\pm 3.9\%$	$\pm 3.9\%$	∞
4	Linearity Error	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
5	Probe modulation response	$\pm 2.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.4\%$	$\pm 1.4\%$	∞
6	Sensitivity Error (detection limit)	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
7	Boundary effects Error	$\pm 4.3\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.5\%$	$\pm 2.5\%$	∞
8	Readout Electronics Error(DAE)	$\pm 0.3\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
9	Response Time Error	$\pm 0.8\%$	Normal	1	1	1	$\pm 0.8\%$	$\pm 0.8\%$	∞
10	Integration Time Error ($\approx 100\%$ duty cycle)	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	0%	0%	∞
11	RF ambient conditions-noise	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
12	RF ambient conditions-reflections	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
13	Probe positioner mechanical tolerance	$\pm 3.3\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.9\%$	$\pm 1.9\%$	∞
14	Probe Positioning with respect to phantom shell	$\pm 6.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	∞
15	Max. SAR evaluation (Post-processing)	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
B	Test Sample Related								
16	Device Holder or Positioner Tolerance	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
17	Test Sample Positioning Error	$\pm 5.0\%$	Normal	1	1	1	$\pm 5.0\%$	$\pm 5.0\%$	145
18	Power scaling	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
19	Drift of output power (measured, < 0.2 dB)	$\pm 2.3\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
C	Phantom and Setup								
20	Phantom uncertainty (shape, thickness tolerances)	$\pm 7.5\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 4.3\%$	$\pm 4.3\%$	∞
21	Algorithm for correcting SAR (ϵ , σ : $\leq 5\%$)	$\pm 1.2\%$	Normal	1	1	0.84	$\pm 1.2\%$	$\pm 0.97\%$	∞
22	Measurement Liquid Conductivity Error (DAK3.5)	$\pm 3.0\%$	Normal	1	0.78	0.71	$\pm 2.3\%$	$\pm 2.1\%$	7
23	Measurement Liquid Permittivity Error (DAK3.5)	$\pm 3.1\%$	Normal	1	0.23	0.26	$\pm 0.7\%$	$\pm 0.8\%$	7
24	Liquid Conductivity-temp.uncertainty (≤ 2 deg.C.)	$\pm 5.3\%$	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 2.4\%$	$\pm 2.2\%$	∞
25	Liquid Permittivity-temp.uncertainty (≤ 2 deg.C.)	$\pm 0.9\%$	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.1\%$	$\pm 0.1\%$	∞
	Combined Standard Uncertainty						$\pm 13.7\%$	$\pm 13.6\%$	733
	Expanded Uncertainty (k=2)						$\pm 27.4\%$	$\pm 27.2\%$	

- *. Table of uncertainties are listed for ISO/IEC 17025.
- *. This measurement uncertainty budget is suggested by IEEE Std.1528(2013) and determined by Schmid & Partner Engineering AG (DASY5 Uncertainty Budget). Per KDB 865664 D01 (v01r04) SAR Measurement 100 MHz to 6 GHz, Section 2.8.1., when the highest measured SAR(1g) within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std.1528 (2013) is not required in SAR reports submitted for equipment approval.


SECTION 6: Confirmation before testing

6.1 SAR reference power measurement (antenna terminal conducted average power of EUT) - Worst data rate/channel determination

Mode	Frequency		Data rate	Power Setting (software)	Duty cycle	Duty factor	Duty scaled factor	Measurement Result				Power correction			Was power tuning applied?	Remarks *. Antenna gain (peak): -6.81 dBi
	[MHz]	CH	[Mbps]	[-]	[%]	[dB]	[-]	Time average power		Burst power		Max. power	Δ from max.	Tune-up factor		
BDR	2402	0	1(DH5)	fix	78.1	1.07	×1.28	8.81	7.60	9.88	9.73	11.5	-1.62	×1.45	n/a (fix)	
	2441	39	1(DH5)	fix	78.1	1.07	×1.28	8.78	7.55	9.85	9.66	11.5	-1.65	×1.46	n/a (fix)	
	2480	78	1(DH5)	fix	78.1	1.07	×1.28	8.67	7.36	9.74	9.42	11.5	-1.76	×1.50	n/a (fix)	
EDR	2402	0	2(2DH5)	fix	78.3	1.06	×1.28	5.17	3.29	6.23	4.20	8.0	-1.77	×1.50	n/a (fix)	
	2441	39	2(2DH5)	fix	78.3	1.06	×1.28	5.26	3.36	6.32	4.29	8.0	-1.68	×1.47	n/a (fix)	
	2480	78	2(2DH5)	fix	78.3	1.06	×1.28	6.01	3.99	7.07	5.09	8.0	-0.93	×1.24	n/a (fix)	
EDR	2402	0	3(3DH5)	fix	78.3	1.06	×1.28	5.16	3.28	6.22	4.19	8.0	-1.78	×1.51	n/a (fix)	
	2441	39	3(3DH5)	fix	78.3	1.06	×1.28	5.25	3.35	6.31	4.28	8.0	-1.69	×1.48	n/a (fix)	
	2480	78	3(3DH5)	fix	78.3	1.06	×1.28	6.01	3.99	7.07	5.09	8.0	-0.93	×1.24	n/a (fix)	
BLE	2402	0	1	fix	60.8	2.16	×1.64	5.52	3.56	7.68	5.86	9.0	-1.32	×1.36	n/a (fix)	
	2440	19	1	fix	60.8	2.16	×1.64	5.56	3.60	7.72	5.92	9.0	-1.28	×1.34	n/a (fix)	
	2480	39	1	fix	60.8	2.16	×1.64	5.78	3.78	7.94	6.22	9.0	-1.06	×1.28	n/a (fix)	
b	2412	1	1	fix	99.0	0.04	×1.01	17.15	51.88	17.19	52.36	18.5	-1.31	×1.35	n/a (fix)	
	2437	6	1	fix	99.0	0.04	×1.01	17.29	53.58	17.33	54.08	18.5	-1.17	×1.31	n/a (fix)	
	2462	11	1	fix	99.0	0.04	×1.01	17.18	52.24	17.22	52.72	18.5	-1.28	×1.34	n/a (fix)	
g	2412	1	6	fix	93.7	0.28	×1.07	13.21	20.94	13.49	22.34	15.0	-1.51	×1.42	n/a (fix)	
	2437	6	6	fix	93.7	0.28	×1.07	13.37	21.73	13.65	23.17	15.0	-1.35	×1.36	n/a (fix)	
	2462	11	6	fix	93.7	0.28	×1.07	13.50	22.39	13.78	23.88	15.0	-1.22	×1.32	n/a (fix)	
n20	2412	1	MCS0	fix	93.4	0.30	×1.07	11.86	15.35	12.16	16.44	14.0	-1.84	×1.53	n/a (fix)	
	2437	6	MCS0	fix	93.4	0.30	×1.07	12.05	16.03	12.35	17.18	14.0	-1.65	×1.46	n/a (fix)	
	2462	11	MCS0	fix	93.4	0.30	×1.07	11.92	15.56	12.22	16.67	14.0	-1.78	×1.51	n/a (fix)	

- *. []: SAR test was applied.; *. **xx.xx** highlight is shown the maximum measured output power in each mode.; CH: channel, max: maximum, n/a: not applied.
- *. The SAR test power was not more than 2dB lower than maximum tune-up power by the default power setting, (KDB 447498 D01 (v06) requirement).
- *. b: IEEE 802.11b, g: IEEE 802.11g, n20: IEEE 802.11n(20HT); BLE: Bluetooth Low Energy; BDR: Basic Data Rate; EDR: Enhanced Data Rate; n/a: not applied.
- *. For Wi-Fi mode, the lowest data rate (lowest modulation) mode was selected for the SAR test which had the highest time-based measured average power.
- *. The measured duty cycle number of BDR/EDR/BLE was nearly equal to highest theory duty cycle.
- *. Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in following tables.

Data rate (D/R, [Mbps]) vs Time average power (dBm)																			
11b (2412MHz)				11g (2412MHz)				11n(20HT) (2412MHz)											
D/R	Duty cycle (%)	Duty factor (dB)	Power	D/R	Duty cycle (%)	Duty factor (dB)	Power	D/R	Duty cycle (%)	Duty factor (dB)	Power	D/R	Duty cycle (%)	Duty factor (dB)	Power	D/R	Duty cycle (%)	Duty factor (dB)	Power
1	99.0	0.04	17.15	6	93.7	0.28	13.21	24	79.4	1.00	12.47	MCS0	93.4	0.30	11.86	MCS4	72.8	1.38	10.57
2	98.0	0.09	17.14	9	90.9	0.41	13.13	36	72.9	1.37	12.12	MCS1	87.7	0.57	11.58	MCS5	67.6	1.70	10.32
5.5	94.9	0.23	17.08	12	88.3	0.54	12.85	48	67.1	1.73	11.59	MCS2	83.2	0.80	11.21	MCS6	65.6	1.83	10.10
11	90.8	0.42	16.70	18	83.6	0.78	12.64	56	65.3	1.85	11.49	MCS3	79.1	1.02	11.04	MCS7	63.8	1.95	9.98

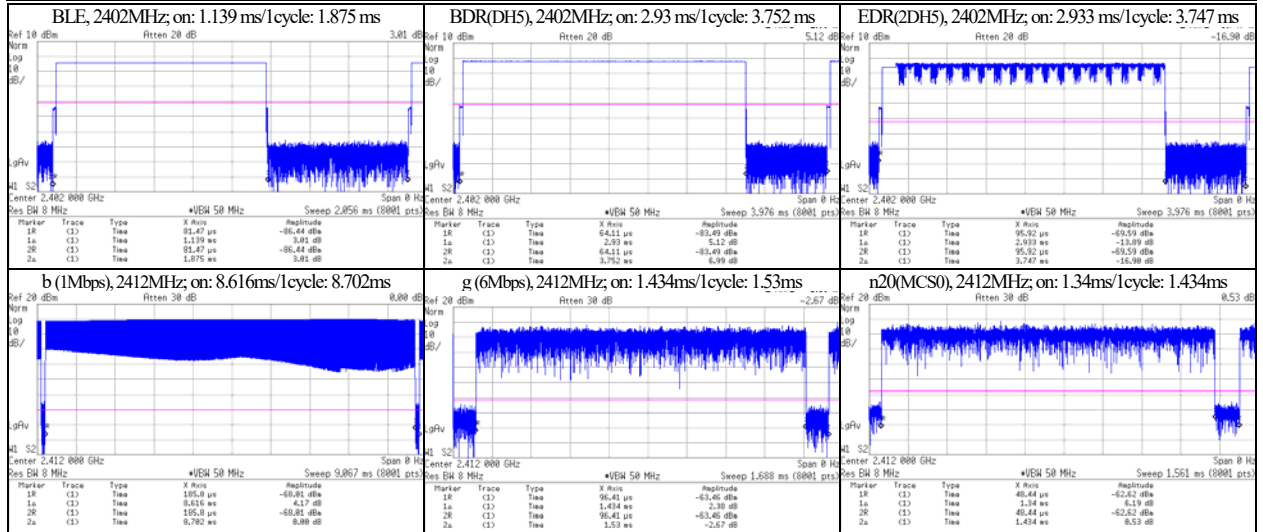

- *. Calculating formula: Result-Time average power (dBm) = (P/M Reading, dBm) + (Cable loss, dB) + (Attenuator, dB)
 Result-Burst power (dBm) (*. equal to 100% duty cycle) = (P/M Reading, dBm) + (Cable loss, dB) + (Attenuator, dB) + (duty factor, dB)
 Duty factor (dBm) = 10 × log (100/(duty cycle, %))
 Δ from max. (dB) = (Results-Burst power (average, dBm)) - (Max.-specification output power (average, dBm))
 Duty scaled factor (Duty cycle correction factor for obtained SAR value) (unit: -) = 100% / (duty cycle, %)
 Tune-up factor (Power tune-up factor for obtained SAR value) (unit: -) = 1 / (10 ^ ("Deviation from max. dB" / 10))
- *. Date measured: July 10, 2018 / Measured by: Hiroshi Naka / Place: preparation room of No. 7 shielded room. (25 deg.C. / 50 gRH)
- *. Uncertainty of antenna port conducted test; Power measurement uncertainty above 1GHz for this test was: (±) 0.48 dB(Average)/(±) 0.66 dB(Peak).
- *. Uncertainty of antenna port conducted test; Duty cycle and time measurement: (±) 0.012 %.

6.2 Comparison of power of EMC sample

	Platform model No.	RF serial No.	Date power measured	Reference report#	Tx mode	Data rate [Mbps]	Average power (burst) [dBm] (**): Highest			
							Max. power	Frequency [MHz]		
								2412	2437	2462
EMC (Ref.)	WSD-F30	8	June 22, 2018	12432580S-A	11b	1	18.5	17.01*	16.97	16.91
SAR test	WSD-F30	10	July 10, 2018	*.This report	11b	1	18.5	17.19	17.33*	17.22

*. The power data above-mentioned diverted a result of measurement of EMC test of report identifier: 12432580S-A tested and published by UL Japan, Inc..

SECTION 7: Measured and reported (scaled) SAR results

Tested date: August 30 and 31, 2018

Tested by: Hiroshi Naka

[Liquid measurement]

Target Frequency [MHz]	Liquid type	Liquid parameters (*a)						ASAR Coefficients(*c)			Date measured			
		Permittivity (εr) [-]			Conductivity [S/m]			Temp. [deg.C]	Depth [mm]	ΔSAR [%]		Correction required?		
		Target	Measured	Limit (*b)	Target	Measured	Limit (*b)							
2412	Body	52.75	50.83	-3.6	1.914	1.928	+0.7	22.4	151	+0.77	10g	not required.	August 30, 2018 before SAR test	
2437		52.72	50.72	-3.8	1.938	1.966	+1.5			0% ≤ σ-meas. ≤ +5%	+0.98	10g		not required.
2441		52.71	50.71	-3.8	1.941	1.972	+1.6				+1.01	10g		not required.
2462		52.68	50.65	-3.9	1.967	2.003	+1.8				+1.09	10g		not required.
2412	Head	39.27	38.33	-2.4	1.766	1.803	+2.1	24.1	152	+1.56	1g	not required.	August 31, 2018 before SAR test	
2437		39.22	38.23	-2.5	1.788	1.829	+2.3			0% ≤ σ-meas. ≤ +5%	+1.67	1g		not required.
2441		39.22	38.21	-2.6	1.792	1.836	+2.5				+1.77	1g		not required.
2462		39.18	38.11	-2.8	1.813	1.858	+2.5				+1.81	1g		not required.

[Measured and Reported (Scaled) SAR results]

SAR measurement results											Reported SAR [W/kg]					Limit [W/kg]	Remarks	
Mode	Frequency [MHz] (Channel)	Data rate [Mbps]	EUT setup			SAR [W/kg]			SAR plot # in Appendix 2-2	Duty cycle correction		Output burst average power correction			SAR Corrected (*d)			
			Position	Source power	Gap [mm]	Type	Meas.	ASAR [%]		ASAR corrected	Duty [%]	Duty scaled	Meas. [dBm]	Max. [dBm]				Tune-up factor
Step 1: Worst extremity SAR(10g) (wrist) in Body liquid																		
11b	2437(6)	1	Back	Battery	0	10g	0.104	+0.98	n/a (*c)	Plot 1-2	99.0	×1.01	17.33	18.5	×1.31	0.138	4	-
11b	2412(1)	1	Back	Battery	0	10g	0.122	+0.77	n/a (*c)	Plot 1-1	99.0	×1.01	17.19	18.5	×1.35	0.166	4	Higher
11b	2462(11)	1	Back	Battery	0	10g	0.104	+1.09	n/a (*c)	Plot 1-3	99.0	×1.01	17.22	18.5	×1.34	0.141	4	-
11g	2412(1)	6	Back	Battery	0	10g	0.048	+0.77	n/a (*c)	Plot 1-4	93.7	×1.07	13.49	15.0	×1.42	0.073	4	-
n20	2412(1)	MCS0	Back	Battery	0	10g	0.037	+0.77	n/a (*c)	Plot 1-5	93.4	×1.07	12.16	14.0	×1.53	0.061	4	-
BDR	2441	1	Back	Battery	0	10g	0.022	+1.01	n/a (*c)	Plot 1-6	78.1	×1.28	9.85	11.5	×1.46	0.041	4	-
Step 2: Worst partial body SAR(1g) (next-to-mouth) in Head liquid																		
11b	2437(6)	1	Front	Battery	10	1g	0.028	+1.67	n/a (*c)	Plot 2-2	99.0	×1.01	17.33	18.5	×1.31	0.037	1.6	-
11b	2412(1)	1	Front	Battery	10	1g	0.024	+1.56	n/a (*c)	Plot 2-3	99.0	×1.01	17.19	18.5	×1.35	0.033	1.6	-
11b	2462(11)	1	Front	Battery	10	1g	0.030	+1.81	n/a (*c)	Plot 2-1	99.0	×1.01	17.22	18.5	×1.34	0.041	1.6	Higher
11g	2437(6)	6	Front	Battery	10	1g	0.011	+1.67	n/a (*c)	Plot 2-4	93.7	×1.07	13.65	15.0	×1.38	0.016	1.6	-
n20	2437(6)	MCS0	Front	Battery	10	1g	0.00747	+1.64	n/a (*c)	Plot 2-5	93.4	×1.07	12.35	14.0	×1.36	0.011	1.6	-
BDR	2441	1	Front	Battery	10	1g	0.00282	+1.77	n/a (*c)	Plot 2-6	78.1	×1.28	9.85	11.5	×1.46	0.005	1.6	-

Notes: * Gap: It is the separation distance between the outer surface of product and the bottom outer surface of phantom; Max.: Maximum; Meas.: Measured value; n/a: not applied; b: IEEE 802.11b, g: IEEE 802.11g, n20: IEEE 802.11n(20HT); BDR: Basic Data Rate; n/a: not applied.

* During test, the EUT was operated by build-in rechargeable Li-ion battery.

* Calibration frequency of the SAR measurement probe (and used conversion factors)

Liquid	SAR test frequency	Probe calibration frequency	Validity	Conversion factor	Uncertainty
Body	2412, 2437, 2441, 2462 MHz	2450MHz	within ±50MHz of calibration frequency	7.32	±12.0%
Head	2412, 2437, 2441, 2462 MHz	2450MHz	within ±50MHz of calibration frequency	7.31	±12.0%

* The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

*a. The target value is a parameter defined in Appendix A of KDB 865664 D01 (v01r04), the dielectric parameters suggested are given at 2000, 2450, 3000MHz. Parameters for the frequencies between 2000 and 3000 MHz were obtained using linear interpolation.

*b. Calculating formula: $\Delta SAR(1g) = C_{\epsilon r} \times \Delta \epsilon r + C_{\sigma} \times \Delta \sigma$, $C_{\epsilon r} = 7.854E-4 \times \epsilon r^2 + 9.402E-3 \times \epsilon r - 2.742E-2 \times f + 0.2026$ / $C_{\sigma} = 9.804E-3 \times \epsilon r^2 - 8.661E-2 \times \epsilon r + 2.981E-2 \times f + 0.7829$

*c. Since the calculated ΔSAR values of the tested liquid had shown positive correction, the measured SAR was not converted by ΔSAR correction.

Calculating formula: $\Delta SAR \text{ corrected SAR (W/kg)} = (\text{Meas. SAR (W/kg)}) \times (100 - (\Delta SAR(\%)) / 100$

*d. Calculating formula: $\text{Reported SAR (W/kg)} = (\text{Measured SAR (W/kg)}) \times (\text{Duty scaled}) \times (\text{Tune-up factor})$
Duty scaled = Duty scaled factor: Duty cycle correction factor for obtained SAR value, Duty scaled factor [-] = 100(%) / (duty cycle, %)
Tune-up factor: Power tune-up factor for obtained SAR value, Tune-up factor [-] = $1 / (10^{(Deviation \text{ from max., dB} / 10)})$

(Clause 5.2, 2.4GHz SAR Procedures, in KDB248227 D01 (v02r02))

5.2.1 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

5.2.2 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg.