




# RADIO TEST REPORT


**Test Report No. : 13477241H-B-R1**

**Applicant** : CASIO COMPUTER CO., LTD  
**Type of EUT** : Wireless MIDI & audio adaptor  
**Model Number of EUT** : WU-BT10  
**FCC ID** : BBQWUBT10  
**Test regulation** : FCC Part 15 Subpart C: 2020  
\*Bluetooth (BR / EDR) part  
**Test Result** : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in Section 1.
10. This report is a revised version of 13477241H-B. 13477241H-B is replaced with this report.

**Date of test:** November 2 to 4, 2020

**Representative test engineer:**   
Yuta Moriya  
Engineer  
Consumer Technology Division

**Approved by:**   
Takumi Shimada  
Engineer  
Consumer Technology Division



CERTIFICATE 5107.02

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **REVISION HISTORY**

**Original Test Report No.: 13477241H-B**

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13477241H-B	November 25, 2020	-	-
1	13477241H-B-R1	January 20, 2021	P10	Added explanatory note: "Setting value might be different from product specification value"

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information.....</b>	<b>5</b>
<b>SECTION 2: Equipment under test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test specification, procedures &amp; results.....</b>	<b>6</b>
<b>SECTION 4: Operation of EUT during testing.....</b>	<b>10</b>
<b>SECTION 5: Conducted Emission.....</b>	<b>13</b>
<b>SECTION 6: Radiated Spurious Emission .....</b>	<b>14</b>
<b>SECTION 7: Antenna Terminal Conducted Tests.....</b>	<b>16</b>
<b>APPENDIX 1: Test data .....</b>	<b>17</b>
Conducted Emission .....	17
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation .....	21
Number of Hopping Frequency .....	25
Dwell time.....	27
Maximum Peak Output Power.....	30
Average Output Power.....	31
Radiated Spurious Emission .....	33
Conducted Spurious Emission .....	44
Conducted Emission Band Edge compliance .....	50
<b>APPENDIX 2: Test instruments .....</b>	<b>52</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>54</b>
Conducted Emission .....	54
Radiated Spurious Emission .....	55
Worst Case Position.....	56
Antenna Terminal Conducted Tests.....	57

## **SECTION 1: Customer information**

Company Name : CASIO COMPUTER CO., LTD  
Address : 2-1 Sakaecho 3-chome, Hamura-shi Tokyo 205-8555, Japan  
Telephone Number : +81-42-579-7282  
Facsimile Number : +81-42-579-7702  
Contact Person : Shuji Yamashita

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
  - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
  - SECTION 1: Customer information
  - SECTION 2: Equipment under test (EUT) other than the Receipt Date
  - SECTION 4: Operation of EUT during testing
- \* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (EUT)**

### **2.1 Identification of EUT**

Type : Wireless MIDI & audio adaptor  
Model Number : WU-BT10  
Serial Number : Refer to SECTION 4.2  
Rating : DC 5 V  
Receipt Date : October 16, 2020  
Country of Mass-production : China  
Condition : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification : No Modification by the test lab.

### **2.2 Product Description**

Model: WU-BT10 (referred to as the EUT in this report) is a Wireless MIDI & audio adaptor.

#### **General Specification**

Operating Temperature : -5 deg. C to +45 deg. C

#### **Radio Specification**

##### **Bluetooth (BR / EDR / Low Energy)**

Radio Type : Transceiver  
Frequency of Operation : 2402 MHz - 2480 MHz  
Modulation : BT: FHSS (GFSK,  $\pi/4$ DQPSK, 8DPSK)  
BT LE: GFSK  
Antenna type : PCB Pattern Antenna  
Antenna Gain : 1.51 dBi  
Clock frequency : 24 MHz

\*This test report applies to Bluetooth (BR / EDR) part.

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C  
FCC Part 15 final revised on October 13, 2020

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,  
and 5725-5850 MHz

\* Also the EUT complies with FCC Part 15 Subpart B.

### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst Margin	Results	Remarks	
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ----- ISED: RSS-Gen 8.8	FCC: Section 15.207 ----- ISED: RSS-Gen 8.8	10.65 dB 22.52821 MHz, AV, Phase: L	Complied a)	-	
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ----- ISED: RSS-247 5.1 (b)	See data.	Complied b)	Conducted	
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ----- ISED: RSS-247 5.1 (a)		Complied b)	Conducted	
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ----- ISED: RSS-247 5.1 (d)		Complied c)	Conducted	
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ----- ISED: RSS-247 5.1 (d)		Complied d)	Conducted	
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section15.247(a)(b)(1) ----- ISED: RSS-247 5.4 (b)		Complied e)	Conducted	
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section15.247(d) ----- ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10		4.1 dB 2483.500 MHz, AV, Horizontal	Complied# f) / g)	Conducted/ Radiated (above 30 MHz) *1)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) Radiated test was selected over 30 MHz based on section 15.247(d).

- a) Refer to APPENDIX 1 (data of Conducted Emission)
- b) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)
- c) Refer to APPENDIX 1 (data of Number of Hopping Frequency)
- d) Refer to APPENDIX 1 (data of Dwell time)
- e) Refer to APPENDIX 1 (data of Maximum Peak Output Power)
- f) Refer to APPENDIX 1 (data of Conducted Spurious Emission)
- g) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**FCC Part 15.31 (e)**

This EUT provides the stable voltage constantly to RF part regardless of input voltage. Therefore, this EUT complies with the requirement.

**FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**3.3 Addition to standard**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .  
Ise EMC Lab.

#### Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.4 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.6 dB

#### Conducted emission

using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.4 dB
	0.15 MHz to 30 MHz	2.9 dB

#### Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
10 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.8 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB
		5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB



### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

\*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 199967 / ISED Lab Company Number: 2973C

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 4: Operation of EUT during testing**

### **4.1 Operating Mode(s)**


Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

<b>Test Item</b>	<b>Mode</b>	<b>Tested frequency</b>
Conducted Emission, Spurious Emission (Conducted/Radiated)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx (Hopping On) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx (Hopping On) DH5, 3DH5	-
Dwell time	Tx (Hopping On), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5	-
Maximum Peak Output Power	Tx (Hopping Off) DH5, 2DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2441 MHz 2480 MHz
<p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)</p> <p>*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.</p> <p>* It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.</p> <p>*EUT has the power settings by the software as follows (Setting value might be different from product specification value);  Power settings: BR: 8 dBm  EDR: 5 dBm  Software: Airoha Tool Kit version 2.3.13  (Date: July 22, 2020, Storage location: EUT memory)</p> <p>*This setting of software is the worst case.  Any conditions under the normal use do not exceed the condition of setting.  In addition, end users cannot change the settings of the output power of the product.</p>		


## 4.2 Configuration and peripherals

### Antenna Terminal Conducted Tests

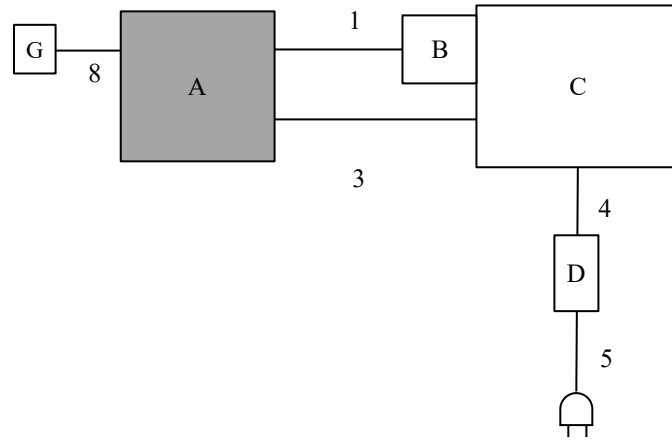


AC 120 V / 60 Hz

### Conducted Emission test

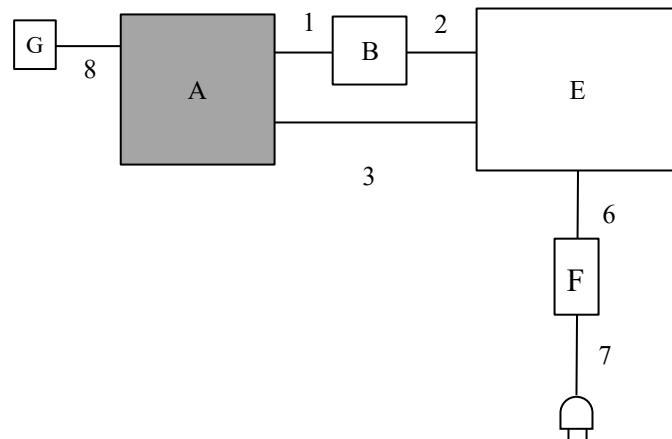

AC 120 V / 60 Hz

**Radiated Spurious Emission test**

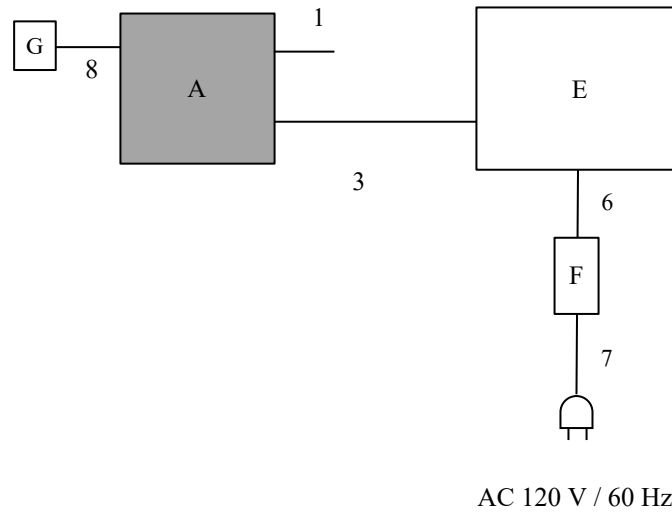

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

**Description of EUT and Support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Wireless MIDI & audio adaptor	WU-BT10	BT1AAC009000021VVV	CASIO COMPUTER CO., LTD	EUT
B	UART download board	C295	-	AIROHA	*1)
C	Laptop PC	X1 Carbon	R9-OH8OBW 15/9	Lenovo	-
D	AC Adapter	ADLX45NCC2A	45N0475	Lenovo	-
E	Laptop PC	PR734MAA447AD73	6G060524H	TOSHIBA	-
F	AC Adapter	PA3917U-1ACA	201140320519358	TOSHIBA	-
G	Switch	-	-	-	*1)

**List of cables used**

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Signal Cable	0.15	Unshielded	Unshielded	*1)
2	USB Cable	2.00	Shielded	Shielded	-
3	USB Cable	2.00	Shielded	Shielded	-
4	DC Cable	1.80	Unshielded	Unshielded	-
5	AC Cable	0.90	Unshielded	Unshielded	-
6	DC Cable	1.60	Unshielded	Unshielded	-
7	AC Cable	0.90	Unshielded	Unshielded	-
8	Signal Cable	0.10	Unshielded	Unshielded	*1)

\*1) These items do not influence on RF characteristic.

## **SECTION 5: Conducted Emission**

### **Test Procedure and conditions**

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

#### For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50 ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.


The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber. The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

<b>Detector</b>	<b>: QP and CISPR AV</b>
<b>Measurement range</b>	<b>: 0.15 MHz - 30 MHz</b>
<b>Test data</b>	<b>: APPENDIX</b>
<b>Test result</b>	<b>: Pass</b>

**Figure 1: Test Setup**

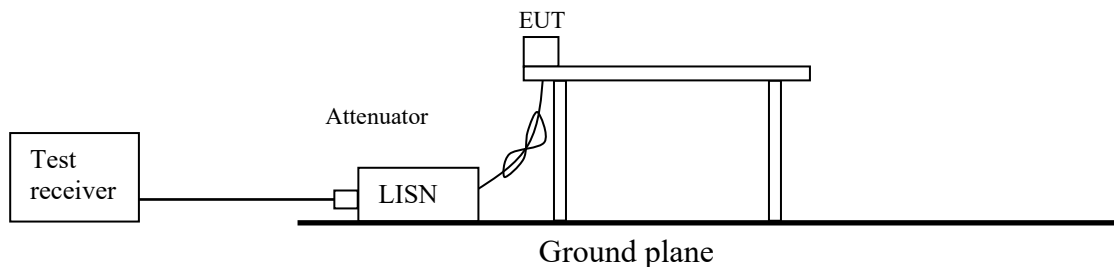

## **SECTION 6: Radiated Spurious Emission**

### **Test Procedure**

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

#### **Test Antennas are used as below;**

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


#### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

\*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

**Figure 2: Test Setup**


Below 1 GHz

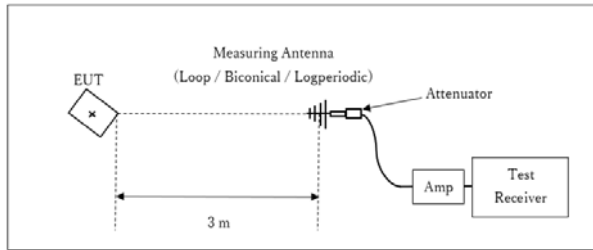

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

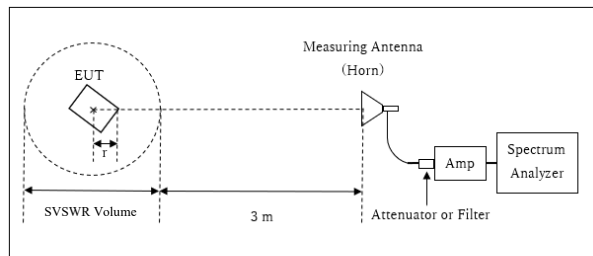


r : Radius of an outer periphery of EUT  
 × : Center of turn table

Distance Factor:  $20 \times \log(4.0 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$   
 \* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 4.0 \text{ m}$

SVSWR Volume : 2.0 m  
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
 r = 0.0 m

\* The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.

10 GHz - 26.5 GHz

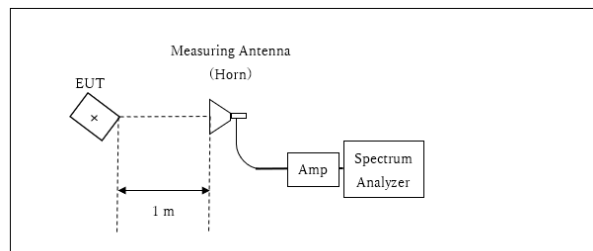

× : Center of turn table

Distance Factor:  $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$   
 \*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 MHz - 26.5 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 7: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	200 kHz	620 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	9.1 kHz	27 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

\*1) Peak hold was applied as Worst-case measurement.

\*2) Reference data

\*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.  
(9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz)

\*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

The equipment and cables were not used for factor 0 dB of the data sheets.

**Test data : APPENDIX**

**Test result : Pass**




**APPENDIX 1: Test data**

**Conducted Emission**

Report No. 13477241H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date November 4, 2020  
Temperature / Humidity 23 deg. C / 36 % RH  
Engineer Takeshi Hiyaji  
Mode Tx, Hopping Off, DH5 2402 MHz

Limit : FCC\_Part 15 Subpart C(15.207)

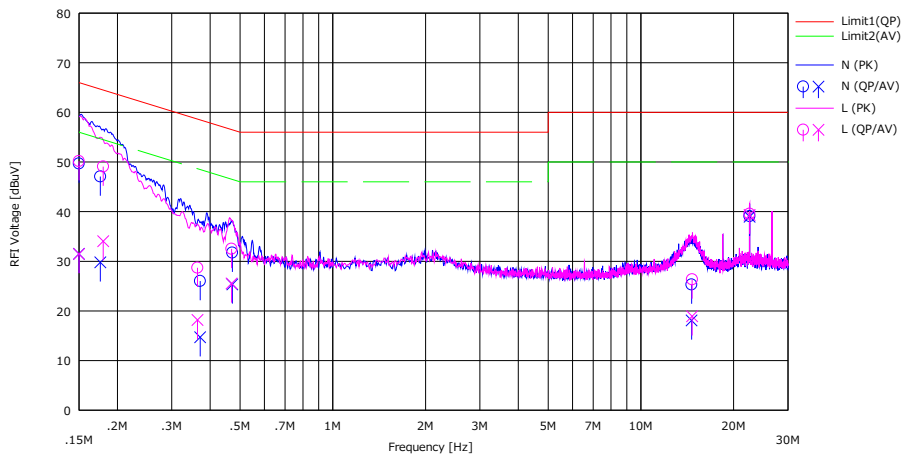


No.	Freq. [MHz]	Reading		LISN [dB]	LOSS [dB]	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<AV> [dBuV]			<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]				
1	0.15000	36.40	18.20	0.08	13.20	49.68	31.48	66.00	56.00	16.32	24.52	N	
2	0.17605	33.76	16.50	0.09	13.21	47.06	29.80	64.67	54.67	17.61	24.87	N	
3	0.37115	12.70	1.40	0.08	13.23	26.01	14.71	58.48	48.48	32.47	33.77	N	
4	0.47185	18.40	12.00	0.08	13.25	31.73	25.33	56.48	46.48	24.75	21.15	N	
5	14.60190	11.20	4.00	0.29	13.81	25.30	18.10	60.00	50.00	34.70	31.90	N	
6	22.52810	24.70	24.60	0.41	13.98	39.09	38.99	60.00	50.00	20.91	11.01	N	
7	0.15000	36.90	18.20	0.06	13.20	50.16	31.46	66.00	56.00	15.84	24.54	L	
8	0.17990	35.80	20.80	0.06	13.21	49.07	34.07	64.49	54.49	15.42	20.42	L	
9	0.36381	15.40	4.90	0.06	13.23	28.69	18.19	58.64	48.64	29.95	30.45	L	
10	0.46942	19.20	12.20	0.07	13.25	32.52	25.52	56.52	46.52	24.00	21.00	L	
11	14.66810	12.20	4.80	0.33	13.81	26.34	18.94	60.00	50.00	33.66	31.06	L	
12	22.52821	25.10	24.90	0.47	13.98	39.55	39.35	60.00	50.00	20.45	10.65	L	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + LISN + LOSS (CABLE + ATT)  
Except for the above table: adequate margin data below the limits.

## Conducted Emission

Report No.	13477241H
Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Date	November 4, 2020
Temperature / Humidity	23 deg. C / 36 % RH
Engineer	Takeshi Hiyaji
Mode	Tx, Hopping Off, DH5

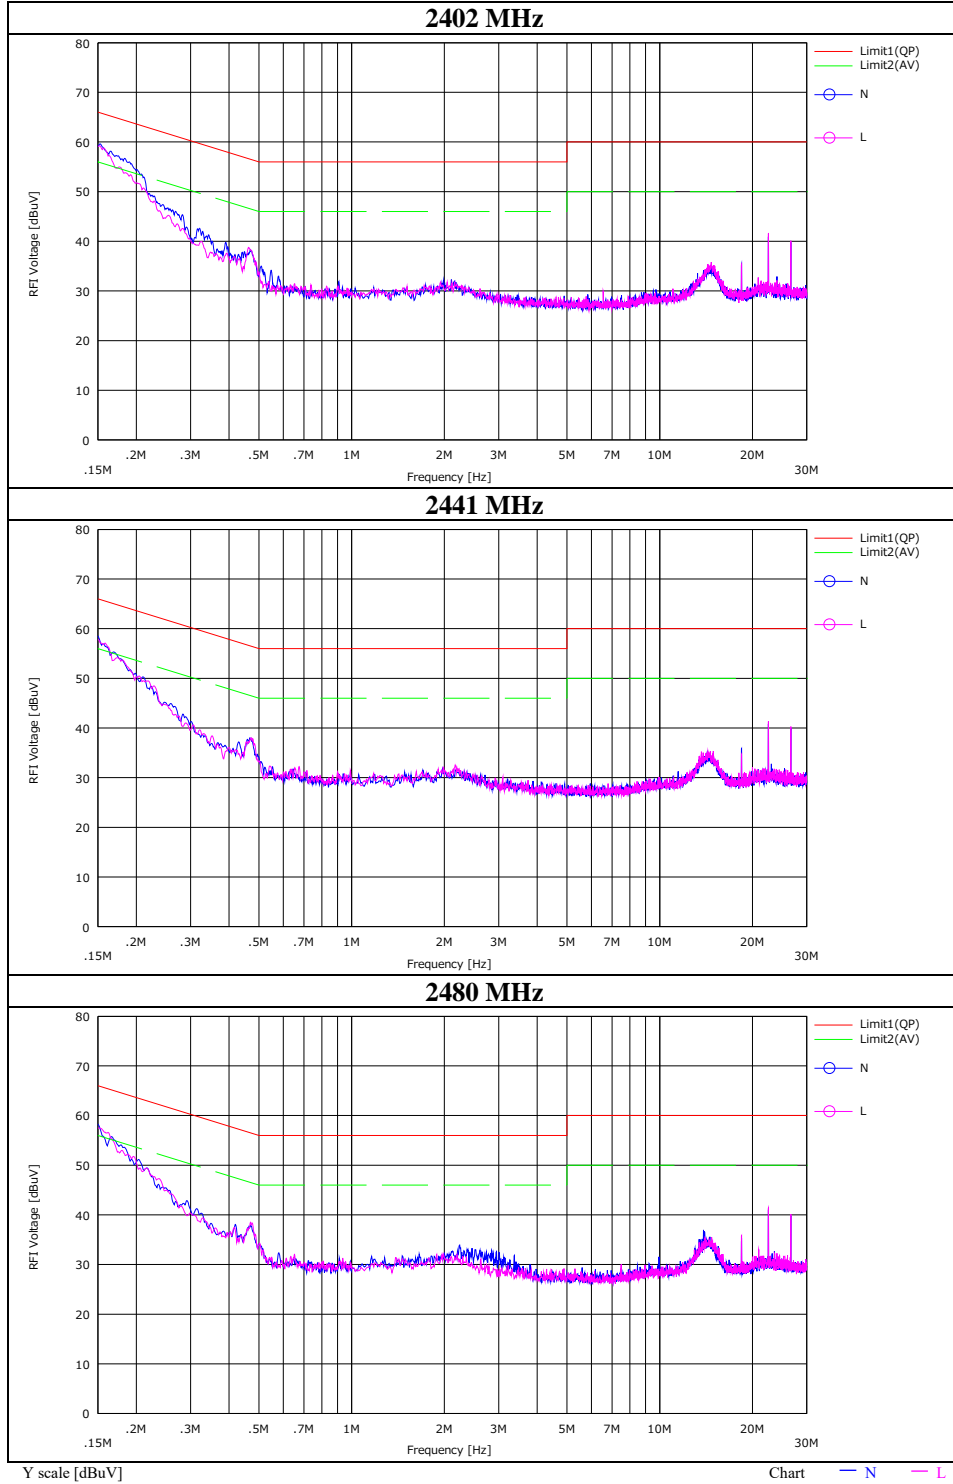

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Conducted Emission

Report No. 13477241H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date November 4, 2020  
Temperature / Humidity 23 deg. C / 36 % RH  
Engineer Takeshi Hiyaji  
Mode Tx, Hopping Off, 3DH5 2402 MHz

Limit : FCC\_Part 15 Subpart C(15.207)

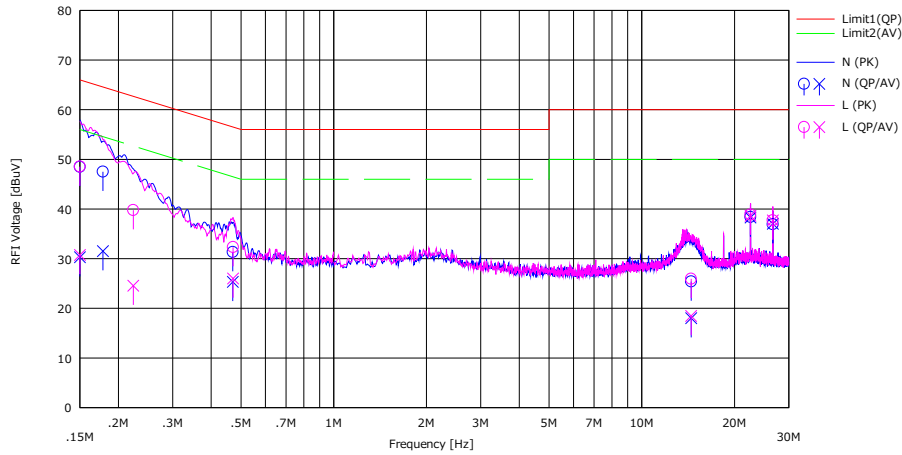


No.	Freq. [MHz]	Reading		LISN [dB]	LOSS [dB]	Results		Limit		Margin		Phase	Comment
		<QP> [dBuV]	<AV> [dBuV]			<QP> [dBuV]	<AV> [dBuV]	<QP> [dBuV]	<AV> [dBuV]	<QP> [dB]	<AV> [dB]		
1	0.15000	35.20	17.00	0.08	13.20	48.48	30.28	66.00	56.00	17.52	25.72	N	
2	0.17816	34.20	18.20	0.09	13.21	47.50	31.50	64.57	54.57	17.07	23.07	N	
3	0.47045	18.00	12.00	0.08	13.25	31.33	25.33	56.51	46.51	25.18	21.18	N	
4	14.47132	11.30	3.90	0.29	13.81	25.40	18.00	60.00	50.00	34.60	32.00	N	
5	22.52801	24.00	23.90	0.41	13.98	38.39	38.29	60.00	50.00	21.61	11.71	N	
6	26.62410	22.40	22.50	0.47	14.06	36.93	37.03	60.00	50.00	23.07	12.97	N	
7	0.15000	35.30	17.50	0.06	13.20	48.56	30.76	66.00	56.00	17.44	25.24	L	
8	0.22360	26.50	11.30	0.06	13.21	39.77	24.57	62.68	52.68	22.91	28.11	L	
9	0.47136	19.00	12.70	0.07	13.25	32.32	26.02	56.49	46.49	24.17	20.47	L	
10	14.46210	11.80	4.30	0.33	13.81	25.94	18.44	60.00	50.00	34.06	31.56	L	
11	22.52820	24.40	24.20	0.47	13.98	38.85	38.65	60.00	50.00	21.15	11.35	L	
12	26.62410	23.10	23.10	0.55	14.06	37.71	37.71	60.00	50.00	22.29	12.29	L	

CHART: WITH FACTOR Peak hold data. CALCULATION : RESULT = READING + LISN + LOSS (CABLE + ATT)  
Except for the above table: adequate margin data below the limits.

## Conducted Emission

Report No.	13477241H
Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Date	November 4, 2020
Temperature / Humidity	23 deg. C / 36 % RH
Engineer	Takeshi Hiyaji
Mode	Tx, Hopping Off, 3DH5

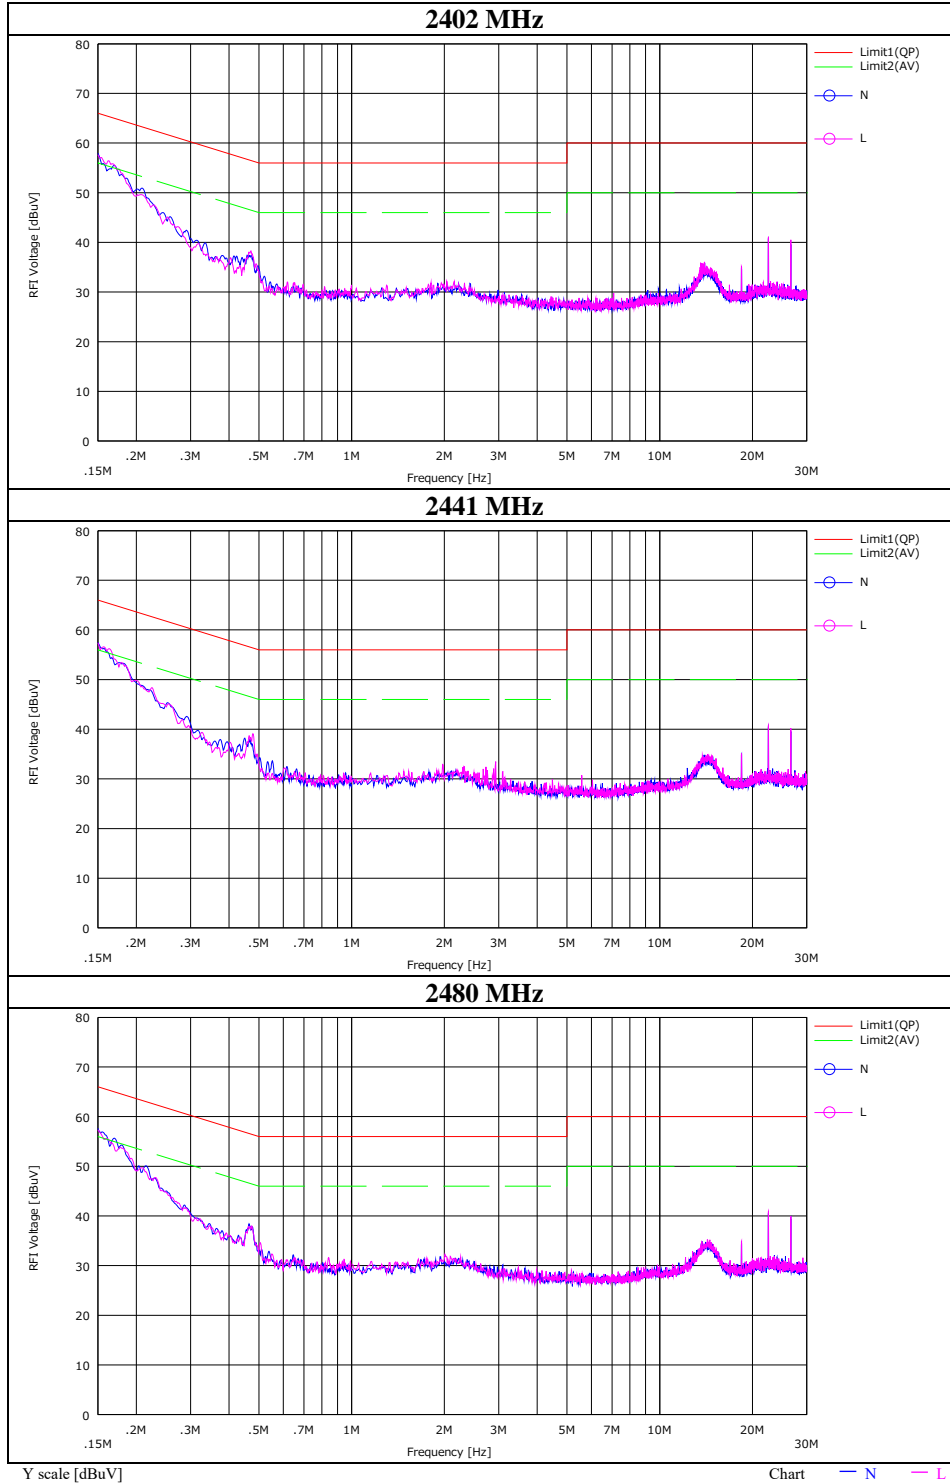

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation

Report No. 13477241H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date November 4, 2020  
 Temperature / Humidity 22 deg. C / 51 % RH  
 Engineer Yuta Moriya  
 Mode Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20dB Bandwidth [MHz]	99% Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.929	872.034	1.000	>= 0.619
DH5	2441.0	0.922	861.326	1.000	>= 0.615
DH5	2480.0	0.868	863.667	1.000	>= 0.579
DH5	Hopping On	-	78631.100	-	-
3DH5	2402.0	1.268	1172.100	1.000	>= 0.845
3DH5	2441.0	1.257	1173.300	1.000	>= 0.838
3DH5	2480.0	1.259	1171.800	1.000	>= 0.839
3DH5	Hopping On	-	78718.100	-	-

Limit: Two-thirds of 20dB Bandwidth or 25kHz (whichever is greater).

No limit applies to 20dB Bandwidth.

**UL Japan, Inc.**


**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 20dB Bandwidth and 99% Occupied Bandwidth

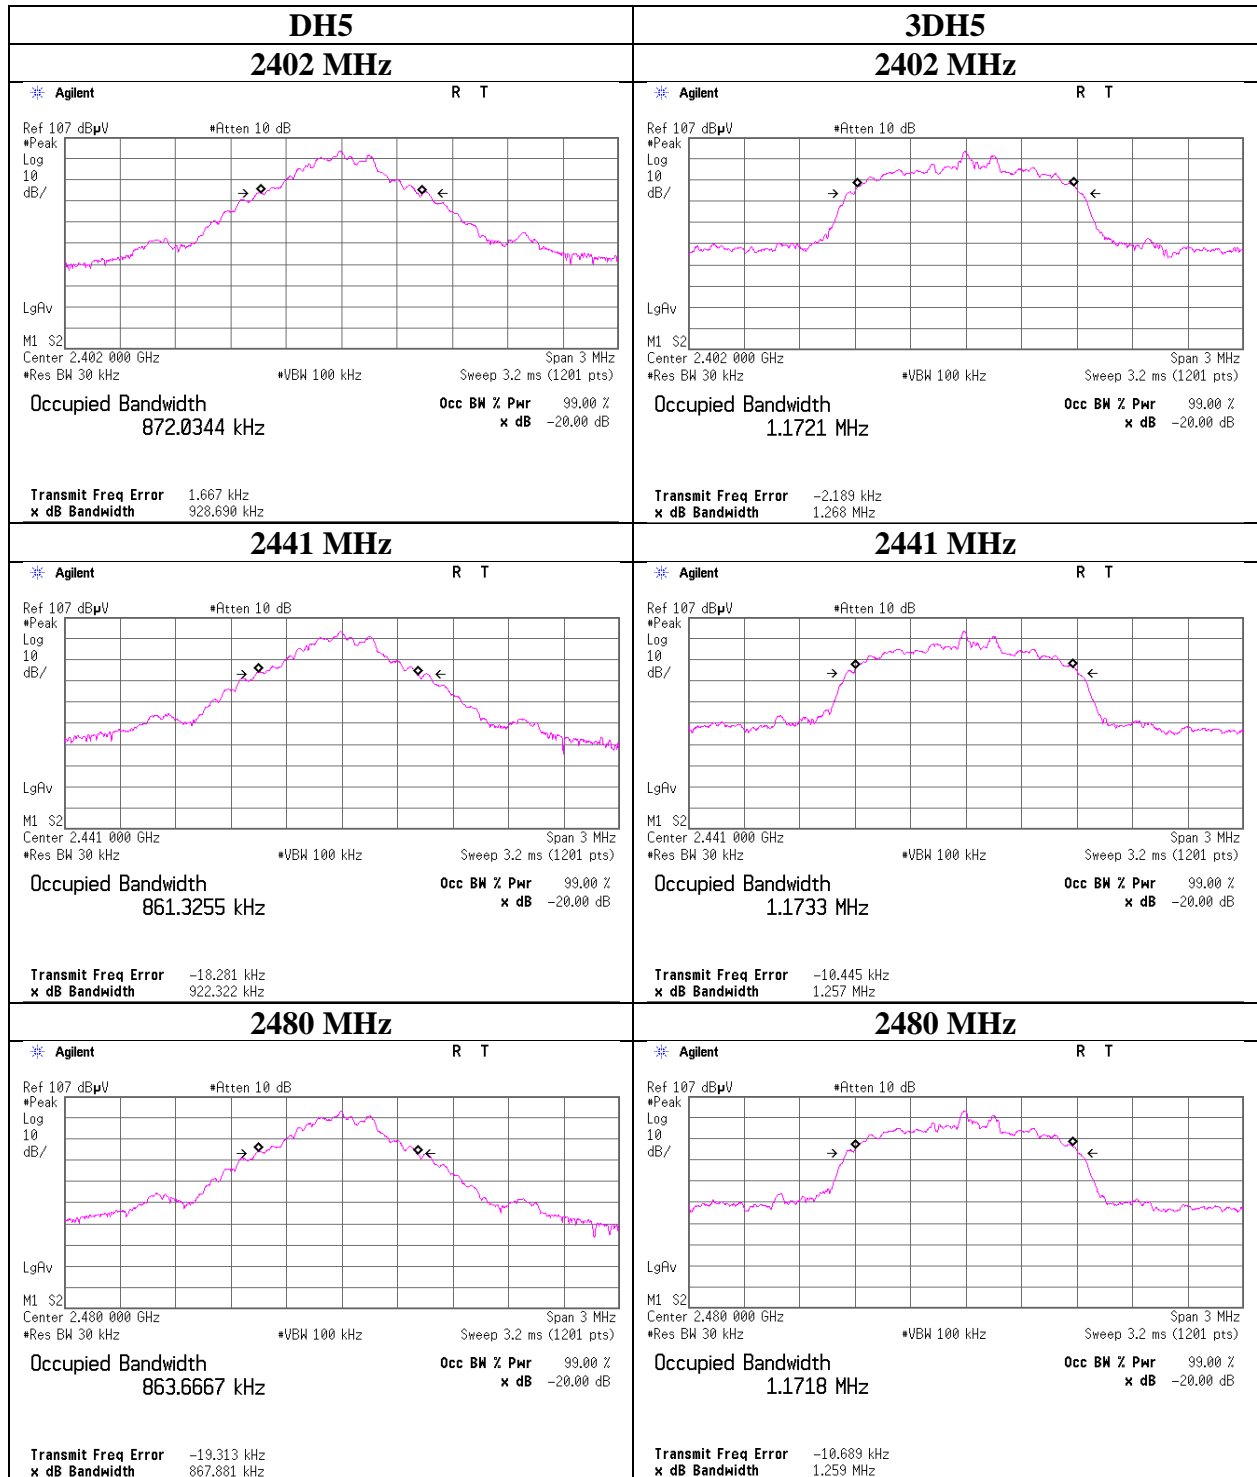

**UL Japan, Inc.**


**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 20dB Bandwidth and 99% Occupied Bandwidth

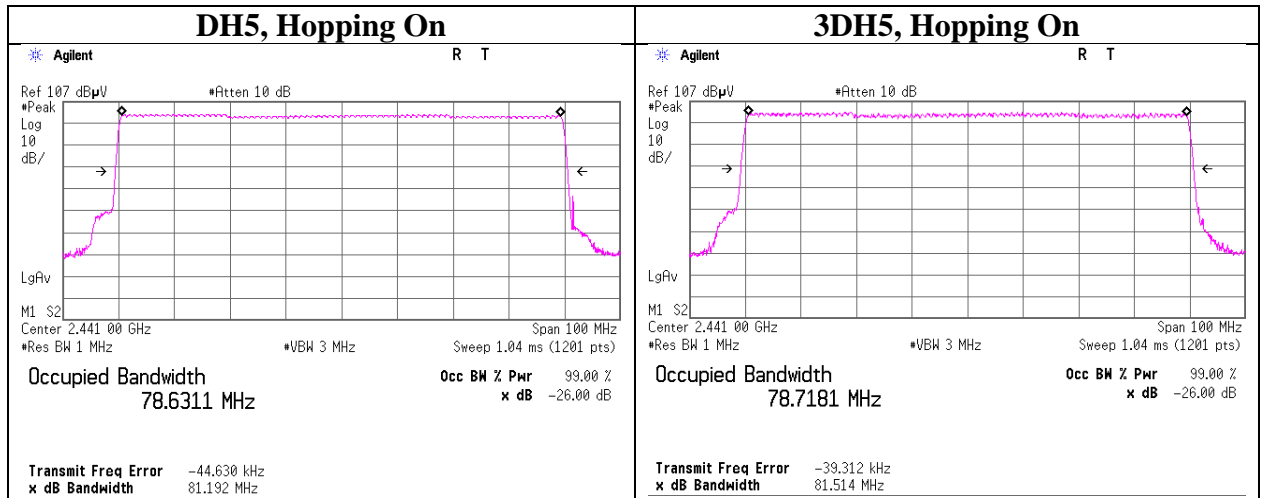

**UL Japan, Inc.**


**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### Carrier Frequency Separation

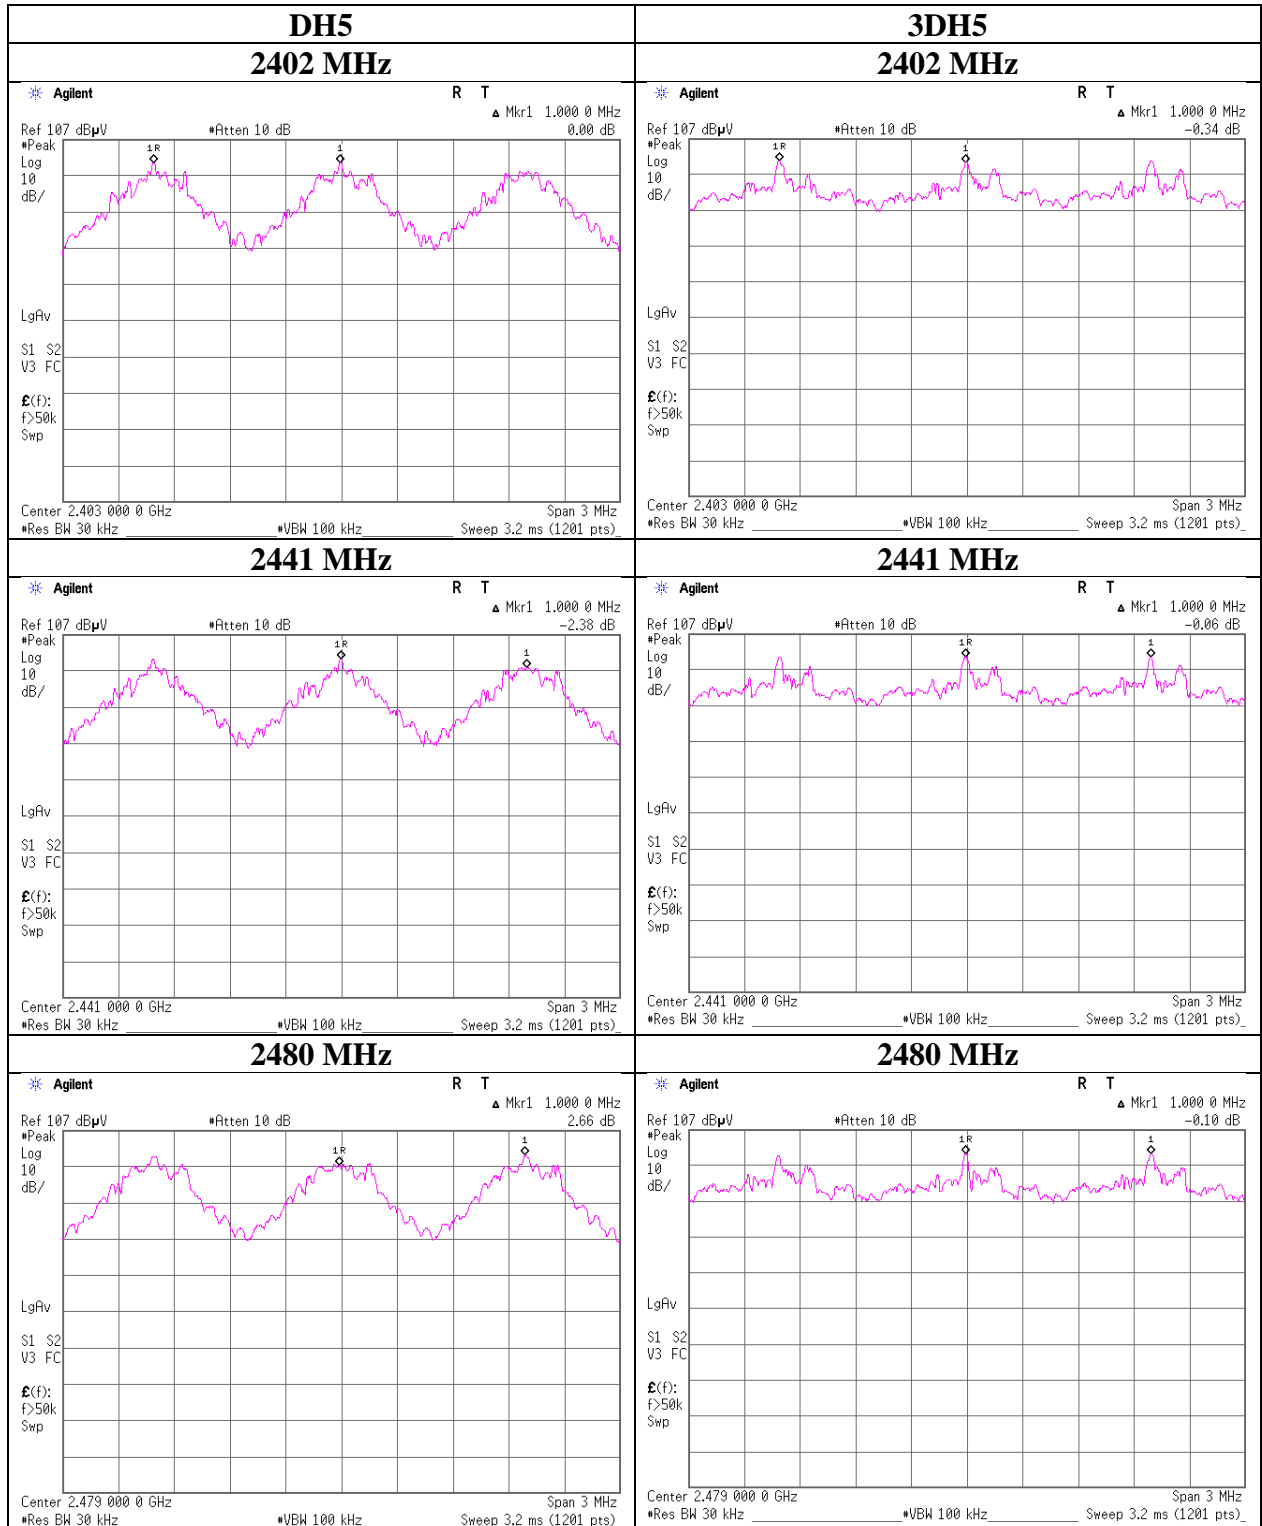

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124




### Number of Hopping Frequency

Report No. 13477241H  
Test place Ise EMC Lab. No.6 Measurement Room  
Date November 4, 2020  
Temperature / Humidity 22 deg. C / 51 % RH  
Engineer Yuta Moriya  
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	$\geq 15$
3DH5	79	$\geq 15$

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

**Number of Hopping Frequency**

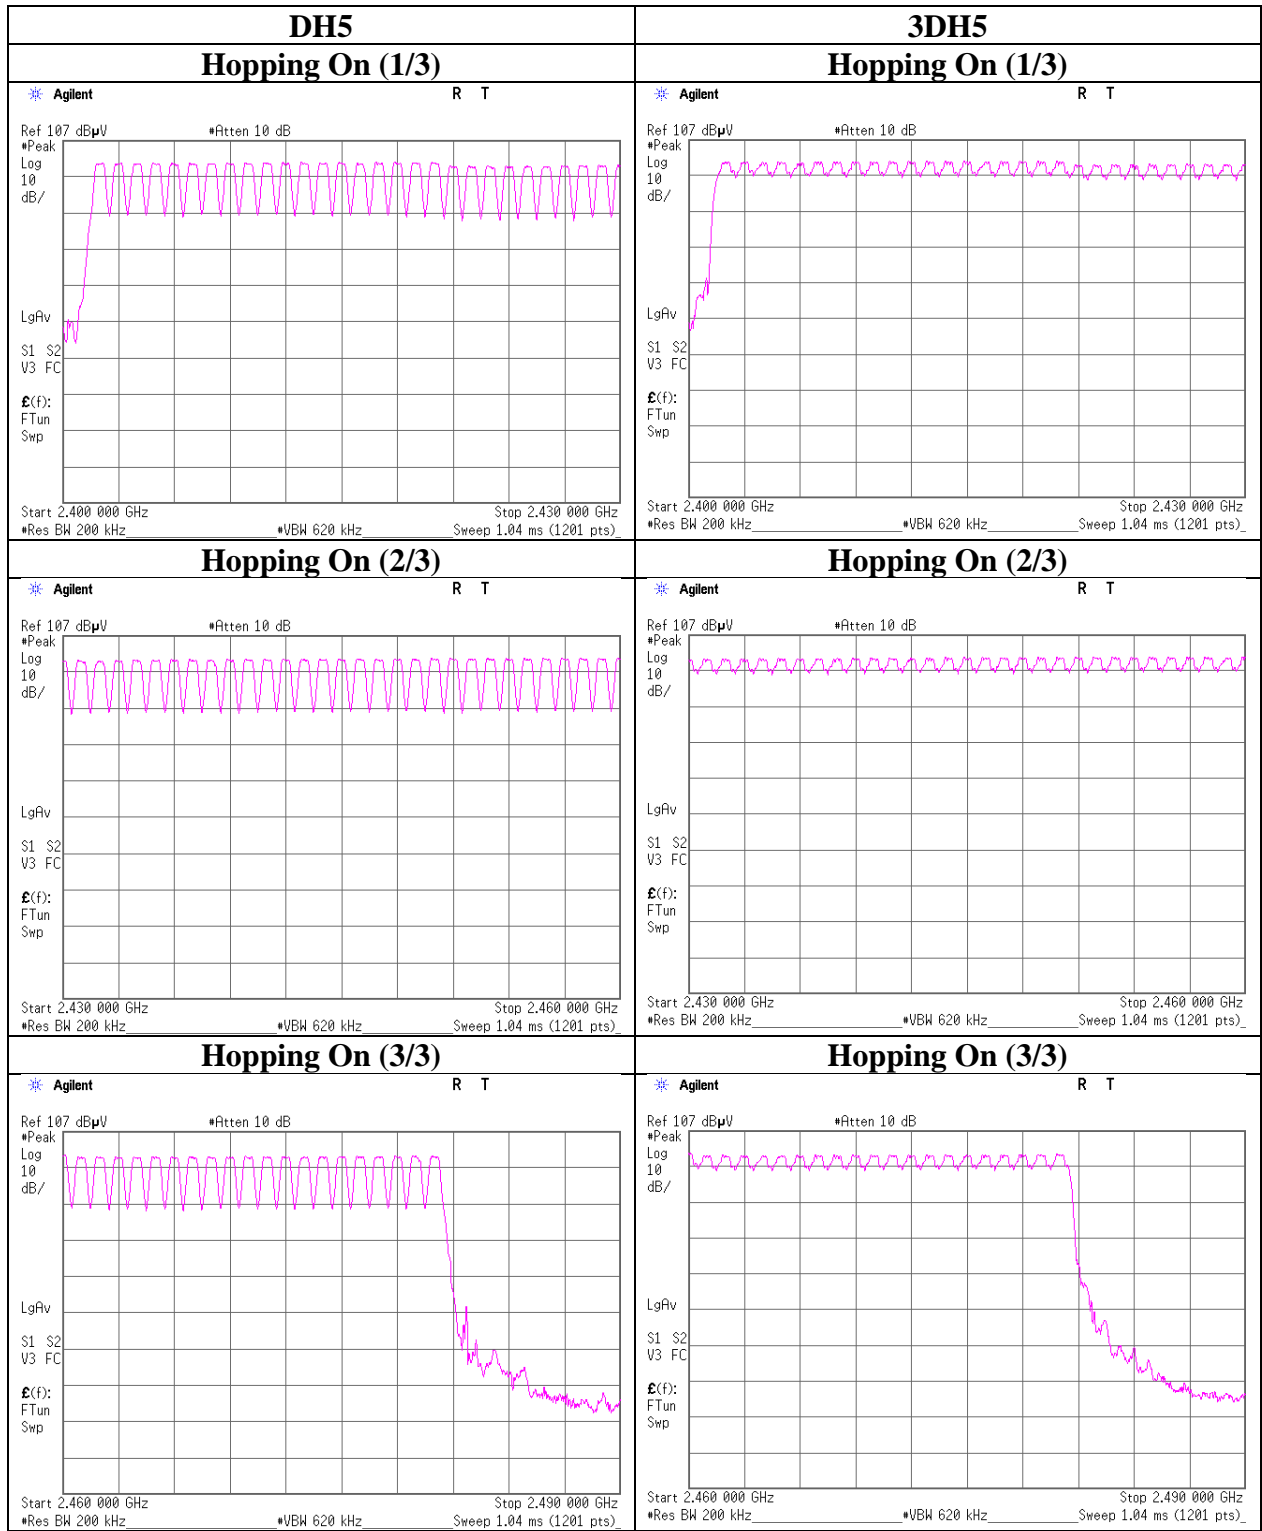

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Dwell time

Report No. 13477241H  
Test place Ise EMC Lab. No.6 Measurement Room  
Date November 4, 2020  
Temperature / Humidity 22 deg. C / 51 % RH  
Engineer Yuta Moriya  
Mode Tx, Hopping On

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period			Length of transmission [msec]	Result [msec]	Limit [msec]
DH1	50.6 times /	5 sec. x	31.6 sec. =	320 times	0.410	400
DH3	25.2 times /	5 sec. x	31.6 sec. =	160 times	1.672	400
DH5	17.0 times /	5 sec. x	31.6 sec. =	108 times	2.926	400
3DH1	50.8 times /	5 sec. x	31.6 sec. =	322 times	0.417	400
3DH3	25.4 times /	5 sec. x	31.6 sec. =	161 times	1.674	400
3DH5	17.0 times /	5 sec. x	31.6 sec. =	108 times	2.937	400

Sample Calculation

Result = Number of transmission x Length of transmission

\*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	51	51	50	51	50.6
DH3	25	25	25	26	25	25.2
DH5	17	17	17	17	17	17
3DH1	51	50	51	51	51	50.8
3DH3	25	26	25	26	25	25.4
3DH5	17	17	17	17	17	17

Sample Calculation

Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in  $N \times 0.4s$ , where  $N$  is the number of channels being used in the hopping sequence ( $20 \leq N \leq 79$ ), is always less than  $0.4s$  regardless of packet size. This is confirmed in the test report for  $N = 79$ .

**Dwell time**

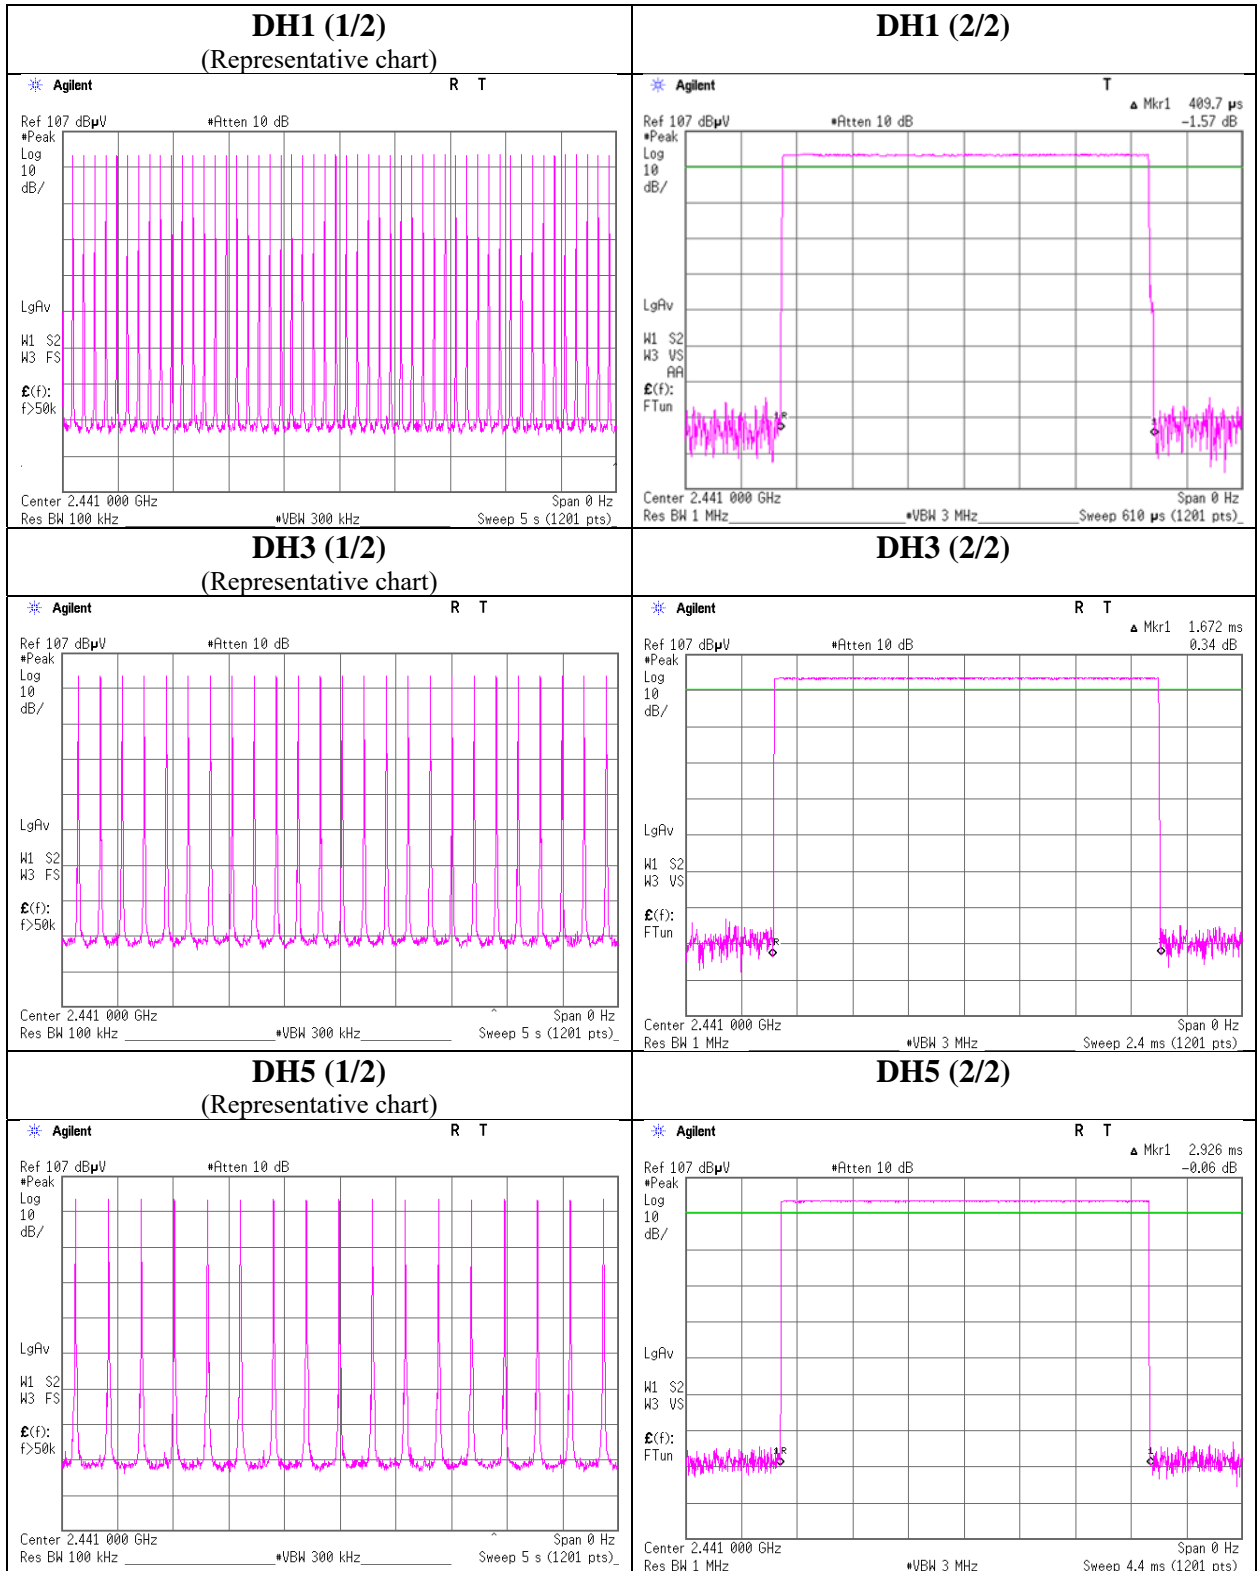

**UL Japan, Inc.**


**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Dwell time**

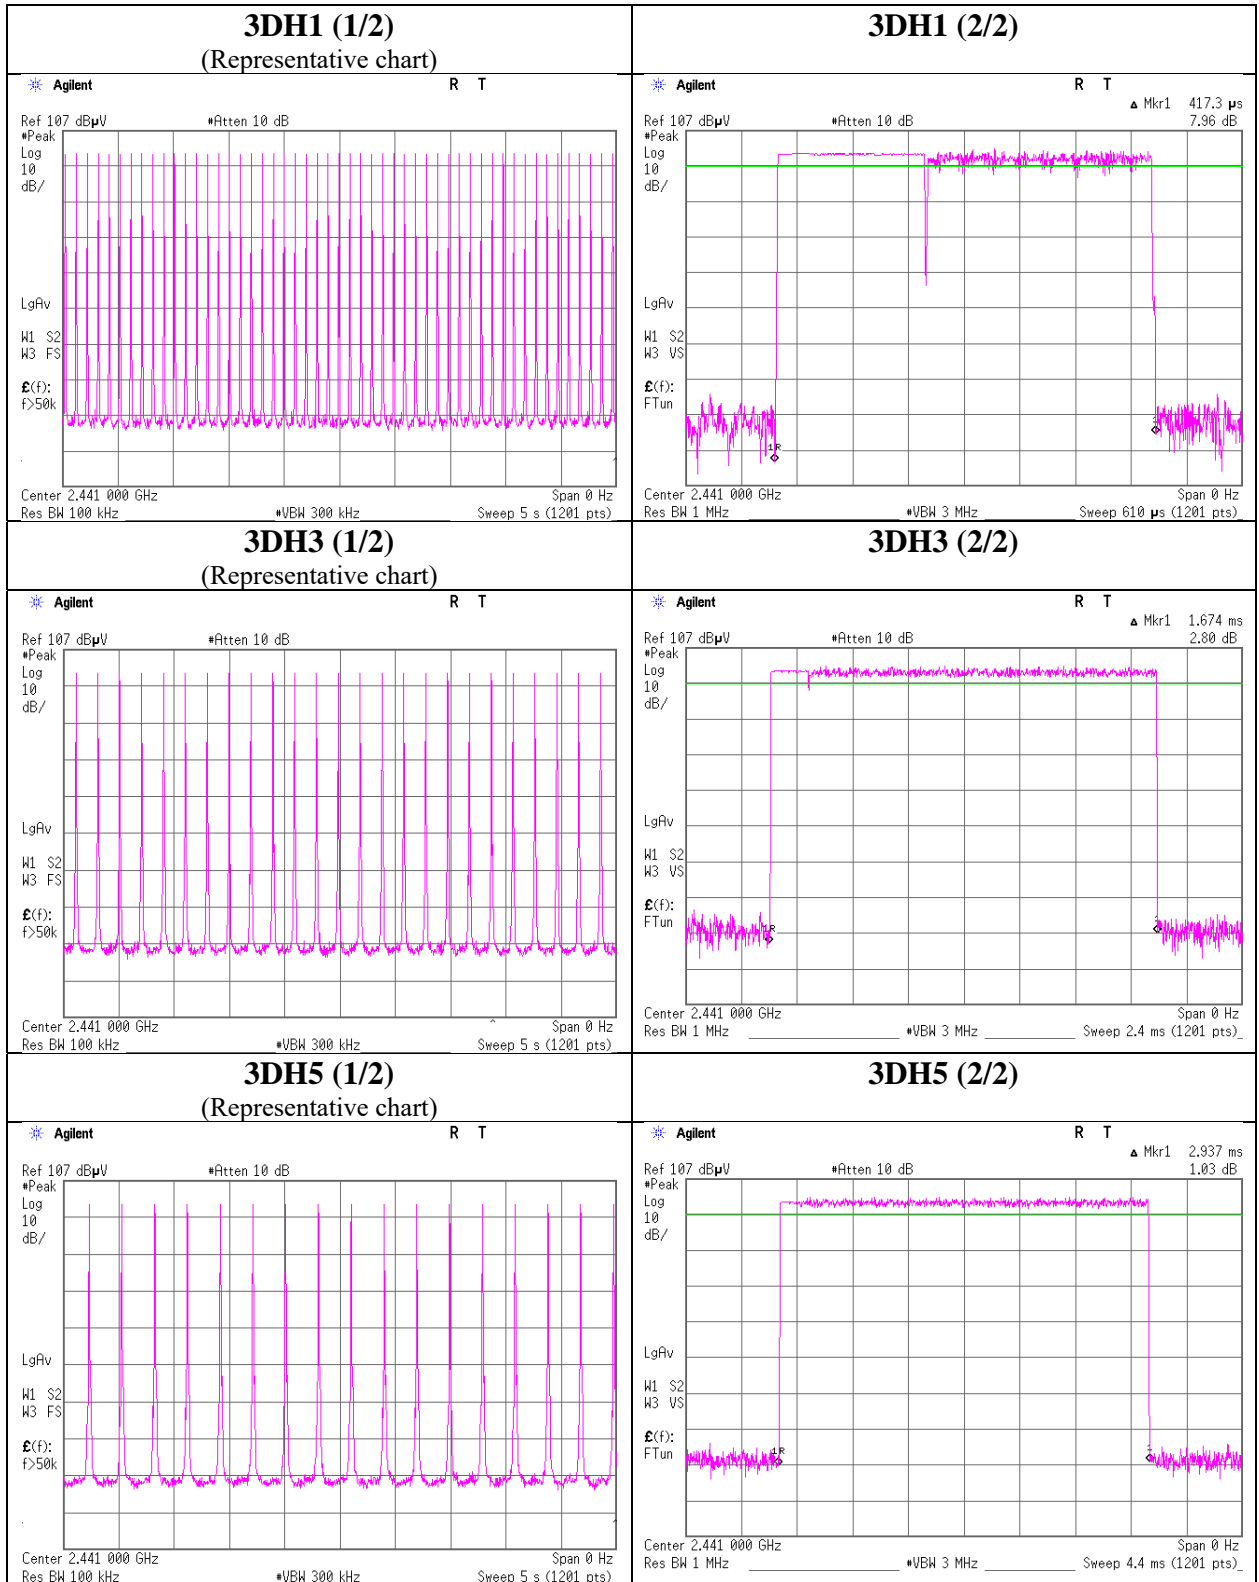

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Peak Output Power

Report No. 13477241H  
Test place Ise EMC Lab. No.6 Shielded Room  
Date November 2, 2020  
Temperature / Humidity 21 deg. C / 52 % RH  
Engineer Yuta Moriya  
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit		Margin
					[dBm]	[mW]	[dBm]	[mW]			[dB]	[dBm]	[mW]	[dBm]	
DH5	2402.0	-5.10	0.35	10.10	5.35	3.43	20.96	125	15.61	1.51	6.86	4.85	36.02	4000	29.16
DH5	2441.0	-5.55	0.35	10.10	4.90	3.09	20.96	125	16.06	1.51	6.41	4.38	36.02	4000	29.61
DH5	2480.0	-5.58	0.35	10.10	4.87	3.07	20.96	125	16.09	1.51	6.38	4.35	36.02	4000	29.64
2DH5	2402.0	-3.97	0.35	10.10	6.48	4.45	20.96	125	14.48	1.51	7.99	6.30	36.02	4000	28.03
2DH5	2441.0	-4.36	0.35	10.10	6.09	4.06	20.96	125	14.87	1.51	7.60	5.75	36.02	4000	28.42
2DH5	2480.0	-4.37	0.35	10.10	6.08	4.06	20.96	125	14.88	1.51	7.59	5.74	36.02	4000	28.43
3DH5	2402.0	-3.71	0.35	10.10	6.74	4.72	20.96	125	14.22	1.51	8.25	6.68	36.02	4000	27.77
3DH5	2441.0	-4.01	0.35	10.10	6.44	4.41	20.96	125	14.52	1.51	7.95	6.24	36.02	4000	28.07
3DH5	2480.0	-4.02	0.35	10.10	6.43	4.40	20.96	125	14.53	1.51	7.94	6.22	36.02	4000	28.08

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

**Average Output Power**  
**(Reference data for RF Exposure)**

Report No. 13477241H  
Test place Ise EMC Lab. No.6 Shielded Room  
Date November 2, 2020  
Temperature / Humidity 21 deg. C / 52 % RH  
Engineer Yuta Moriya  
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-6.70	0.35	10.10	3.75	2.37	1.10	4.85	3.05
DH5	2441.0	-7.08	0.35	10.10	3.37	2.17	1.10	4.47	2.80
DH5	2480.0	-7.14	0.35	10.10	3.31	2.14	1.10	4.41	2.76
2DH5	2402.0	-7.93	0.35	10.10	2.52	1.79	1.09	3.61	2.30
2DH5	2441.0	-8.30	0.35	10.10	2.15	1.64	1.09	3.24	2.11
2DH5	2480.0	-8.37	0.35	10.10	2.08	1.61	1.09	3.17	2.07
3DH5	2402.0	-7.92	0.35	10.10	2.53	1.79	1.09	3.62	2.30
3DH5	2441.0	-8.29	0.35	10.10	2.16	1.64	1.09	3.25	2.11
3DH5	2480.0	-8.36	0.35	10.10	2.09	1.62	1.09	3.18	2.08

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

\*The equipment and cables were not used for factor 0 dB of the data sheets.


## Burst Rate Confirmation

Report No. 13477241H  
 Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
 Date November 2, 2020  
 Temperature / Humidity 22 deg. C / 40 % RH  
 Engineer Yuta Moriya  
 Mode Tx, Hopping Off


### DH5

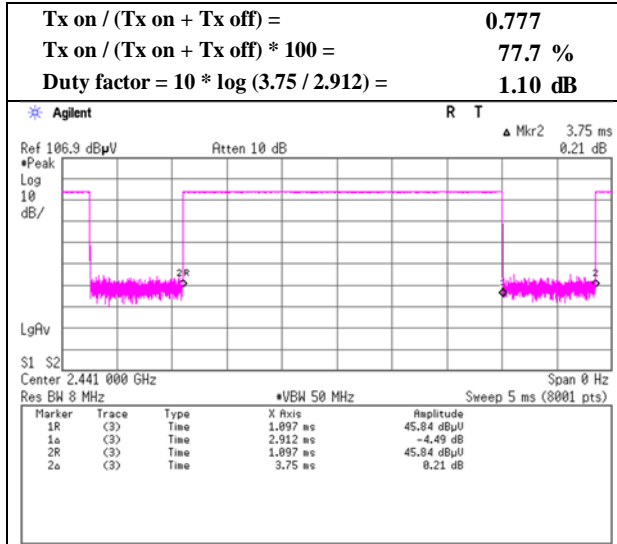

### 2DH5

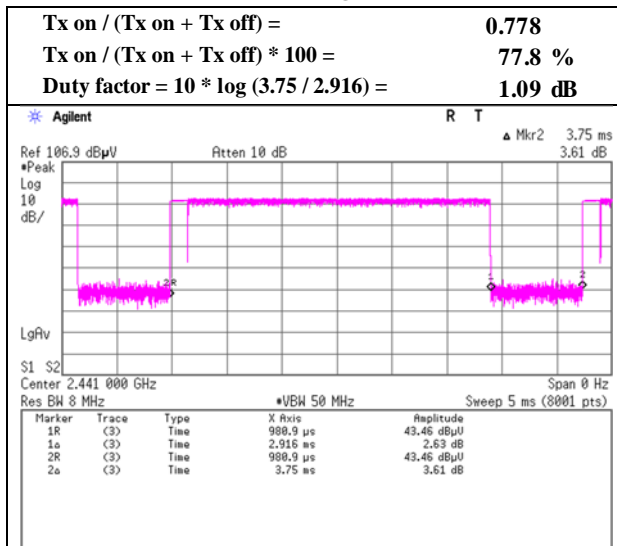

### 3DH5

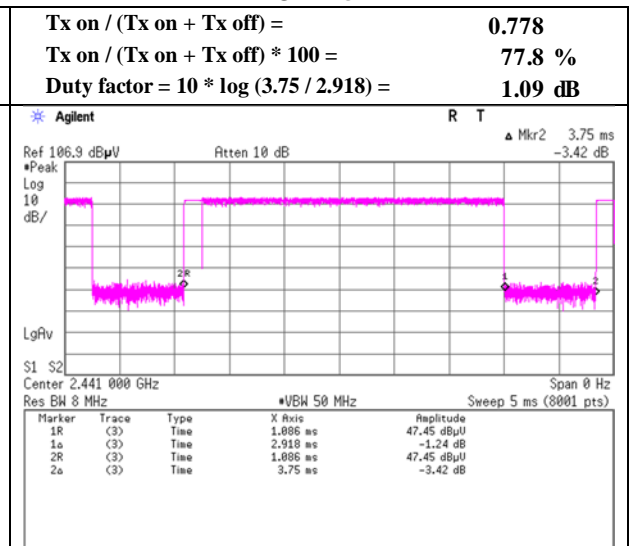



## Radiated Spurious Emission

Report No.	13477241H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	November 2, 2020	November 2, 2020	November 3, 2020
Temperature / Humidity	22 deg. C / 40 % RH	23 deg. C / 50 % RH	23 deg. C / 38 % RH
Engineer	Yuta Moriya	Takeshi Hiyaji	Takeshi Hiyaji
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	43.000	QP	30.4	13.7	7.4	32.2	-	19.3	40.0	20.7	
Hori.	71.685	QP	33.2	6.4	7.8	32.2	-	15.2	40.0	24.8	
Hori.	75.783	QP	32.0	6.6	7.9	32.2	-	14.3	40.0	25.7	
Hori.	107.942	QP	25.2	11.2	8.3	32.1	-	12.5	43.5	31.0	
Hori.	144.000	QP	36.4	14.9	8.7	32.1	-	27.9	43.5	15.6	
Hori.	480.000	QP	41.3	17.2	11.3	32.0	-	37.8	46.0	8.2	
Hori.	2390.000	PK	42.7	27.5	5.6	32.7	-	43.1	73.9	30.9	
Hori.	4804.000	PK	42.3	31.7	7.7	31.7	-	50.0	73.9	23.9	
Hori.	7206.000	PK	42.8	36.1	9.1	32.6	-	55.3	73.9	18.6	Floor noise
Hori.	9608.000	PK	43.3	38.7	9.5	33.3	-	58.2	73.9	15.7	Floor noise
Hori.	2390.000	AV	34.4	27.5	5.6	32.7	1.1	35.8	53.9	18.1	*1)
Hori.	4804.000	AV	36.1	31.7	7.7	31.7	1.1	45.0	53.9	8.9	
Hori.	7206.000	AV	34.5	36.1	9.1	32.6	-	47.1	53.9	6.8	Floor noise
Hori.	9608.000	AV	32.6	38.7	9.5	33.3	-	47.6	53.9	6.4	Floor noise
Vert.	43.000	QP	40.7	13.7	7.4	32.2	-	29.6	40.0	10.4	
Vert.	71.685	QP	46.7	6.4	7.8	32.2	-	28.7	40.0	11.3	
Vert.	75.783	QP	46.9	6.6	7.9	32.2	-	29.2	40.0	10.8	
Vert.	107.942	QP	38.2	11.2	8.3	32.1	-	25.5	43.5	18.0	
Vert.	144.000	QP	40.9	14.9	8.7	32.1	-	32.4	43.5	11.1	
Vert.	480.000	QP	41.6	17.2	11.3	32.0	-	38.1	46.0	7.9	
Vert.	2390.000	PK	43.5	27.5	5.6	32.7	-	43.9	73.9	30.0	
Vert.	4804.000	PK	43.0	31.7	7.7	31.7	-	50.7	73.9	23.2	
Vert.	7206.000	PK	42.7	36.1	9.1	32.6	-	55.2	73.9	18.7	Floor noise
Vert.	9608.000	PK	43.3	38.7	9.5	33.3	-	58.2	73.9	15.7	Floor noise
Vert.	2390.000	AV	32.3	27.5	5.6	32.7	1.1	33.8	53.9	20.1	*1)
Vert.	4804.000	AV	35.6	31.7	7.7	31.7	1.1	44.5	53.9	9.4	
Vert.	7206.000	AV	34.6	36.1	9.1	32.6	-	47.1	53.9	6.8	Floor noise
Vert.	9608.000	AV	32.6	38.7	9.5	33.3	-	47.5	53.9	6.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

\*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	99.8	27.5	5.6	32.7	100.1	-	-	Carrier
Hori.	2398.795	PK	54.3	27.5	5.6	32.7	54.6	80.1	25.5	
Hori.	2400.000	PK	50.3	27.5	5.6	32.7	50.6	80.1	29.5	
Vert.	2402.000	PK	101.5	27.5	5.6	32.7	101.9	-	-	Carrier
Vert.	2398.795	PK	55.3	27.5	5.6	32.7	55.7	81.9	26.2	
Vert.	2400.000	PK	51.9	27.5	5.6	32.7	52.3	81.9	29.6	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No.	13477241H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	November 2, 2020
Temperature / Humidity	22 deg. C / 40 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

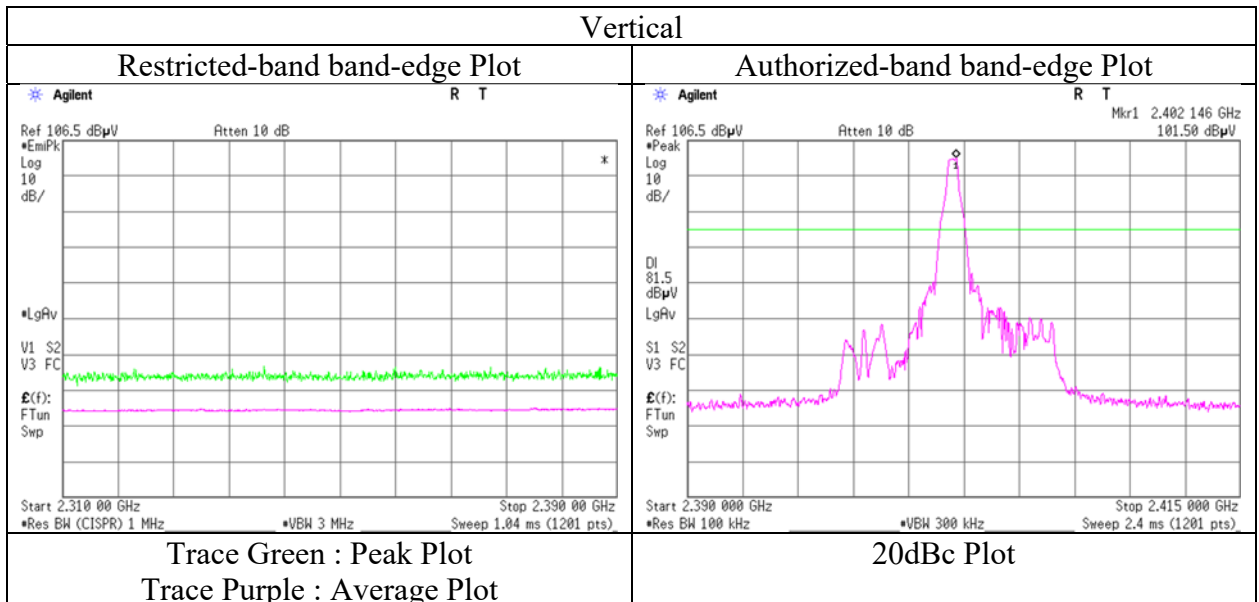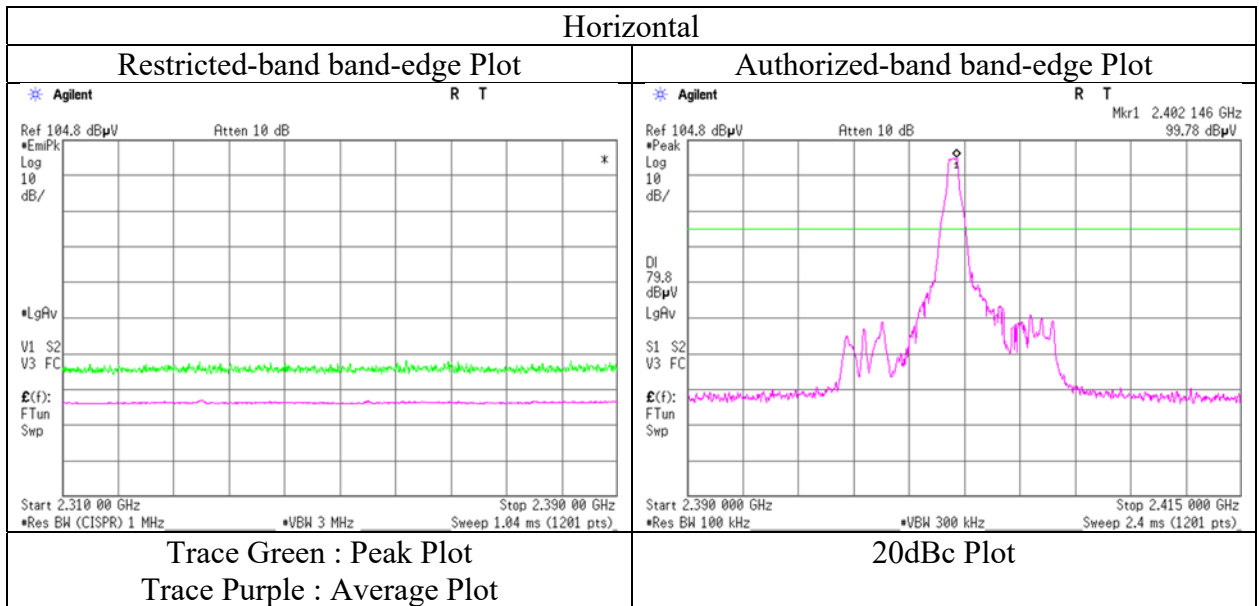

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No.	13477241H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	November 2, 2020	November 2, 2020	November 3, 2020
Temperature / Humidity	22 deg. C / 40 % RH	23 deg. C / 50 % RH	23 deg. C / 38 % RH
Engineer	Yuta Moriya	Takeshi Hiyaji	Takeshi Hiyaji
	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	38.923	QP	31.5	15.3	7.3	32.2	-	21.9	40.0	18.1	
Hori.	71.676	QP	32.5	6.4	7.8	32.2	-	14.5	40.0	25.5	
Hori.	75.761	QP	31.9	6.6	7.9	32.2	-	14.2	40.0	25.8	
Hori.	108.000	QP	26.2	11.2	8.3	32.1	-	13.5	43.5	30.0	
Hori.	144.000	QP	34.5	14.9	8.7	32.1	-	26.0	43.5	17.5	
Hori.	480.000	QP	41.2	17.2	11.3	32.0	-	37.7	46.0	8.3	
Hori.	4882.000	PK	41.9	31.4	7.7	31.6	-	49.4	73.9	24.5	
Hori.	7323.000	PK	42.3	36.2	9.1	32.6	-	55.0	73.9	19.0	Floor noise
Hori.	9764.000	PK	42.7	39.0	9.6	33.4	-	57.9	73.9	16.0	Floor noise
Hori.	4882.000	AV	34.3	31.4	7.7	31.6	1.1	42.9	53.9	11.0	
Hori.	7323.000	AV	34.2	36.2	9.1	32.6	-	46.9	53.9	7.1	Floor noise
Hori.	9764.000	AV	32.3	39.0	9.6	33.4	-	47.5	53.9	6.4	Floor noise
Vert.	38.923	QP	40.0	15.3	7.3	32.2	-	30.4	40.0	9.6	
Vert.	71.676	QP	46.6	6.4	7.8	32.2	-	28.6	40.0	11.4	
Vert.	75.761	QP	44.5	6.6	7.9	32.2	-	26.8	40.0	13.2	
Vert.	108.000	QP	36.9	11.2	8.3	32.1	-	24.2	43.5	19.3	
Vert.	144.000	QP	41.9	14.9	8.7	32.1	-	33.4	43.5	10.1	
Vert.	480.000	QP	41.1	17.2	11.3	32.0	-	37.6	46.0	8.4	
Vert.	4882.000	PK	41.6	31.4	7.7	31.6	-	49.1	73.9	24.8	
Vert.	7323.000	PK	42.1	36.2	9.1	32.6	-	54.8	73.9	19.2	Floor noise
Vert.	9764.000	PK	42.7	39.0	9.6	33.4	-	57.9	73.9	16.0	Floor noise
Vert.	4882.000	AV	34.5	31.4	7.7	31.6	1.1	43.1	53.9	10.8	
Vert.	7323.000	AV	34.4	36.2	9.1	32.6	-	47.1	53.9	6.8	Floor noise
Vert.	9764.000	AV	32.3	39.0	9.6	33.4	-	47.5	53.9	6.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor:     1 GHz - 10 GHz    20log (4.0 m / 3.0 m) = 2.5 dB  
                          10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

## Radiated Spurious Emission

Report No. 13477241H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3 No.3 No.3  
Date November 2, 2020 November 2, 2020 November 3, 2020  
Temperature / Humidity 22 deg. C / 40 % RH 23 deg. C / 50 % RH 23 deg. C / 38 % RH  
Engineer Yuta Moriya Takeshi Hiyaji Takeshi Hiyaji  
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)  
Mode Tx, Hopping Off, DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	51.200	QP	44.1	10.7	7.5	32.2	-	30.1	40.0	9.9	
Hori.	55.300	QP	46.0	9.2	7.6	32.2	-	30.6	40.0	9.4	
Hori.	71.677	QP	41.1	6.4	7.8	32.2	-	23.1	40.0	16.9	
Hori.	144.000	QP	34.5	14.9	8.7	32.1	-	26.0	43.5	17.5	
Hori.	276.000	QP	44.4	13.2	9.9	32.0	-	35.5	46.0	10.5	
Hori.	480.000	QP	40.0	17.2	11.3	32.0	-	36.5	46.0	9.5	
Hori.	2483.500	PK	54.3	27.3	5.7	32.7	-	54.5	73.9	19.4	
Hori.	4960.000	PK	42.8	31.5	7.7	31.6	-	50.3	73.9	23.6	
Hori.	7440.000	PK	41.3	36.3	9.1	32.7	-	54.0	73.9	19.9	Floor noise
Hori.	9920.000	PK	42.3	38.8	9.6	33.5	-	57.2	73.9	16.7	Floor noise
Hori.	2483.500	AV	48.4	27.3	5.7	32.7	1.1	49.8	53.9	4.1	*1)
Hori.	4960.000	AV	35.6	31.5	7.7	31.6	1.1	44.2	53.9	9.7	
Hori.	7440.000	AV	34.5	36.3	9.1	32.7	-	47.2	53.9	6.8	Floor noise
Hori.	9920.000	AV	32.6	38.8	9.6	33.5	-	47.5	53.9	6.4	Floor noise
Vert.	51.200	QP	44.5	10.7	7.5	32.2	-	30.5	40.0	9.5	
Vert.	55.300	QP	48.3	9.2	7.6	32.2	-	32.9	40.0	7.1	
Vert.	71.677	QP	49.8	6.4	7.8	32.2	-	31.8	40.0	8.2	
Vert.	144.000	QP	42.1	14.9	8.7	32.1	-	33.6	43.5	9.9	
Vert.	276.000	QP	48.3	13.2	9.9	32.0	-	39.4	46.0	6.6	
Vert.	480.000	QP	40.4	17.2	11.3	32.0	-	36.9	46.0	9.1	
Vert.	2483.500	PK	54.0	27.3	5.7	32.7	-	54.3	73.9	19.6	
Vert.	4960.000	PK	44.0	31.5	7.7	31.6	-	51.6	73.9	22.3	
Vert.	7440.000	PK	41.3	36.3	9.1	32.7	-	54.0	73.9	19.9	Floor noise
Vert.	9920.000	PK	42.1	38.8	9.6	33.5	-	57.0	73.9	16.9	Floor noise
Vert.	2483.500	AV	48.1	27.3	5.7	32.7	1.1	49.5	53.9	4.4	*1)
Vert.	4960.000	AV	36.5	31.5	7.7	31.6	1.1	45.2	53.9	8.7	
Vert.	7440.000	AV	34.5	36.3	9.1	32.7	-	47.2	53.9	6.7	Floor noise
Vert.	9920.000	AV	32.5	38.8	9.6	33.5	-	47.4	53.9	6.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

\*1) Not Out of Band emission(Leakage Power)

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No. 13477241H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3  
Date November 2, 2020  
Temperature / Humidity 22 deg. C / 40 % RH  
Engineer Yuta Moriya  
(1 GHz - 10 GHz)  
Mode Tx, Hopping Off, DH5 2480 MHz

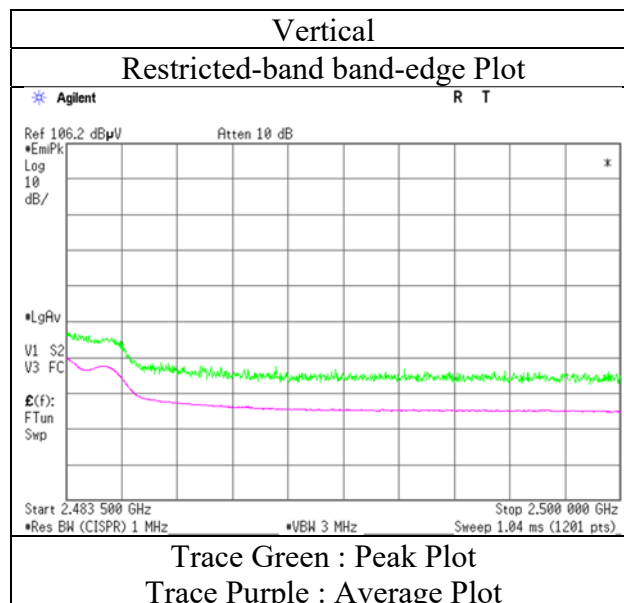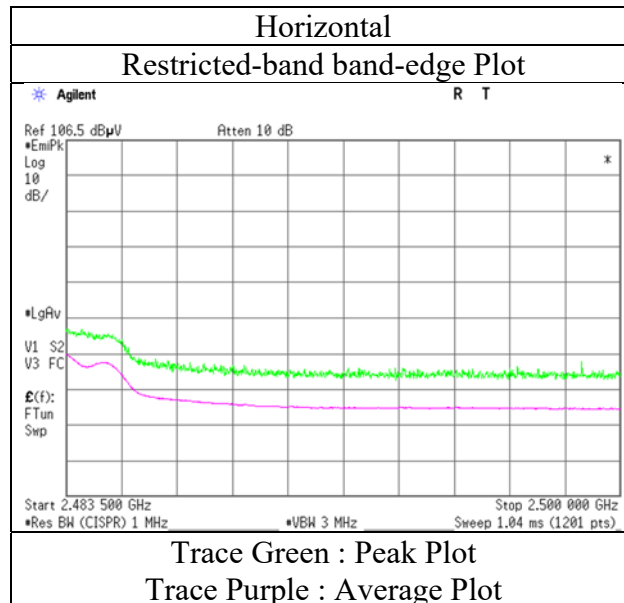

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Report No. 13477241H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3 No.3 No.3  
Date November 2, 2020 November 2, 2020 November 3, 2020  
Temperature / Humidity 22 deg. C / 40 % RH 23 deg. C / 50 % RH 23 deg. C / 38 % RH  
Engineer Yuta Moriya Takeshi Hiyaji Takeshi Hiyaji  
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)  
Mode Tx, Hopping Off, 3DH5 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	55.300	QP	39.3	9.2	7.6	32.2	-	23.9	40.0	16.1	
Hori.	59.390	QP	45.9	7.9	7.6	32.2	-	29.2	40.0	10.8	
Hori.	79.874	QP	34.7	7.0	7.9	32.2	-	17.5	40.0	22.6	
Hori.	144.000	QP	34.6	14.9	8.7	32.1	-	26.1	43.5	17.4	
Hori.	276.000	QP	44.3	13.2	9.9	32.0	-	35.4	46.0	10.6	
Hori.	480.000	QP	40.8	17.2	11.3	32.0	-	37.3	46.0	8.7	
Hori.	2390.000	PK	42.0	27.5	5.6	32.7	-	42.4	73.9	31.6	
Hori.	4804.000	PK	42.3	31.7	7.7	31.7	-	50.1	73.9	23.8	
Hori.	7206.000	PK	42.3	36.1	9.1	32.6	-	54.8	73.9	19.1	Floor noise
Hori.	9608.000	PK	42.9	38.7	9.5	33.3	-	57.8	73.9	16.1	Floor noise
Hori.	2390.000	AV	34.1	27.5	5.6	32.7	1.1	35.6	53.9	18.3	*1)
Hori.	4804.000	AV	35.7	31.7	7.7	31.7	1.1	44.5	53.9	9.4	
Hori.	7206.000	AV	34.8	36.1	9.1	32.6	-	47.4	53.9	6.5	Floor noise
Hori.	9608.000	AV	32.6	38.7	9.5	33.3	-	47.5	53.9	6.4	Floor noise
Vert.	55.300	QP	48.7	9.2	7.6	32.2	-	33.3	40.0	6.7	
Vert.	59.390	QP	50.2	7.9	7.6	32.2	-	33.5	40.0	6.5	
Vert.	79.874	QP	49.1	7.0	7.9	32.2	-	31.9	40.0	8.2	
Vert.	144.000	QP	40.5	14.9	8.7	32.1	-	32.0	43.5	11.5	
Vert.	276.000	QP	44.5	13.2	9.9	32.0	-	35.6	46.0	10.4	
Vert.	480.000	QP	40.6	17.2	11.3	32.0	-	37.1	46.0	8.9	
Vert.	2390.000	PK	43.1	27.5	5.6	32.7	-	43.5	73.9	30.4	
Vert.	4804.000	PK	41.7	31.7	7.7	31.7	-	49.5	73.9	24.4	
Vert.	7206.000	PK	42.6	36.1	9.1	32.6	-	55.1	73.9	18.8	Floor noise
Vert.	9608.000	PK	42.8	38.7	9.5	33.3	-	57.7	73.9	16.2	Floor noise
Vert.	2390.000	AV	34.1	27.5	5.6	32.7	1.1	35.6	53.9	18.3	*1)
Vert.	4804.000	AV	34.4	31.7	7.7	31.7	1.1	43.2	53.9	10.7	
Vert.	7206.000	AV	34.7	36.1	9.1	32.6	-	47.3	53.9	6.6	Floor noise
Vert.	9608.000	AV	32.5	38.7	9.5	33.3	-	47.4	53.9	6.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4.0 m / 3.0 m) = 2.5 dB  
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

\*1) Not Out of Band emission(Leakage Power)

### 20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	100.6	27.5	5.6	32.7	100.9	-	-	Carrier
Hori.	2398.765	PK	54.6	27.5	5.6	32.7	54.9	80.9	26.0	
Hori.	2400.000	PK	51.0	27.5	5.6	32.7	51.3	80.9	29.6	
Vert.	2402.000	PK	99.7	27.5	5.6	32.7	100.0	-	-	Carrier
Vert.	2398.765	PK	54.2	27.5	5.6	32.7	54.6	80.0	25.4	
Vert.	2400.000	PK	50.5	27.5	5.6	32.7	50.9	80.0	29.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No. 13477241H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3  
Date November 2, 2020  
Temperature / Humidity 22 deg. C / 40 % RH  
Engineer Yuta Moriya  
(1 GHz - 10 GHz)  
Mode Tx, Hopping Off, 3DH5 2402 MHz

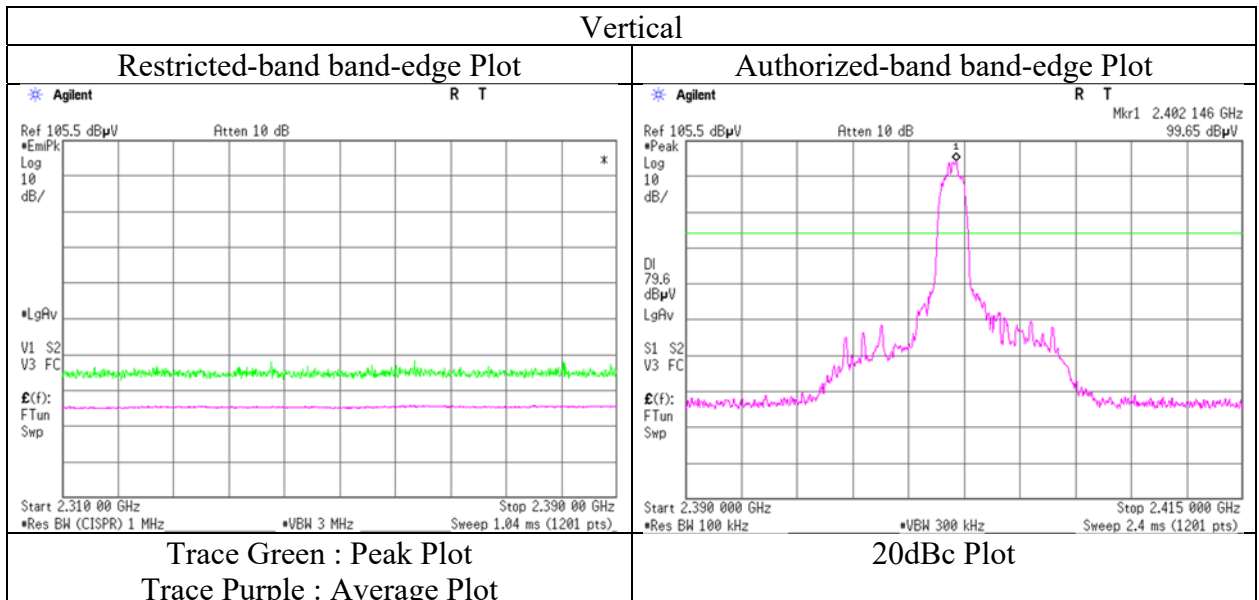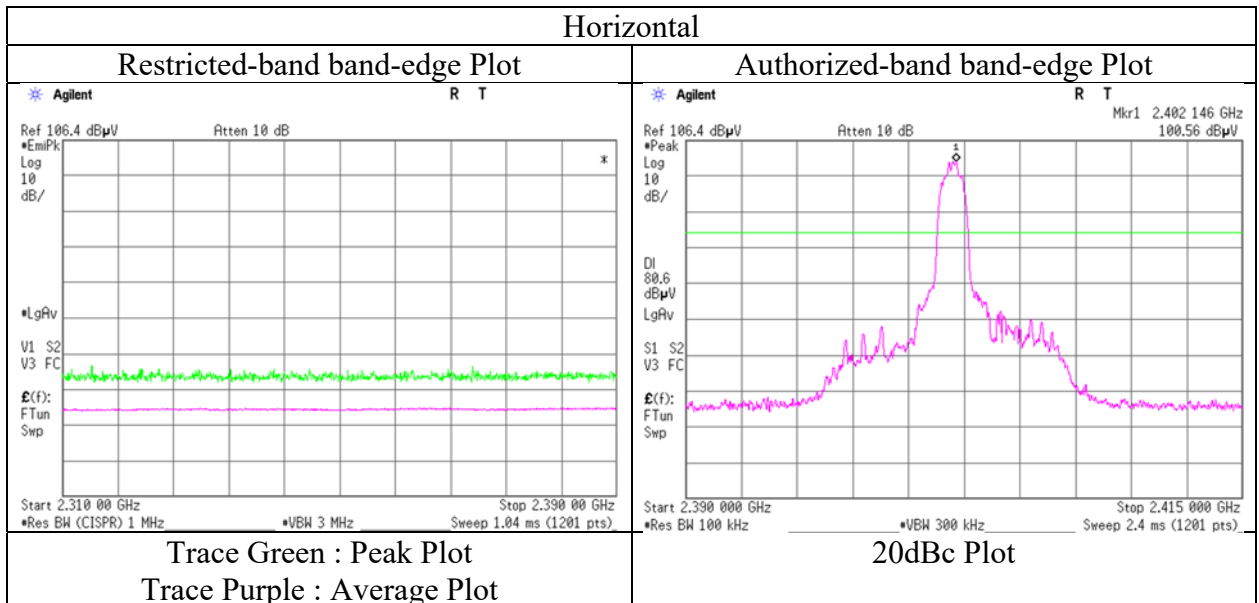

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 13477241H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3 No.3 No.3  
Date November 2, 2020 November 2, 2020 November 3, 2020  
Temperature / Humidity 22 deg. C / 40 % RH 23 deg. C / 50 % RH 23 deg. C / 38 % RH  
Engineer Yuta Moriya Takeshi Hiyaji Takeshi Hiyaji  
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)  
Mode Tx, Hopping Off, 3DH5 2441 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	51.200	QP	42.7	10.7	7.5	32.2	-	28.7	40.0	11.3	
Hori.	55.248	QP	37.6	9.2	7.6	32.2	-	22.2	40.0	17.8	
Hori.	71.683	QP	43.8	6.4	7.8	32.2	-	25.8	40.0	14.2	
Hori.	144.000	QP	34.2	14.9	8.7	32.1	-	25.7	43.5	17.8	
Hori.	276.000	QP	45.4	13.2	9.9	32.0	-	36.5	46.0	9.5	
Hori.	480.000	QP	41.4	17.2	11.3	32.0	-	37.9	46.0	8.1	
Hori.	4882.000	PK	40.9	31.4	7.7	31.6	-	48.4	73.9	25.5	
Hori.	7323.000	PK	42.5	36.2	9.1	32.6	-	55.1	73.9	18.8	Floor noise
Hori.	9764.000	PK	42.5	39.0	9.6	33.4	-	57.7	73.9	16.2	Floor noise
Hori.	4882.000	AV	33.7	31.4	7.7	31.6	1.1	42.3	53.9	11.6	
Hori.	7323.000	AV	34.4	36.2	9.1	32.6	-	47.0	53.9	6.9	Floor noise
Hori.	9764.000	AV	32.4	39.0	9.6	33.4	-	47.6	53.9	6.3	Floor noise
Vert.	51.200	QP	46.8	10.7	7.5	32.2	-	32.8	40.0	7.2	
Vert.	55.248	QP	47.0	9.2	7.6	32.2	-	31.6	40.0	8.4	
Vert.	71.683	QP	50.9	6.4	7.8	32.2	-	32.9	40.0	7.1	
Vert.	144.000	QP	40.6	14.9	8.7	32.1	-	32.1	43.5	11.4	
Vert.	276.000	QP	45.8	13.2	9.9	32.0	-	36.9	46.0	9.1	
Vert.	480.000	QP	41.2	17.2	11.3	32.0	-	37.7	46.0	8.3	
Vert.	4882.000	PK	41.1	31.4	7.7	31.6	-	48.6	73.9	25.3	
Vert.	7323.000	PK	42.0	36.2	9.1	32.6	-	54.7	73.9	19.3	Floor noise
Vert.	9764.000	PK	42.7	39.0	9.6	33.4	-	57.9	73.9	16.0	Floor noise
Vert.	4882.000	AV	33.9	31.4	7.7	31.6	1.1	42.5	53.9	11.5	
Vert.	7323.000	AV	34.3	36.2	9.1	32.6	-	47.0	53.9	7.0	Floor noise
Vert.	9764.000	AV	32.5	39.0	9.6	33.4	-	47.7	53.9	6.2	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.0\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$   
10 GHz - 26.5 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$



## Radiated Spurious Emission

Report No. 13477241H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3 No.3 No.3  
Date November 2, 2020 November 2, 2020 November 3, 2020  
Temperature / Humidity 22 deg. C / 40 % RH 23 deg. C / 50 % RH 23 deg. C / 38 % RH  
Engineer Yuta Moriya Takeshi Hiyaji Takeshi Hiyaji  
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz) (Below 1 GHz)  
Mode Tx, Hopping Off, 3DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	55.175	QP	35.4	9.2	7.6	32.2	-	20.0	40.0	20.0	
Hori.	84.000	QP	35.5	7.6	8.0	32.2	-	19.0	40.0	21.1	
Hori.	108.000	QP	25.0	11.2	8.3	32.1	-	12.3	43.5	31.2	
Hori.	144.000	QP	33.8	14.9	8.7	32.1	-	25.3	43.5	18.2	
Hori.	276.000	QP	43.9	13.2	9.9	32.0	-	35.0	46.0	11.0	
Hori.	480.000	QP	40.4	17.2	11.3	32.0	-	36.9	46.0	9.1	
Hori.	2483.500	PK	55.7	27.3	5.7	32.7	-	56.0	73.9	17.9	
Hori.	4960.000	PK	41.2	31.5	7.7	31.6	-	48.8	73.9	25.1	
Hori.	7440.000	PK	42.2	36.3	9.1	32.7	-	54.9	73.9	19.0	Floor noise
Hori.	9920.000	PK	42.9	38.8	9.6	33.5	-	57.8	73.9	16.1	Floor noise
Hori.	2483.500	AV	47.4	27.3	5.7	32.7	1.1	48.8	53.9	5.1	*1)
Hori.	4960.000	AV	33.9	31.5	7.7	31.6	1.1	42.6	53.9	11.4	
Hori.	7440.000	AV	34.3	36.3	9.1	32.7	-	46.9	53.9	7.0	Floor noise
Hori.	9920.000	AV	32.5	38.8	9.6	33.5	-	47.4	53.9	6.5	Floor noise
Vert.	55.175	QP	39.8	9.2	7.6	32.2	-	24.4	40.0	15.6	
Vert.	84.000	QP	46.4	7.6	8.0	32.2	-	29.9	40.0	10.2	
Vert.	108.000	QP	37.8	11.2	8.3	32.1	-	25.1	43.5	18.4	
Vert.	144.000	QP	38.4	14.9	8.7	32.1	-	29.9	43.5	13.6	
Vert.	276.000	QP	46.6	13.2	9.9	32.0	-	37.7	46.0	8.3	
Vert.	480.000	QP	40.8	17.2	11.3	32.0	-	37.3	46.0	8.7	
Vert.	2483.500	PK	54.7	27.3	5.7	32.7	-	55.0	73.9	18.9	
Vert.	4960.000	PK	43.1	31.5	7.7	31.6	-	50.7	73.9	23.3	
Vert.	7440.000	PK	42.5	36.3	9.1	32.7	-	55.2	73.9	18.7	Floor noise
Vert.	9920.000	PK	42.9	38.8	9.6	33.5	-	57.8	73.9	16.1	Floor noise
Vert.	2483.500	AV	46.8	27.3	5.7	32.7	1.1	48.1	53.9	5.8	*1)
Vert.	4960.000	AV	35.8	31.5	7.7	31.6	1.1	44.4	53.9	9.5	
Vert.	7440.000	AV	34.3	36.3	9.1	32.7	-	47.0	53.9	6.9	Floor noise
Vert.	9920.000	AV	32.7	38.8	9.6	33.5	-	47.6	53.9	6.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.0\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$   
10 GHz - 26.5 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

\*1) Not Out of Band emission(Leakage Power)

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**



Report No. 13477241H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.3  
Date November 2, 2020  
Temperature / Humidity 22 deg. C / 40 % RH  
Engineer Yuta Moriya  
(1 GHz - 10 GHz)  
Mode Tx, Hopping Off, 3DH5 2480 MHz

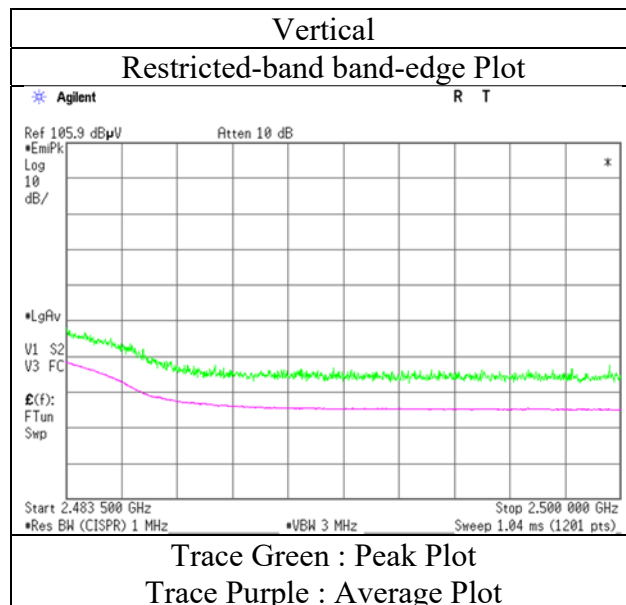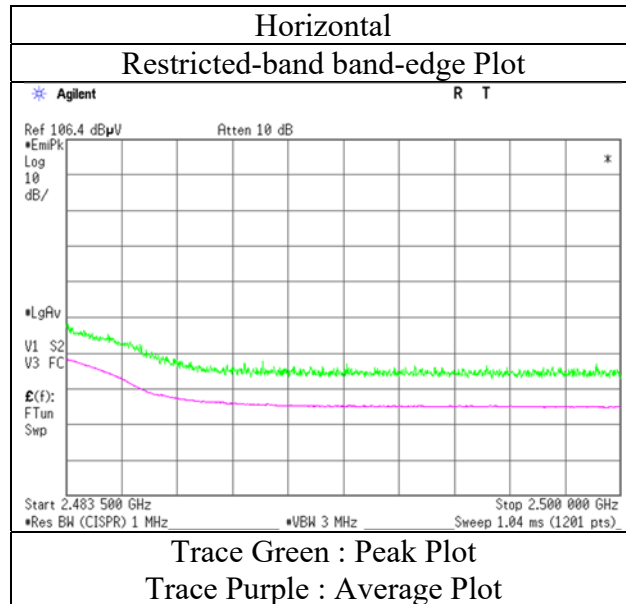

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case)**

Report No.	13477241H		
Test place	Ise EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	November 2, 2020	November 2, 2020	November 3, 2020
Temperature / Humidity	22 deg. C / 40 % RH	23 deg. C / 50 % RH	23 deg. C / 38 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)	Takeshi Hiyaji (10 GHz - 26.5 GHz)	Takeshi Hiyaji (Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz		

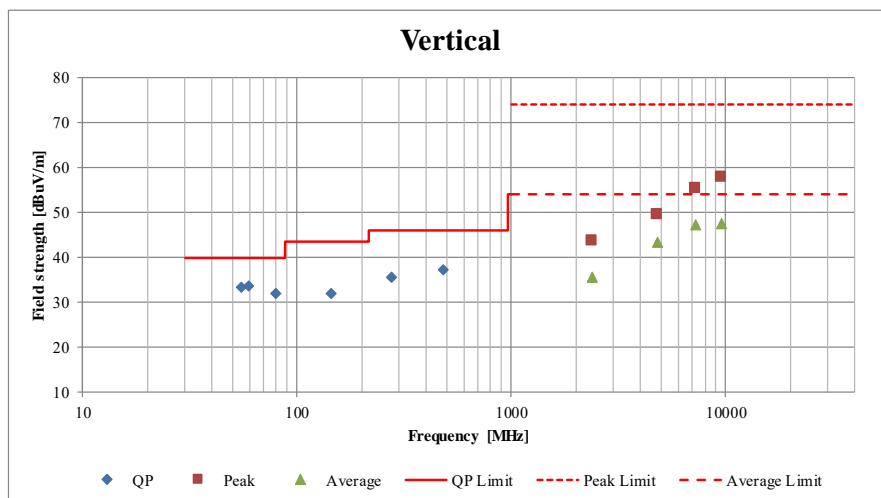
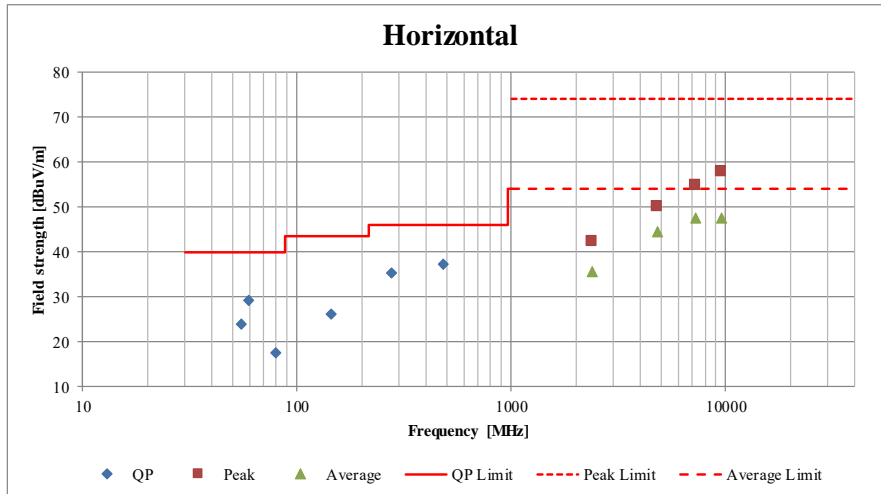


\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## Conducted Spurious Emission

Report No.	13477241H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	November 4, 2020
Temperature / Humidity	22 deg. C / 51 % RH
Engineer	Yuta Moriya
Mode	Tx, Hopping Off, DH5



### 2402 MHz

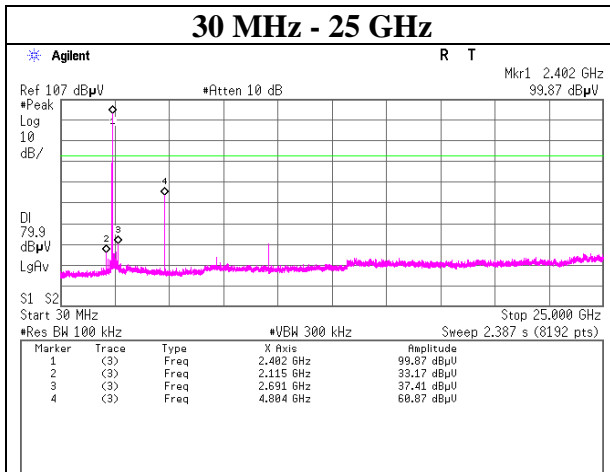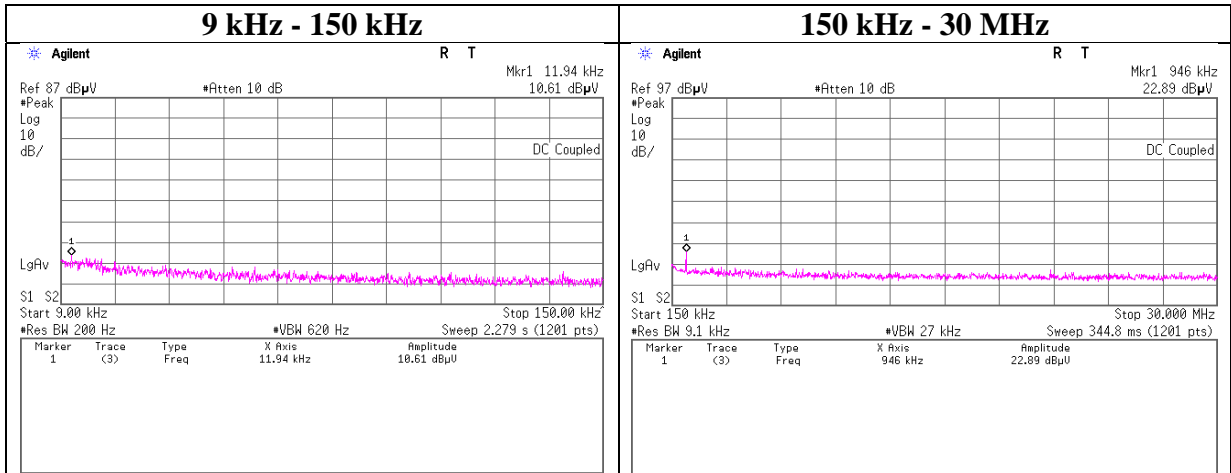

## Conducted Spurious Emission

Report No.	13477241H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	November 4, 2020
Temperature / Humidity	22 deg. C / 51 % RH
Engineer	Yuta Moriya
Mode	Tx, Hopping Off, DH5



### 2441 MHz

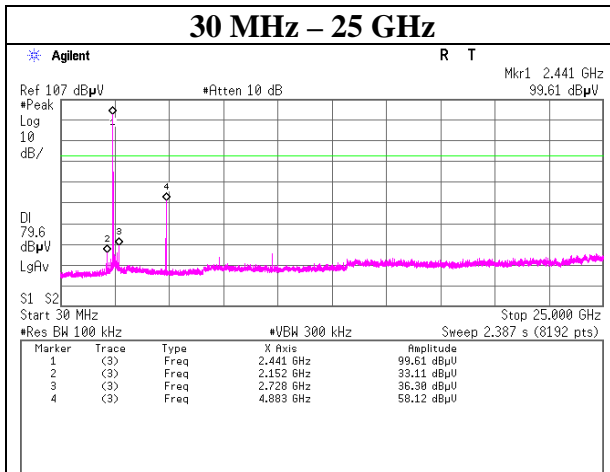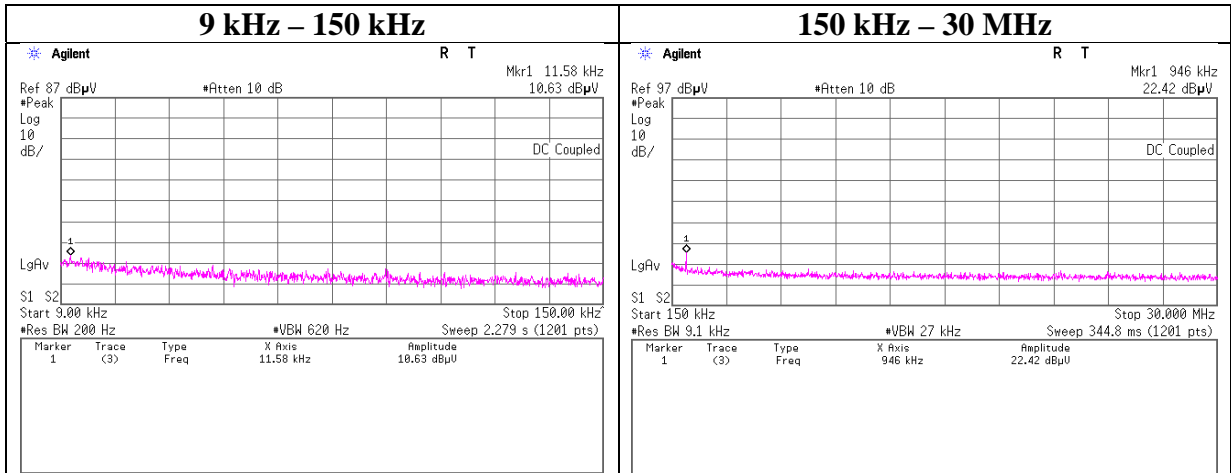

## Conducted Spurious Emission

Report No.	13477241H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	November 4, 2020
Temperature / Humidity	22 deg. C / 51 % RH
Engineer	Yuta Moriya
Mode	Tx, Hopping Off, DH5

### 2480 MHz

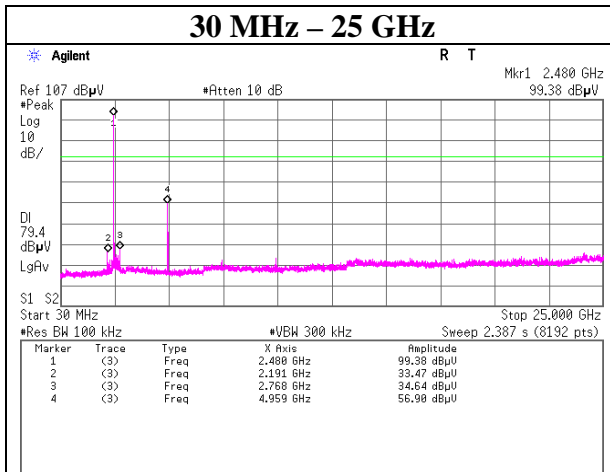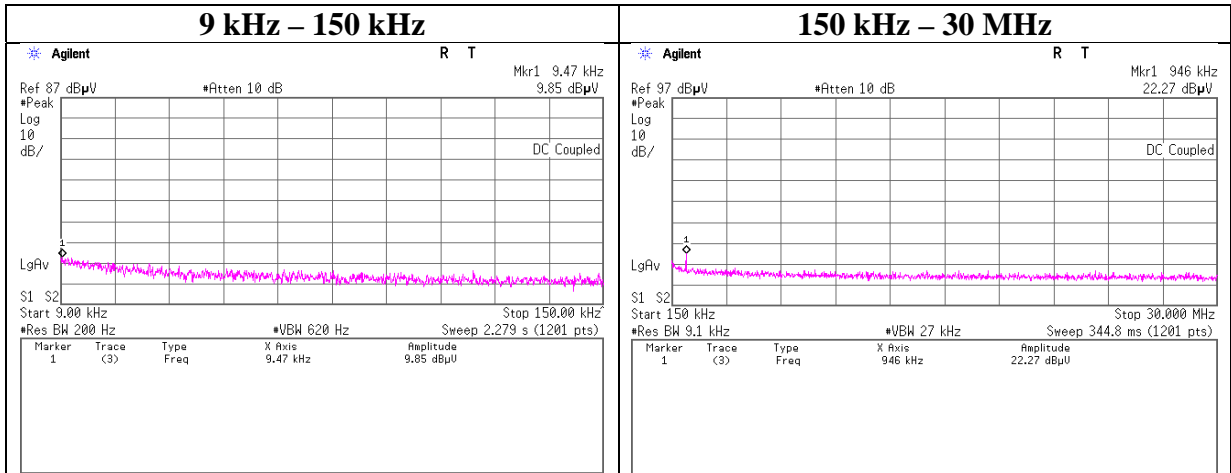

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Conducted Spurious Emission

Report No. 13477241H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date November 4, 2020  
 Temperature / Humidity 22 deg. C / 51 % RH  
 Engineer Yuta Moriya  
 Mode Tx, Hopping Off, 3DH5



### 2402 MHz

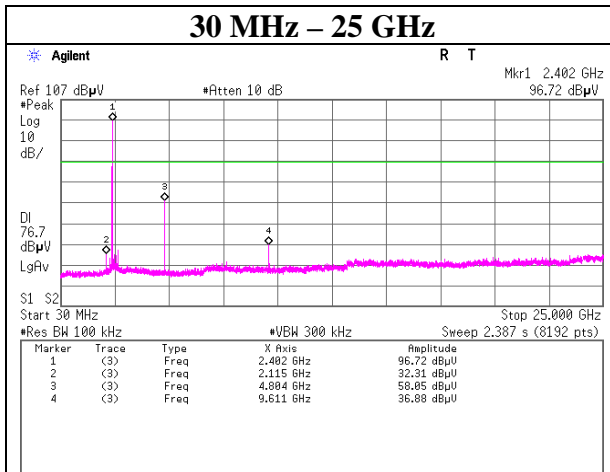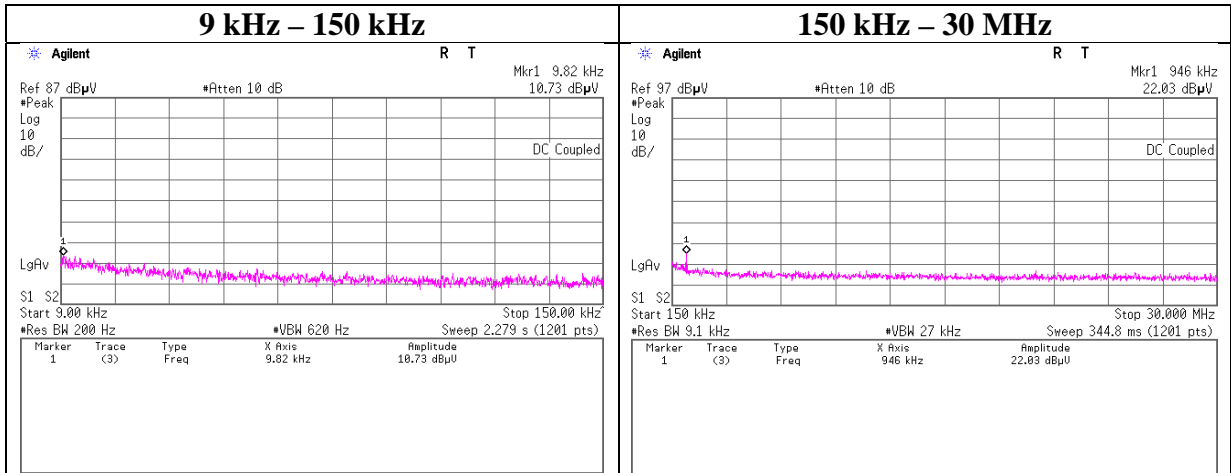

## Conducted Spurious Emission

Report No.	13477241H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	November 4, 2020
Temperature / Humidity	22 deg. C / 51 % RH
Engineer	Yuta Moriya
Mode	Tx, Hopping Off, 3DH5

### 2441 MHz

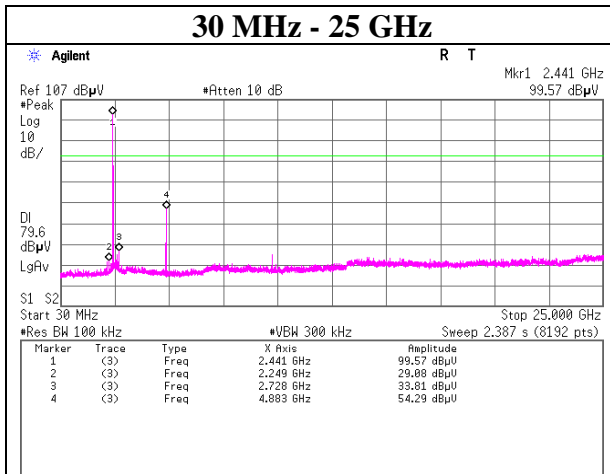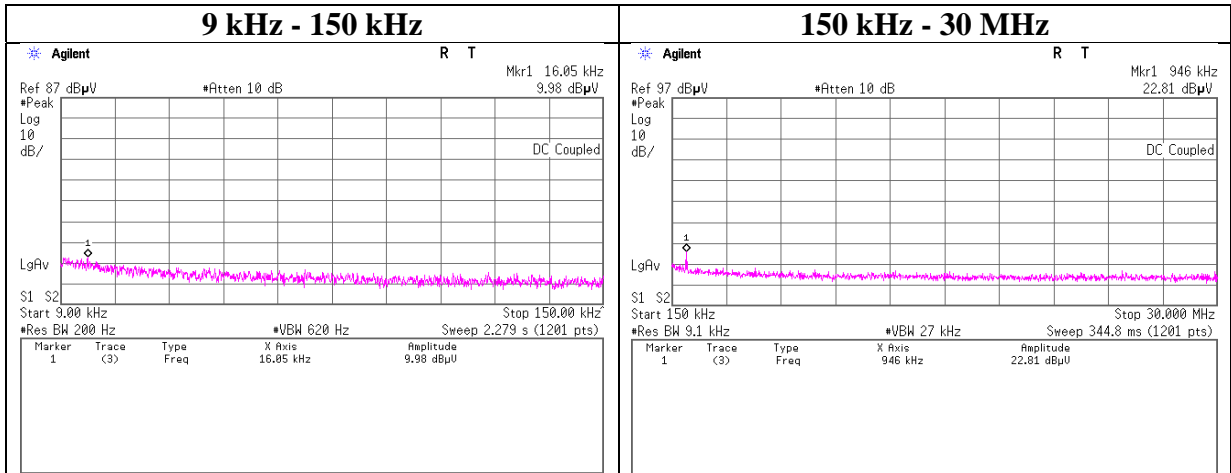

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999



Facsimile : +81 596 24 8124



## Conducted Spurious Emission

Report No. 13477241H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date November 4, 2020  
 Temperature / Humidity 22 deg. C / 51 % RH  
 Engineer Yuta Moriya  
 Mode Tx, Hopping Off, 3DH5


### 2480 MHz

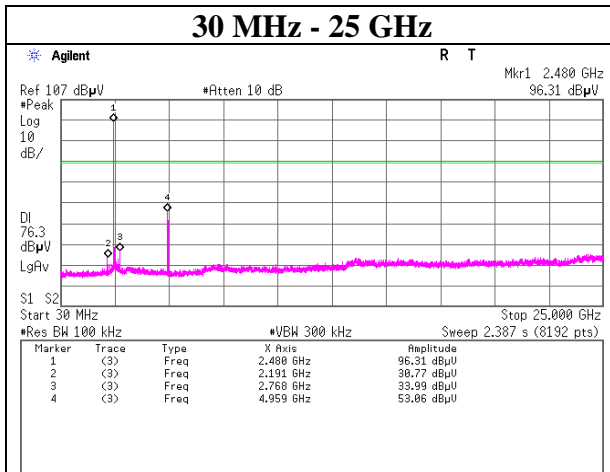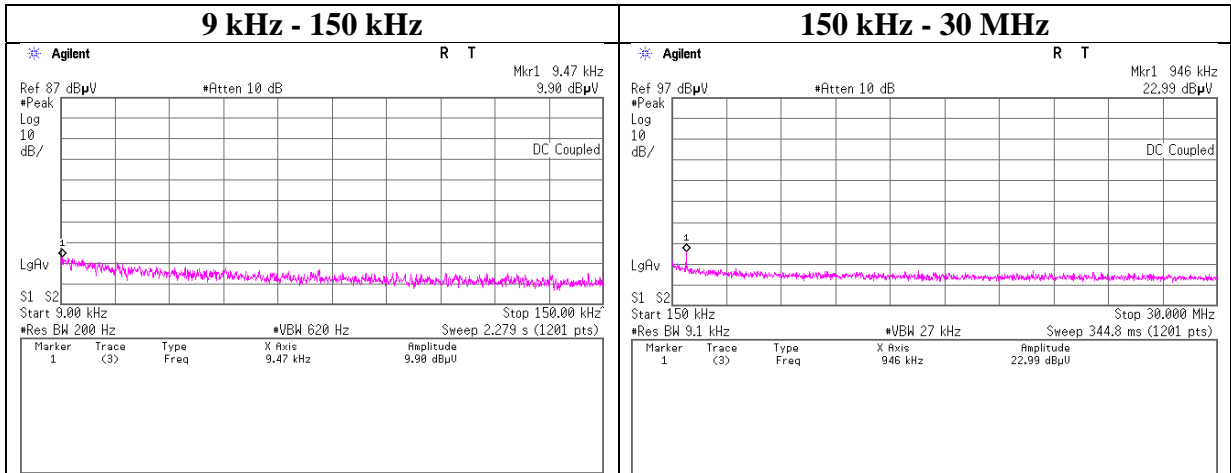


## Conducted Emission Band Edge compliance

Report No. 13477241H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date November 4, 2020  
 Temperature / Humidity 22 deg. C / 51 % RH  
 Engineer Yuta Moriya  
 Mode Tx DH5

### Hopping On

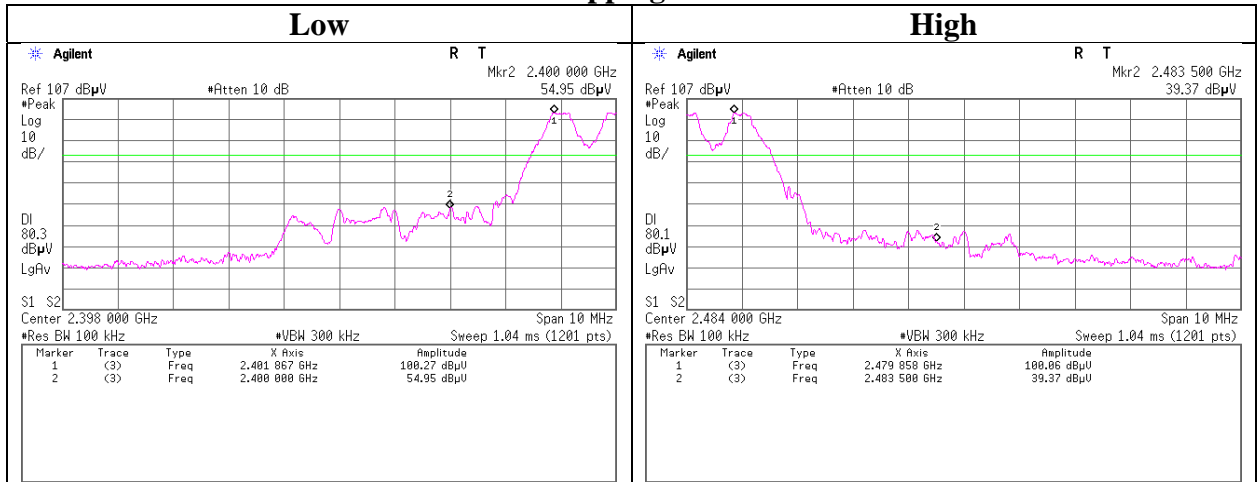

### Hopping Off

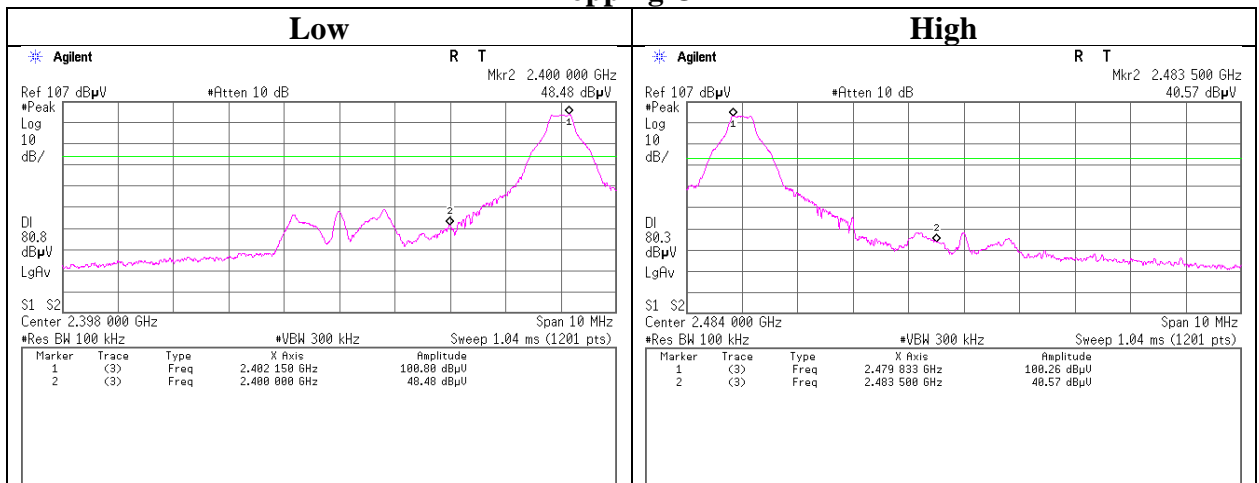

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


## Conducted Emission Band Edge compliance

Report No. 13477241H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date November 4, 2020  
 Temperature / Humidity 22 deg. C / 51 % RH  
 Engineer Yuta Moriya  
 Mode Tx 3DH5

### Hopping On

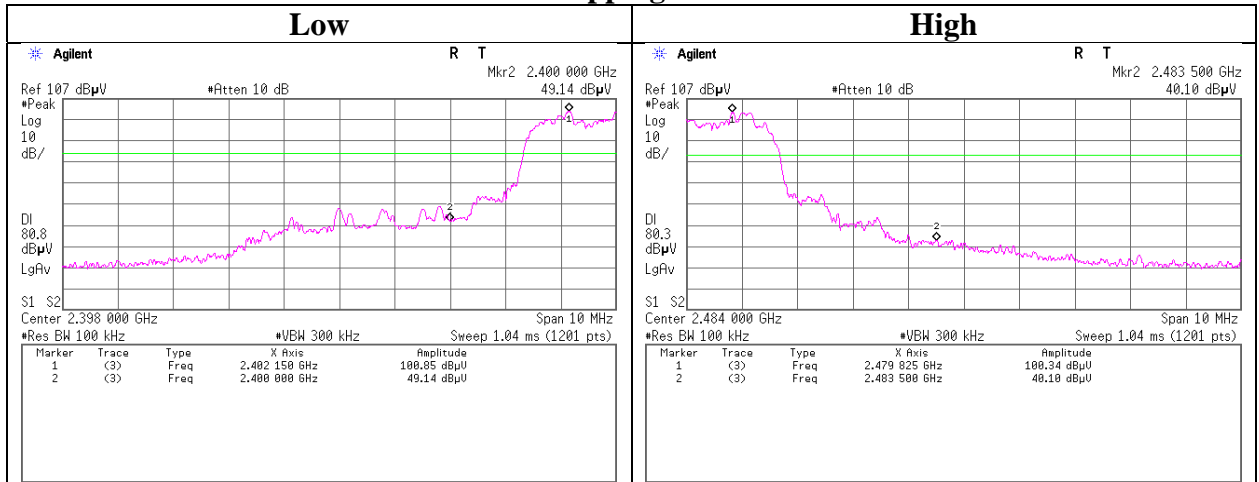

### Hopping Off

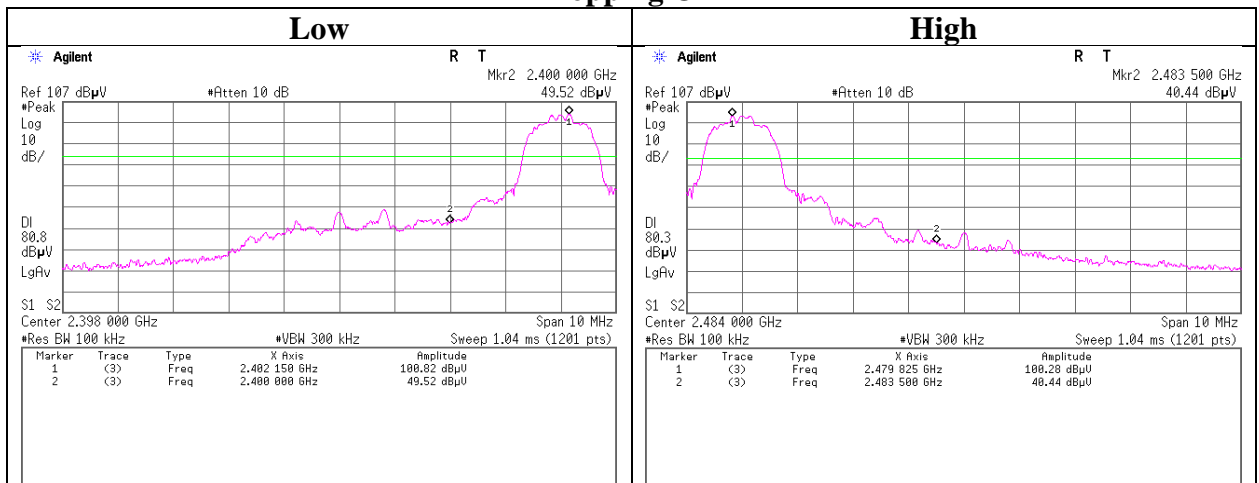

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## APPENDIX 2: Test instruments

### Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MAEC-03-SVSWR	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	2019/04/08	24
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	2020/01/07	12
RE	MMM-08	141532	DIGITAL HiTESTER	Hioki	3805	51201197	2020/01/06	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-M EMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	258	2020/10/01	12
RE	MPA-11	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	2020/03/24	12
RE	MCC-231	177964	Microwave Cable	Junkosha INC.	MMX221	1901S329(1m)/1902S579(5m)	2020/03/02	12
RE	MSA-04	141885	Spectrum Analyzer	Keysight Technologies Inc	E4448A	US44300523	2020/11/09	12
RE	MHF-25	141232	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	2020/09/23	12
AT	MPM-12	141809	Power Meter	ANRITSU	ML2495A	825002	2020/05/07	12
AT	MPSE-17	141830	Power sensor	ANRITSU	MA2411B	738285	2020/05/07	12
AT	MAT-23	141361	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	2020/04/21	12
AT	MCC-244	197219	Microwave cable	HUBER+SUNER	SF126E/11PC35/11PC35/2000MM	536999/126E	2020/03/23	12
AT	MOS-24	90289	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0005	2020/01/07	12
RE	MHA-16	141513	Horn Antenna 15-40GHz	Schwarzbeck Mess - Elektronik	BBHA9170	BBHA9170306	2020/05/21	12
RE	MAT-95	142314	Attenuator	Pasternack	PE7390-6	D/C 1504	2020/06/17	12
RE	MBA-03	141424	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	1915	2020/08/13	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	2020/07/06	12
RE	MLA-22	141266	Logperiodic Antenna(200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-191	2020/08/13	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	2020/02/10	12
RE	MTR-10	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	2020/03/10	12
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	2020/05/22	24
AT	MSA-15	141902	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187105	2020/10/15	12
AT	MOS-14	141561	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1401	2020/01/07	12
CE	MTR-10	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	2020/03/10	12
CE	MAT-64	141290	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	2019/12/02	12
CE	MCC-112	141216	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W/SFM14/suc oform141-PE/421-010/RFM-E321(SW)	-/00640	2020/07/06	12
CE	MLS-25	141537	LISN(AMN)	Schwarzbeck Mess - Elektronik	NSLK8127	8127-731	2020/07/21	12
CE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	2020/05/22	24
CE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	2020/01/07	12
CE	MMM-08	141532	DIGITAL HiTESTER	Hioki	3805	51201197	2020/01/06	12
CE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
CE	COTS-M EMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:           CE: Conducted Emission test  
                      RE: Radiated Emission test  
                      AT: Antenna Terminal Conducted test