



Inter**Lab**<sup>®</sup>

FCC Measurement/Technical Report on

Bluetooth Transceiver

Jabra BT8030

**Report Reference:** MDE\_GNNet\_0702\_FCCb

**Test Laboratory:**

7 layers AG  
Borsigstrasse 11  
40880 Ratingen  
Germany  
email: [info@7Layers.de](mailto:info@7Layers.de)



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
[www.7Layers.com](http://www.7Layers.com)

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Markus Becker  
Vorstand • Board:  
Dr. Hans-Jürgen Meckelburg  
René Schildknecht

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

InterLab<sup>®</sup> is a registered trademark of 7 layers AG



## Table of Contents

<b>0 Summary</b>	<b>3</b>
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
<b>1 Administrative Data</b>	<b>6</b>
1.1 Testing Laboratory	6
1.2 Project Data	6
1.3 Applicant Data	6
1.4 Manufacturer Data	6
<b>2 Product labelling</b>	<b>7</b>
2.1 FCC ID label	7
2.2 Location of the label on the EUT	7
<b>3 Test object Data</b>	<b>8</b>
3.1 General EUT Description	8
3.2 EUT Main components	9
3.3 Ancillary Equipment	9
3.4 EUT Setups	10
3.5 Operating Modes	10
<b>4 Test Results</b>	<b>11</b>
4.1 Conducted emissions (AC power line)	11
4.2 Occupied bandwidth	13
4.3 Peak power output	15
4.4 Spurious RF conducted emissions	17
4.5 Spurious radiated emissions	19
4.6 Band edge compliance	24
4.7 Dwell time	27
4.8 Channel separation	29
4.9 Number of hopping frequencies	30
<b>5 Test Equipment</b>	<b>31</b>
<b>6 Photo Report</b>	<b>34</b>
<b>7 Setup Drawings</b>	<b>37</b>
<b>8 Annex measurement plots</b>	<b>38</b>
8.1 AC Mains conducted	38
8.2 Occupied bandwidth	39
8.3 Peak power output	42
8.4 Band edge compliance conducted and Spurious RF conducted emissions	45
8.5 Band edge compliance radiated	51
8.6 Radiated emissions (f<30MHz)	52
8.7 Dwell time	54
8.8 Channel separation	55
8.9 Number of hopping frequencies	56



## **0 Summary**

### **0.1 Technical Report Summary**

#### **Type of Authorization**

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-06 Edition) and 15 (10-1-06 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

#### **Note:**

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000

Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2003 is applied.

#### **Summary Test Results:**

**The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.**



## 0.2 Measurement Summary

---

### FCC Part 15, Subpart C § 15.207

Conducted emissions (AC power line)			
The measurement was performed according to ANSI C63.4			2003
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 5	Setup_01	AC Port (power line)	passed

---

### FCC Part 15, Subpart C § 15.247 (a) (1)

Occupied bandwidth			
The measurement was performed according to FCC § 15.31			10-1-06
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_02	Temp.ant.connector	passed
op-mode 2	Setup_02	Temp.ant.connector	passed
op-mode 3	Setup_02	Temp.ant.connector	passed

---

### FCC Part 15, Subpart C § 15.247 (b) (1)

Peak power output			
The measurement was performed according to FCC § 15.31			10-1-06
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_02	Temp.ant.connector	passed
op-mode 2	Setup_02	Temp.ant.connector	passed
op-mode 3	Setup_02	Temp.ant.connector	passed

---

### FCC Part 15, Subpart C § 15.247 (d)

Spurious RF conducted emissions			
The measurement was performed according to FCC § 15.31			10-1-06
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_02	Temp.ant.connector	passed
op-mode 2	Setup_02	Temp.ant.connector	passed
op-mode 3	Setup_02	Temp.ant.connector	passed

---

### FCC Part 15, Subpart C § 15.247 (d), § 15.35 (b), § 15.209

Spurious radiated emissions			
The measurement was performed according to ANSI C63.4			2003
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_03	Enclosure	passed
op-mode 2	Setup_03	Enclosure	passed
op-mode 3	Setup_03	Enclosure	passed

---

### FCC Part 15, Subpart C § 15.247 (d)

Band edge compliance			
The measurement was performed according to FCC § 15.31			10-1-06 / 2003
(10-1-06) / ANSI C63.4 (2003)			
<b>OP-Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	Setup_02	Temp.ant.connector	passed
op-mode 3	Setup_02	Temp.ant.connector	passed
op-mode 3	Setup_03	Enclosure	passed

**FCC Part 15, Subpart C**

**§ 15.247 (a) (1) (iii)**

Dwell time

The measurement was performed according to FCC § 15.31

10-1-06

OP-Mode	Setup	Port	Final Result
op-mode 2	Setup_02	Temp.ant.connector	passed

**FCC Part 15, Subpart C**

**§ 15.247 (a) (1)**

Channel separation

The measurement was performed according to FCC § 15.31

10-1-06

OP-Mode	Setup	Port	Final Result
op-mode 4	Setup_02	Temp.ant.connector	passed

**FCC Part 15, Subpart C**

**§ 15.247 (a) (iii)**

Number of hopping frequencies

The measurement was performed according to FCC § 15.31

10-1-06

OP-Mode	Setup	Port	Final Result
op-mode 4	Setup_02	Temp.ant.connector	passed



7 layers AG, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

Responsible for  
Accreditation Scope:

*M. Schulze*

Responsible  
for Test Report:

*A. Pelt*



## **1 Administrative Data**

### **1.1 Testing Laboratory**

Company Name: 7 Layers AG  
Address Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:  
- Deutscher Akkreditierungs Rat DAR-Registration no. DAT-P-192/99-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka  
Dipl.-Ing. Robert Machulec  
Dipl.-Ing. Thomas Hoell

Report Template Version: 2007-07-19

### **1.2 Project Data**

Responsible for testing and report: Dipl.-Ing. Andreas Petz  
Date of Test(s): 2007-05-10 to 2007-07-26  
Date of Report: 2007-08-14

### **1.3 Applicant Data**

Company Name: GN Netcom A/S  
Address: Lautrupbjerg 7  
DK-2750 Ballerup  
Denmark  
Contact Person: Mr. Tom Ringtved

### **1.4 Manufacturer Data**

Company Name: please see applicant data  
Address:  
Contact Person:



## **2 Product labelling**

### **2.1 FCC ID label**

At the time of the report there was no FCC label available.

### **2.2 Location of the label on the EUT**

see above

### 3 Test object Data

#### 3.1 General EUT Description

<b>Equipment under Test</b>	Bluetooth Transceiver
<b>Type Designation:</b>	Jabra BT8030
<b>Kind of Device:</b>	Headset, Mobile phone accessory
<b>(optional)</b>	
<b>Voltage Type:</b>	DC (internal battery) — AC / DC (AC adapter)
<b>Voltage level:</b>	3.7 V — 115 V / 5.0 V
<b>Modulation Type:</b>	GFSK

#### General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, the Bluetooth technology defines 79 RF channels spaced 1 MHz (2402 - 2480 MHz). The actual RF channel is chosen from a pseudo-random hopping sequence through the 79 channels. A channel is occupied for a defined amount of time slots, with a nominal slot length of 625  $\mu$ s. The maximum dwell time on one channel is defined by the packet type and is 0.625 ms for DH1 packets, 1.875 ms for DH3 and 3.125 ms for DH5. The nominal hop rate is 1600 hops/s for DH1, 1600/3 for DH3 and 1600/5 for DH5. All frequencies are equally used. The maximum nominal average time of occupancy is 0.4 s within a period of 79\*0.4 seconds.

#### Specific product description for the EUT:

The EUT is a headset/handsfree which uses Bluetooth technology to be connected to e.g. a mobile phone. Additionally, it can be used for music playback when it is connected via USB cable to a PC. It supports both, usage as headset worn at the ears and usage as external speaker, e.g. laying on a table.

#### The EUT provides the following ports:

##### Ports

Temporary antenna connector  
Enclosure  
AC Port (power line)  
USB port (Mini-USB connector)  
USB cable (length: 2.0 m)

**The main components of the EUT are listed and described in Chapter 3.2**





### 3.2 EUT Main components

#### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: CJ020a01)	Bluetooth Headset	Jabra BT8030	00168FF21141	28-00521	21a	2007-05-02
Remark: EUT A is equipped with a temporary antenna conector.						
EUT B (Code: CJ020c01)	Bluetooth Headset	Jabra BT8030	00168FF21099	28-00521	21a	2007-05-02
Remark: EUT B is equipped with an integral antenna (applicant's declaration: maximum gain= 0.0 dBi).						
EUT C (Code: CJ020d01)	Bluetooth Headset	Jabra BT8030	00168FF2108F	28-00521	21a	2007-05-02
Remark: EUT C is equipped with an integral antenna (applicant's declaration: maximum gain= 0.0 dBi).						

**NOTE: The short description is used to simplify the identification of the EUT in this test report.**

### 3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	FCC ID
AE1 (Code: CJ020CHc1)	AC adapter PHIHONG	PSAA05A-050 P/N: 26-01004	01 (Engineering Sample)	REV:01	-	-
AE2	Laptop	IBM 9467-54G	L3-AA471	-	-	-
AE3	AC Adapter	Lenovo 92P1103	11S92P1103 Z1ZBEF716 1JH	REV 05	-	-
AE4	TFT Monitor	LG Flatron L1740BQ	509WANF1 W607	-	-	BEJL17NU
AE5	Mouse	Logitech M-BB48	LZC905054 78	-	-	-
AE6	Keyboard	CHERRY RS 6000 USB ON	G 0000273 2P28	-	-	-
AE7	USB cable	BizLink Technology Type B to Mini-B	-	-	-	-



### 3.4 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_01	EUT B + AE1 + AE2 + AE3 + AE4 + AE5 + AE6 + AE7	setup for the test "Conducted emissions (AC power line)"
Setup_02	EUT A	setup for conducted tests
Setup_03	EUT C	setup for radiated tests

### 3.5 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	The EUT transmits on 2402 MHz	Loopback mode
op-mode 2	The EUT transmits on 2441 MHz	Loopback mode
op-mode 3	The EUT transmits on 2480 MHz	Loopback mode
op-mode 4	The EUT is in Hopping mode	The EUT is hopping on 79 channels
op-mode 5	Bluetooth scan mode, charging by AC adapter AE1, music playback via USB	no radio link established, charging the internal battery



## 4 Test Results

### 4.1 Conducted emissions (AC power line)

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** ANSI C 63.4, 2003

#### 4.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

##### **Step 1: Preliminary scan**

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

##### **Step 2: Final measurement**

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.



#### 4.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dBµV)	AV Limit (dBµV)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dBµV) = 20 log (Limit (µV)/1µV).

#### 4.1.3 Test Protocol

Temperature: 26 °C  
 Air Pressure: 1019 hPa  
 Humidity: 44 %

Op. Mode	Setup	Port
op-mode 5	Setup_01	AC Port (power line)

Power line	Frequency MHz	Measured value dBµV	Delta to limit dBµV	Remarks
-	-	-	-	-

Remark: Please see annex for the measurement plot.  
 No spurious emissions found during the preliminary scan so no final measurement was performed.

#### 4.1.4 Test result: Conducted emissions (AC power line)

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 5	passed



## 4.2 Occupied bandwidth

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** FCC §15.31, 10-1-06

### 4.2.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 10 kHz.

The EUT was connected to the spectrum analyzer via a short coax cable.

### 4.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### **Implication by the test laboratory:**

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system's operates with an output power no greater than 125 mW (21.0 dBm):  
Implicit Limit: Max. 20 dB BW =  $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$
2. If the system's output power exceeds 125 mW (21.0 dBm):  
Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) =  $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm).

For the results, please refer to the related chapter of this report.

Therefore the limit is determined as 1.5 MHz.



### 4.2.3 Test Protocol

Temperature: 26 °C  
 Air Pressure: 1018 hPa  
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_02	Temp.ant.connector

20 dB bandwidth MHz	Remarks
0.822	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2	Setup_02	Temp.ant.connector

20 dB bandwidth MHz	Remarks
0.806	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3	Setup_02	Temp.ant.connector

20 dB bandwidth MHz	Remarks
0.830	-

Remark: Please see annex for the measurement plot.

### 4.2.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed



### 4.3 Peak power output

**Standard**     FCC Part 15, 10-1-06  
                      Subpart C

**The test was performed according to:** FCC §15.31, 10-1-06

#### 4.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The resolution bandwidth for measuring the output power was 1 MHz.

The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

#### 4.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm



### 4.3.3 Test Protocol

Temperature: 26 °C  
 Air Pressure: 1018 hPa  
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_02	Temp.ant.connector

Output power dBm	Remarks
3.46	The EIRP including antenna gain (0.0 dBi) is 3.46 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2	Setup_02	Temp.ant.connector

Output power dBm	Remarks
3.72	The EIRP including antenna gain (0.0 dBi) is 3.72 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3	Setup_02	Temp.ant.connector

Output power dBm	Remarks
3.11	The EIRP including antenna gain (0.0 dBi) is 3.11 dBm

Remark: Please see annex for the measurement plot.

### 4.3.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed





#### **4.4 Spurious RF conducted emissions**

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** FCC §15.31, 10-1-06

##### **4.4.1 Test Description**

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance” (cf. chapter 4.6). This value is used to calculate the 20 dBc limit.

##### **4.4.2 Test Requirements / Limits**

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.



#### 4.4.3 Test Protocol

Temperature: 26 °C  
 Air Pressure: 1018 hPa  
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_02	Temp.ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6936	-35.75	3.52	-16.48	19.27
20797	-36.14	3.52	-16.48	19.66

Remark: No (further) spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2	Setup_02	Temp.ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6936	-35.14	3.73	-16.27	18.87

Remark: No (further) spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3	Setup_02	Temp.ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6885	-35.65	3.12	-16.88	18.77

Remark: No (further) spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

#### 4.4.4 Test result: Spurious RF conducted emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed



## 4.5 Spurious radiated emissions

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** ANSI C 63.4, 2003

### 4.5.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

#### 1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

##### **Step 1:** pre measurement

- Anechoic chamber
- Antenna distance: 10m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### **Step 2:** final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

#### 2. Measurement above 30 MHz and up to 1 GHz

##### **Step 1:** Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s

- Turntable angle range:  $-180$  to  $180$  °
- Turntable step size:  $90$ °
- Height variation range:  $1$  –  $3$ m
- Height variation step size:  $2$ m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

**Step 2:** second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth:  $120$  kHz
- Measuring time:  $100$ ms
- Turntable angle range:  $-180$  to  $180$  °
- Turntable step size:  $45$ °
- Height variation range:  $1$  –  $4$ m
- Height variation step size:  $0.5$ m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable):  $45$ °
- Antenna height:  $0.5$ m

**Step 3:** final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency the turntable azimuth and antenna height, which was determined in step 2, will be adjusted. The turntable azimuth will be slowly varied by  $\pm 22.5$ ° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by  $\pm 25$  cm around the antenna height determined in step 3. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth:  $120$  kHz
- Measuring time:  $100$ ms
- Turntable angle range:  $-22.5$ ° to  $+ 22.5$  ° around the value determined in step 2
- Height variation range:  $-0.25$ m to  $+ 0.25$ m around the value determined in step 2

**Step 4:** final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak( $< 1$ GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth:  $120$  kHz
- Measuring time:  $1$ s



### 3. Measurement above 1GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- RBW = VBW = 100 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

#### 4.5.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

### 4.5.3 Test Protocol

Temperature: 25 - 28 °C  
 Air Pressure: 1008 - 1017 hPa  
 Humidity: 37 - 42 %

#### 4.5.3.1 Measurement up to 30 MHz

Op. Mode	Setup	Port
op-mode 2	Setup_03	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
0°	-	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found therefore step 2 was not performed. The found peak at 99.5kHz is emission from loop antenna power supply.

#### 4.5.3.2 Measurement above 30 MHz

Op. Mode	Setup	Port
op-mode 1	Setup_03	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



**Op. Mode**      **Setup**      **Port**  
 op-mode 2      Setup\_03      Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

**Op. Mode**      **Setup**      **Port**  
 op-mode 3      Setup\_03      Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	2483.5	-	49.22	36.53	-	74.0	54.0	24.78	17.47

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

#### 4.5.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C

Op. Mode	Result
op-mode 1	passed
op-mode 2	passed
op-mode 3	passed



## 4.6 Band edge compliance

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** ANSI C 63.4, 2003  
FCC §15.31, 10-1-06

### 4.6.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

Analyzer settings for radiated measurement:

- Detector: Peak, Average
- RBW = VBW = 100 kHz

### 4.6.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the **lower band edge** the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the **higher band edge** the limit is "specified in Section 15.209(a)".



### 4.6.3 Test Protocol

#### 4.6.3.1 Lower band edge

##### Conducted measurement

Temperature: 26 °C  
 Air Pressure: 1018 hPa  
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_02	Temp.ant.connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2400.00	-36.02	3.52	-16.48	19.54

Remark: Please see annex for the measurement plot.

#### 4.6.3.2 Higher band edge

##### Conducted measurement

Temperature: 26 °C  
 Air Pressure: 1018 hPa  
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 3	Setup_02	Temp.ant.connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2483.50	-43.19	3.12	-16.88	26.31



**Radiated measurement**

Temperature: 25 °C  
 Air Pressure: 1008 hPa  
 Humidity: 42 %

<b>Op. Mode</b>	<b>Setup</b>	<b>Port</b>
op-mode 3	Setup_03	Enclosure

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit Peak dBµV/m	Limit AV dBµV/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vertical + horizontal	49.22	36.53	74.00	54.00	24.78	17.47

Remark: Please see annex for the measurement plot.

**4.6.4 Test result: Band edge compliance**

FCC Part 15, Subpart C	<b>Op. Mode</b>	<b>Result</b>
	op-mode 1	passed
	op-mode 3	passed



## 4.7 Dwell time

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** FCC §15.31, 10-1-06

### 4.7.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the dwell time measurements and was connected to the spectrum analyzer via a short coax cable. Bluetooth technology defines DH1, DH3 and DH5 packets. The time slot length is only measured for the longest packet type that is supported by the EUT (worst case). The dwell time is calculated by:

Dwell time = time slot length \* hop rate / number of hopping channels \* 31.6 s

with:

- hop rate =  $1600 * 1/s$  for DH1 packets =  $1600 \text{ s}^{-1}$
- hop rate =  $1600/3 * 1/s$  for DH3 packets =  $533.33 \text{ s}^{-1}$
- hop rate =  $1600/5 * 1/s$  for DH5 packets =  $320 \text{ s}^{-1}$
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

### 4.7.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.



### 4.7.3 Test Protocol

Temperature: 26 °C  
Air Pressure: 1018 hPa  
Humidity: 38 %

Op. Mode	Setup	Port
op-mode 2	Setup_02	Temp.ant.connector

Packet type	Time slot length ms	Dwell time	Dwell time ms
DH5	2.966	time slot length * 1600/5 /79 * 31.6	380

Remark: Please see annex for the measurement plots.

### 4.7.4 Test result: Dwell time

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2 DH5	passed



## 4.8 Channel separation

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** FCC §15.31, 10-1-06

### 4.8.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the channel separation measurements. The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: 2441 MHz
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

### 4.8.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 4.8.3 Test Protocol

Temperature: 26 °C  
Air Pressure: 1018 hPa  
Humidity: 38 %

Op. Mode	Setup	Port
op-mode 4	Setup_02	Temp.ant.connector

Channel separation MHz	Remarks
1.0	-

Remark: Please see annex for the measurement plot.

### 4.8.4 Test result: Channel separation

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 4	passed



#### 4.9 Number of hopping frequencies

**Standard** FCC Part 15, 10-1-06  
Subpart C

**The test was performed according to:** FCC §15.31, 10-1-06

##### 4.9.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Start frequency: 2400 MHz
- Stop frequency: 2484 MHz
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

##### 4.9.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

##### 4.9.3 Test Protocol

Temperature: 26 °C  
Air Pressure: 1018 hPa  
Humidity: 38 %

Op. Mode	Setup	Port
op-mode 4	Setup_02	Temp.ant.connector

Number of hopping channels	Remarks
79	-

Remark: Please see annex for the measurement plot.

##### 4.9.4 Test result: Number of hopping frequencies

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 4	passed

## 5 Test Equipment

### *EUT Digital Signalling System*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz
Signalling Unit for Bluetooth Spurious Emissions	PTW60	100004	Rohde & Schwarz
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz

### *EMI Test System*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Comparison Noise Emitter	CNE III	99/016	York
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz
Signal Generator	SMR 20	846834/008	Rohde & Schwarz

### *EMI Radiated Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel
Biconical dipole	VUBA 9117	9117108	Schwarzbeck
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32	849785	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35	896037	Miteq
Broadband Amplifier 45MHz-27GHz	JS4-00102600-42	619368	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2 + W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A + UFB293C	W18.02-2 + W38.02-2	Rosenberger-Microcoax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
KUEP pre amplifier	Kuep 00304000	001	7layers
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz
Pyramidal Horn Antenna 26.5 GHz	Model 3160-09	9910-1184	EMCO

### EMI Conducted Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz

### Auxiliary Test Equipment

Equipment	Type	Serial No.	Manufacturer
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel
Digital Multimeter 01	Voltcraft M-3860M	IJ096055	Conrad
Digital Multimeter 02	Voltcraft M-3860M	IJ095955	Conrad
Digital Oscilloscope	TDS 784C	B021311	Tektronix
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz
Notch Filter ultra stable	WRCA800/960-6E	24	Wainwright
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	838164/004	Rohde & Schwarz
Temperature Chamber	VT 4002	58566002150010	Vötsch
Temperature Chamber	KWP 120/70	59226012190010	Weiss
ThermoHygro Datalogger 03	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH

### Anechoic Chamber

Equipment	Type	Serial No.	Manufacturer
Air Compressor (pneumatic)			Atlas Copco
Controller	CO 2000	CO2000/328/12470406 /L	Innco innovative constructions GmbH
EMC Camera	CE-CAM/1		CE-SYS
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter telephone systems / modem	B84312-C40-B1		Siemens&Matsushita
Filter Universal 1A	B84312-C30-H3		Siemens&Matsushita
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia
Turntable	DS 420S	420/573/99	HD GmbH, H. Deisel
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H. Deisel





*7 layers Bluetooth Full RF Test Solution*

*Bluetooth RF Conformance Test System TS8960*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
10 MHz Reference	MFS	5489/001	Efratom
Power Meter 832025/059	NRVD	832025/059	Rohde & Schwarz
Power Sensor A 832279/013	NRV-Z1	832279/013	Rohde & Schwarz
Power Sensor B 832279/015	NRV-Z1	832279/015	Rohde & Schwarz
Power Supply	E3632A	MY40003776	Agilent
Power Supply	PS-2403D	-	Conrad
RF Step Attenuator 833695/001	RSP	833695/001	Rohde & Schwarz
Rubidium Frequency Normal	MFS	002	Efratom
Signal Analyzer FS1Q26 832695/007	FS1Q26	832695/007	Rohde & Schwarz
Signal Generator 833680/003	SMP 03	833680/003	Rohde & Schwarz
Signal Generator A 834344/002	SMIQ03B	834344/002	Rohde & Schwarz
Signal Generator B 832870/017	SMIQ03B	832870/017	Rohde & Schwarz
Signal Switching and Conditioning Unit	SSCU	338826/005	Rohde & Schwarz
Signalling Unit PTW60 838312/014	PTW60 for TS8960	838312/014	Rohde & Schwarz
System Controller 829323/008	PSM12	829323/008	Rohde & Schwarz

## 6 Photo Report



**Photo 1:** Test setup for radiated measurements (above 1 GHz)



**Photo 2:** Test setup for radiated measurements (30 MHz up to 1 GHz)



**Photo 3:** Test setup for radiated measurements (below 30 MHz)



**Photo 4:** Test setup for conducted measurements




**Photo 5:** EUT (front side)



**Photo 6:** AC adapter



## 7 Setup Drawings

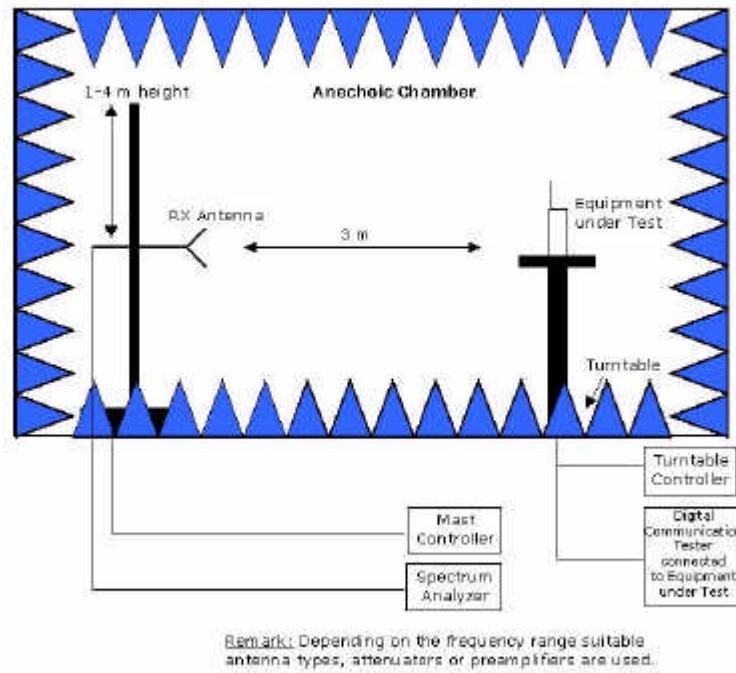


**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

## 8 Annex measurement plots

### 8.1 AC Mains conducted

#### Op. Mode

op-mode 5

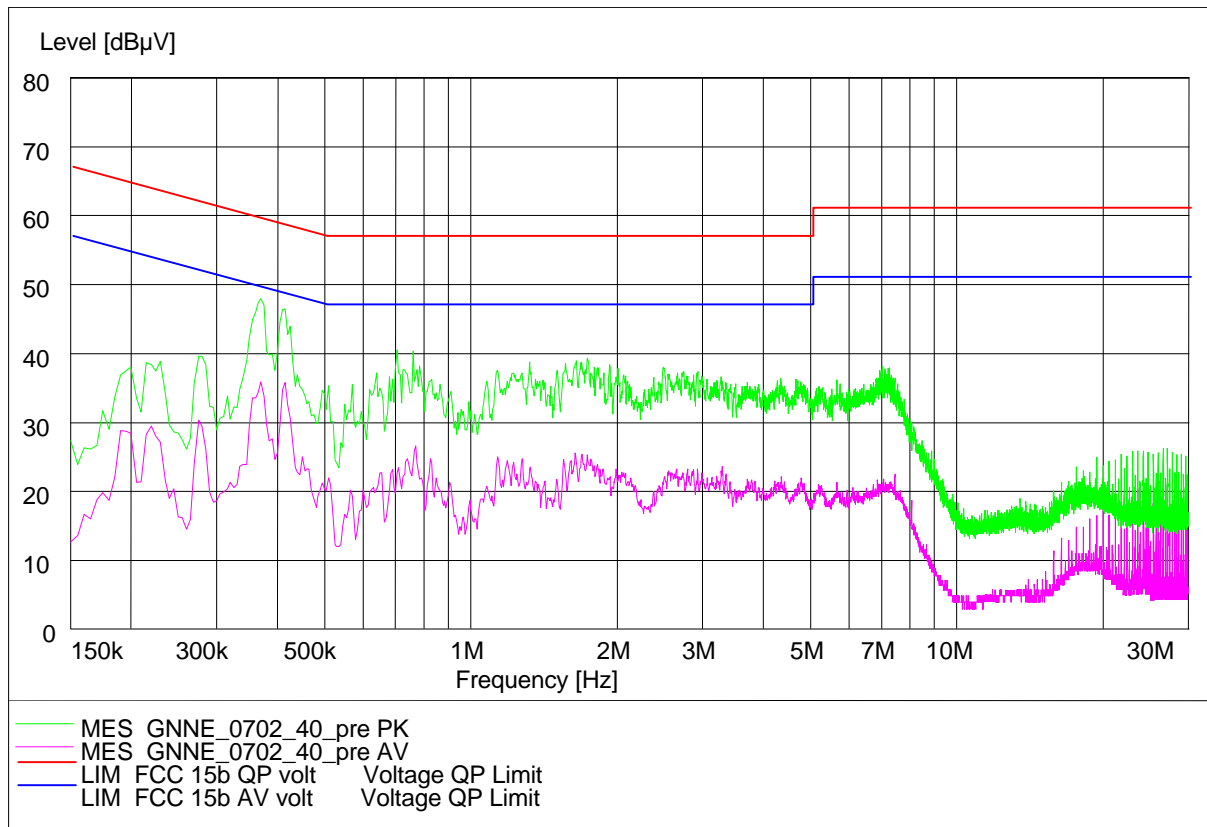


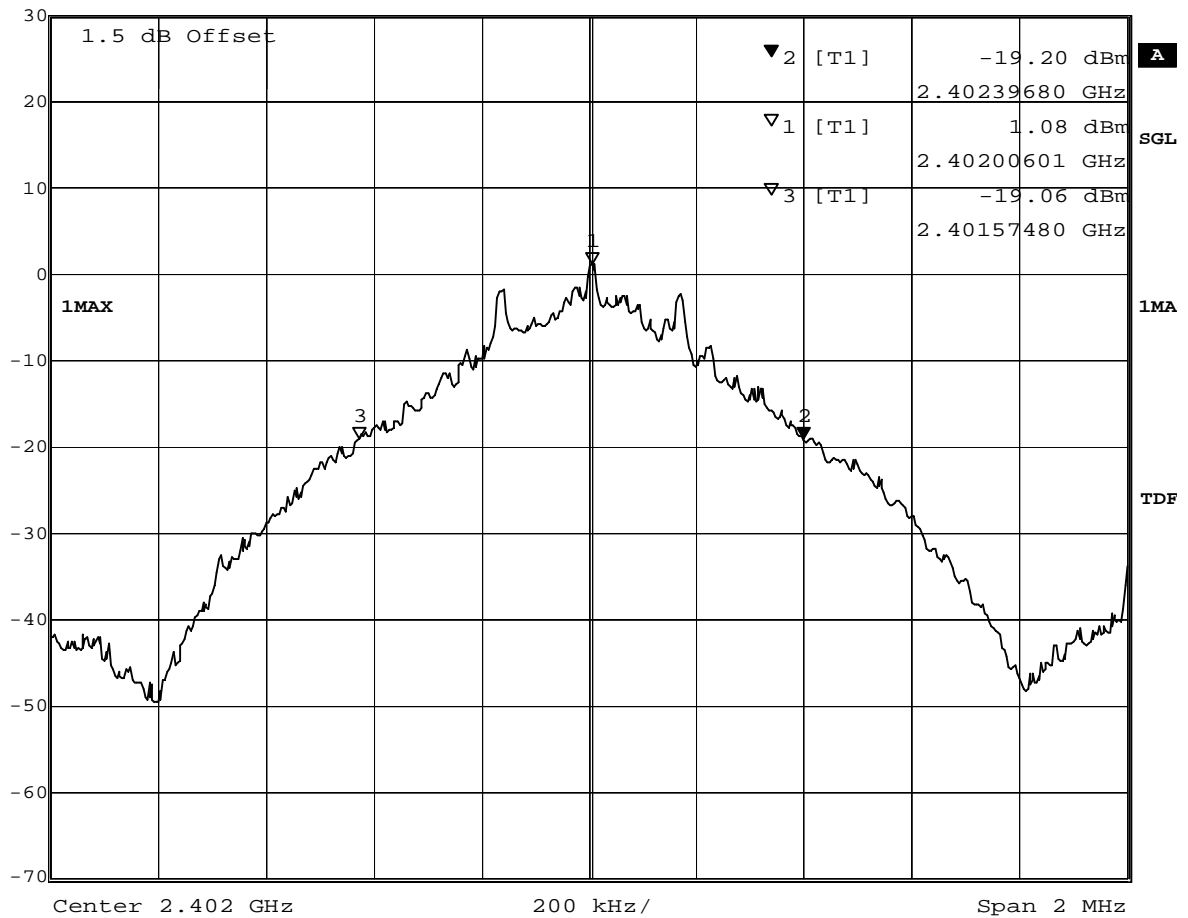
## 8.2 Occupied bandwidth

### 8.2.1 Occupied bandwidth operating mode 1

#### Op. Mode

op-mode 1

	Marker 2 [T1]	RBW	10 kHz	RF Att	40 dB
	Ref Lvl	-19.20 dBm	VBW	30 kHz	
	30 dBm	2.40239680 GHz	SWT	50 ms	Unit



Title: 20dB Bandwidth  
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):822  
 Date: 10.MAY.2007 10:32:35




## 8.2.2 Occupied bandwidth operating mode 2

### Op. Mode

op-mode 2

	Marker 2 [T1]	RBW	10 kHz	RF Att	40 dB
	Ref Lvl	-18.91 dBm	VBW	30 kHz	
	30 dBm	2.44138880 GHz	SWT	50 ms	Unit dBm

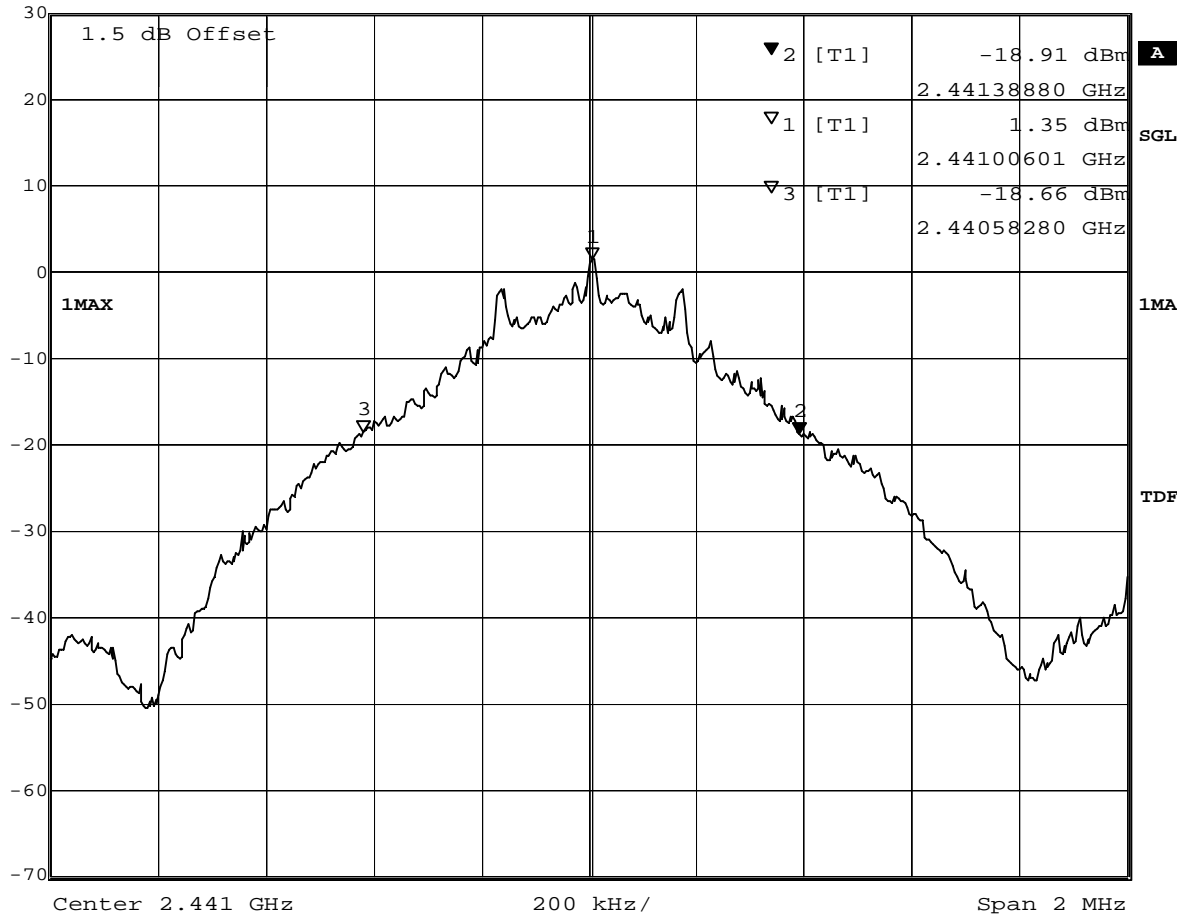

Title: 20dB Bandwidth  
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):806  
 Date: 10.MAY.2007 11:59:14






### 8.2.3 Occupied bandwidth operating mode 3

#### Op. Mode

op-mode 3

	Ref Lvl	Marker 2 [T1]	RBW	10 kHz	RF Att	40 dB
	30 dBm	-19.42 dBm	VBW	30 kHz		
		2.48041320 GHz	SWT	50 ms	Unit	dBm

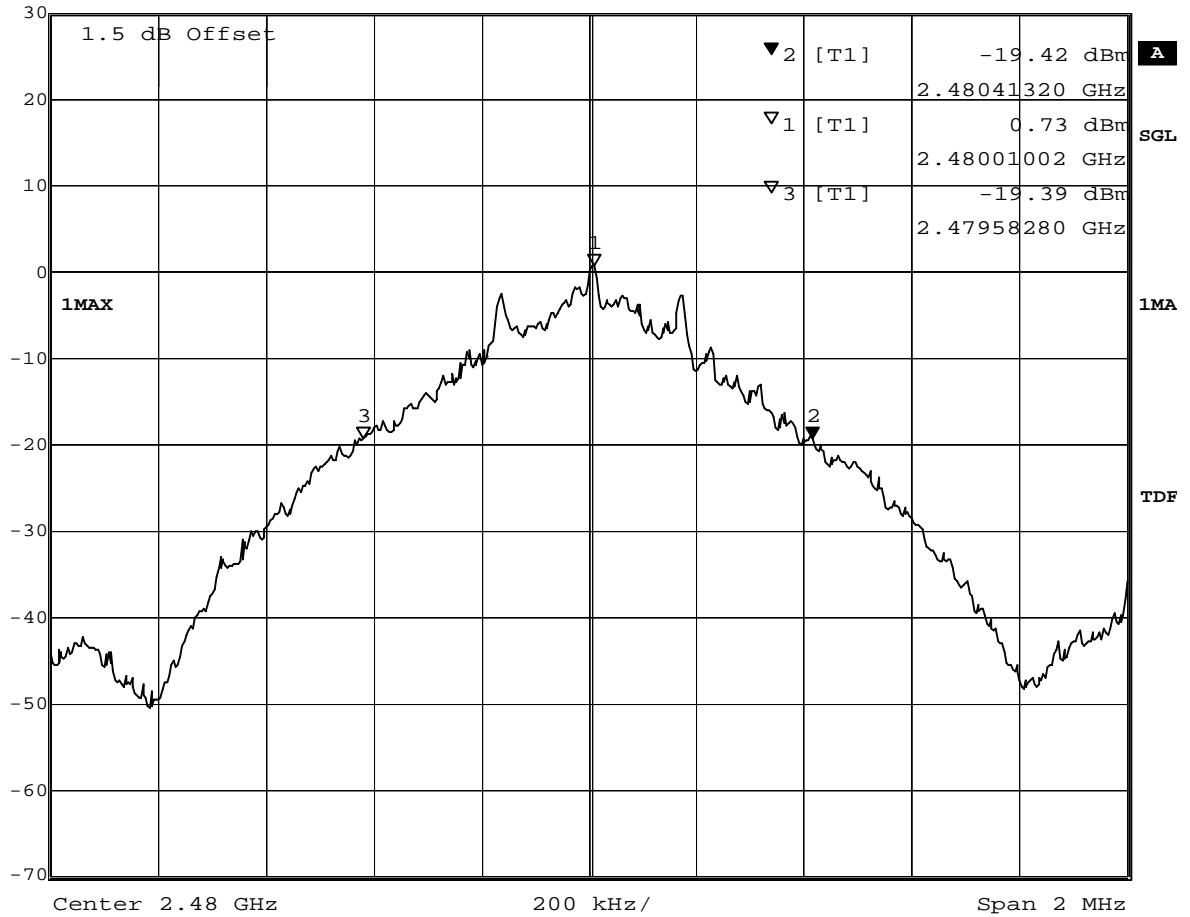


Title: 20dB Bandwidth  
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):830.4  
 Date: 10.MAY.2007 11:36:43


### 8.3 Peak power output

#### 8.3.1 Peak power output operating mode 1

##### Op. Mode

op-mode 1

	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
	Ref Lvl	3.46 dBm	VBW	3 MHz	
	30 dBm	2.40185471 GHz	SWT	5 ms	Unit

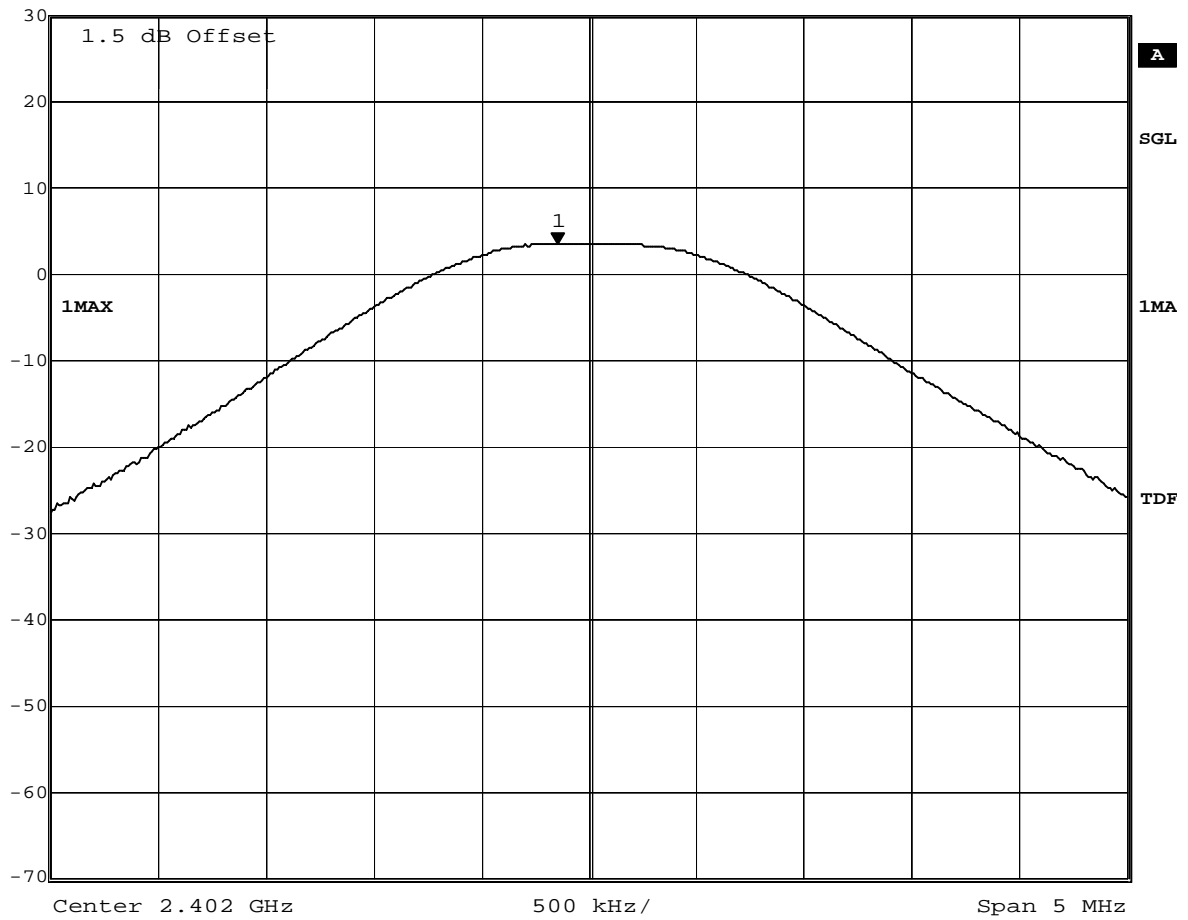

Title: Peak outputpower Power  
 Comment A: CH B: 2402 MHz  
 Date: 10.MAY.2007 10:33:02




### 8.3.2 Peak power output operating mode 2

#### Op. Mode

op-mode 2

	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
	Ref Lvl	3.72 dBm	VBW	3 MHz	
	30 dBm	2.44087475 GHz	SWT	5 ms	Unit dBm

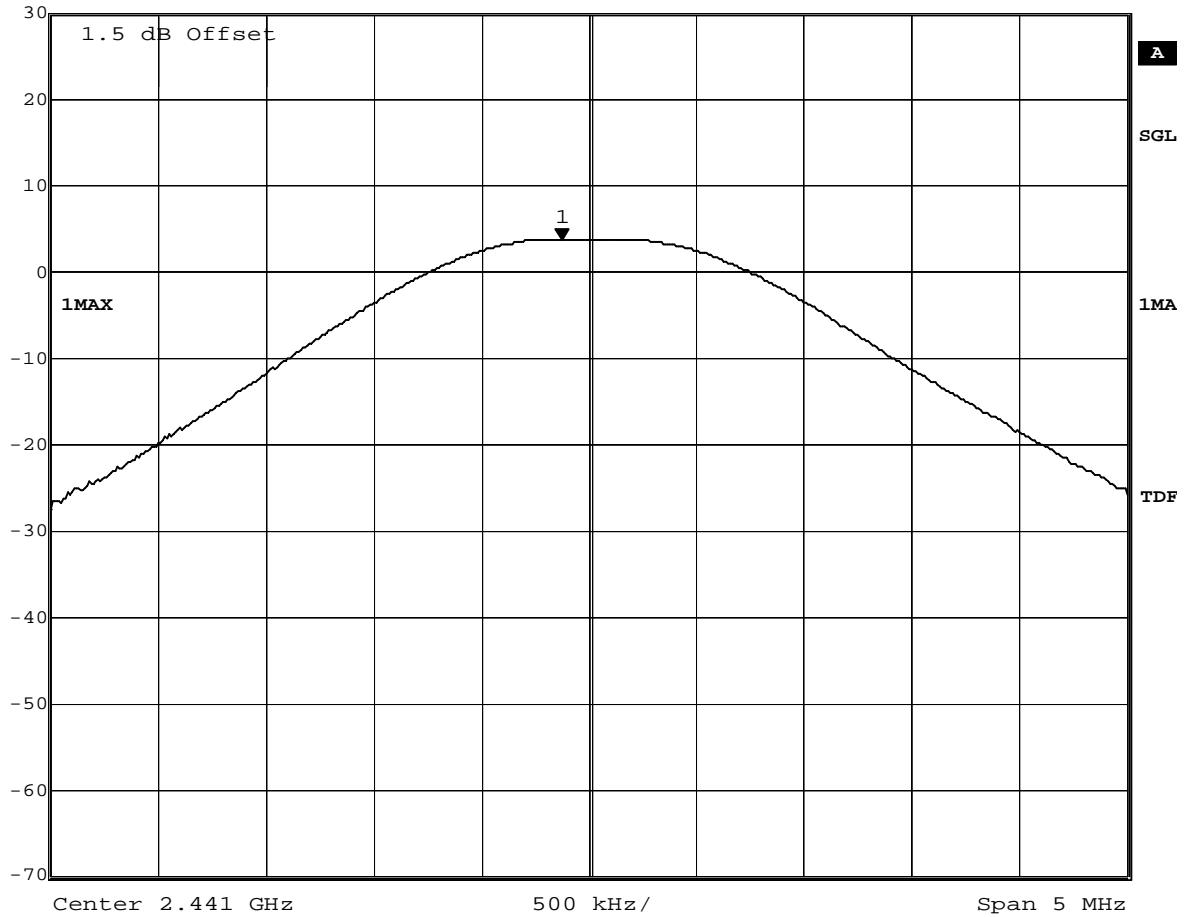

Title: Peak outputpower Power  
 Comment A: CH M: 2441 MHz  
 Date: 10.MAY.2007 11:59:40




### 8.3.3 Peak power output operating mode 3

#### Op. Mode

op-mode 3

	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
	Ref Lvl	3.11 dBm	VBW	3 MHz	
	30 dBm	2.48005511 GHz	SWT	5 ms	Unit dBm

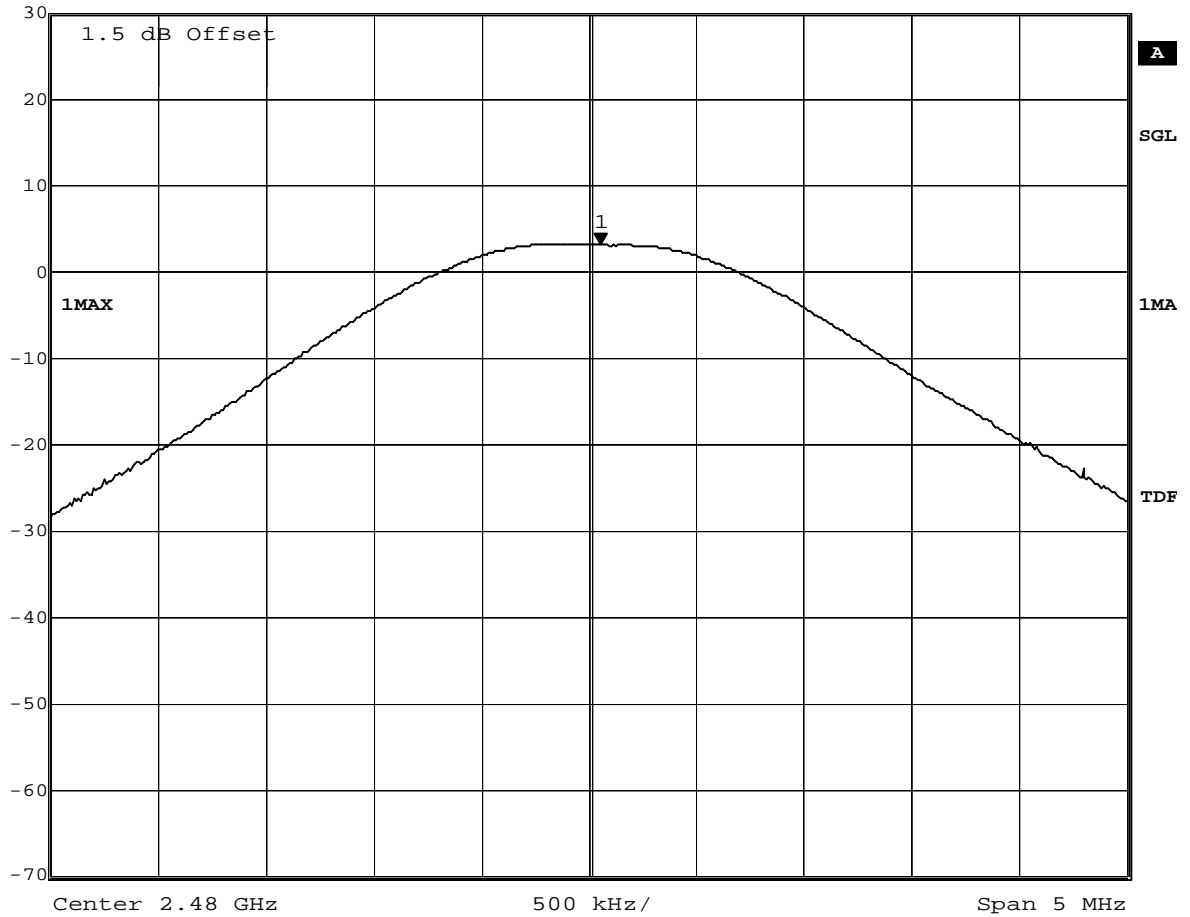


Title: Peak outputpower Power  
Comment A: CH T: 2480 MHz  
Date: 10.MAY.2007 11:37:09

## 8.4 Band edge compliance conducted and Spurious RF conducted emissions

### 8.4.1 Band edge compliance conducted operating mode 1

#### Op. Mode

op-mode 1

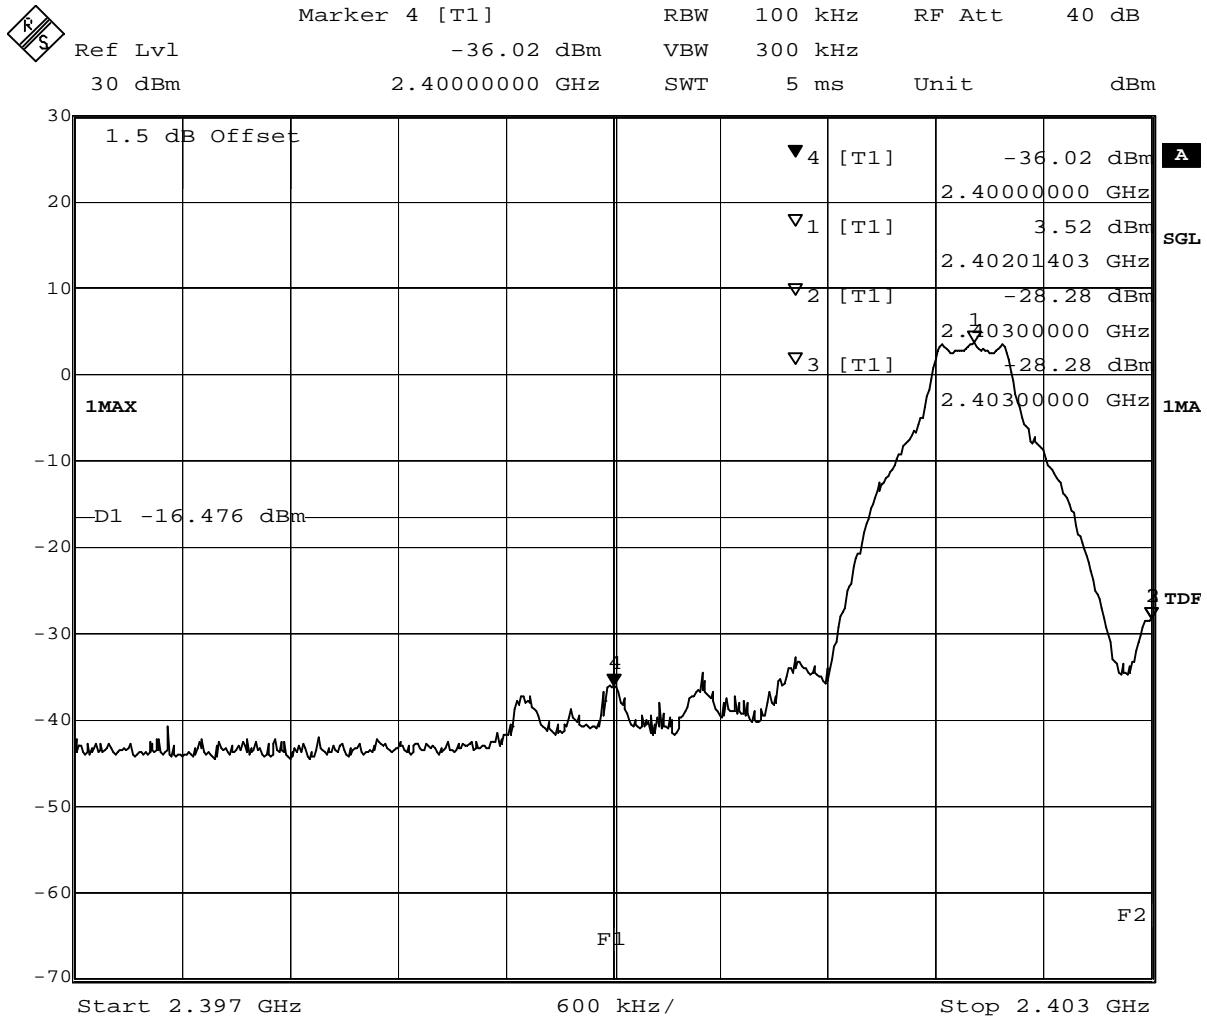

Title: Band Edge Compliance

Comment A: CH B: 2402 MHz

Date: 10.MAY.2007 10:17:14

(determination of reference value for spurious emissions measurement)




### 8.4.2 Spurious RF conducted emissions operating mode 1

#### Op. Mode

op-mode 1

	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	3.43 dBm	VBW	300 kHz	
	30 dBm	2.38188377 GHz	SWT	330 s	Unit dBm

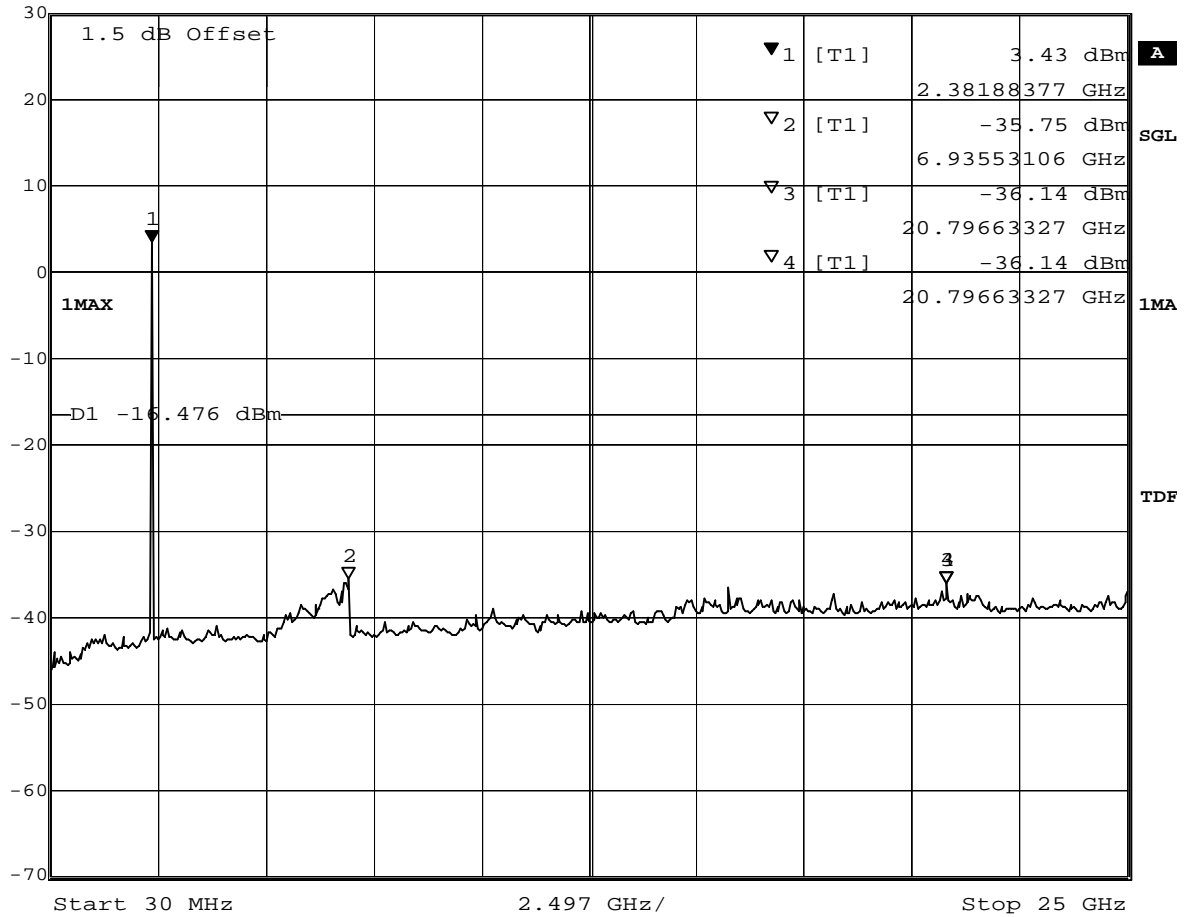


Title: spurious emissions  
 Comment A: CH B: 2402 MHz  
 Date: 10.MAY.2007 10:28:51

(spurious emissions measurement)

### 8.4.3 Spurious RF conducted emissions operating mode 2

#### Op. Mode

op-mode 2

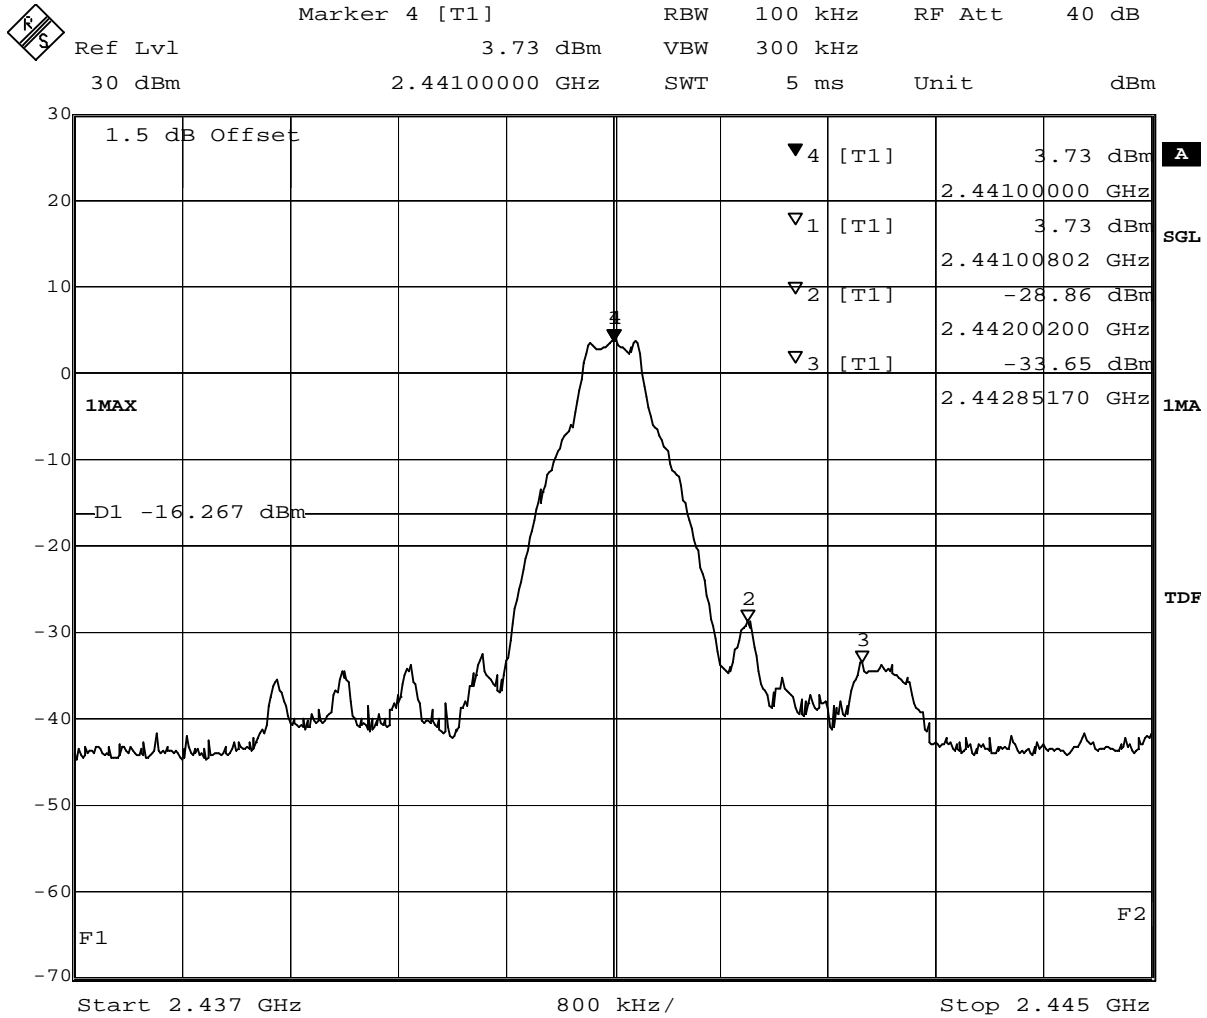


Title: Band Edge Compliance  
 Comment A: CH M: 2441 MHz  
 Date: 10.MAY.2007 11:43:58

(determination of reference value for spurious emissions measurement)



Marker 1 [T1]      RBW 100 kHz      RF Att 40 dB  
 Ref Lvl 4.02 dBm      VBW 300 kHz  
 30 dBm      2.43192385 GHz      SWT 330 s      Unit dBm

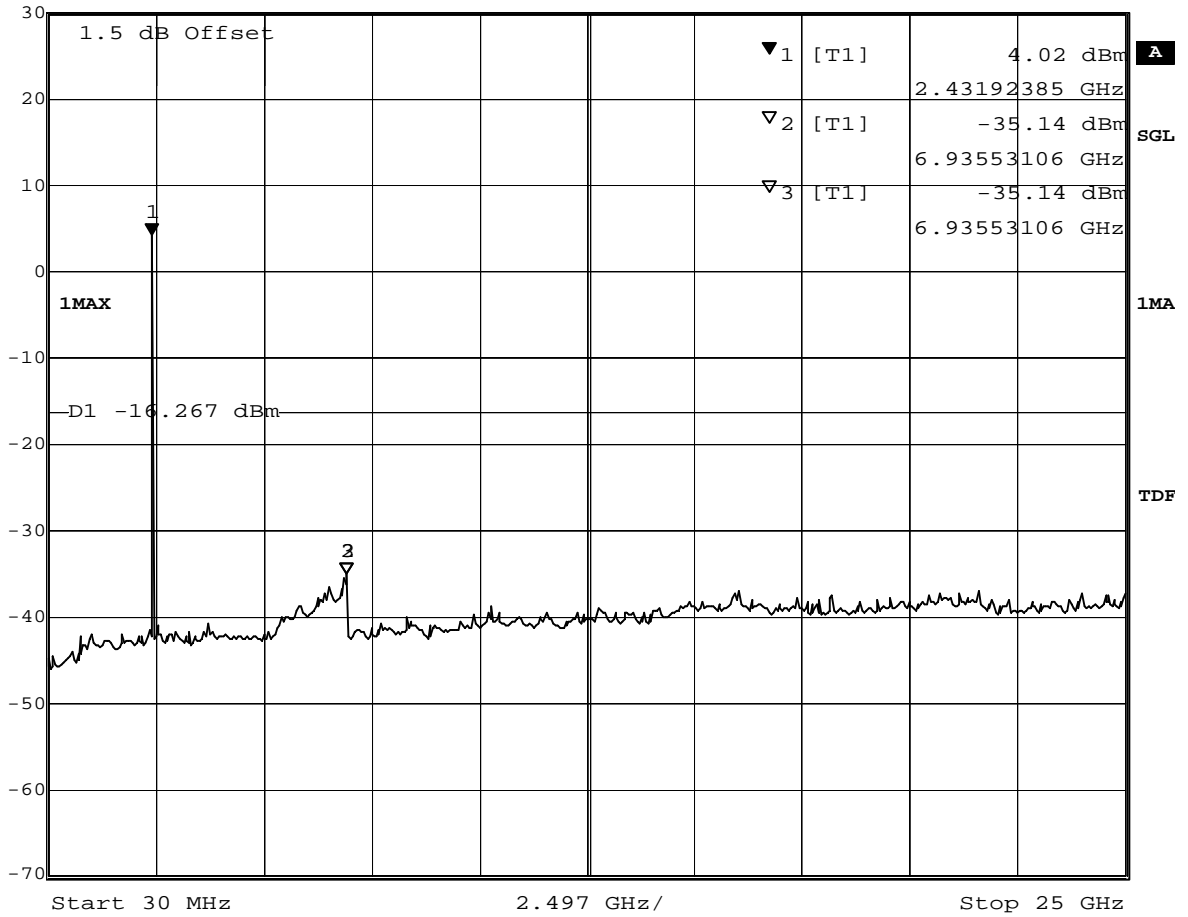

Title: spurious emissions  
 Comment A: CH M: 2441 MHz  
 Date: 10.MAY.2007 11:55:35


(spurious emissions measurement)



### 8.4.4 Band edge compliance conducted operating mode 3

#### Op. Mode

op-mode 3

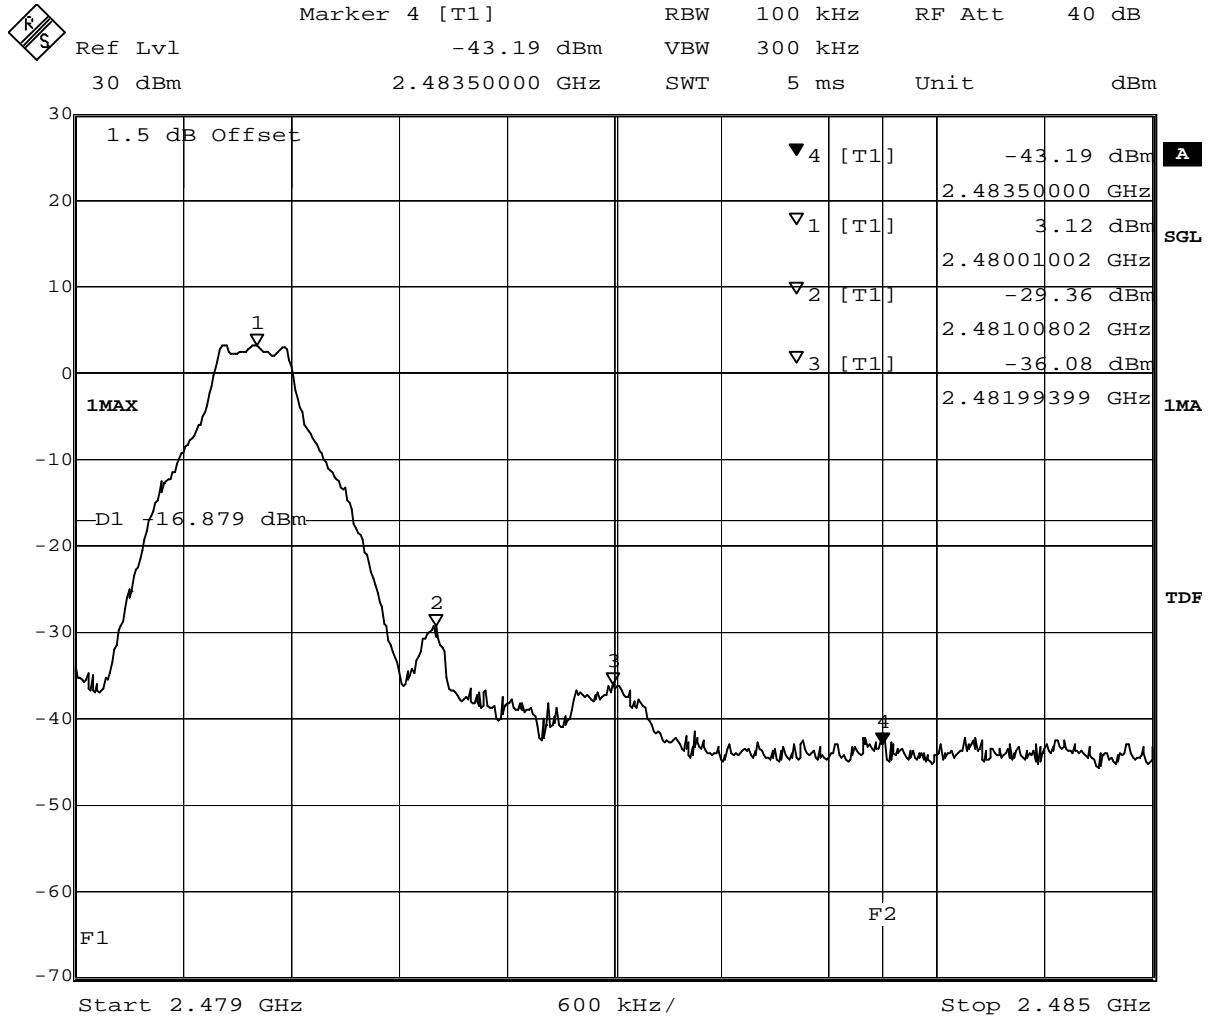

Title: Band Edge Compliance  
 Comment A: CH T: 2480 MHz  
 Date: 10.MAY.2007 11:21:22

(determination of reference value for spurious emissions measurement)




### 8.4.5 Spurious RF conducted emissions operating mode 3

#### Op. Mode

op-mode 3

	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
	Ref Lvl	3.09 dBm	VBW	300 kHz	
	30 dBm	2.48196393 GHz	SWT	330 s	Unit dBm

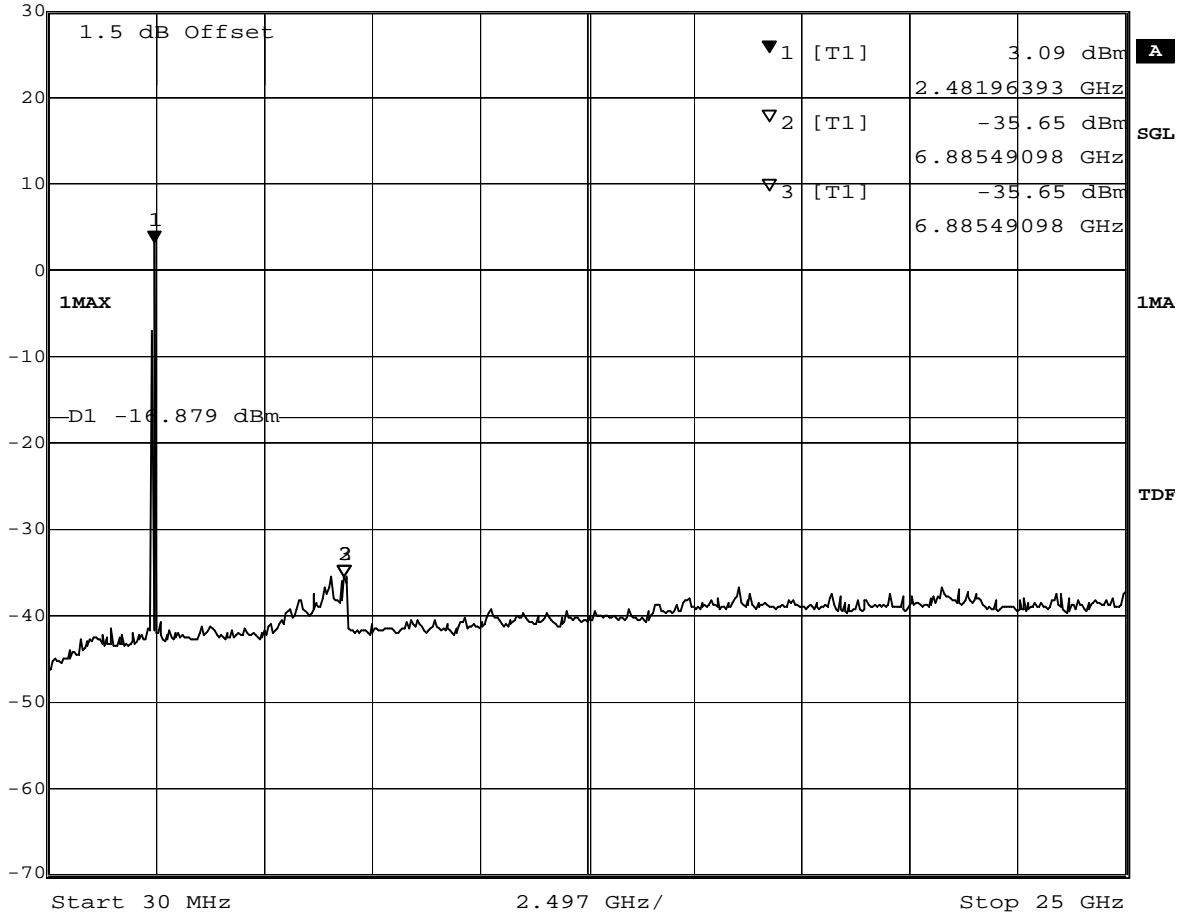

Title: spurious emissions  
 Comment A: CH T: 2480 MHz  
 Date: 10.MAY.2007 11:32:59


(spurious emissions measurement)

## 8.5 Band edge compliance radiated

### Op. Mode

op-mode 3

Radiated measurement (higher band edge)

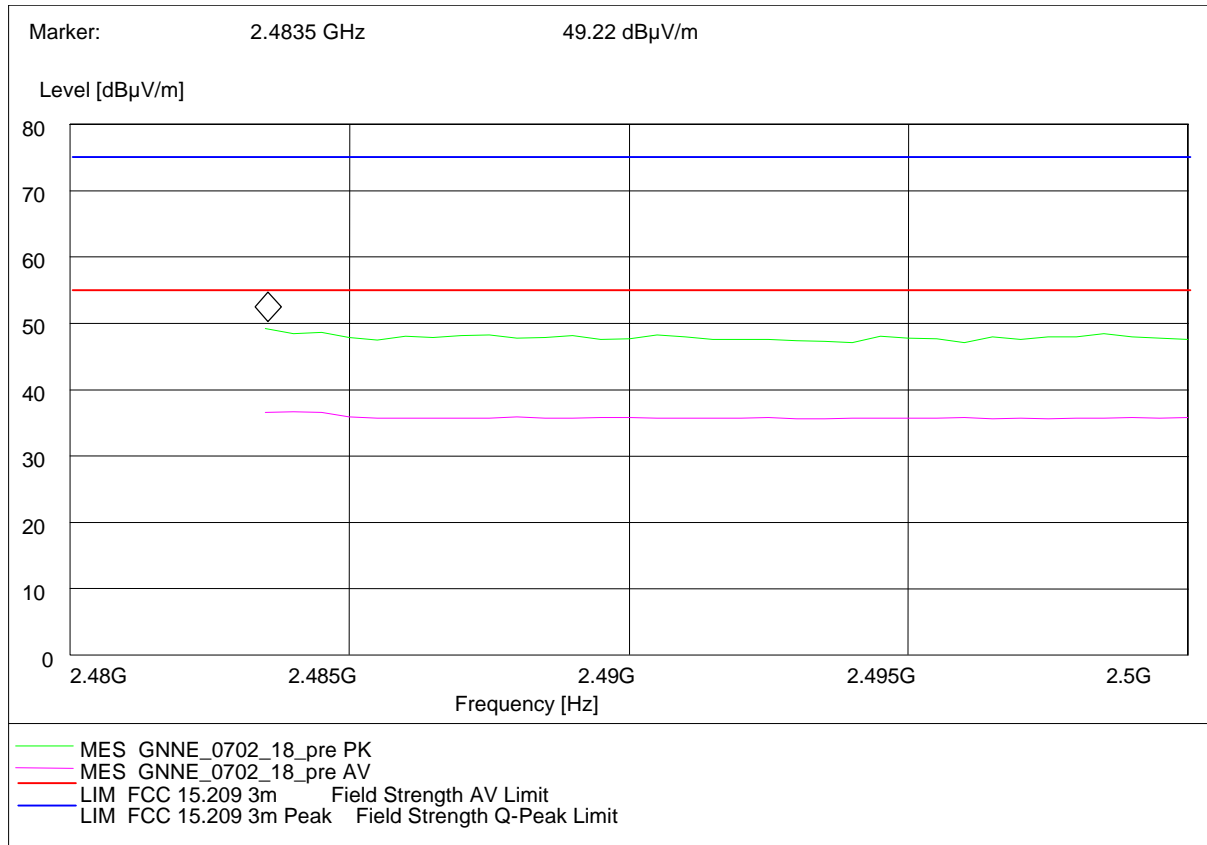


## 8.6 Radiated emissions (f<30MHz)


### Op. Mode

op-mode 1

Antenna position 0°  
EUT position vertical

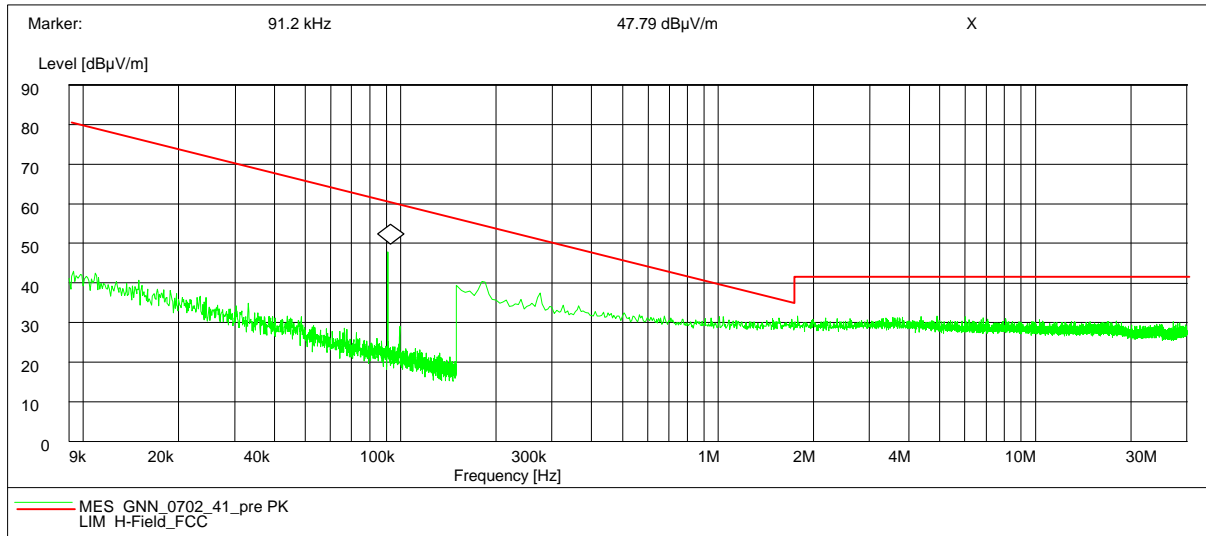

Antenna position 90°  
EUT position vertical

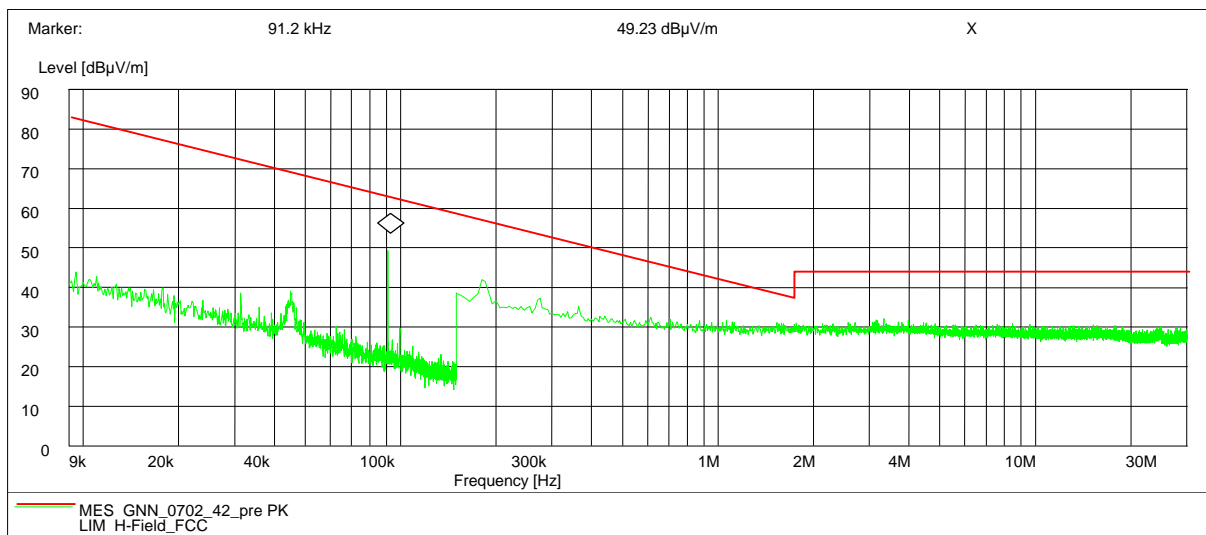


### Op. Mode

op-mode 1


Antenna position 0°

EUT position horizontal

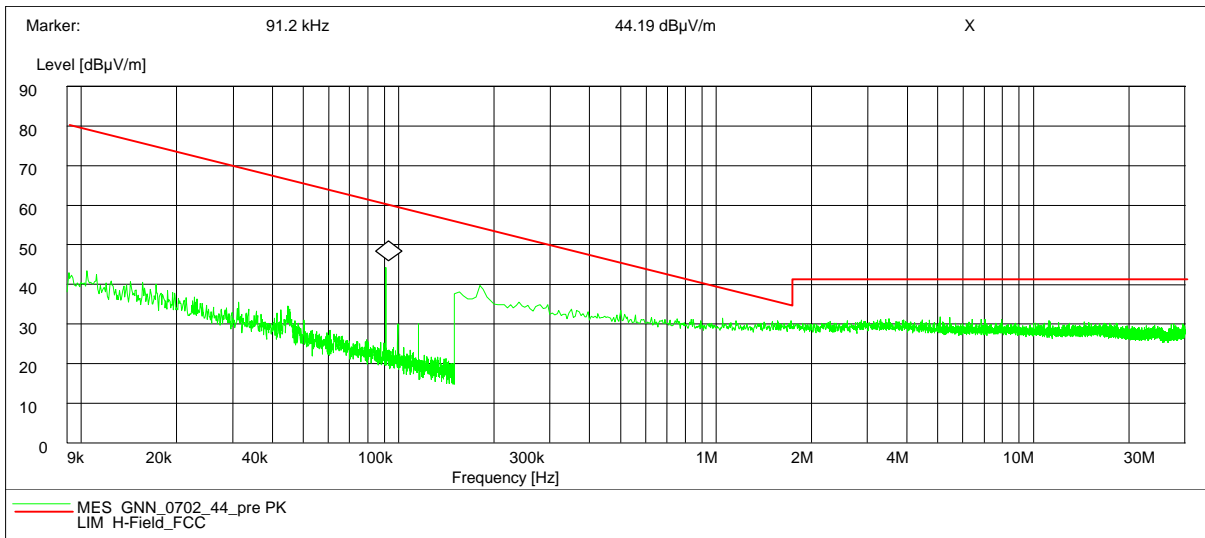

Antenna position 90°

EUT position horizontal

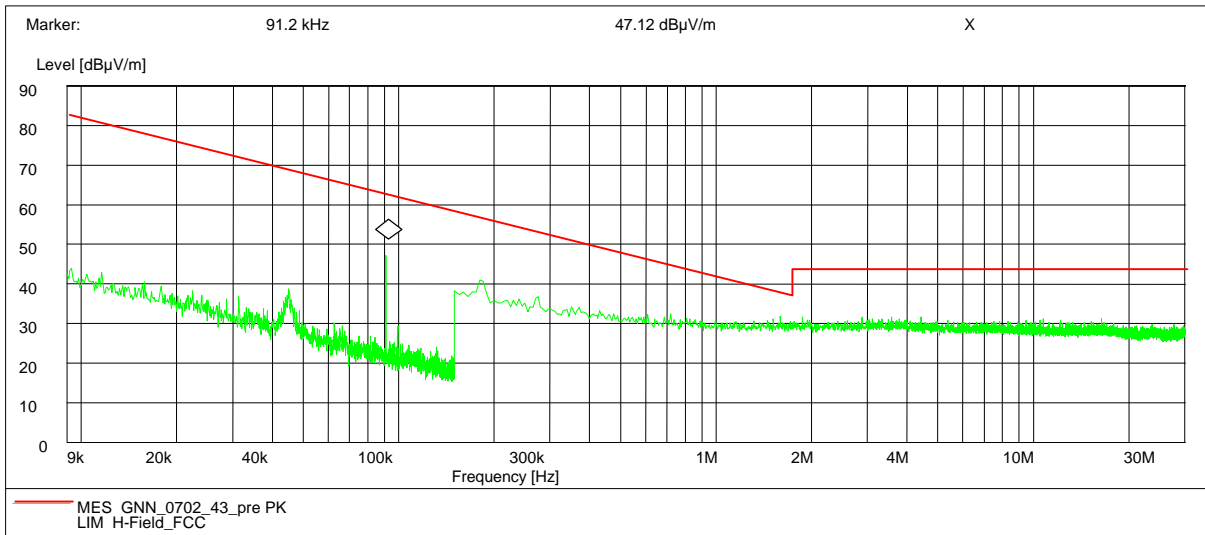




## 8.7 Dwell time

### 8.7.1 Dwell time operating mode 2 (longest supported packet type)

#### Op. Mode

op-mode 2 Time slot measurement

	Marker 1 [T1 ndB]	RBW	1 MHz	RF Att	40 dB
	Ref Lvl	ndB	6.00 dB	VBW	1 MHz
	30 dBm	BW	2.965932 ms	SWT	10 ms

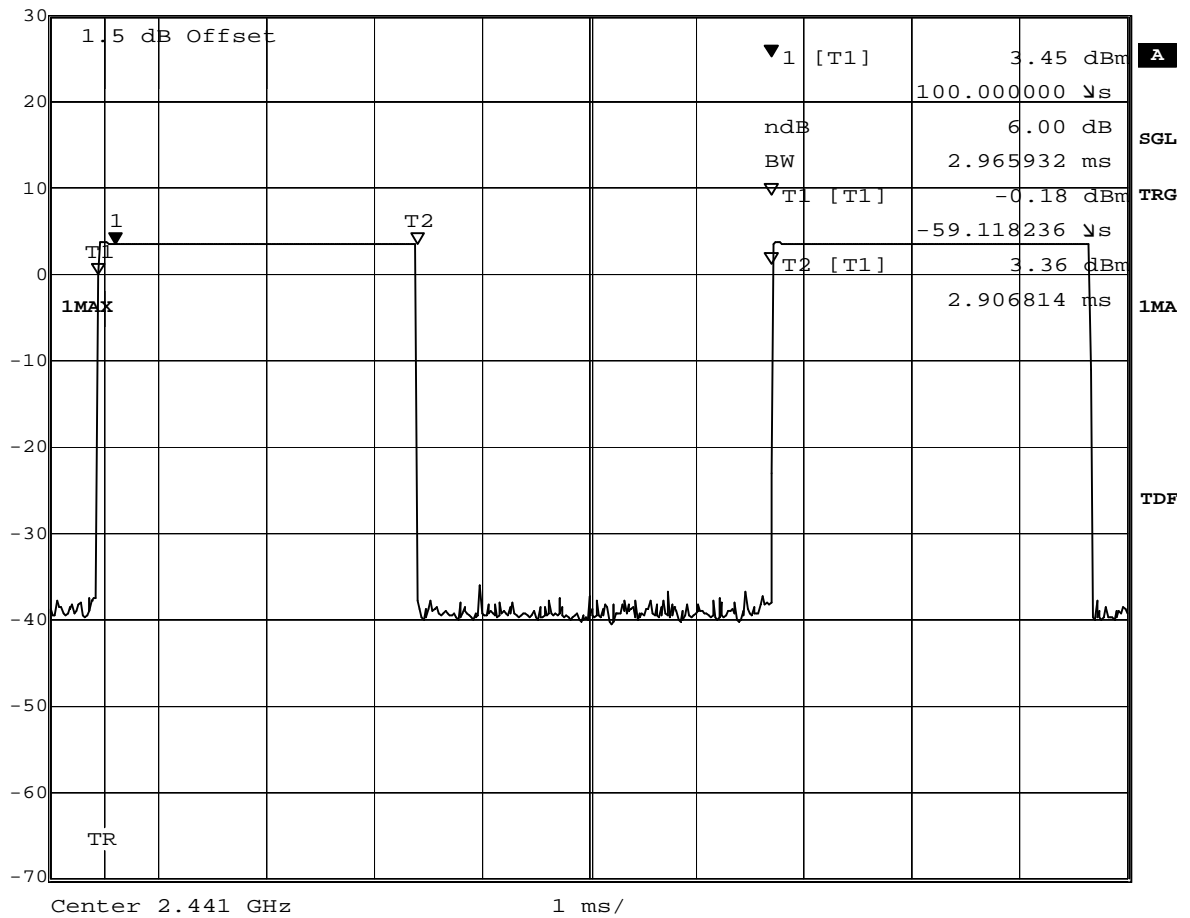


Title: Dwell time  
 Comment A: CH M: 2441 MHz  
 Date: 10.MAY.2007 12:49:41

## 8.8 Channel separation

### Op. Mode

op-mode 4

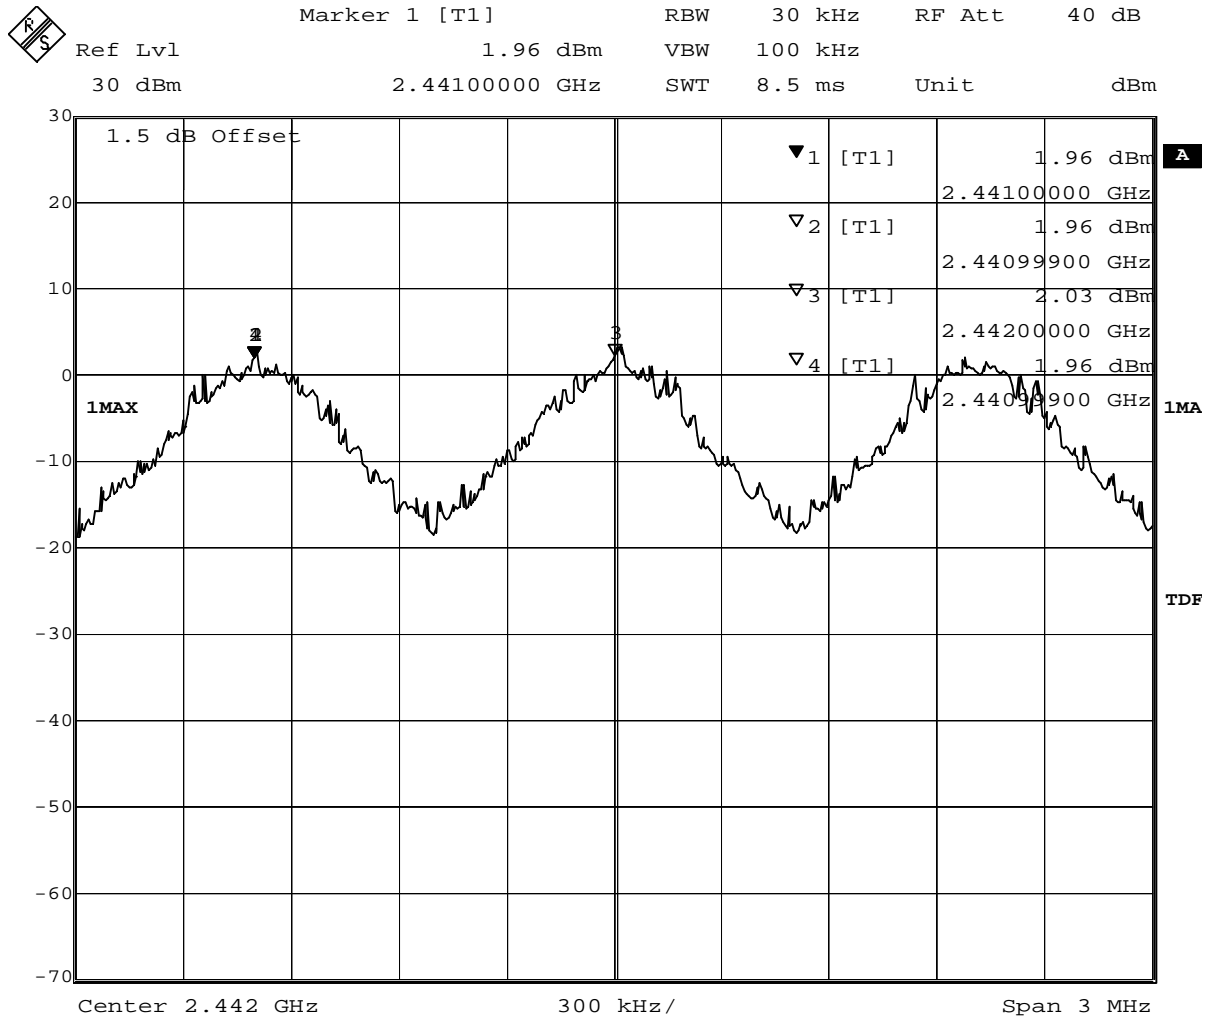


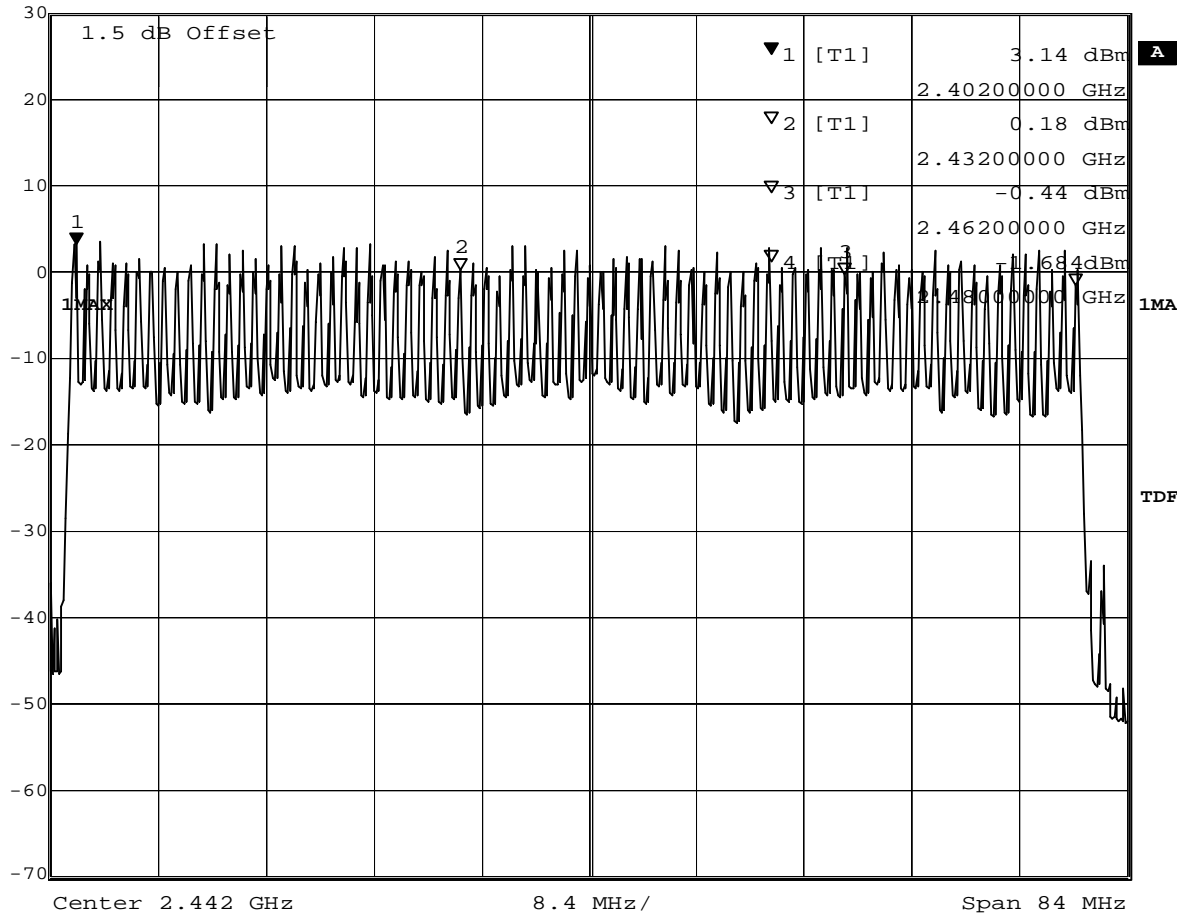
Title:            Number of hopping frequencies  
 Comment A:    CH H: Hopping  
 Date:           10.MAY.2007 13:08:15

## 8.9 Number of hopping frequencies

### Op. Mode

op-mode 4

	Marker 1 [T1]	RBW	30 kHz	RF Att	40 dB
	Ref Lvl	3.14 dBm	VBW	30 kHz	
	30 dBm	2.40200000 GHz	SWT	235 ms	Unit



Title:            Number of hopping frequencies  
 Comment A:    CH H: Hopping  
 Date:           10.MAY.2007 13:22:13