



InterLab[®]

Final Report on

Jabra BTE6

Report Reference: MDE_GNNET_1211_FCCa
According to
Title 47 CFR chapter I part 15 subpart C

Date: December 06, 2012

Test Laboratory:

7Layers AG
Borsigstr. 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Ralf Mertens
Vorstand • Board:
Dr. H.-J. Meckelburg

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

1 Administrative Data

1.1 Project Data

Project Responsible: Patrick Lomax
Date Of Test Report: 2012/12/06
Date of first test: 2012/10/11
Date of last test: 2012/11/22

1.2 Applicant Data

Company Name: GN Netcom A/S
Street: Lautrupbjerg 7
City: DK-2750 Ballerup
Country: Denmark
Contact Person: Mr. Tom Ringtved
Phone: +45 45 75 91 86
E-Mail: tringtved@gn.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7 layers AG
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : michael.albert@7Layers.de

Laboratory Details

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkKS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible

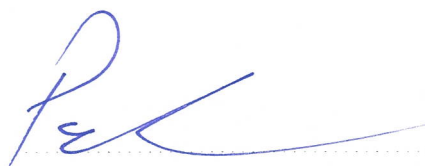

Patrick Lomax
responsible for tests performed in: Lab 1, Lab 2, Lab 3

1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person
responsible for Lab 1, Lab 2, Lab 3

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: Jabra BTE6

Manufacturer:

Company Name:

Please see applicant data

Contact Person:

-

Parameter List:

Parameter name

Value

Parameter for Scope FCC_v2:

Antenna Gain	2.5	
highest channel (BT)	2480	(MHz)
lowest channel (BT)	2402	(MHz)
mid channel (BT)	2441	(MHz)

Ancillary Equipment: USB 2.0 Cable



2.2 Detailed Description of OUT Samples

Sample : A01

<i>OUT Identifier</i>	Jabra BTE6		
<i>Sample Description</i>	Radiated sample		
<i>Serial No.</i>	TA-3		
<i>HW Status</i>	28-03533		
<i>SW Status</i>	1.14.0		
<i>Low Voltage</i>	3.8 V	<i>Low Temp.</i>	-20 °C
<i>High Voltage</i>	3.2 V	<i>High Temp.</i>	60 °C
<i>Nominal Voltage</i>	3.5 V	<i>Normal Temp.</i>	25 °C

Sample : B01

<i>OUT Identifier</i>	Jabra BTE6		
<i>Sample Description</i>	Standard sample		
<i>Serial No.</i>	TA-2		
<i>HW Status</i>	28-03533		
<i>SW Status</i>	1.14.0		
<i>Low Voltage</i>	3.7 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	11 °C
<i>Nominal Voltage</i>	4.0 V	<i>Normal Temp.</i>	25 °C

Sample : USB1

<i>OUT Identifier</i>	USB 2.0 Cable
<i>Sample Description</i>	USB 2.0 Cable

2.3 OUT Features

Features for OUT: Jabra BTE6

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		

2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 04	Cherry RS 6000 USB ON	G 0000273 2P28			Keyboard 1
AE 02	Fujitsu Lifebook E781	DSCK013817	110V / 60 HZ	Windows 7	Laptop 2
AE 01	LG L1740BQ	509WANF1W607			TFT 1
AE 03	Logitech M-BB48	LZC90505478			Mosue

2.5 Operating Mode(s)

<i>Ref. -No.</i>	<i>Description</i>
02	Device connected to computer via USB cable. Special program used to send continuous data over USB cable. EUT in loopback connection with Bluetooth signalling box.

2.6 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples	List of auxiliary equipment
Sample No.	Sample Description	AE No. AE Description
PC_A01 (Computer Peripheral setup)		
Sample: USB1	USB 2.0 Cable	AE 04 Keyboard 1
		AE 02 Laptop 2
		AE 01 TFT 1
		AE 03 Mosue
S01_A01 (Standard Radiated setup)		
Sample: A01	Radiated sample	
S01_B01 (Conducted setup)		
Sample: B01	Standard sample	

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

The laboratory environmental conditions are recorded and available in the Interlab system for each performed test.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

Designation	Description
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

Test Specification:	FCC part 2 and 15
Version	10-1-11 Edition
Title:	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES

3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>			<i>Ref.</i>	
15c.1 Conducted emissions (AC power line) §15.207				
15c.1; Mode = transmit	Passed	2012/11/02	Lab 1	PC_A01
	operating mode: 02			
15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209				
15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low	Passed	2012/10/23	Lab 2	S01_A01
15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/10/22	Lab 2	S01_A01
	The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.			
15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/10/22	Lab 2	S01_A01
	The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.			
15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid	Passed	2012/11/10	Lab 2	S01_A01
15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/10/22	Lab 2	S01_A01
	The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.			
15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/10/22	Lab 2	S01_A01
	The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.			
15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest	Passed	2012/11/22	Lab 2	S01_A01
15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/10/11	Lab 2	S01_A01
	The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.			
15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/10/22	Lab 2	S01_A01
	The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.			
15c.3 Occupied bandwidth §15.247 (a) (1)				
15c.3; Occupeid Bandwidth Summary	Passed	2012/11/02	Lab 3	S01_B01
15c.4 Peak power output §15.247 (b) (1)				
15c.4; Peak power output Summary	Passed	2012/11/02	Lab 3	S01_B01
15c.5 Spurious RF conducted emissions §15.247 (d)				
15c.5; = BT transmit mode: Low/Mid/High Frequency	Passed	2012/11/02	Lab 3	S01_B01



<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i>	<i>Setup</i>
<i>Test (condition)</i>			<i>Ref.</i>	
15c.6 Band edge compliance §15.247 (d)				
15c.6; Band edge compliance Summary	Passed	2012/11/02	Lab 2	S01_B01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	Passed	2012/10/22	Lab 2	S01_A01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated	Passed	2012/10/22	Lab 2	S01_A01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2012/11/22	Lab 2	S01_A01
15c.7 Dwell time §15.247 (a) (1) (iii)				
15c.7; Dwell time Summary	Passed	2012/11/02	Lab 3	S01_B01
15c.8 Channel separation §15.247 (a) (1)				
15c.8; Channel separation Summary	Passed	2012/11/02	Lab 3	S01_B01
15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)				
15c.9; Number of hopping frequencies Summary	Passed	2012/11/15	Lab 3	S01_B01

3.5 Detailed Results

3.5.1 15c.1 Conducted emissions (AC power line) §15.207

Test: 15c.1; Mode = transmit

<i>Result:</i>	Passed
<i>Setup No.:</i>	PC_A01
<i>Date of Test:</i>	2012/11/02 20:52
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (CJ170b01)
 Manufacturer: GNNET
 Operating Condition: BT TX on 2441MHz, loopback mode, Packettype: 1-DH1
 Test Site: 7 layers Ratingen
 Operator: Doe
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment:
 Start of Test: 02.11.2012 / 22:00:24

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width	MaxPeak	Average		
150.0 kHz	30.0 MHz	5.0 kHz		20.0 ms	9 kHz	ESH3-Z5

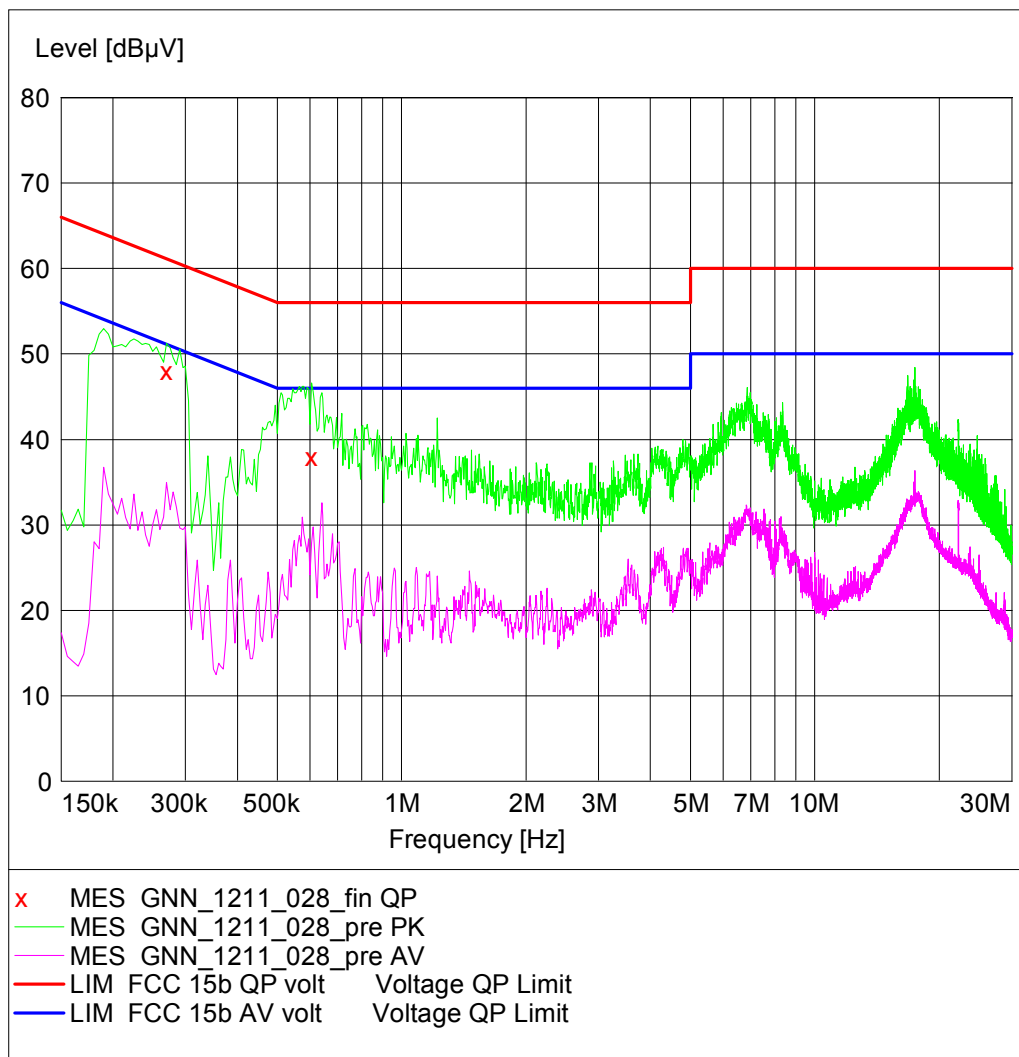



Reference: MDE_GNNET_1211_FCCa
According to
Title 47 CFR chapter I part 15 subpart C

MEASUREMENT RESULT: "GNN_1211_028_fin QP"

02.11.2012 22:06

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.270000	48.00	10.1	61	13.1	L1	GND
0.605000	38.00	10.1	56	18.0	L1	FLO

3.5.2 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed
Setup No.: S01_A01
Date of Test: 2012/10/23 20:16
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1

Frequency range 30 MHz - 1 GHz						
Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
	Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz									
Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN 1211 001	Ver + Hor	74	54	2220	49.17	38.40	24.83	15.60	Passed
	Ver + Hor	74	54	2242	50.06	37.70	23.94	16.30	Passed
	Ver + Hor	74	54	2246	52.91	41.88	21.09	12.12	Passed
	Ver + Hor	74	54	2272	49.83	38.48	24.17	15.52	Passed
	Ver + Hor	74	54	2298	50.17	38.48	23.83	15.52	Passed
	Ver + Hor	74	54	2376	49.99	38.13	24.01	15.87	Passed
	Ver + Hor	74	54	4804	59.24	47.52	14.76	6.48	Passed
	Ver + Hor	74	54	12009	47.31	34.68	26.69	19.32	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.
Setup No.: S01_A01
Date of Test: 2012/10/22 20:22
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1211_006	Ver + Hor	74	54	2246	49.93	38.08	24.07	15.92	Passed
	Ver + Hor	74	54	4804	50.50	37.63	23.50	16.37	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.

Setup No.: S01_A01

Date of Test: 2012/10/22 20:24

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 3-DH1
Frequency range 1 GHz - 8 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1211_007	Ver + Hor	74	54	4804	50.88	35.47	23.12	18.53	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid

Result: Passed

Setup No.: S01_A01

Date of Test: 2012/11/10 20:17

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1

Frequency range 9 kHz - 1 GHz

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
	Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN 1211 002	Ver + Hor	74	54	2233	51.32	38.50	22.68	15.50	Passed
	Ver + Hor	74	54	2259	50.97	39.22	23.03	14.78	Passed
	Ver + Hor	74	54	2285	54.83	43.13	19.17	10.87	Passed
	Ver + Hor	74	54	2311	51.20	39.45	22.80	14.55	Passed
	Ver + Hor	74	54	2337	51.56	39.22	22.44	14.78	Passed
	Ver + Hor	74	54	2363	49.65	38.17	24.35	15.83	Passed
	Ver + Hor	74	54	2389	49.66	38.15	24.34	15.85	Passed
	Ver + Hor	74	54	2493	50.38	38.75	23.62	15.25	Passed
	Ver + Hor	74	54	4882	60.45	48.63	13.55	5.37	Passed
	Ver + Hor	74	54	12204	47.30	34.45	26.70	19.55	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.

Setup No.: S01_A01

Date of Test: 2012/10/22 20:22

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 2-DH1

Frequency range 1 GHz - 8 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN 1211 005	Ver + Hor	74	54	2285	51.28	38.86	22.72	15.14	Passed
	Ver + Hor	74	54	4882	52.09	39.23	21.91	14.77	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.

Setup No.: S01_A01

Date of Test: 2012/10/22 20:24

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 3-DH1
Frequency range 1 GHz - 8 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1211_008	Ver + Hor	74	54	2285	51.03	38.77	22.97	15.23	Passed
	Ver + Hor	74	54	4882	52.62	39.34	21.38	14.66	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest

Result: Passed
Setup No.: S01_A01
Date of Test: 2012/11/22 20:21
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 1-DH1
Frequency range 30 MHz - 1 GHz

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
	Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1211_003	Ver + Hor	74	54	2272	51.39	39.43	22.61	14.57	Passed
	Ver + Hor	74	54	2298	51.63	39.93	22.37	14.07	Passed
	Ver + Hor	74	54	2324	54.42	43.35	19.58	10.65	Passed
	Ver + Hor	74	54	2350	51.00	39.87	23.00	14.13	Passed
	Ver + Hor	74	54	2376	51.58	40.37	22.42	13.63	Passed
	Ver + Hor	74	54	2662	51.18	39.11	22.82	14.89	Passed
	Ver + Hor	74	54	2688	50.74	39.49	23.26	14.51	Passed
	Ver + Hor	74	54	2720	51.37	39.10	22.63	14.90	Passed
	Ver + Hor	74	54	4960	59.21	47.43	14.79	6.57	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.
Setup No.: S01_A01
Date of Test: 2012/10/11 20:23
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1211_004	Ver + Hor	74	54	2324	51.42	39.12	22.58	14.88	Passed
	Ver + Hor	74	54	4960	51.09	37.80	22.91	16.20	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in GFSK modes.

Setup No.: S01_A01

Date of Test: 2012/10/22 20:25

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 3-DH1
Frequency range 1 GHz - 8 GHz

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1211_009	Ver + Hor	74	54	2324	51.55	39.38	22.45	14.62	Passed
	Ver + Hor	74	54	4960	51.48	38.04	22.52	15.96	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

3.5.3 15c.3 Occupied bandwidth §15.247 (a) (1)


Test: 15c.3; Occupied Bandwidth Summary

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_B01
<i>Date of Test:</i>	2012/11/02 20:04
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:


Modulation	Frequency	Occupied Bandwidth MHz
GFSK	2402 MHz	0.9324
	2441 MHz	0.8844
	2480 MHz	0.8844
PI/4 DQPSK	2402 MHz	1.2516
	2441 MHz	1.2516
	2480 MHz	1.2516
8DPSK	2402 MHz	1.2210
	2441 MHz	1.2210
	2480 MHz	1.2150

Marker 2 [T1] RBW 30 kHz RF Att 40 dB
 Ref Lvl -7.62 dBm VBW 30 kHz
 30 dBm 2.40249320 GHz SWT 8.5 ms Unit dBm

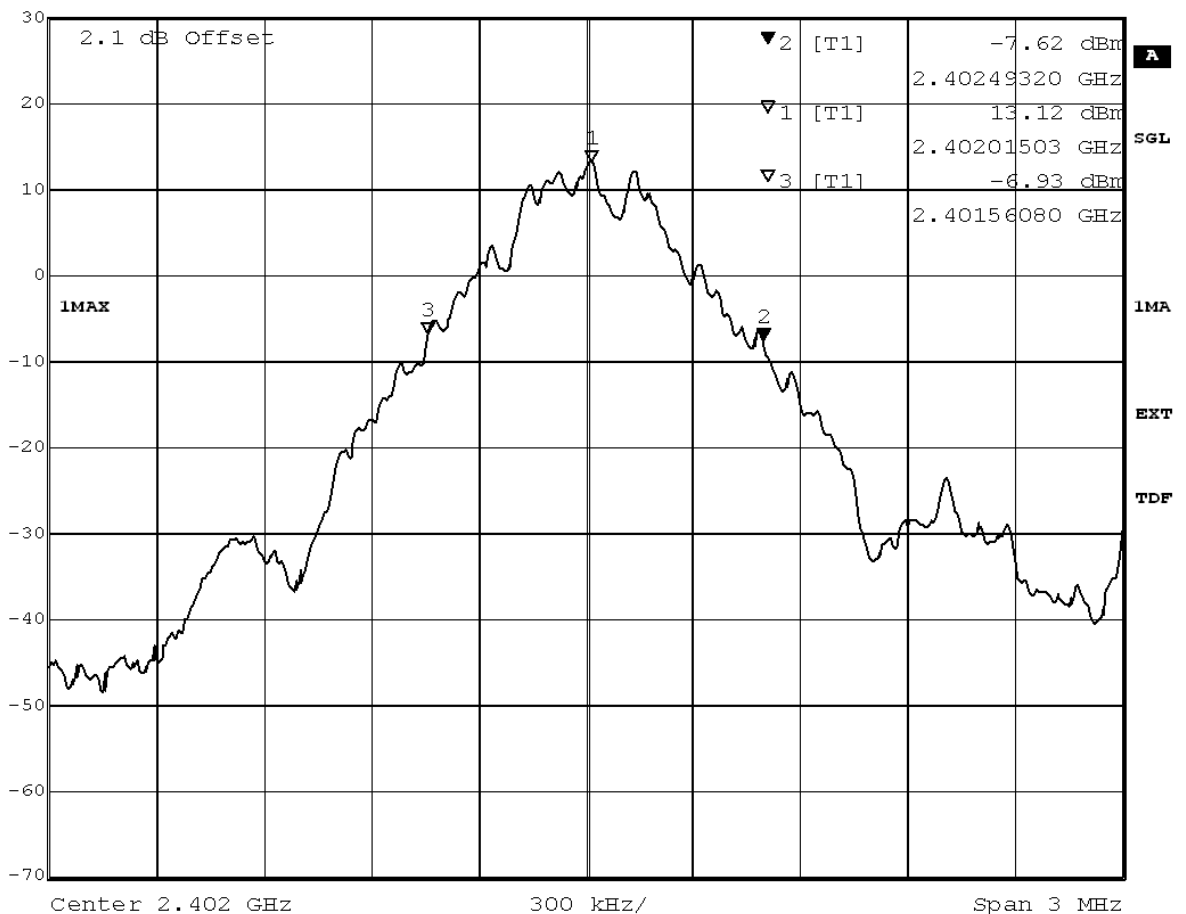


Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):932.4
 Date: 2.NOV.2012 11:00:00

	Marker 2 [T1]	RBW	30 kHz	RF Att	40 dB
Ref Lvl	-14.27 dBm	VBW	30 kHz		
30 dBm	2.44163180 GHz	SWT	8.5 ms	Unit	dBm

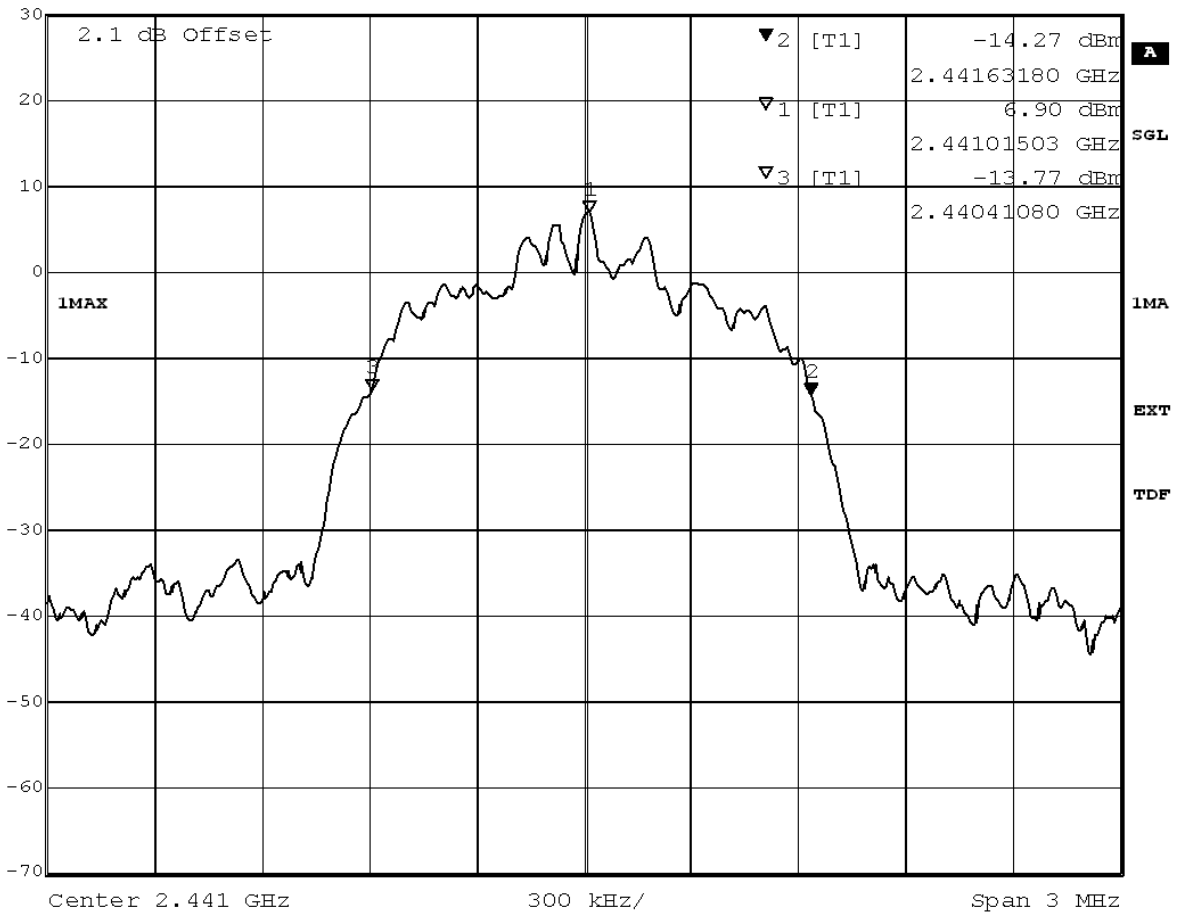

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1221
 Date: 2.NOV.2012 11:51:10

	Marker 2 [T1]	RBW	30 kHz	RF Att	40 dB
Ref Lvl	-13.49 dBm	VBW	30 kHz		
30 dBm	2.44162580 GHz	SWT	8.5 ms	Unit	dBm

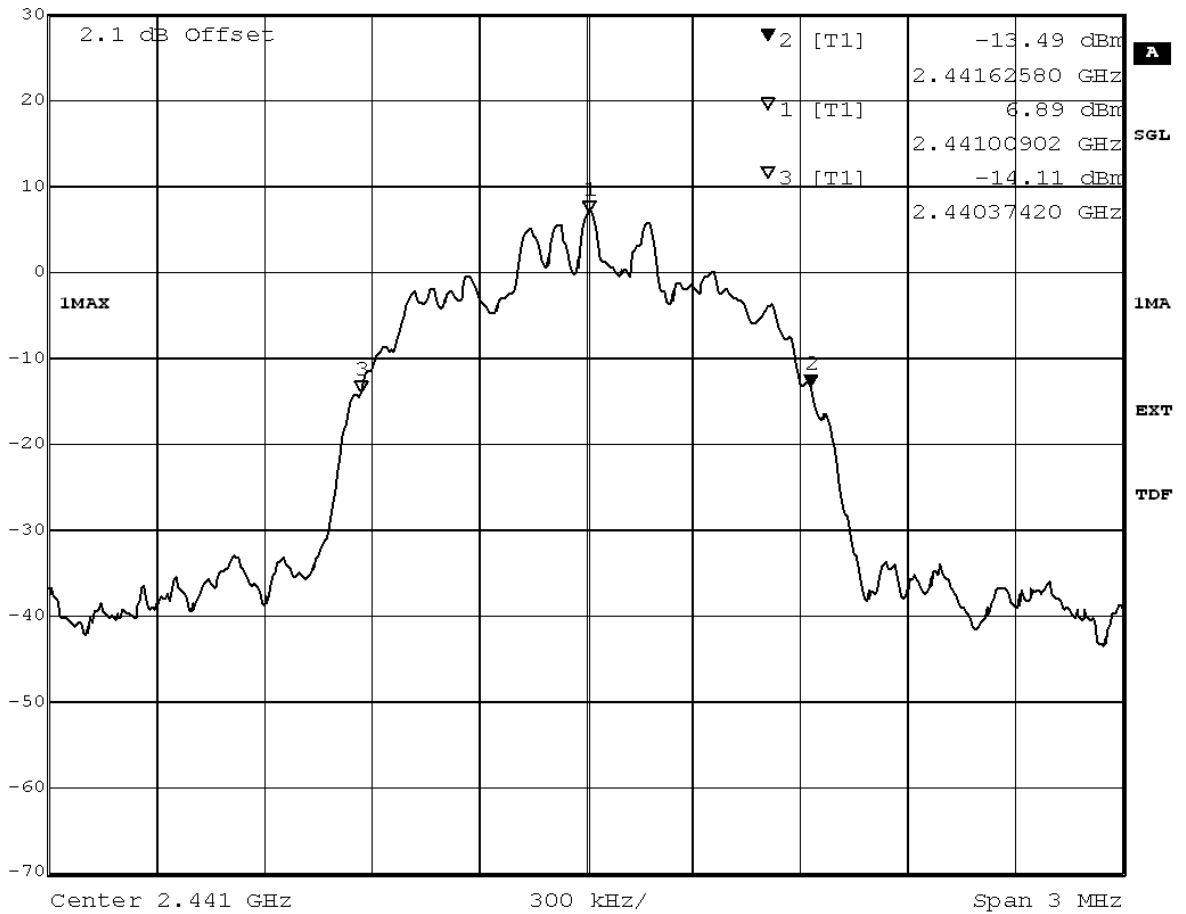

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1251.6
 Date: 2.NOV.2012 12:07:31

3.5.4 15c.4 Peak power output §15.247 (b) (1)

Test: 15c.4; Peak power output Summary

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_B01
<i>Date of Test:</i>	2012/11/02 19:49
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

		Transmitter Power (including antenna gain)					
		2402 MHz		2441 MHz		2480 MHz	
Modulation	Conditions	Output Power (dBm)	Output power /w Gain (dB)	Output Power (dBm)	Output power /w Gain (dB)	Output Power (dBm)	Output power /w Gain (dB)
GFSK	TN, VN	15.09	17.59	15.55	18.05	15.68	18.18
π/4 DQPSK	TN, VN	9	11.5	9.81	12.31	9.87	12.37
8-DPSK	TN, VN	9.49	11.99	10.26	12.76	10.22	12.72

Maximum Output Power (including antenna gain)	18.18	dBm
--	--------------	------------


Antenna gain / dBi	2.5	dBm
---------------------------	------------	------------

The extreme conditions were specified by the applicant

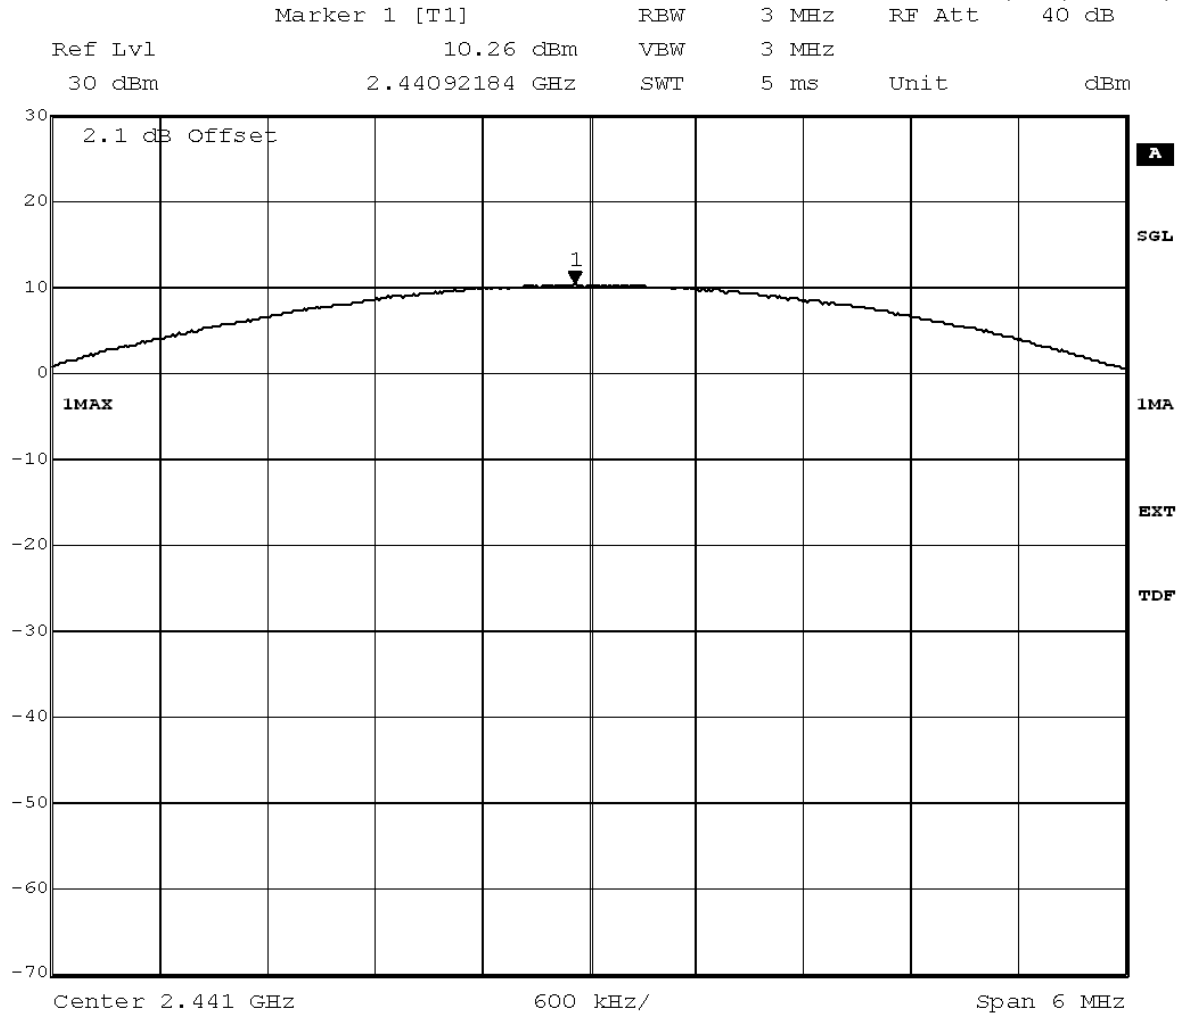


Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 2.NOV.2012 11:51:42

	Marker 1 [T1]	RBW	3 MHz	RF Att	40 dB
Ref Lvl	15.68 dBm	VBW	3 MHz		
30 dBm	2.47989780 GHz	SWT	5 ms	Unit	dBm

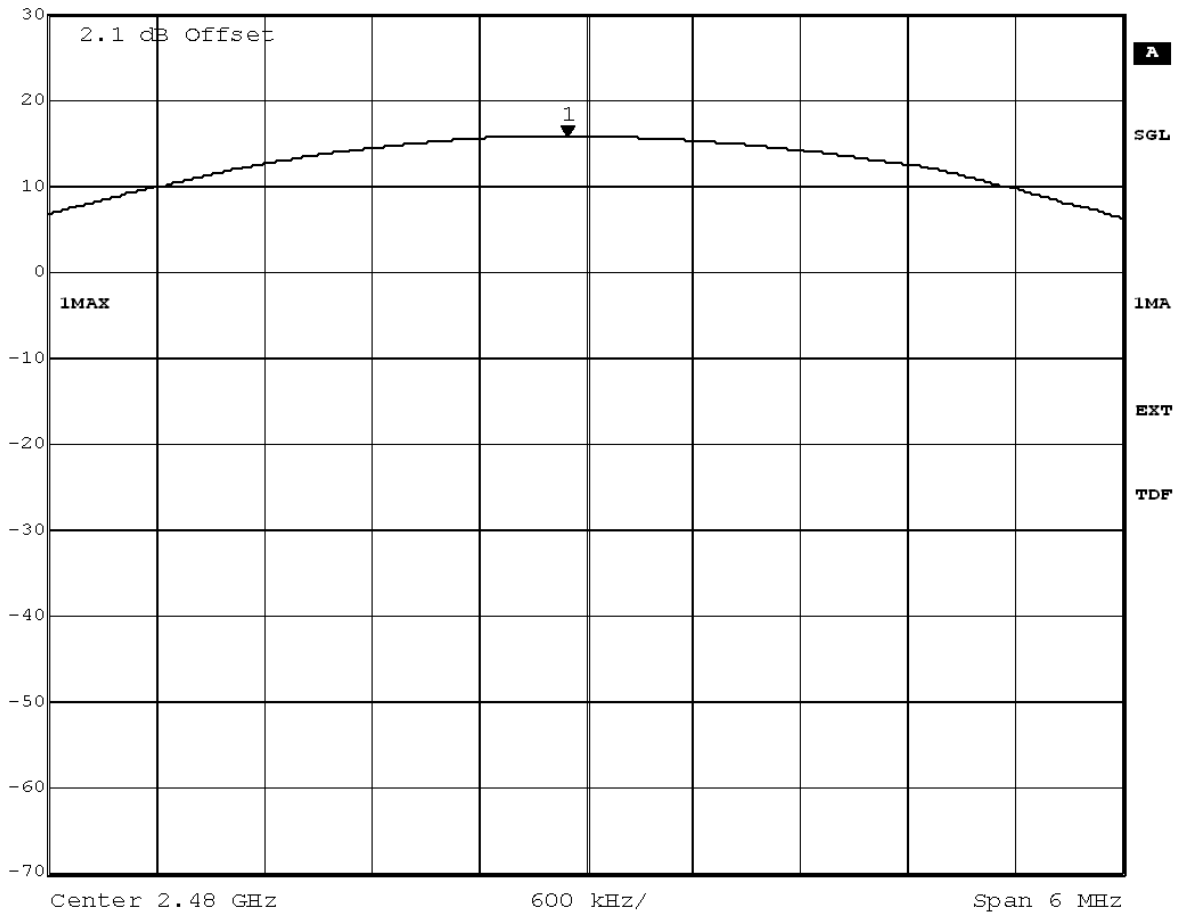

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 2.NOV.2012 13:22:08

	Marker 1 [T1]	RBW	3 MHz	RF Att	40 dB
Ref Lvl	9.87 dBm	VBW	3 MHz		
30 dBm	2.47980160 GHz	SWT	5 ms	Unit	dBm

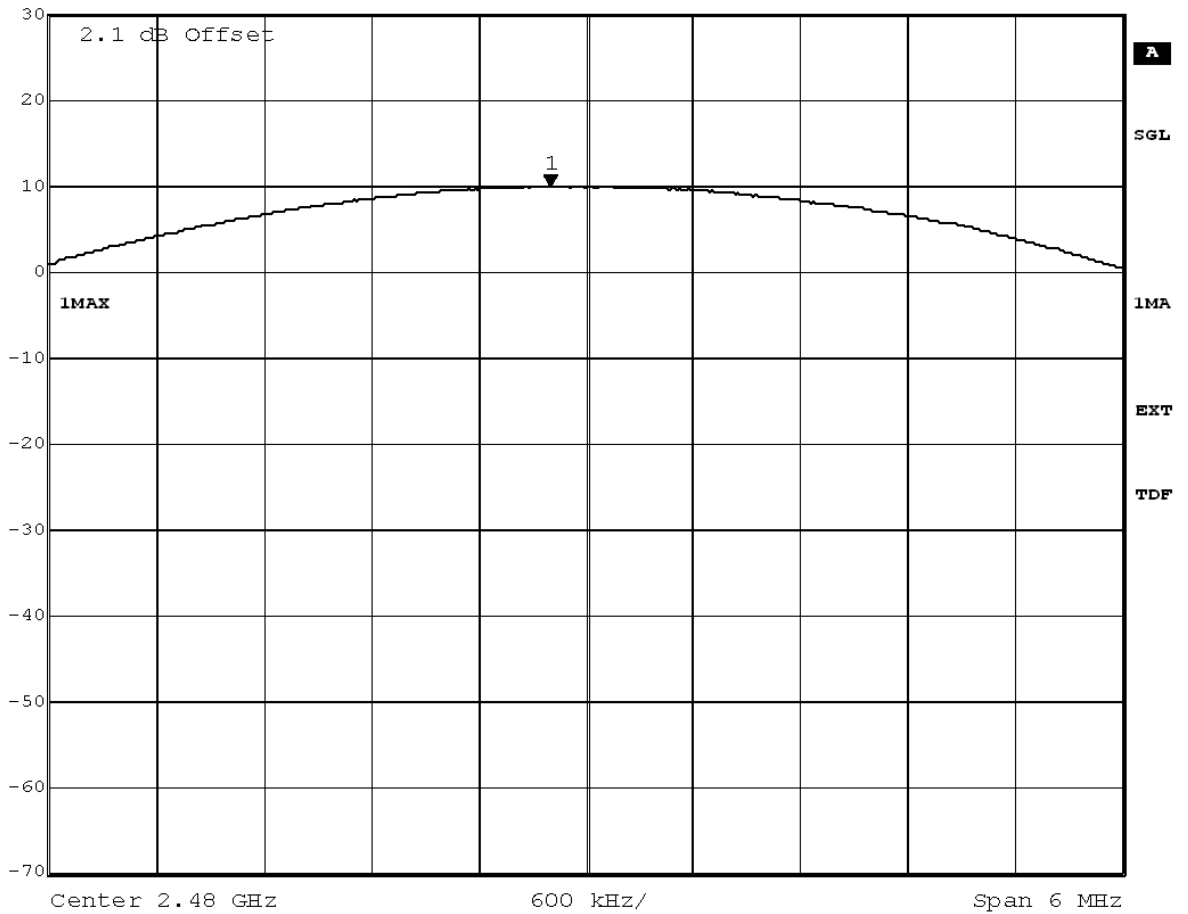

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 2.NOV.2012 13:39:01

3.5.5 15c.5 Spurious RF conducted emissions §15.247 (d)

Test: 15c.5; = BT transmit mode: Low/Mid/High Frequency

Result: Passed
Setup No.: S01_B01
Date of Test: 2012/11/02 12:15
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Mode / Channel	Frequency of emission MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
GFSK / 2402	4783.8	-21.29	14.82	-5.05	16.25
GFSK / 2441	4883.0	-20.31	15.38	-4.58	15.73
GFSK / 2480	4883.0	-20.00	15.24	-4.50	15.50
4 DQPSK / 2402	4783.0	-29.56	7.66	-12.25	17.31
4 DQPSK / 2441	4883.0	-28.78	8.42	-11.68	17.10
4 DQPSK / 2480	4933.0	-28.42	8.35	-11.89	16.53
8DPSK / 2402	4783.0	-29.91	7.48	-12.22	17.69
8DPSK / 2441	4883.0	-28.14	8.38	-11.47	16.67
8DPSK / 2480	4933.0	-28.47	8.52	-11.44	17.03


3.5.6 15c.6 Band edge compliance §15.247 (d)

Test: 15c.6; Band edge compliance Summary


<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_B01
<i>Date of Test:</i>	2012/11/02 19:46
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Modulation	Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
GFSK	2400	-36.17	14.95	-5.05	31.12
4DQPSK	2400	-32.40	7.75	-12.25	20.16
8DPSK	2400	-33.51	7.77	-12.23	21.28
GFSK	2483.5	-43.95	15.49	-4.51	39.44
4DQPSK	2483.5	-44.47	8.51	-11.49	32.98
8DPSK	2483.5	-43.24	8.55	-11.45	31.79

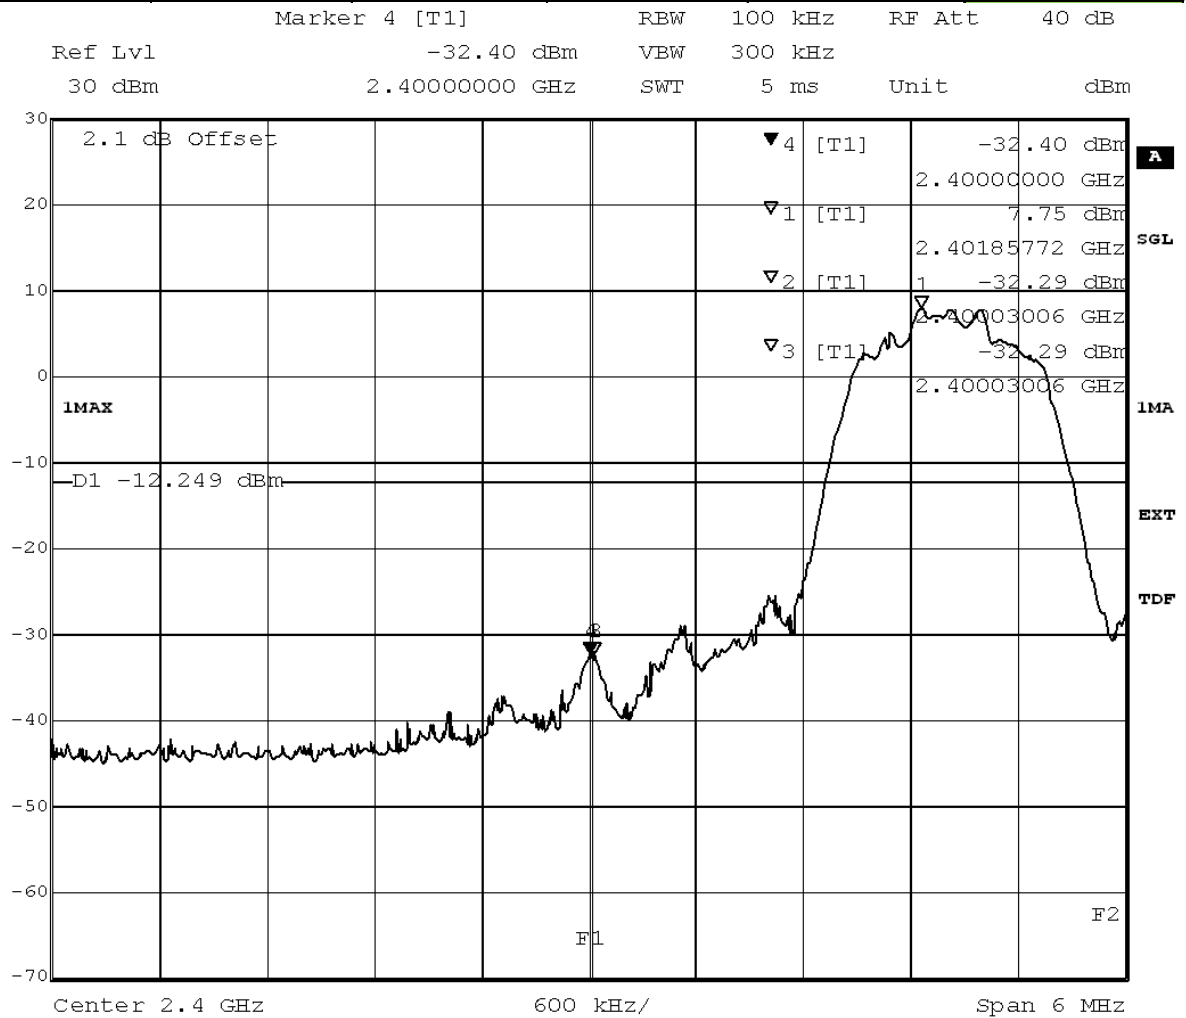

Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 2.NOV.2012 11:02:02

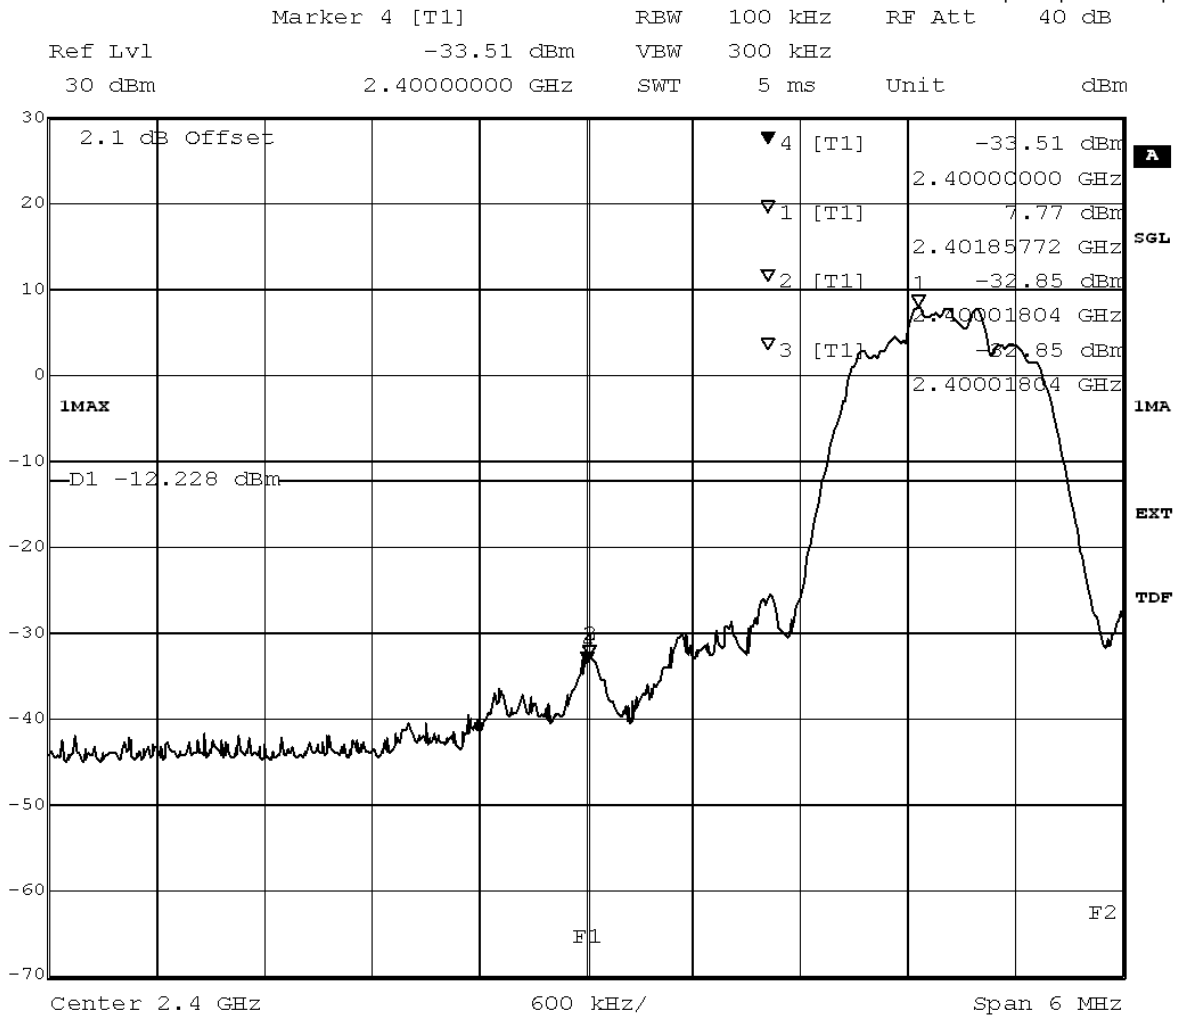


Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 2.NOV.2012 11:19:16

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated

Result: Passed
 Setup No.: S01_A01
 Date of Test: 2012/10/22 20:09
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Diagram No.	TX on	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
BE_003	2480 MHz	Ver + Hor	74	54	2483.5					Passed

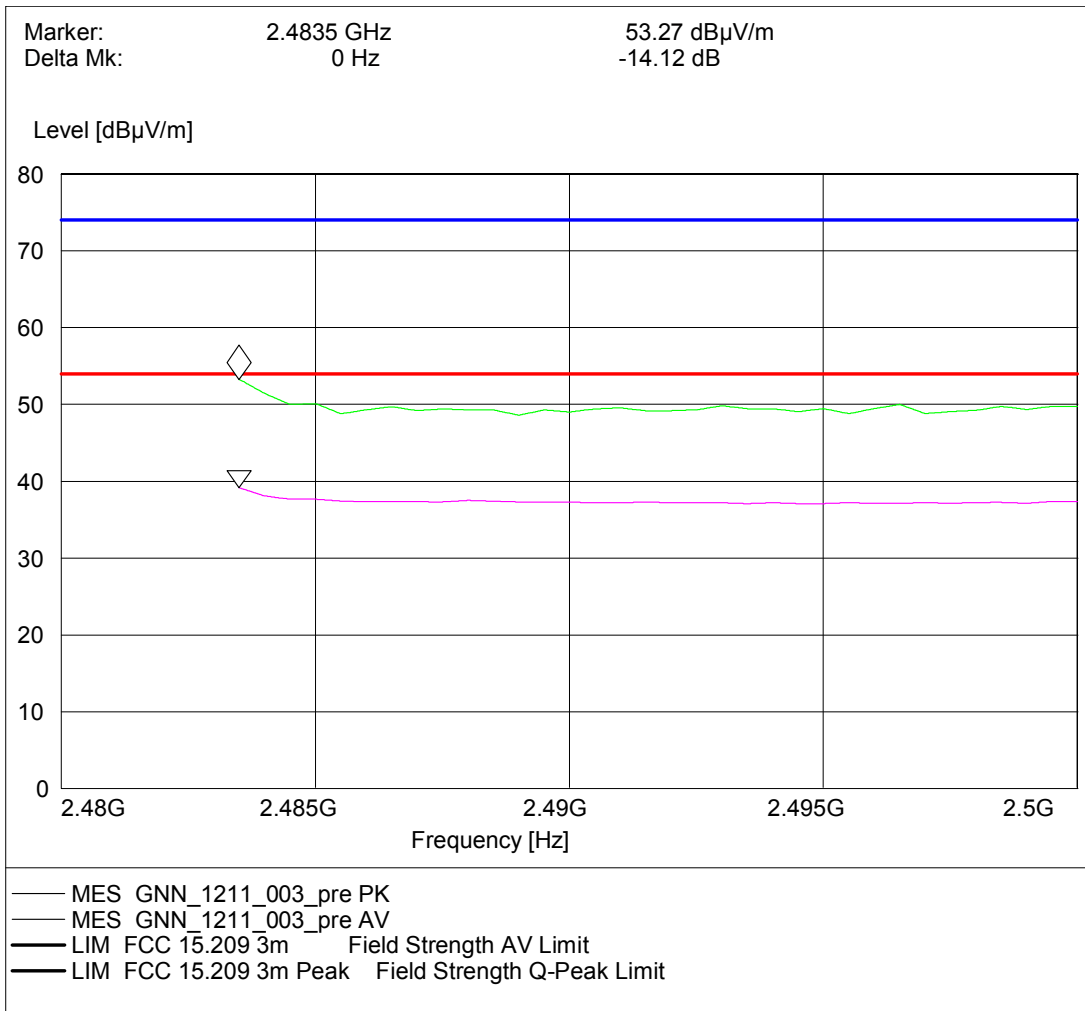

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated

Result: Passed
Setup No.: S01_A01
Date of Test: 2012/10/22 20:11
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Diagram No.	TX on	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
BE_04	2480 MHz	Ver + Hor	74	54	2483.5					Passed



Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated

Result: Passed
Setup No.: S01_A01
Date of Test: 2012/11/22 20:12
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Diagram No.	TX on	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
BE 05	2480 MHz	Ver + Hor	74	54	2483.5					Passed

3.5.7 15c.7 Dwell time §15.247 (a) (1) (iii)


Test: 15c.7; Dwell time Summary

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_B01
<i>Date of Test:</i>	2012/11/02 19:33
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Modulation	Packet type	Time slot length	Dwell time	Dwell time ms
GFSK	DH5	2.93	time slot length * 1600/5 /79 * 31.6	374.51
4_QPSK	DH5	2.93	time slot length * 1600/5 /79 * 31.6	375.04
8DPSK	DH5	2.93	time slot length * 1600/5 /79 * 31.6	375.04

Marker 1 [T1 ndB] RBW 1 MHz RF Att 40 dB
 Ref Lvl ndB 6.00 dB VBW 1 MHz
 30 dBm BW 2.925852 ms SWT 10 ms Unit dBm

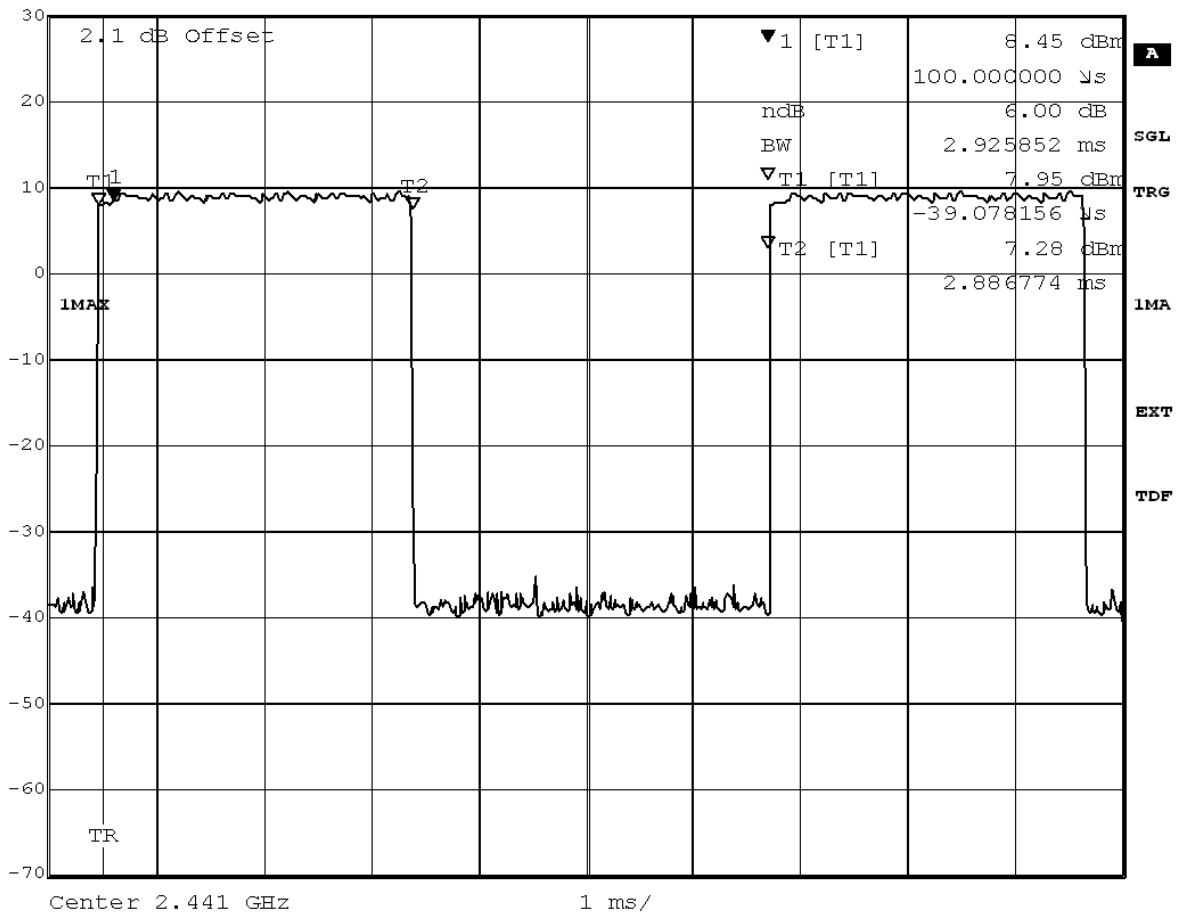

Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 2.NOV.2012 14:26:21


3.5.8 15c.8 Channel separation §15.247 (a) (1)

Test: 15c.8; Channel separation Summary

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_B01
<i>Date of Test:</i>	2012/11/02 19:30
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

	Marker 1 [T1]	RBW	30 kHz	RF Att	40 dB
Ref Lvl	9.06 dBm	VBW	100 kHz		
30 dBm	2.44100000 GHz	SWT	8.5 ms	Unit	dBm

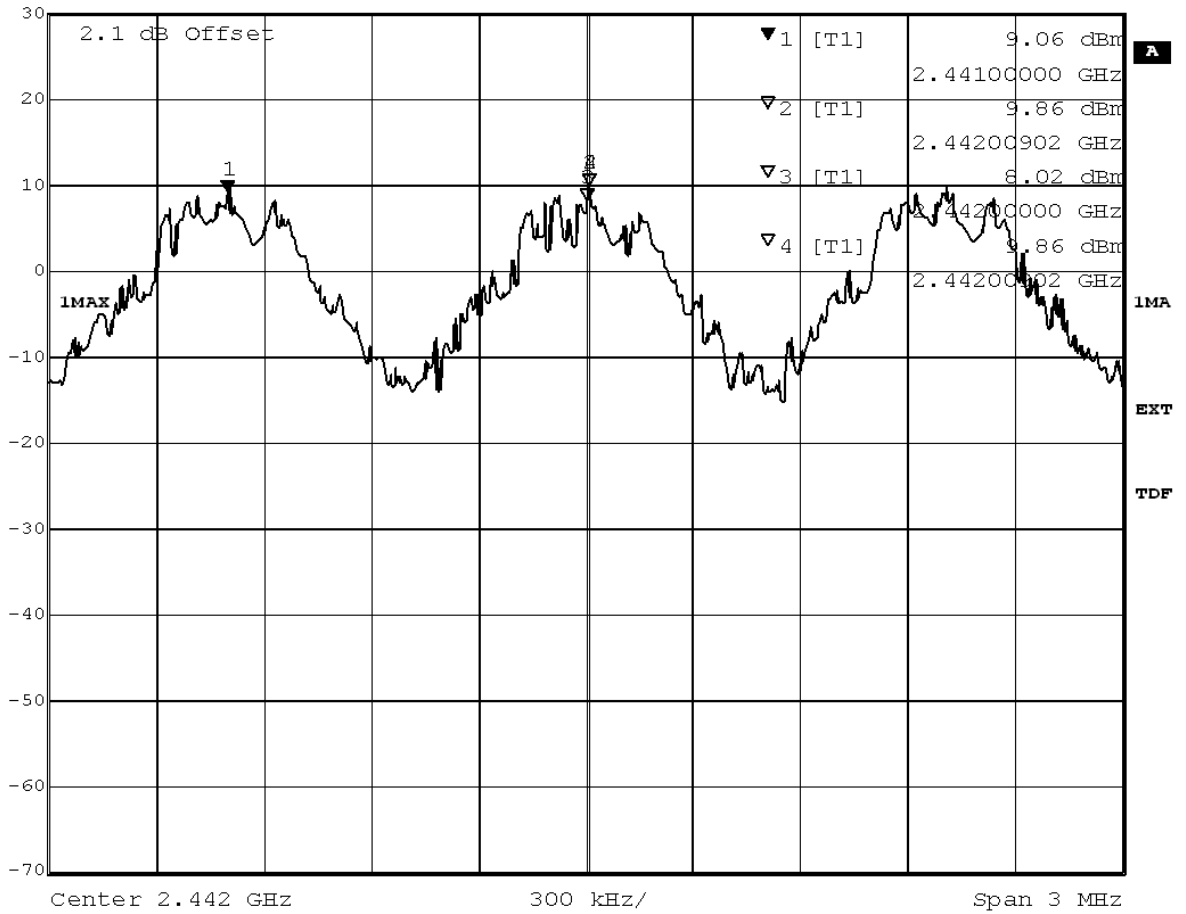

Title: Channel separation
 Comment A: CH H: Hopping
 Date: 2.NOV.2012 14:37:57

Modulation	Channel Separation
GFSK	1 MHz
PI/4 DQPSK	1 MHz
8DPSK	1 MHz


3.5.9 15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)

Test: 15c.9; Number of hopping frequencies Summary

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_B01
<i>Date of Test:</i>	2012/11/15 19:27
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Modulation	Number of hopping channels
GFSK	79
PI/4 DQPSK	79
8DPSK	79

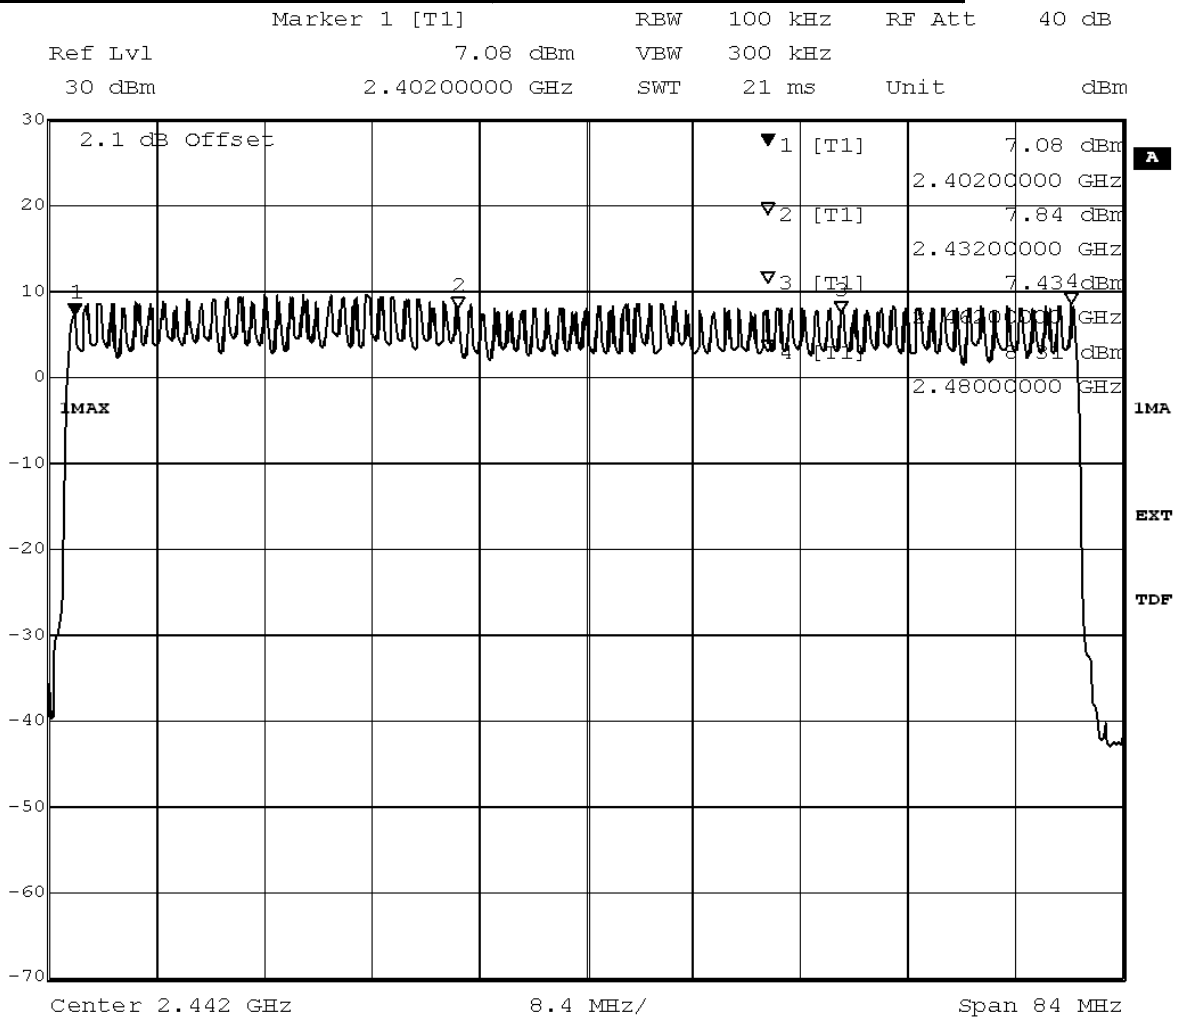

Title: Number of hopping frequencies
 Comment A: CH H: Hopping
 Date: 2.NOV.2012 15:07:17

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2
Manufacturer:	Frankonia
Description:	Anechoic Chamber for radiated testing
Type:	10.58x6.38x6.00 m ³

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer	
Air compressor	none	-	Atlas Copco	
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2011/01/11	2014/01/10
	IC listing 3699A-1 3m		2011/02/07	2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH	
EMC camera	CE-CAM/1	-	CE-SYS	
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi	
Filter ISDN	B84312-C110-E1	-	Siemens&Matsushita	
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita	

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer	
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration		2011/11/11	2012/11/10
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	DKD calibration		2011/01/20	2013/01/19

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer		
Antenna mast	AS 620 P	620/37	HD GmbH		
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2008/10/27	2013/10/26
	Standard Calibration			2012/01/18	2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02- 2+W38.02-2	Rosenberger Micro-Coax		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
	Path Calibration			2012/05/24	2012/11/23
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/05/18	2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/06/26	2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Path Calibration			2012/05/24	2012/11/23
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
	Path Calibration		2012/05/24	2012/11/23
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170			
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG	
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG	
<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/10/27	2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH	
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH	
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH	

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates	
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates	
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.	
<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Customized calibration		2011/10/19	2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis	
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis	
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH	
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright	
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG	

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer	
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/11/24	2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Initial factory calibration		2012/01/26	2014/01/25
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Firmware: V.2.01.25		2012/07/03	2012/10/29
	3G : KC42x 11.48.02, 12.16.00			
	LTE: KC501 1.7.0 up to 2.0.0			
	KC503 1.7.2 up to 2.0.0			
	KC506 1.9.8 up to 2.0.0			
	KC507 1.7.0			
KC508 1.8.5 up to 2.0.0				
KC551 1.4.9 up to 2.0.0				
KC553 1.7.0 up to 2.0.0				
KC556 2.0.0				
KC571 1.8.5 up to 2.0.0				
KC572 1.8.5 up to 2.0.0				

Firmware: V.2.01.25		2012/10/29		
3G : KC42x 12.23.00				
LTE: KC501 1.7.0 up to 2.0.0				
KC503 1.7.2 up to 2.0.0				
KC506 1.9.8 up to 2.0.0				
KC507 1.7.0				
KC508 1.8.5 up to 2.0.0				
KC551 1.4.9 up to 2.0.0				
KC553 1.7.0 up to 2.0.0				
KC556 2.0.0				
KC571 1.8.5 up to 2.0.0				
KC572 1.8.5 up to 2.0.0				

Firmware: V.3.00.11				
LTE: KC501 2.2.0				
KC503 2.2.0				
KC506 2.2.0				
KC508 2.2.0				
KC551 2.2.0				
KC553 2.2.0				
KC556 2.2.0				
KC571 2.2.0				
KC572 2.2.0				

Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/05/26	2013/05/25
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>

Single Devices for Digital Signalling Devices (continued)

Single Device Name	Type	Serial Number	Manufacturer	
Universal Radio Communication Tester	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16	
	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2011/12/07	2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02	
	SW: K62, K69		2008/11/03	

Test Equipment Emission measurement devices

Lab ID:	Lab 1, Lab 2
<i>Description:</i>	Equipment for emission measurements
<i>Serial Number:</i>	see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer	
Personal Computer	Dell	30304832059	Dell	
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2012/05/22	2013/05/21
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2012/05/21	2013/05/20
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2011/05/12	2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2011/12/05	2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03	

Test Equipment Multimeter 12

Lab ID: Lab 3
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2011/10/18 2013/10/17

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 3
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/08/21 2013/08/20
Power Meter NRVD	NRVD	832025/059	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/07/23 2013/07/22
Power Sensor NRV Z1 A	PROBE	832279/013	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/07/23 2013/07/22
Power Supply	NGSM 32/10	2725	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2011/06/15 2013/06/14
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2012/08/20 2013/08/19
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2010/06/23 2013/06/20

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 3
Description: Shielded Room 4m x 6m

Test Equipment T/H Logger 04

Lab ID: Lab 3
Description: Lufft Opus10
Serial Number: 7481

Single Devices for T/H Logger 04

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
ThermoHygro Datalogger 04 (Environ)	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH

Test Equipment Temperature Chamber 01

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>		
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH		
			<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
			Customized calibration	2012/03/12	2014/03/11

5 Annex

5.1 Additional Information for Report

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C - Intentional Radiators

- § 15.201 Equipment authorization requirement
- § 15.207 Conducted limits
- § 15.209 Radiated emission limits; general requirements
- § 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

Description of Methods of Measurements

Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4.
The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz. The EUT was connected to the spectrum analyzer via a short coax cable.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm) : Implicit Limit: Max. 20 dB BW = $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$
2. If the system output power exceeds 125 mW (21.0 dBm): Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = $10 \log (\text{Limit (W)}/1\text{mW})$
==> Maximum Output Power: 30 dBm

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz

- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30-1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs (BT Timing 1.25 ms)
- Turntable angle range: -180 to +180°

- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to +180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/-22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/-25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit...

Used conversion factor: $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1µV/m)$

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the

desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Dwell time

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

with:

- hop rate = 1600 * 1/s for DH1 packets = 1600 s⁻¹
- hop rate = 1600/3 * 1/s for DH3 packets = 533.33 s⁻¹
- hop rate = 1600/5 * 1/s for DH5 packets = 320 s⁻¹
- number of hopping channels = 79
- 31.6 s = 0.4 seconds multiplied by the number of hopping channels = 0.4 s * 79

The highest value of the dwell time is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

Channel separation

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel separation is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Number of hopping frequencies

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement. The number of hopping frequencies is independent from the modulation pattern. The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Centre frequency: 2442 MHz
- Frequency span: 84 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

FCC and IC Correlation of measurement requirements

The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.


Bluetooth® equipment:

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen: 7.2.4
Occupied bandwidth	§ 15.247 (a) (1)	RSS-210: A8.1
Peak power output	§ 15.247 (b) (1)	RSS-210: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen: 6;RSS-210: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen: 6;RSS-210: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210: A8.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Channel separation	§ 15.247 (a) (1)	RSS-210: A8.1
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Antenna requirement	§ 15.203 / 15.204	RSS-Gen: 7.1.2

Digital Apparatus:

Measurement	FCC reference	IC reference
Conducted Emissions(AC Power Line)	§15.107	ICES-003
Spurious Radiated Emissions	§15.109	ICES-003

Setup Drawings

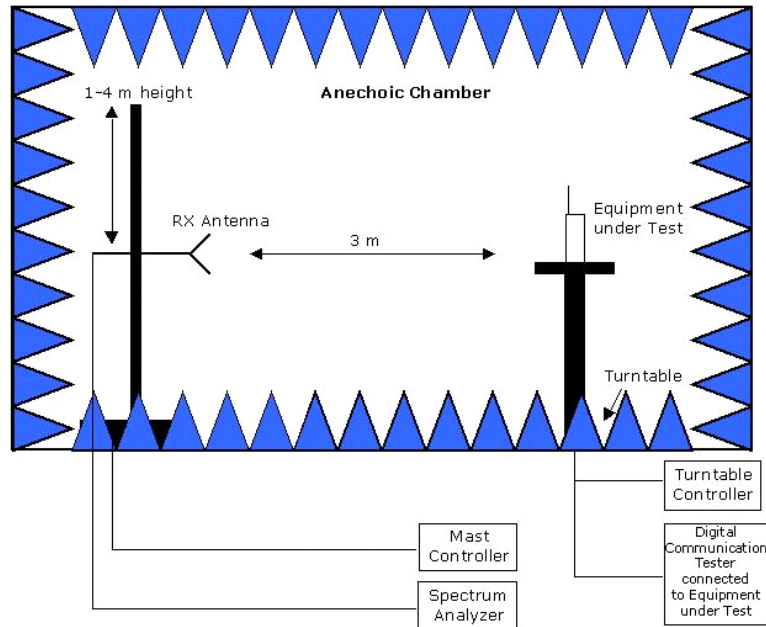

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:
Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces



6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Auxiliary Equipment	5
2.5	Operating Mode(s)	5
2.6	Setups used for Testing	6
3	Results	6
3.1	General	6
3.2	List of the Applicable Body	6
3.3	List of Test Specification	6
3.4	Summary	7
3.5	Detailed Results	9
3.5.1	15c.1 Conducted emissions (AC power line) §15.207	9
3.5.2	15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	12
3.5.3	15c.3 Occupied bandwidth §15.247 (a) (1)	17
3.5.4	15c.4 Peak power output §15.247 (b) (1)	21
3.5.5	15c.5 Spurious RF conducted emissions §15.247 (d)	26
3.5.6	15c.6 Band edge compliance §15.247 (d)	27
3.5.7	15c.7 Dwell time §15.247 (a) (1) (iii)	32
3.5.8	15c.8 Channel separation §15.247 (a) (1)	34
3.5.9	15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)	37



Reference: MDE_GNNET_1211_FCCa
According to
Title 47 CFR chapter I part 15 subpart C

4 Test Equipment Details	39
4.1 List of Used Test Equipment	39
5 Annex	46
5.1 Additional Information for Report	46
6 Index	56