



# InterLab<sup>®</sup>

## Final Report on

### Model: OTE14

**FCC ID: BCE-OTE14**    **IC: 2386C-OTE14**

**Report Reference:**    MDE\_GNNET\_1304\_FCCb  
According to  
Title 47 CFR chapter I part 15 subpart C

**Date:**    May 22, 2013

**Test Laboratory:**

7Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



Note:  
The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Ralf Mertens  
Vorstand • Board:  
Dr. H.-J. Meckelburg

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt- IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Patrick Lomax  
*Date Of Test Report:* 2013/05/22  
*Date of first test:* 2013/04/15  
*Date of last test:* 2013/04/19

### 1.2 Applicant Data

*Company Name:* GN Netcom A/S  
*Street:* Lautrupbjerg 7  
*City:* DK-2750 Ballerup  
*Country:* Denmark  
*Contact Person:* Mr. Tom Ringtved  
*Phone:* +45 45 75 91 86  
*E-Mail:* tringtved@gn.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE

---

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkKS-Registration no. D-PL-12140-01-01

### 1.4 Signature of the Testing Responsible



---

Patrick Lomax  
responsible for tests performed in: Lab 1, Lab 2, Lab 3

## 1.5 Signature of the Accreditation Responsible

M. Kullik [M. Kullik]

Accreditation scope responsible person  
responsible for Lab 1, Lab 2, Lab 3



7 layers AG, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: Jabra® OTE14

Type / Model / Family:	Jabra® OTE14
Product Category:	Mobile Phone Accessory
<b>Manufacturer:</b>	
Company Name:	Please see applicant data
Contact Person:	Please see applicant data

#### Parameter List:

Parameter name	Value
----------------	-------



## 2.2 Detailed Description of OUT Samples

### **Sample : A01**

<i>OUT Identifier</i>	Jabra® OTE14		
<i>Sample Description</i>	Radiated Sample		
<i>Serial No.</i>	DUT BT #2		
<i>HW Status</i>	28-03753		
<i>SW Status</i>	A04		
<i>Low Voltage</i>	3.7 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	60 °C
<i>Nominal Voltage</i>	4.0 V	<i>Normal Temp.</i>	25 °C

#### ***Parameter List:***

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
Antenna Gain	0 (dBi)
Channel_BW	1 (MHz)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

### **Sample : C01**

<i>OUT Identifier</i>	Jabra® OTE14		
<i>Sample Description</i>	Conducted Bluetooth LE		
<i>Serial No.</i>	DUT BTLE #2		
<i>HW Status</i>	28-03753		
<i>SW Status</i>	A04		
<i>Low Voltage</i>	3.7 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	60 °C
<i>Nominal Voltage</i>	4.0 V	<i>Normal Temp.</i>	25 °C

#### ***Parameter List:***

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
Antenna Gain	0 (dBi)
Channel_BW	1 (MHz)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

## 2.3 OUT Features

### Features for OUT: Jabra® OTE14

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
<b>Features for scope: FCC_v2</b>			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
BTLE	Support of Bluetooth Low Energy		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		

## 2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 02	0335C2065	A30638114250			Fujitsu Siemens Power Supply
AE 01	AMILO Pro V3205	YK2H014267	110V / 60Hz AC		Fujitsu Siemens Laptop
AE 05	Flatron L1740BQ	509WANF1W607	110V / 60 Hz AC		LG TFT Display
AE 03	M-BB48	LZC90505478			Logitech Mouse
AE 04	RS 6000 USB ON	G 0000273 2P28			CHERRY Keyboard

## 2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>

### S01\_A01 (Radiated Setup)

Sample: A01 Radiated Sample

### S01\_C01 (BT Low Energy Conducted)

Sample: C01 Conducted Bluetooth LE

### S02\_A01 (Computer Equipment Setup)

Sample: A01	Radiated Sample	AE 02	Fujitsu Siemens Power Supply
		AE 01	Fujitsu Siemens Laptop
		AE 05	LG TFT Display
		AE 03	Logitech Mouse
		AE 04	CHERRY Keyboard

## 3 Results

### 3.1 General

**Documentation of tested devices:**

Available at the test laboratory.

**Interpretation of the test results:**

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

### 3.2 List of Test Specification

<i>Test Specification:</i>	<b>FCC part 2 and 15</b>
<i>Version</i>	10-1-11 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES



### 3.3 Summary

<i>Test Case Identifier / Name Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>15c.1 Conducted emissions (AC power line) §15.207</b> 15c.1; Mode = Charge via USB on PC	Passed	2013/04/18	Lab 1	S02_A01
<b>15c.10 Power density §15.247 (e)</b> 15c.10; Frequency = Low/Mid/High	Passed	2013/04/18	Lab 3	S01_C01
<b>15c.11 6dB Bandwidth §15.247 (a) (2)</b> 15c.11; Frequency = Low/Mid/High	Passed	2013/04/18	Lab 3	S01_C01
<b>15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209</b> 15c.2; Frequency = low/mid/high	Passed	2013/04/19	Lab 2	S01_A01
<b>15c.4 Peak power output §15.247 (b) (1)</b> 15c.4; Peak power output Summary	Passed	2013/04/18	Lab 3	S01_C01
<b>15c.5 Spurious RF conducted emissions §15.247 (d)</b> 15c.5; = BT transmit mode: Low/Mid/High Frequency	Passed	2013/04/18	Lab 3	S01_C01
<b>15c.6 Band edge compliance §15.247 (d)</b> 15c.6; Band edge compliance Summary	Passed	2013/04/18	Lab 3	S01_C01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	Passed	2013/04/15	Lab 2	S01_A01
<b>15c.7 Dwell time §15.247 (a) (1) (iii)</b> 15c.7; Dwell time Summary	Passed	2013/04/18	Lab 3	S01_C01
<b>15c.8 Channel separation §15.247 (a) (1)</b> 15c.8; Channel separation Summary	Passed	2013/04/18	Lab 3	S01_C01



### **3.4 Detailed Results**

#### **3.4.1 15c.1 Conducted emissions (AC power line) §15.207**

**Test: 15c.1; Mode = Charge via USB on PC. Data traffic via continuous USB HCI Ping program.**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S02_A01
<i>Date of Test:</i>	2013/04/18 15:24
<i>Body:</i>	
<i>Test Specification:</i>	FCC part 2 and 15

**Charging via USB on PC. Data traffic is established by a program sending continuous HCI commands over USB. Device is unable to transmit while under charging conditions.**




**Detailed Results:**

**AC MAINS CONDUCTED**

EUT: (CJ220a01)  
 Manufacturer: GNNet Com  
 Operating Condition: USB Data traffic  
 Test Site: 7 layers Ratingen  
 Operator: Doe  
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207  
 Comment: computer peripheral setup  
 Start of Test: 18.04.2013 / 11:52:02

**SCAN TABLE: "FCC Voltage"**

Short Description:	FCC Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

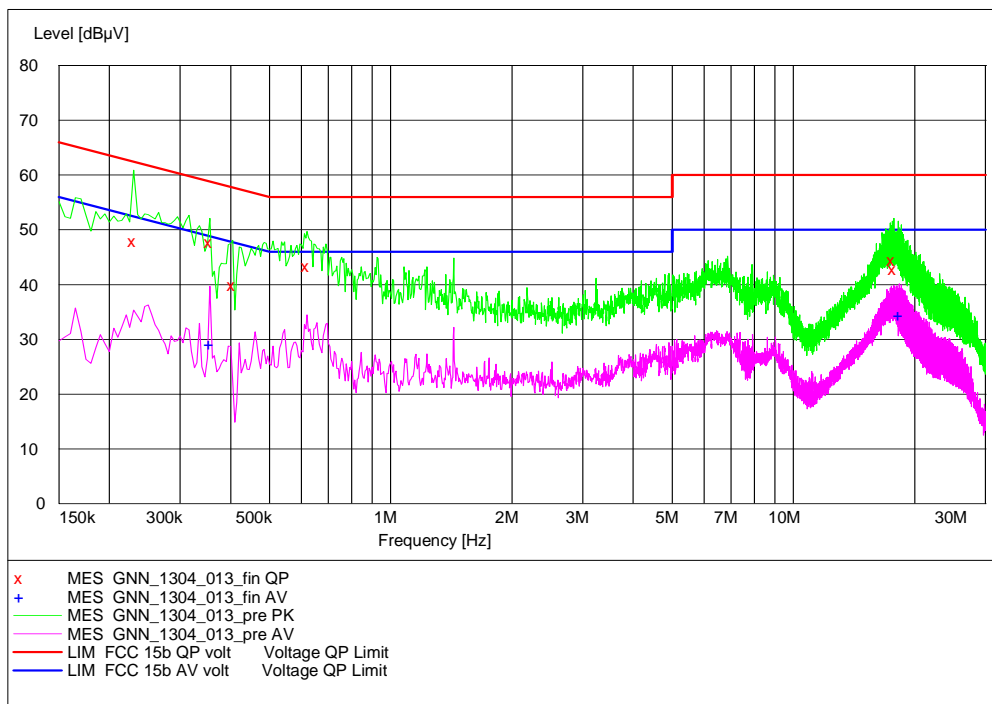

**MEASUREMENT RESULT: "GNN\_1304\_013\_fin QP"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBuV	dB	dBuV	dB		
0.230000	47.90	10.1	62	14.6	N	GND
0.355000	47.70	10.1	59	11.1	L1	GND
0.405000	40.00	10.1	58	17.8	L1	FLO
0.620000	43.40	10.1	56	12.6	N	GND
17.605000	44.40	10.9	60	15.6	N	FLO
17.760000	42.70	10.9	60	17.3	L1	GND

**MEASUREMENT RESULT: "GNN\_1304\_013\_fin AV"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBuV	dB	dBuV	dB		
0.355000	29.20	10.1	49	19.6	L1	GND
18.330000	34.40	10.9	50	15.6	N	FLO



**3.4.2 15c.10 Power density §15.247 (e)**


**Test: 15c.10; Frequency = Low/Mid/High**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_C01
<i>Date of Test:</i>	2013/04/18 14:46
<i>Body:</i>	
<i>Test Specification:</i>	FCC part 2 and 15

**Detailed Results:**

		Power Density			
		2402 MHz	2426 MHz	2440 MHz	2480 MHz
Modulation	Conditions	Power Density (dBm)	Power Density (dBm)	Power Density (dBm)	Power Density (dBm)
GFSK	TN, VN	-11.11	-9.79	-8.77	-8.09

<b>Maximum Power Density</b>	<b>-8.09</b>	<b>dBm</b>
------------------------------	--------------	------------

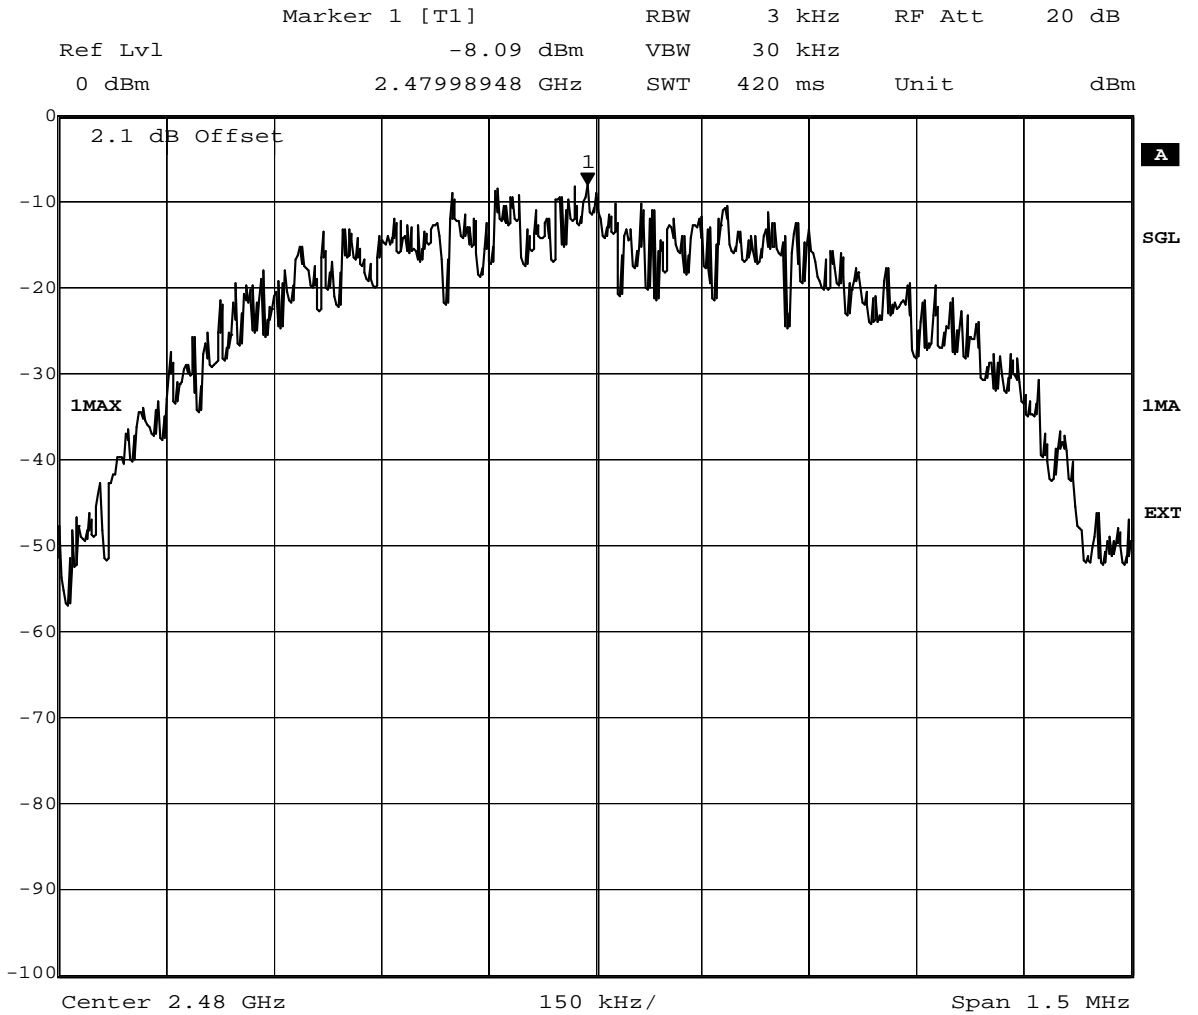

Date: 18.APR.2013 14:55:05




**3.4.3 15c.11 6dB Bandwidth §15.247 (a) (2)**

**Test: 15c.11; Frequency = Low/Mid/High**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_C01
<i>Date of Test:</i>	2013/04/18 14:54
<i>Body:</i>	
<i>Test Specification:</i>	FCC part 2 and 15

**Detailed Results:**

Modulation	Frequency	6dB Bandwidth KHz
GFSK	2402 MHz	745.491
	2426 MHz	751.503
	2441 MHz	757.515
	2480 MHz	757.515

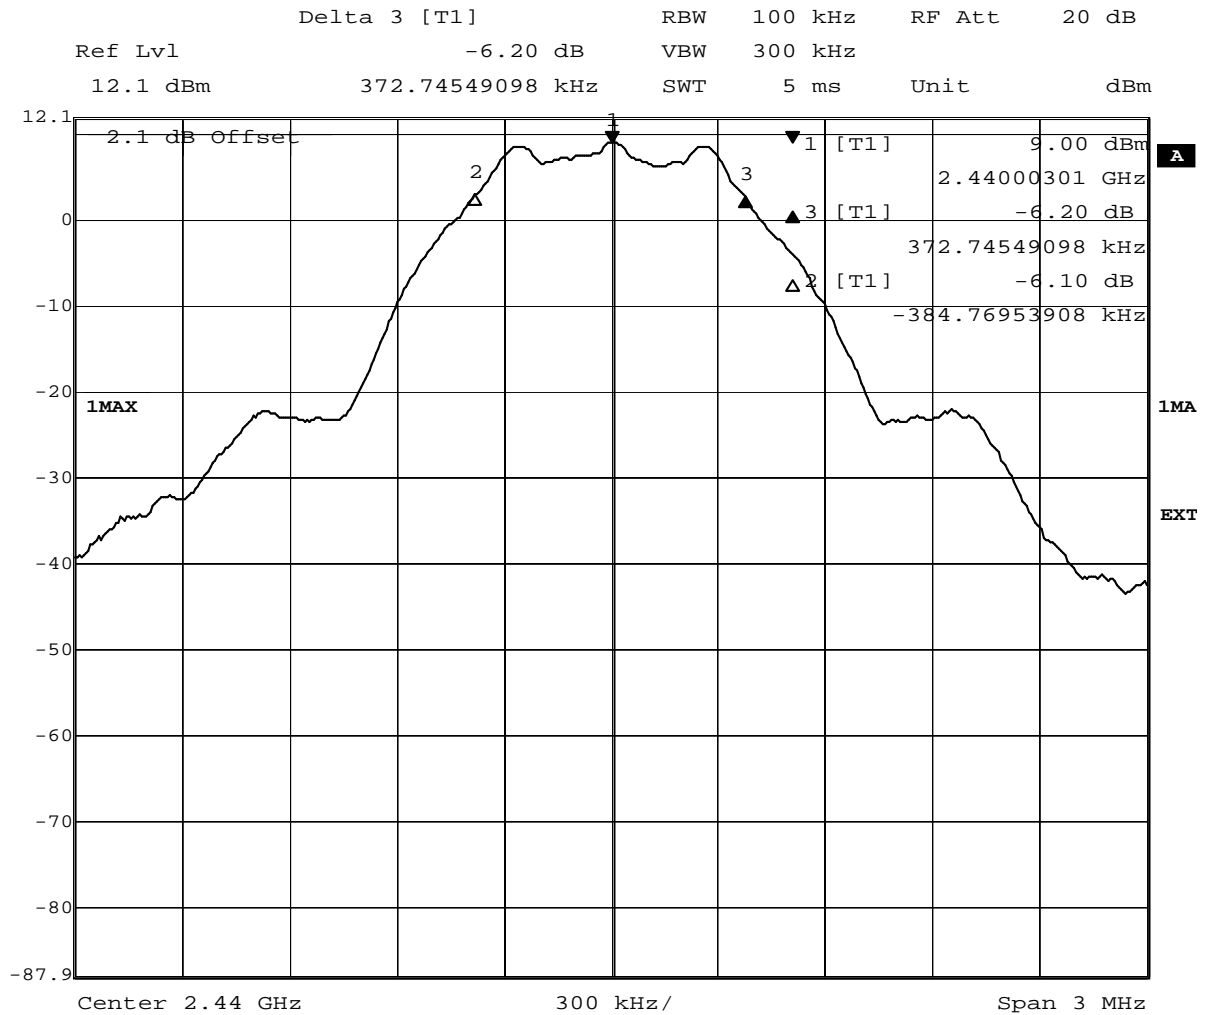

Date: 22.MAY.2013 13:43:37



**3.4.4 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b),  
§15.209**

**Test: 15c.2; Frequency = low/mid/high**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_A01
<i>Date of Test:</i>	2013/04/19 15:21
<i>Body:</i>	
<i>Test Specification:</i>	FCC part 2 and 15

**Detailed Results:**

**Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1**

**Frequency range 30 MHz - 1 GHz**

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
GNN_1304_001	Ver + Hor					Passed

**Frequency range 1 GHz - 25 GHz**

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1304_004	Ver + Hor	74	54	4804	49.20	37.70	24.80	16.30	Passed
GNN_1304_018	Ver + Hor	74	54	19221	55.08	45.21	18.92	8.79	Passed
		74	54	19829	51.53	40.89	22.47	13.11	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

**Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1**

**Frequency range 9 kHz - 1 GHz**

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
GNN_1304_002	Ver + Hor					Passed

**Frequency range 1 GHz - 25 GHz**

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1304_005	Ver + Hor	74	54	4882	54.00	42.40	20.00	11.60	Passed
GNN_1304_005	Ver + Hor	74	54	7323	48.70	35.90	25.30	18.10	Passed
GNN_1304_019	Ver + Hor	74	54	19205	55.69	44.87	18.31	9.13	Passed
		74	54	19525	53.68	43.40	20.32	10.60	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

**Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 1-DH1**

**Frequency range 30 MHz - 1 GHz**

Diagram No.	Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
GNN_1304_003	Ver + Hor					Passed

**Frequency range 1 GHz - 25 GHz**

Diagram No.	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1304_006	Ver + Hor	74	54	2484	51.90	38.00	22.10	16.00	Passed
GNN_1304_006	Ver + Hor	74	54	4960	54.00	42.30	20.00	11.70	Passed
GNN_1304_006	Ver + Hor	74	54	7440	50.30	37.30	23.70	16.70	Passed
GNN_1304_020	Ver + Hor	74	54	19205	55.57	44.98	18.43	9.02	Passed
		74	54	19837	50.85	40.57	23.15	13.43	Passed


Remark: No (further) spurious emissions in the range 20 dB below the limit found.

**EMI RADIATED TEST**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT local TX on 2441MHz, 1-DH1  
 Test Site: 7 layers, Ratingen  
 Operator: URO  
 Test Specification: FCC part 15 b  
 Comment: Horizontal EUT position  
 Start of Test: 10.04.2013 / 23:03:45

**SCAN TABLE: "FCC part 15 b"**

Short Description:	FCC part 15 b					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

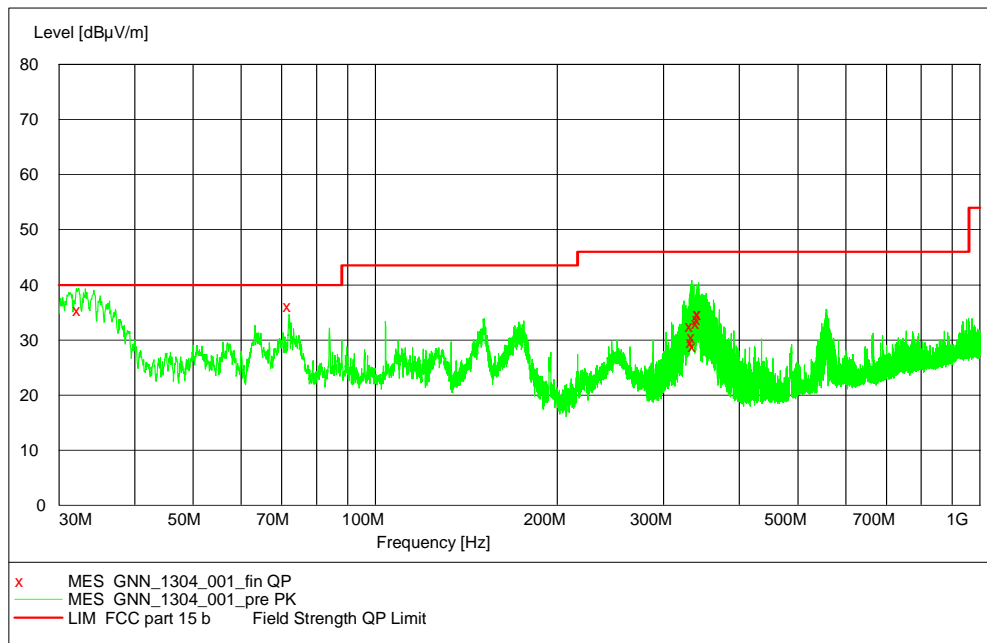

**MEASUREMENT RESULT: "GNN\_1304\_001\_fin QP"**


11.04.2013 00:16

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
32.280000	35.50	19.2	40.0	4.5	100.0	21.00	VERTICAL
72.000000	36.10	8.2	40.0	3.9	204.0	247.00	VERTICAL
332.820000	32.50	13.9	46.0	13.5	122.0	7.00	HORIZONTAL
334.020000	29.70	13.9	46.0	16.3	112.0	0.00	HORIZONTAL
335.100000	30.60	13.9	46.0	15.4	112.0	0.00	HORIZONTAL
336.300000	29.00	13.9	46.0	17.0	125.0	344.00	HORIZONTAL
340.800000	33.00	14.1	46.0	13.0	110.0	0.00	HORIZONTAL
342.120000	33.70	14.1	46.0	12.3	125.0	10.00	HORIZONTAL
342.480000	34.60	14.1	46.0	11.4	107.0	0.00	HORIZONTAL
342.900000	34.70	14.1	46.0	11.3	105.0	0.00	HORIZONTAL




**SPURIOUS EMISSION RADIATED**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT local TX on 2402MHz, 1-DH1  
 Test Site: 7 layers, Ratingen  
 Operator: Doe  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 11.04.2013 / 09:18:42

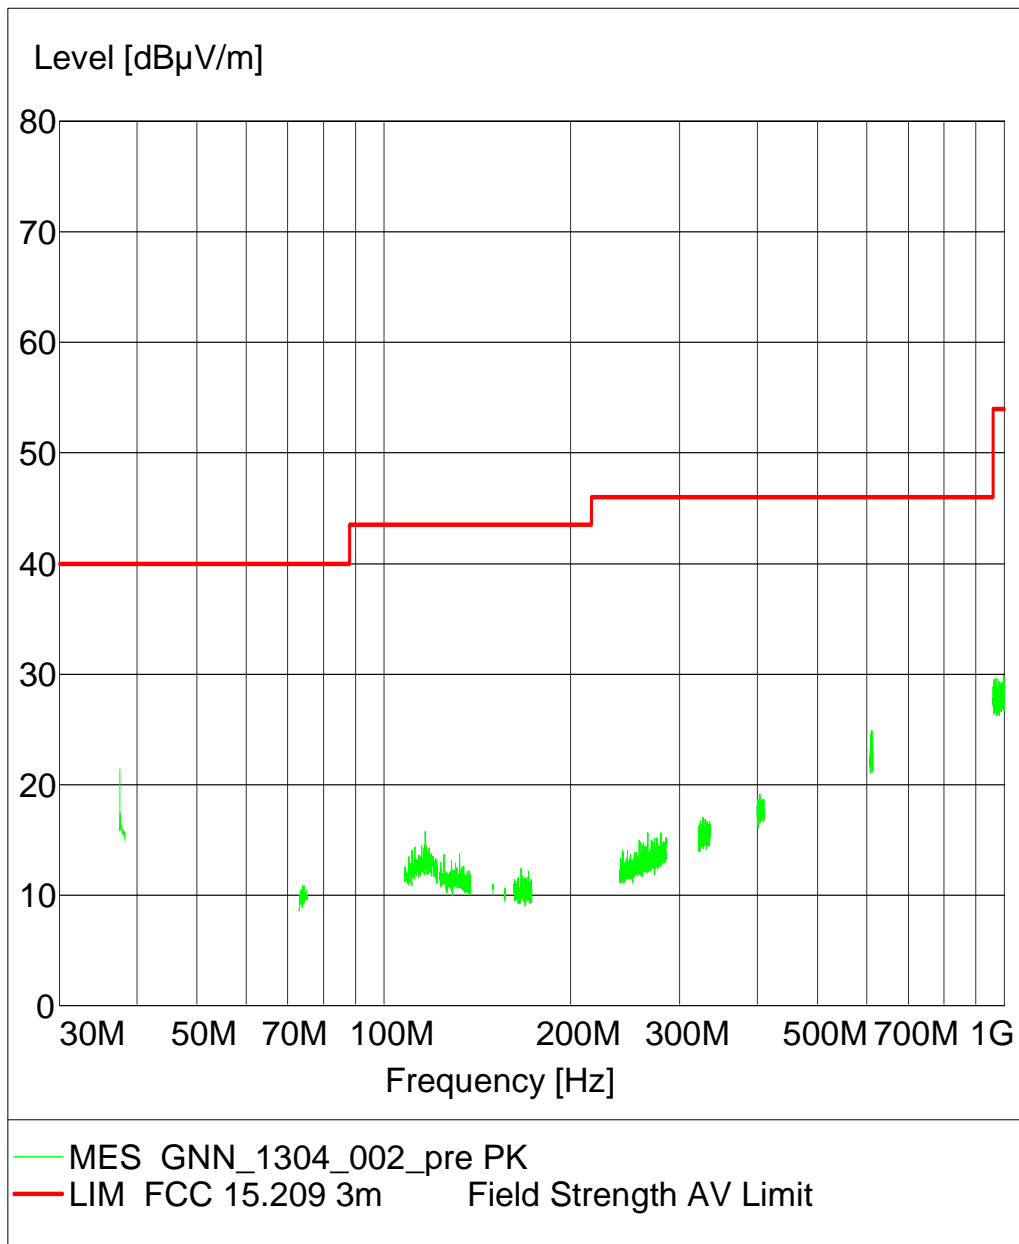


**SPURIOUS EMISSION RADIATED**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT local TX on 2480MHz, 1-DH1  
 Test Site: 7 layers, Ratingen  
 Operator: Doe  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 11.04.2013 / 09:37:32

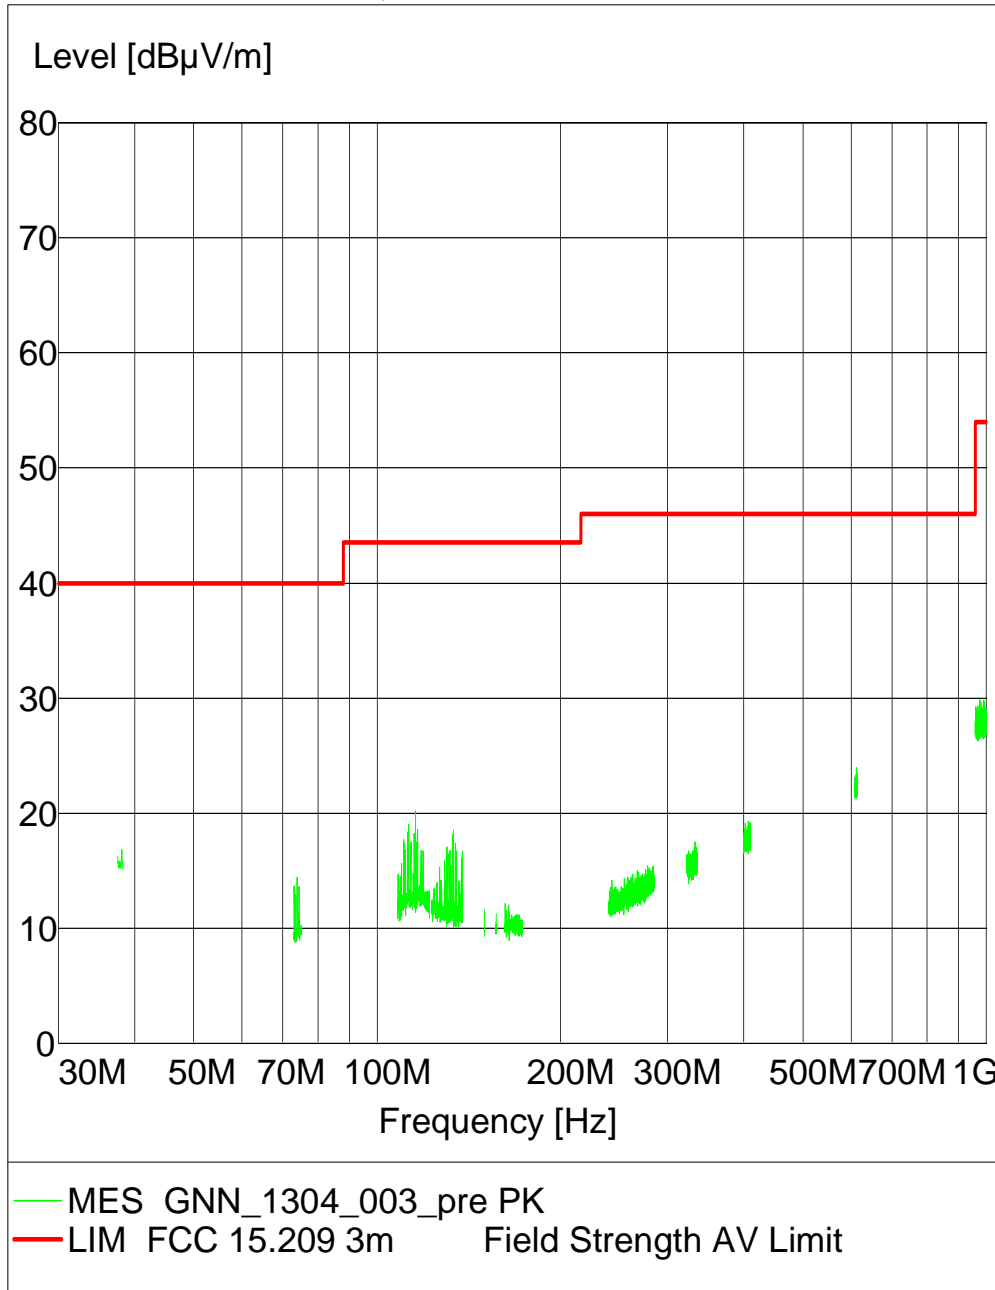


**SPURIOUS EMISSION RADIATED**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT local TX on 2402MHz, 1-DH1  
 Test Site: 7 layers Ratingen  
 Operator: URO  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 15.04.2013 / 21:29:51

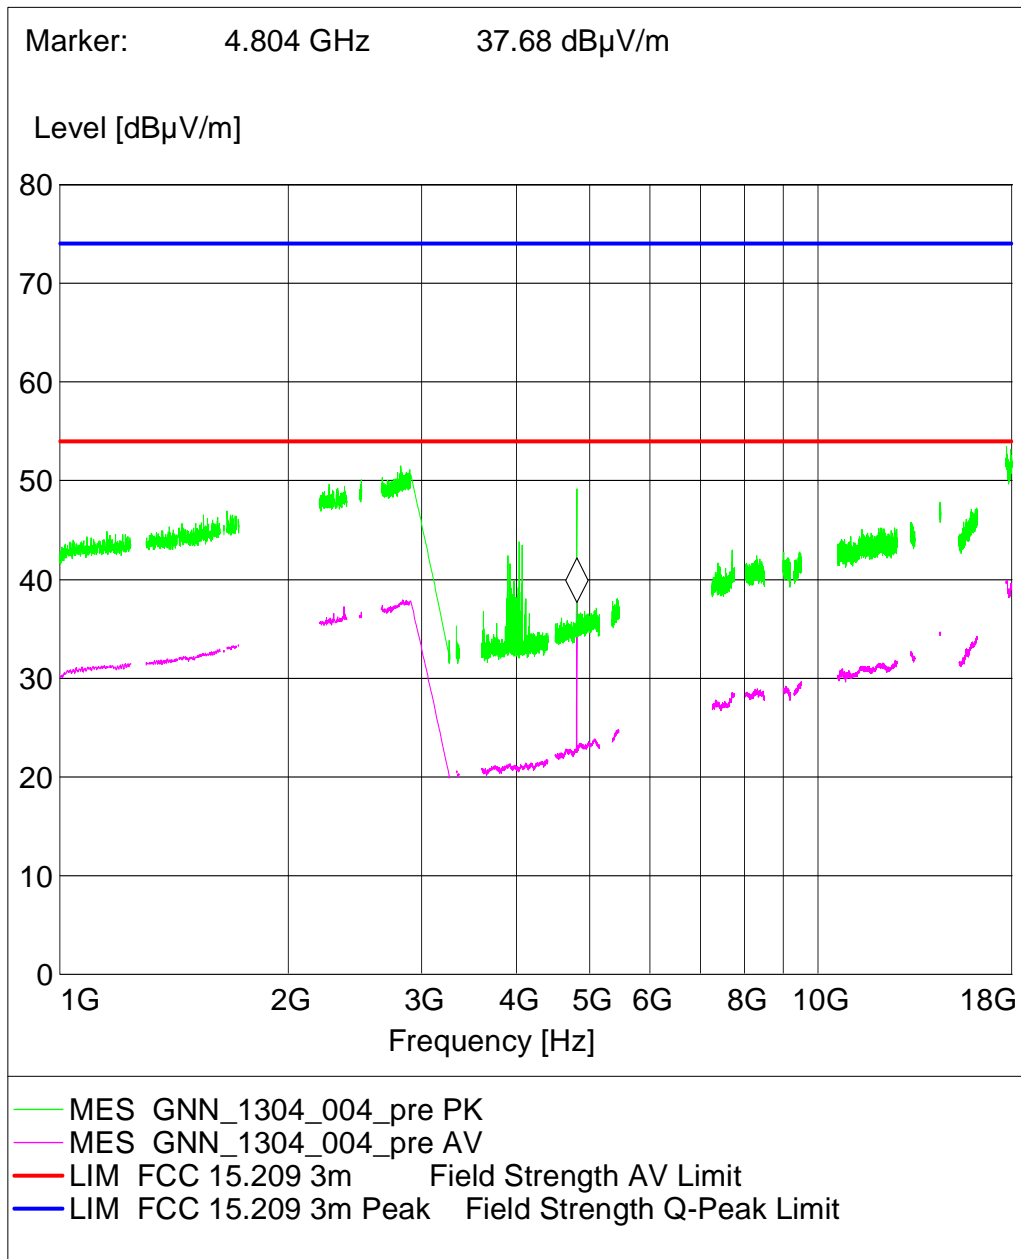


**SPURIOUS EMISSION RADIATED**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT local TX on 2441MHz, 1-DH1  
 Test Site: 7 layers Ratingen  
 Operator: URO  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 15.04.2013 / 22:03:20

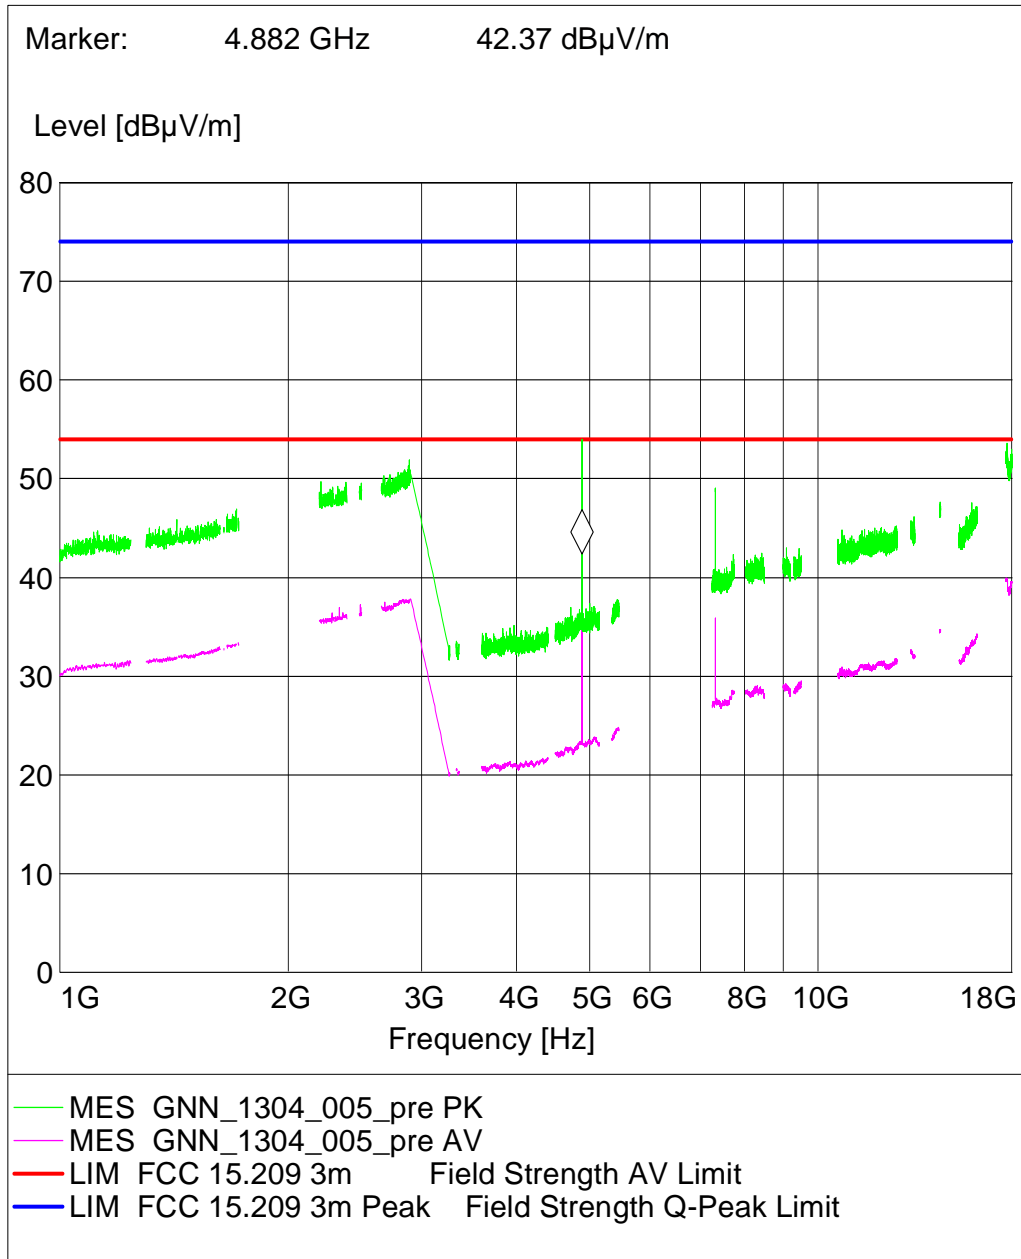

**SPURIOUS EMISSION RADIATED**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT local TX on 2480MHz, 1-DH1  
 Test Site: 7 layers Ratingen  
 Operator: URO  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 15.04.2013 / 22:48:13

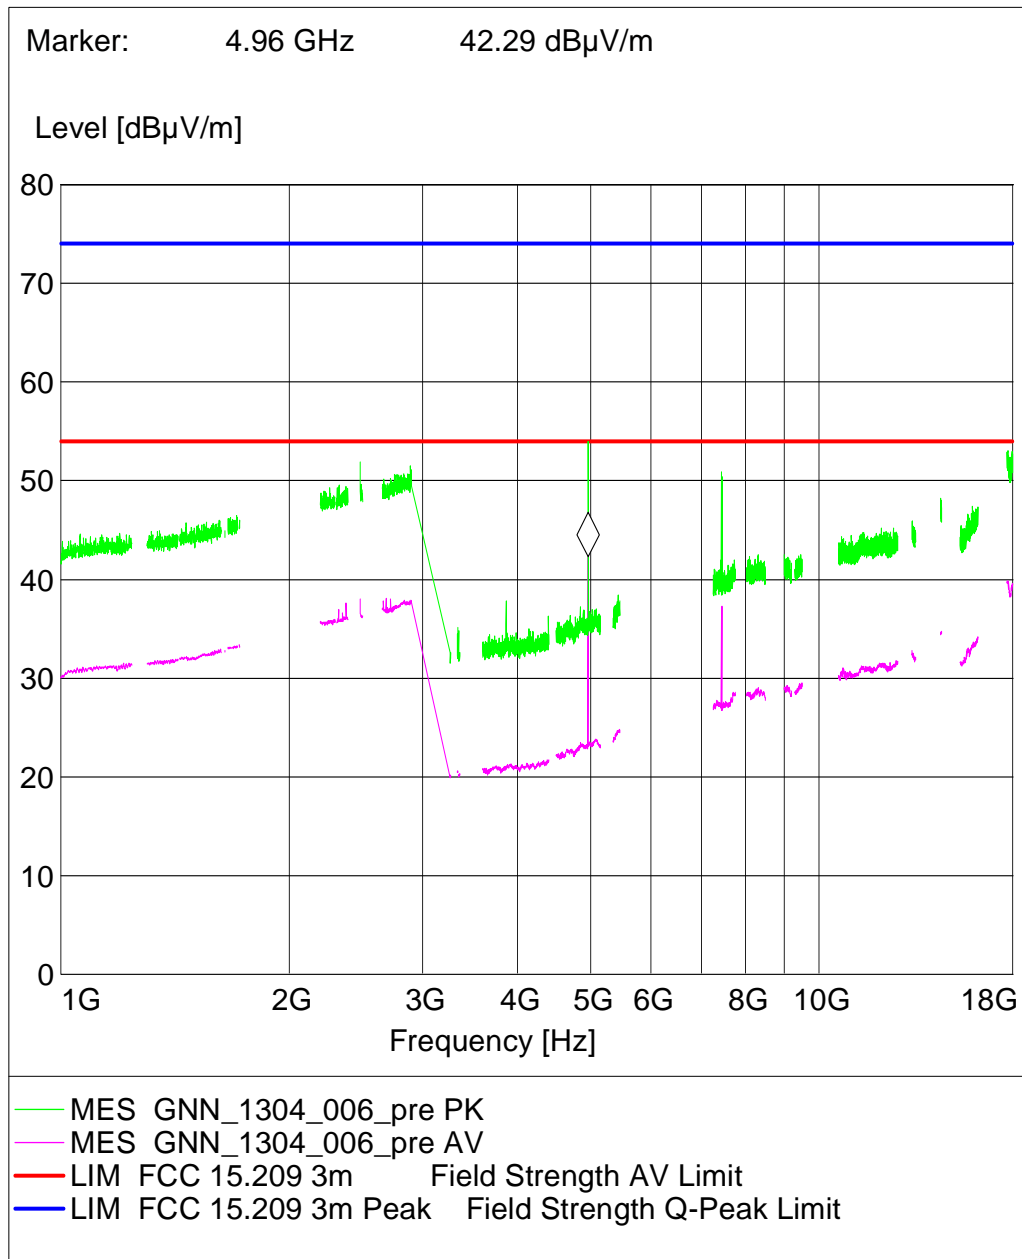


**SPURIOUS EMISSION RADIATE**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT TX on 2402MHz, loopback mode, 1-DH1  
 Test Site: 7 Layers Ratingen  
 Operator: Gal  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 19.04.2013 / 00:01:20

**SCAN TABLE: "FCC 15.209 C Field m"**

Short Description:			FCC ClassA Field Strength			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1000.0 MHz	60.0 kHz	MaxPeak	100.0 ms	120 kHz	HL562
1.0 GHz	2.4 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
2.5 GHz	7.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
7.0 GHz	18.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
18.0 GHz	25.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	EMCO 3160-09
			Average			

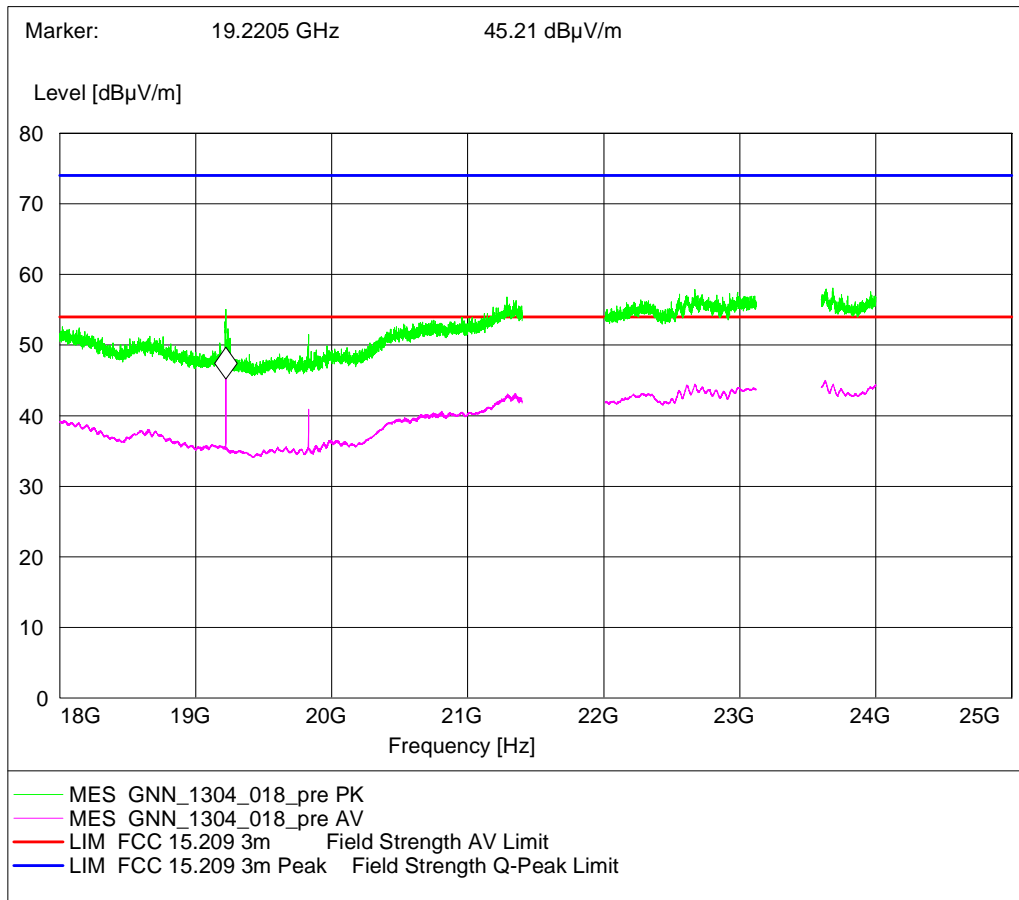


**SPURIOUS EMISSION RADIATE**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT TX on 2441MHz, loopback mode, 1-DH1  
 Test Site: 7 Layers Ratingen  
 Operator: Gal  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 19.04.2013 / 00:25:46

**SCAN TABLE: "FCC 15.209 C Field m"**

Short Description:			FCC ClassA Field Strength			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1000.0 MHz	60.0 kHz	MaxPeak	100.0 ms	120 kHz	HL562
1.0 GHz	2.4 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
2.5 GHz	7.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
7.0 GHz	18.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
18.0 GHz	25.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	EMCO 3160-09
			Average			

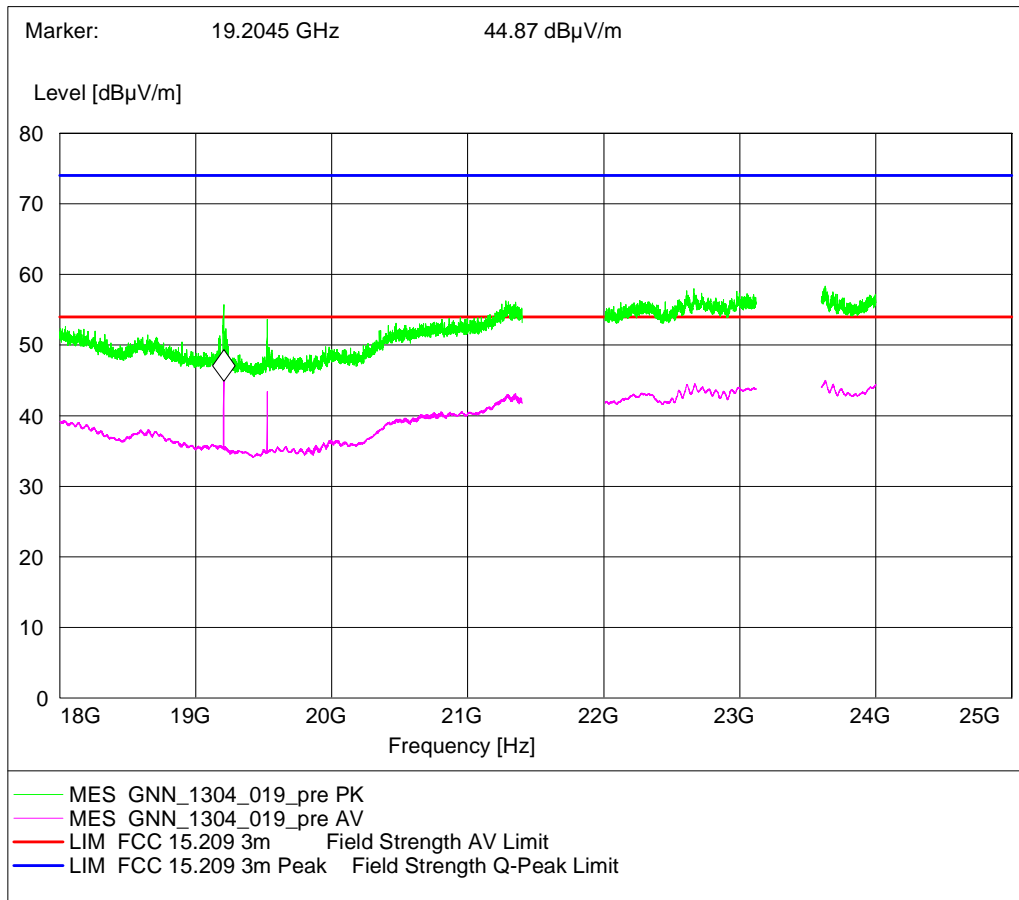


**SPURIOUS EMISSION RADIATE**

EUT: (CJ220a01)  
 Manufacturer: GNNET  
 Operating Condition: BT TX on 2480MHz, loopback mode, 1-DH1  
 Test Site: 7 Layers Ratingen  
 Operator: Gal  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 19.04.2013 / 00:51:17

**SCAN TABLE: "FCC 15.209 C Field m"**

Short Description:			FCC ClassA Field Strength			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1000.0 MHz	60.0 kHz	MaxPeak	100.0 ms	120 kHz	HL562
1.0 GHz	2.4 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
2.5 GHz	7.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
7.0 GHz	18.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	HF 906 / 001
			Average			
18.0 GHz	25.0 GHz	500.0 kHz	MaxPeak	100.0 ms	1 MHz	EMCO 3160-09
			Average			

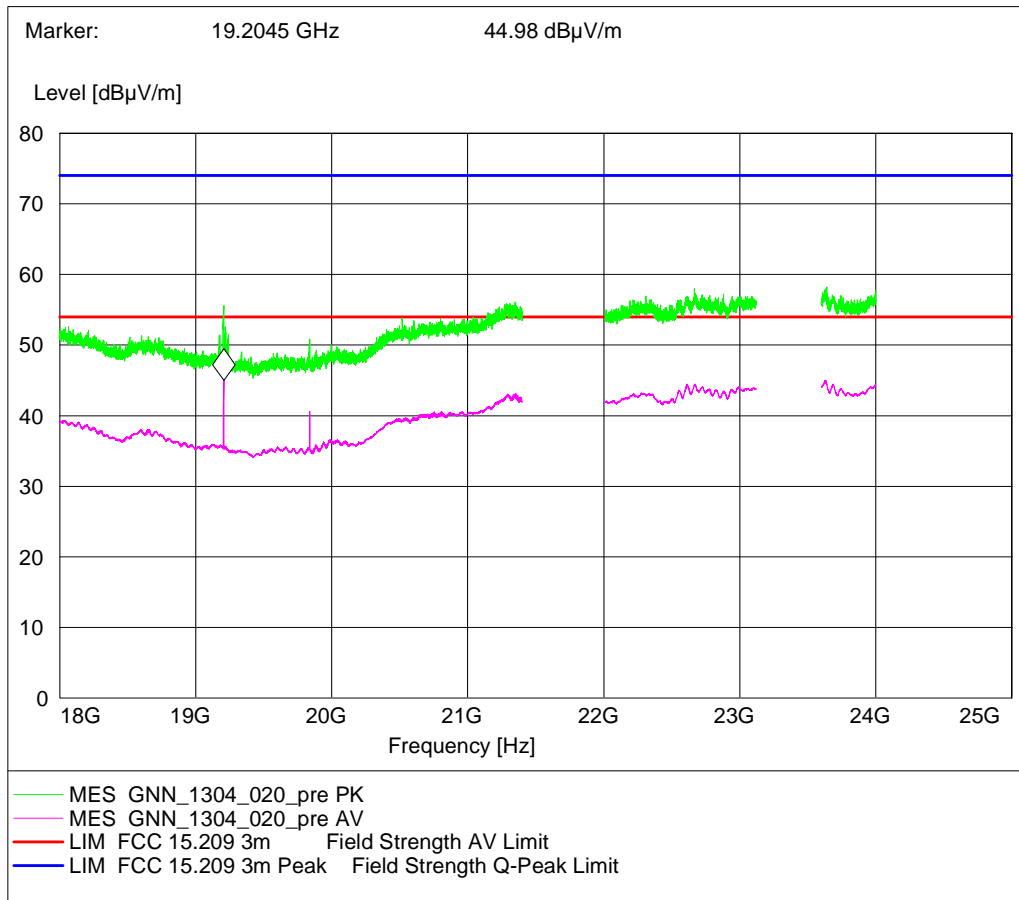





### **3.4.5 15c.4 Peak power output §15.247 (b) (1)**


#### **Test: 15c.4; Peak power output Summary**

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_C01
<i>Date of Test:</i>	2013/04/18 16:07
<i>Body:</i>	
<i>Test Specification:</i>	FCC part 2 and 15

**Detailed Results:**

		Peak transmitter output power			
		2402 MHz	2426 MHz	2440 MHz	2480 MHz
Modulation	Conditions	Peak Power (dBm)	Peak Power (dBm)	Peak Power (dBm)	Peak Power (dBm)
<b>GFSK</b>	TN, VN	6.52	7.36	7.99	8.00

<b>Peak power</b>	<b>8.00</b>	<b>dBm</b>
-------------------	-------------	------------

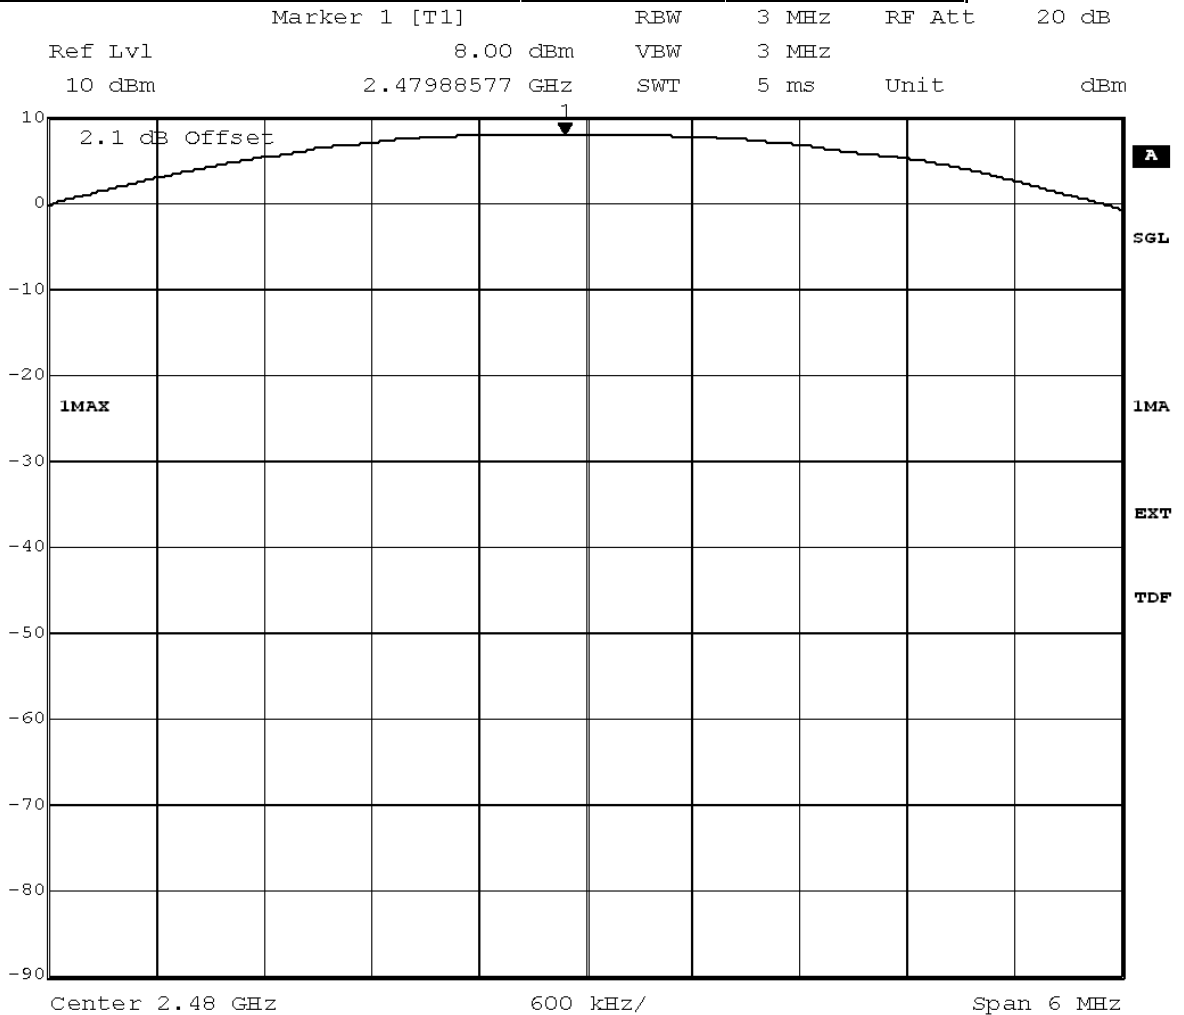

Title: Peak outputpower Power  
 Comment A: CH T:2480 MHz  
 Date: 17.APR.2013 16:27:27

### 3.4.6 15c.5 Spurious RF conducted emissions §15.247 (d)

**Test: 15c.5; = BT transmit mode: Low/Mid/High Frequency**

*Result:* Passed  
*Setup No.:* S01\_C01  
*Date of Test:* 2013/04/18 15:00  
*Body:*  
*Test Specification:* FCC part 2 and 15

**Detailed Results:**

Frequency range 30 MHz - 26 GHz			BT transmit using 1 Mbps with GFSK modulation		
Channel (MHz)	Frequency of emission MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2402	**		6.22	-13.75	
2426	**		6.85	-12.93	
2441	**		8.75	-11.28	
2480	**		8.74	-11.23	

**\*\* No Peaks found within 20 dB of limit line.**




### **3.4.7 15c.6 Band edge compliance §15.247 (d)**

#### **Test: 15c.6; Band edge compliance Summary**


<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_C01
<i>Date of Test:</i>	2013/04/18 16:09
<i>Body:</i>	
<i>Test Specification:</i>	FCC part 2 and 15

**Detailed Results:**

Modulation	Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
GFSK	2400.00	-48.82	6.25	-13.75	35.06
GFSK	2483.5	-53.63	7.79	-12.21	41.42

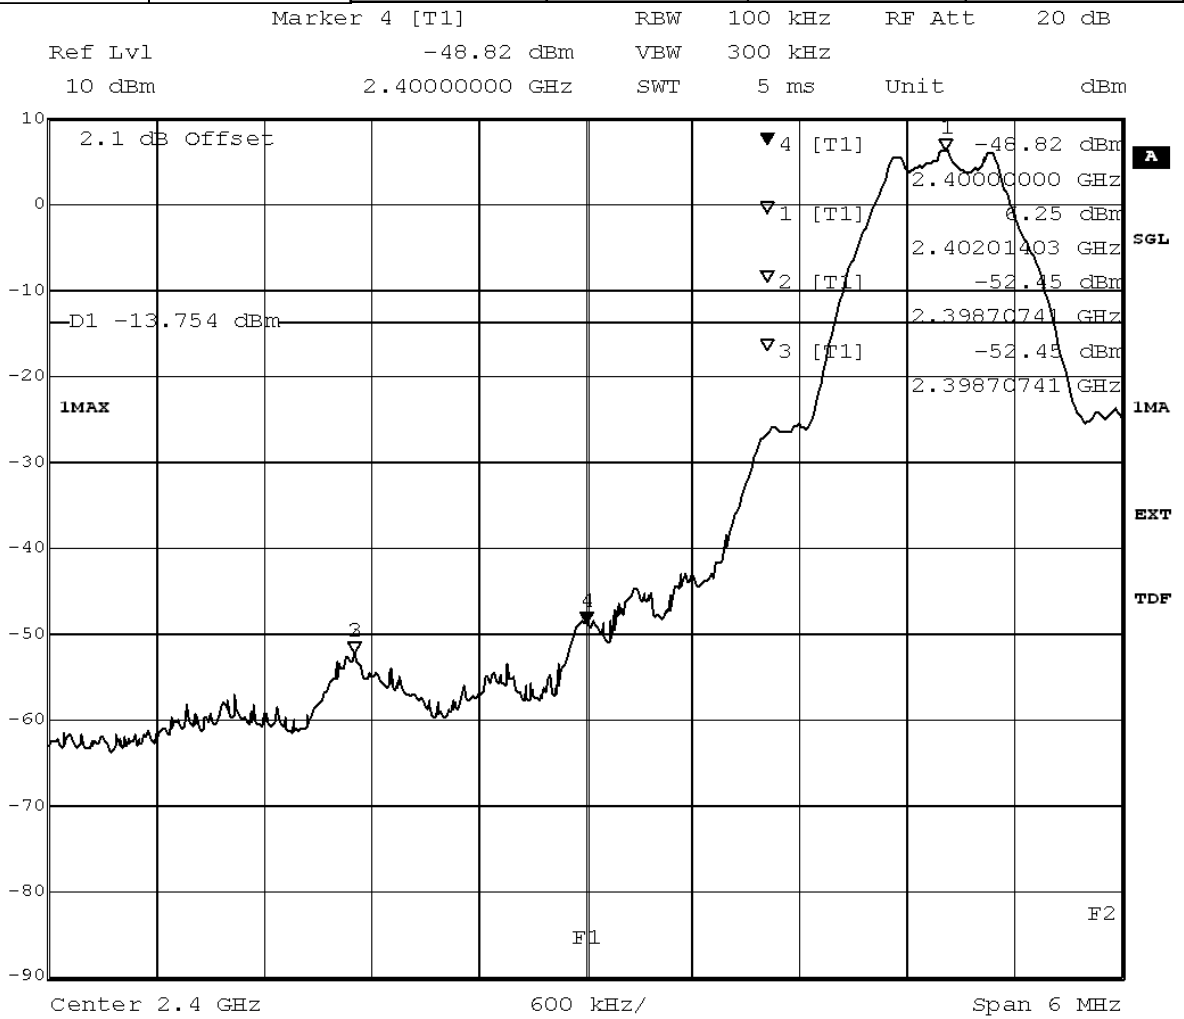

Title: Band Edge Compliance  
 Comment A: CH B: 2402 MHz  
 Date: 17.APR.2013 16:03:16

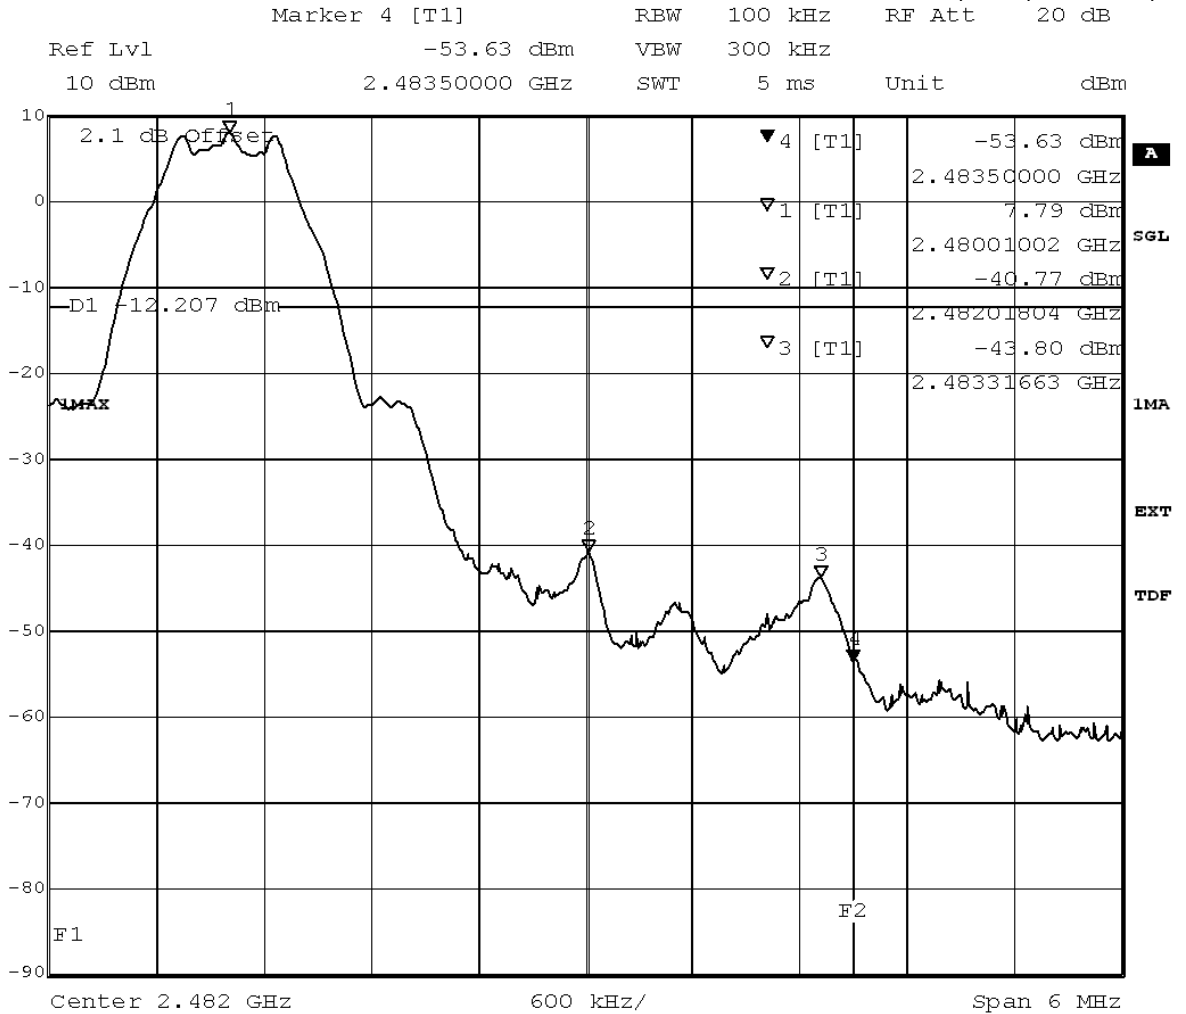

Title: Band Edge Compliance  
 Comment A: CH T:2480 MHz  
 Date: 18.APR.2013 09:22:53

**Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated**


Result: Passed  
 Setup No.: S01\_A01  
 Date of Test: 2013/04/15 15:27  
 Body:  
 Test Specification: FCC part 2 and 15



Reference: MDE\_GNNET\_1304\_FCCb  
According to  
Title 47 CFR chapter I part 15 subpart C

**Detailed Results:**

Diagram No.	TX on	Ant. Polar.	Limit PK [dB $\mu$ V]	Limit AV [dB $\mu$ V]	Frequency [MHz]	Corrected value PK [dB $\mu$ V]	Corrected value AV [dB $\mu$ V]	Margin PK [dB]	Margin AV [dB]	Result
GNN_1304_006	2480 MHz	Ver + Hor	74	54	2483.5	51.90	38.00	22.10	16.00	Passed

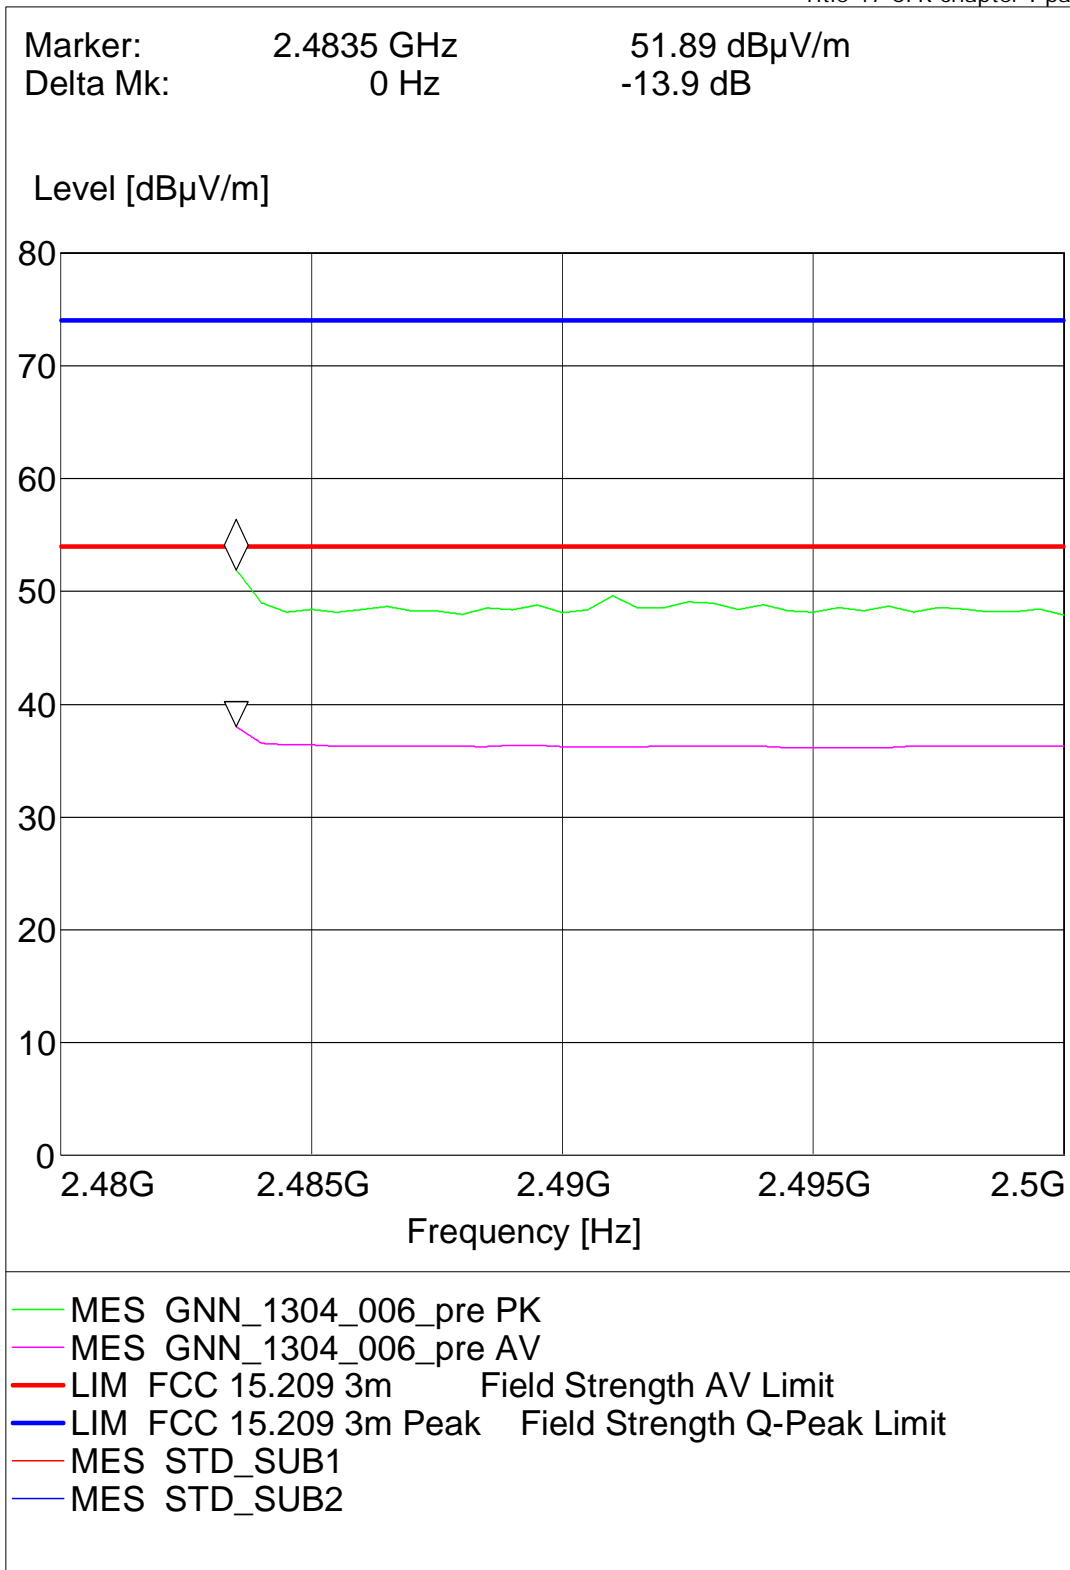






### 3.4.8 15c.7 Dwell time §15.247 (a) (1) (iii)

#### Test: 15c.7; Dwell time Summary

Result: Passed  
 Setup No.: S01\_C01  
 Date of Test: 2013/04/18 15:59  
 Body:  
 Test Specification: FCC part 2 and 15

#### Detailed Results:

Modulation	Packet type	Time slot length	Dwell time	Dwell time ms
GFSK	DH5	0.45	time slot length * 1600/5 /40 * 16	57.36

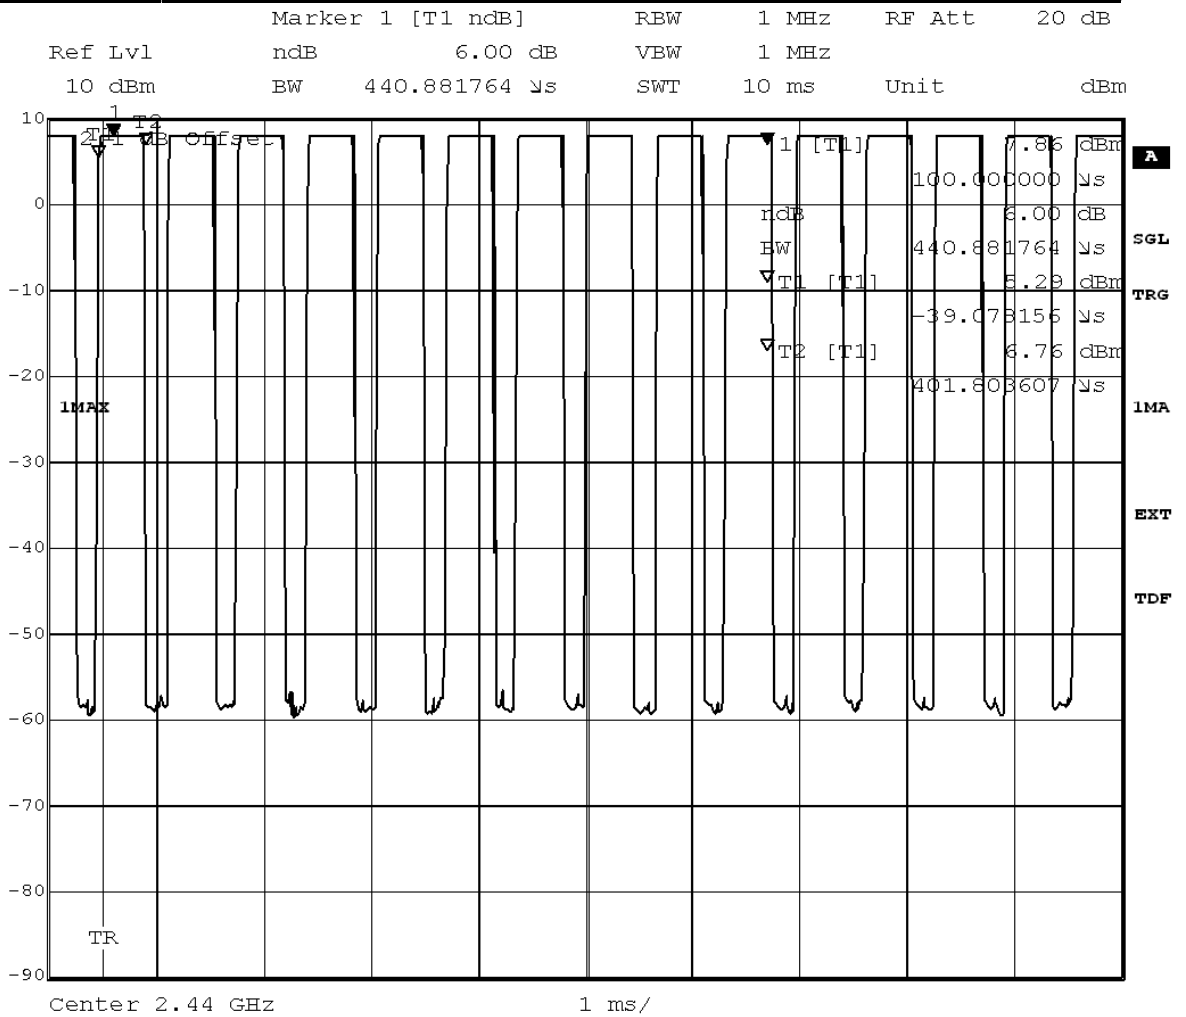

Title: Dwell time  
 Comment A: CH M2: 2440 MHz  
 Date: 18.APR.2013 09:17:37


### 3.4.9 15c.8 Channel separation §15.247 (a) (1)

#### Test: 15c.8; Channel separation Summary

Result: Passed  
 Setup No.: S01\_C01  
 Date of Test: 2013/04/18 15:31  
 Body:  
 Test Specification: FCC part 2 and 15

#### Detailed Results:

Modulation	Channel Separation
GFSK	2 MHz

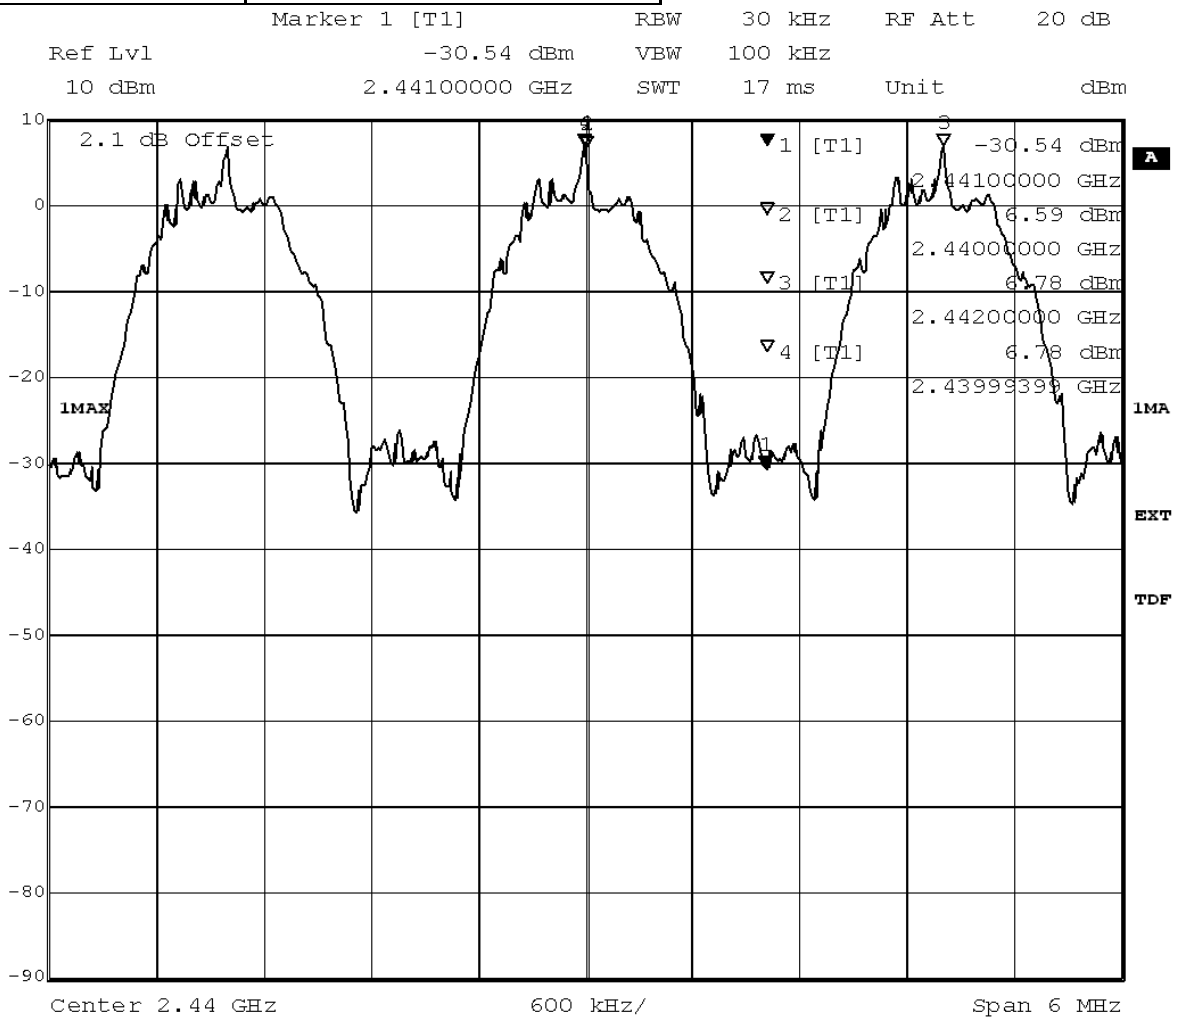

Title: Channel separation  
 Comment A: CH M2: 2440 MHz  
 Date: 18.APR.2013 09:08:28

## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 2</b>		
<b>Manufacturer:</b>	Frankonia		
<b>Description:</b>	Anechoic Chamber for radiated testing		
<b>Type:</b>	10.58x6.38x6.00 m <sup>3</sup>		
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	NSA (FCC, IC)		2011/01/10 2014/01/10

#### Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18		2011/01/11 2014/01/10
	IC listing 3699A-1 3m		2011/02/07 2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

#### Test Equipment Auxiliary Equipment for Conducted emissions

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Manufacturer:</b>	Rohde & Schwarz GmbH & Co.KG
<b>Description:</b>	EMI Conducted Auxiliary Equipment

#### Single Devices for Auxiliary Equipment for Conducted emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2013/03/01 2015/02/28

### Test Equipment Auxiliary Equipment for Radiated emissions

**Lab ID:** Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

#### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2009/06/04 2014/06/03
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2008/10/27 2013/10/26
	Standard Calibration		2012/01/18 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/06/26 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
HL562 ULTRA BROADB. ANT. ULTRAL.	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standart Calibration		2012/12/18 2014/12/17
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170		
Log.-per. Antenna	HL 562 Ultralog	830547/003?	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
	Standard calibration		2011/10/27 2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

### Test Equipment Auxiliary Test Equipment

<b>Lab ID:</b>	<b>Lab 2</b>
<b>Manufacturer:</b>	see single devices
<b>Description:</b>	Single Devices for various Test Equipment
<b>Type:</b>	various
<b>Serial Number:</b>	none

### Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Customized calibration		2011/10/19 2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

## Test Equipment Digital Signalling Devices

**Lab ID:** Lab 1, Lab 2  
**Description:** Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial factory calibration		2012/01/26 2014/01/25
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/05/26 2013/05/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 --- SW: K62, K69		2008/11/03



**Test Equipment Emission measurement devices**

**Lab ID:** Lab 1, Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

**Single Devices for Emission measurement devices**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2012/05/22 2013/05/21
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2012/05/21 2013/05/20
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2011/12/05 2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

**Test Equipment Multimeter 12**

**Lab ID:** Lab 3  
**Description:** Ex-Tech 520  
**Serial Number:** 05157876

**Single Devices for Multimeter 12**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2011/10/18 2013/10/17

### Test Equipment Regulatory Bluetooth RF Test Solution

**Lab ID:** Lab 3  
**Description:** Regulatory Bluetooth RF Tests  
**Type:** Bluetooth RF  
**Serial Number:** 001

### Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/08/21 2013/08/20
Power Meter NRVD	NRVD	832025/059	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/07/23 2013/07/22
Power Sensor NRV Z1 A	PROBE	832279/013	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/07/23 2013/07/22
Power Supply	NGSM 32/10	2725	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2011/06/15 2013/06/14
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/08/20 2013/08/19
Signal Analyser FS1Q26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
	Vector Signal Generator SMIQ03B	SMIQ03B	832870/017
<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>	
	Standard Calibration		2010/06/23 2013/06/20

### Test Equipment Shielded Room 02

**Lab ID:** Lab 1  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none

### Test Equipment Shielded Room 07

**Lab ID:** Lab 3  
**Description:** Shielded Room 4m x 6m





**Test Equipment T/H Logger 04**

**Lab ID:** Lab 3  
*Description:* Lufft Opus10  
*Serial Number:* 7481

**Single Devices for T/H Logger 04**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
ThermoHygro Datalogger 04 (Environ)	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH

**Test Equipment Temperature Chamber 01**

**Lab ID:** Lab 3  
*Manufacturer:* see single devices  
*Description:* Temperature Chamber KWP 120/70  
*Type:* Weiss  
*Serial Number:* see single devices

**Single Devices for Temperature Chamber 01**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2012/03/12 2014/03/11



---

Reference: MDE\_GNNET\_1304\_FCCb  
According to  
Title 47 CFR chapter I part 15 subpart C

**5 Annex**

**5.1 Additional Information for Report**



Summary of Test Results

---

---

The EUT complied with all performed tests as listed in the summary section of this report.

---

Technical Report Summary

---

---

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

- § 15.201 Equipment authorization requirement
- § 15.207 Conducted limits
- § 15.209 Radiated emission limits; general requirements
- § 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

Description of Methods of Measurements

---

---

Conducted emissions (AC power line)

---

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50μH || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

**Step 1: Preliminary scan**

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

**Step 2: Final measurement**

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

**Test Requirements / Limits**

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dBμV) = 20 log (Limit (μV)/1μV).

---

**Occupied bandwidth**

---

Standard    FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

**Test Description**

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz.

The EUT was connected to the spectrum analyzer via a short coax cable.

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm) : Implicit Limit: Max. 20 dB BW =  $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$
2. If the system output power exceeds 125 mW (21.0 dBm): Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) =  $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

---

#### Peak power output

---

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:  
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) =  $10 \log (\text{Limit (W)}/1\text{mW})$   
==> Maximum Output Power: 30 dBm

---

#### Spurious RF conducted emissions

---

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.  
Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

---

#### Spurious radiated emissions

---

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

#### Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4–2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

##### 1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

##### 2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz

- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s (BT Timing 1.25 ms)
- Turntable angle range:  $-180$  to  $+180^\circ$
- Turntable step size:  $90^\circ$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-180$  to  $+180^\circ$
- Turntable step size:  $45^\circ$
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable):  $45^\circ$
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by  $\pm 22.5^\circ$  around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by  $\pm 25$  cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-22.5^\circ$  to  $+22.5^\circ$  around the determined value
- Height variation range:  $-0.25$  m to  $+0.25$  m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

### 3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted.

Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1µV/m)$

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz



#### Test Requirements / Limits

##### FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

---

#### Dwell time

---

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length \* hop rate / number of hopping channels \* 16 s

with:

- hop rate =  $1600 \text{ s}^{-1}$  for DH1 packets = 1600 s<sup>-1</sup>
- number of hopping channels = 40 (Bluetooth Low Energy)
- $16 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 40 \text{ (Low energy)}$

The highest value of the dwell time is reported.

#### Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels (40 Low Energy) this period is calculated to be 31.6 seconds (16 seconds for Low Energy).

---

#### Channel separation

---

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel separation is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band

- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

---

Number of hopping frequencies

---

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement. The number of hopping frequencies is independent from the modulation pattern. The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Centre frequency: 2442 MHz
- Frequency span: 84 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

\*\*\*\*\*  
FCC and IC Correlation of measurement requirements  
\*\*\*\*\*


The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.

Bluetooth® equipment:

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen: 7.2.4
Occupied bandwidth	§ 15.247 (a) (1)	RSS-210: A8.1
Peak power output	§ 15.247 (b) (1)	RSS-210: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen: 6; RSS-210: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen: 6; RSS-210: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210: A8.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Channel separation	§ 15.247 (a) (1)	RSS-210: A8.1
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Antenna requirement	§ 15.203 / 15.204	RSS-Gen: 7.1.2

Digital Apparatus: Measurement	FCC reference	IC reference
Conducted Emissions(AC Power Line)	\$15.107	ICES-003
Spurious Radiated Emissions	\$15.109	ICES-003

Setup Drawings

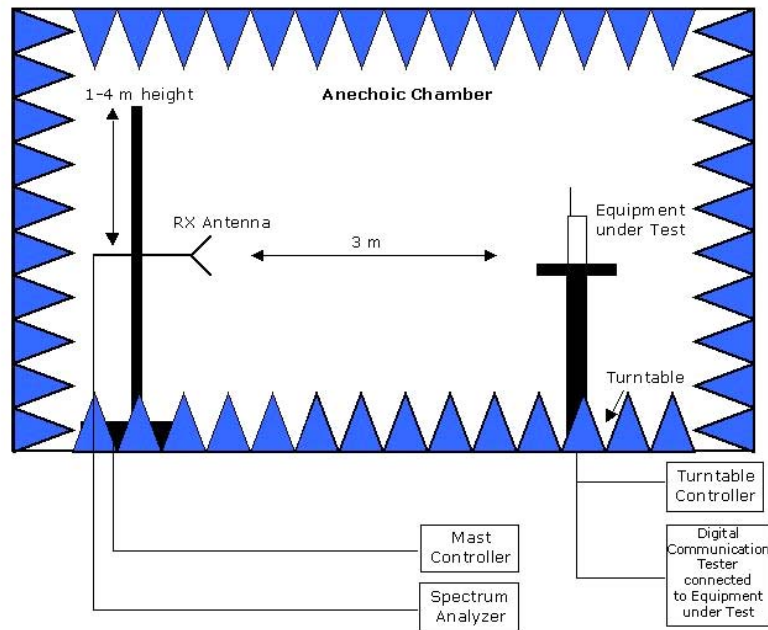

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:  
 Measurements below 1 GHz: Semi-anechoic, conducting ground plane.  
 Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces



## 6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Auxiliary Equipment	5
2.5	Setups used for Testing	6
3	Results	6
3.1	General	6
3.2	List of Test Specification	6
3.3	Summary	7
3.4	Detailed Results	8
3.4.1	15c.1 Conducted emissions (AC power line) §15.207	8
3.4.2	15c.10 Power density §15.247 (e)	10
3.4.3	15c.11 6dB Bandwidth §15.247 (a) (2)	12
3.4.4	15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	14
3.4.5	15c.4 Peak power output §15.247 (b) (1)	25
3.4.6	15c.5 Spurious RF conducted emissions §15.247 (d)	27
3.4.7	15c.6 Band edge compliance §15.247 (d)	28
3.4.8	15c.7 Dwell time §15.247 (a) (1) (iii)	33
3.4.9	15c.8 Channel separation §15.247 (a) (1)	34
4	Test Equipment Details	35
4.1	List of Used Test Equipment	35



---

Reference: MDE\_GNNET\_1304\_FCCb  
According to  
Title 47 CFR chapter I part 15 subpart C

5 Annex	42
5.1 Additional Information for Report	42
6 Index	52

---