




Appendix B

RF power output conducted

FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output power |
| Comment 2 | Channel.: 0 / 2402 MHz |
| Comment 3 | |

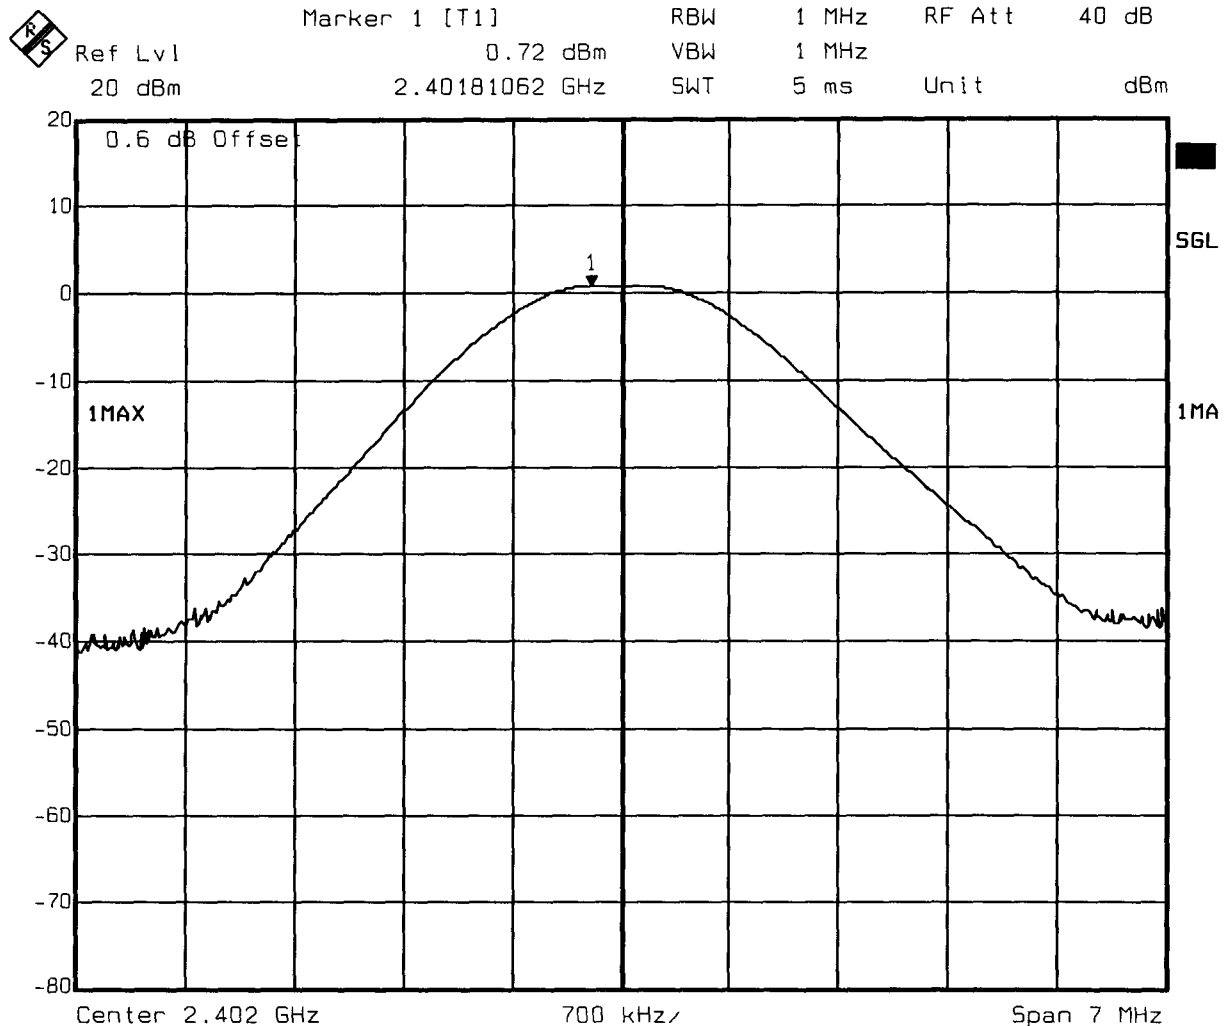


Date: 26.APR.2006 12:39:31

Measurement diagram

FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output_power |
| Comment 2 | Channel.: 39 / 2441 MHz |
| Comment 3 | |

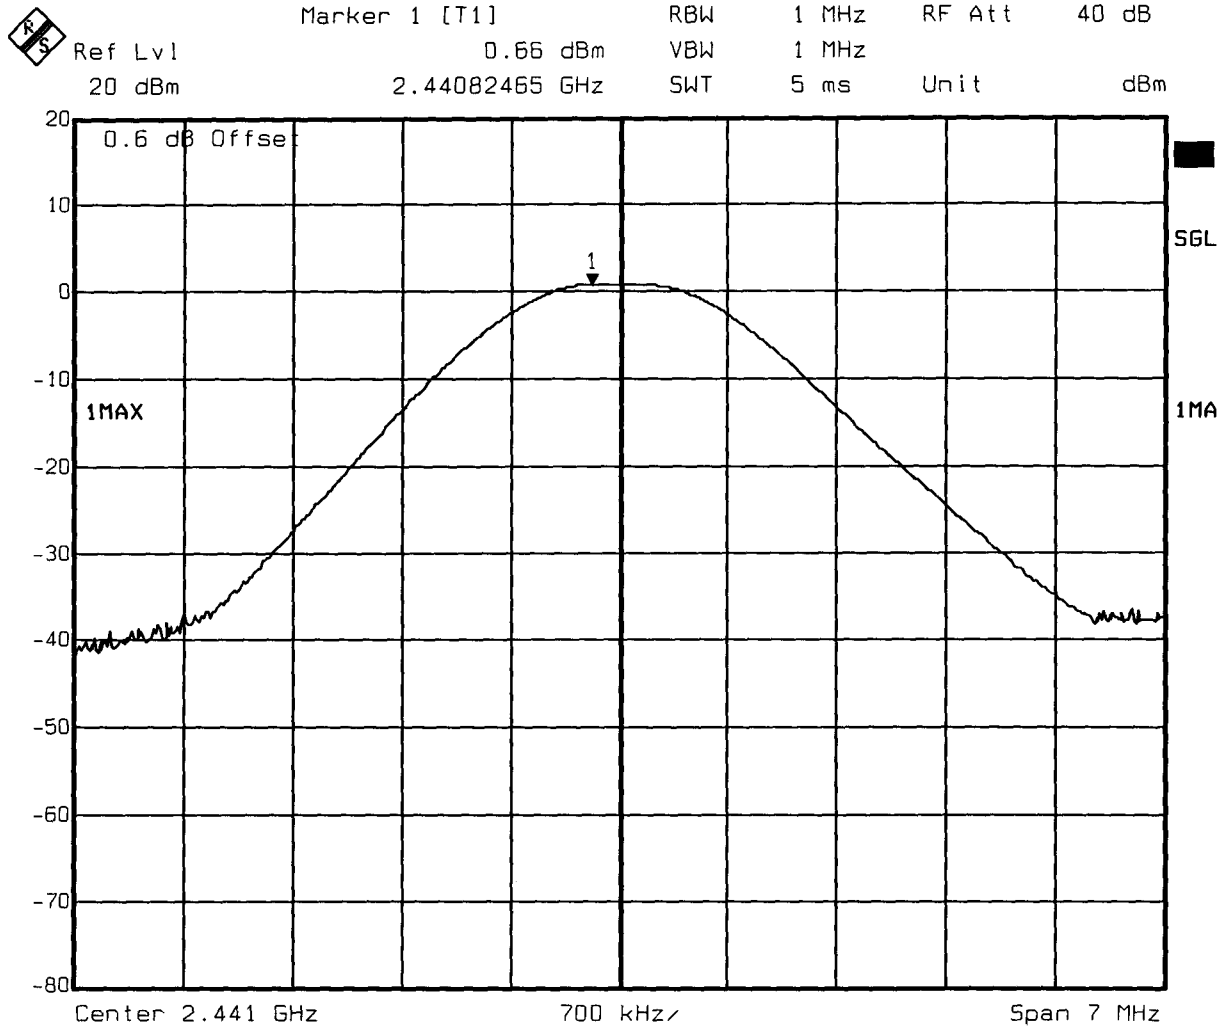


Date: 26.APR.2006 12:43:38


Measurement diagram

FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output power |
| Comment 2 | Channel.: 78 / 2480 MHz |
| Comment 3 | |

| | | | | | |
|---|---------------|----------------|-------|--------|-------|
|  | Marker 1 [T1] | RBW | 1 MHz | RF Att | 40 dB |
| | Ref Lvl | 0.20 dBm | VBW | 1 MHz | |
| | 20 dBm | 2.47982465 GHz | SWT | 5 ms | Unit |

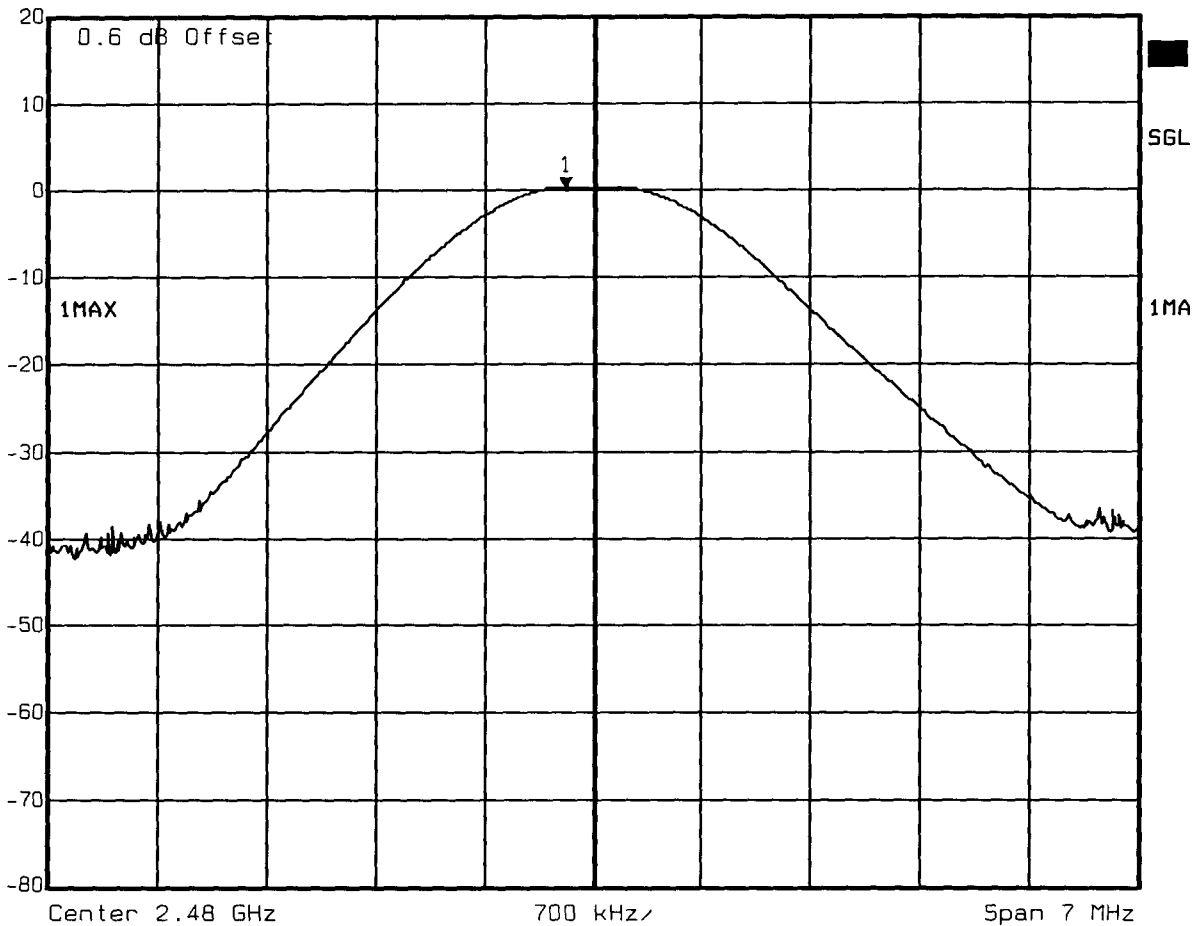

Date: 26.APR.2006 12:46:36


Measurement diagram



FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 85 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output power |
| Comment 2 | Channel.: 0 / 2402 MHz |
| Comment 3 | |

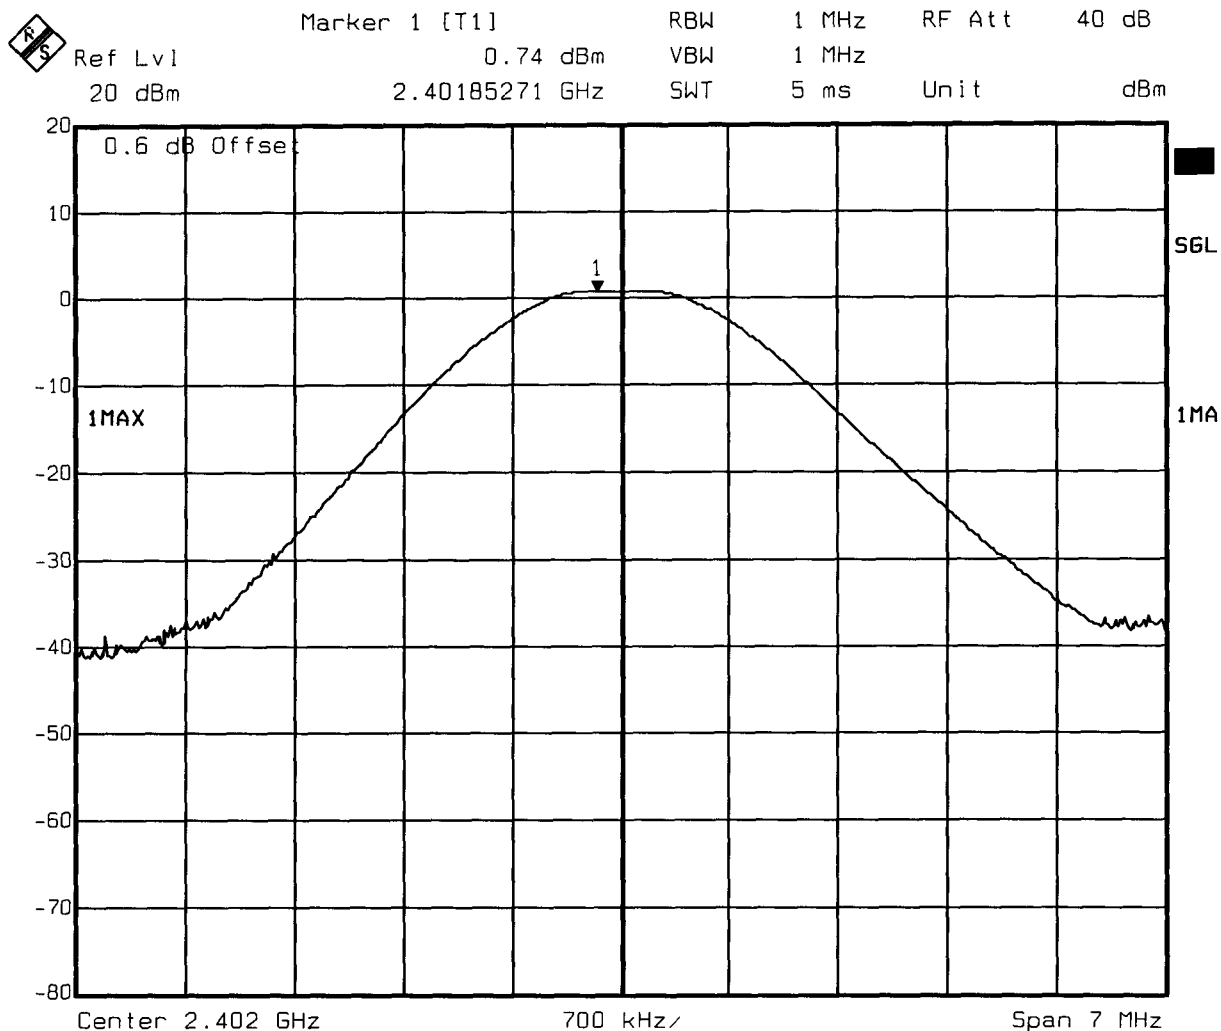


Date: 26.APR.2006 12:57:35

Measurement diagram

FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 85 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output_power |
| Comment 2 | Channel.: 39 / 2441 MHz |
| Comment 3 | |

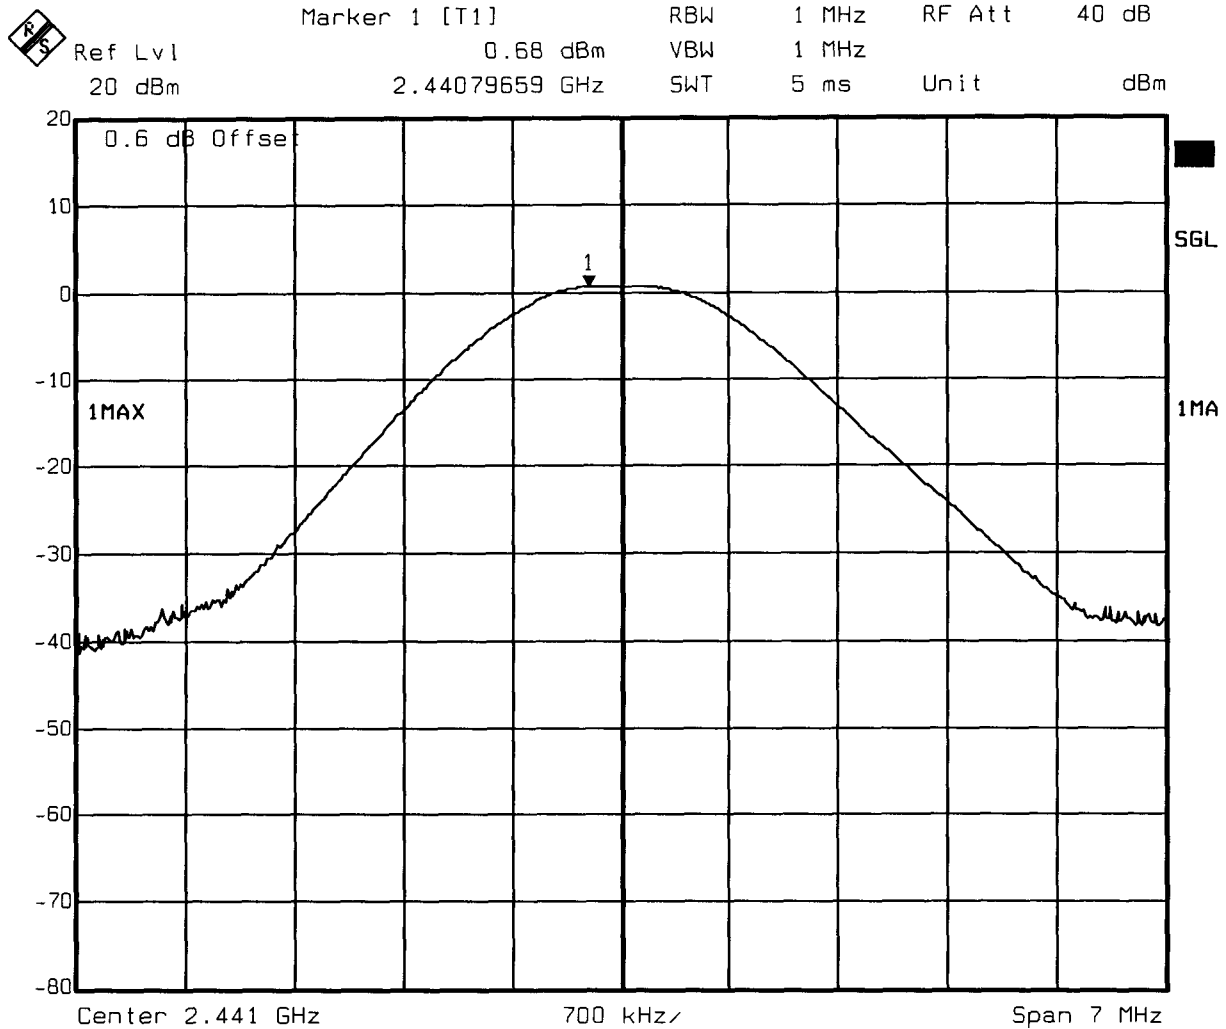


Date: 26.APR.2006 12:55:25


Measurement diagram

FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 85 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output_power |
| Comment 2 | Channel.: 78 / 2480 MHz |
| Comment 3 | |

| | | | | | |
|---|---------------|----------------|-------|--------|-------|
|  | Marker 1 [T1] | RBW | 1 MHz | RF Att | 40 dB |
| | Ref Lvl | 0.23 dBm | VBW | 1 MHz | |
| | 20 dBm | 2.47983868 GHz | SWT | 5 ms | Unit |

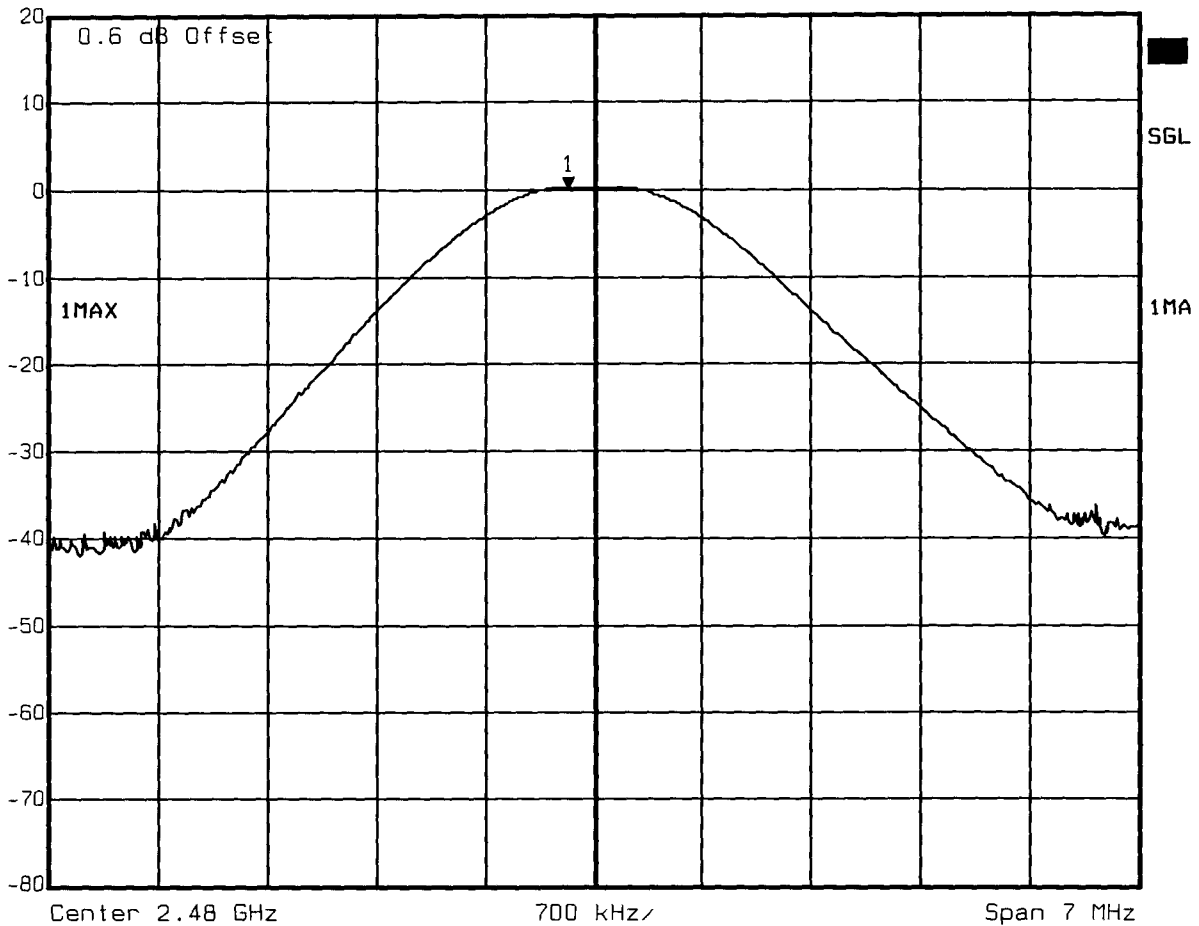


Date: 26.APR.2006 12:48:29

Measurement diagram

FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 115 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output_power |
| Comment 2 | Channel.: 0 / 2402 MHz |
| Comment 3 | |

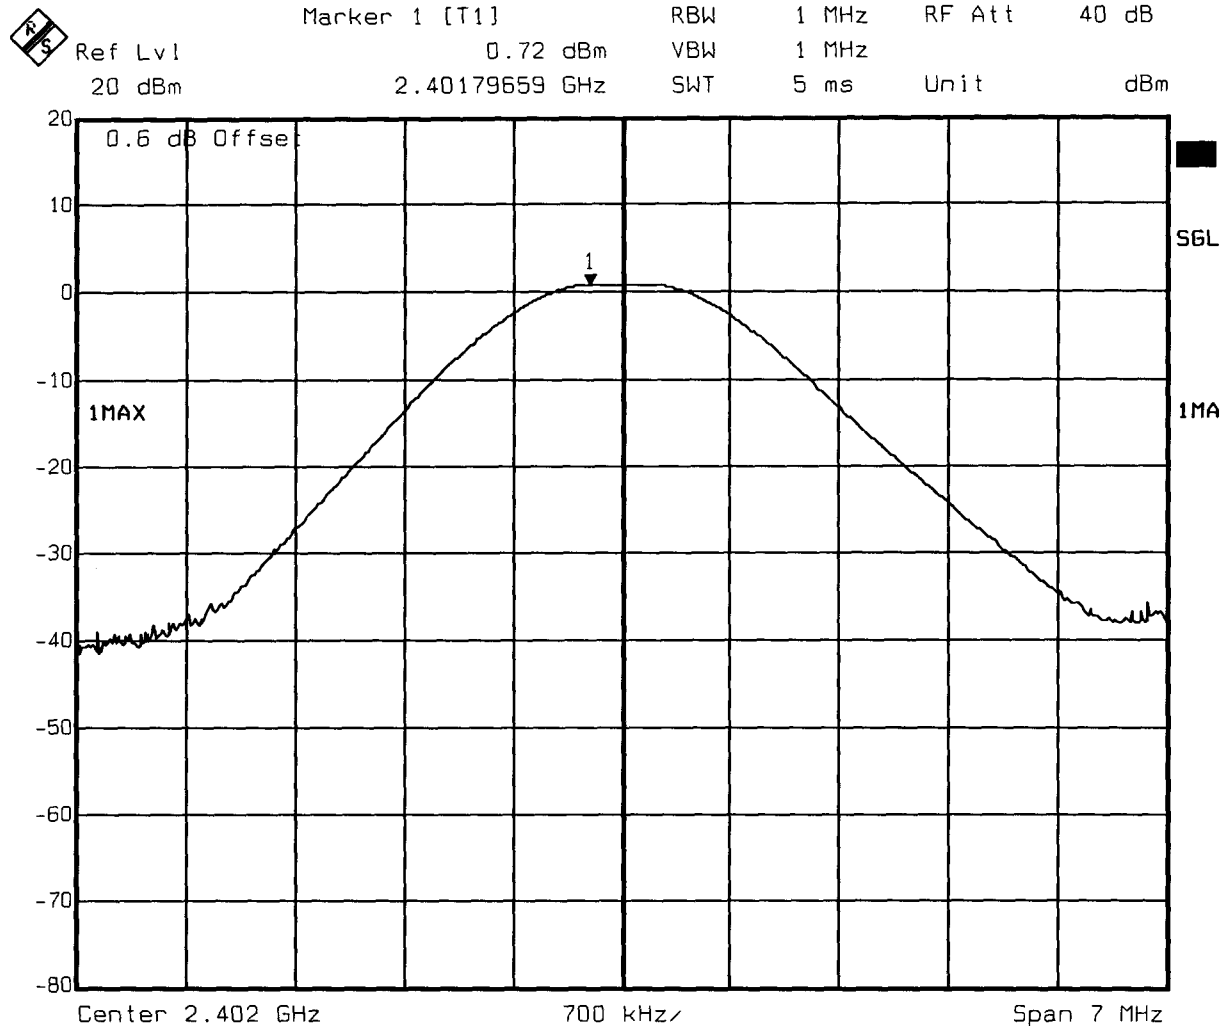


Date: 26.APR.2006 12:59:16

Measurement diagram

FCC part 15.247

Peak output power conducted

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 115 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Peak output_power |
| Comment 2 | Channel.: 39 / 2441 MHz |
| Comment 3 | |

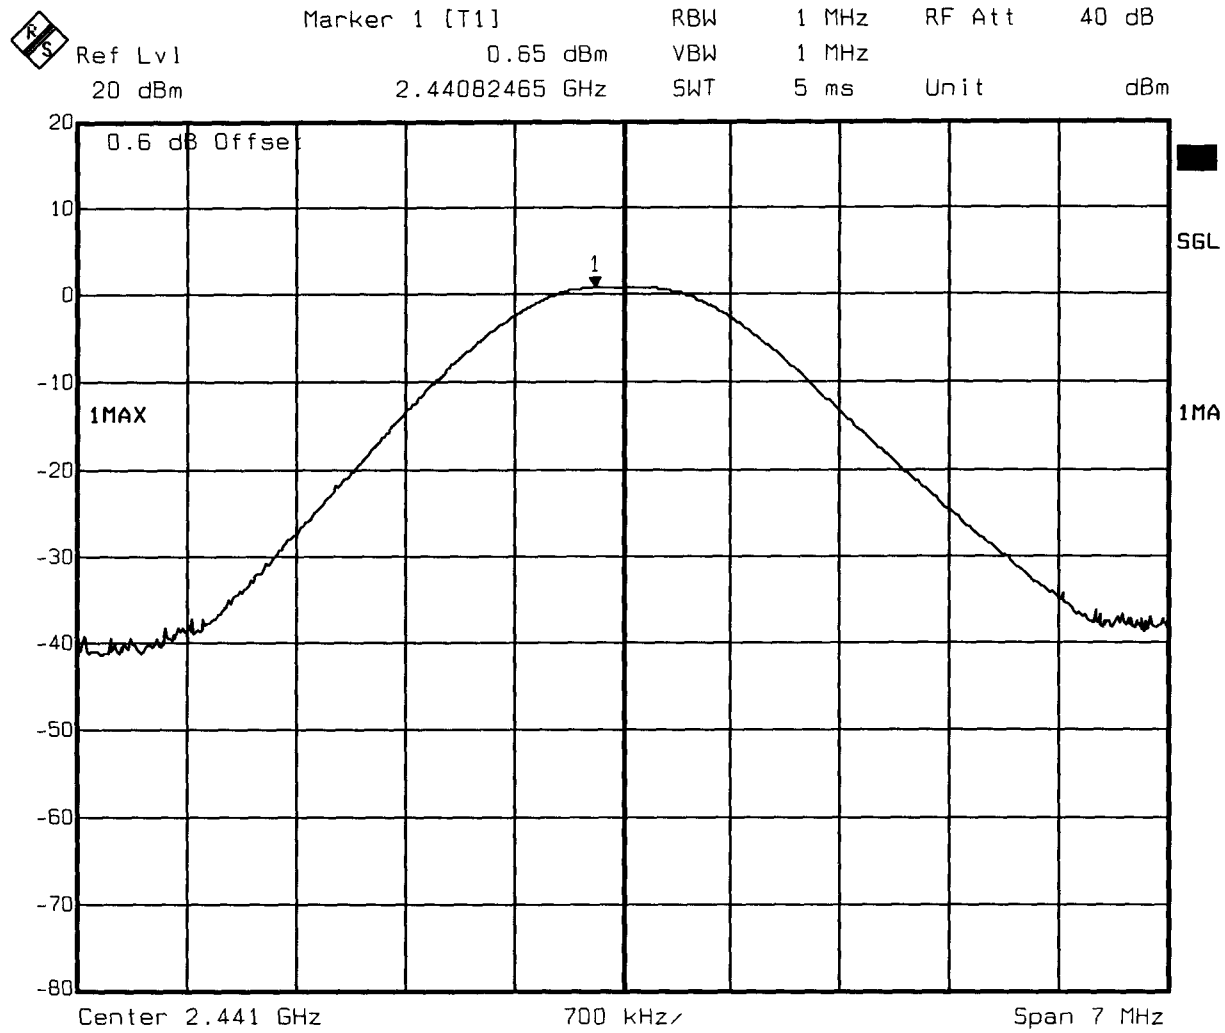

Date: 26.APR.2006 13:01:33

Measurement diagram



Appendix C

RF power output radiated (EIRP)




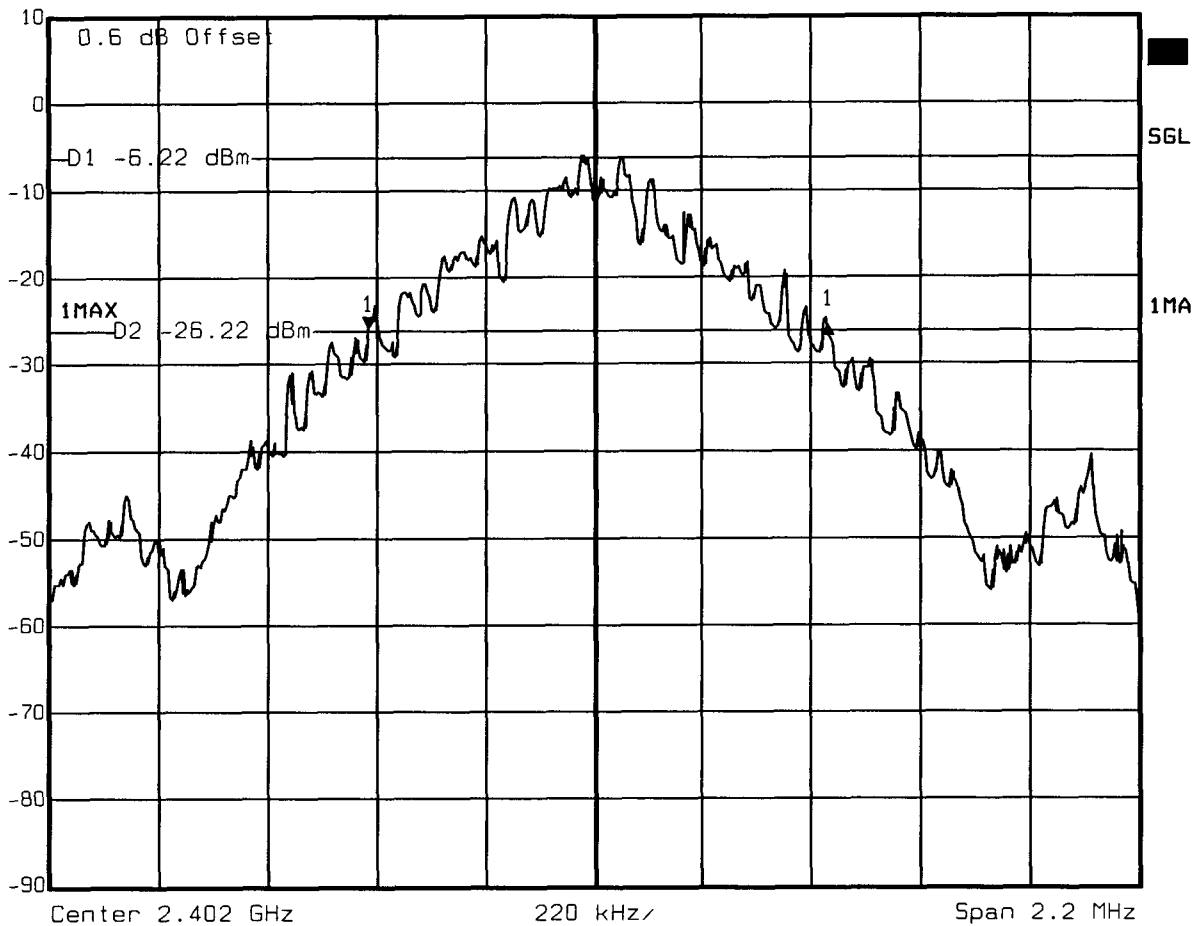
Appendix D

20 dB bandwidth

FCC part 15.247
20 dB bandwidth

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | 20 dB bandwidth |
| Comment 2 | Channel.: 0 / 2402 MHz |
| Comment 3 | |

| | | | | | |
|---|--------------|------------------|--------|--------|-------|
|  | Delta 1 [T1] | RBW | 10 kHz | RF Att | 30 dB |
| | Ref Lvl | 0.44 dB | VBW | 10 kHz | |
| | 10 dBm | 930.26052104 kHz | SWT | 56 ms | Unit |



Date: 26.APR.2006 13:08:47

Measurement diagram


Appendix E

Time of occupancy (dwell time)

FCC part 15.247

Time of occupancy (dwell time)

| | |
|-----------------------|---|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Time of occupancy |
| Comment 2 | Channel.: 39 / 2441 MHz (Hopping mode) |
| Comment 3 | 63 events * 2.920 ms result: 183.960 ms |

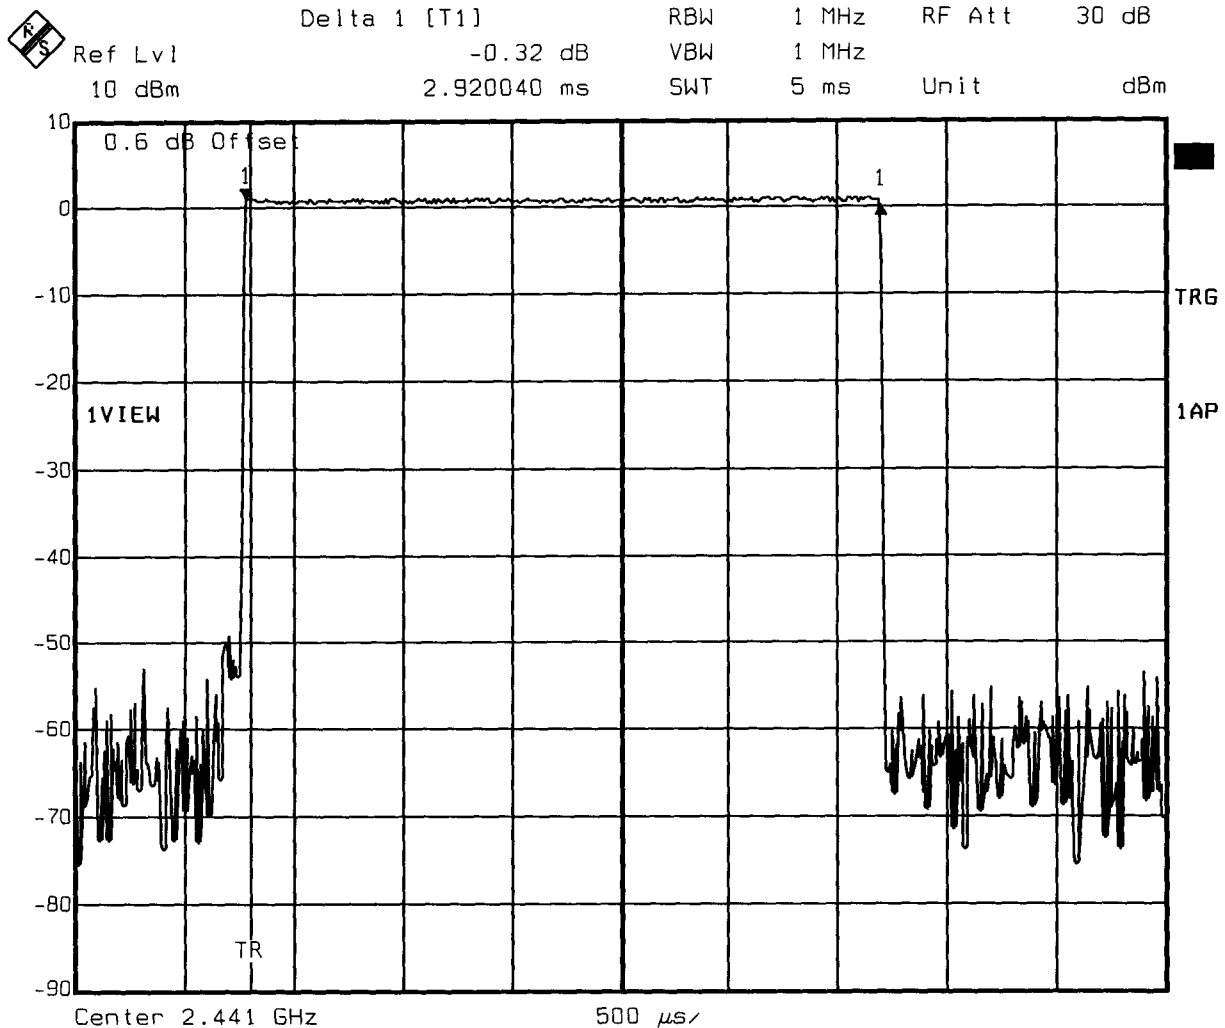

Date: 27.APR.2006 07:40:44


Measurement diagram



FCC part 15.247

Time of occupancy (dwell time)

| | |
|-----------------------|---|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Time of occupancy |
| Comment 2 | Channel.: 39 / 2441 MHz (Master inquiry mode) |
| Comment 3 | 310 events * 0.117836 ms result: 36.529 ms |

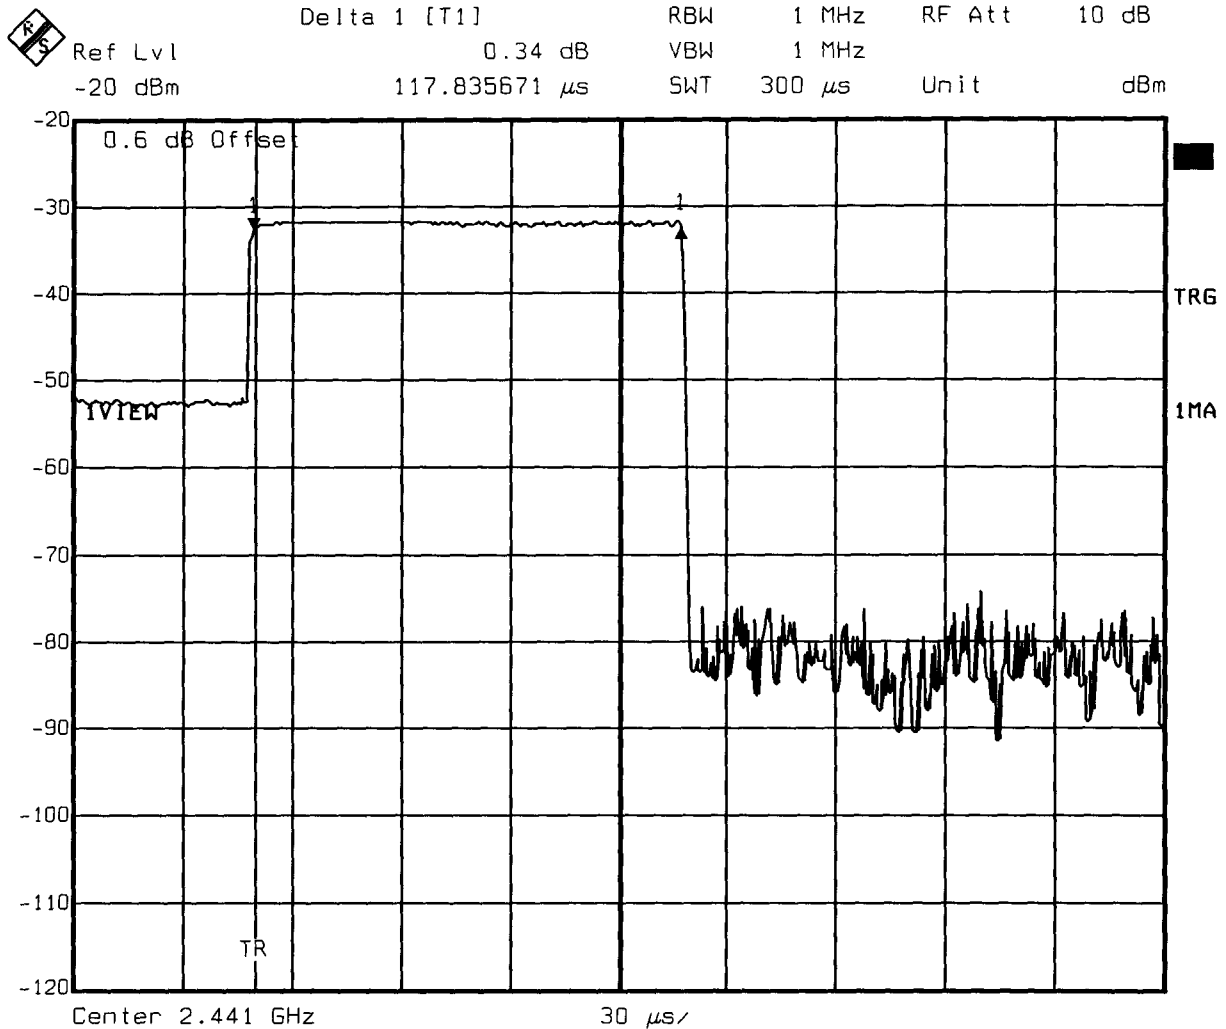


Date: 27.APR.2006 10:49:24

Measurement diagram

FCC part 15.247
Duty cycle

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Duty cycle |
| Comment 2 | Channel.: 39 / 2441 MHz |
| Comment 3 | |

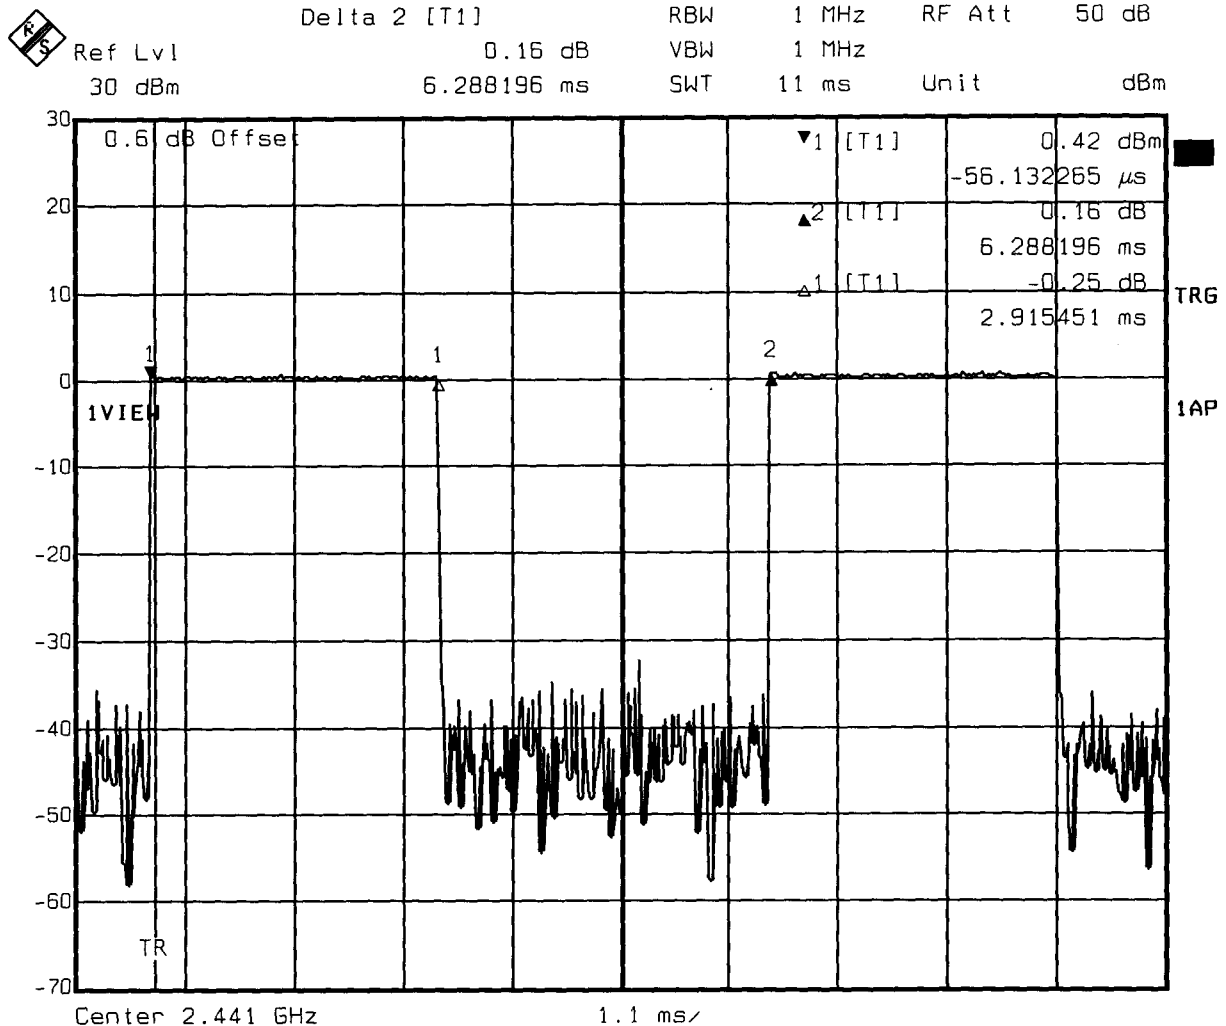

Date: 26.APR.2006 14:09:04

Measurement diagram



Appendix F


Number of hopping frequencies



FCC part 15.247

Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Channel.: 0-13 |
| Comment 3 | |

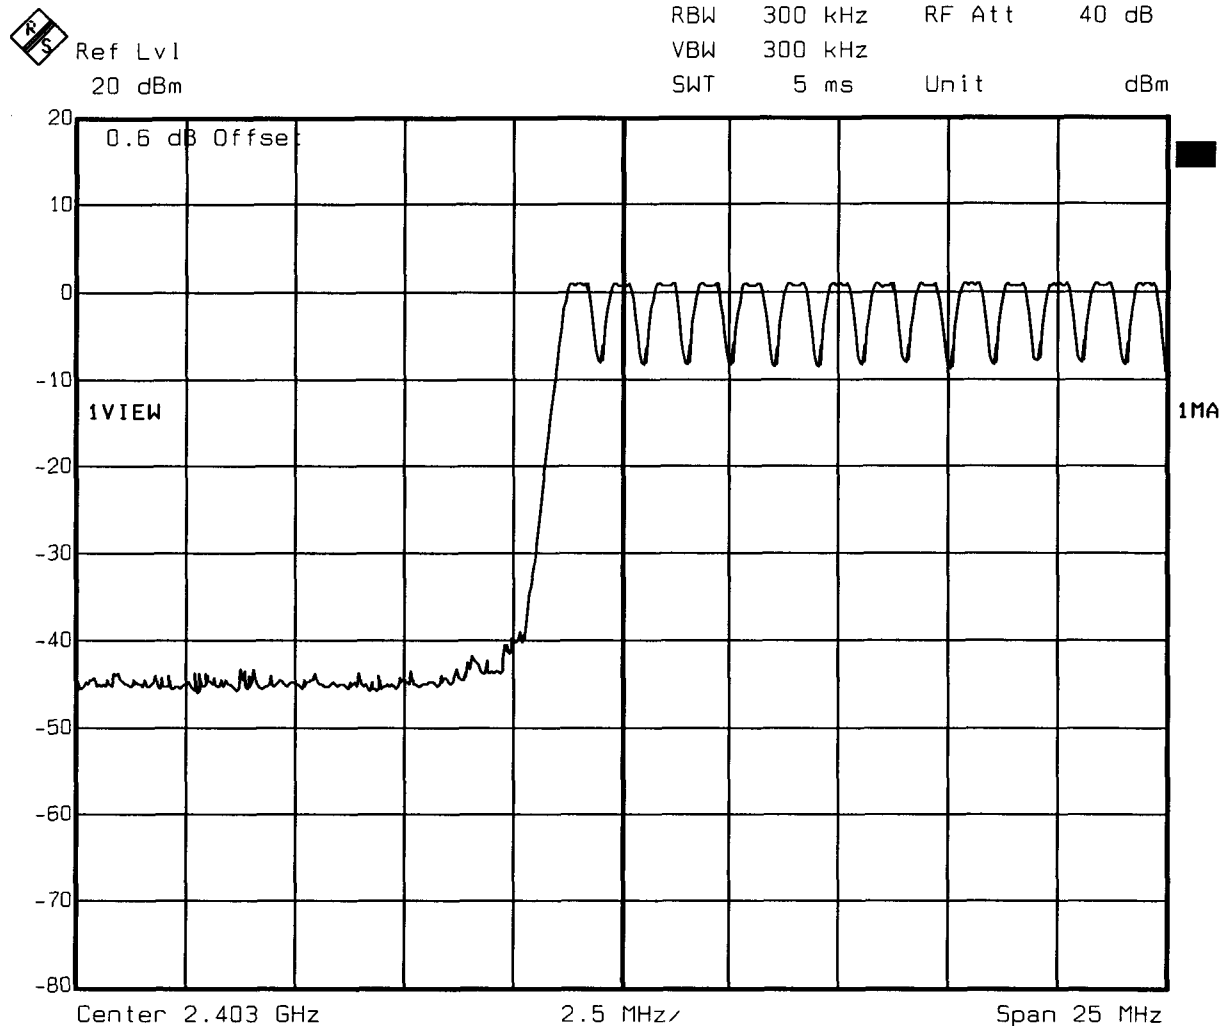


Date: 27.APR.2006 07:23:31

Measurement diagram

FCC part 15.247
Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Channel.: 14-38 |
| Comment 3 | |

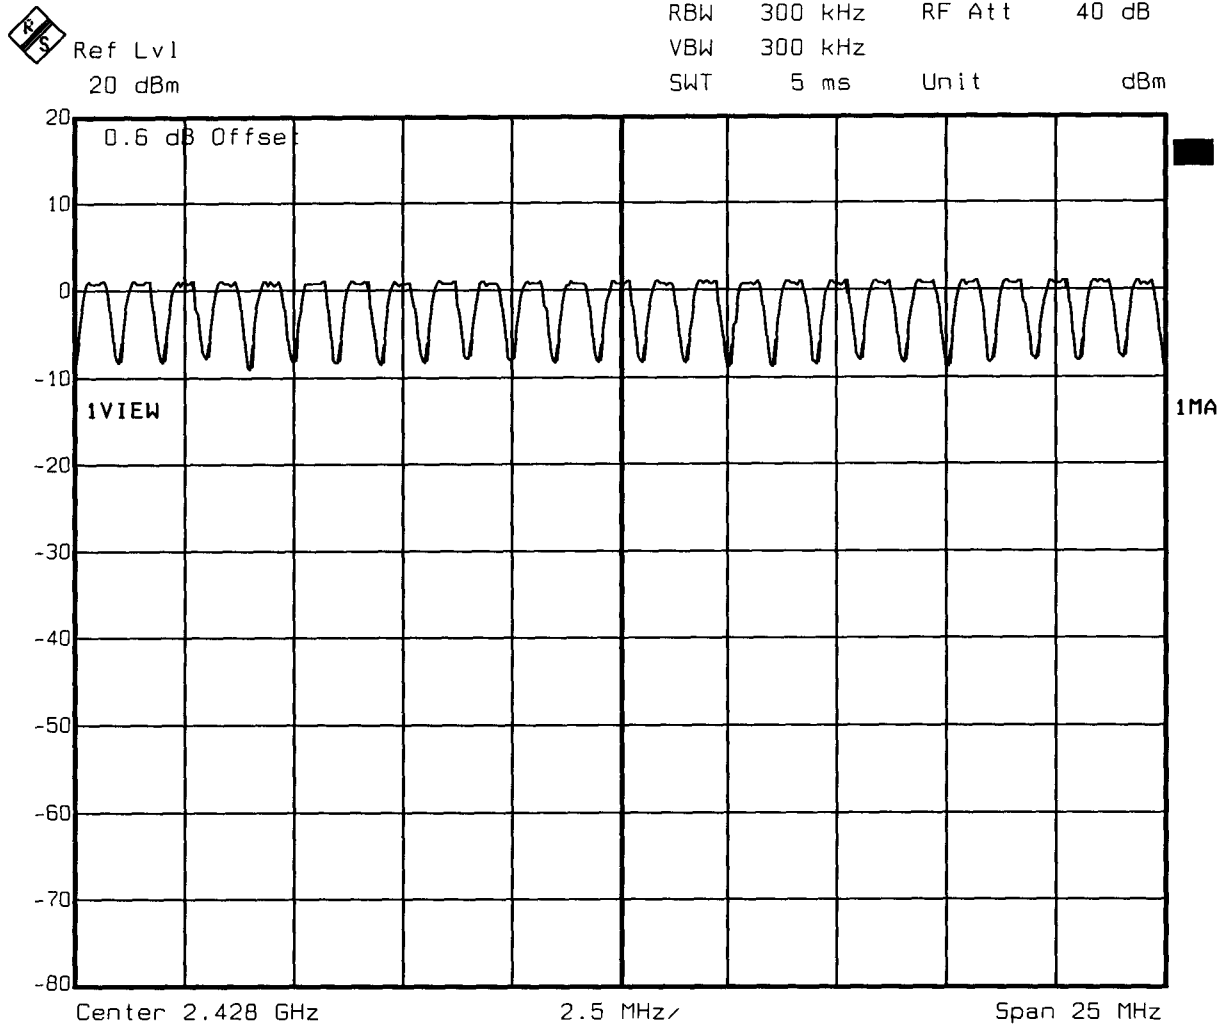


Date: 27.APR.2006 07:27:26

Measurement diagram

FCC part 15.247
Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Channel.:39-63 |
| Comment 3 | |

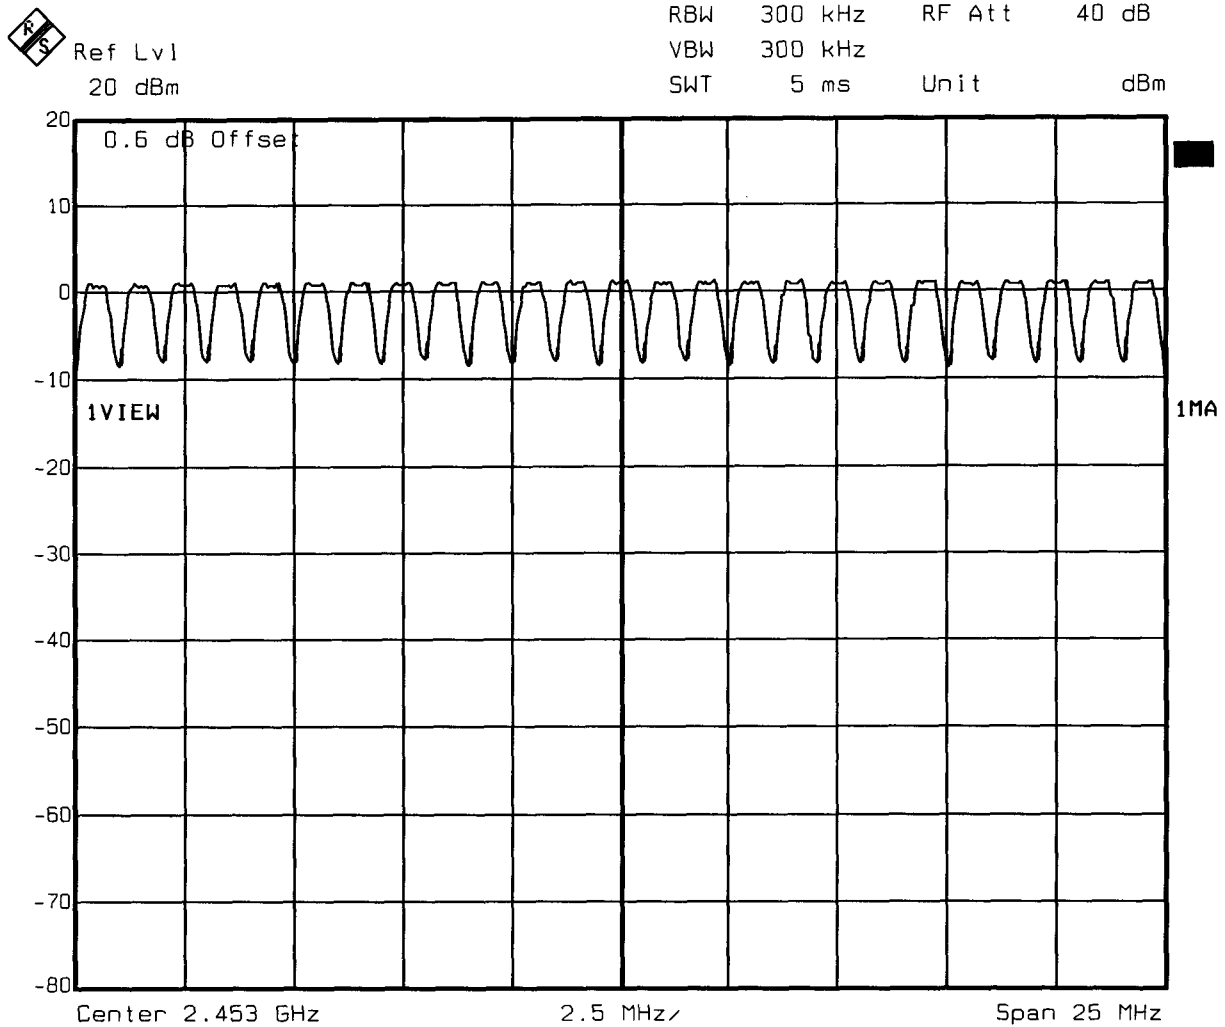


Date: 27.APR.2006 07:30:19

Measurement diagram



FCC part 15.247
Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Channel.: 64-78 |
| Comment 3 | |

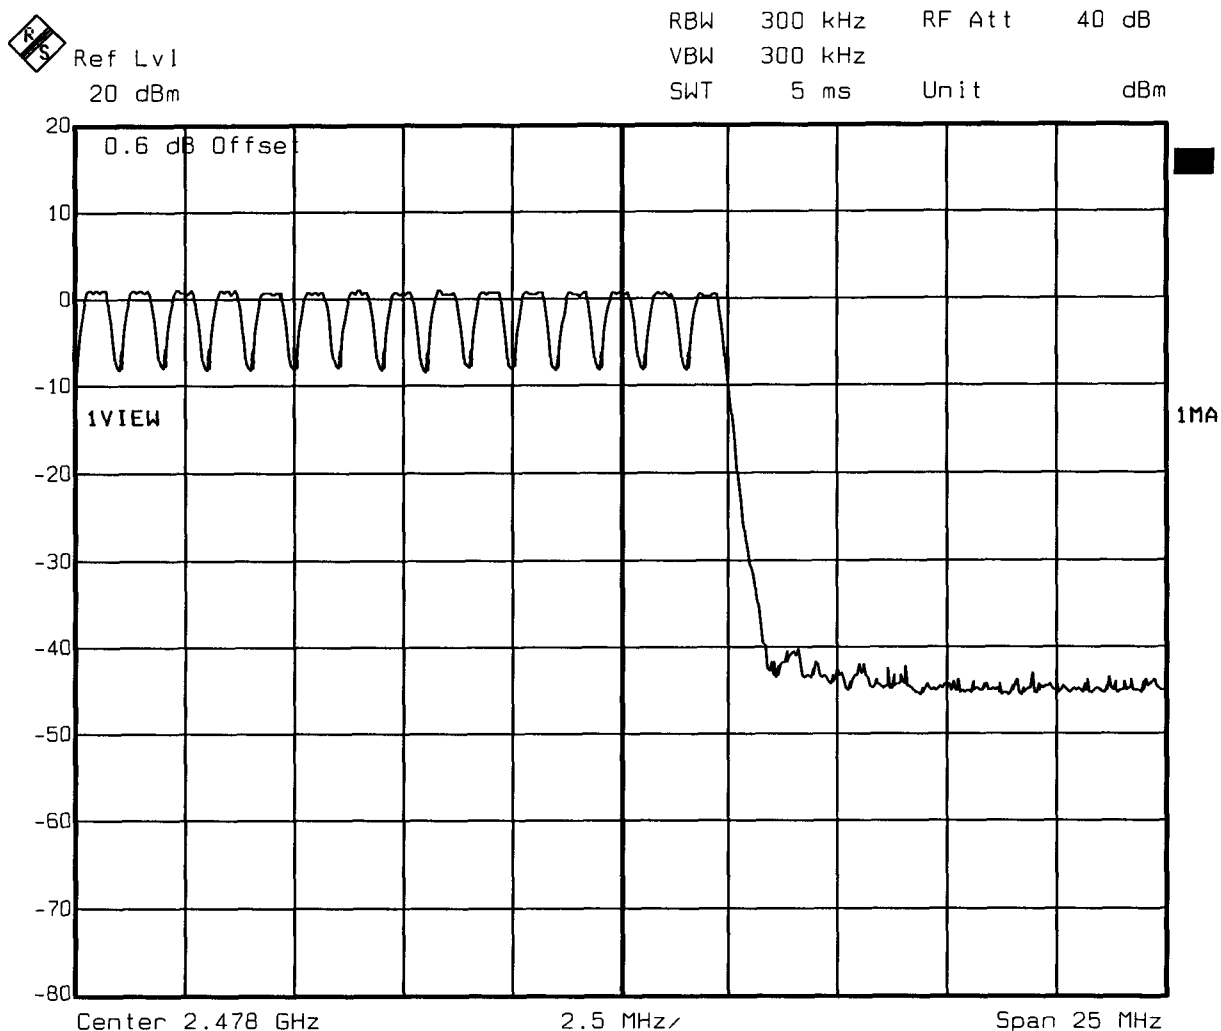


Date: 27.APR.2006 07:35:12

Measurement diagram

FCC part 15.247
Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Master inquiry mode |
| Comment 3 | |

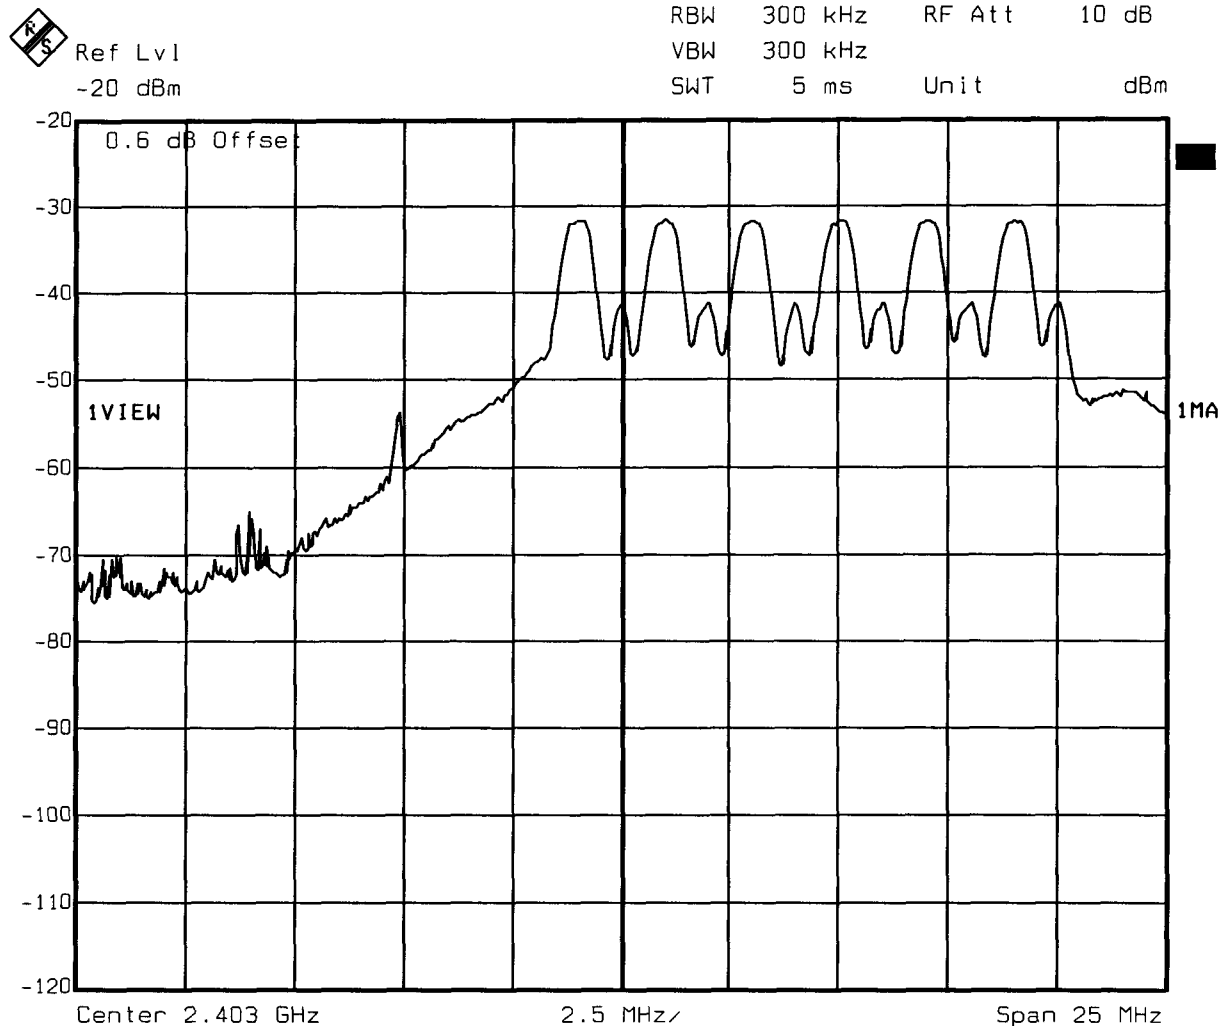


Date: 27.APR.2006 08:41:15

Measurement diagram

FCC part 15.247
Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Master inquiry mode |
| Comment 3 | |

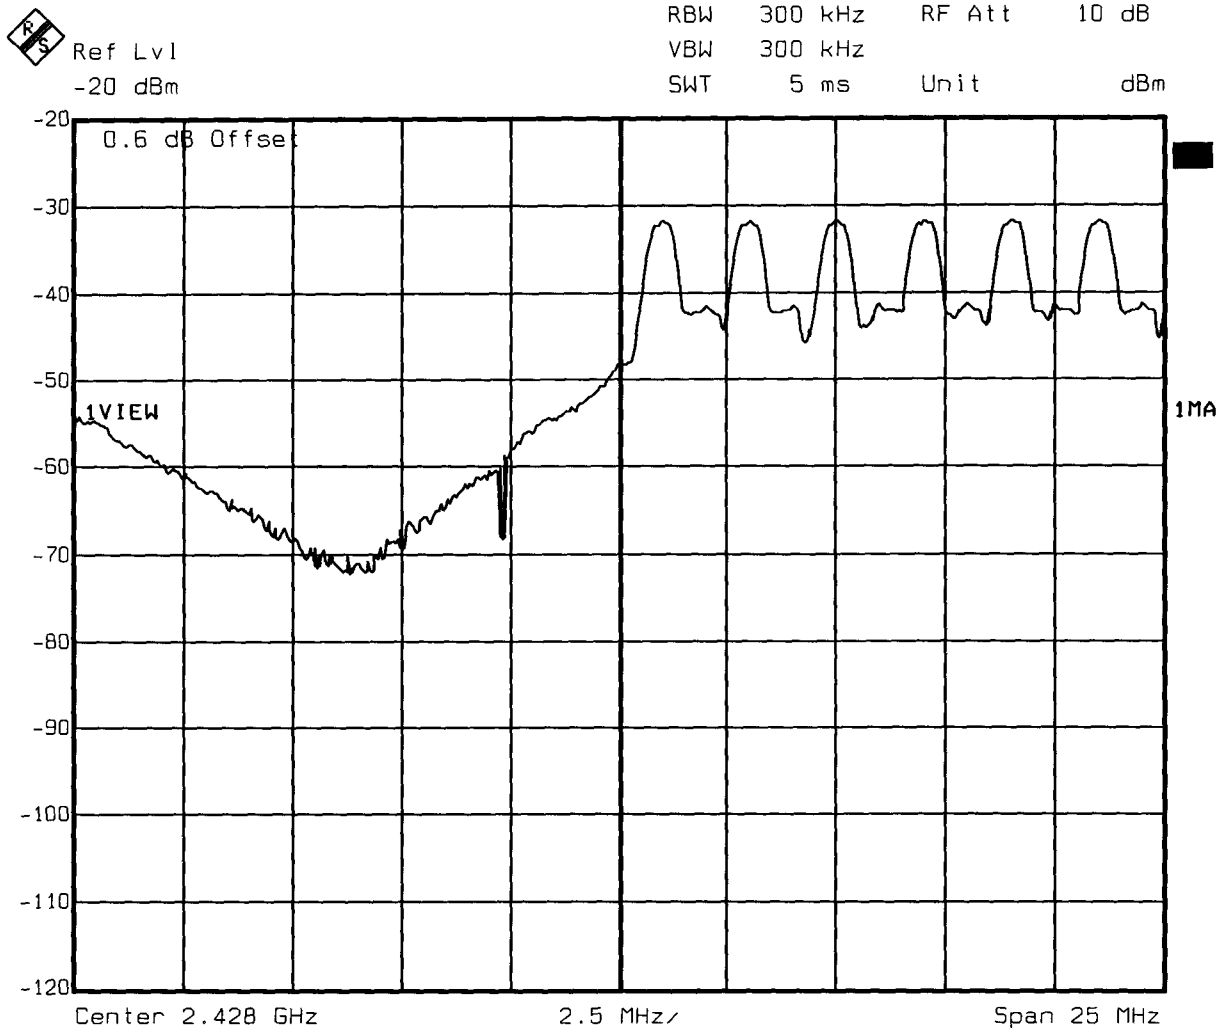


Date: 27.APR.2006 09:19:48

Measurement diagram

FCC part 15.247
Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Master inquiry mode |
| Comment 3 | |

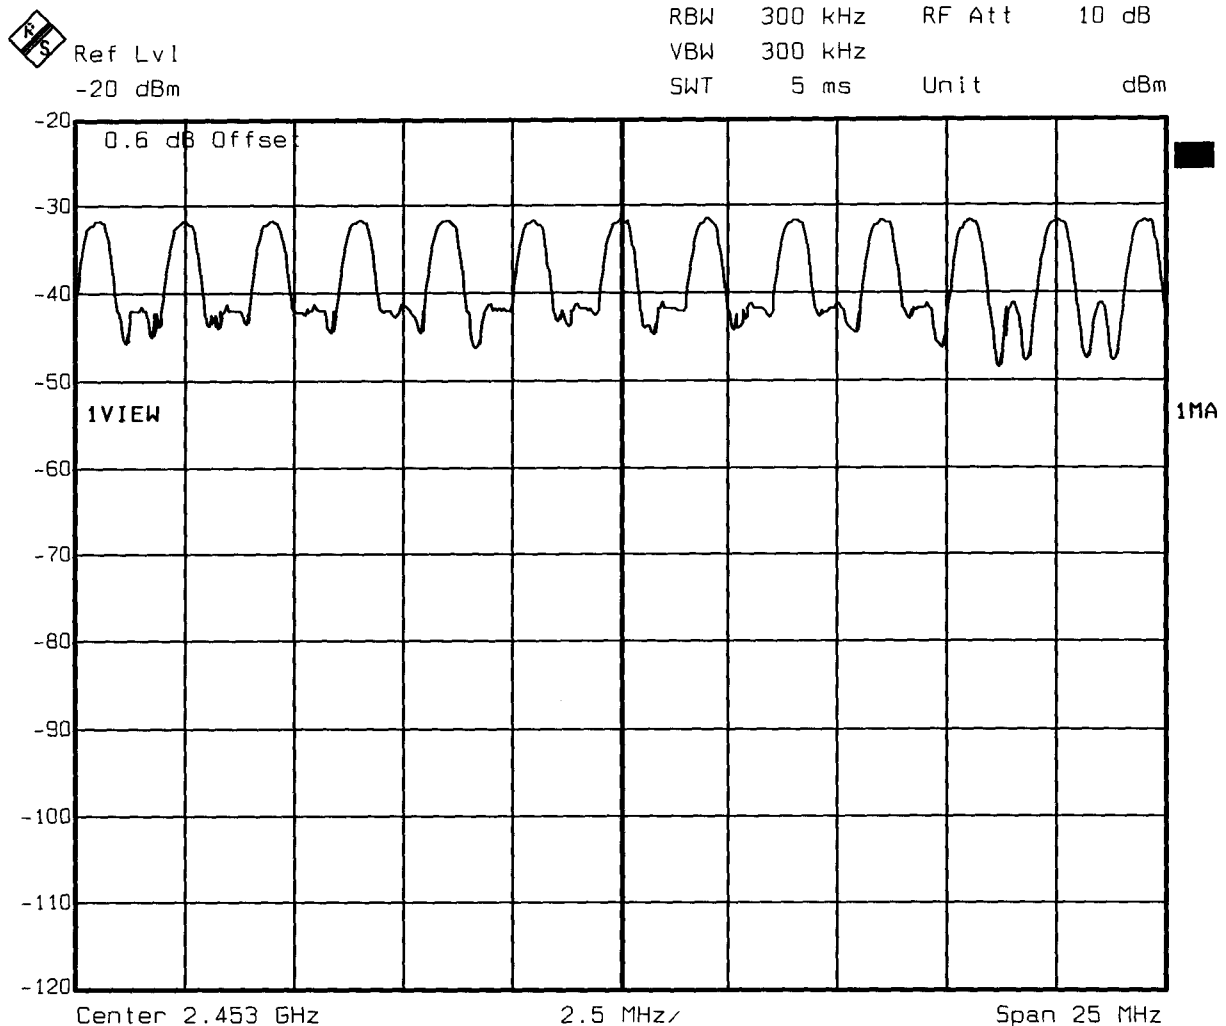


Date: 27.APR.2006 09:42:49

Measurement diagram

FCC part 15.247
Number of hopping frequencies

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(a) |
| Comment 1 | Number of hopping frequencies |
| Comment 2 | Master inquiry mode |
| Comment 3 | |

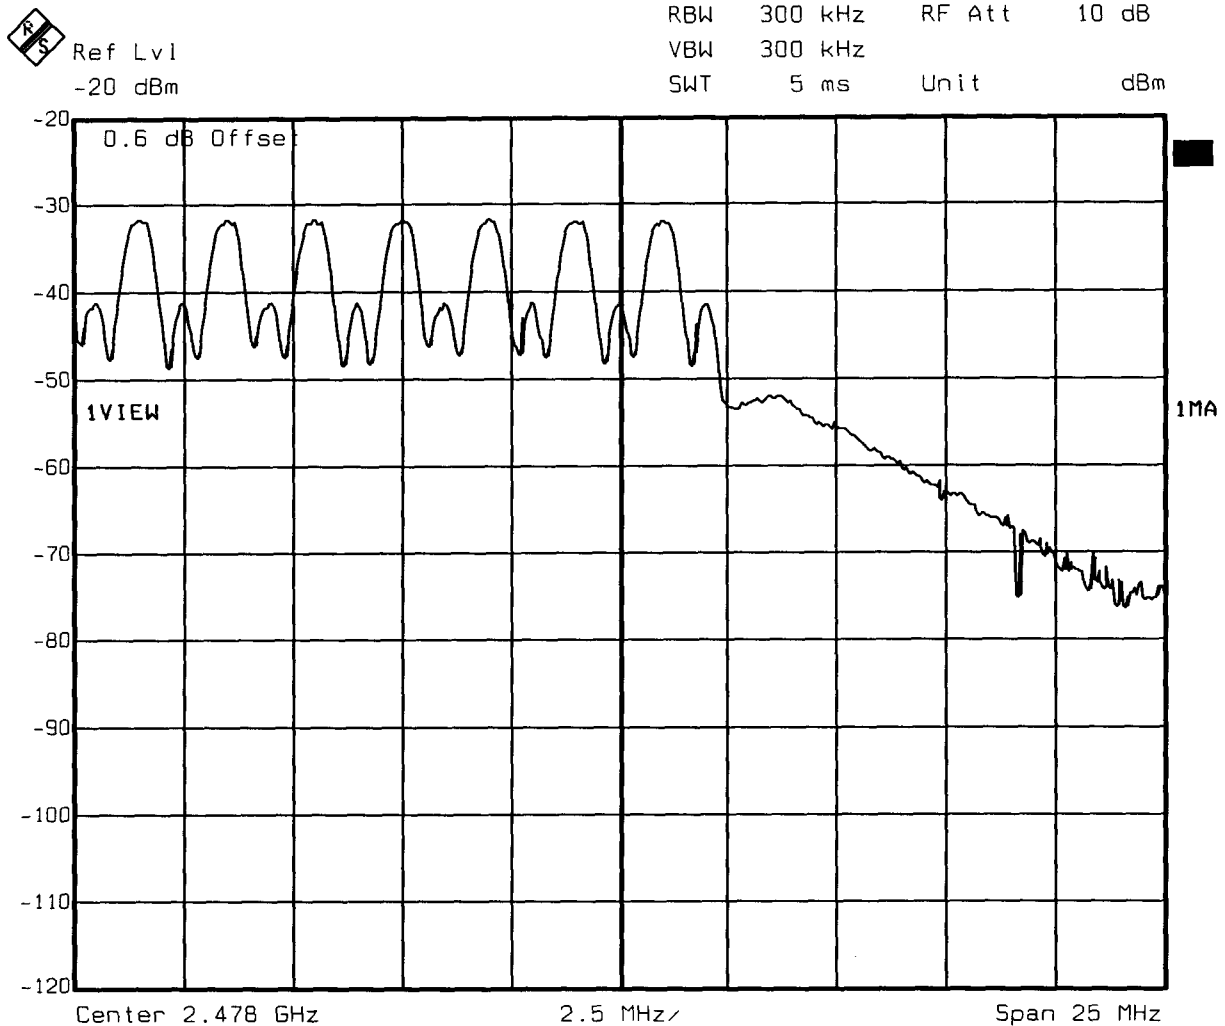

Date: 27.APR.2006 09:55:34

Measurement diagram




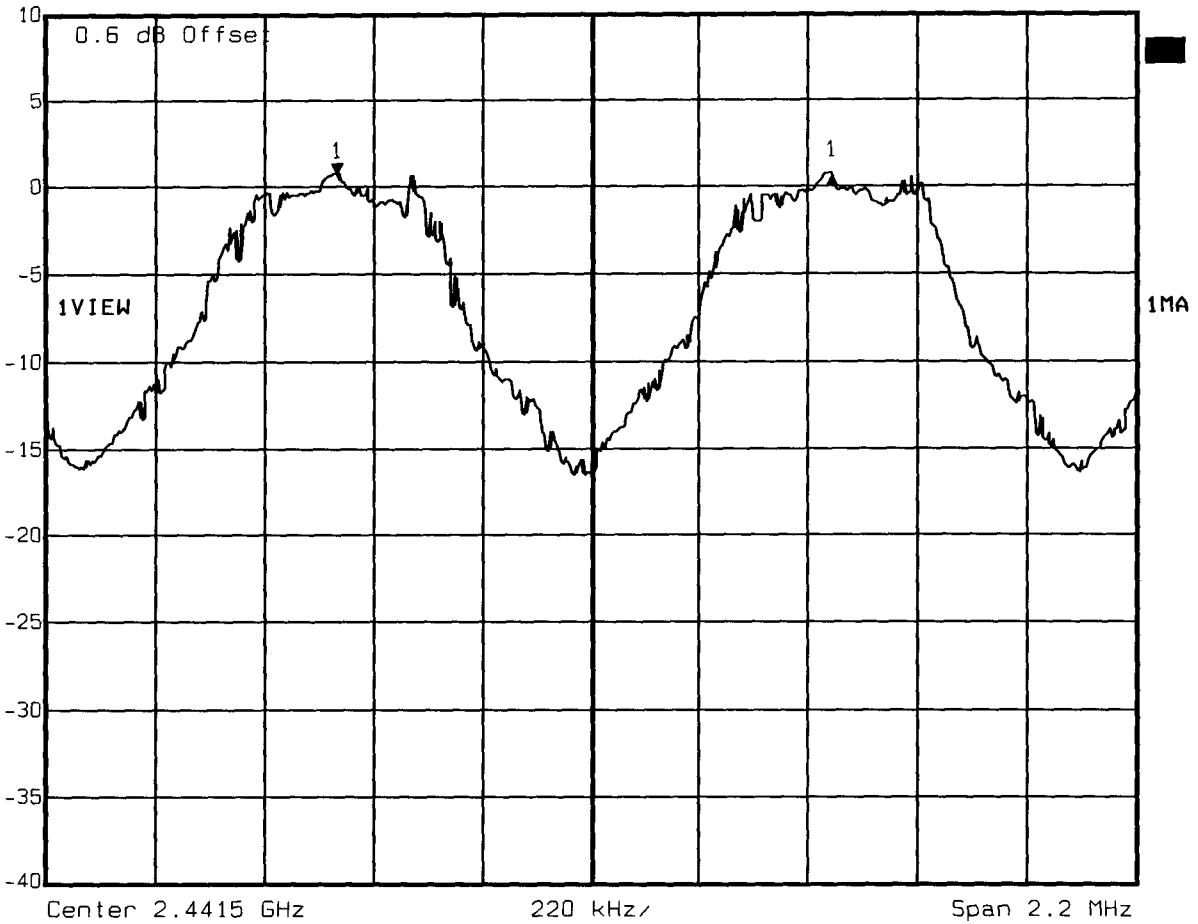
Appendix G

Carrier frequency separation

FCC part 15.247
Carrier frequency separation

| | |
|-----------------------|-----------------------------------|
| EUT | Bluetooth office headset and base |
| Model | GN 5300base |
| Approval Holder | GN Netcom |
| Temperature / Voltage | 23°C / 100 % Voltage |
| Test Site / Operator | ETS / Mr. Hoppe |
| Test Specification | FCC part 15 section 247(b) |
| Comment 1 | Carrier frequency separation |
| Comment 2 | Channel.: 39/40 / 2441/2442 MHz |
| Comment 3 | Hopping mode |

| | | | | | |
|---|--------------|----------------|---------|---------|-------|
|  | Delta 1 [T1] | RBW | 100 kHz | RF Att | 30 dB |
| | Ref Lvl | 0.04 dB | VBW | 100 kHz | |
| | 10 dBm | 1.00080160 MHz | SWT | 5 ms | Unit |



Date: 26.APR.2006 14:32:19

Measurement diagram



Appendix H

Spurious emission conducted




Appendix I

Spurious emission radiated

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 96.53dBµV/m, RBW: 100kHz

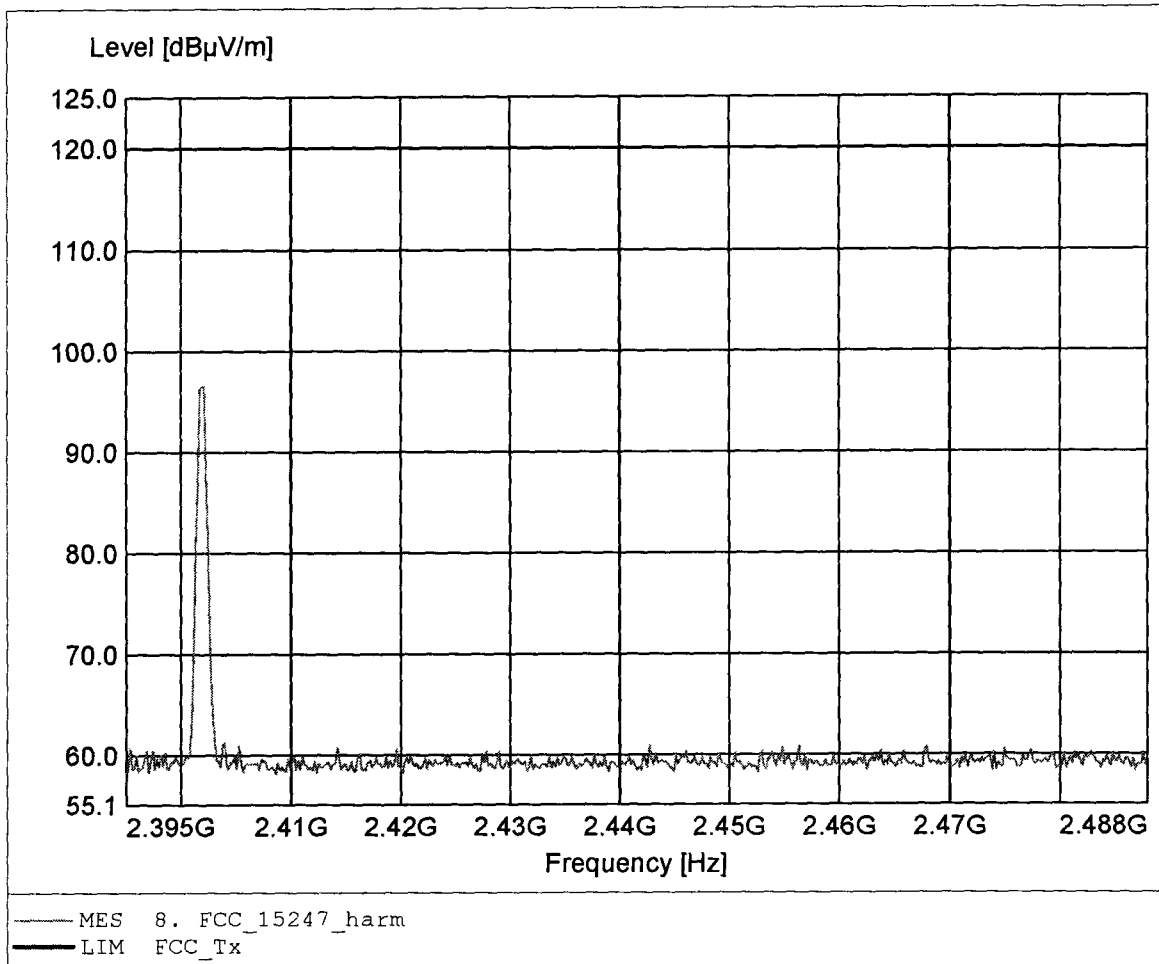

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.758MHz, Emax: 32.25dB μ V/m, RBW: 100kHz

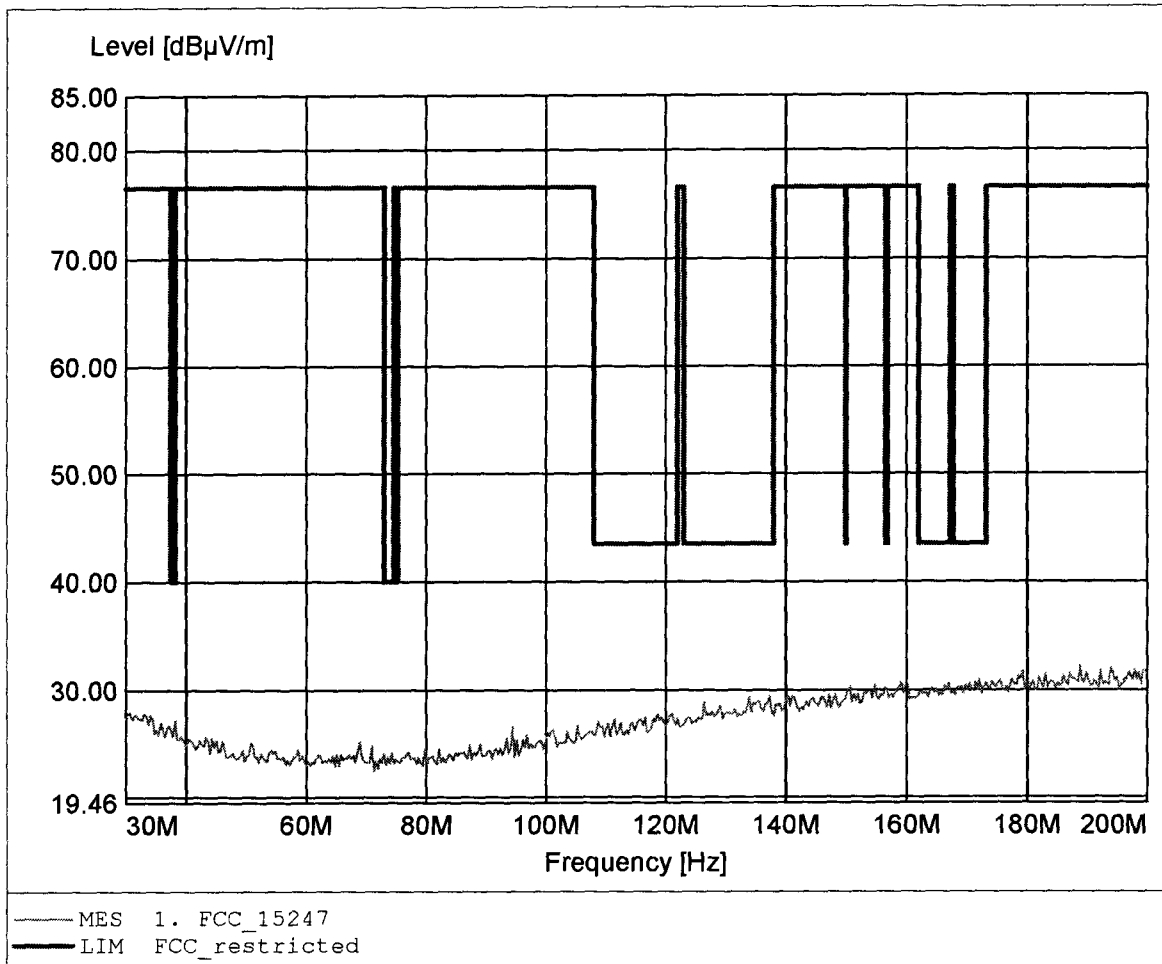

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 31.62dBμV/m, RBW: 100kHz

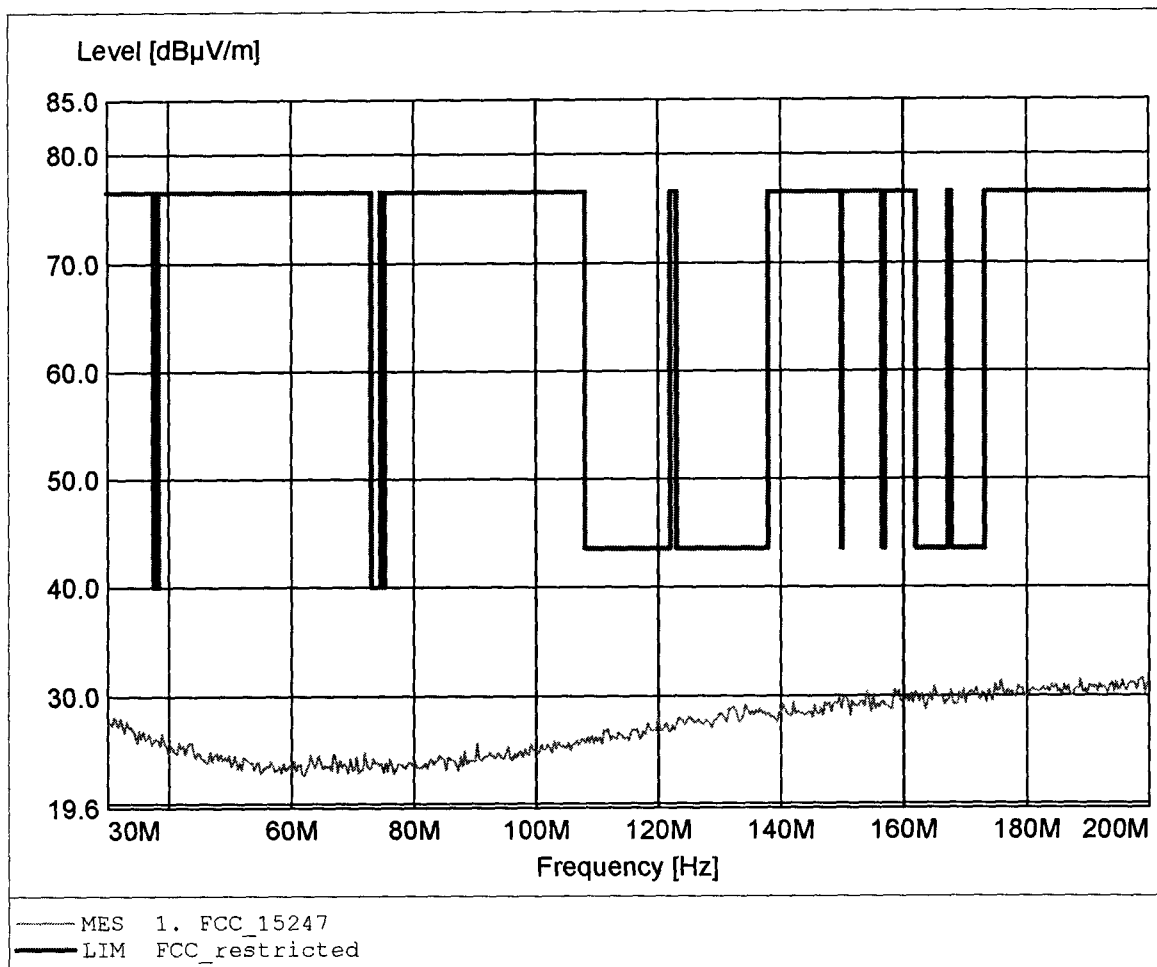

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 19.91dBµV/m, RBW: 100kHz

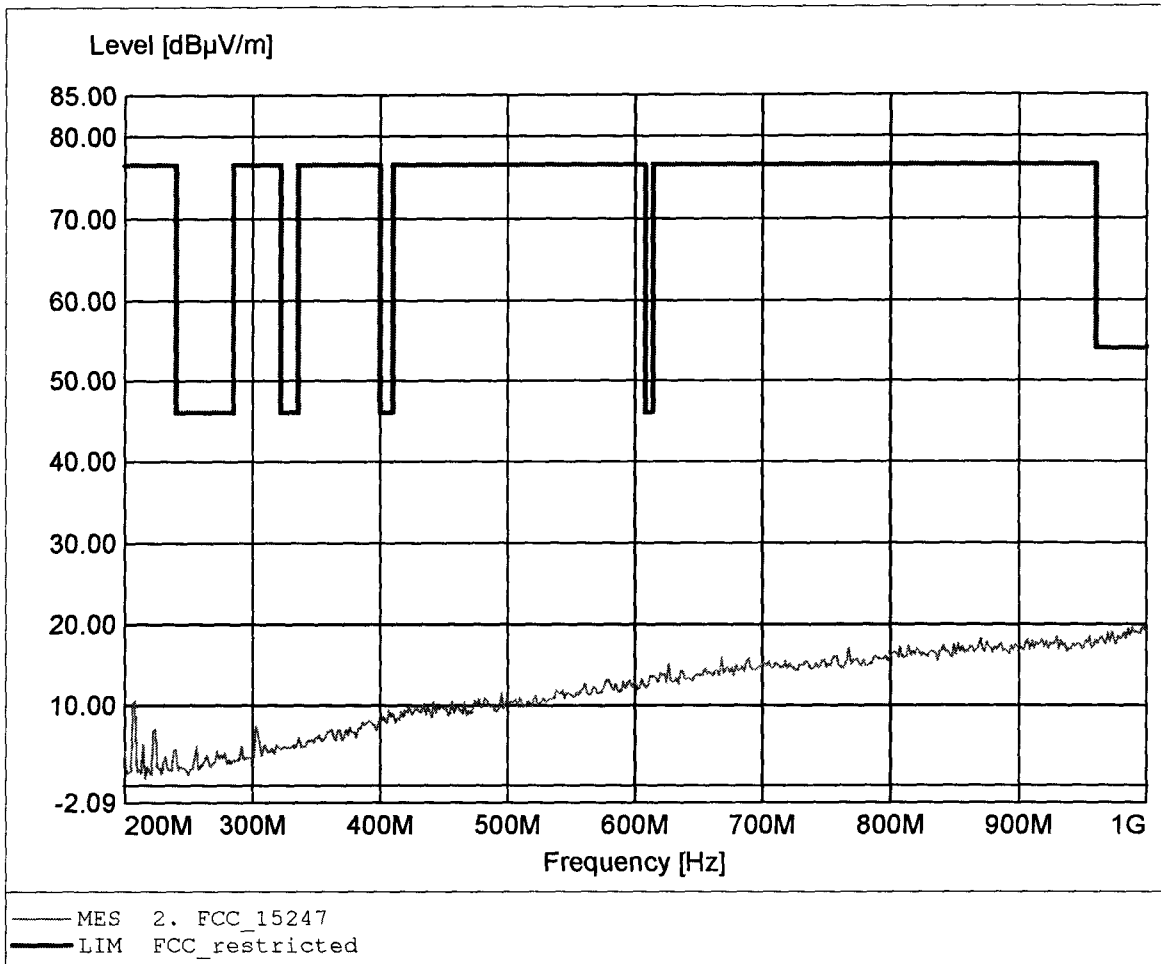

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 985.571MHz, Emax: 19.46dBµV/m, RBW: 100kHz

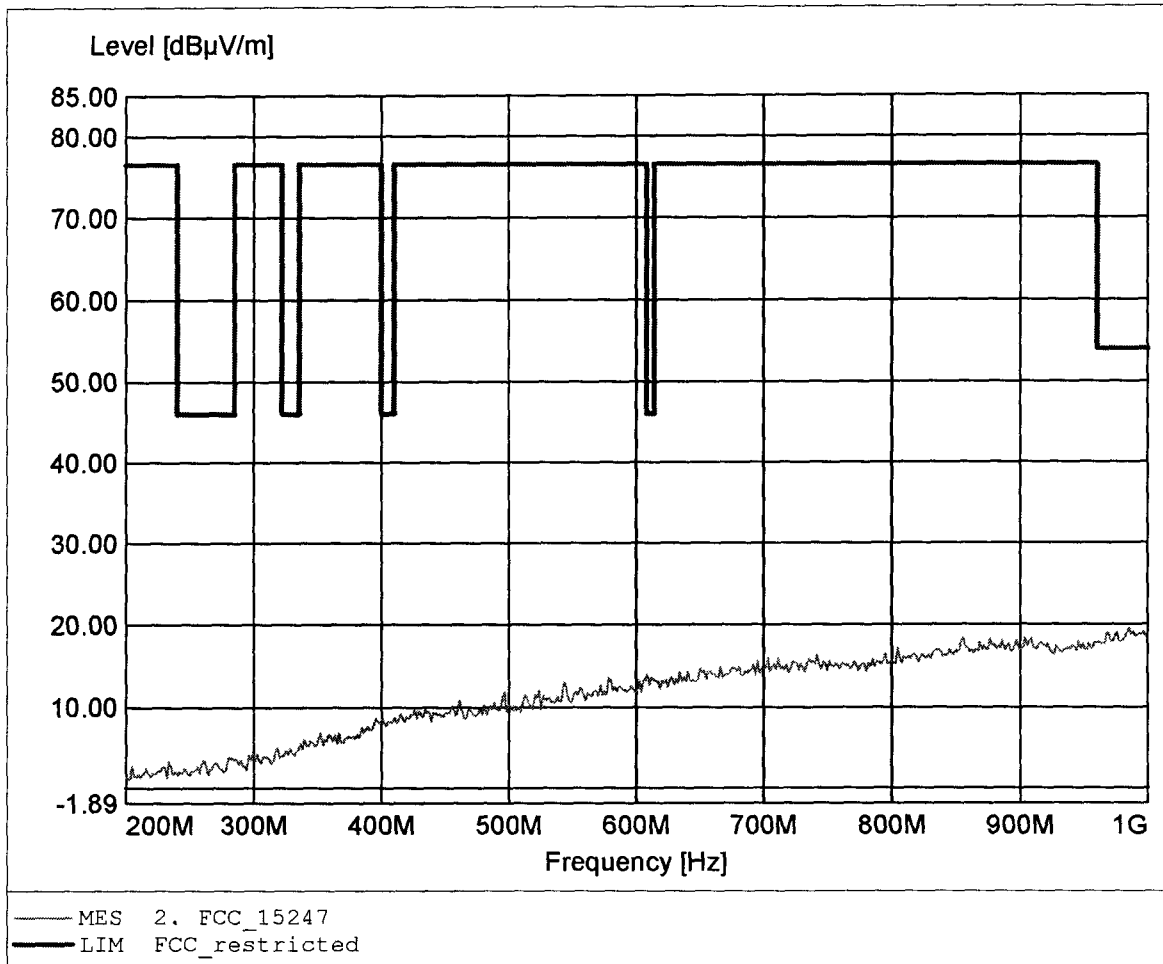

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.918GHz, Emax: 43.72dB μ V/m, RBW: 1MHz

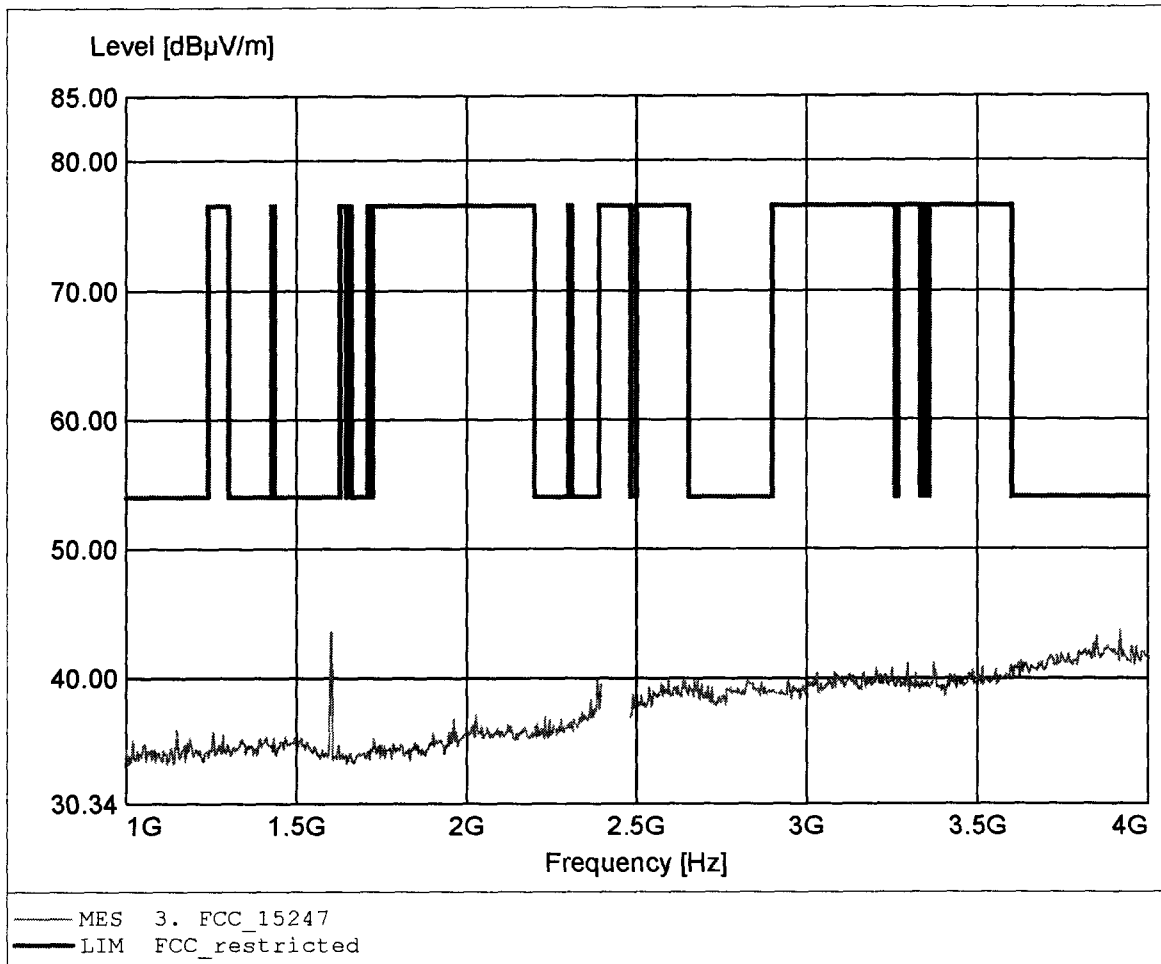

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 44.45dBµV/m, RBW: 1MHz

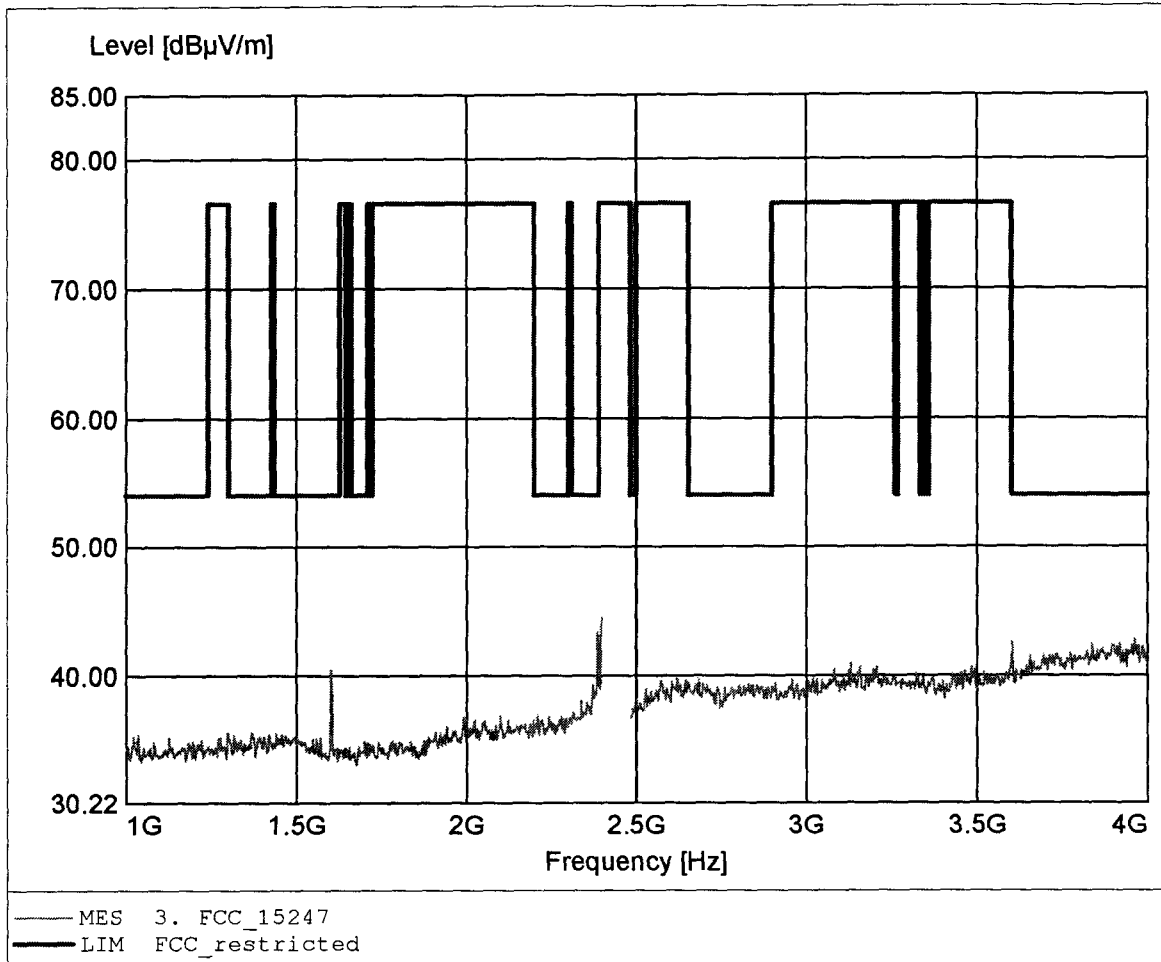

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 48.07dBuV/m, RBW: 1MHz

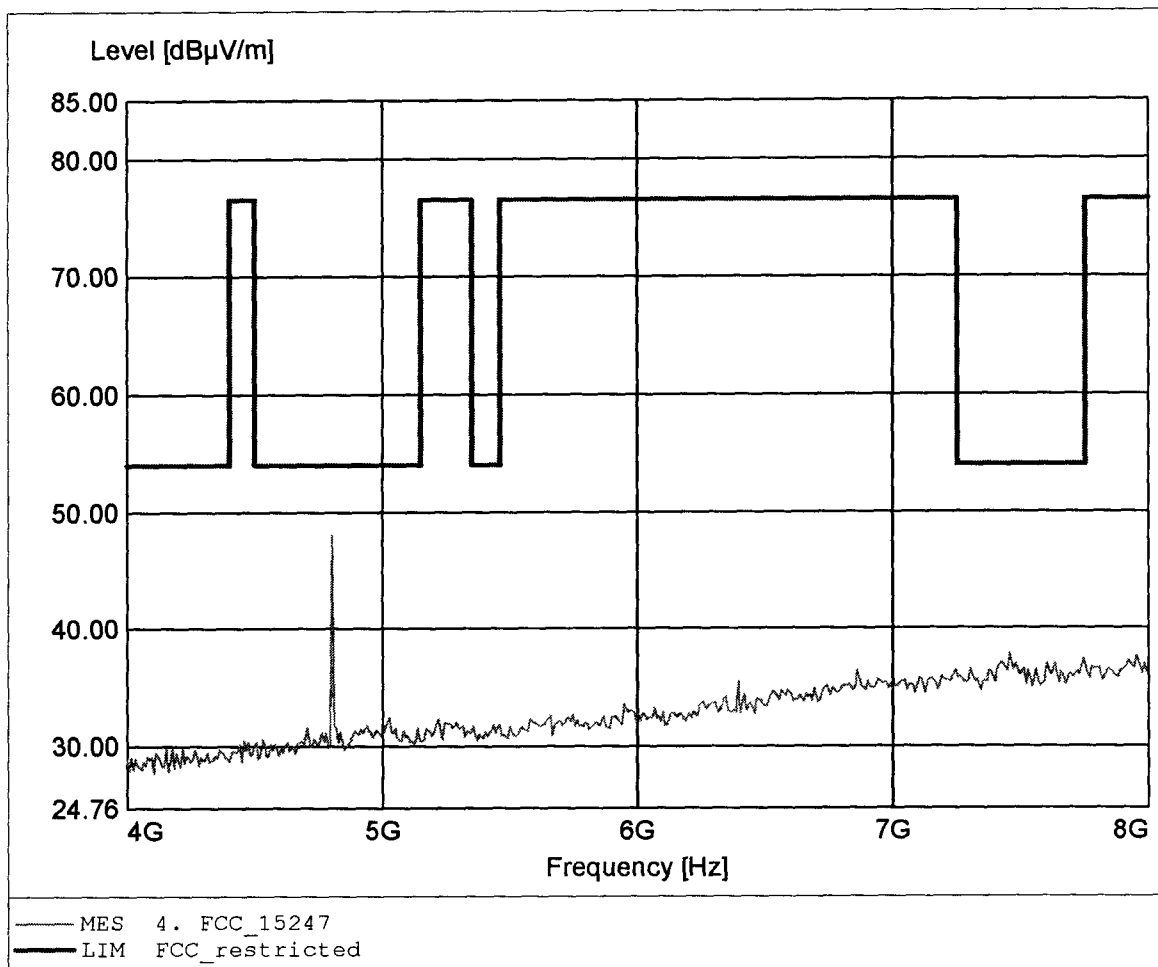

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 54.37dBµV/m, RBW: 1MHz

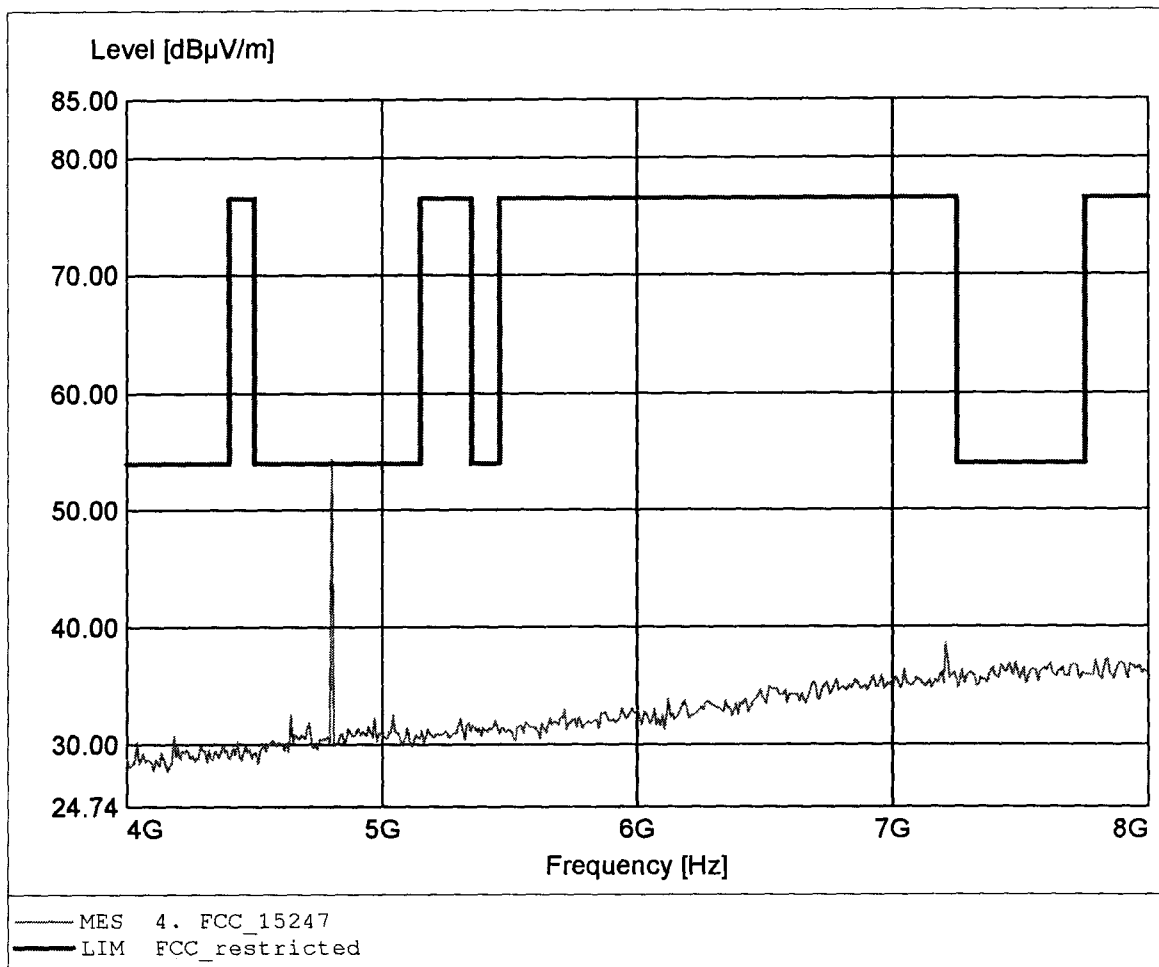

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 32.14dBµV/m, RBW: 1MHz

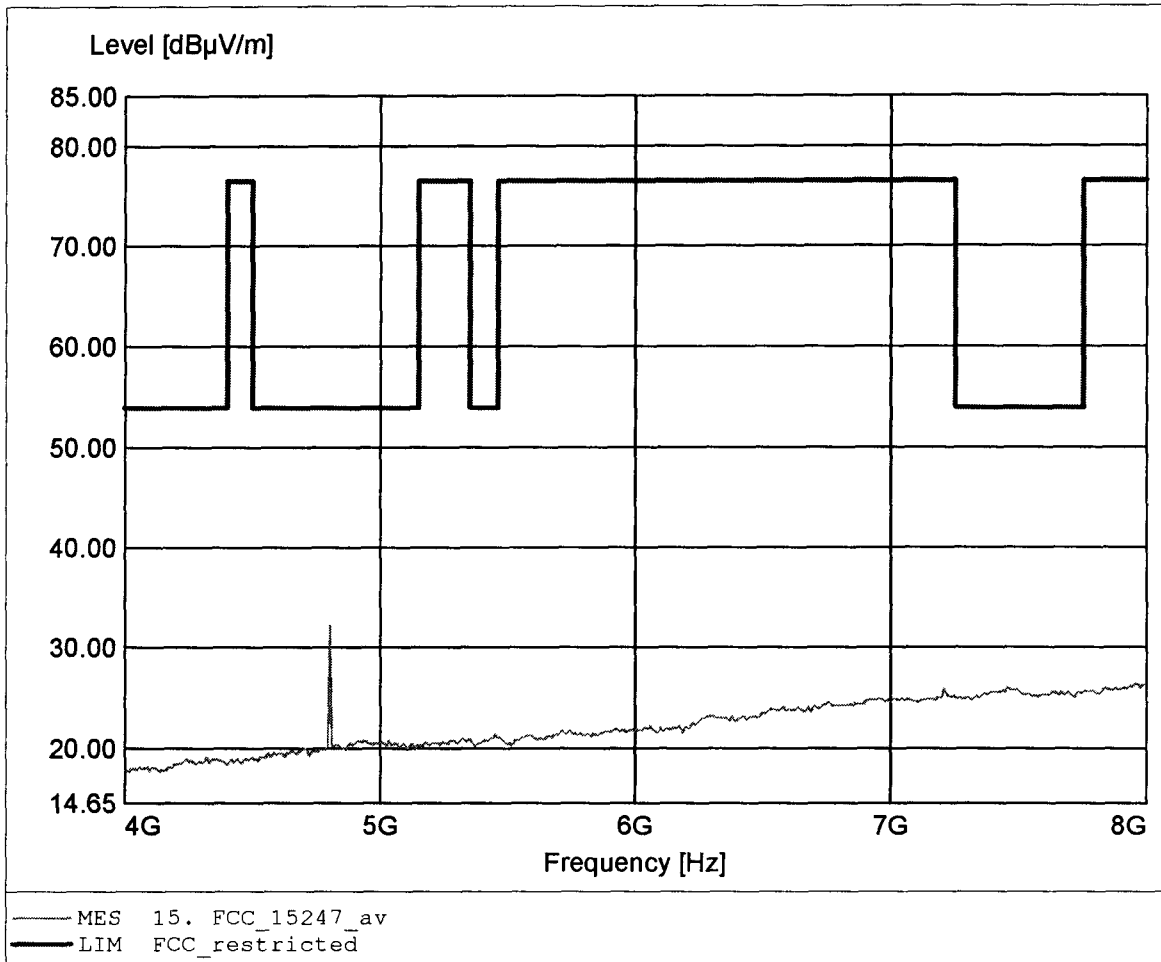

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.511GHz, Emax: 41.41dBuV/m, RBW: 1MHz

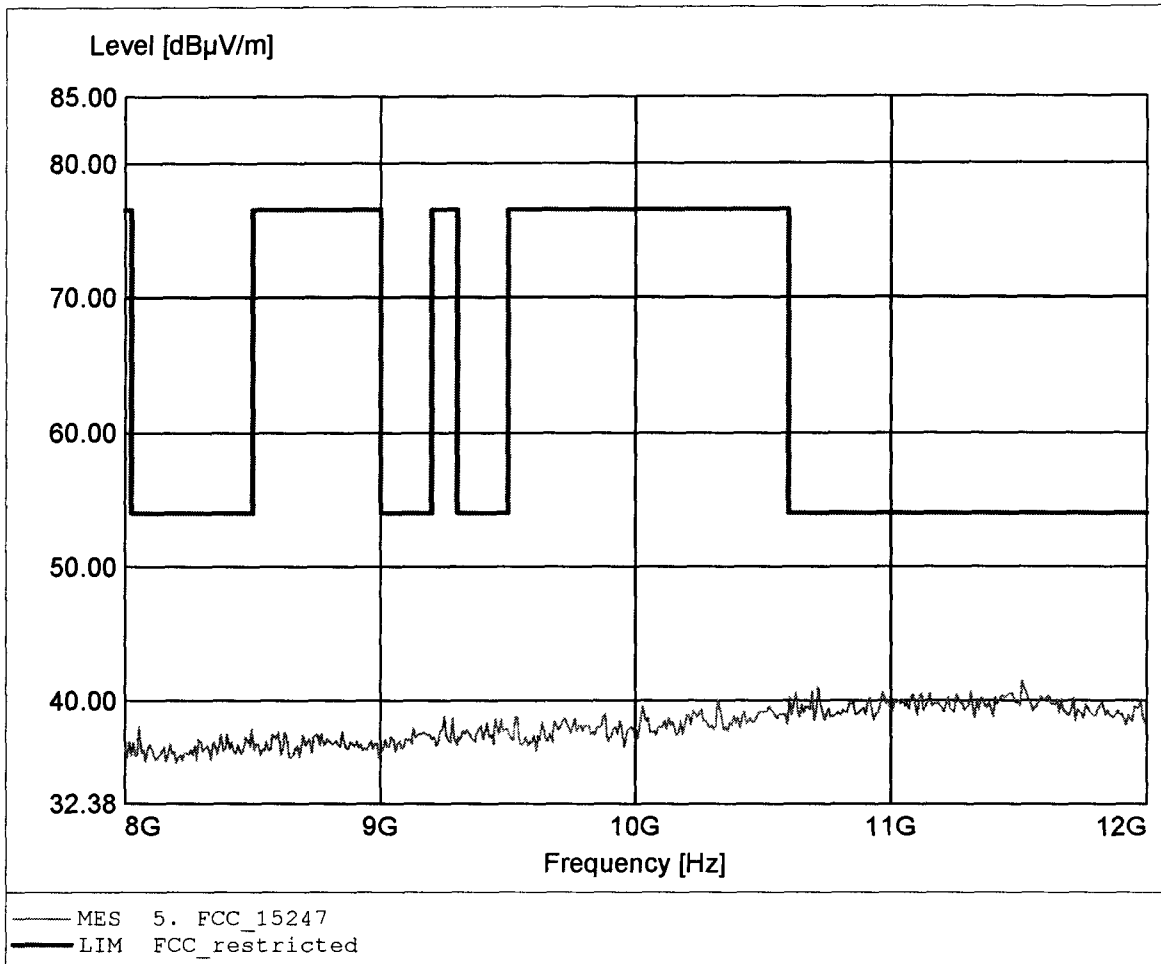

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.206GHz, Emax: 41.20dBµV/m, RBW: 1MHz

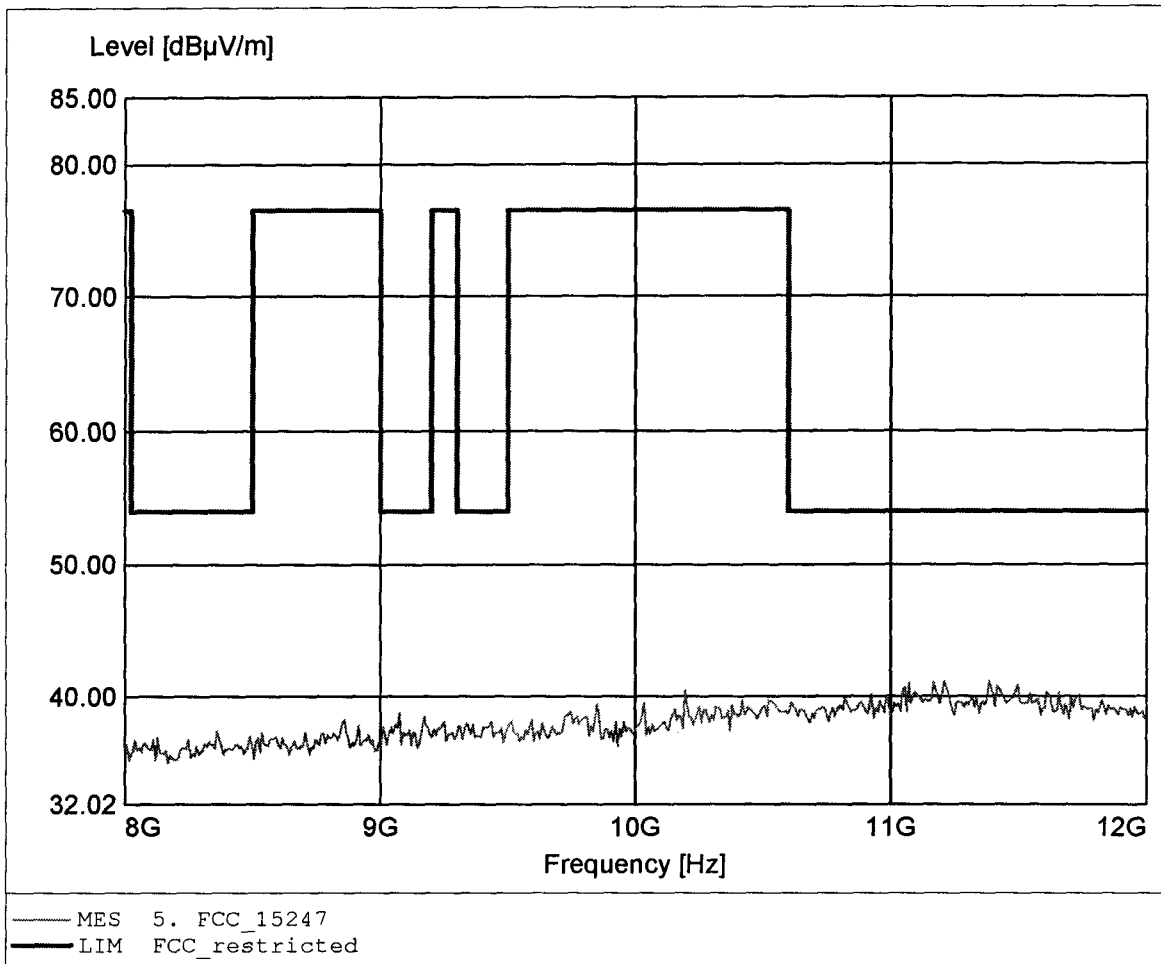

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.515GHz, Emax: 44.50dBµV/m, RBW: 1MHz

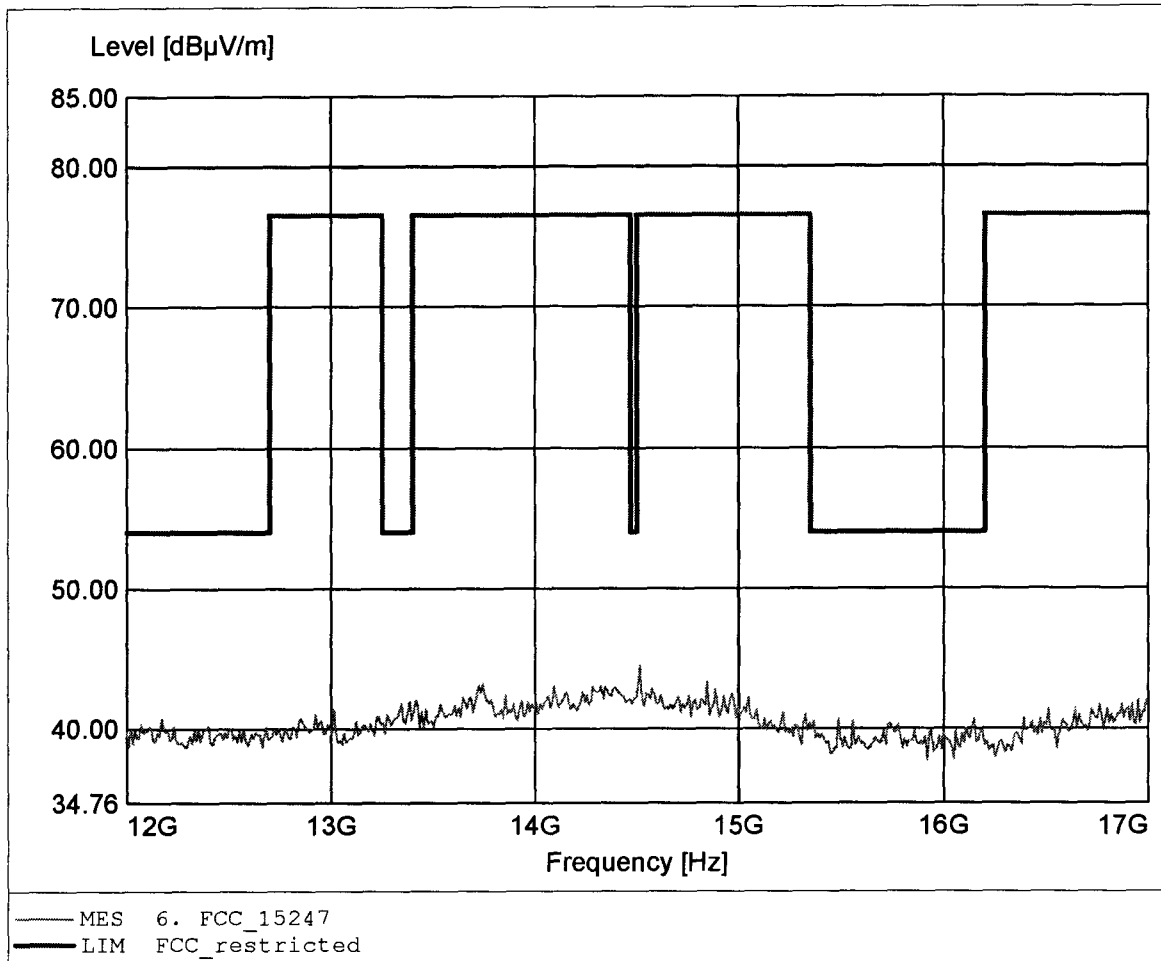

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.555GHz, Emax: 43.50dBµV/m, RBW: 1MHz

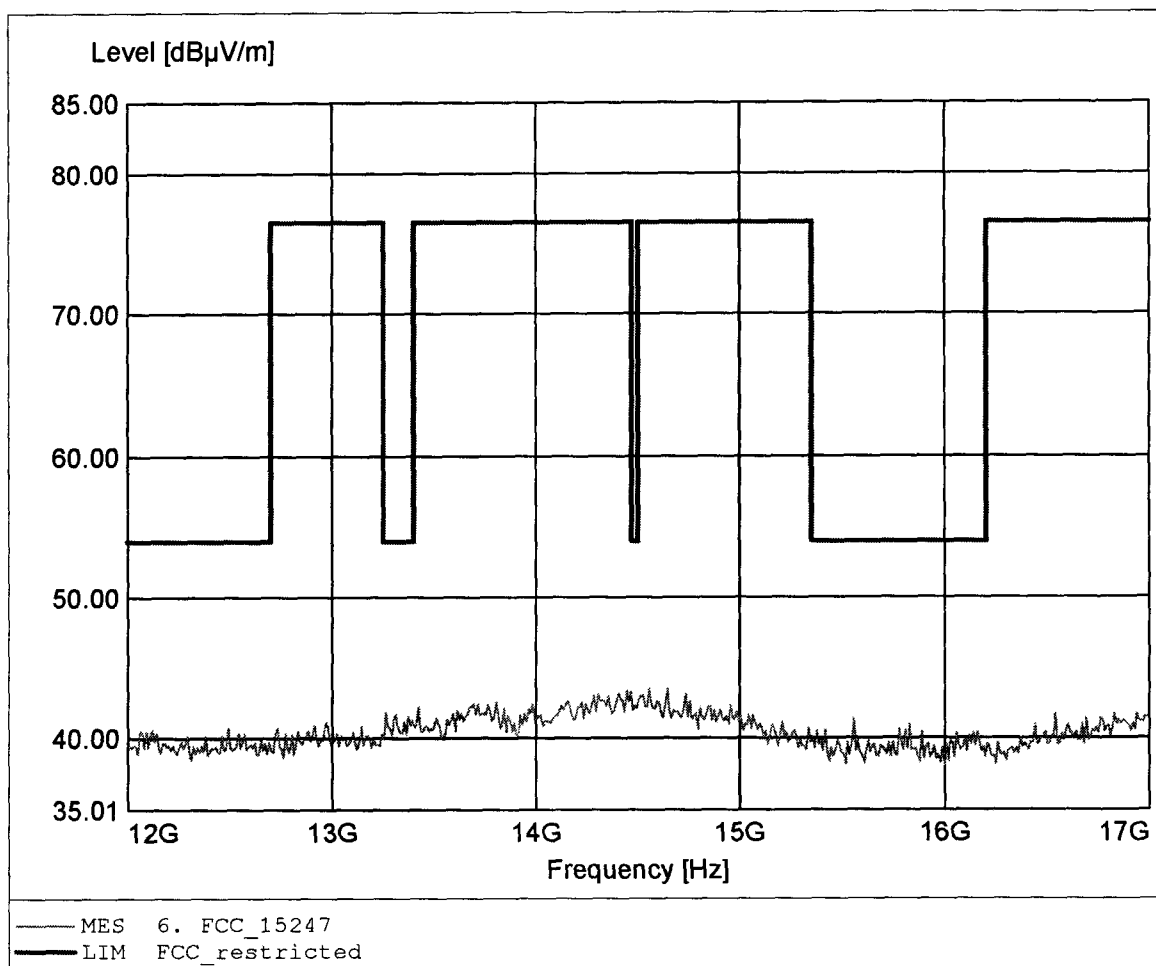

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 44.36dBµV/m, RBW: 1MHz

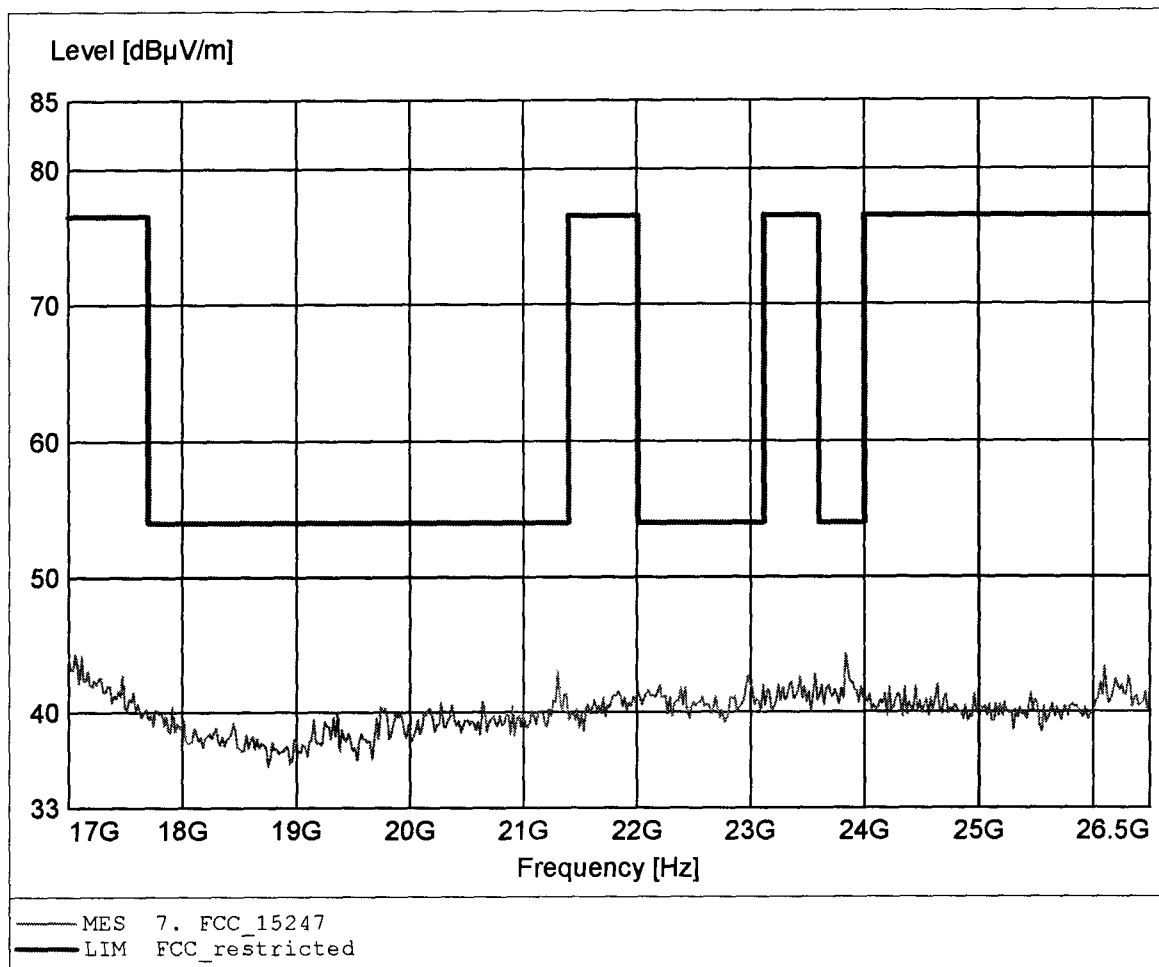

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.46dBµV/m, RBW: 1MHz

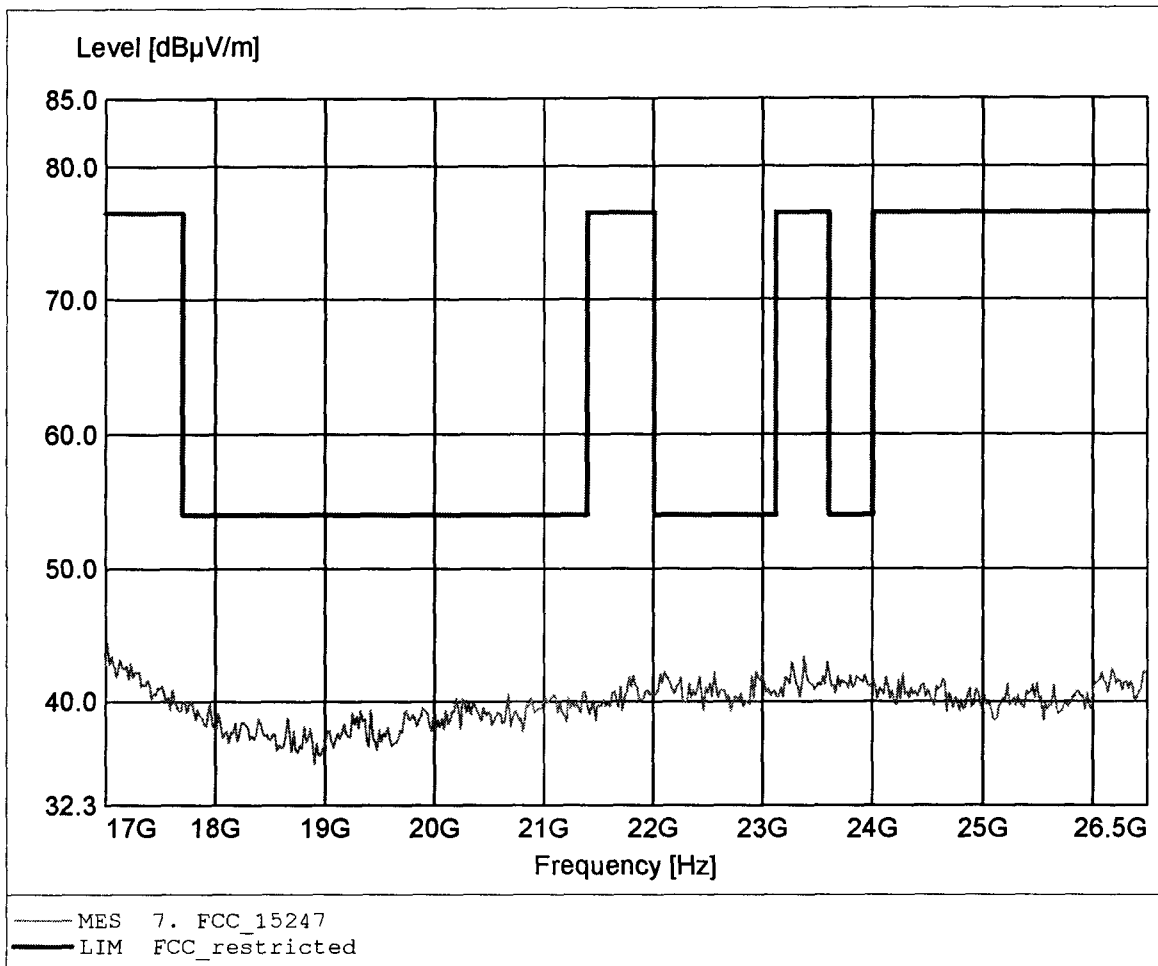

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.934MHz, Emax: 32.28dBµV/m, RBW: 100kHz

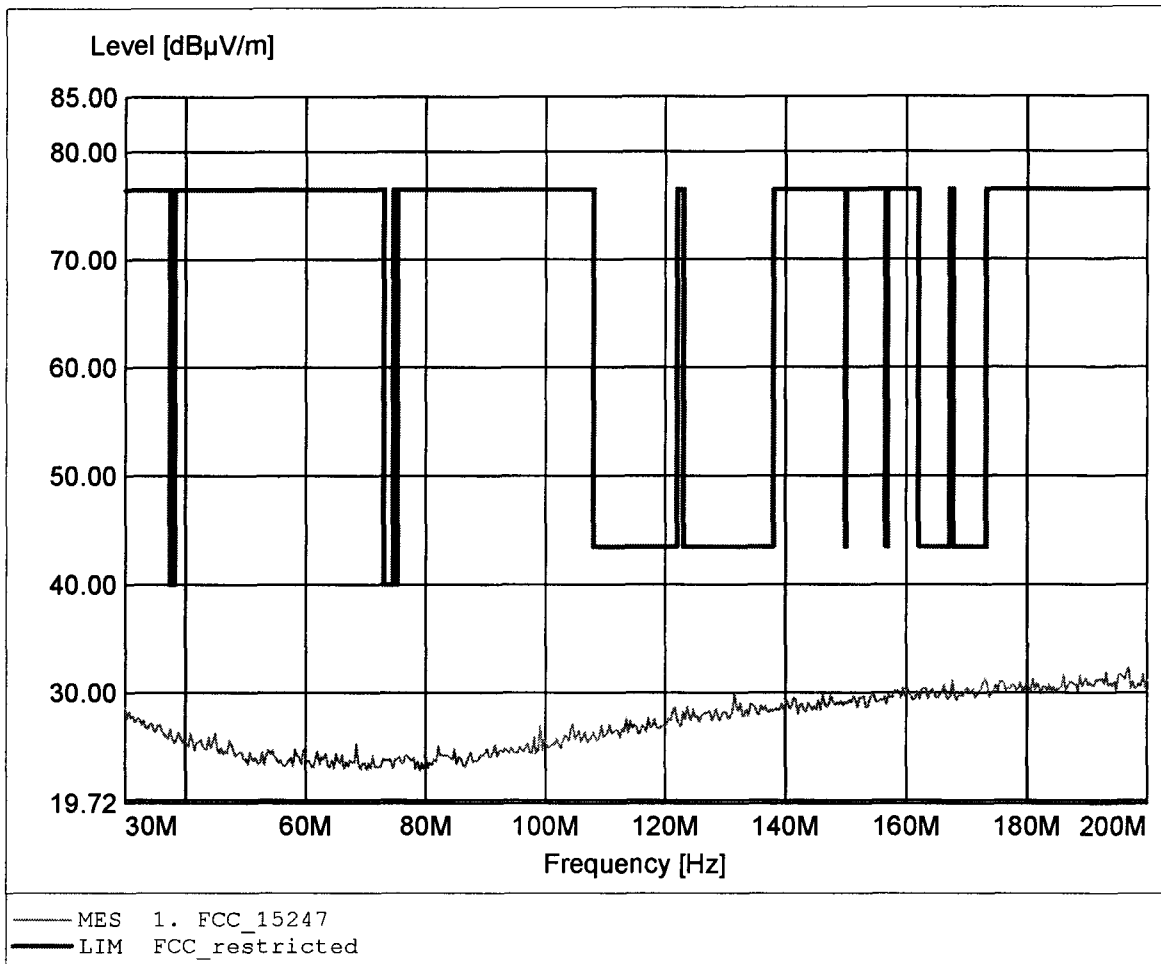

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.571MHz, Emax: 31.90dBµV/m, RBW: 100kHz

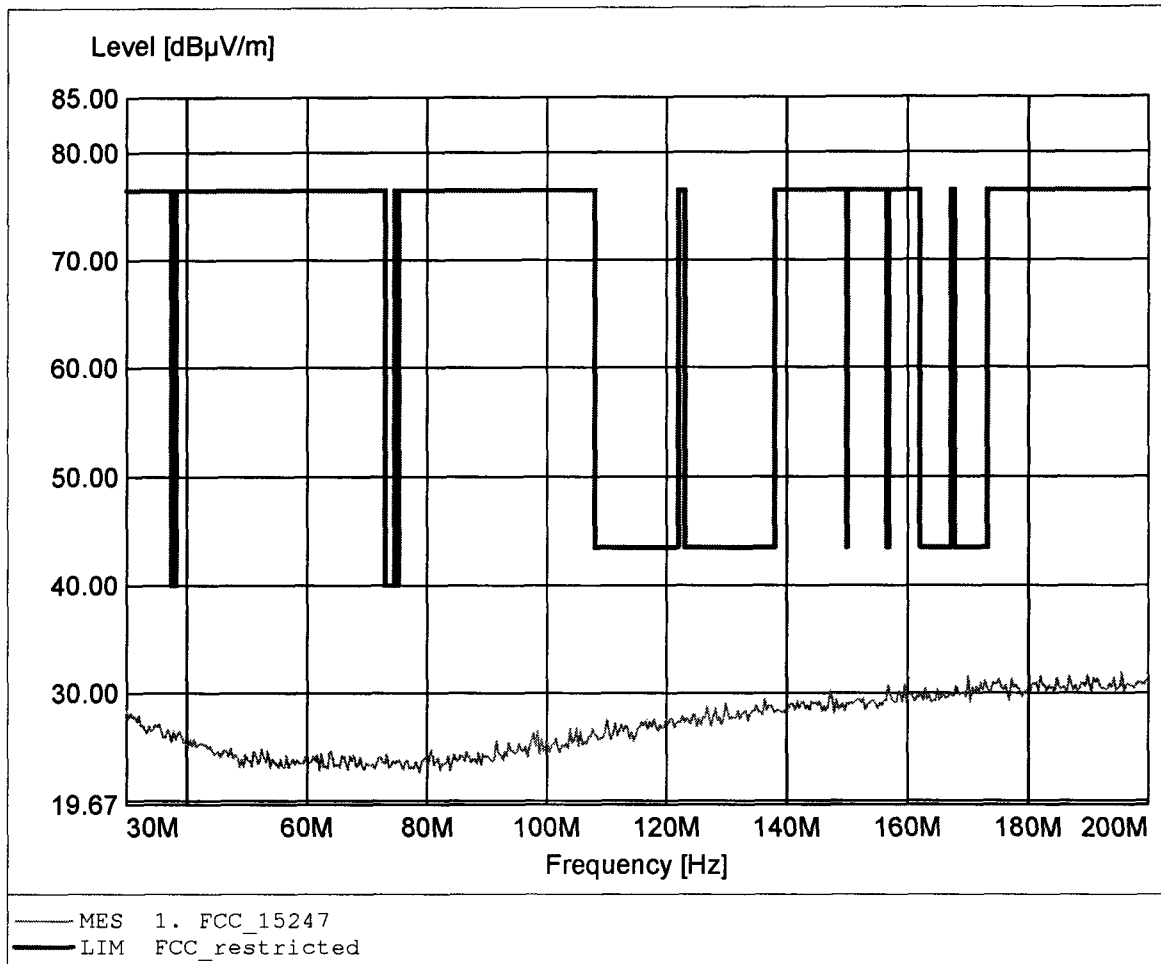

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 20.26dBµV/m, RBW: 100kHz

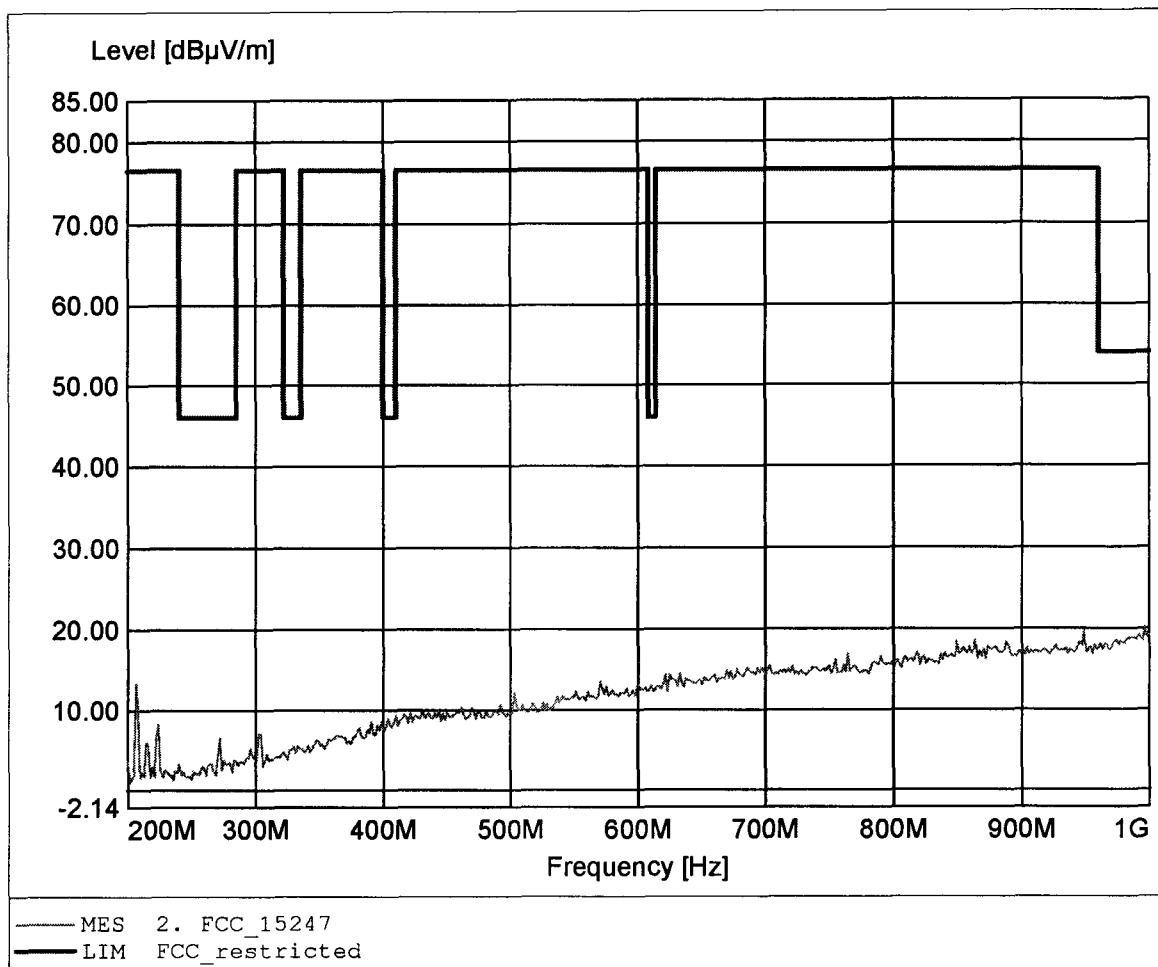

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 19.57dBµV/m, RBW: 100kHz

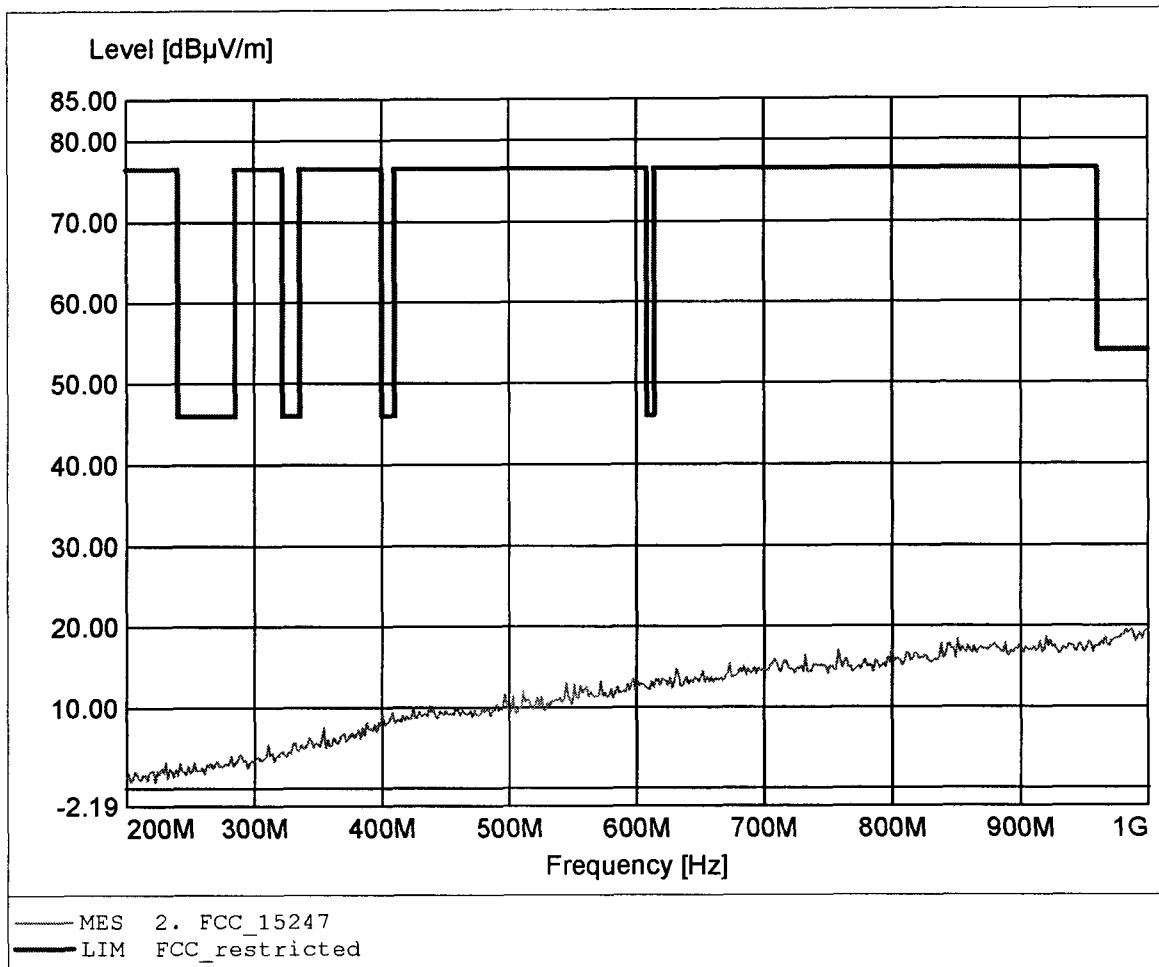

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 43.80dBµV/m, REW: 1MHz

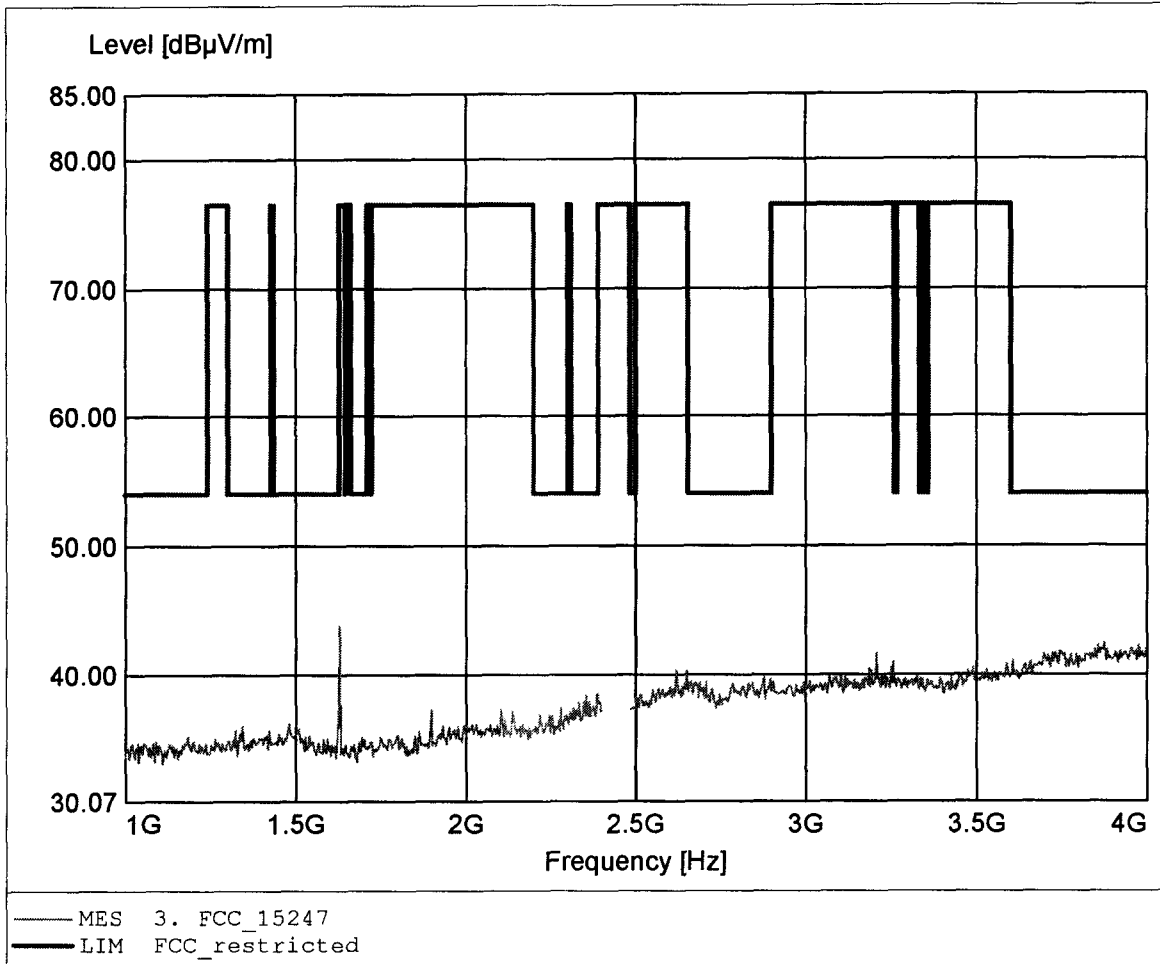

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 43.10dBµV/m, RBW: 1MHz

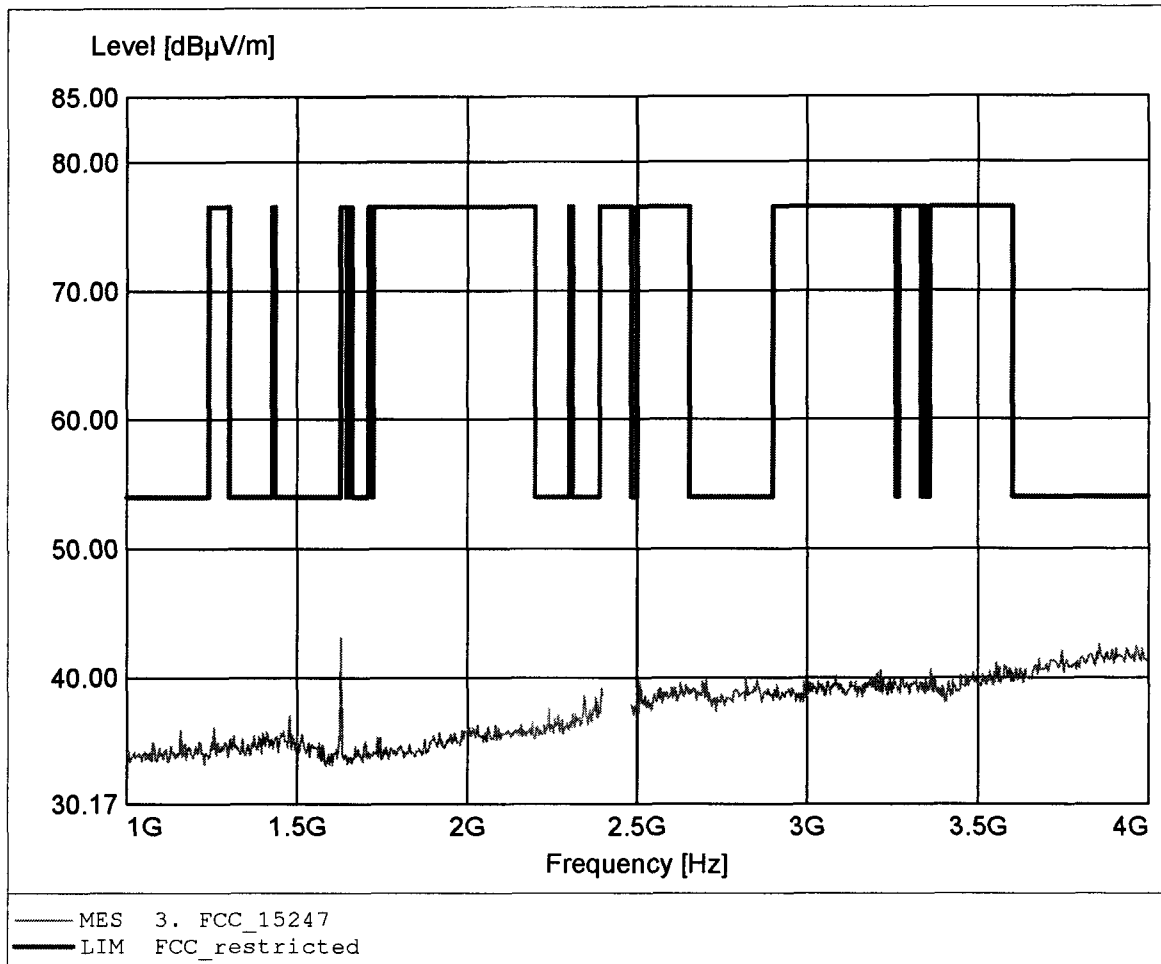

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 44.96dBµV/m, RBW: 1MHz

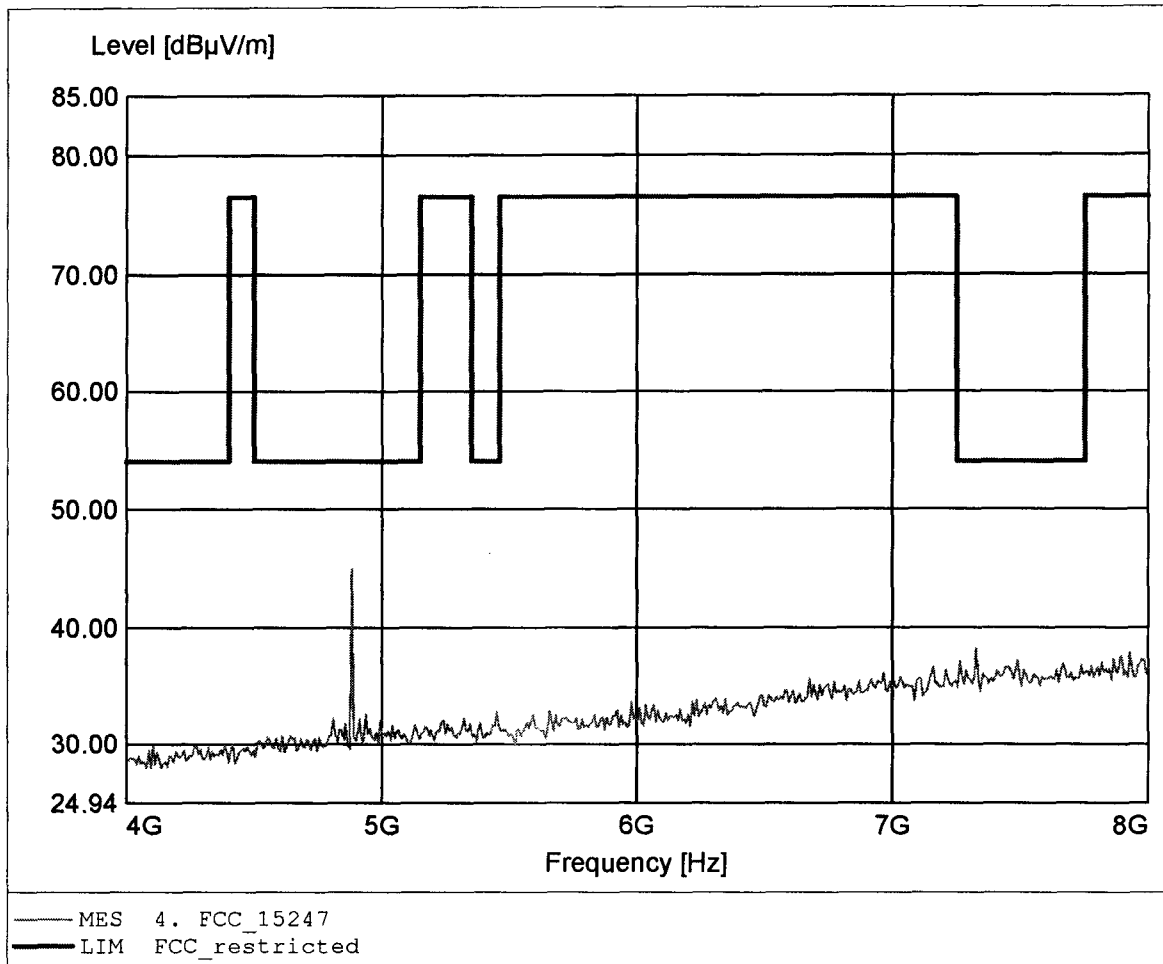

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 51.84dBuV/m, RBW: 1MHz

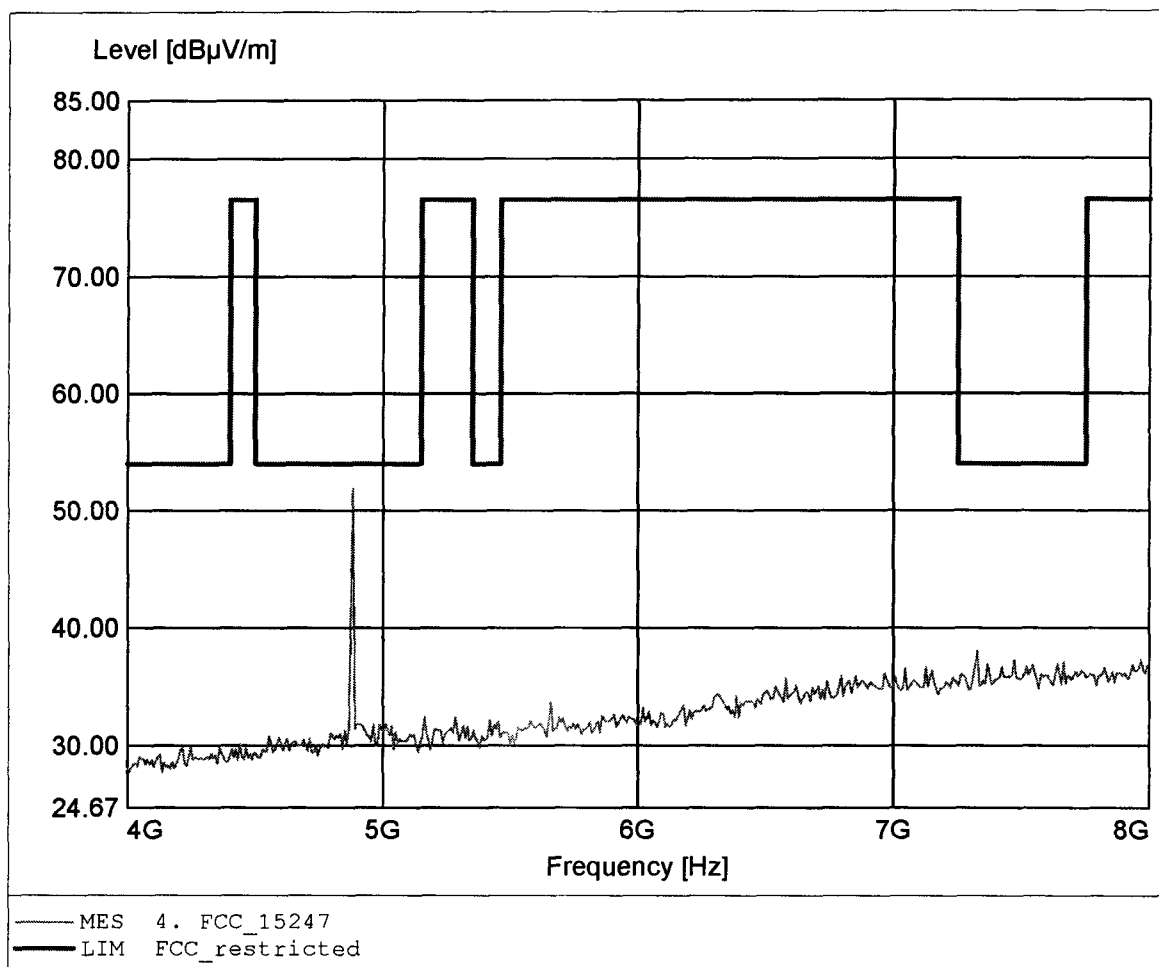

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.495GHz, Emax: 40.83dBµV/m, RBW: 1MHz

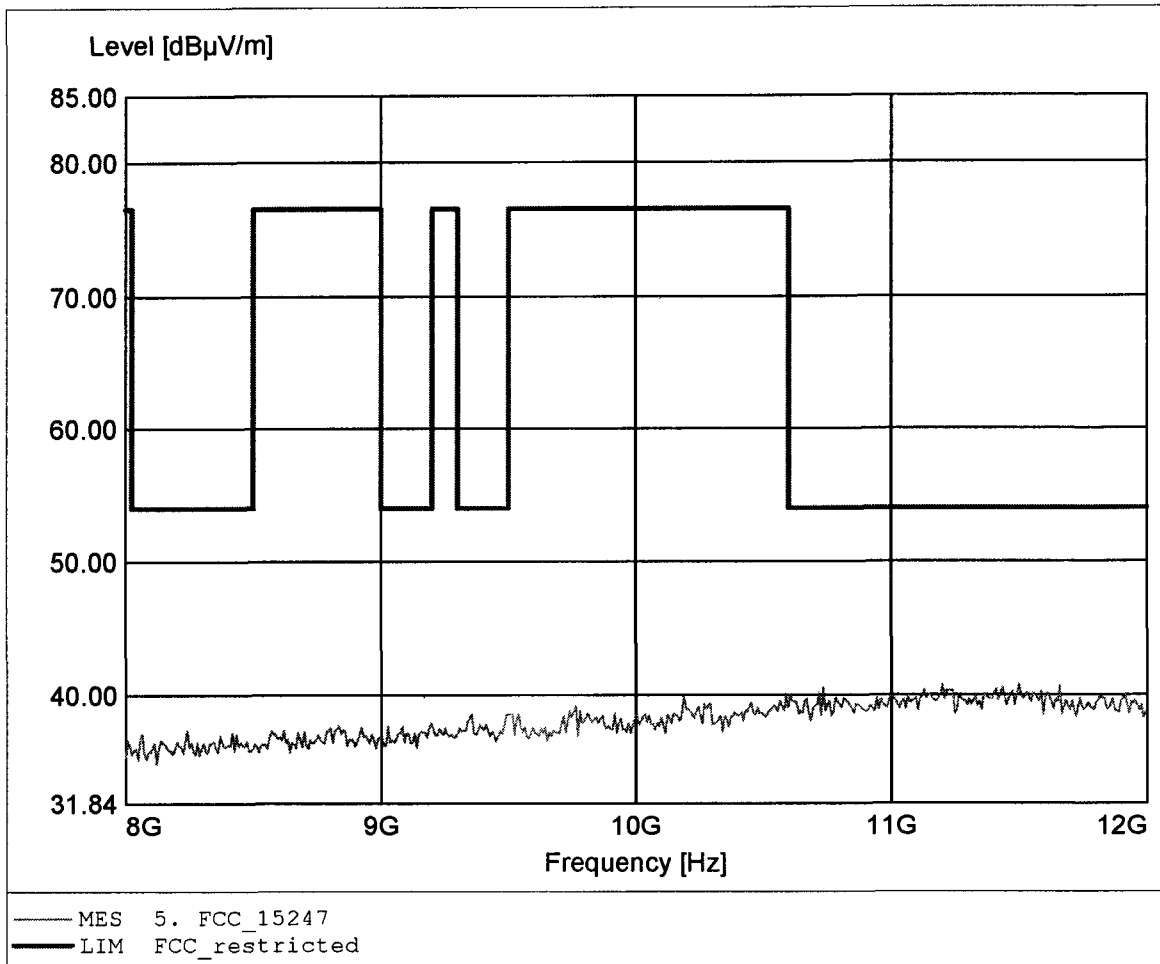

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.471GHz, Emax: 41.16dBµV/m, RBW: 1MHz

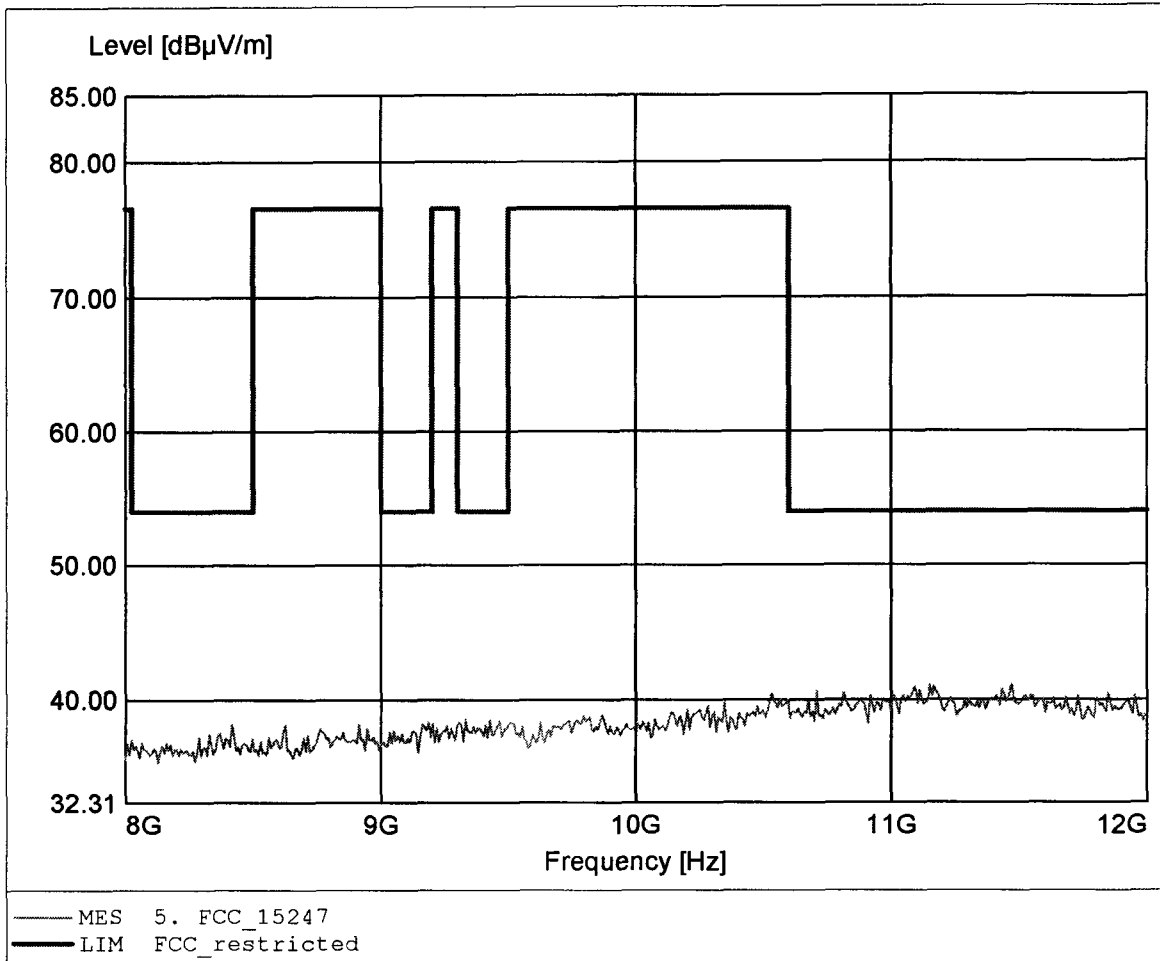

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.305GHz, Emax: 43.82dBµV/m, RBW: 1MHz

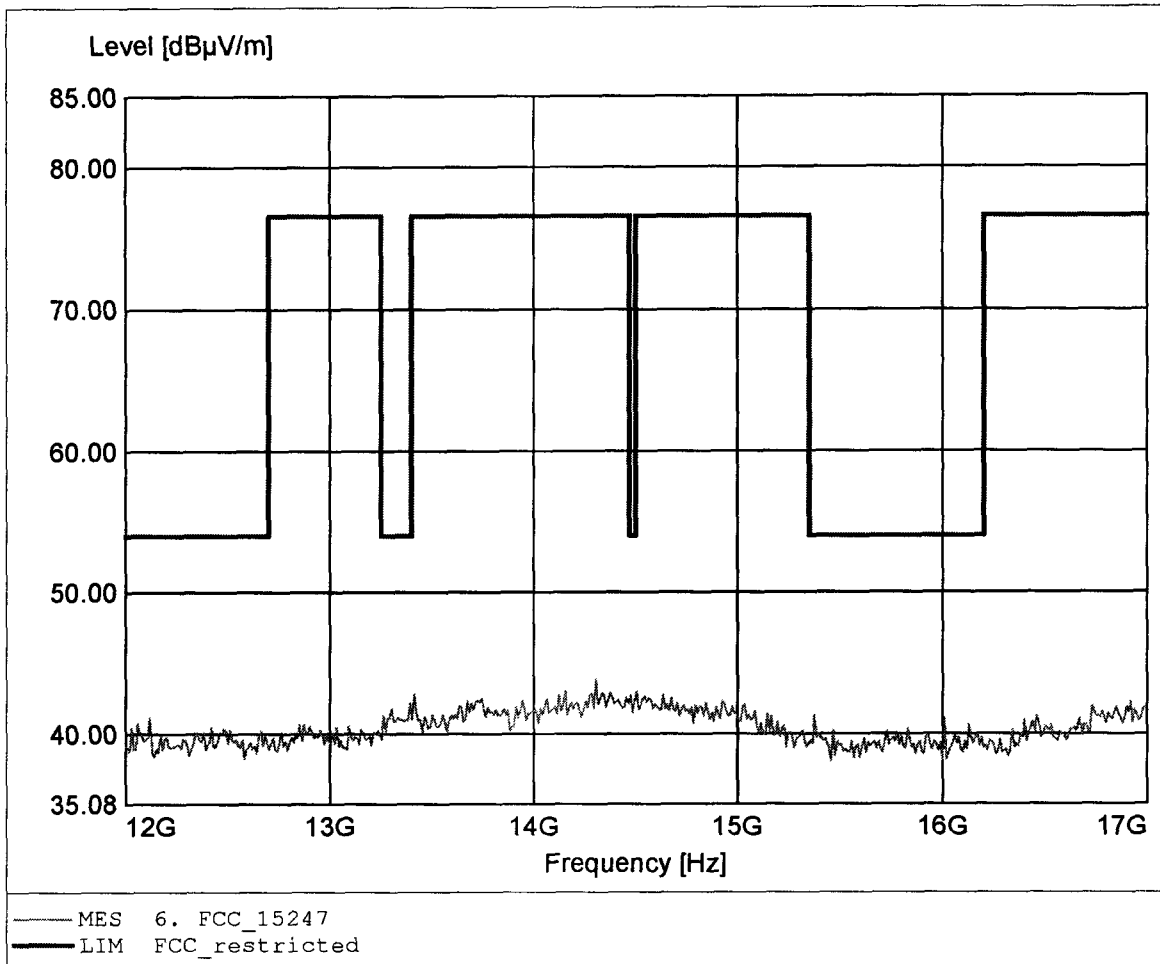

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.144GHz, Emax: 43.25dBµV/m, RBW: 1MHz

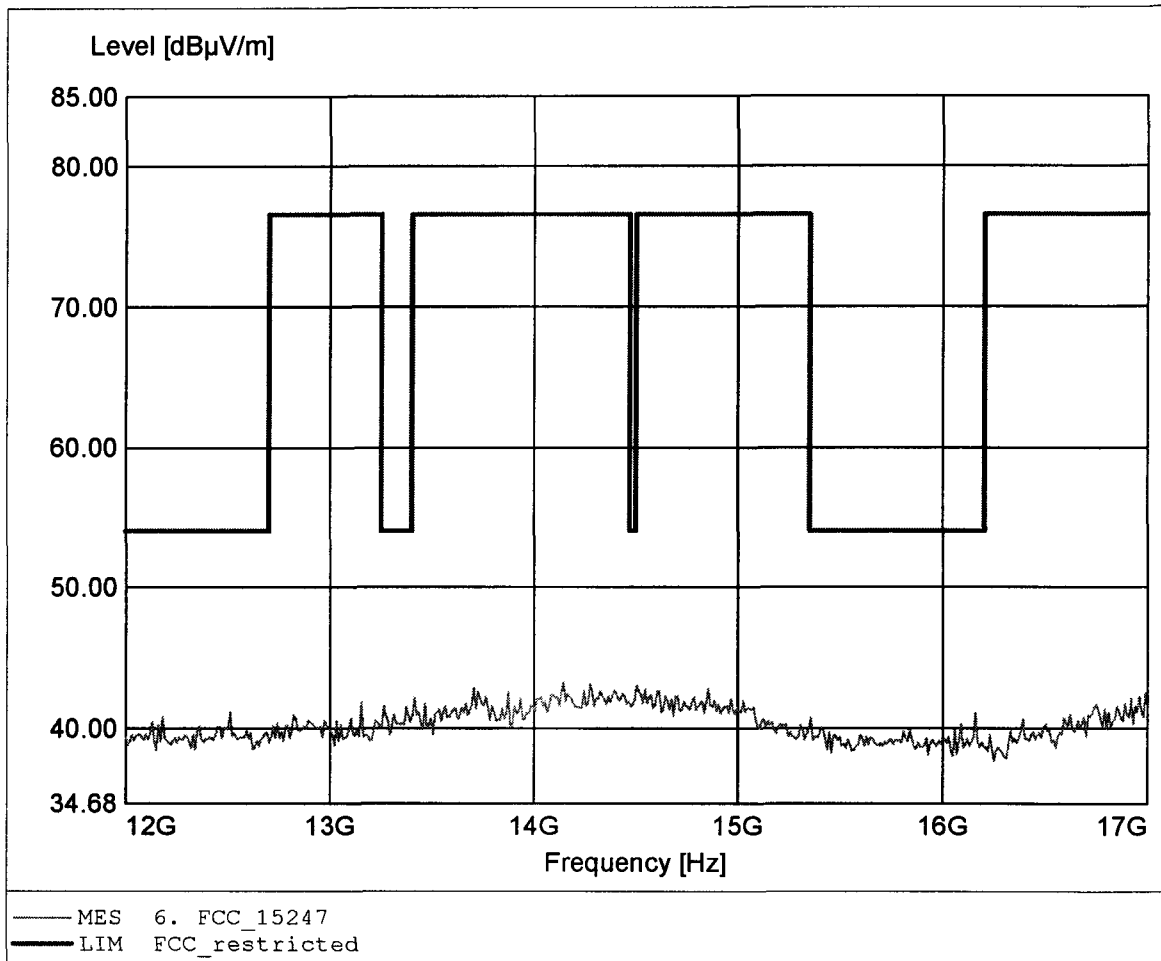

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 44.23dBuV/m, RBW: 1MHz

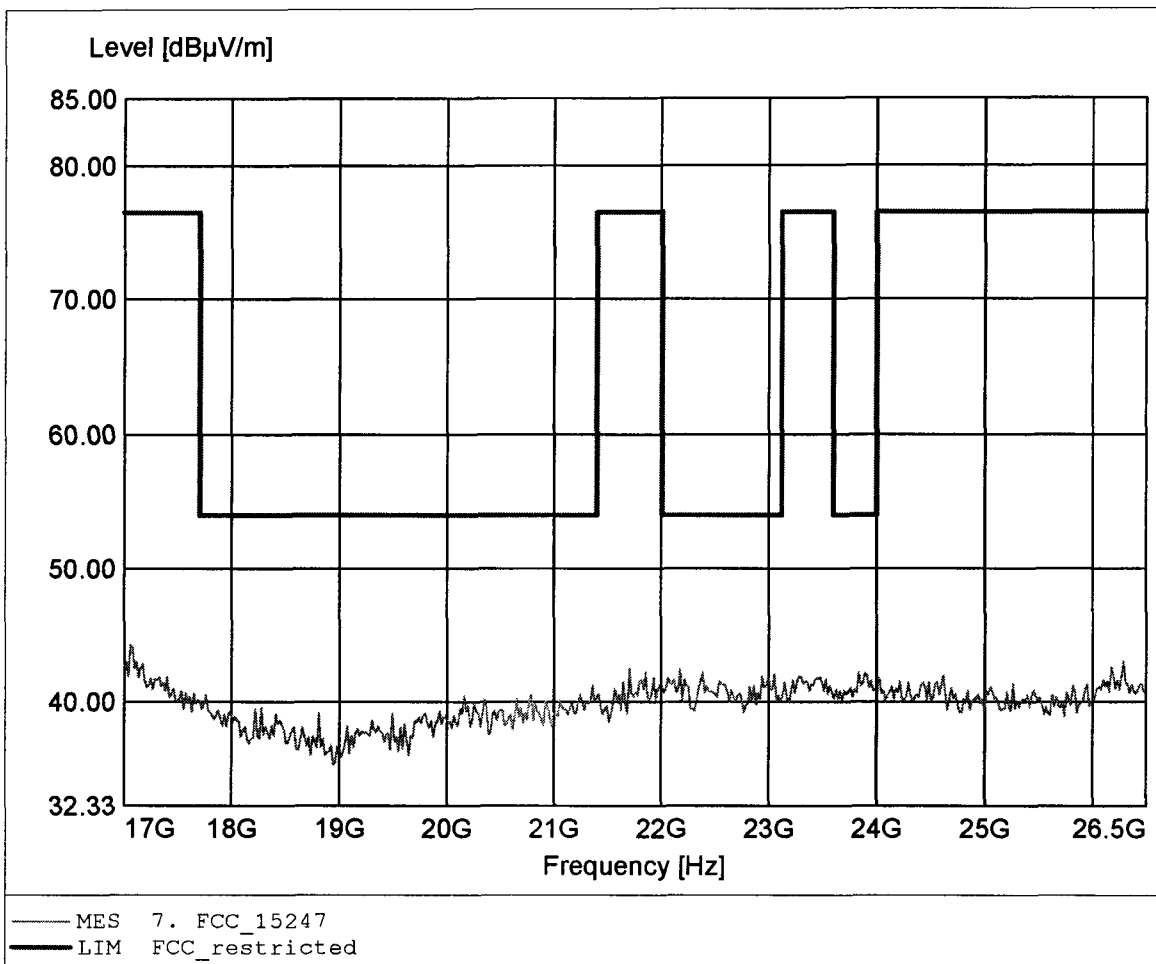

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.228GHz, Emax: 44.21dBuV/m, RBW: 1MHz

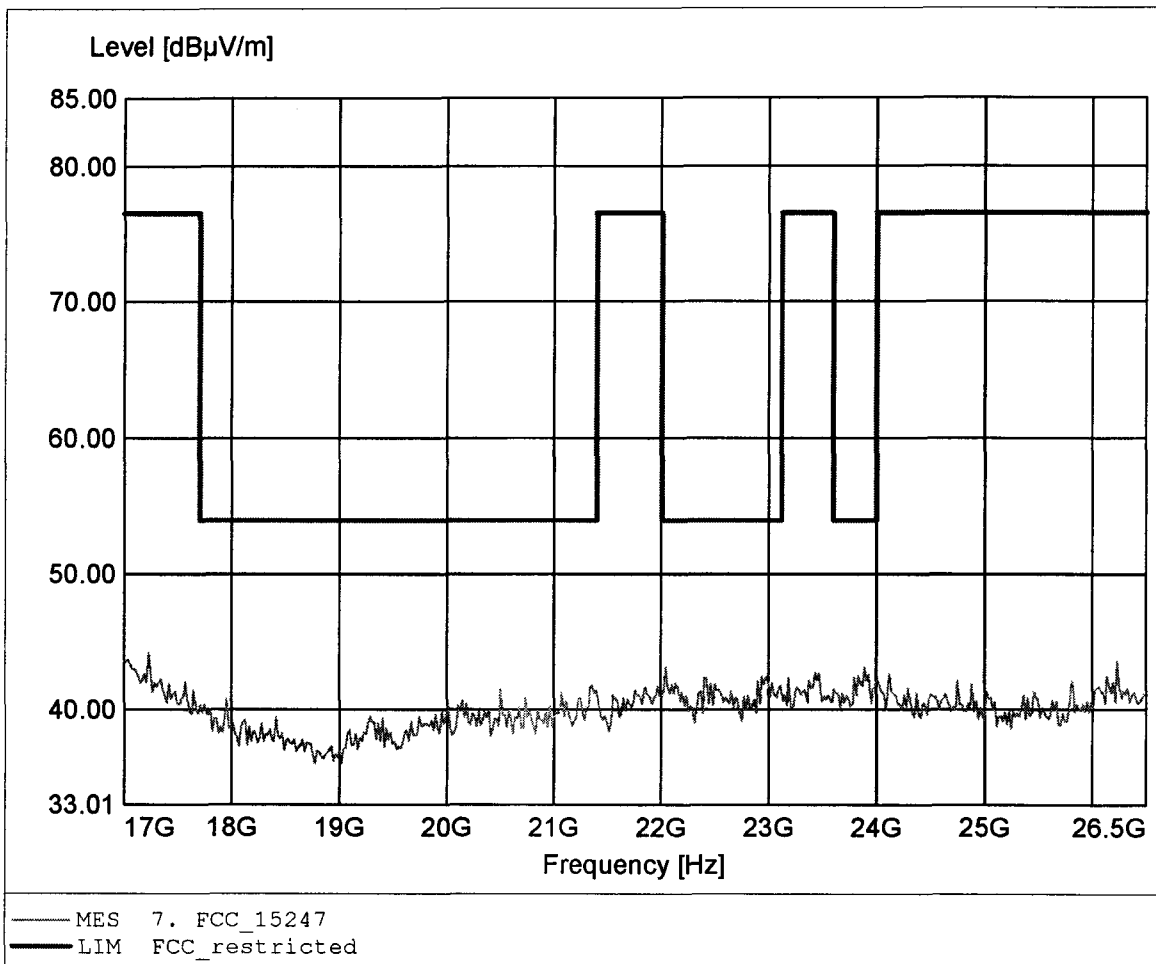

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.098MHz, Emax: 32.73dBµV/m, RBW: 100kHz

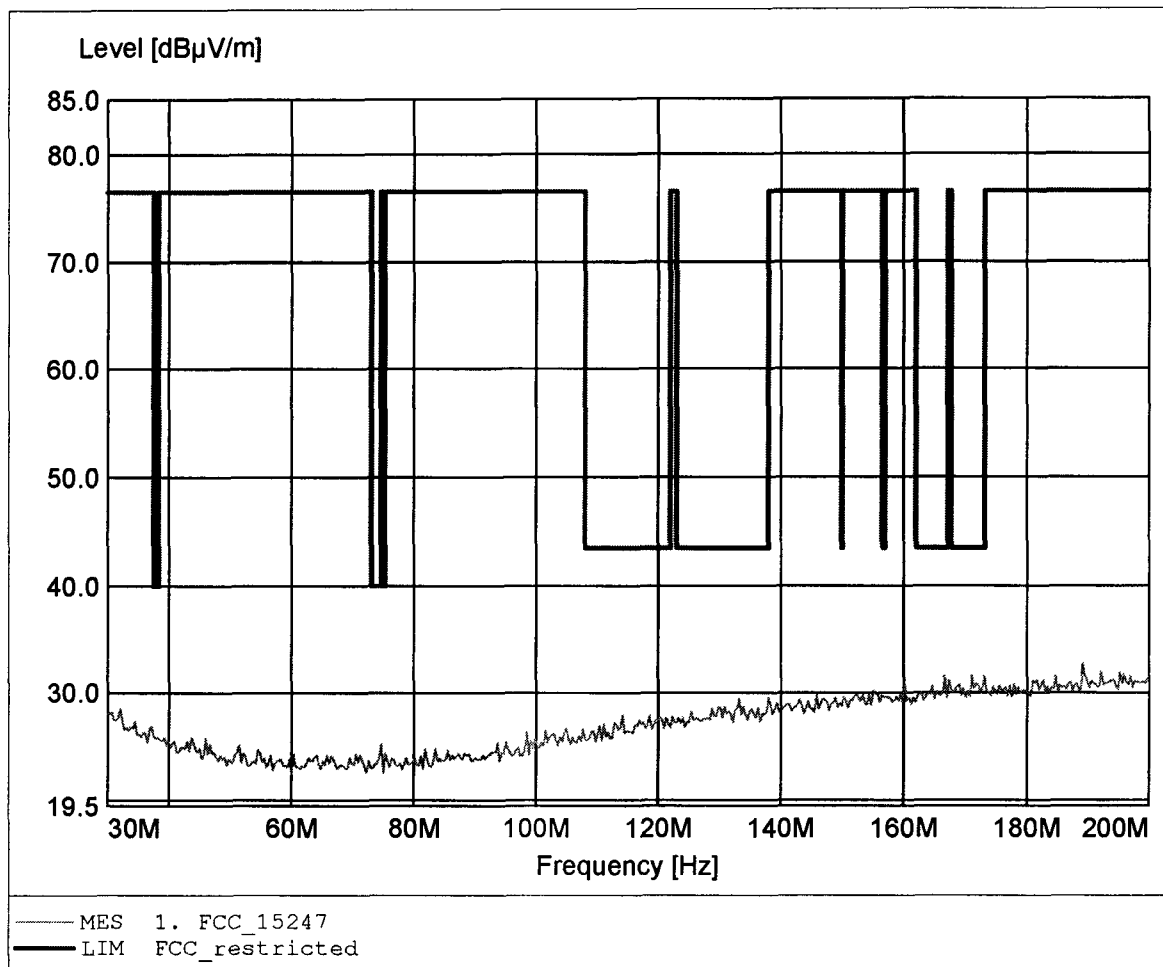

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.461MHz, Emax: 31.98dBµV/m, RBW: 100kHz

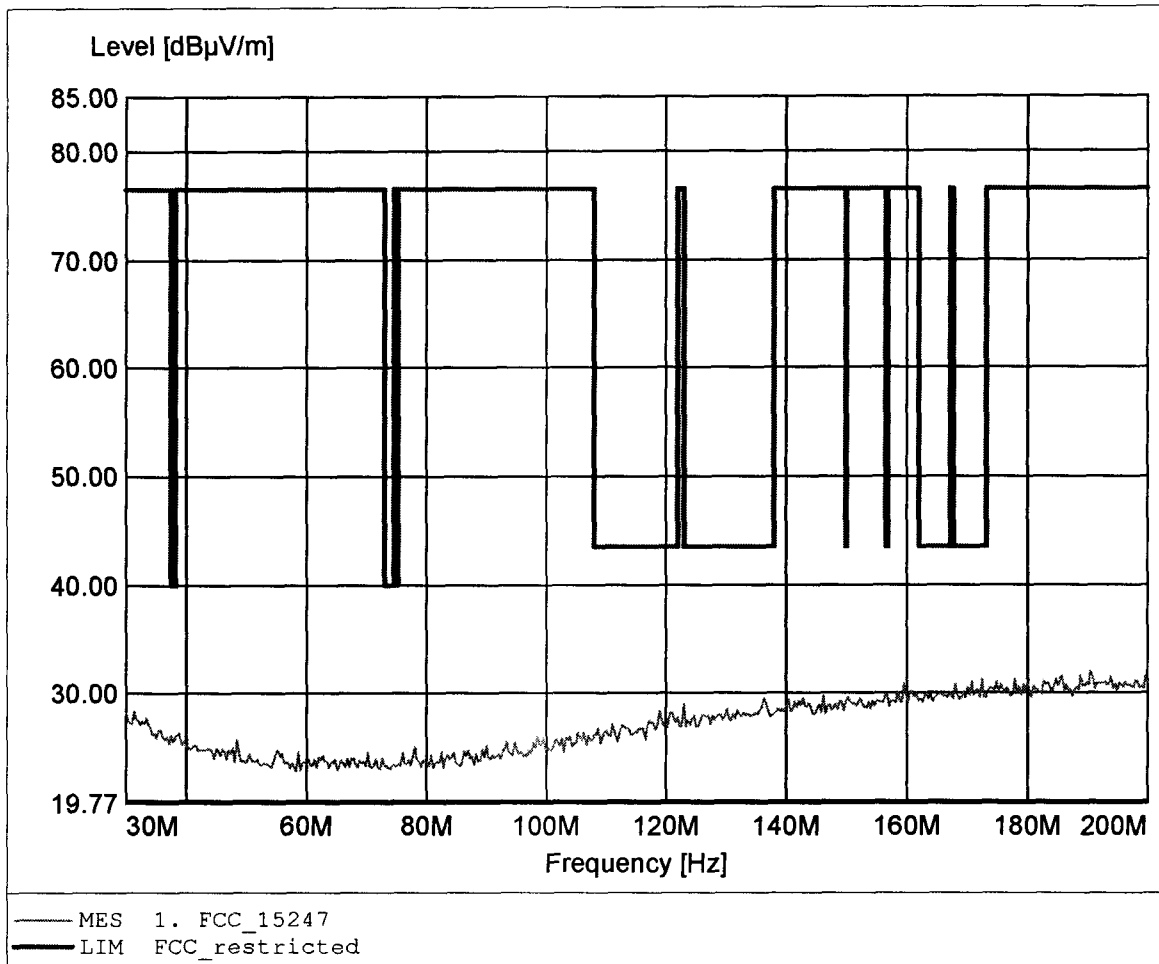

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 988.778MHz, Emax: 20.68dBµV/m, RBW: 100kHz

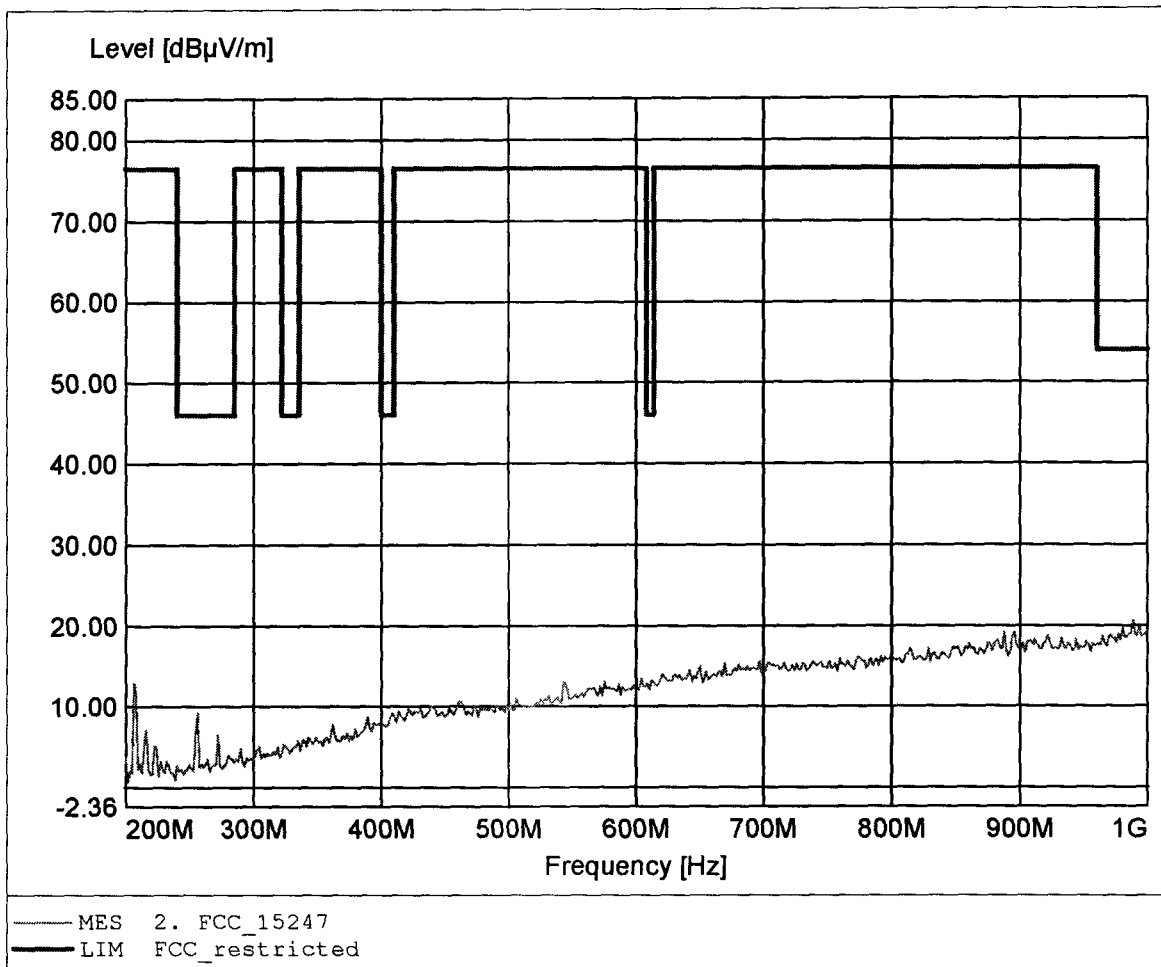

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 19.56dBµV/m, RBW: 100kHz

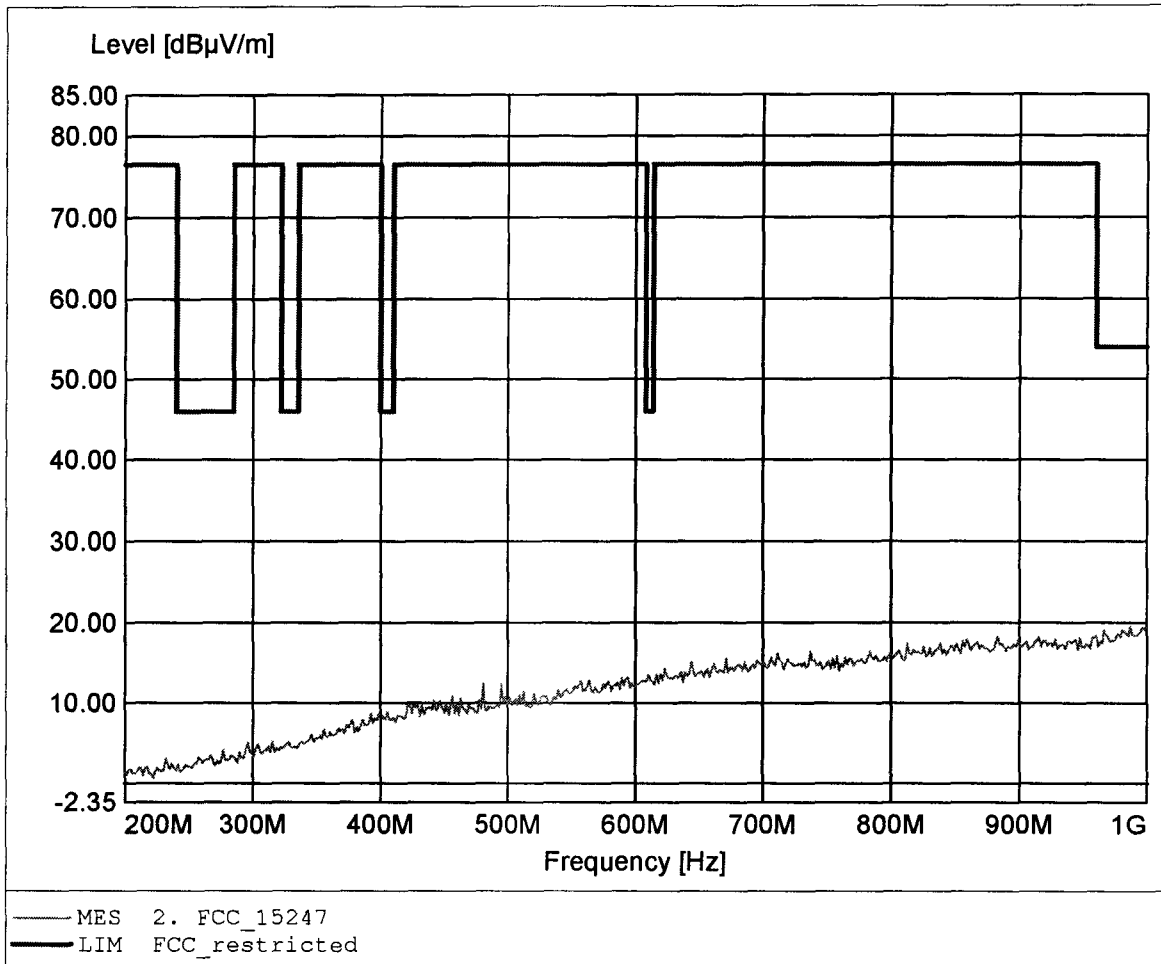

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.654GHz, Emax: 43.10dBµV/m, RBW: 1MHz

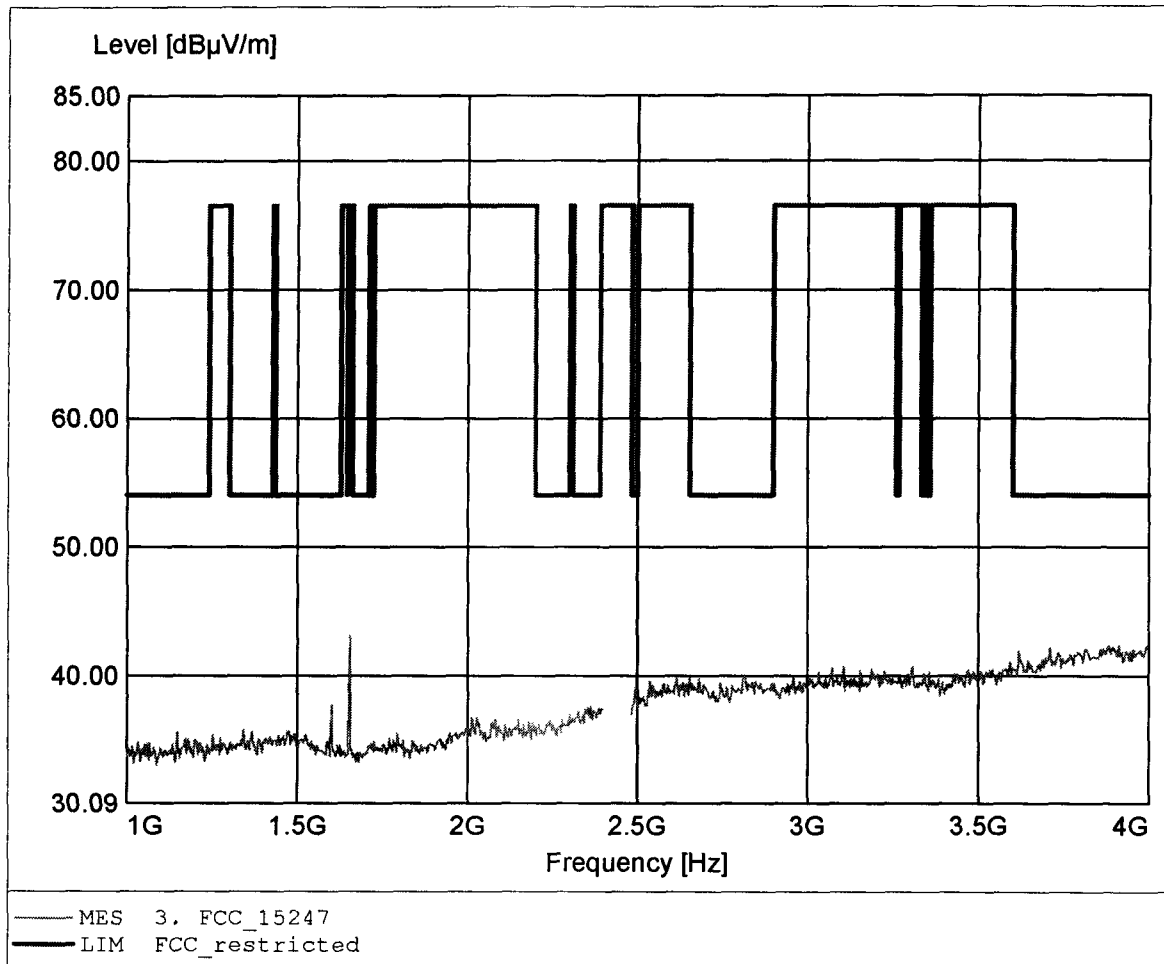

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.909GHz, Emax: 42.74dBµV/m, RBW: 1MHz

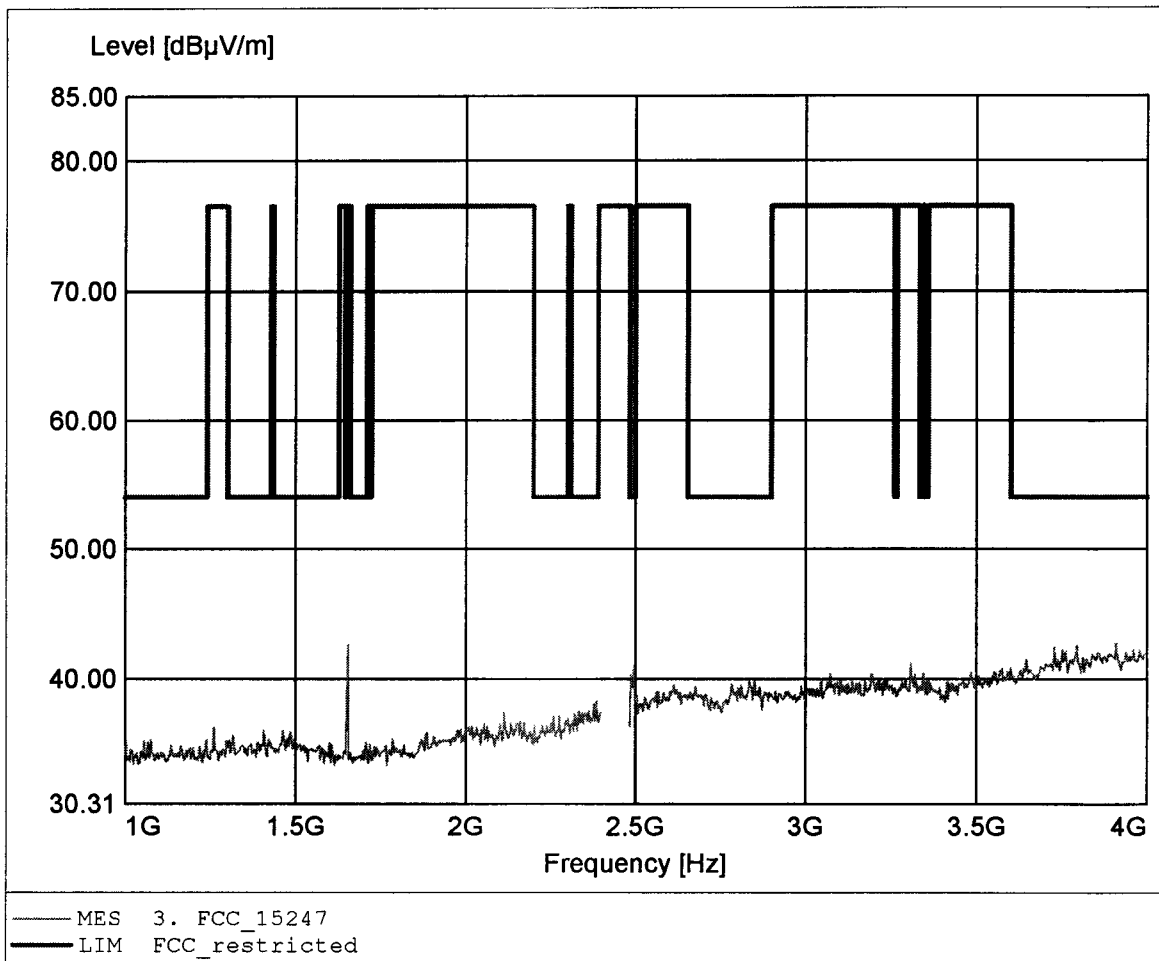

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 43.49dBµV/m, RBW: 1MHz

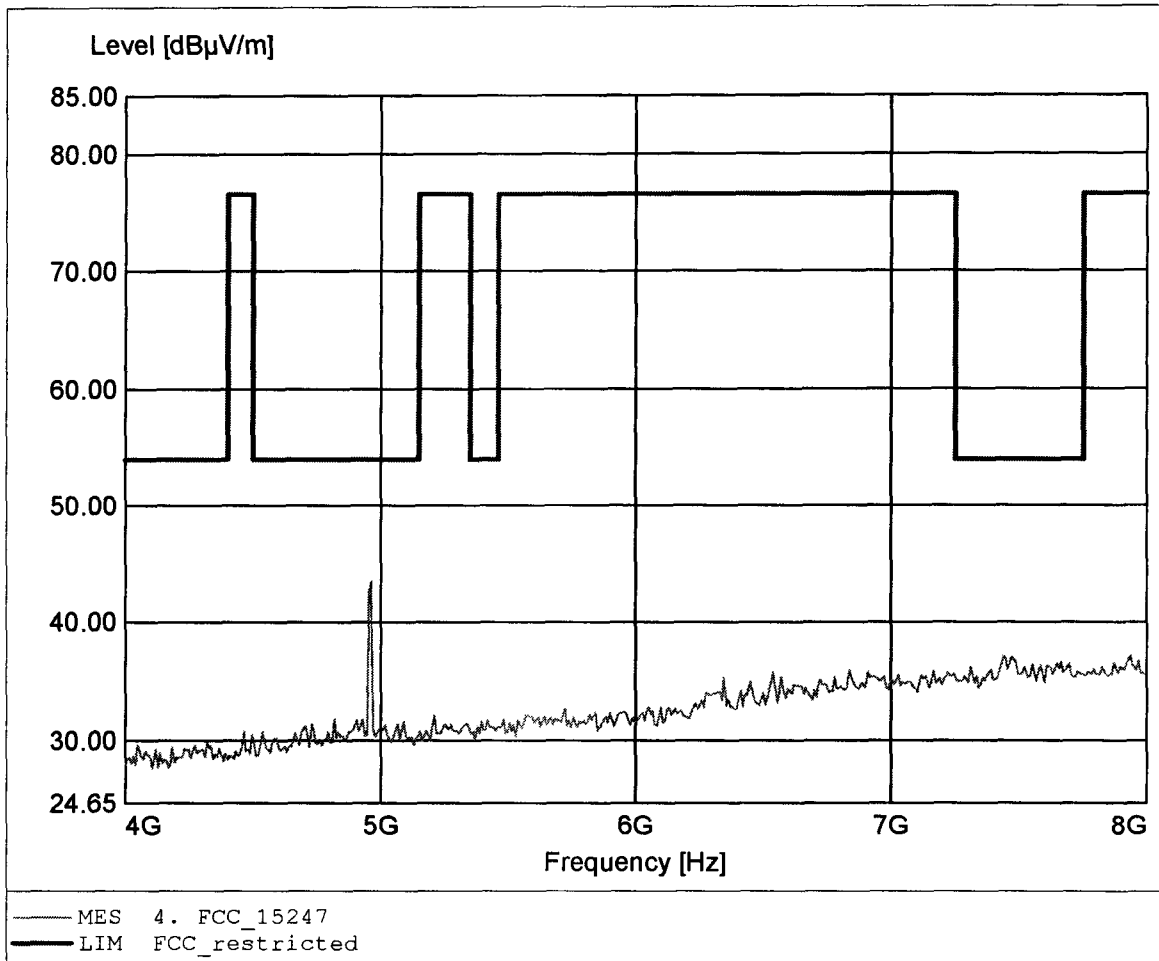

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 47.31dBµV/m, REW: 1MHz

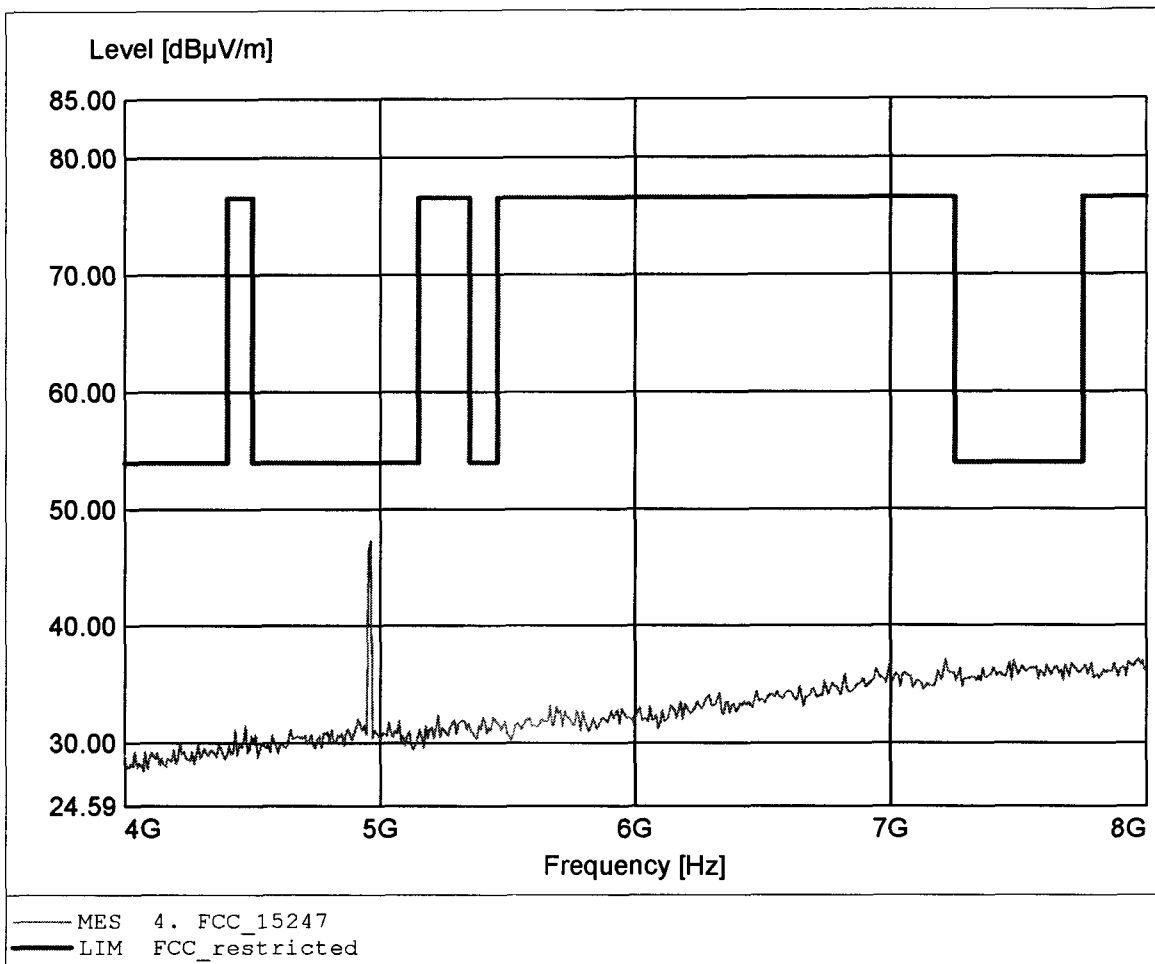

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.062GHz, Emax: 41.27dBµV/m, RBW: 1MHz

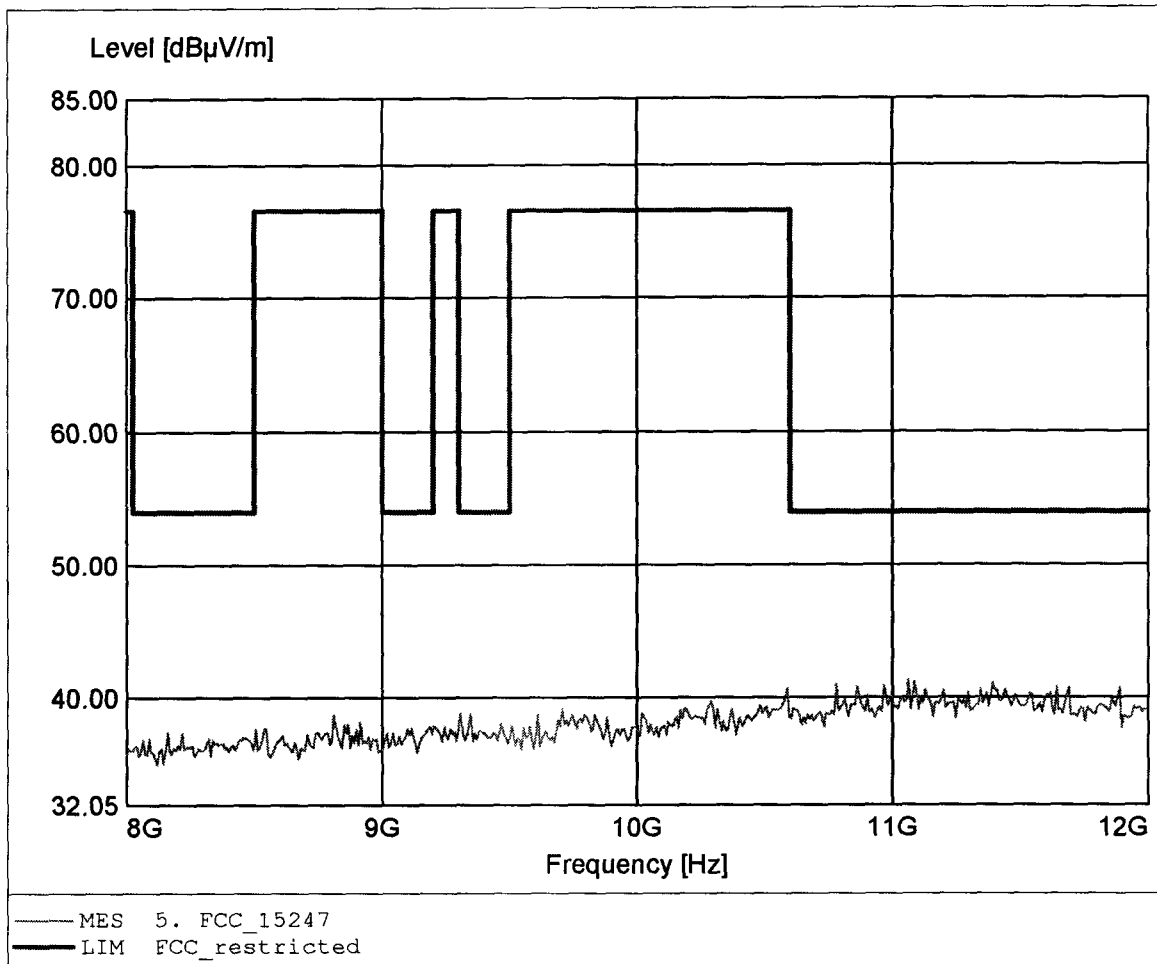

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.439GHz, Emax: 41.62dBuV/m, RBW: 1MHz

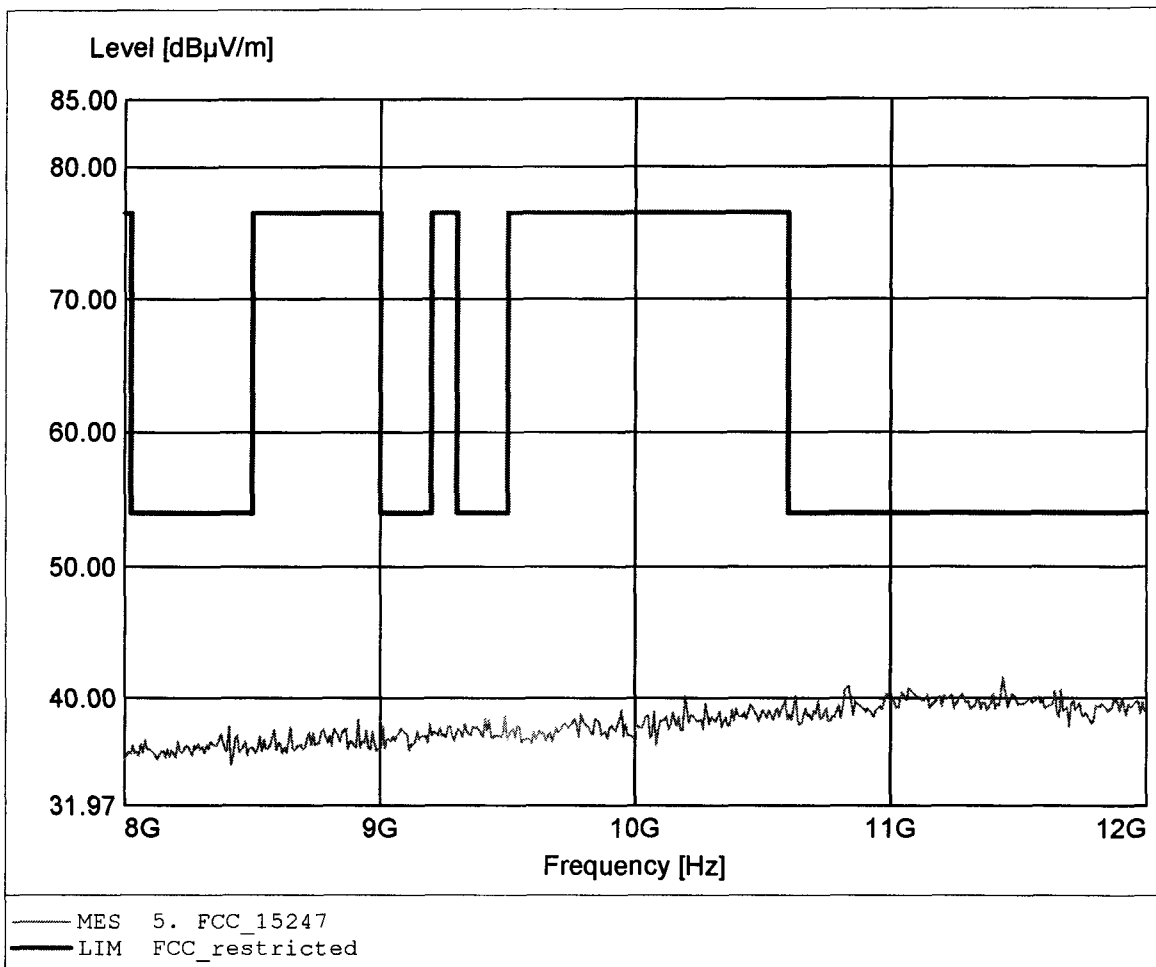

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 43.48dBµV/m, RBW: 1MHz

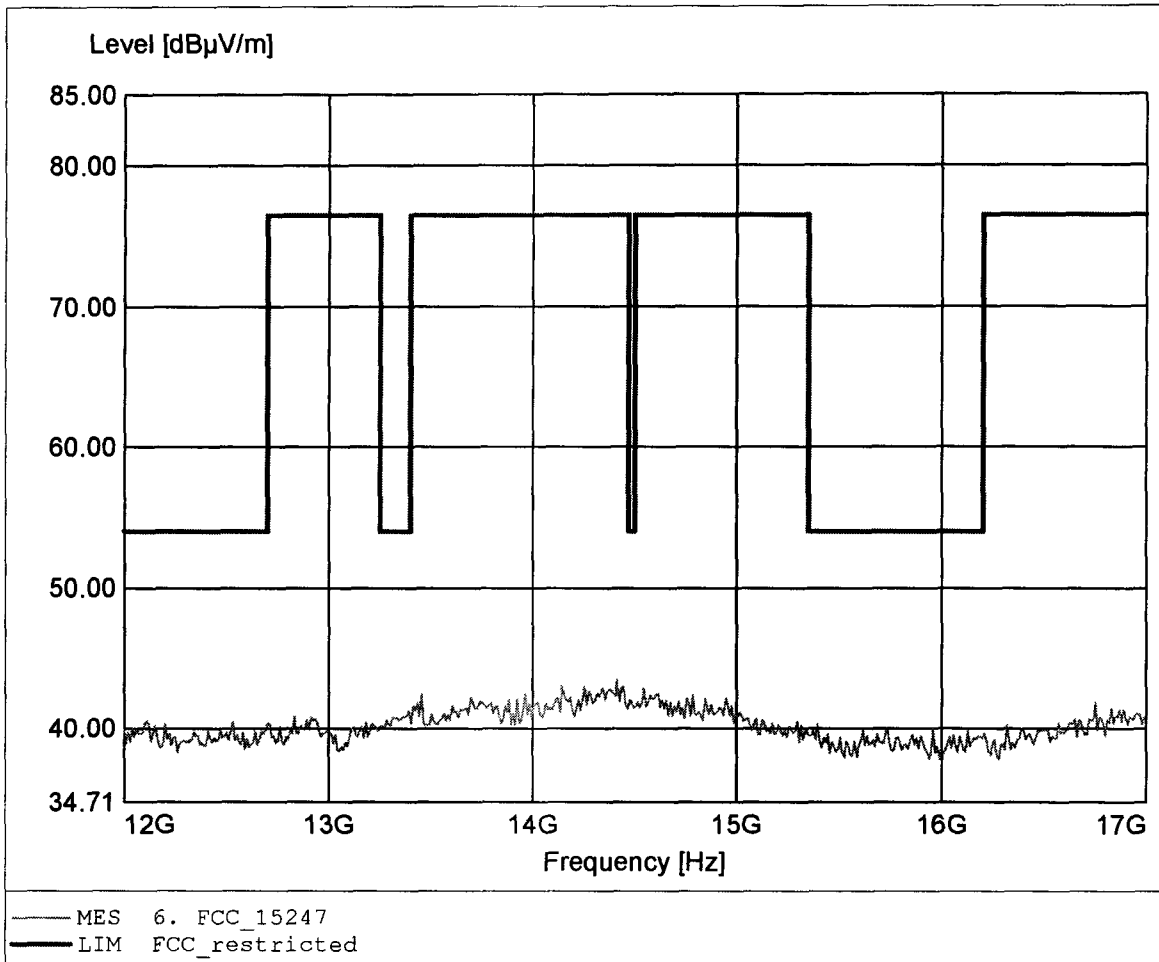

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.285GHz, Emax: 44.36dBµV/m, RBW: 1MHz

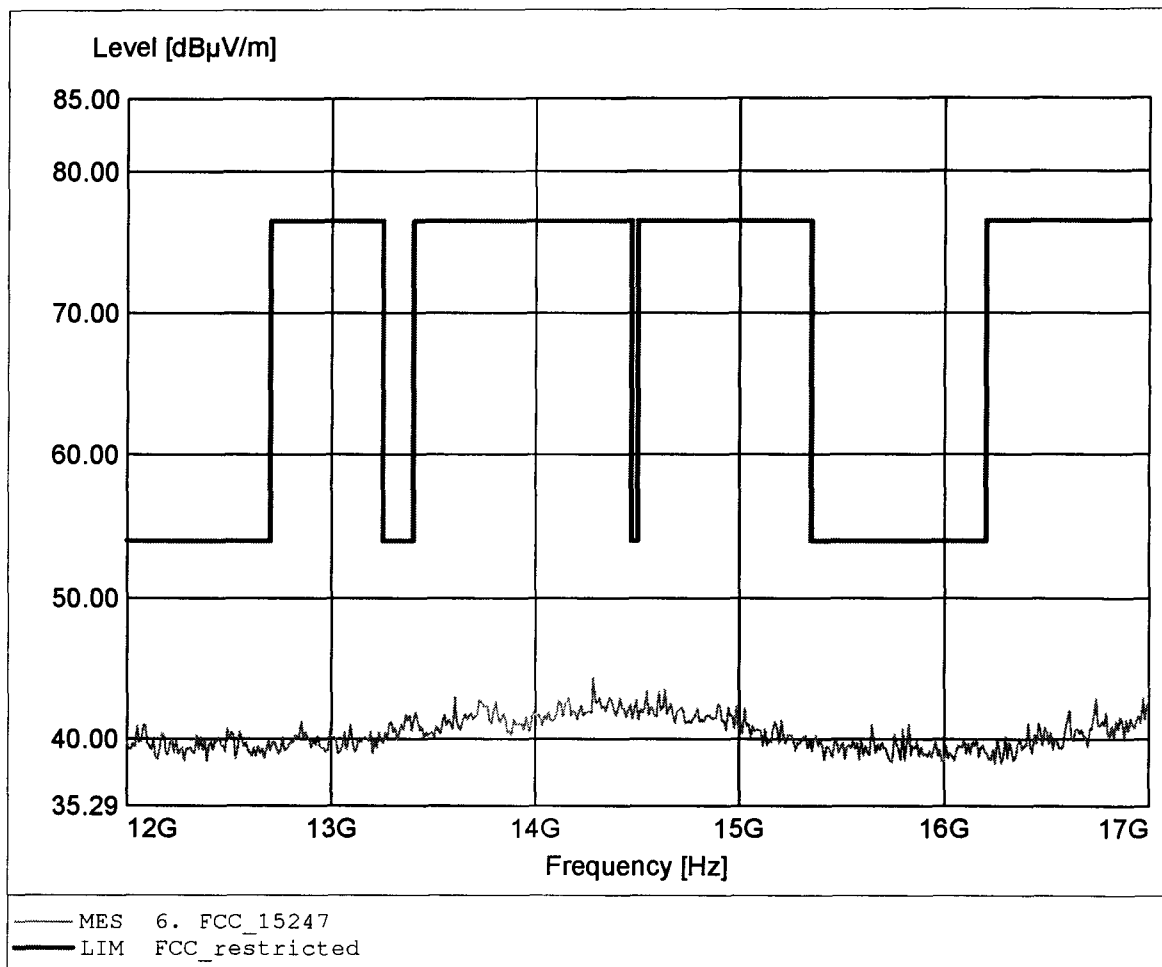

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 43.68dBµV/m, RBW: 1MHz

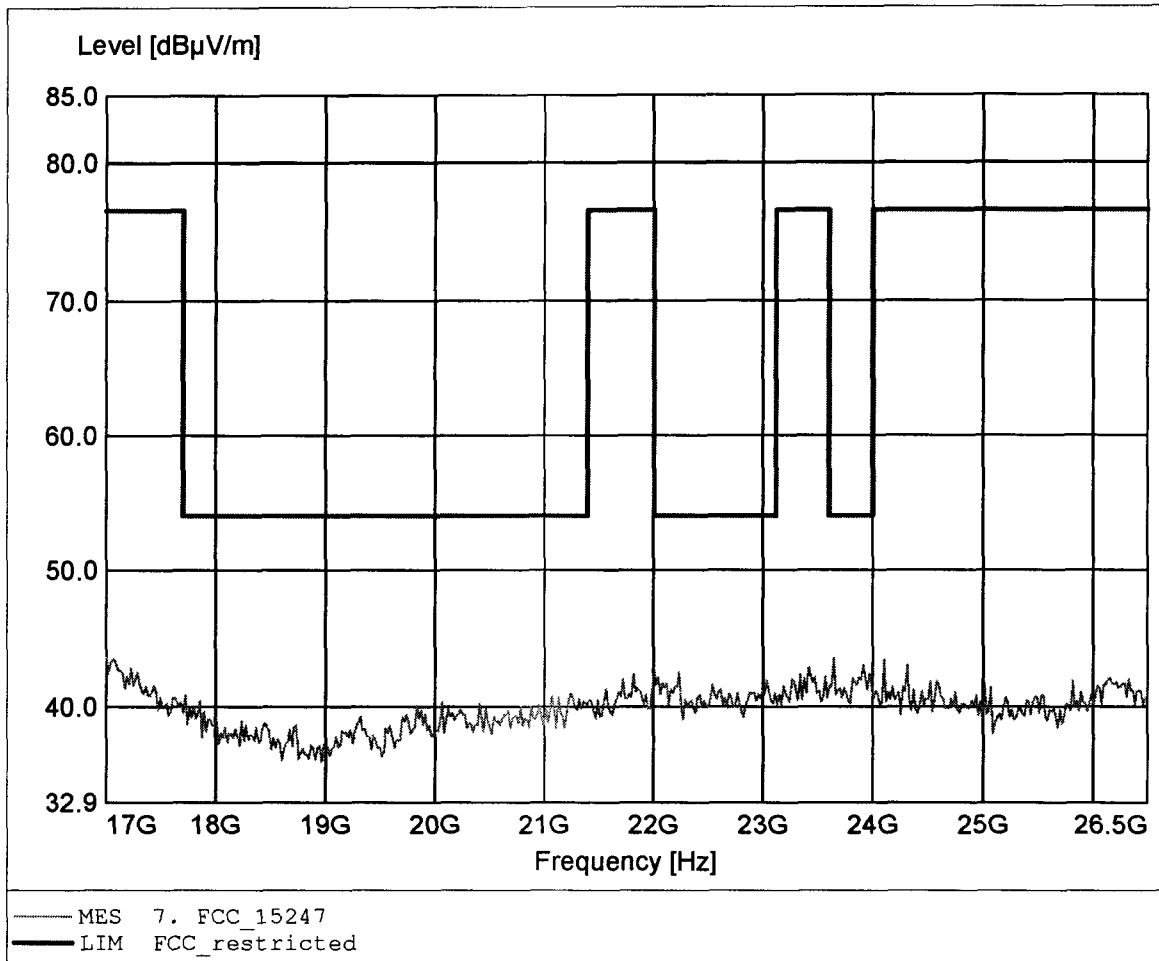

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth office headset and base
Model: GN5300base / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor 7.5 V DC)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 43.34dBµV/m, RBW: 1MHz

