




PCTEST ENGINEERING LABORATORY, INC.

18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctest.com



MEASUREMENT REPORT FCC Part 22, 24, & 27

Applicant Name:
Apple Inc.
1 Infinite Loop
Cupertino, CA 95014
United States

Date of Testing:
6/7-8/18/2017
Test Site/Location:
PCTEST Lab., Morgan Hill, CA, USA
Test Report Serial No.:
1C1706160002-60-02-R4.BCG

FCC ID:	BCG-A1860
APPLICANT:	APPLE INC.

Application Type: Certification
Model: A1860, A1957
EUT Type: Watch
FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)
FCC Rule Part(s): §2, §22(H), §24(E), §27(L)
Test Procedure(s): ANSI/TIA-603-E-2016, KDB 971168 D01 v02r02, KDB 648474 D03 v01r04, KDB 414788 D01 Radiated Test Site v01
Test Device Serial No.: *identical prototype* [S/N: FH7TL01WJ2GQ, FH7TT007J77R]


This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C1706160002-60-02-R4.BCG) supersedes and replaces the previously issued test report (S/N: 1C1706160002-60-02-R3.BCG) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



 Randy Ortanez
 President




FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch
		Page 1 of 60

T A B L E O F C O N T E N T S


FCC PART 22, 24, & 27 MEASUREMENT REPORT		3
1.0 INTRODUCTION		5
1.1 Scope		5
1.2 Testing Facility		5
2.0 PRODUCT INFORMATION		6
2.1 Equipment Description		6
2.2 Device Capabilities		6
2.3 Antenna Configuration		6
2.4 Test Support Equipment		6
2.5 Test Configuration		7
2.6 Software and Firmware		7
2.7 EMI Suppression Device(s)/Modifications		7
3.0 DESCRIPTION OF TESTS		8
3.1 Evaluation Procedure		8
3.2 Cellular - Base Frequency Blocks		8
3.3 Cellular - Mobile Frequency Blocks		8
3.4 PCS - Base Frequency Blocks		8
3.5 PCS - Mobile Frequency Blocks		9
3.6 AWS - Base Frequency Blocks		9
3.7 AWS - Mobile Frequency Blocks		9
3.8 Radiated Measurements		10
4.0 MEASUREMENT UNCERTAINTY		11
5.0 TEST EQUIPMENT CALIBRATION DATA		12
6.0 SAMPLE CALCULATIONS		13
7.0 TEST RESULTS		14
7.1 Summary		14
7.2 Occupied Bandwidth		15
7.3 Spurious and Harmonic Emissions at Antenna Terminal		18
7.4 Band Edge Emissions at Antenna Terminal		33
7.5 Peak-Average Ratio		39
7.6 ERP/EIRP		42
7.7 Radiated Spurious Emissions Measurements – Above 1 GHz		45
7.8 Radiated Spurious Emissions Measurements – Below 1 GHz		50
7.9 Frequency Stability / Temperature Variation		53
8.0 CONCLUSION		60

FCC ID: BCG-A1860		FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 2 of 60



MEASUREMENT REPORT

FCC Part 22, 24, & 27




§2.1033 General Information


APPLICANT: Apple Inc.
APPLICANT ADDRESS: 1 Infinite Loop
 Cupertino, CA 95014, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 18855 Adams Court, Morgan Hill, CA 95037 USA
FCC RULE PART(S): §2 §22(H) §24(E) §27(L)
BASE MODEL: A1860, A1957
FCC ID: BCG-A1860
FCC CLASSIFICATION: PCS Licensed Transmitter Worn on Body (PCT)
MODE: WCDMA
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: FH7TL01WJ2GQ, Production Pre-Production Engineering
 FH7TT007J77R
DATE(S) OF TEST: 6/7-8/18/2017
TEST REPORT S/N: 1C1706160002-60-02-R4.BCG

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.


- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017 EUT Type: Watch	Page 3 of 60




MEASUREMENT REPORT

FCC Part 22, 24, & 27



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP/EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	
WCDMA850	22H	826.4 - 846.6	0.0011	0.59	4M15F9W
WCDMA1700	27	1712.4 - 1752.6	0.0134	11.27	4M15F9W
WCDMA1900	24E	1852.4 - 1907.6	0.0157	11.96	4M16F9W

EUT Overview

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 4 of 60


1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science, and Economic Development Canada.

1.2 Testing Facility

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 5 of 60

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A1860**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters. According to the manufacturer, models A1860 and A1957 are electrically identical. Model A1860 was used for final testing.

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE), NFC

2.3 Antenna Configuration

The following antenna gains were used for the testing.


Frequency (MHz)	Antenna Gain (dBi)
824 - 849	-21.75
1710 - 1755	-13.11
1850 - 1915	-12.45

Table 2-1. Peak Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook	Model:	A1502	S/N:	C02NQ01YG465
	w/ AC/DC Adapter	Model:	A1435	S/N:	C04325505K1F288BG
2	Apple USB Cable	Model:	Kanzi	S/N:	20153D
	w/ Charging Dock	Model:	FAPS61	S/N:	6304000736
	w/ Dock	Model:	X241	S/N:	SJH3002AP2AS
3	USB Cable	Model:	N/A	S/N:	N/A
			Shielded USB Cable		
4	w/ AC Adapter	Model:	B353	S/N:	N/A
5	Test Pathfinder Board	Model:	X988	S/N:	FGH7648700BDHMV323
6	Wireless Charging Pad (WCP)	Model:	A1598	FCC ID:	BCGA1598

Table 2-2. Test Support Equipment Used

FCC ID: BCG-A1860		FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 6 of 60

2.5 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests. This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emissions measurements were performed with the EUT on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

The worst case configuration was investigated for all combinations of the three materials, aluminum, ceramic, and stainless steel, and various types of wristbands, metal and non-metal wrist bands. The store display sample was investigated with the three types of EUTs. The EUT was also investigated with and without wireless charger.

The worst case configuration found was used for all testing. The worst case material was aluminum. The worst case accessory was metal wristband but no significant difference was found between various types of wrist bands.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report. The worst orientation was found to be X-orientation (flatbed).

2.6 Software and Firmware

The test was conducted with firmware version 15R328 installed on the EUT.

For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 7 of 60

3.0 DESCRIPTION OF TESTS


3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v02r02) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

§22.905

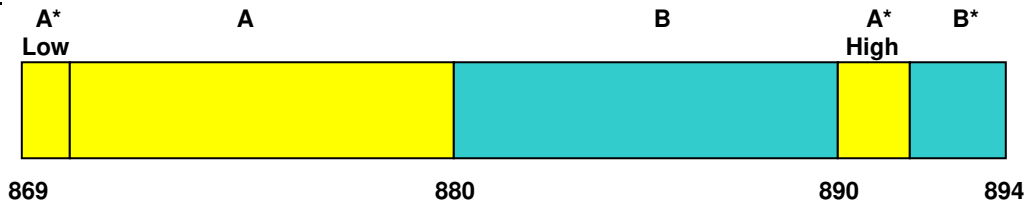

BLOCK 1: 869 – 880 MHz (A* Low + A)


BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

§22.905

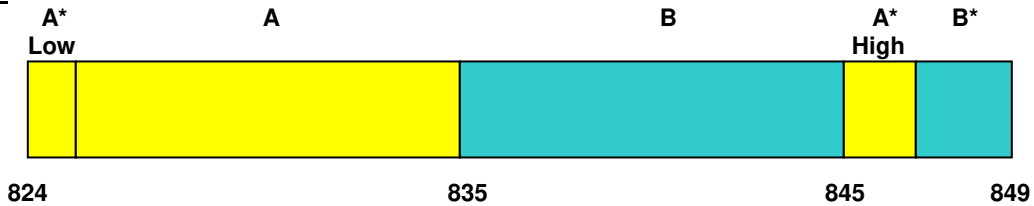

BLOCK 1: 824 – 835 MHz (A* Low + A)


BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

§24.229

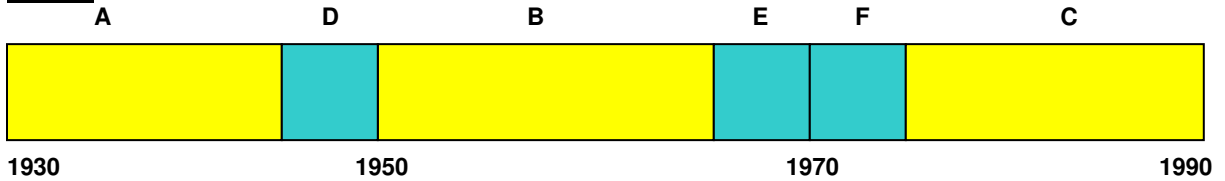

BLOCK 1: 1930 – 1945 MHz (A)


BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 8 of 60

3.5 PCS - Mobile Frequency Blocks

§24.229

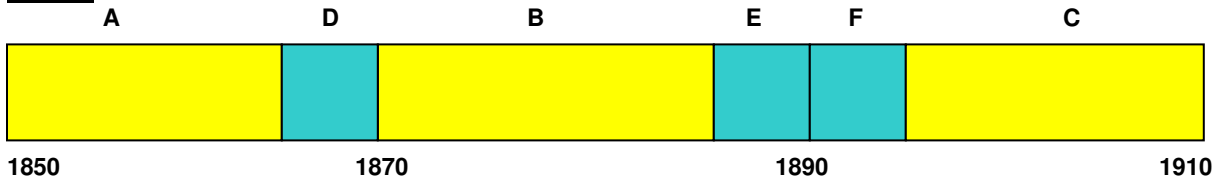

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)


BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.6 AWS - Base Frequency Blocks

§27.5(h)

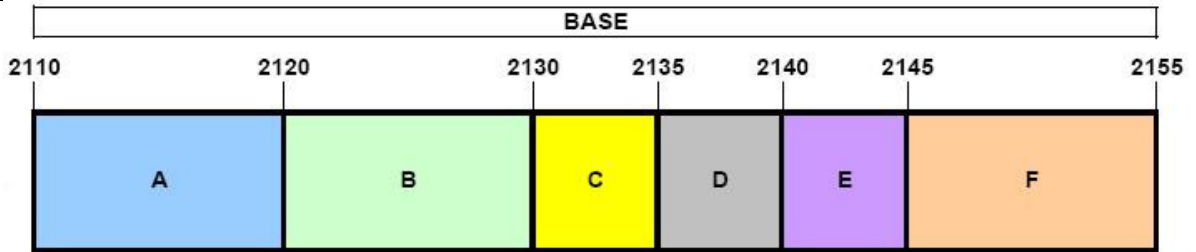

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)

BLOCK 2: 2120 – 2130 MHz (B)


BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

3.7 AWS - Mobile Frequency Blocks

§27.5(h)

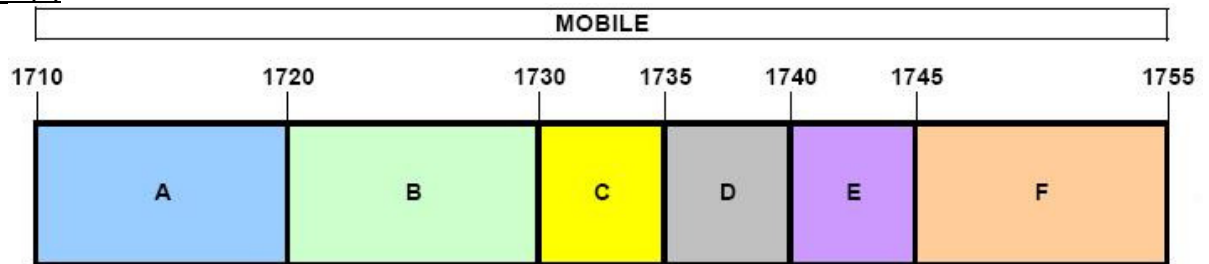

BLOCK 1: 1710 – 1720 MHz (A)


BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 9 of 60

3.8 Radiated Measurements

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(d)(4) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high Styrodur Plastic Test Table is placed on top of the turntable.


The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.


Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 10 of 60

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09


FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 11 of 60

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AMLTx1	Licensed Transmitter Cable Set	3/17/2017	Annual	3/17/2018	AMLTX1
-	EMI 3117-ESW1	Radiated Cable Set	3/1/2017	Biennial	3/1/2018	N/A
-	EMI HL562E-ESW1	Radiated Cable Set	2/28/2017	Biennial	2/28/2018	N/A
ESPEC	SU-241	Temperature Chamber	3/10/2017	Annual	3/10/2018	92009574
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2017	Annual	3/13/2018	MY49430244
Pasternack	NC100	Torque Wrench	8/21/2015	Biennial	8/21/2017	81968
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/10/2017	Annual	1/10/2018	161675
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	5/8/2017	Annual	5/8/2018	161616-DF
Rohde & Schwarz	ESW26	ESW26 EMI Test Receiver	1/20/2017	Annual	1/20/2018	101299
Rohde & Schwarz	HL562E	Bi-Log Antenna (30MHz - 6GHz)	1/19/2017	Annual	1/19/2018	100610
Rohde & Schwarz	OSP130	Open Switch and Control Unit	1/18/2017	Annual	1/18/2018	100970
Rohde & Schwarz	SFUNIT-RX	TS-SFUNIT SHIELDED FILTER UNIT	2/3/2017	Annual	2/3/2018	102131
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	2/3/2017	Annual	2/3/2018	102325
Rohde & Schwarz	TC-TA18	CROSS POL. VIVALDI ANT (400MHz - 18GHz)	11/8/2016	Annual	11/8/2017	101056-AE

Table 5-1. Test Equipment

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 12 of 60

6.0 SAMPLE CALCULATIONS

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation


9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 13 of 60

7.0 TEST RESULTS

7.1 Summary


Company Name: Apple Inc.
 FCC ID: BCG-A1860
 FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)
 Mode(s): WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051, 22.917(a), 24.238(a), 27.53(h)	Conducted Band Edge / Spurious Emissions	$> 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
22.913(a.2)	Effective Radiated Power	< 7 Watts Max. ERP		PASS	Section 7.6
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d.4)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1055, 22.355, 24.235, 27.54	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)	RADIATED	PASS	Section 7.9
2.1053, 22.917(a), 24.238(a), 27.53(h)	Radiated Spurious Emissions	$> 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 7.7, 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.9.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 14 of 60

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


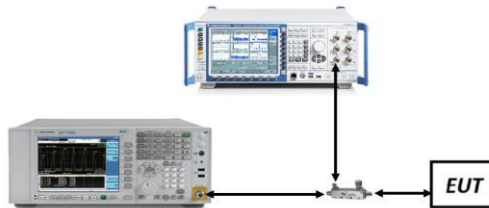


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 15 of 60

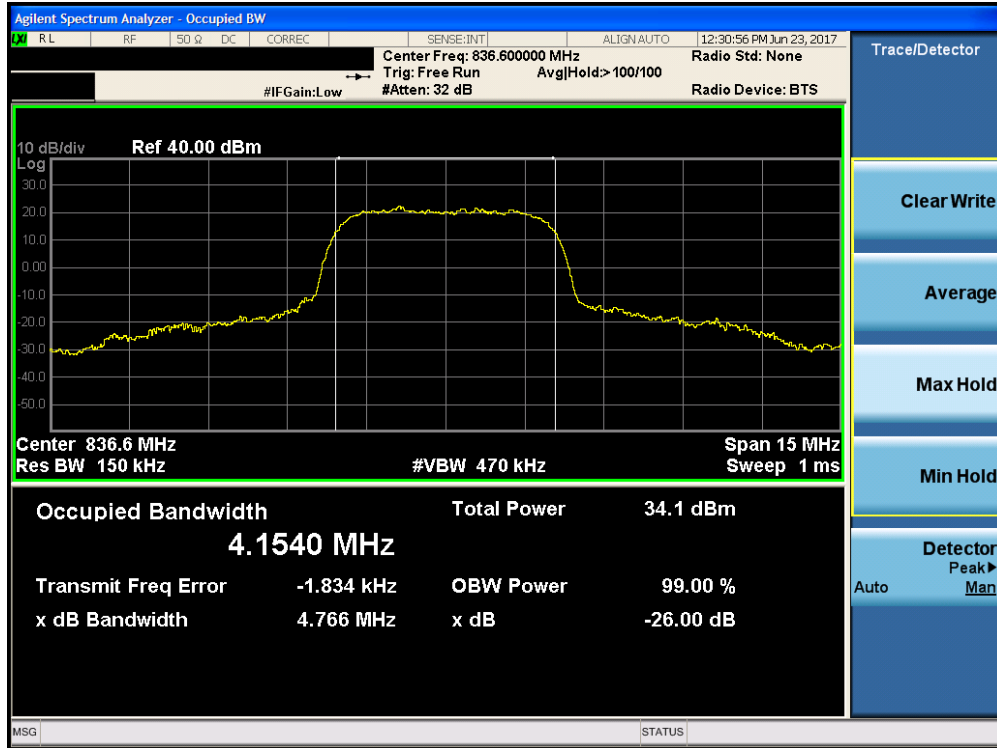


Plot 7-1. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

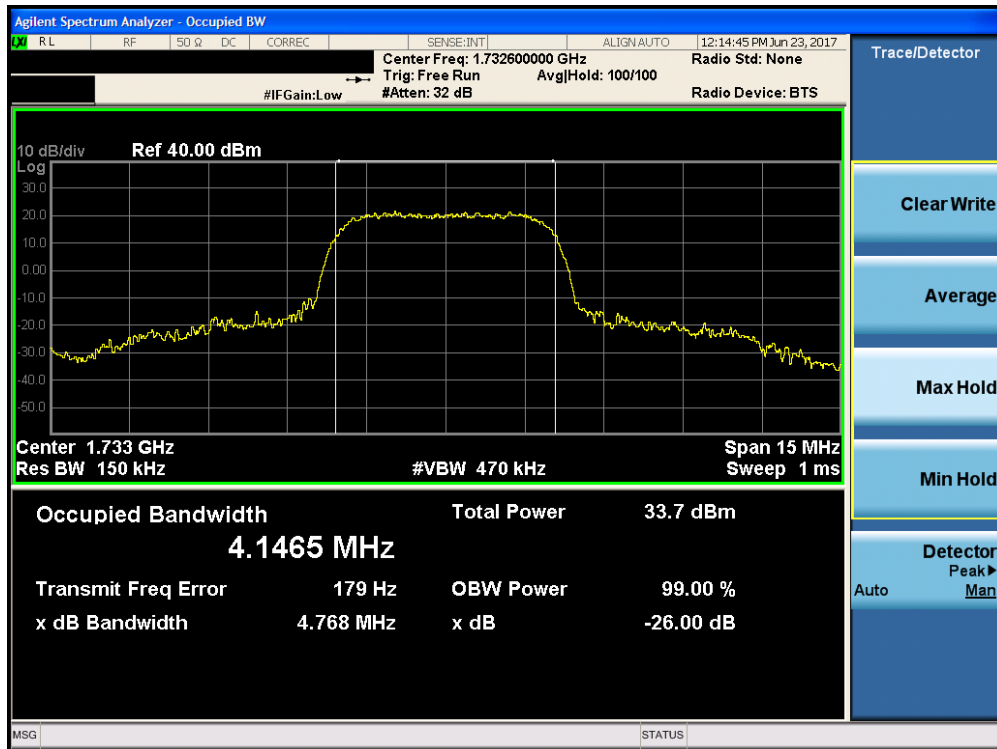

Plot 7-2. Occupied Bandwidth Plot (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCG-A1860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 16 of 60

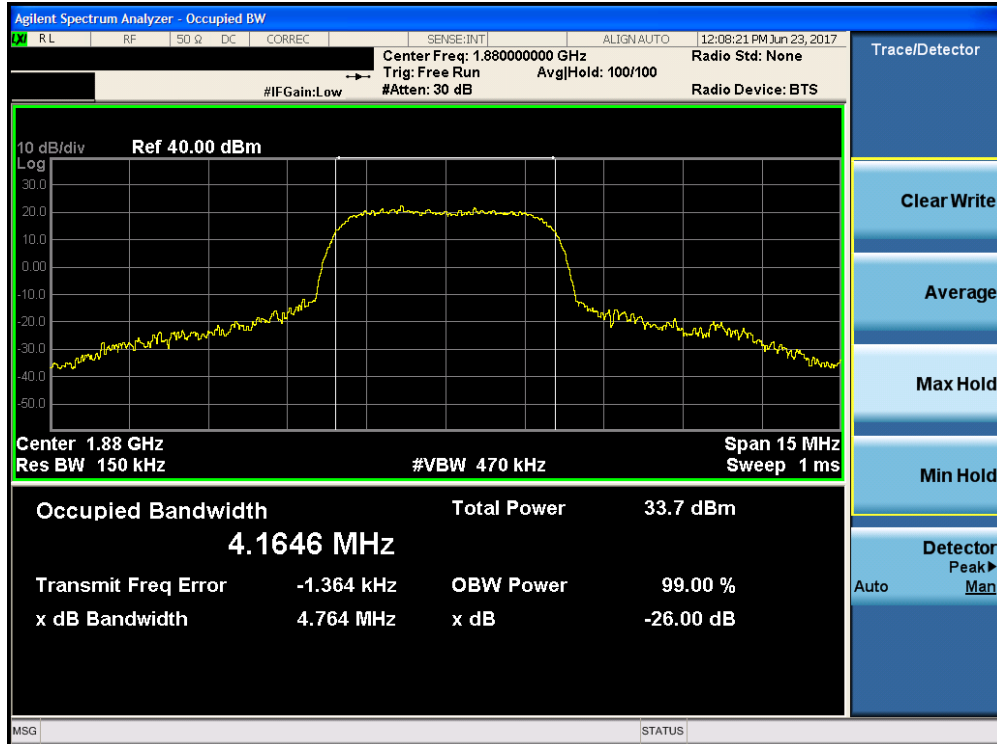

Plot 7-3. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A1860	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 17 of 60

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §22.917(a), §24.238(a), §27.53(h)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



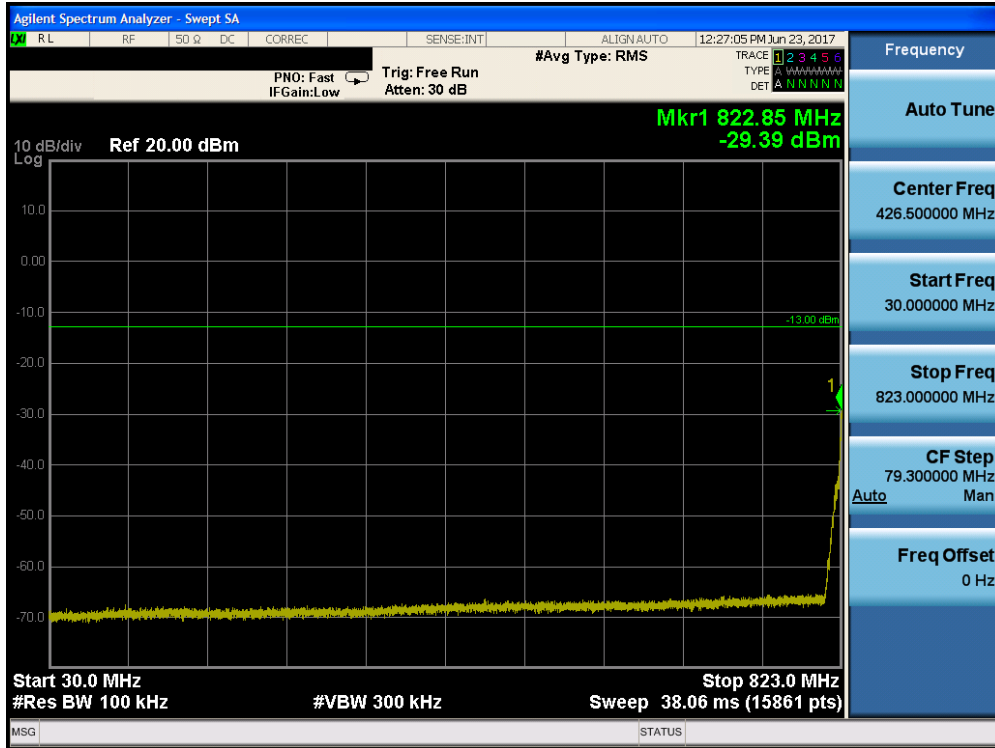


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz for Part 24 and 27 and 100 kHz for Part 22 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 18 of 60

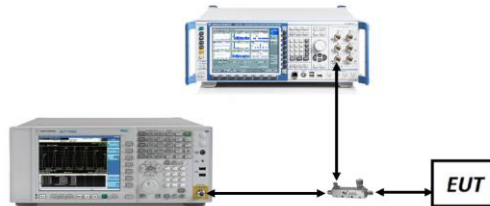


Plot 7-4. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

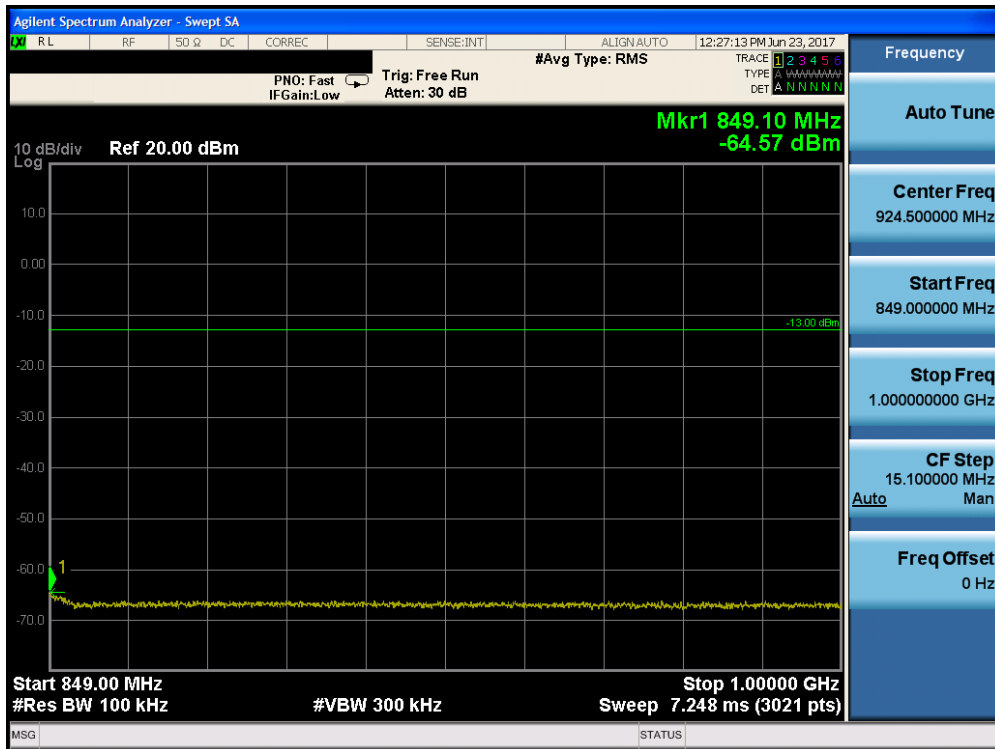


Plot 7-5. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: BCG-A1860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 19 of 60

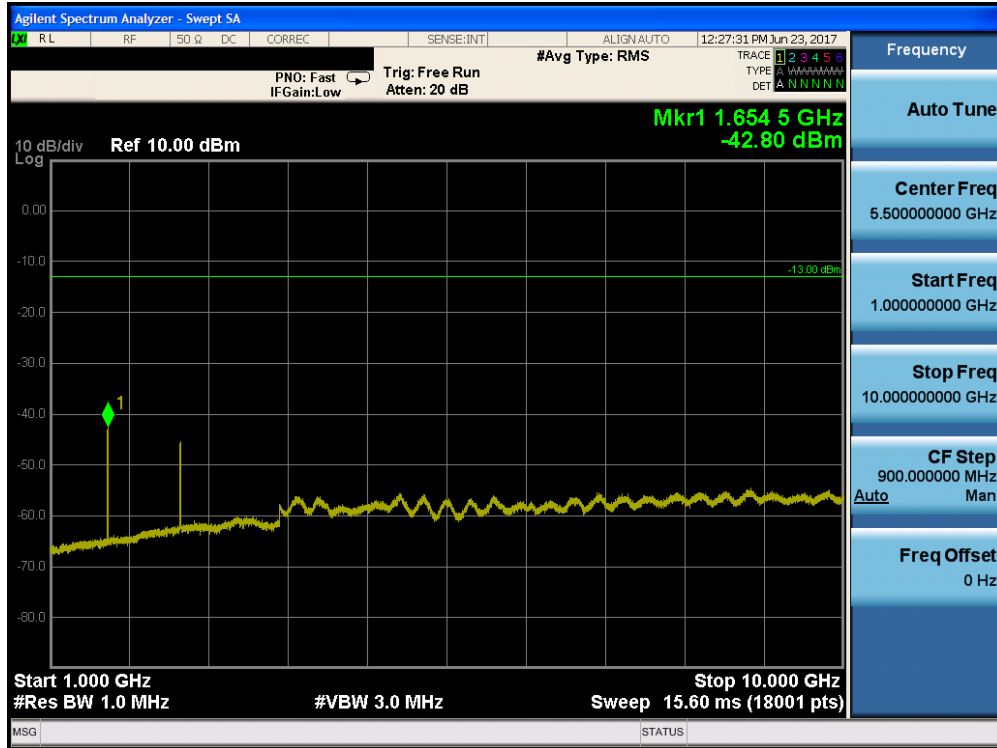


Plot 7-6. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

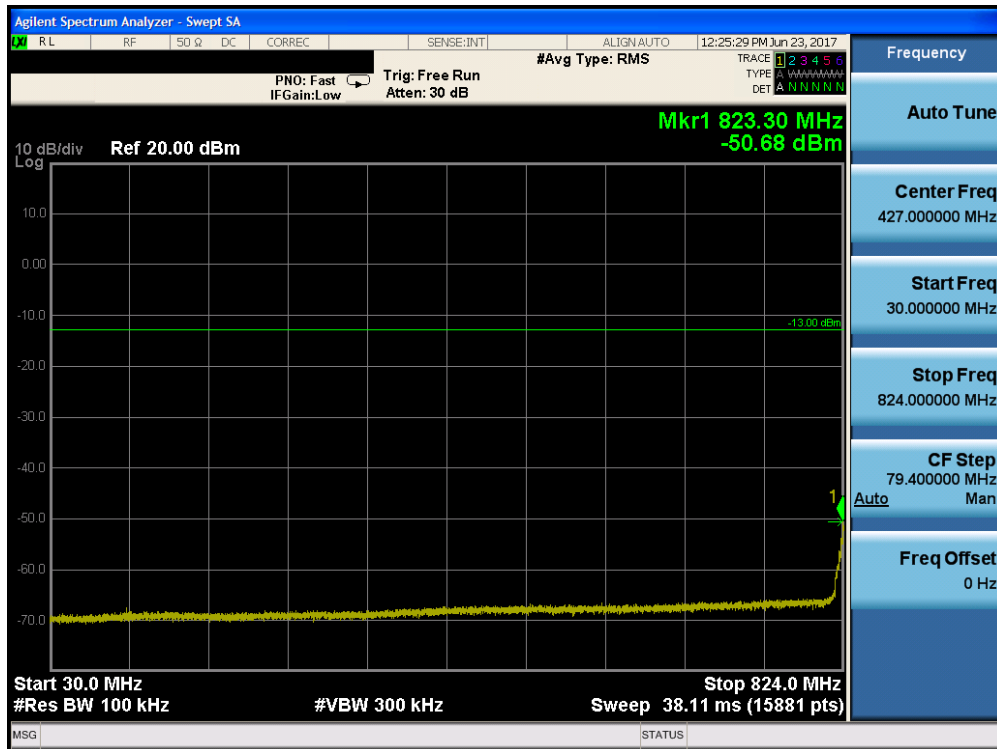


Plot 7-7. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCG-A1860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 20 of 60

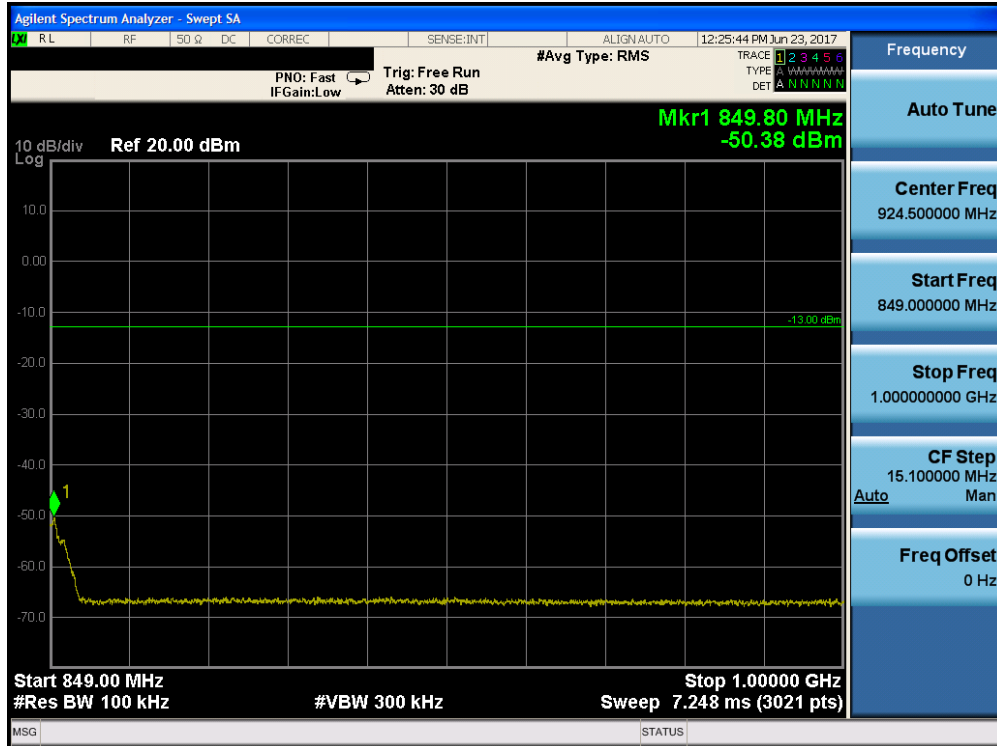


Plot 7-8. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

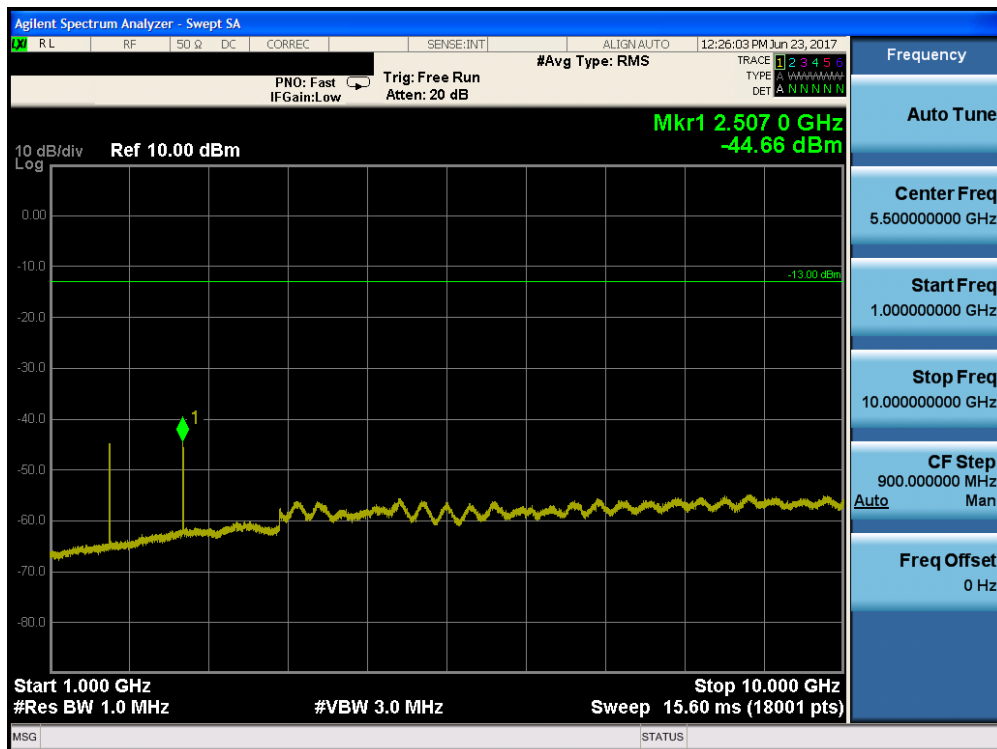


Plot 7-9. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 21 of 60

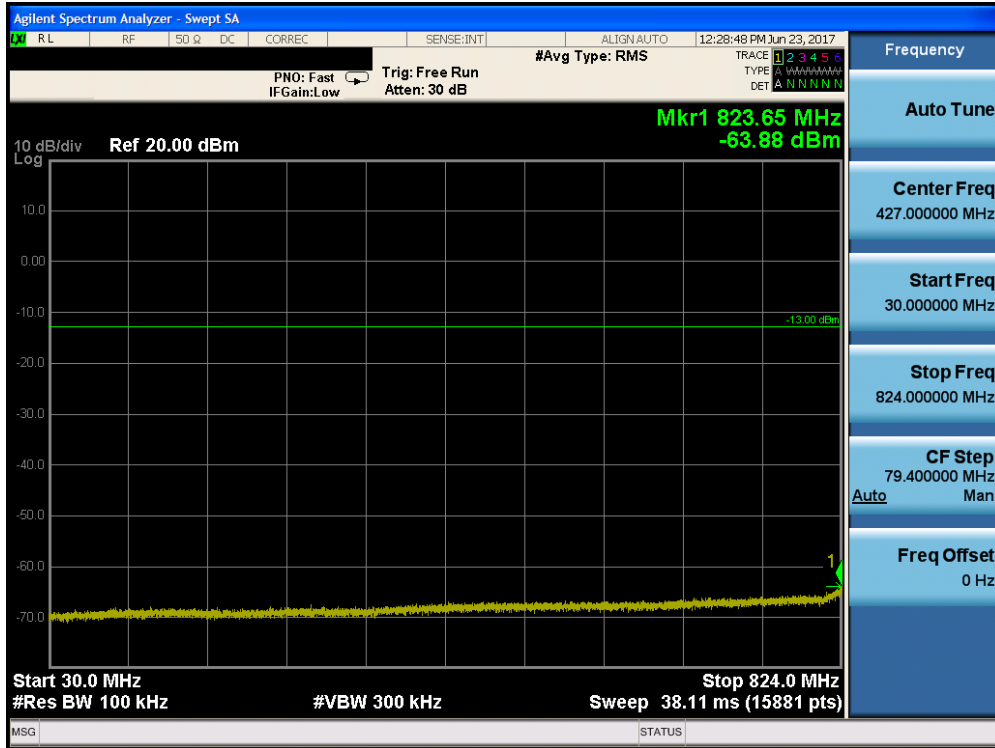


Plot 7-10. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

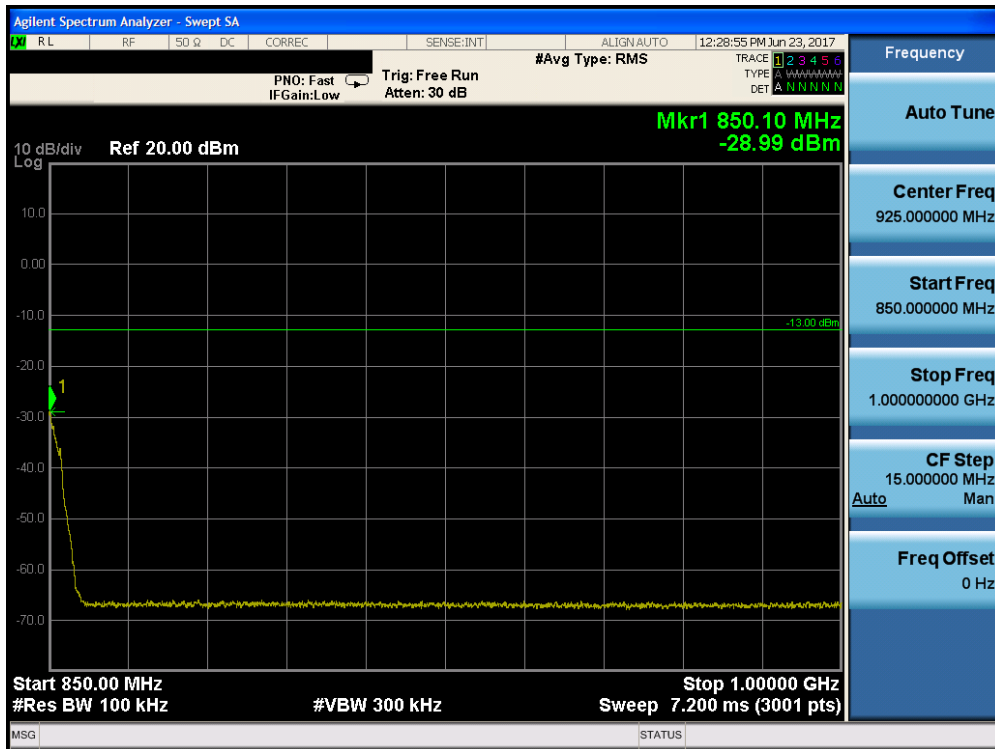


Plot 7-11. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCG-A1860		FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 22 of 60

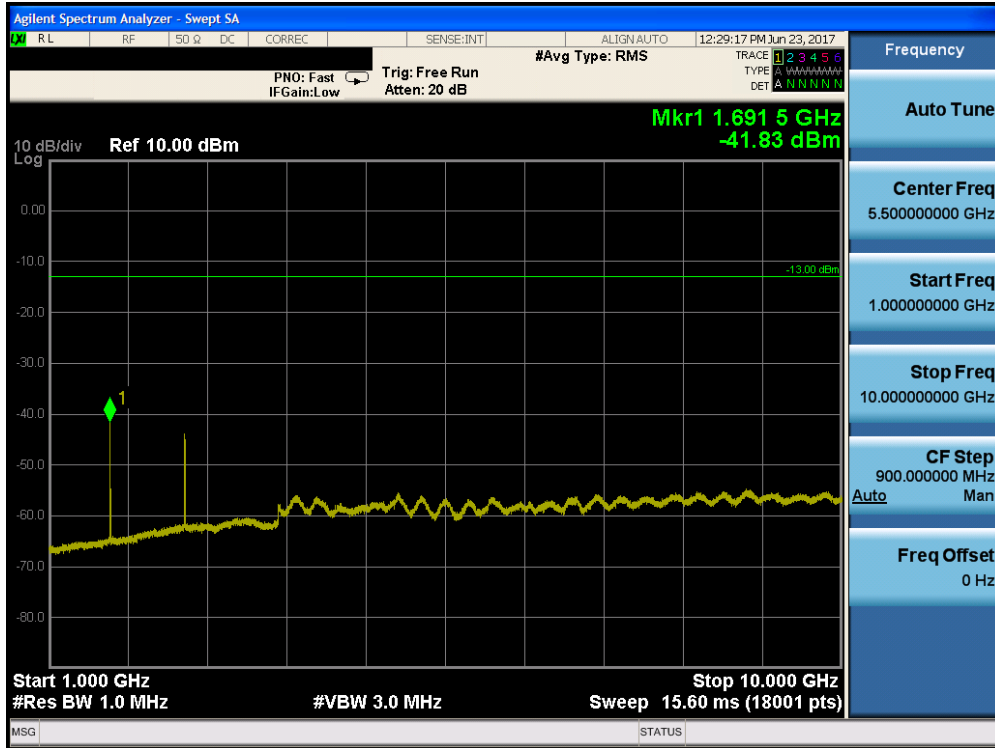


Plot 7-12. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

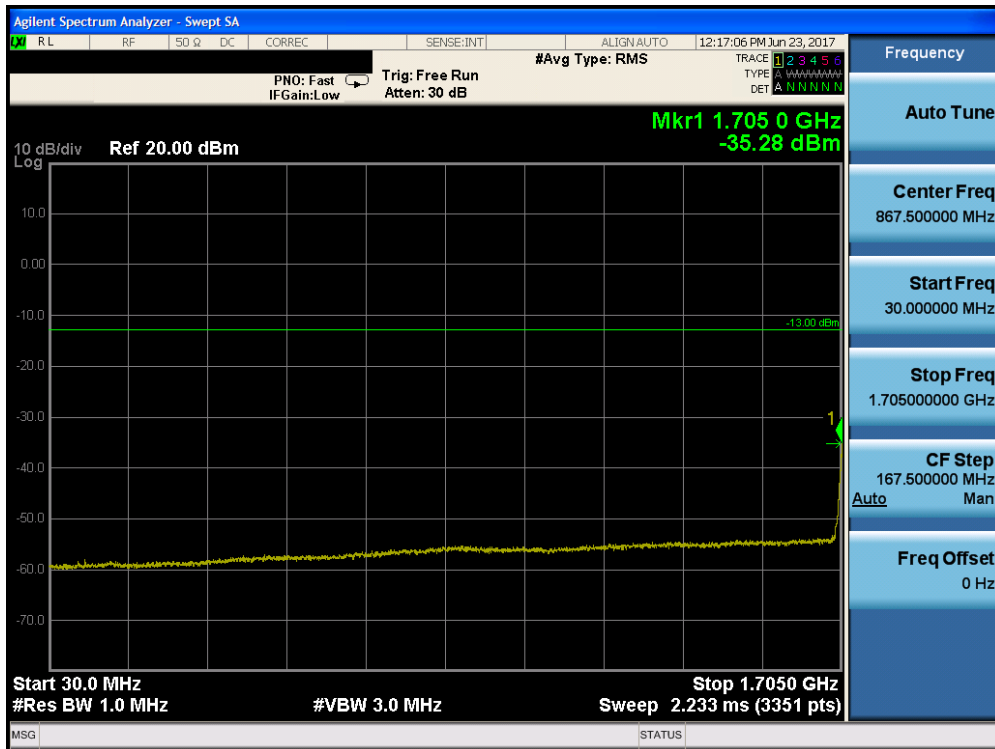


Plot 7-13. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 23 of 60

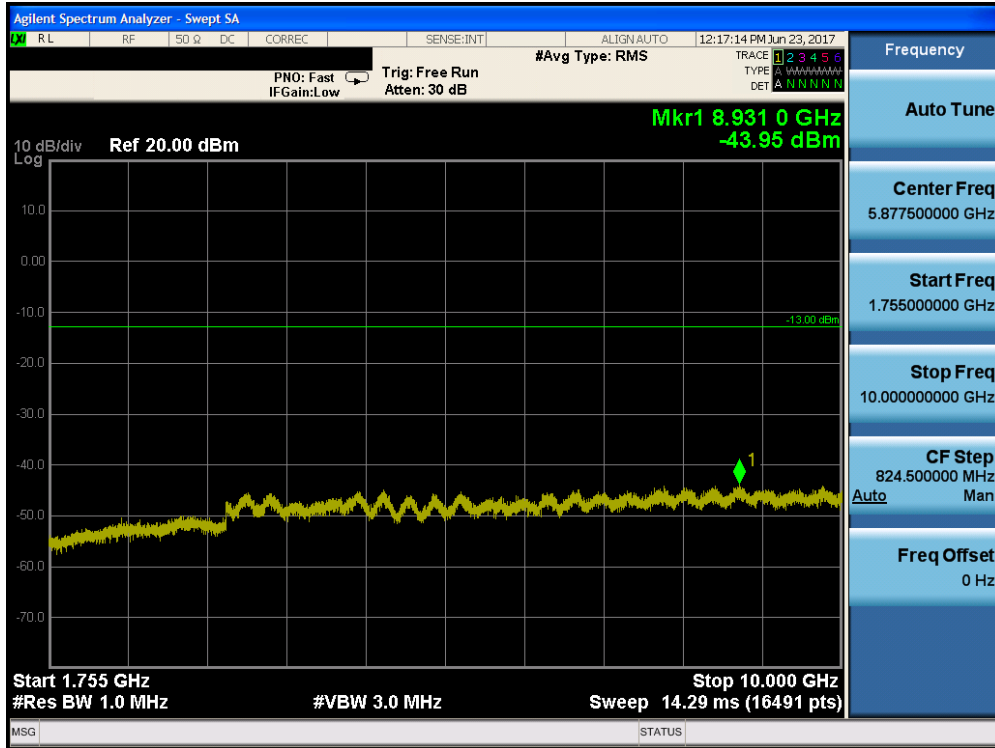


Plot 7-14. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

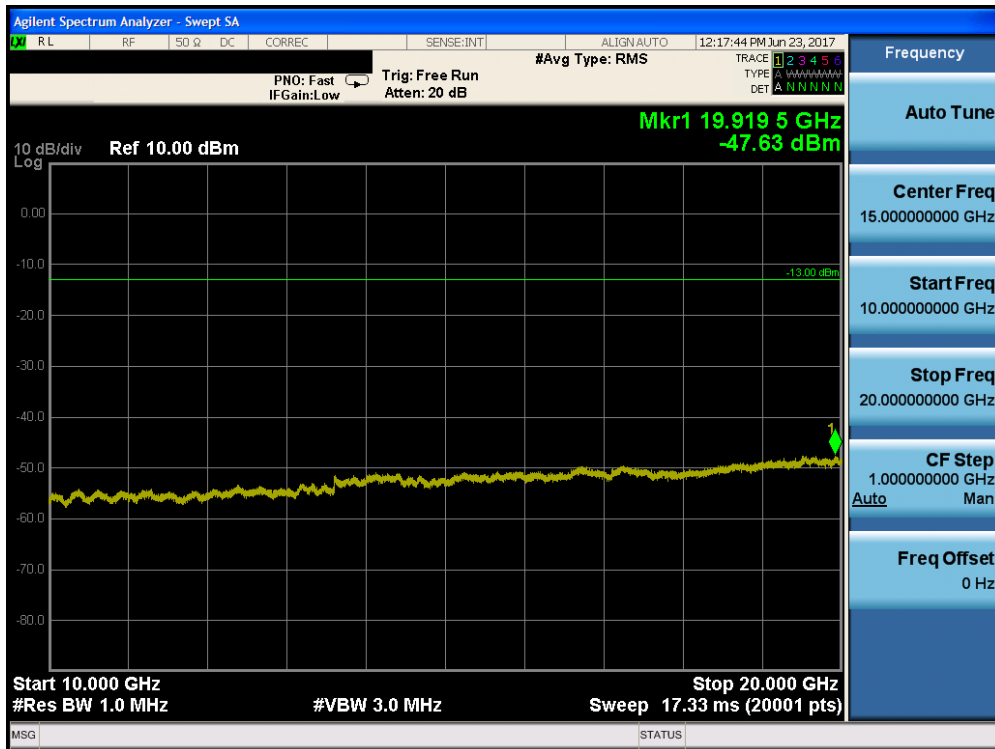


Plot 7-15. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: BCG-A1860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 24 of 60

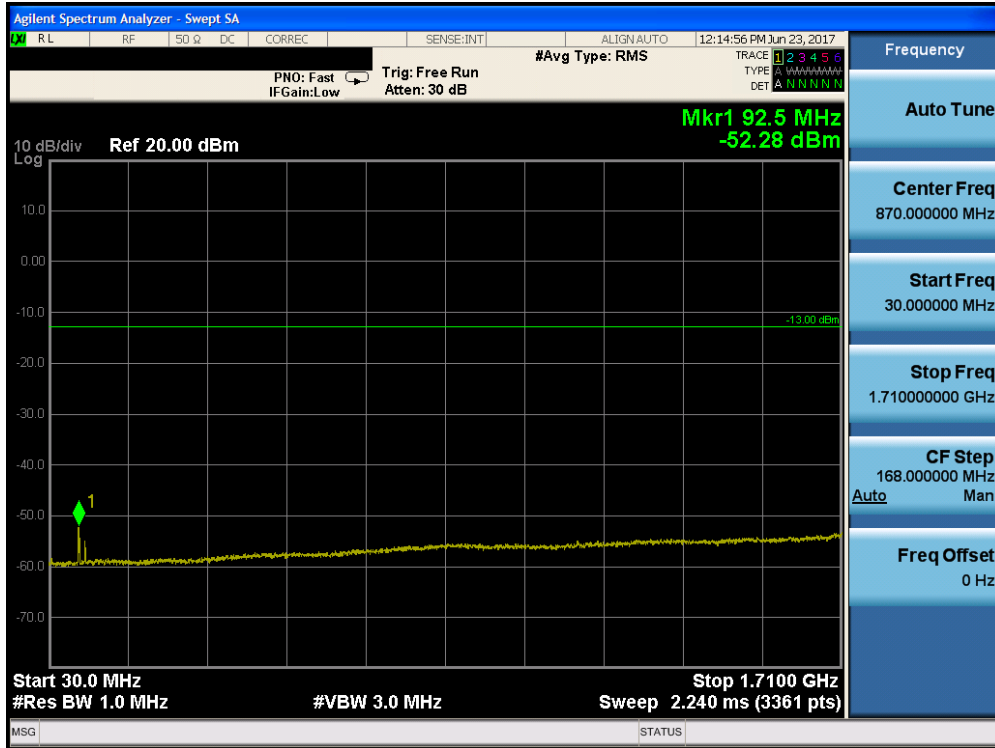


Plot 7-16. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1413)

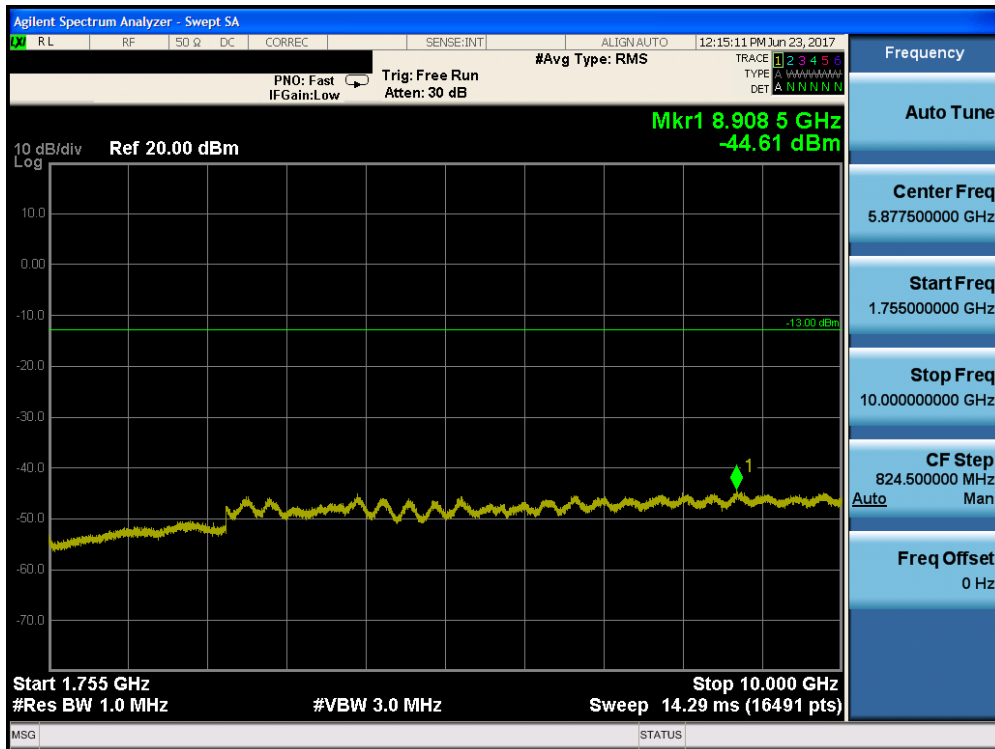


Plot 7-17. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCG-A1860	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 25 of 60

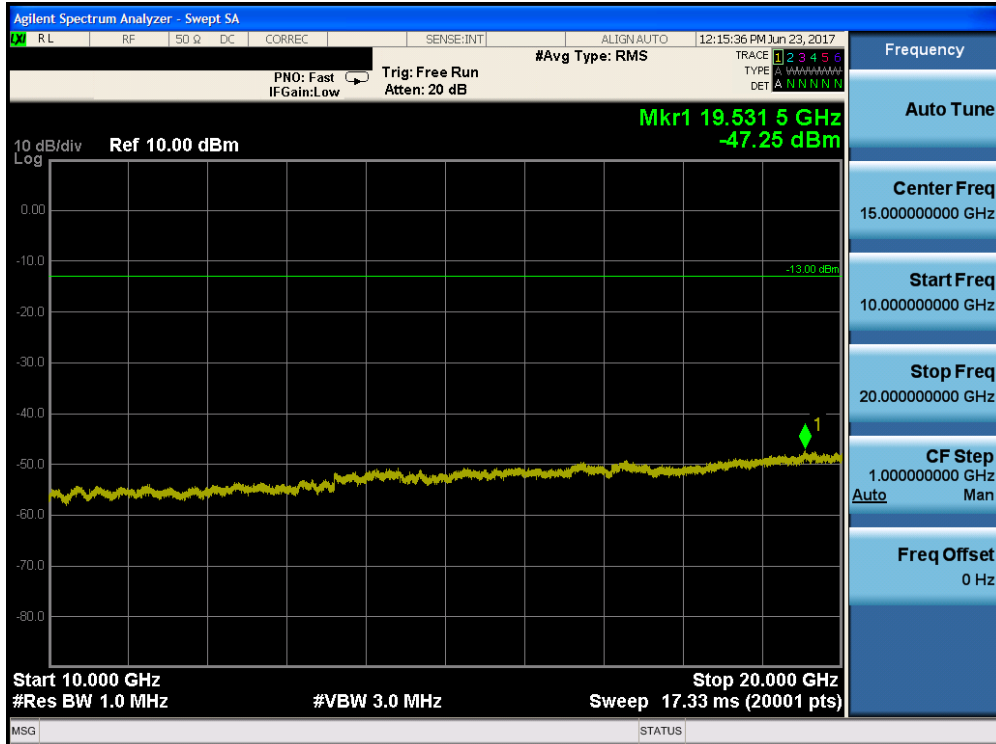


Plot 7-18. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1413)

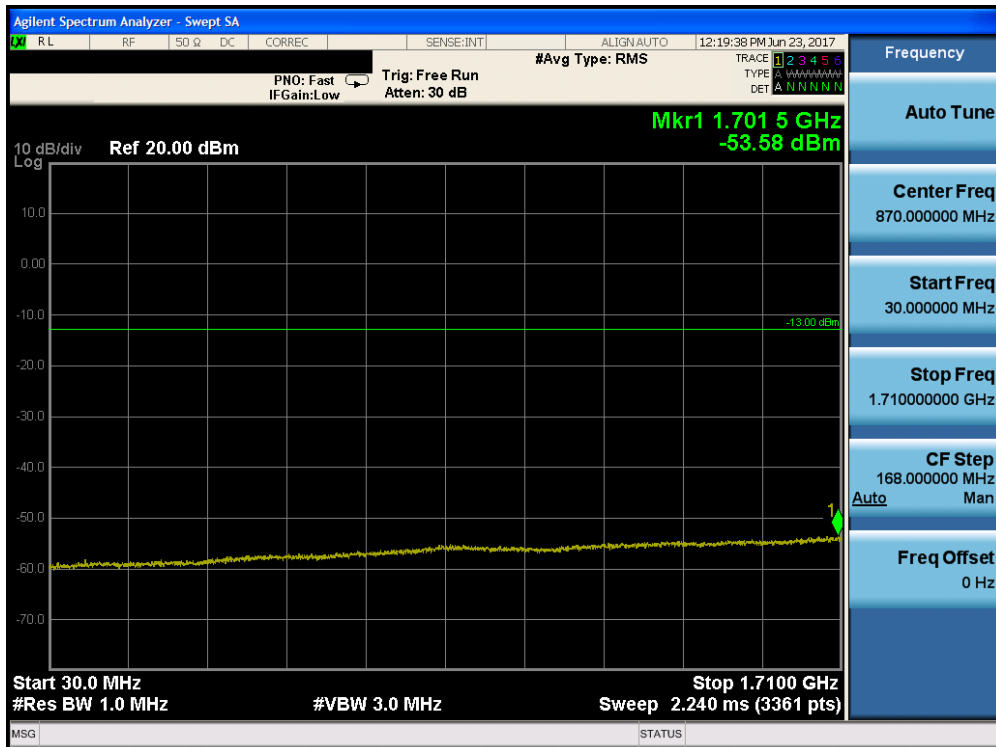


Plot 7-19. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 26 of 60

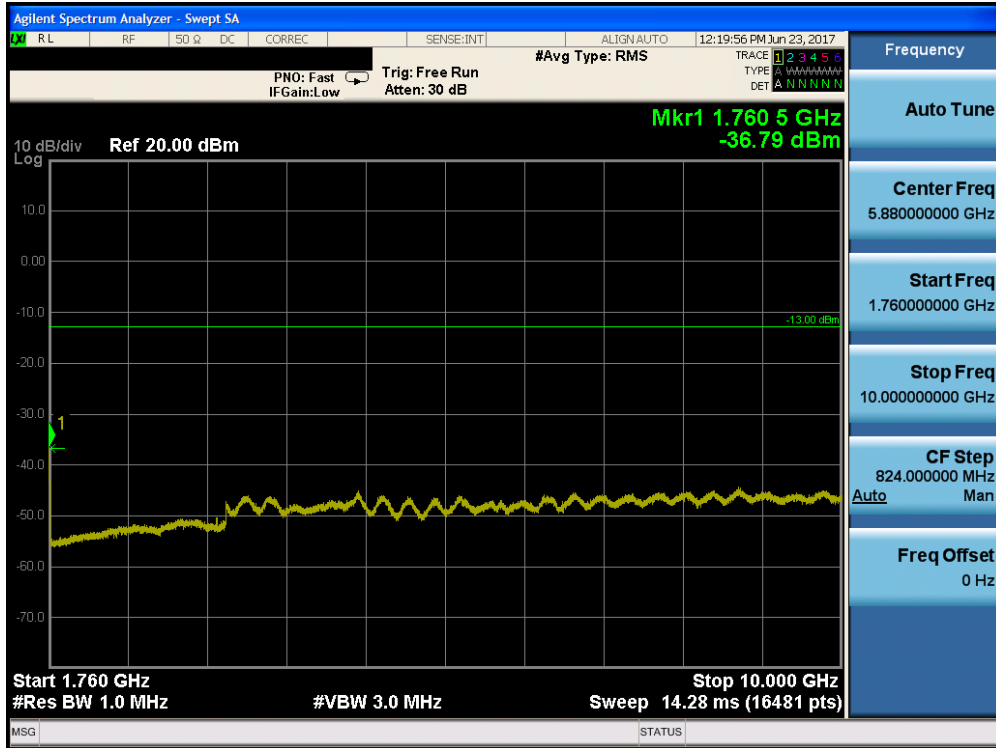


Plot 7-20. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1513)

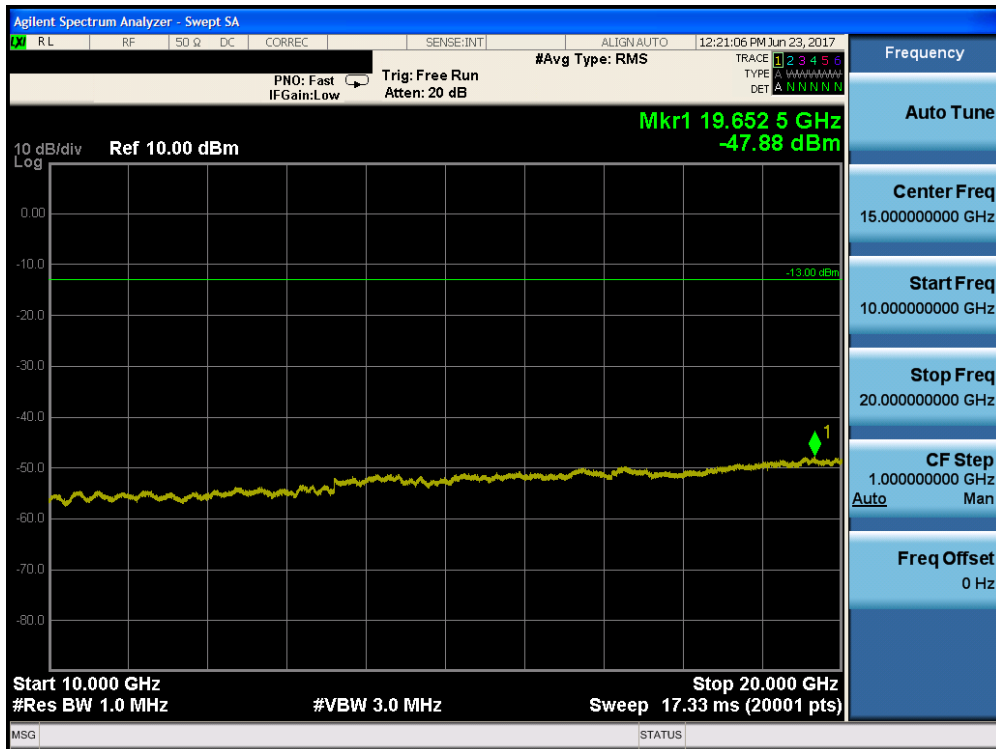


Plot 7-21. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCG-A1860		FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 27 of 60

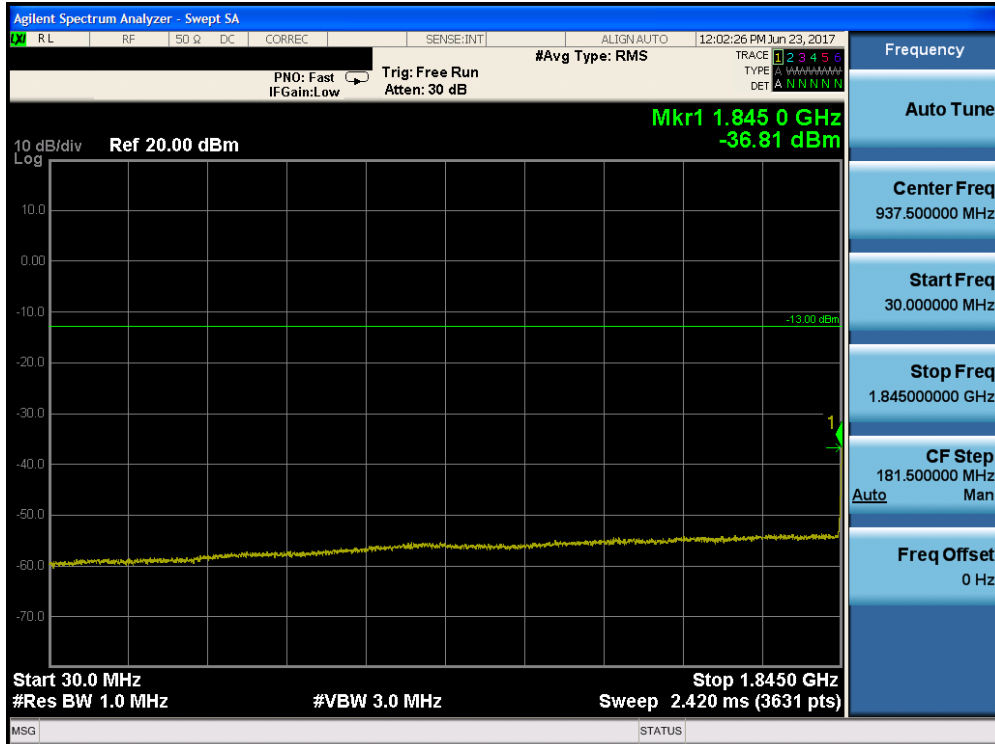


Plot 7-22. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

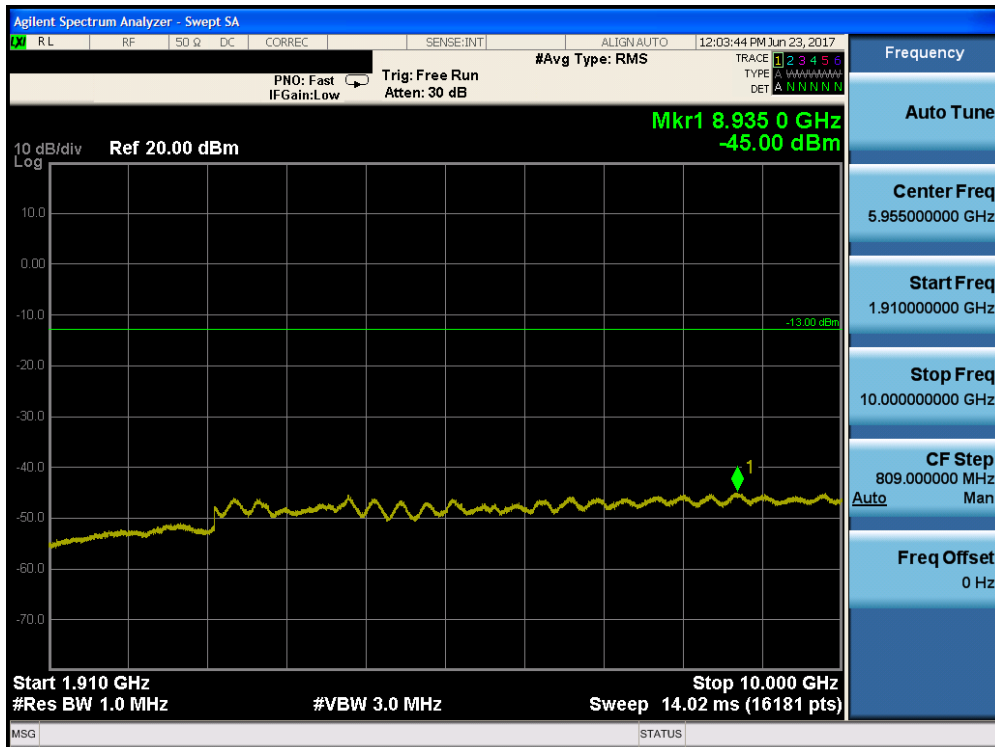


Plot 7-23. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 28 of 60

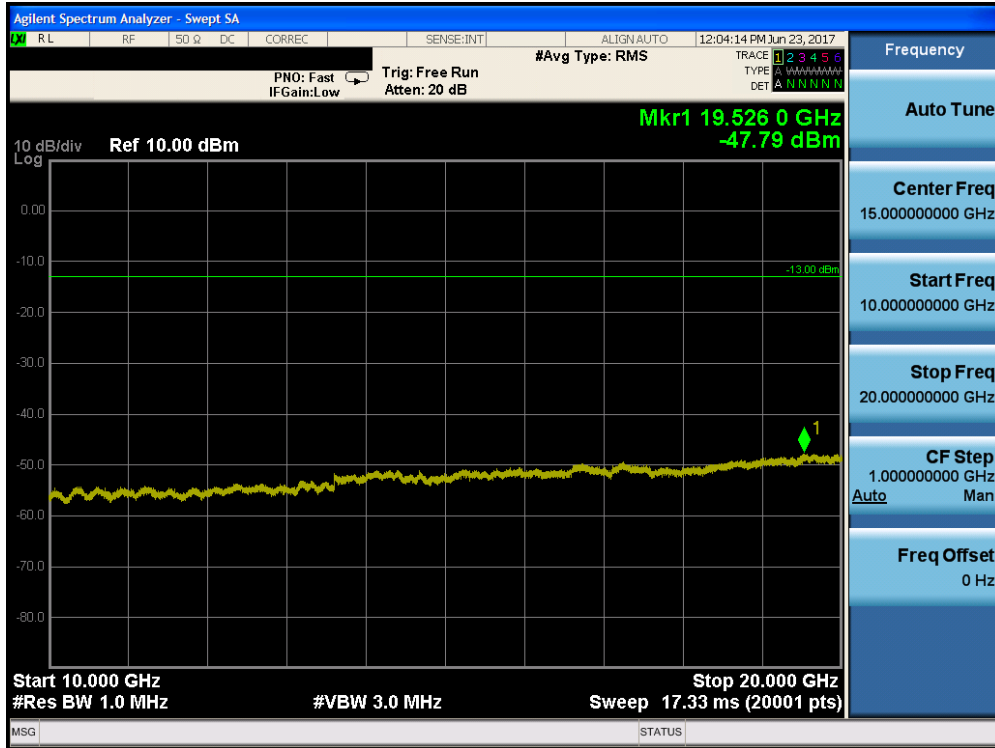


Plot 7-24. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

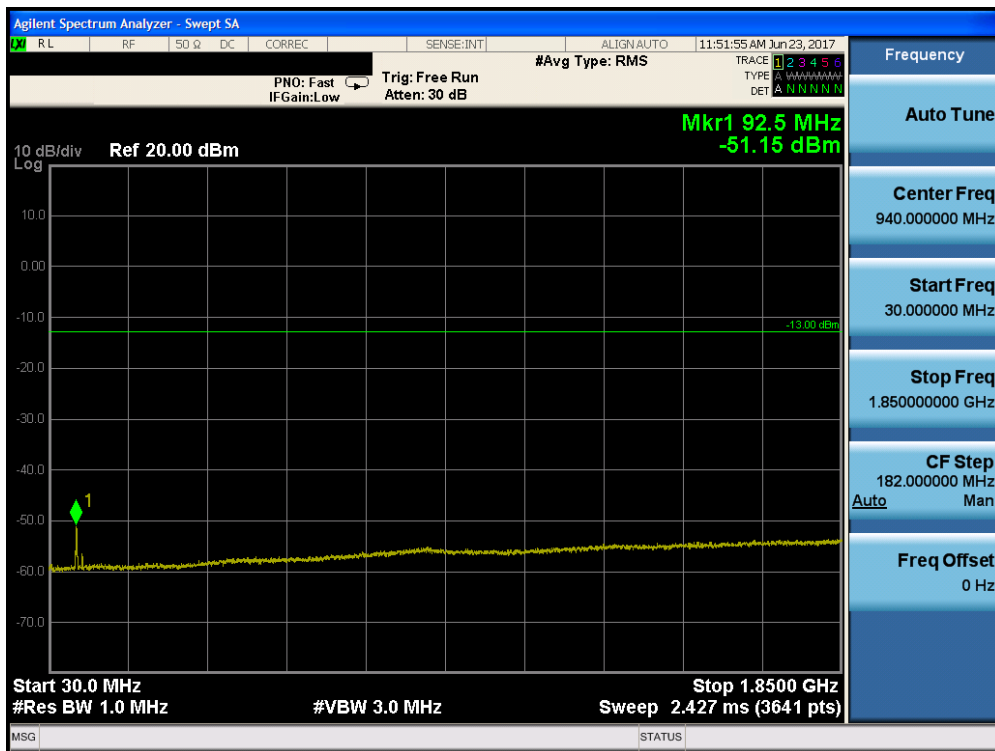


Plot 7-25. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 29 of 60

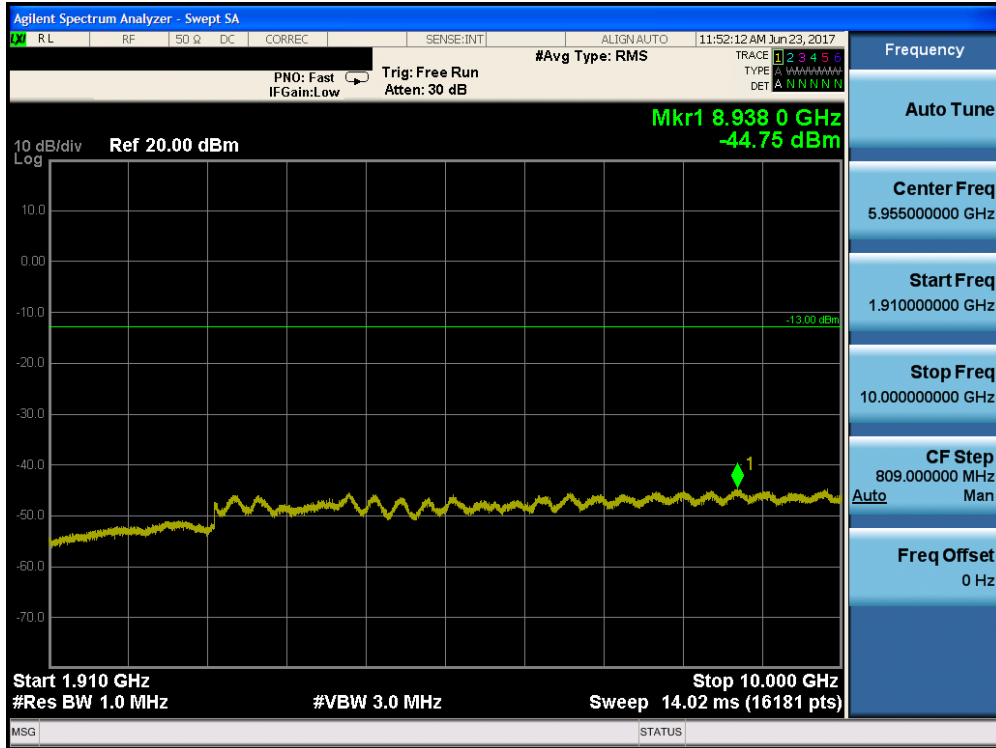


Plot 7-26. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

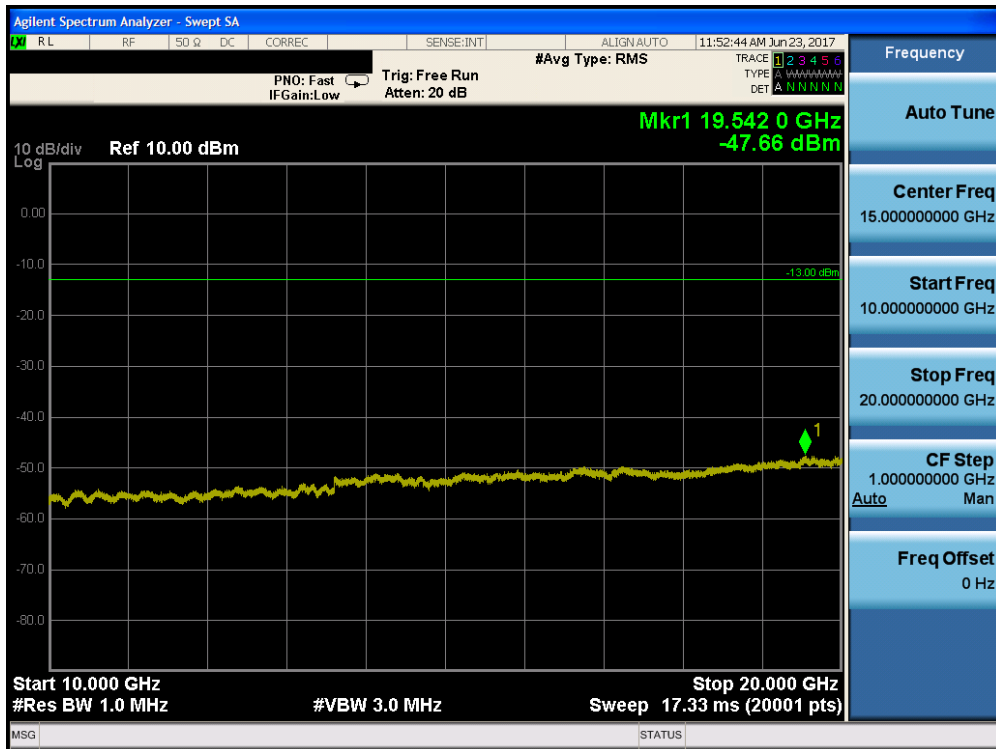


Plot 7-27. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 30 of 60

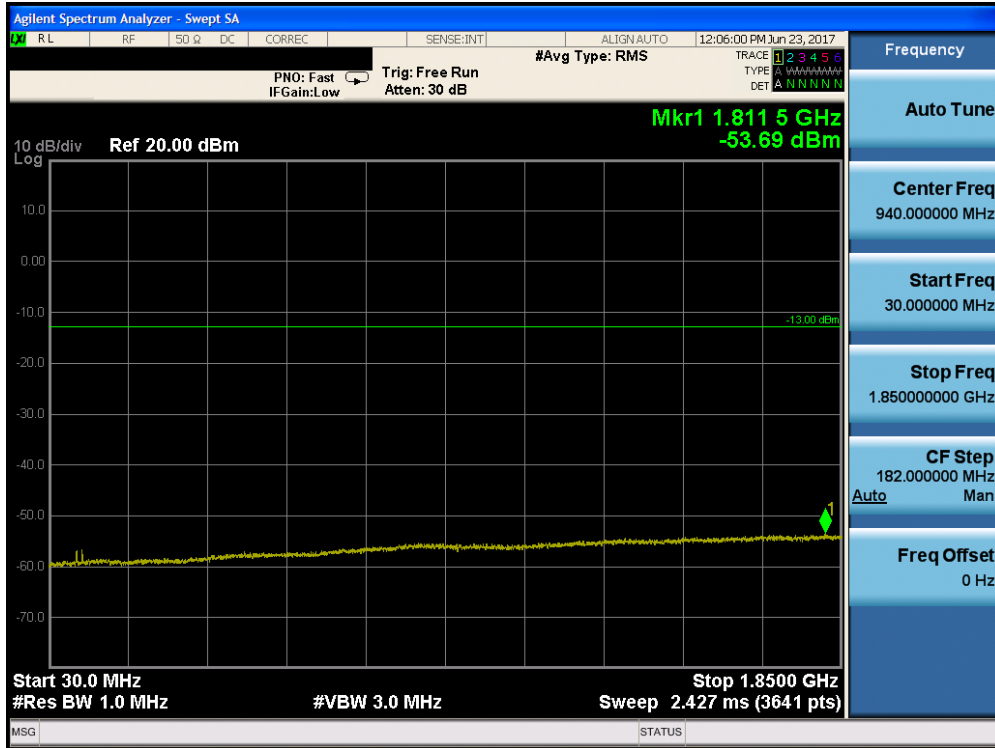


Plot 7-28. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

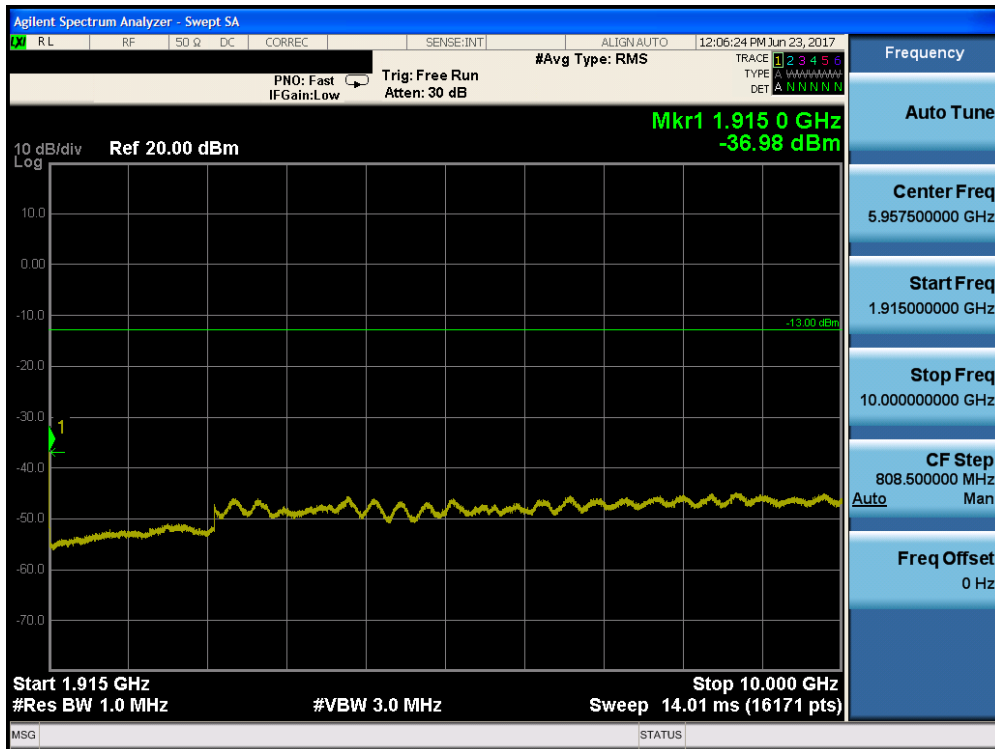

Plot 7-29. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCG-A1860	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 31 of 60

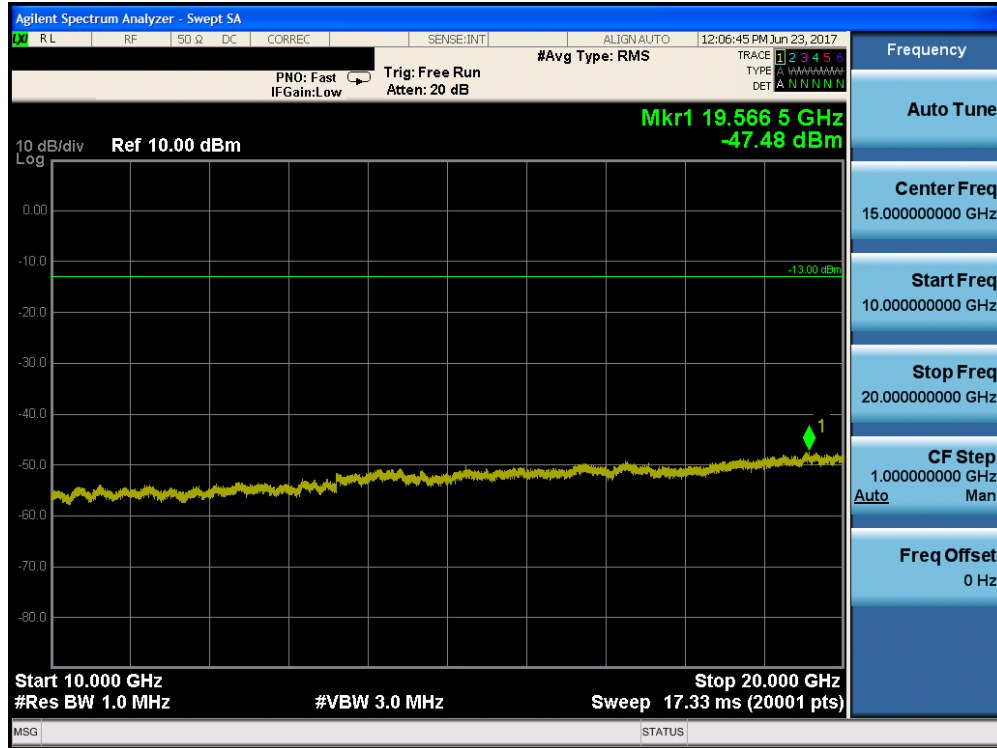

Plot 7-30. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCG-A1860		FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 32 of 60

7.4 Band Edge Emissions at Antenna Terminal

§2.1051, §22.917(a), §24.238(a), §27.53(h)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. $RBW \geq 1\%$ of the emission bandwidth
4. $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



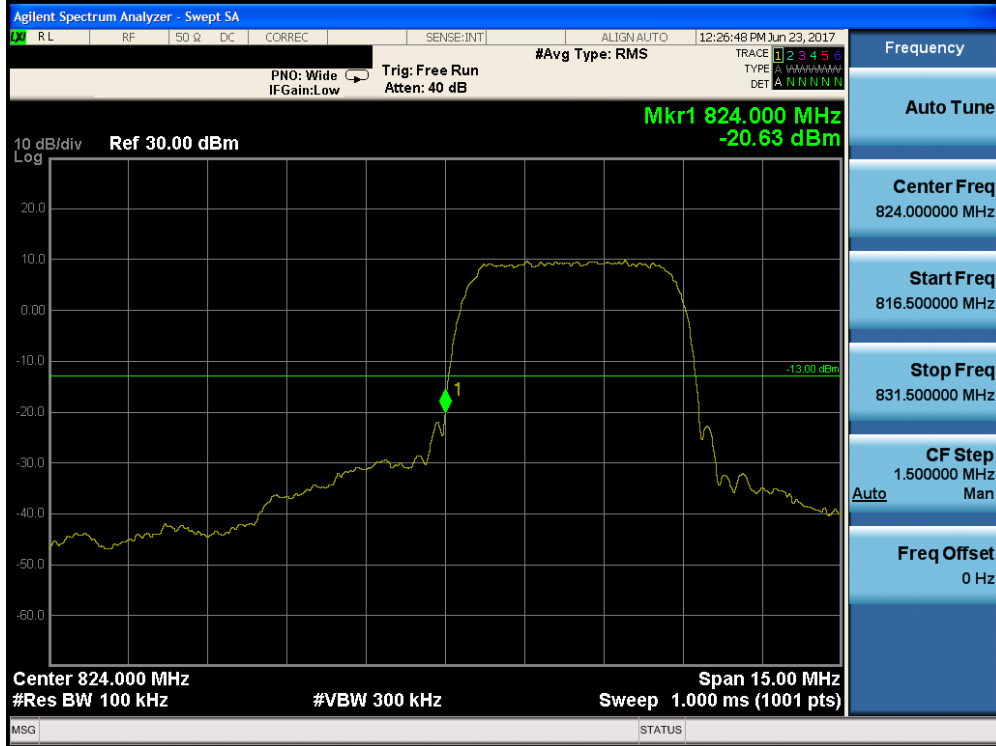


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per 22.917(b), 24.238(b), 27.53(h)(3), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCG-A1860	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 33 of 60

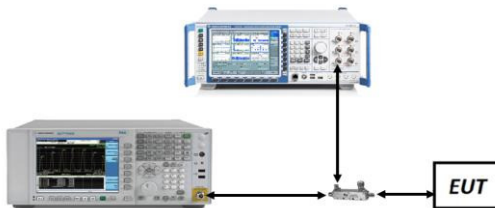


Plot 7-31. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)




Plot 7-32. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCG-A1860	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 34 of 60

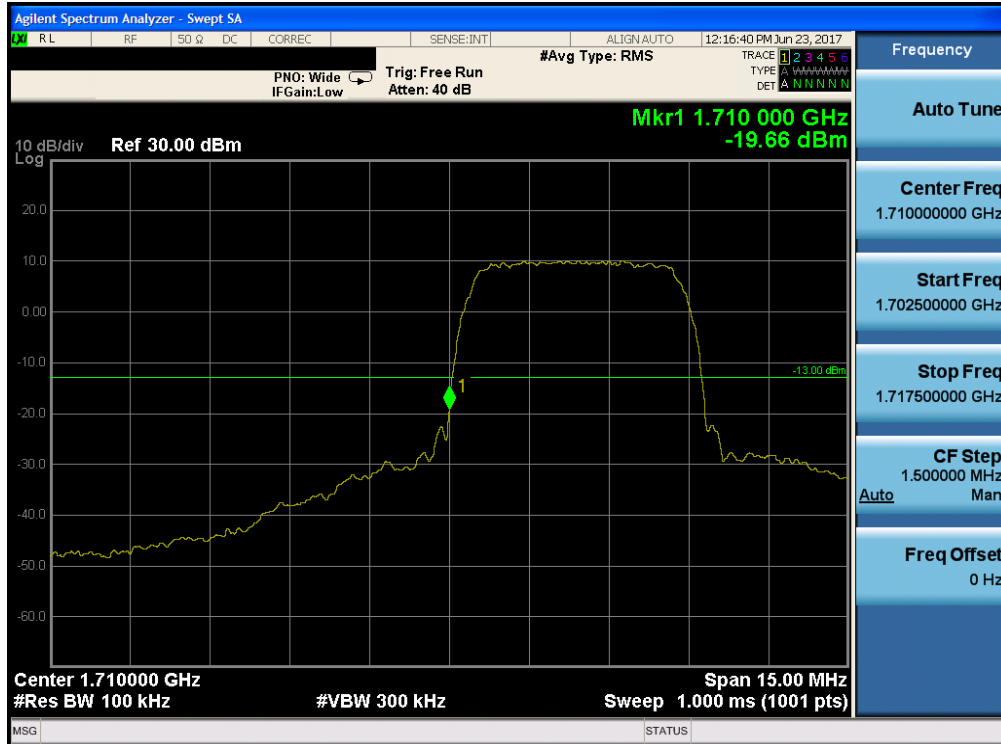


Plot 7-33. Band Edge Plot (AWS WCDMA Mode – Ch. 1312)

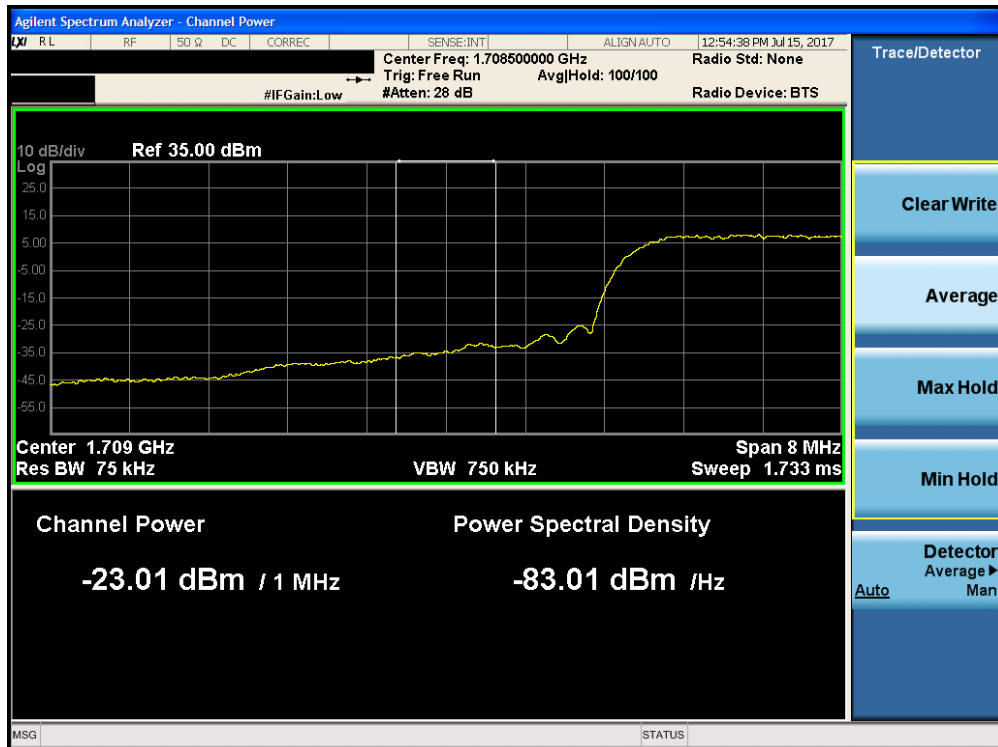


Plot 7-34. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1312)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 35 of 60

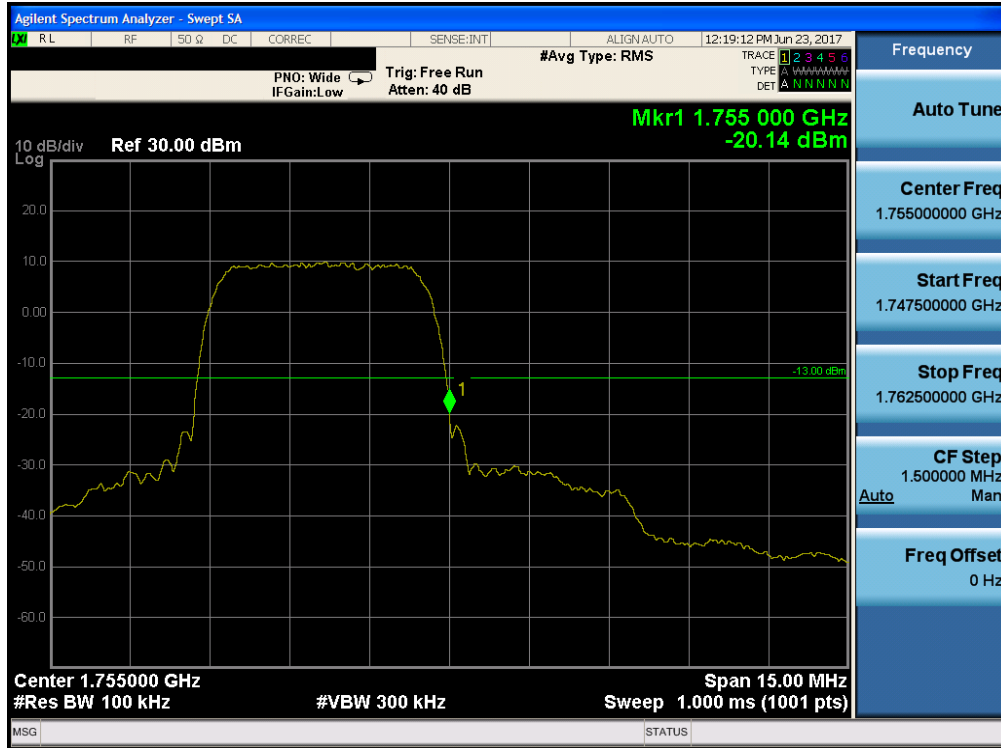


Plot 7-35. Band Edge Plot (AWS WCDMA Mode – Ch. 1513)

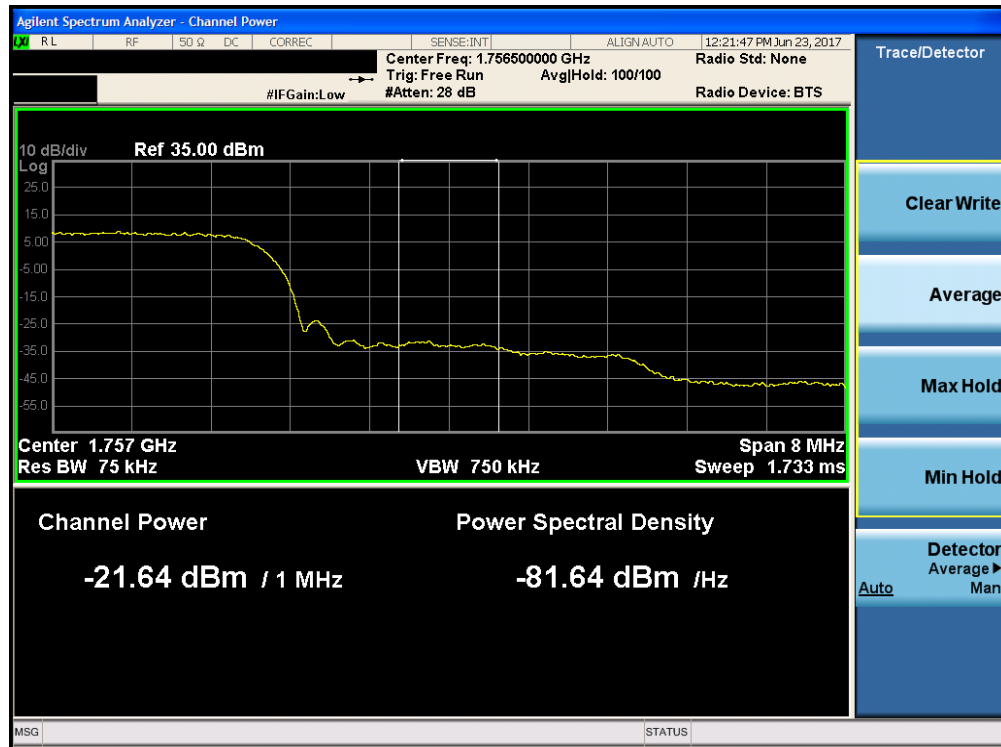


Plot 7-36. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCG-A1860	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 36 of 60

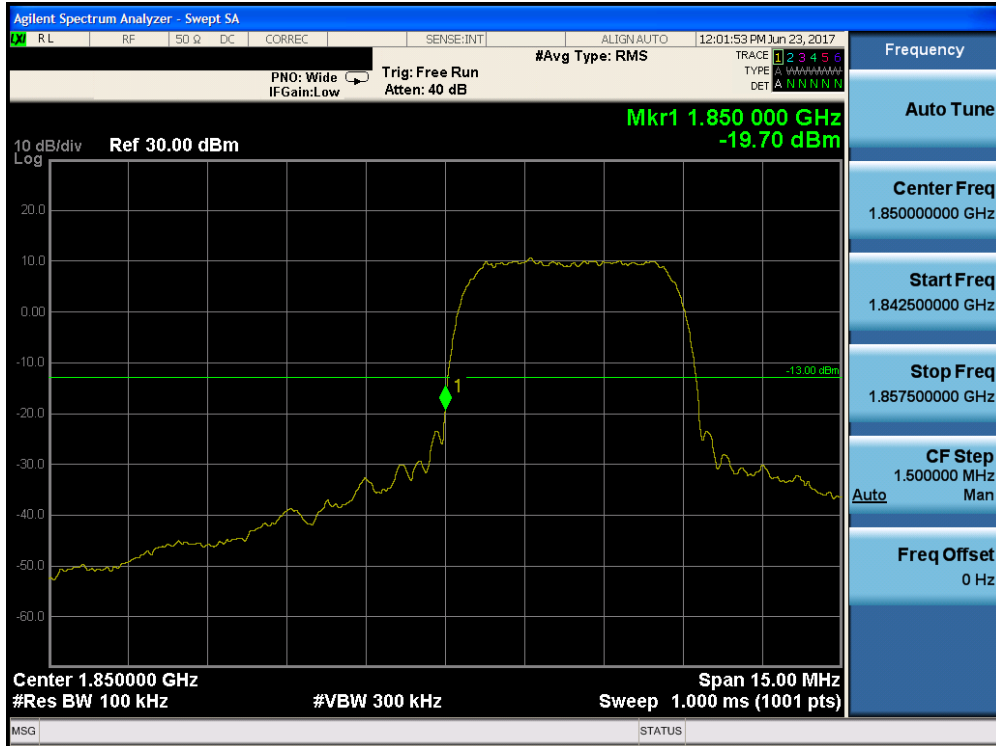

Plot 7-37. Band Edge Plot (PCS WCDMA Mode – Ch. 9262)

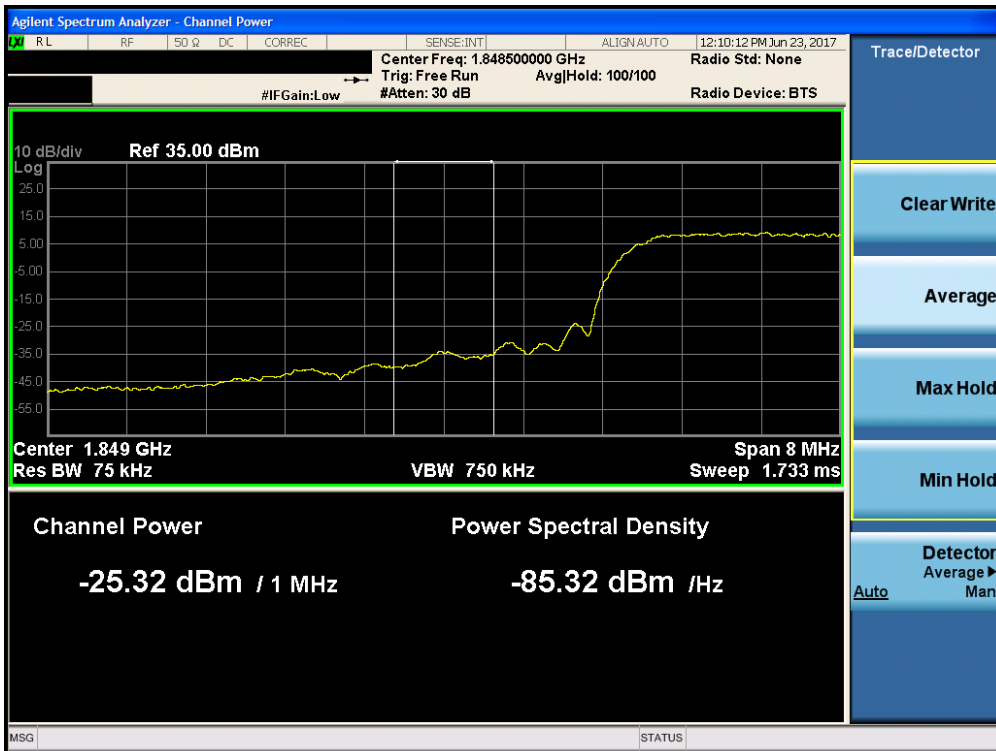


Plot 7-38. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: BCG-A1860	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 37 of 60



Plot 7-39. Band Edge Plot (PCS WCDMA Mode – Ch. 9538)

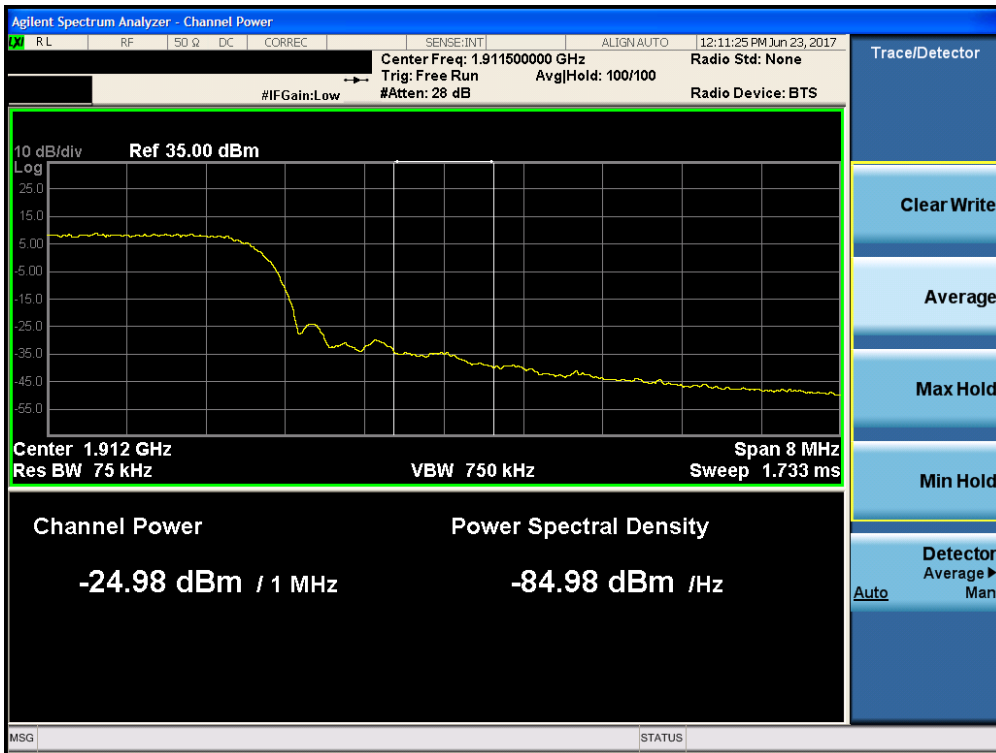

Plot 7-40. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCG-A1860	FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 38 of 60

7.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



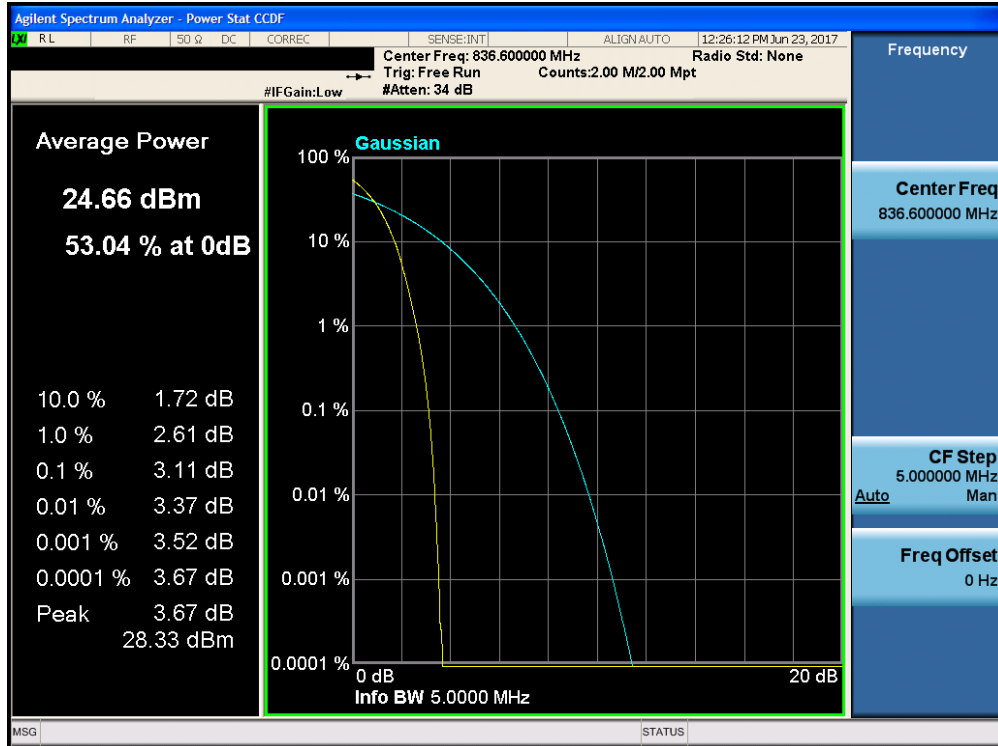


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 39 of 60

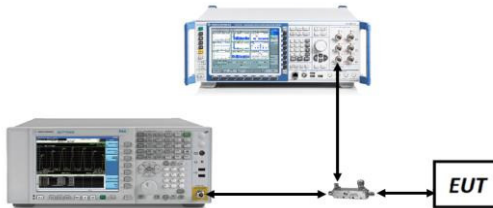


Plot 7-41. Peak-Average Ratio Plot (Cell WCDMA Mode – Ch. 4183)

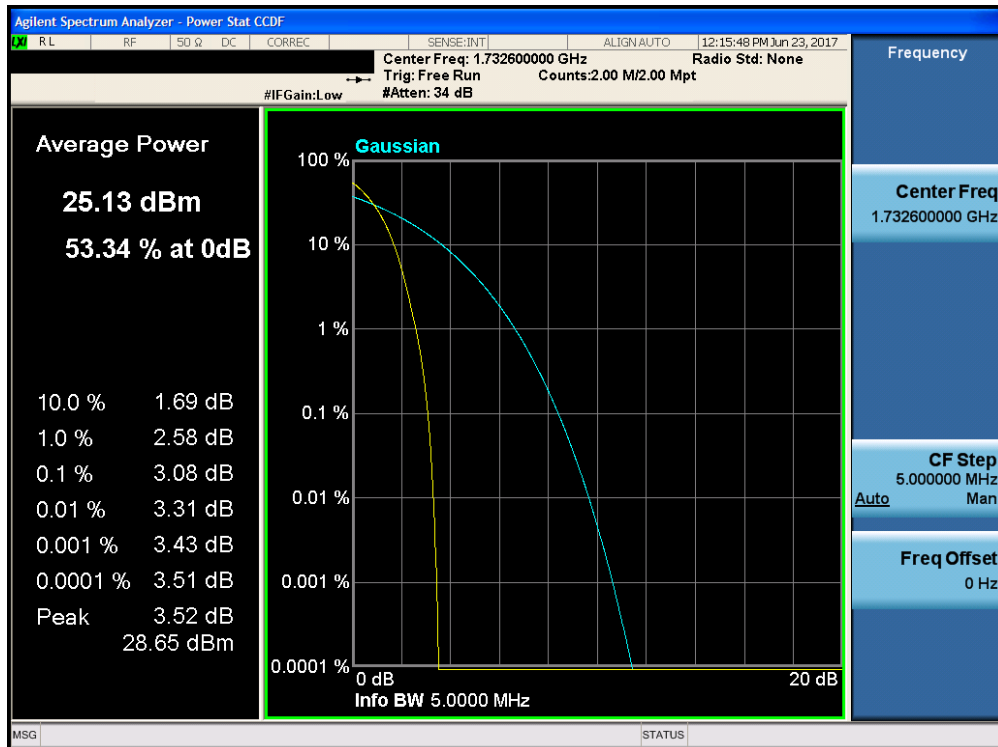


Plot 7-42. Peak-Average Ratio Plot (AWS WCDMA Mode – Ch. 1412)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 40 of 60

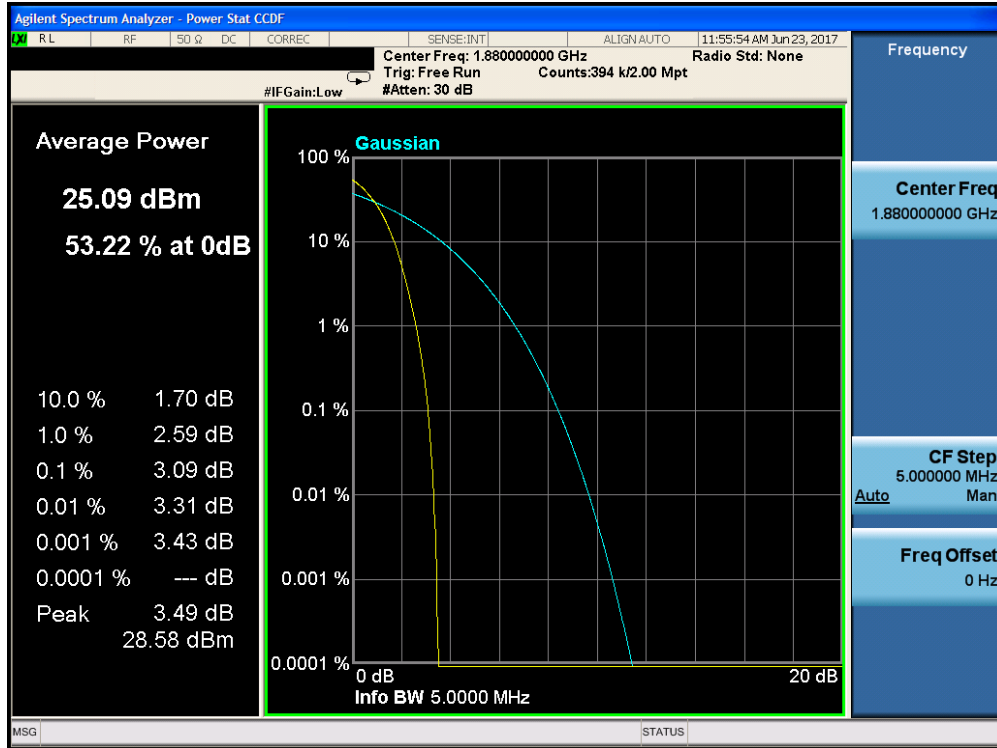

Plot 7-43. Peak-Average Ratio Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch
		Page 41 of 60

7.6 ERP/EIRP
§22.913(a)(2), 24.232(c), 27.50(d.4)

Test Overview

Effective Radiated Power (ERP) is specified when the operating frequency is less than or equal to 1 GHz and Equivalent Isotropic Radiated Power (EIRP) is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.6

Test Formula:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$ERP/EIRP = P_{Meas} - LC + GT$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB


GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. ERP/EIRP Measurement Setup

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 42 of 60

Test Notes

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4) The Ant. Gains (GT) are listed in dBi.
- 5) The final ERP/EIRP values in dBm values were calculated in column 5.
- 6) The cable loss factor is already included in the measurement system and the conducted power in the table already includes this factor.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 43 of 60

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBd]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	24.49	-23.90	0.59	0.001	38.45	-37.86
836.60	WCDMA850	24.47	-23.90	0.57	0.001	38.45	-37.88
846.60	WCDMA850	24.47	-23.90	0.57	0.001	38.45	-37.88


Table 7-2. ERP (Cellular WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.34	-13.11	11.23	0.013	30.00	-18.77
1732.60	WCDMA1700	24.38	-13.11	11.27	0.013	30.00	-18.73
1752.60	WCDMA1700	24.22	-13.11	11.11	0.013	30.00	-18.89

Table 7-3. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.37	-12.45	11.92	0.016	33.01	-21.09
1880.00	WCDMA1900	24.41	-12.45	11.96	0.016	33.01	-21.05
1907.60	WCDMA1900	24.36	-12.45	11.91	0.016	33.01	-21.10

Table 7-4. EIRP (PCS WCDMA)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 44 of 60

7.7 Radiated Spurious Emissions Measurements – Above 1 GHz

§2.1053, §22.917(a), 24.238(a), 27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.


Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 1MHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 45 of 60

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

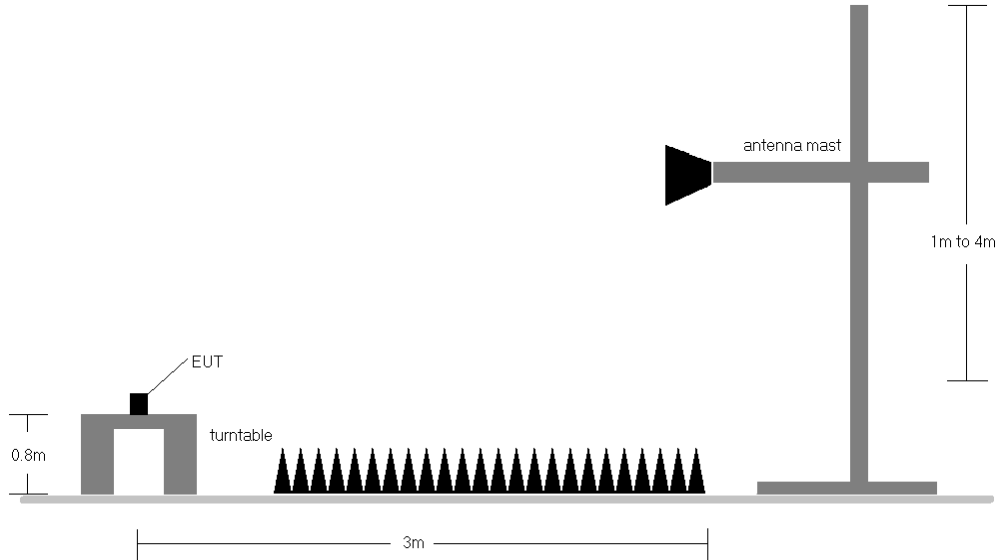



Figure 7-6. Test Instrument & Measurement Setup

Test Notes

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 46 of 60

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	-	-	-80.29	8.11	-72.18	-59.2

Table 7-5. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	-	-	-80.68	8.05	-72.64	-59.6

Table 7-6. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	-	-	-79.59	7.98	-71.61	-58.6

Table 7-7. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 47 of 60

OPERATING FREQUENCY: 1712.40 MHz
 CHANNEL: 1312
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-76.39	11.56	-64.82	-51.8

Table 7-8. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

OPERATING FREQUENCY: 1732.60 MHz
 CHANNEL: 1413
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-76.98	11.62	-65.37	-52.4

Table 7-9. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)

OPERATING FREQUENCY: 1752.60 MHz
 CHANNEL: 1513
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-76.52	11.71	-64.81	-51.8

Table 7-10. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch
		Page 48 of 60

OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-77.58	12.00	-65.58	-52.6

Table 7-11. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-77.13	12.14	-64.99	-52.0

Table 7-12. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-77.28	12.32	-64.95	-52.0

Table 7-13. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: BCG-A1860			FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch		Page 49 of 60

7.8 Radiated Spurious Emissions Measurements – Below 1 GHz

§2.1053, §22.917(a), 24.238(a), 27.53(h)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.


Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 50 of 60

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



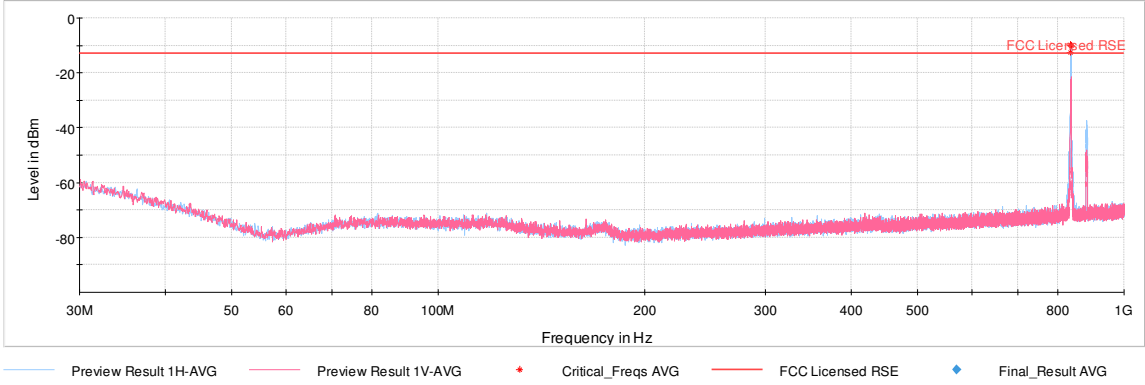


Figure 7-7. Test Instrument & Measurement Setup


Test Notes

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The spurious emissions 20dB below the limit is not reported.


FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 51 of 60

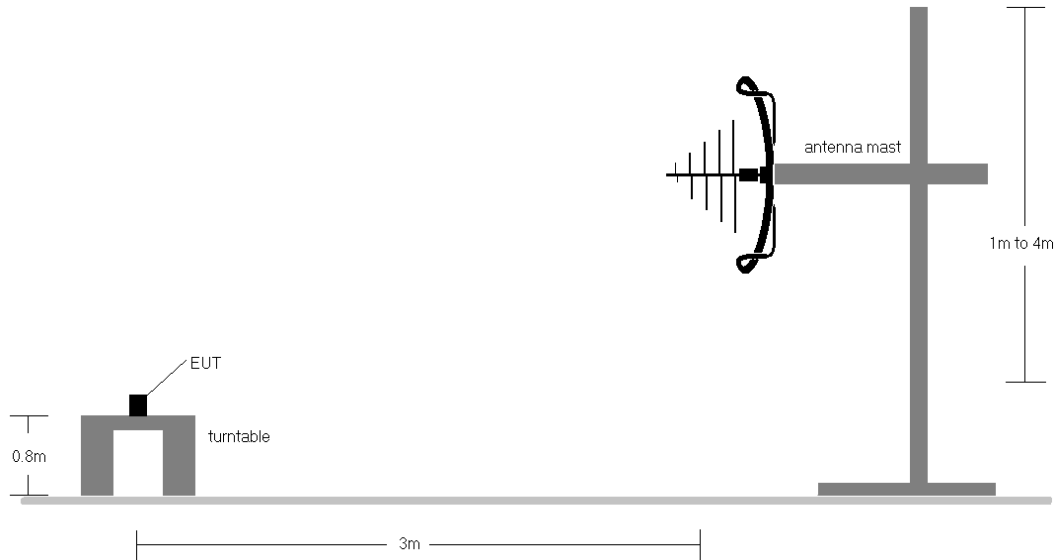


Plot 7-44. Radiated Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

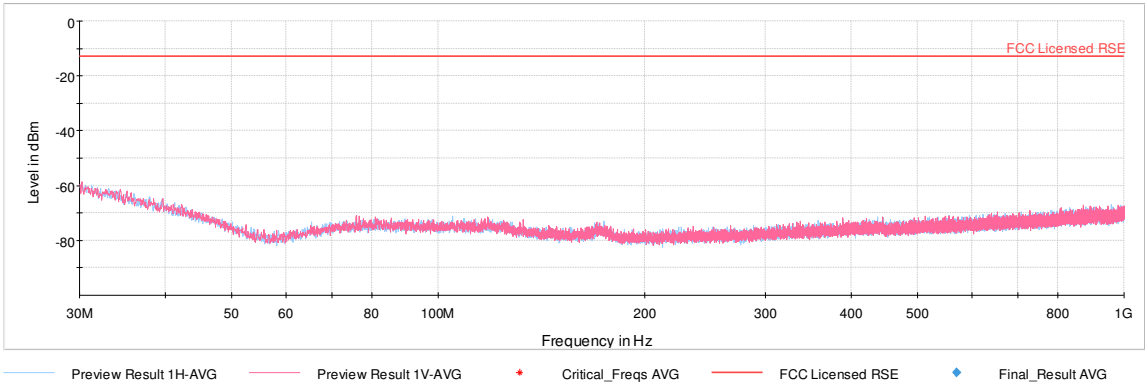

Plot 7-45. Radiated Spurious Plot (AWS WCDMA Mode – Ch. 1412)

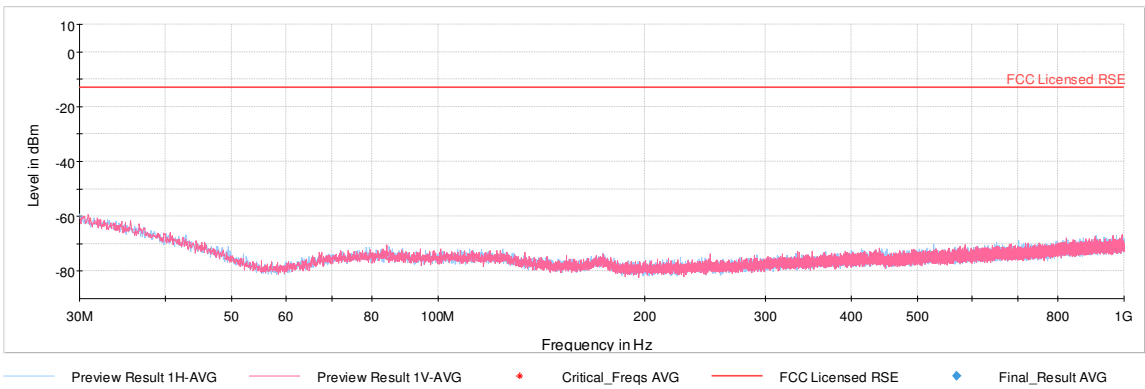

Plot 7-46. Radiated Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 52 of 60

7.9 Frequency Stability / Temperature Variation

\$2.1055, \$22.355, \$24.235, \$27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: BCG-A1860		FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 53 of 60


Frequency Stability / Temperature Variation

§2.1055, §22.355

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.82 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.82	+ 20	836,599,921	-79	-0.0000094
100 %		- 30	836,600,103	103	0.0000123
100 %		- 20	836,600,110	110	0.0000131
100 %		- 10	836,600,052	52	0.0000062
100 %		0	836,599,742	-258	-0.0000308
100 %		+ 10	836,599,664	-336	-0.0000402
100 %		+ 20	836,599,850	-150	-0.0000179
100 %		+ 30	836,600,139	139	0.0000166
100 %		+ 40	836,600,396	396	0.0000473
100 %		+ 50	836,599,890	-110	-0.0000131
BATT. ENDPOINT		3.42	+ 20	836,600,139	139

Table 7-14. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 54 of 60

Frequency Stability / Temperature Variation

\$2.1055, \$22.355

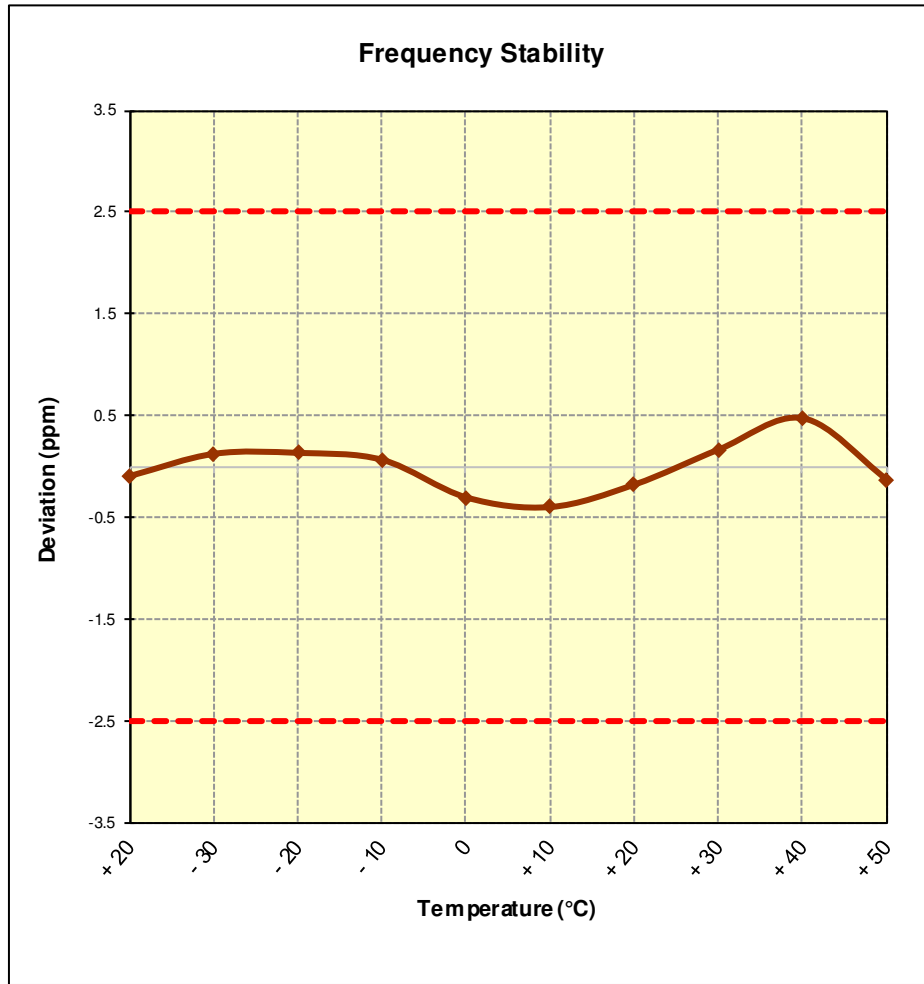



Figure 7-8. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 55 of 60

Frequency Stability / Temperature Variation

\$2.1055, \$27.54


OPERATING FREQUENCY:	1,732,600,000	Hz
CHANNEL:	1413	
REFERENCE VOLTAGE:	3.82	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.82	+ 20	1,732,600,321	321	0.0000185
100 %		- 30	1,732,599,999	-1	-0.0000001
100 %		- 20	1,732,600,069	69	0.0000040
100 %		- 10	1,732,599,979	-21	-0.0000012
100 %		0	1,732,600,052	52	0.0000030
100 %		+ 10	1,732,599,864	-136	-0.0000078
100 %		+ 20	1,732,599,939	-61	-0.0000035
100 %		+ 30	1,732,600,072	72	0.0000042
100 %		+ 40	1,732,599,995	-5	-0.0000003
100 %		+ 50	1,732,599,924	-76	-0.0000044
BATT. ENDPOINT	3.42	+ 20	1,732,600,092	92	0.0000053

Table 7-15. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: BCG-A1860		FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 56 of 60

Frequency Stability / Temperature Variation
§2.1055, §27.54

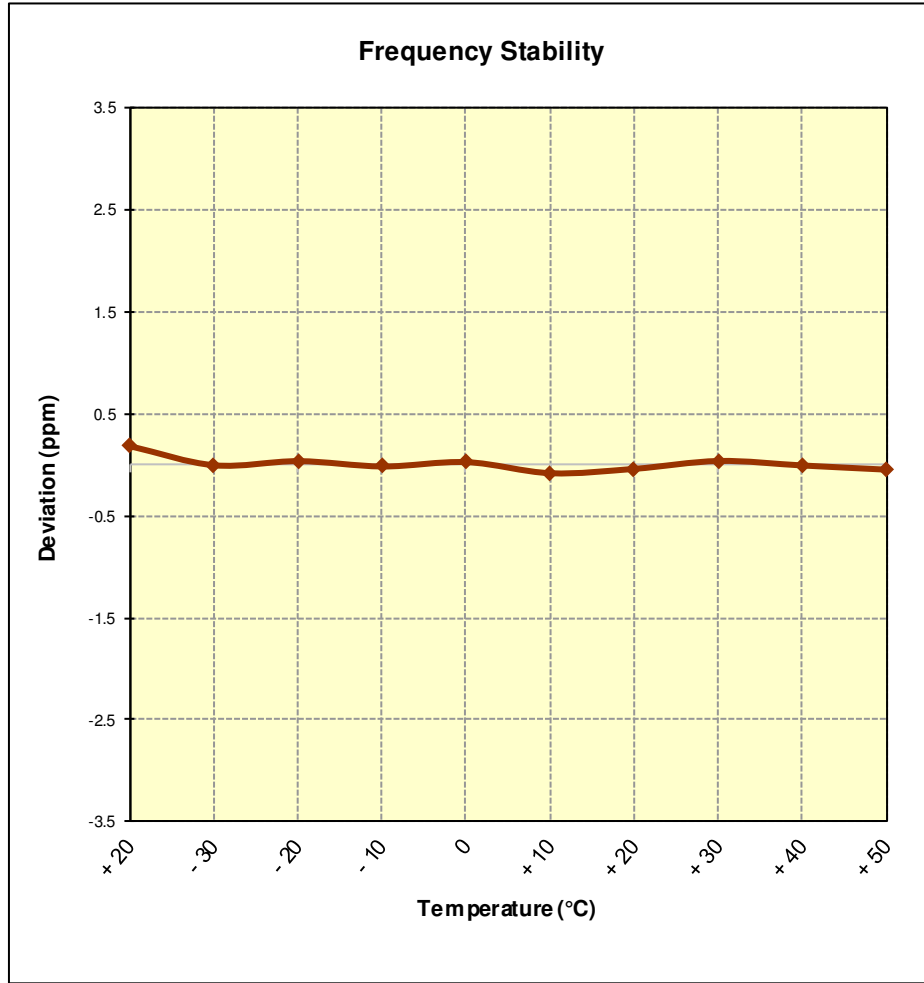



Figure 7-9. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 57 of 60

Frequency Stability / Temperature Variation

§2.1055, §24.235


OPERATING FREQUENCY:	1,880,000,000	Hz
CHANNEL:	9400	
REFERENCE VOLTAGE:	3.82	VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.82	+ 20	1,879,999,753	-247	-0.0000131
100 %		- 30	1,880,000,394	394	0.0000210
100 %		- 20	1,879,999,968	-32	-0.0000017
100 %		- 10	1,879,999,906	-94	-0.0000050
100 %		0	1,879,999,921	-79	-0.0000042
100 %		+ 10	1,879,999,521	-479	-0.0000255
100 %		+ 20	1,880,000,170	170	0.0000090
100 %		+ 30	1,879,999,613	-387	-0.0000206
100 %		+ 40	1,880,000,033	33	0.0000018
100 %		+ 50	1,880,000,004	4	0.0000002
BATT. ENDPOINT	3.42	+ 20	1,879,999,727	-273	-0.0000145

Table 7-16. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 58 of 60

Frequency Stability / Temperature Variation

§2.1055, §24.235

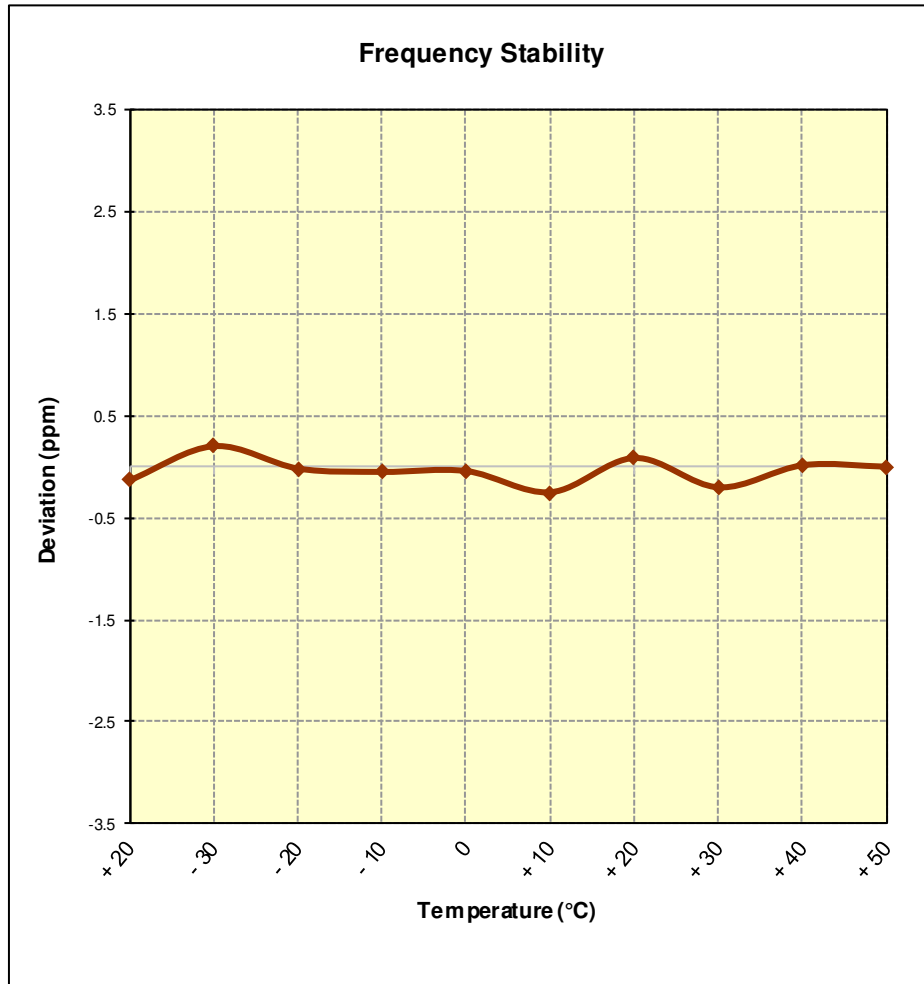




Figure 7-10. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 59 of 60

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Watch FCC ID: BCG-A1860** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules.

FCC ID: BCG-A1860	 FCC Pt. 22, 24, & 27 WCDMA MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1706160002-60-02-R4.BCG	Test Dates: 6/7-8/18/2017	EUT Type: Watch	Page 60 of 60