



PART 27 MEASUREMENT REPORT

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

06/08/2021- 08/04/2021

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C2106070046-03.BCG

FCC ID:	BCG-A2478
APPLICANT:	Apple Inc.

Application Type:

Certification

Model:

A2478

EUT Type:

Watch

FCC Classification:

PCS Licensed Transmitter Worn on Body (PCT)

FCC Rule Part:


27

Test Procedure(s):

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: BCG-A2478	 <small>Proud to be part of  element</small>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 1 of 89

T A B L E O F C O N T E N T S


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal	21
7.4	Band Edge Emissions at Antenna Terminal	33
7.5	Peak-Average Ratio	61
7.6	Radiated Power (EIRP).....	75
7.7	Radiated Spurious Emissions	79
7.8	Frequency Stability / Temperature Variation	86
8.0	CONCLUSION.....	89

FCC ID: BCG-A2478	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 2 of 89



MEASUREMENT REPORT

FCC Part 27



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	EIRP		Emission Designator
						Max. Power [mW]	Max. Power [dBm]	
WCDMA1700	5 MHz	Spread Spectrum	1712.4 - 1752.6	4.0933	3.18	14.125	11.50	4M09F9W
LTE Band 4	1.4 MHz	QPSK	1710.7 - 1754.3	1.1081	5.89	15.849	12.00	1M11G7W
		16QAM	1710.7 - 1754.3	1.1058	6.58	13.804	11.40	1M11D7W
	3 MHz	QPSK	1711.5 - 1753.5	2.7326	5.92	15.849	12.00	2M73G7W
		16QAM	1711.5 - 1753.5	2.7380	6.60	13.772	11.39	2M74D7W
	5 MHz	QPSK	1712.5 - 1752.5	4.5704	5.92	15.849	12.00	4M57G7W
		16QAM	1712.5 - 1752.5	4.5529	6.54	13.646	11.35	4M55D7W
	10MHz	QPSK	1715.0 - 1750.0	9.1191	5.75	15.849	12.00	9M12G7W
		16QAM	1715.0 - 1750.0	5.4867	6.50	13.740	11.38	5M49D7W
	15 MHz	QPSK	1717.5 - 1747.5	13.7493	5.95	15.849	12.00	13M7G7W
		16QAM	1717.5 - 1747.5	6.2117	6.51	13.709	11.37	6M21D7W
	20 MHz	QPSK	1720.0 - 1745.0	18.2773	5.53	15.849	12.00	18M3G7W
		16QAM	1720.0 - 1745.0	7.5470	6.51	13.583	11.33	7M55D7W
LTE Band 66	1.4 MHz	QPSK	1710.7 - 1779.3	1.1081	5.73	15.849	12.00	1M11G7W
		16QAM	1710.7 - 1779.3	1.1058	6.39	13.397	11.27	1M11D7W
	3 MHz	QPSK	1711.5 - 1778.5	2.7326	5.79	15.849	12.00	2M73G7W
		16QAM	1711.5 - 1778.5	2.7380	6.45	13.709	11.37	2M74D7W
	5 MHz	QPSK	1712.5 - 1777.5	4.5704	5.79	15.849	12.00	4M57G7W
		16QAM	1712.5 - 1777.5	4.5529	6.36	13.836	11.41	4M55D7W
	10 MHz	QPSK	1715.0 - 1775.0	9.1191	5.75	15.849	12.00	9M12G7W
		16QAM	1715.0 - 1775.0	5.4867	6.36	13.772	11.39	5M49D7W
	15 MHz	QPSK	1717.5 - 1772.5	13.7493	6.03	15.849	12.00	13M7G7W
		16QAM	1717.5 - 1772.5	6.2117	6.36	13.804	11.40	6M21D7W
	20 MHz	QPSK	1720.0 - 1770.0	18.2773	5.76	15.849	12.00	18M3G7W
		16QAM	1720.0 - 1770.0	7.5470	6.55	13.836	11.41	7M55D7W

Overview Table

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 3 of 89

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2478	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 4 of 89

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2478**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: J3DH93TR29, K6GG26L469, H3695YHQYW

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE/WCDMA	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE	Mid band/ High band	802.11 a/n	Ch.5, Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✗	✓	✗	✓
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✓	✗	✓	✗
Config 8	✓	✗	✓	✗	✓
Config 9	✗	✓	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

Table 2-1. Simultaneous Transmission Configurations

✓ = Support ; ✗ = NOT Support

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be config 10 and reported in RF UNII, RF Bluetooth and RF Part 27b test reports.

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 5 of 89

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain (dBi)
LTE Band 4/66	-12.5
WCDMA1700	-12.5

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple Macbook w/AC/DC Adapter	Model: Model:	A1398 A1435	S/N: S/N:	C2QKP008F6F3 N/A
2	Apple USB-C cable w/ Charging Dock w/Dock	Model: Model: Model:	N/A A2687 X241	S/N: S/N: S/N:	N/A FV411420544MW6M4H N/A
3	Apple Magnetic Charger Apple Magnetic Charger	Model: Model:	A2515 A2515	S/N: S/N:	DLC035200UJMFR0AJ DLC035202KRMFR0A2
4	Pathfinder Falcon SiP Socket	Model: Model:	920-098626-01 P2 X2010BPF 137	S/N: S/N:	DLC034200APQ6PM1E DLC037700AYQ6PM1R
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Store Bracelet Assy1	Model:	N/A	S/N:	DLC1197001R19G21N

Table 2-3. Test Support Equipment

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 6 of 89	

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The worst case configuration was investigated for all combinations of the three materials, aluminum, stainless steel, and Titanium and various types of wristbands, metal and non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device only supports 27RBs or less for 16-QAM uplink.

2.6 Software and Firmware

The test was conducted with firmware version watchOS 8.0 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCG-A2478	 <p>PCTEST® Proud to be part of element</p>	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 7 of 89

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 8 of 89

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.65
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (30MHz-1GHz)	4.30
Radiated Disturbance (1-18GHz)	4.78
Radiated Disturbance (>18GHz)	4.79

FCC ID: BCG-A2478	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 9 of 89

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/31/2021	Annual	3/31/2022	MY49430244
Keysight Technology	N9040B	UXA Signal Analyzer	12/19/2020	Annual	12/19/2021	MY57212015
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/11/2020	Annual	8/11/2021	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	9/28/2020	Annual	9/28/2021	92009574
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	9/15/2020	Annual	9/15/2021	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/3/2021	Annual	5/3/2022	205956
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	12/3/2020	Annual	12/3/2021	102327
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	12/3/2020	Annual	12/3/2021	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/16/2021	Annual	3/16/2022	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	6/11/2021	Annual	6/11/2022	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	11/9/2020	Annual	11/9/2021	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/13/2020	Annual	10/13/2021	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	9/24/2020	Annual	9/24/2021	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/29/2021	Annual	4/29/2022	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	10/2/2020	Annual	10/2/2021	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/5/2021	Annual	4/5/2022	100519

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 10 of 89

6.0 SAMPLE CALCULATIONS

Emission Designator

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

W = Combination of Any

Spurious Radiated Emission

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $-$ (-24.80).

FCC ID: BCG-A2478	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 11 of 89

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A2478
 FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)
 Mode(s): WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 27.53	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-Average Ratio	27.50(d)(5)	< 13 dB	PASS	Section 7.5
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
	Equivalent Isotropic Radiated Power (WCDMA)	27.50(d)(4)	< 1 Watts max. EIRP	PASS	Section 7.6
	Equivalent Isotropic Radiated Power (LTE Band 4/66)			PASS	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 27.53	-13 dBm for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool 1.0.

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 12 of 89

7.2 Occupied Bandwidth

\$2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

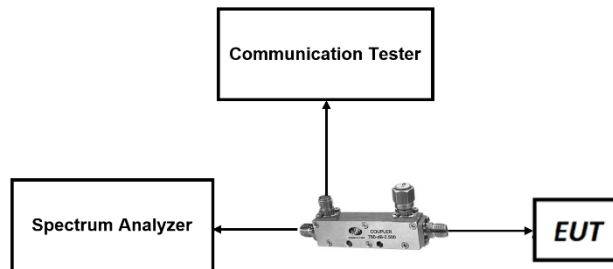



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 13 of 89

LTE Band 66/4

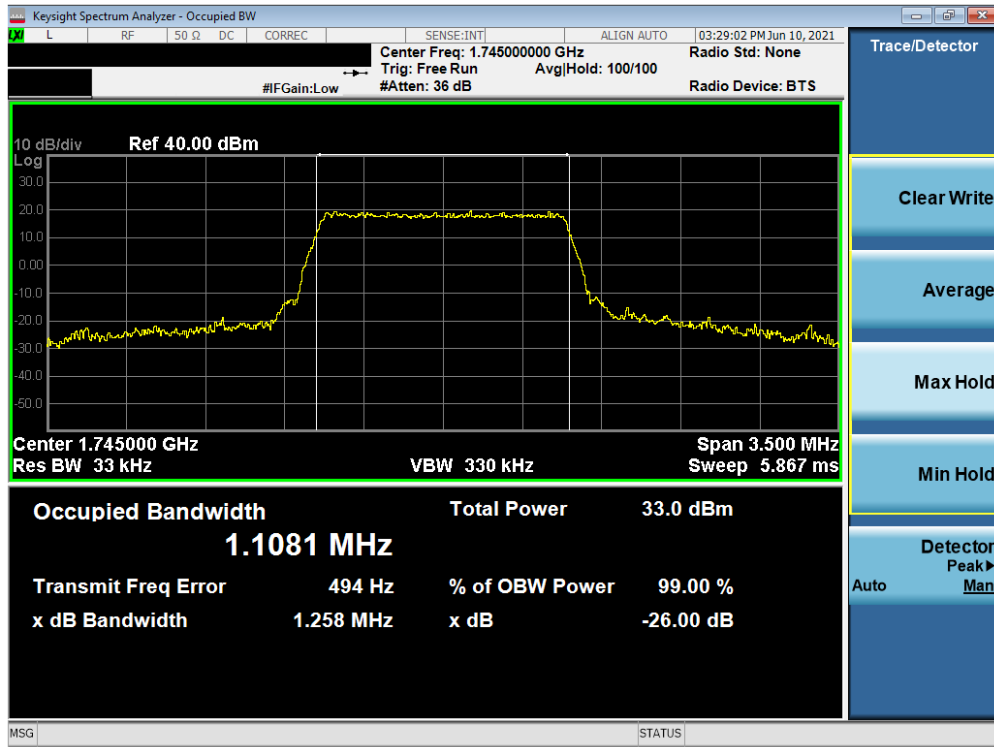


Plot 7-1. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz QPSK - Full RB)

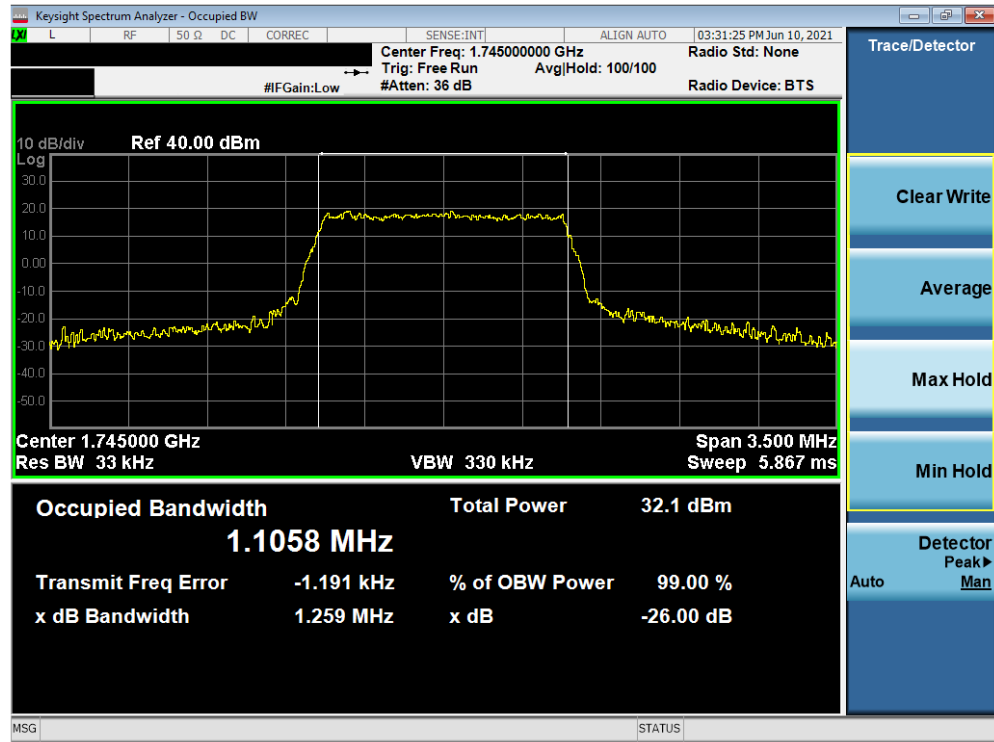


Plot 7-2. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 14 of 89

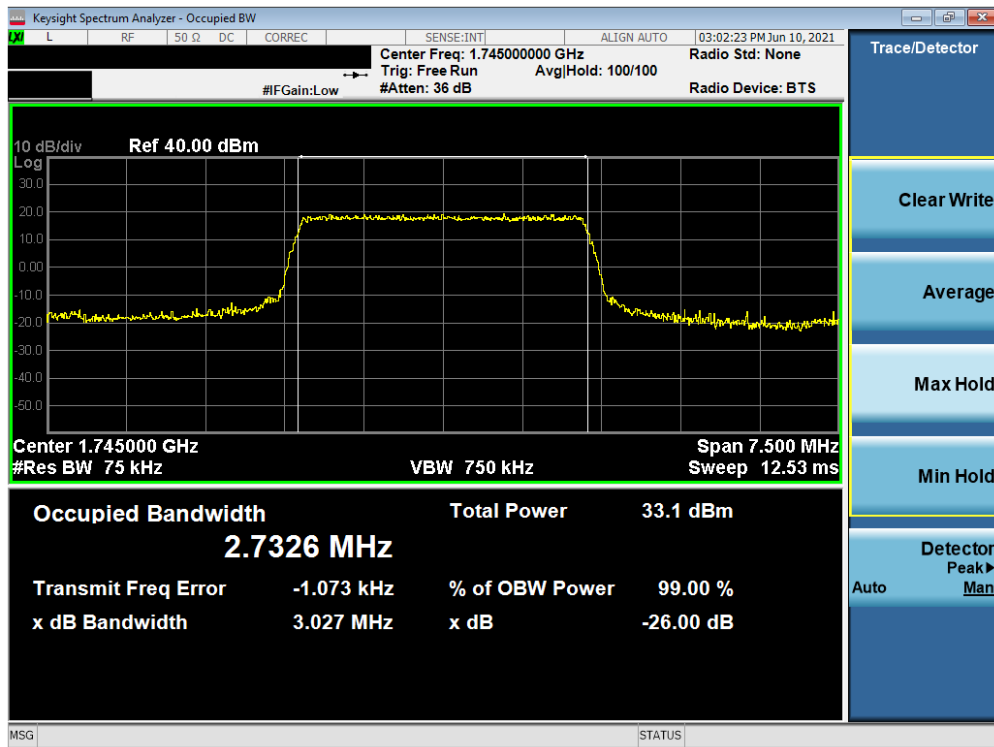


Plot 7-3. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz QPSK - Full RB)

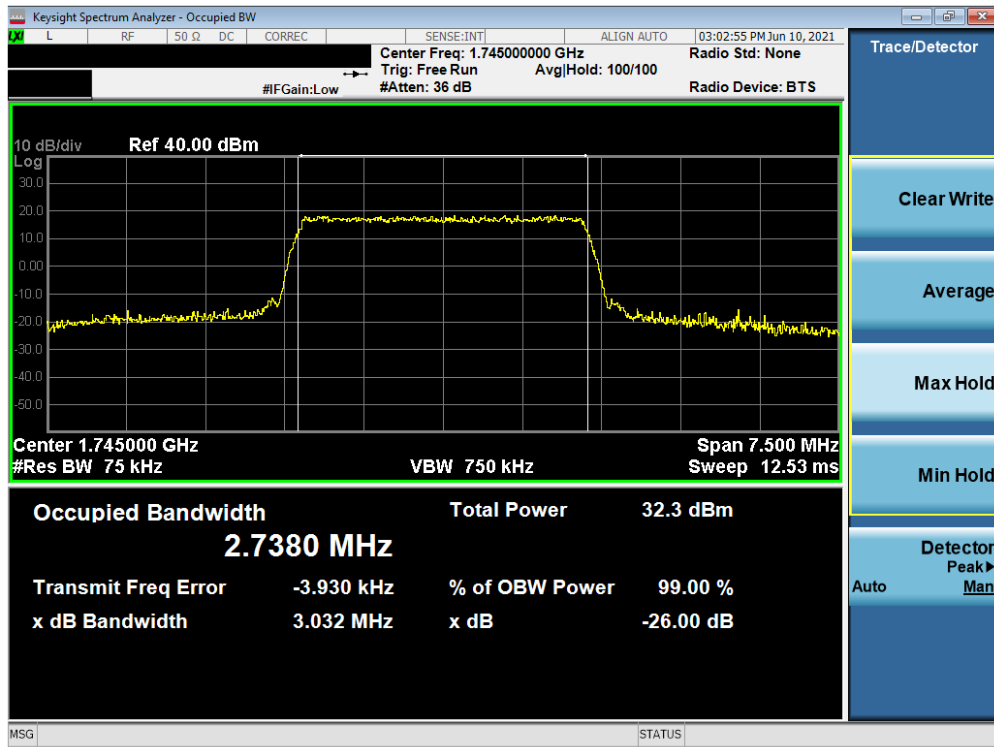


Plot 7-4. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 15 of 89

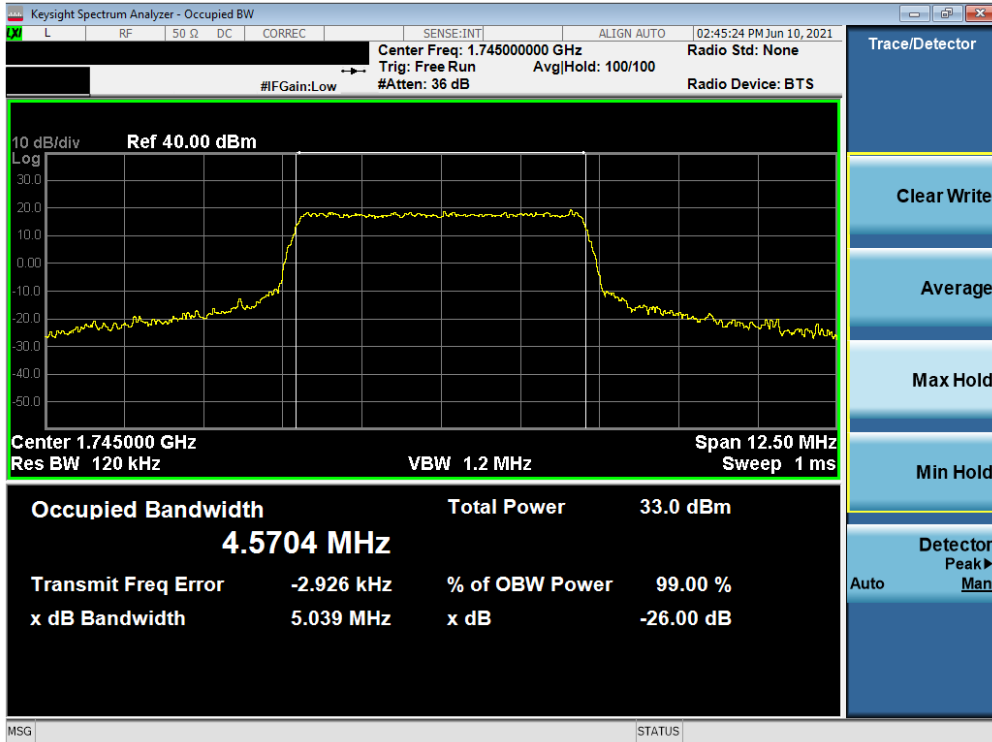


Plot 7-5. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz QPSK - Full RB)

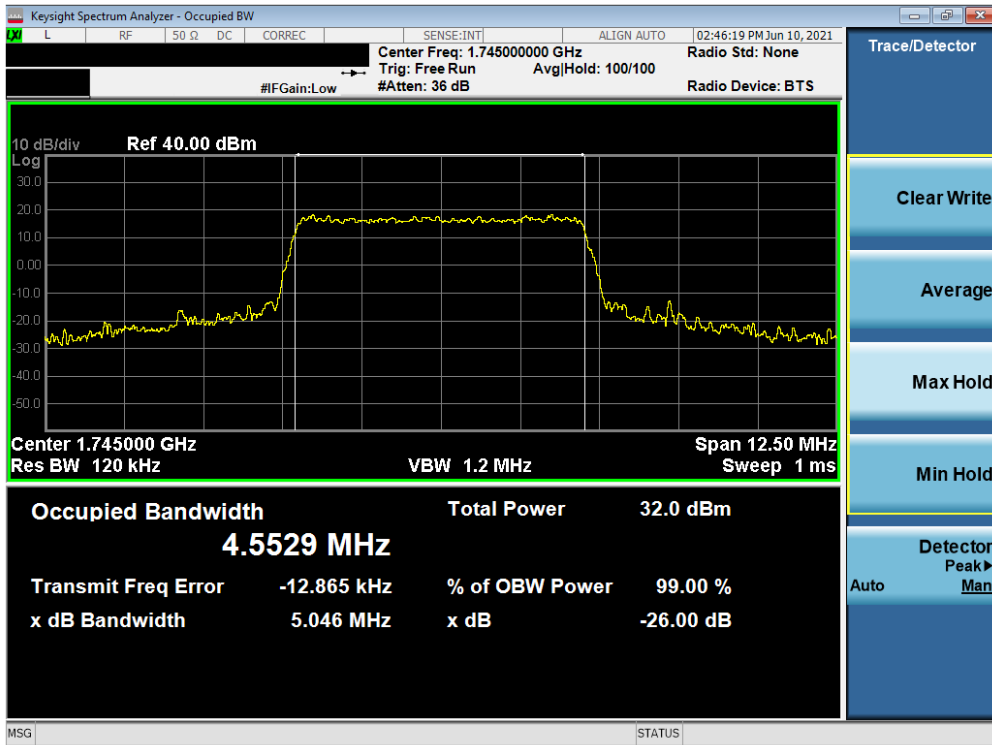


Plot 7-6. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 16 of 89

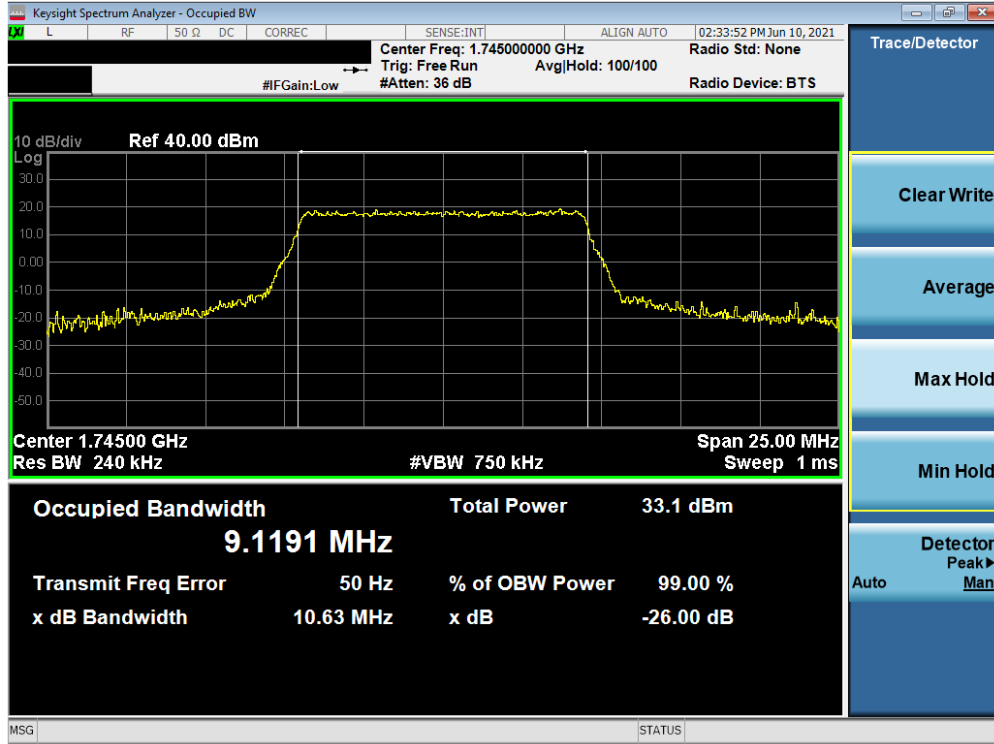


Plot 7-7. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz QPSK - Full RB)

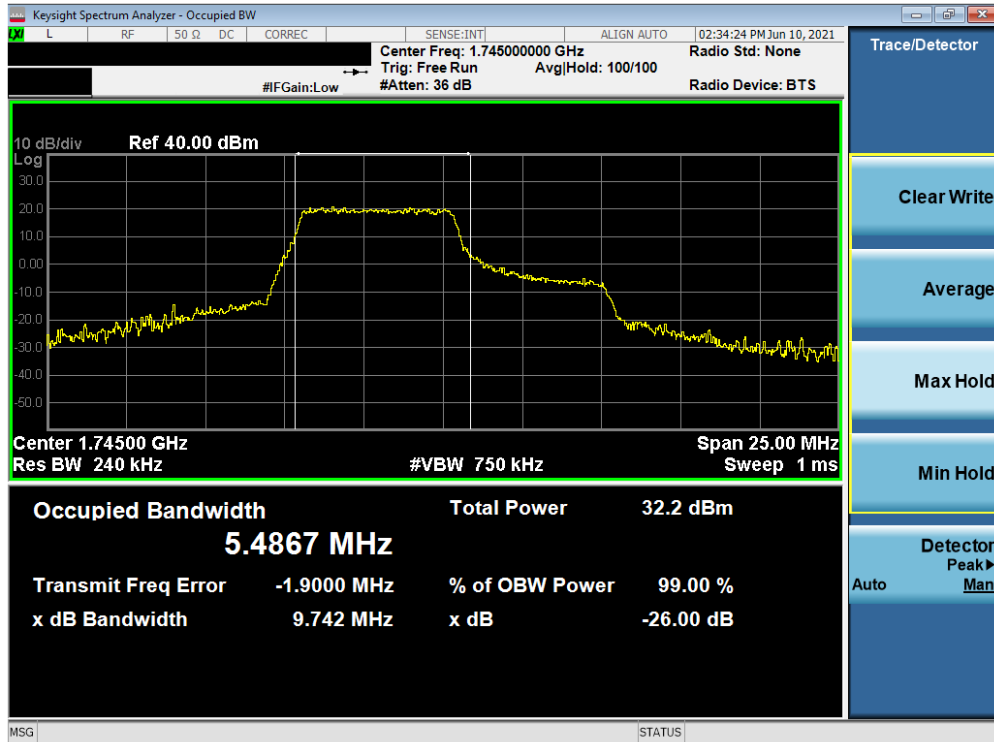


Plot 7-8. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 17 of 89

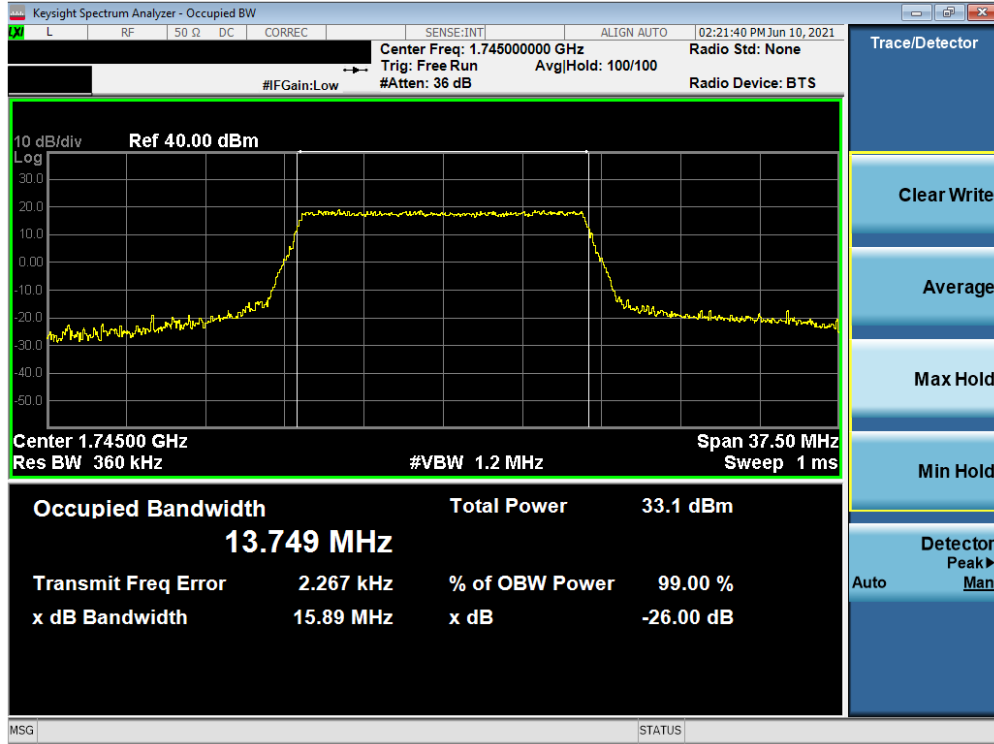


Plot 7-9. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz QPSK - Full RB)

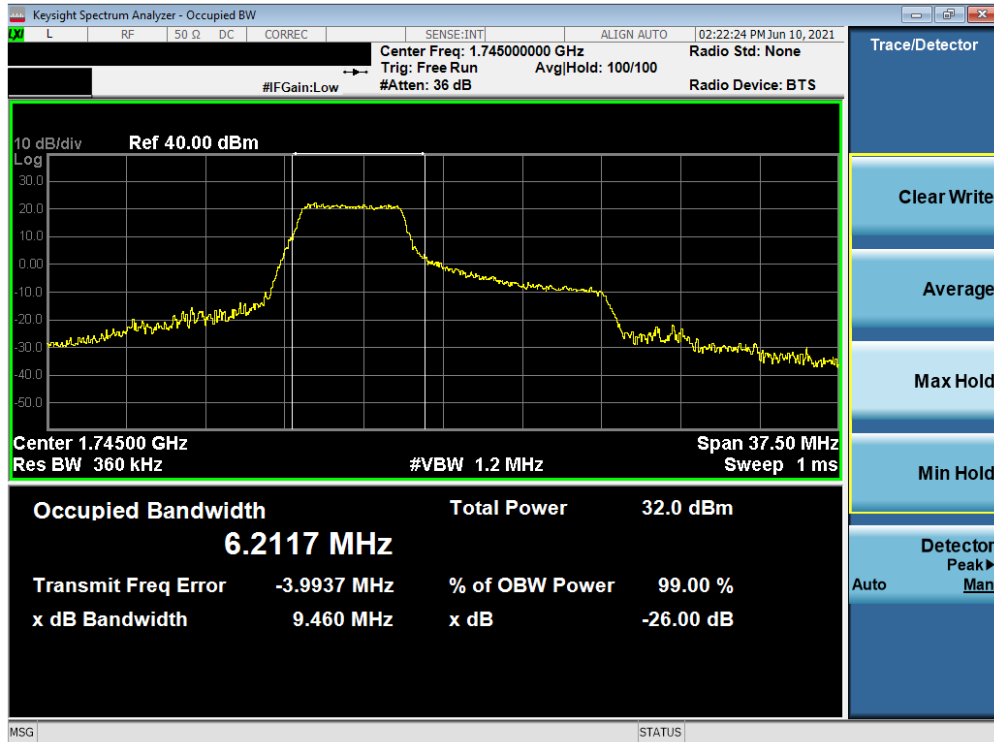


Plot 7-10. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 18 of 89

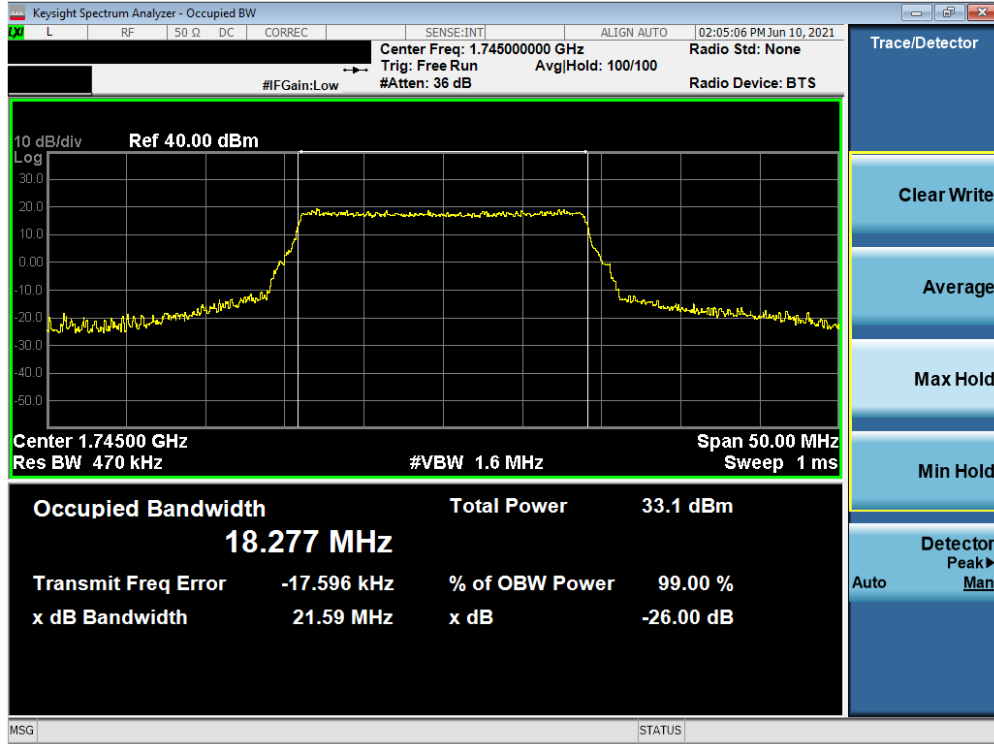

Plot 7-11. Occupied Bandwidth Plot (LTE Band 66/4 - 20MHz QPSK - Full RB)

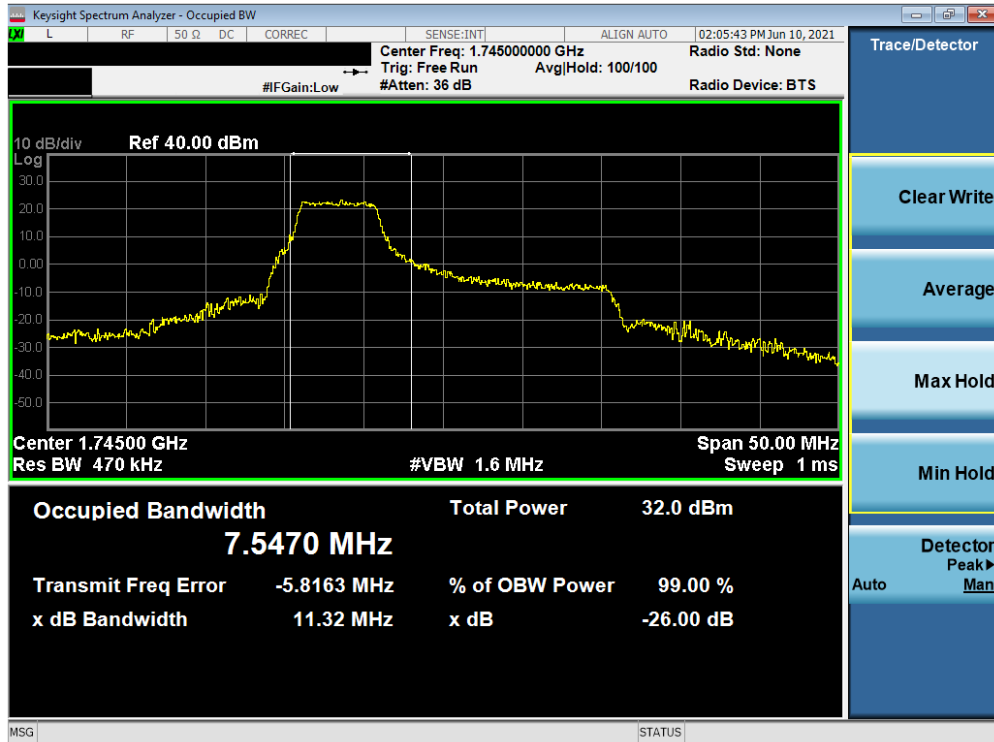

Plot 7-12. Occupied Bandwidth Plot (LTE Band 66/4 - 20MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 19 of 89

WCDMA AWS



Plot 7-13. Occupied Bandwidth Plot (WCDMA, Ch. 1413)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 20 of 89

7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051, §27.53

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 18GHz (separated into at least two plots per channel)
2. RBW \geq 100kHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

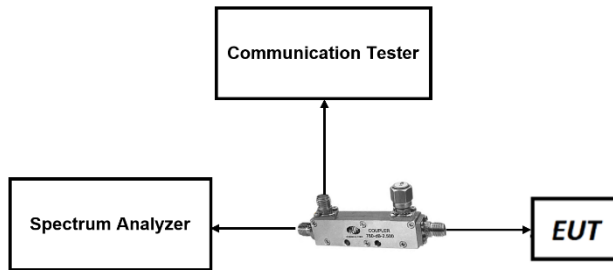


Figure 7-2. Test Instrument & Measurement Setup


FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 21 of 89

Test Notes


1. Per Part 27, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCG-A2478	 Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 22 of 89

LTE Band 66/4

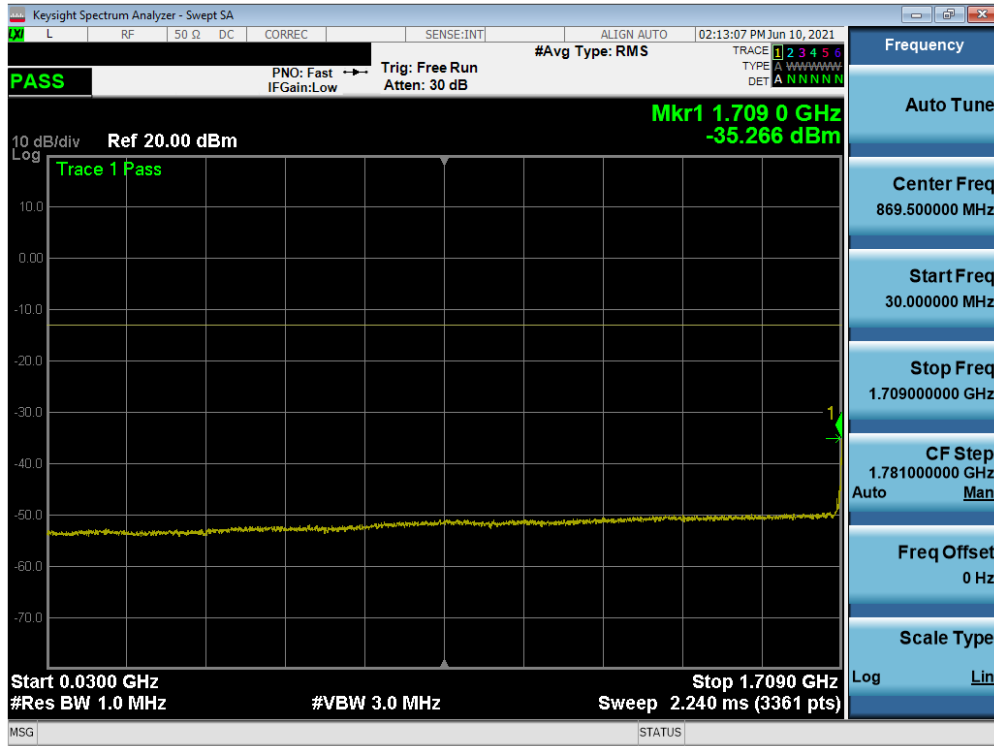


Plot 7-14. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

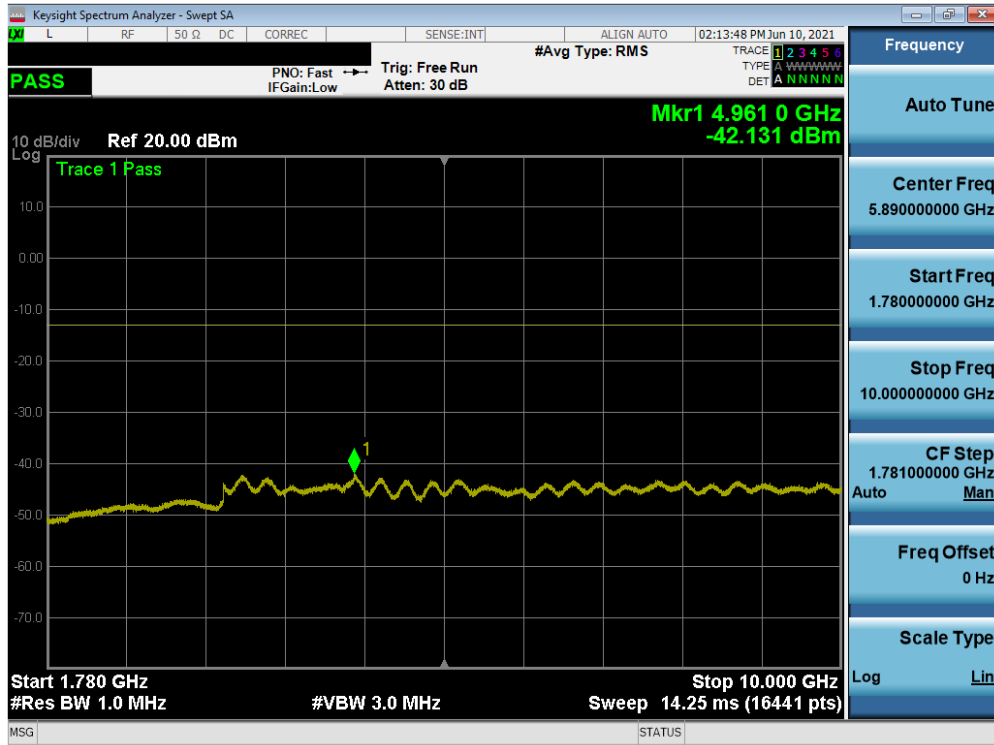


Plot 7-15. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 23 of 89

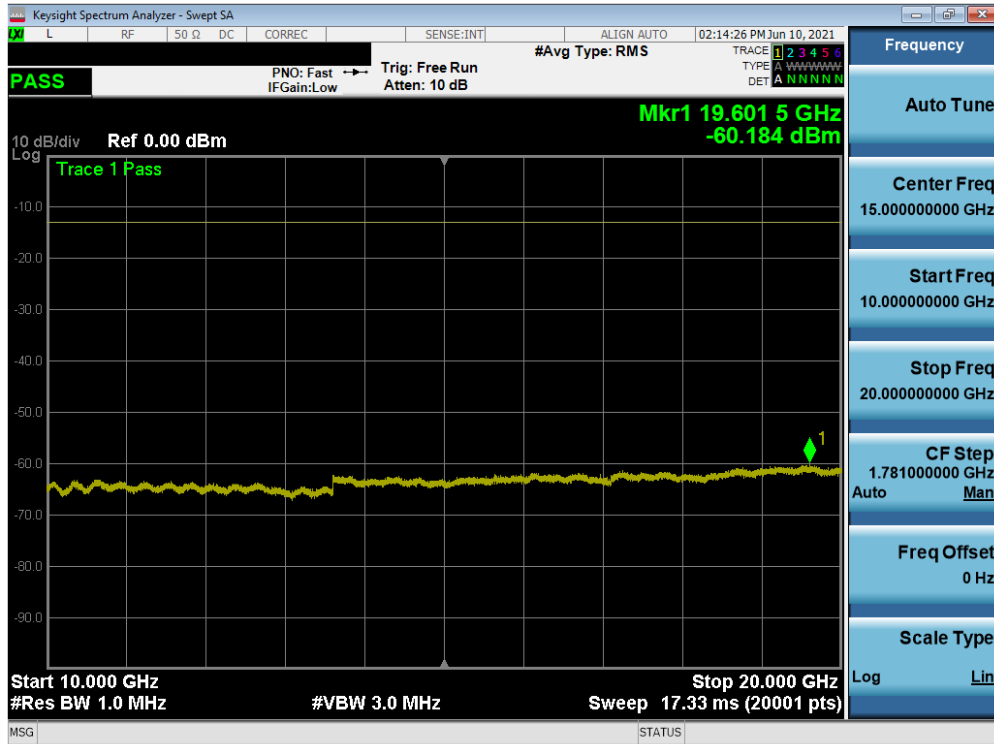


Plot 7-16. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

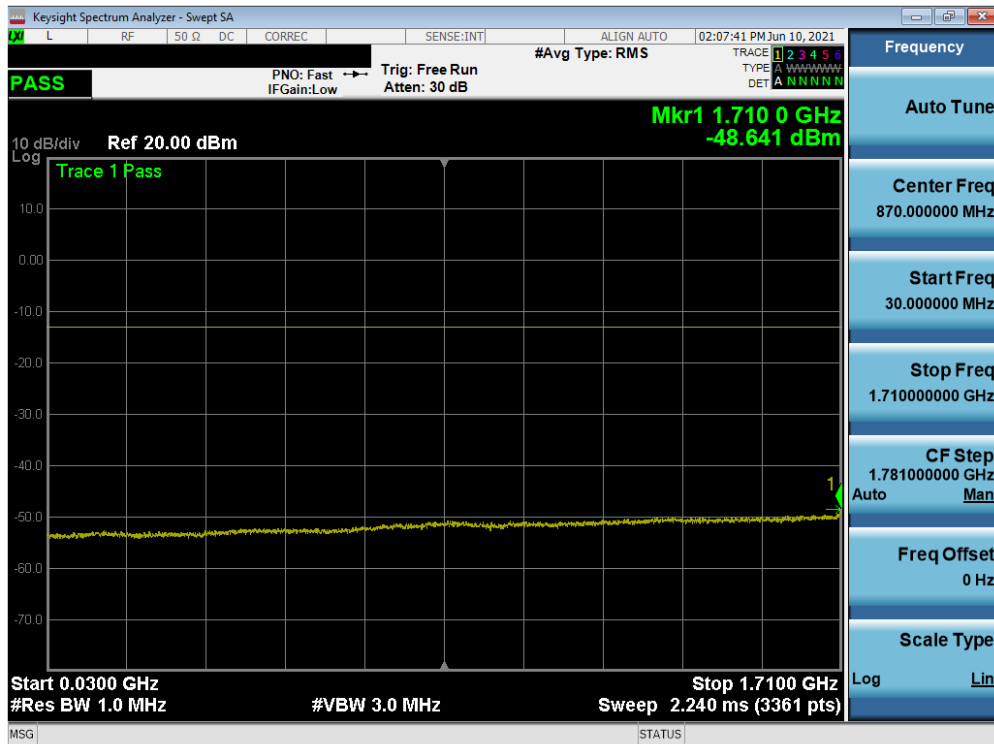


Plot 7-17. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 24 of 89

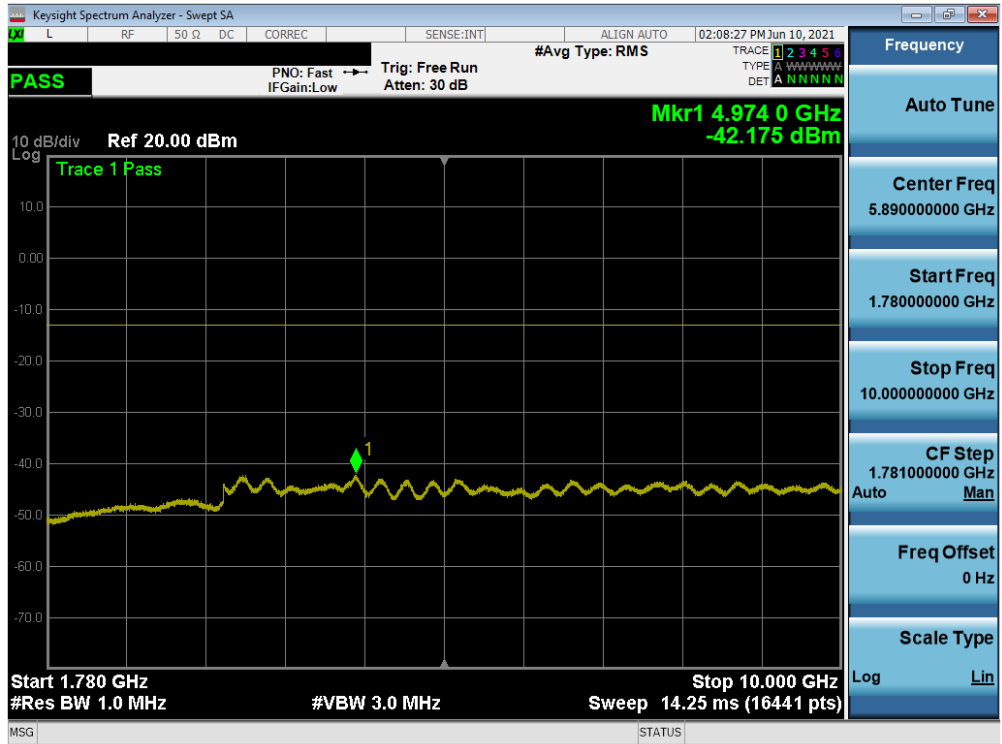


Plot 7-18. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

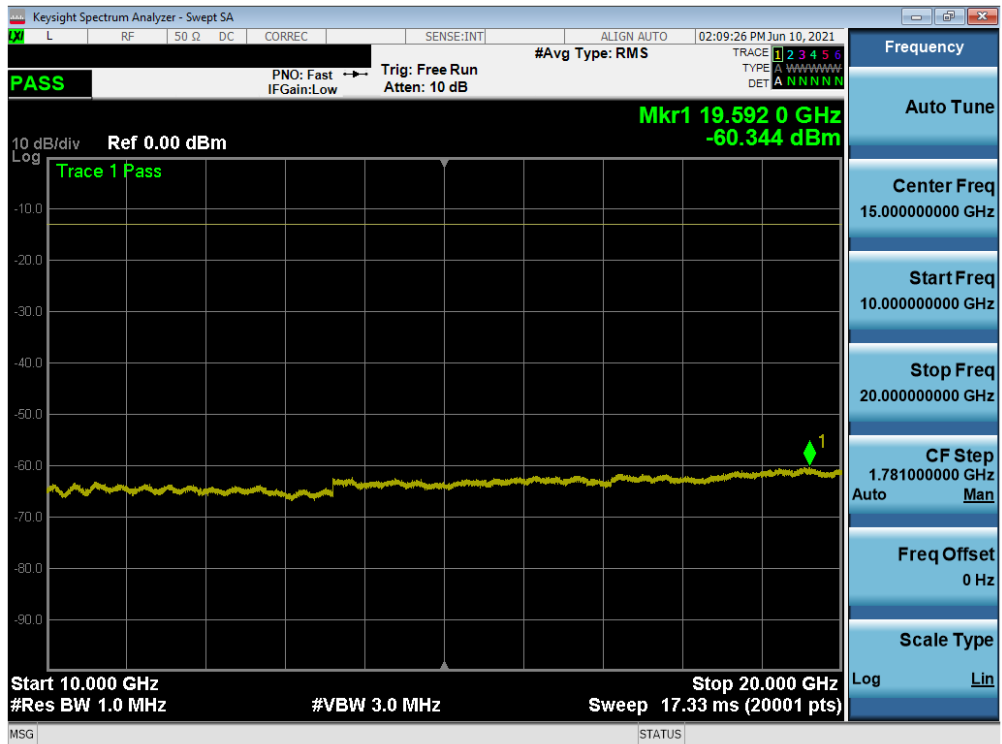


Plot 7-19. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 25 of 89

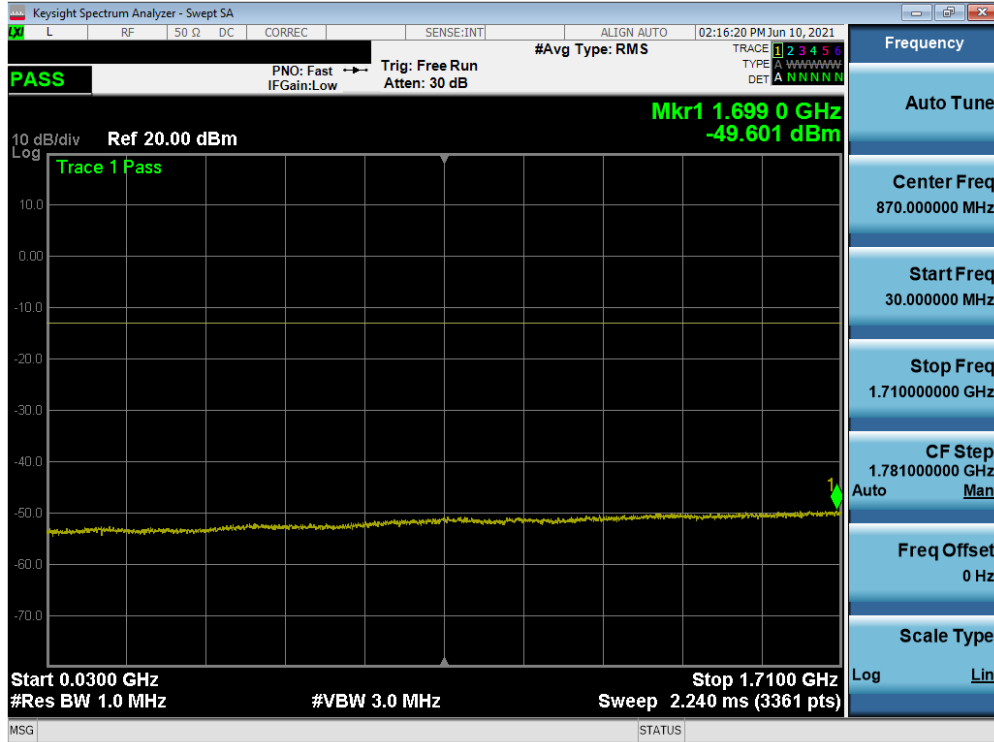


Plot 7-20. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

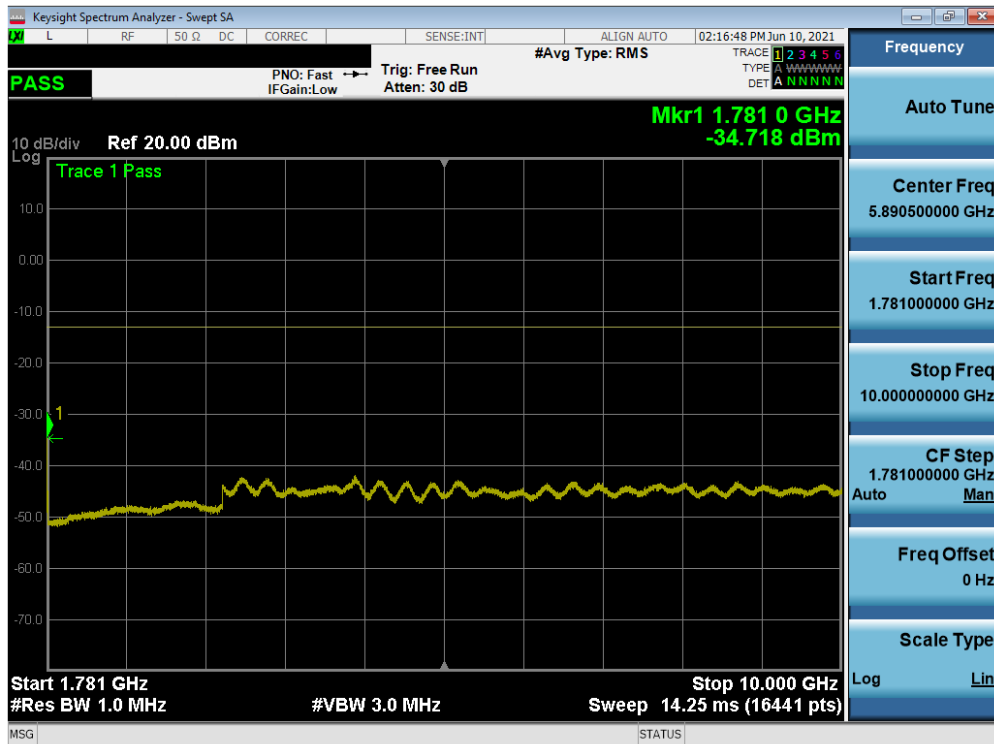

Plot 7-21. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 26 of 89

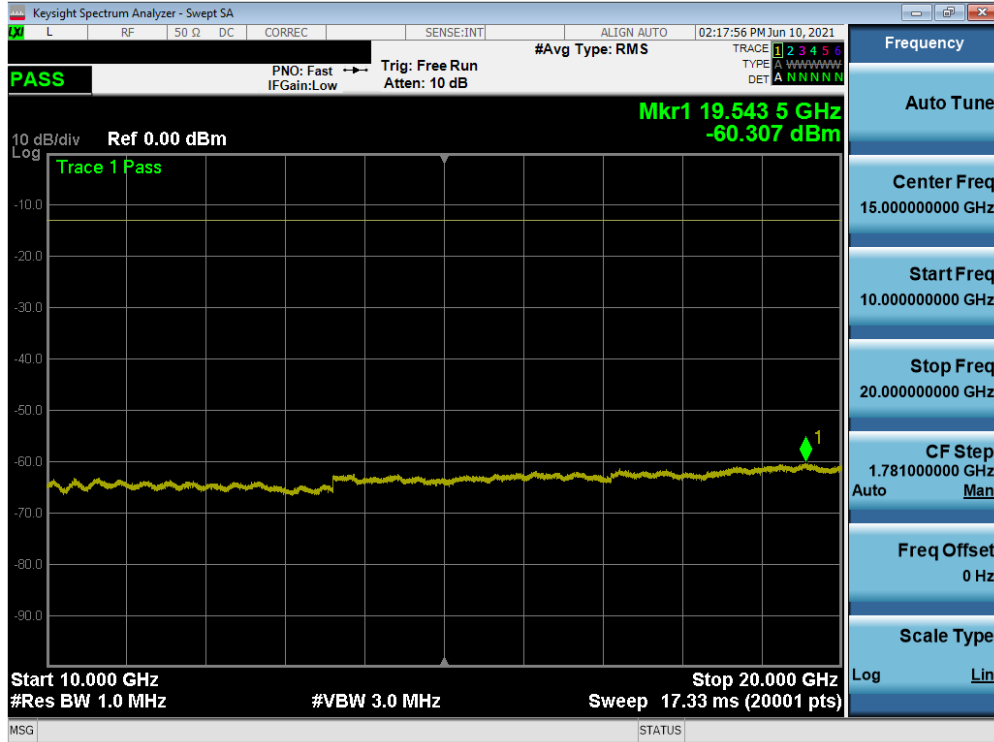


Plot 7-22. CSE (LTE Band 66/4 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 27 of 89

WCDMA AWS

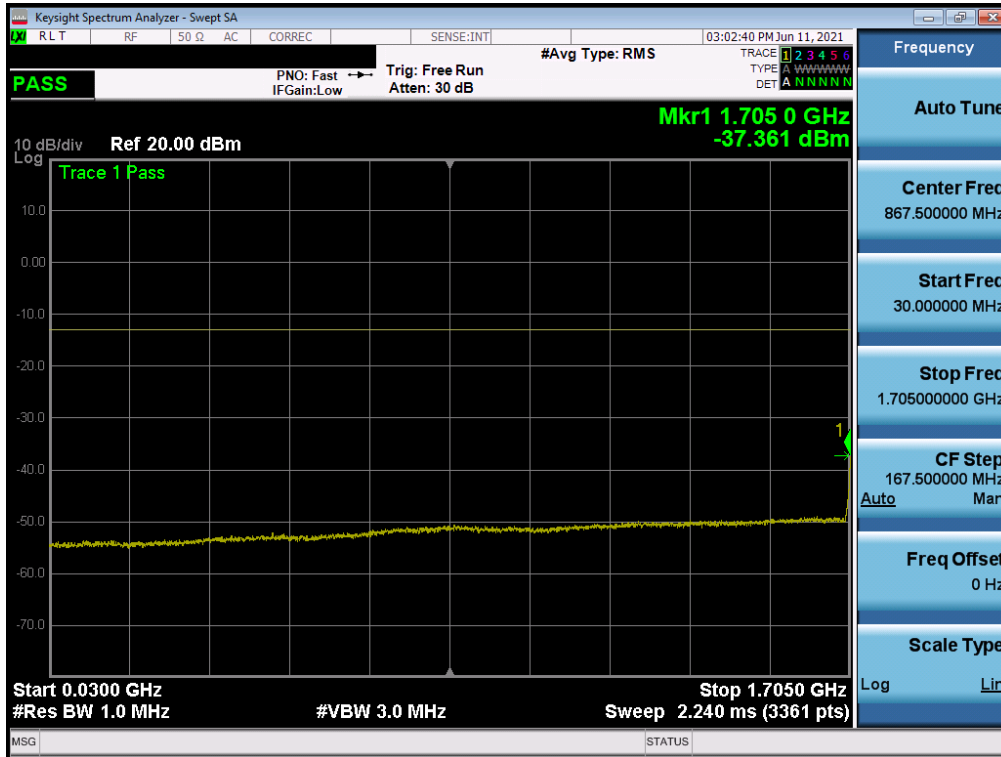


Plot 7-23. Conducted Spurious Plot (WCDMA Ch. 1312- Low Channel)

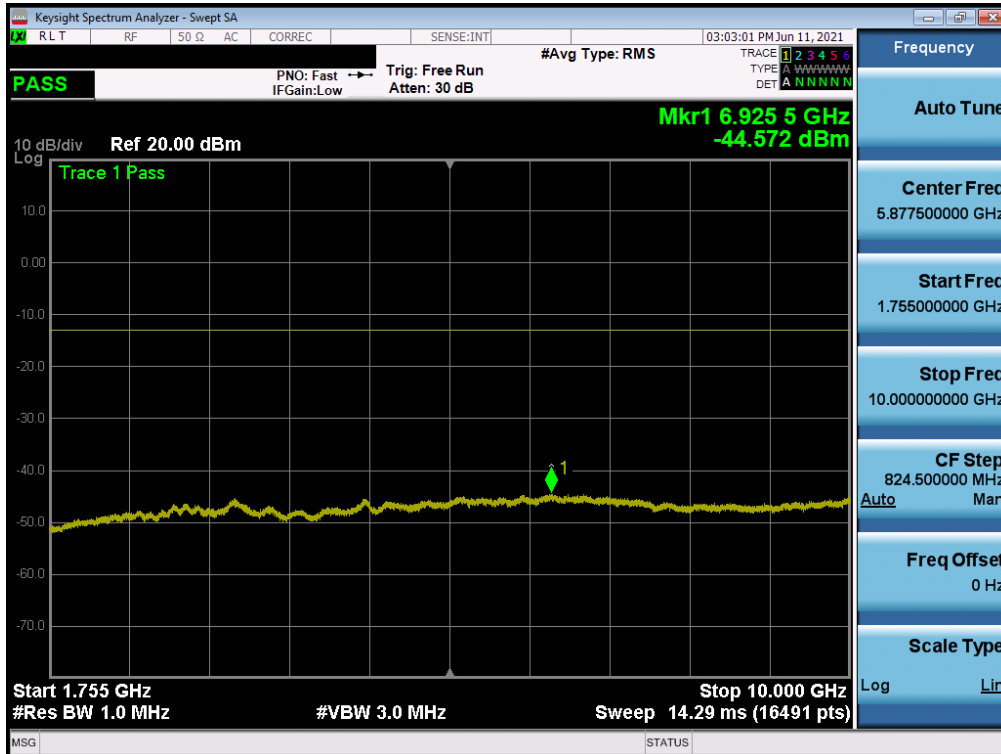


FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 28 of 89

Plot 7-24. Conducted Spurious Plot (WCDMA Ch. 1312- Low Channel)

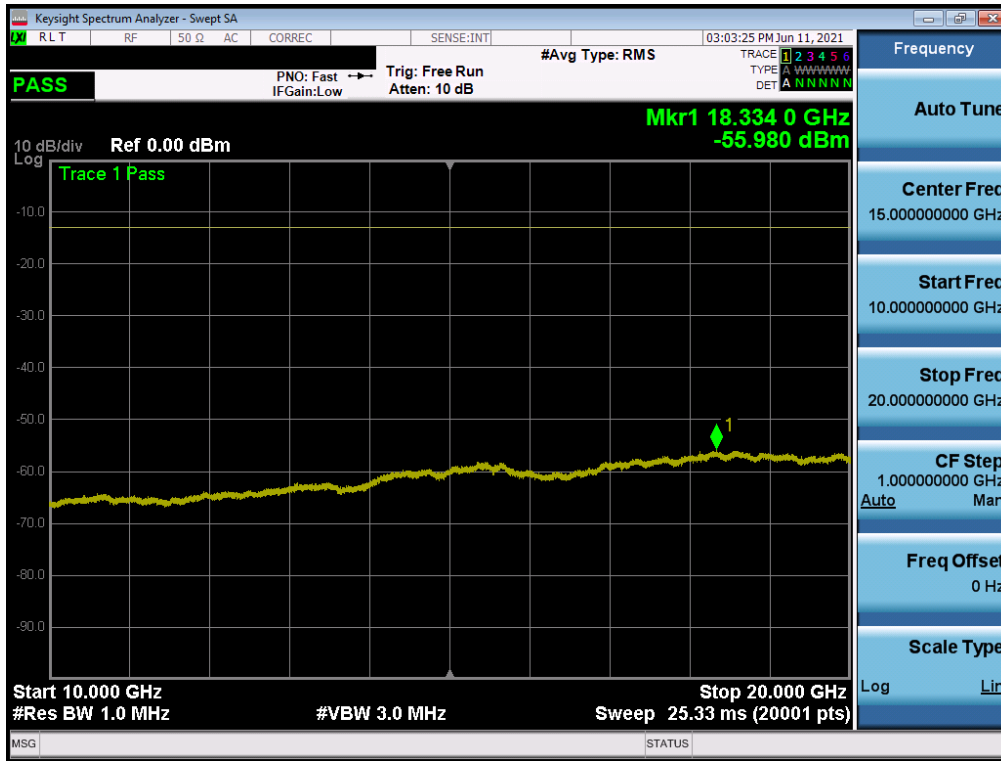


Plot 7-25. Conducted Spurious Plot (WCDMA Ch. 1312- Low Channel)

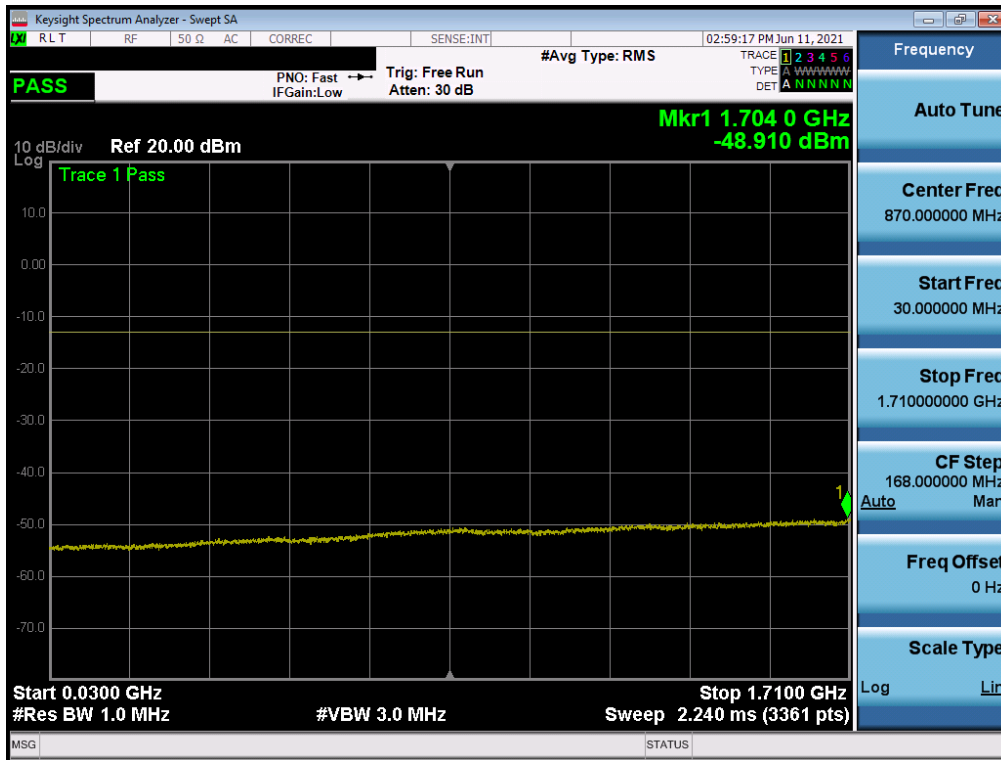

Plot 7-26. Conducted Spurious Plot (WCDMA Ch. 1413- Mid Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 29 of 89

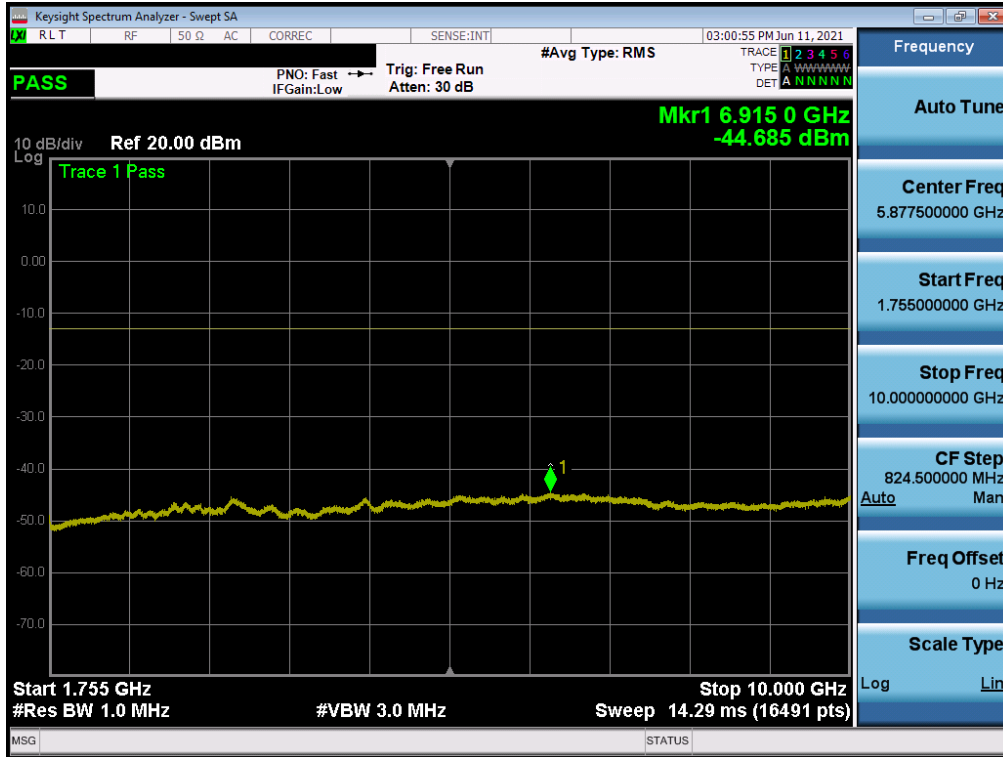


Plot 7-27. Conducted Spurious Plot (WCDMA Ch. 1413- Mid Channel)




Plot 7-28. Conducted Spurious Plot (WCDMA Ch. 1413- Mid Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 30 of 89

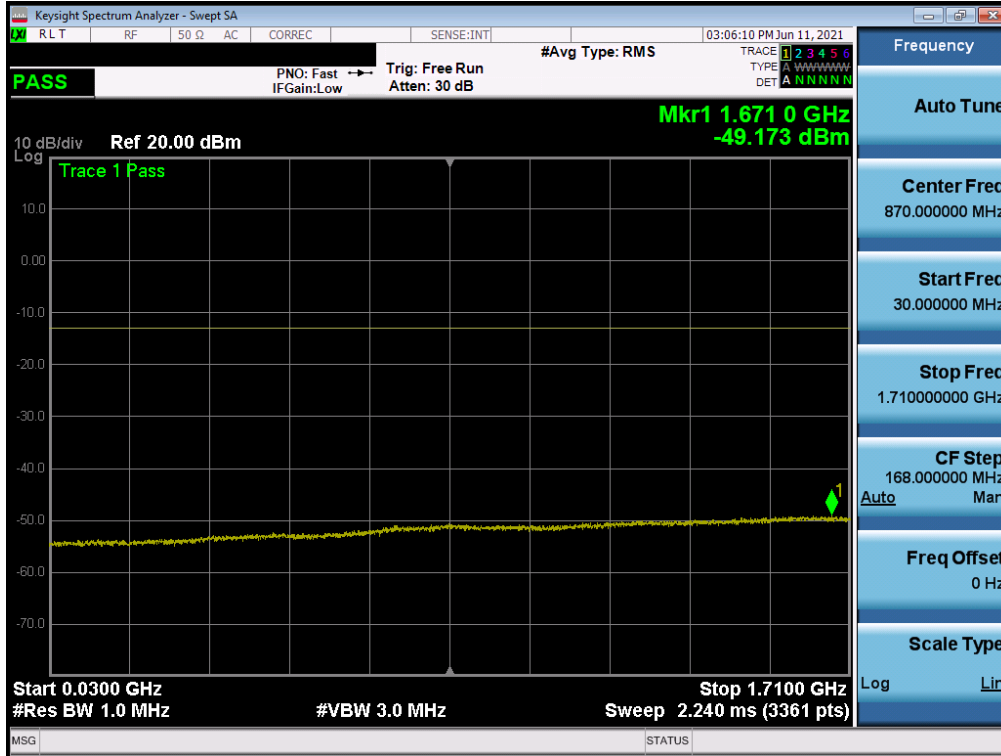


Plot 7-29. Conducted Spurious Plot (WCDMA Ch. 1513- High Channel)

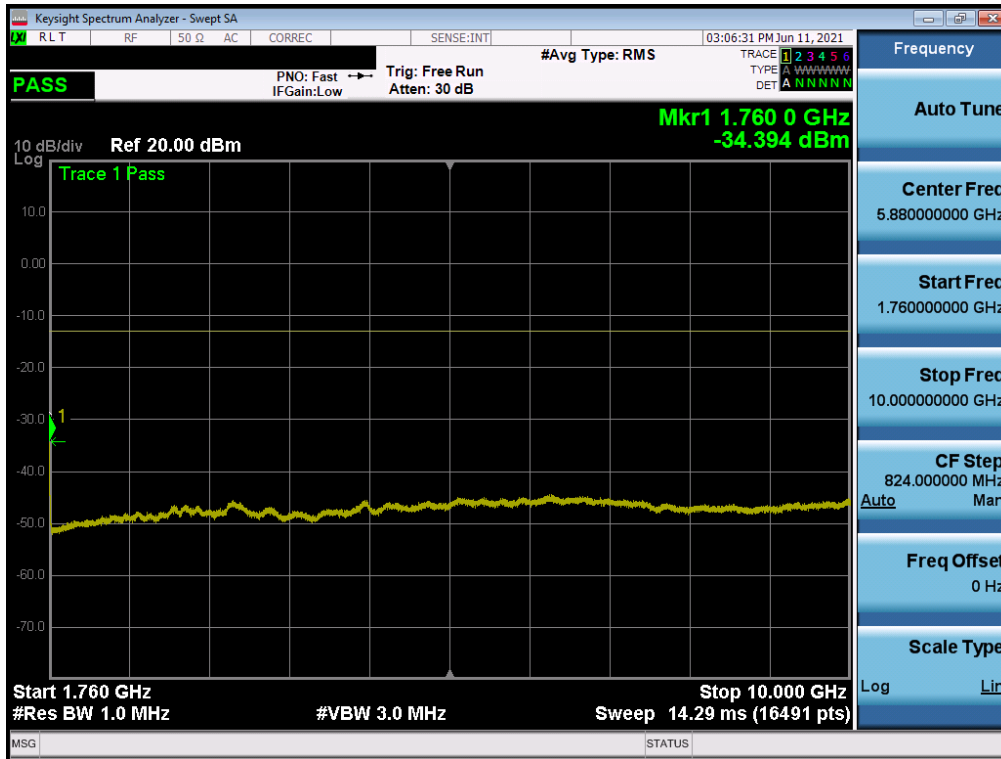

Plot 7-30. Conducted Spurious Plot (WCDMA Ch. 1513- High Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 31 of 89

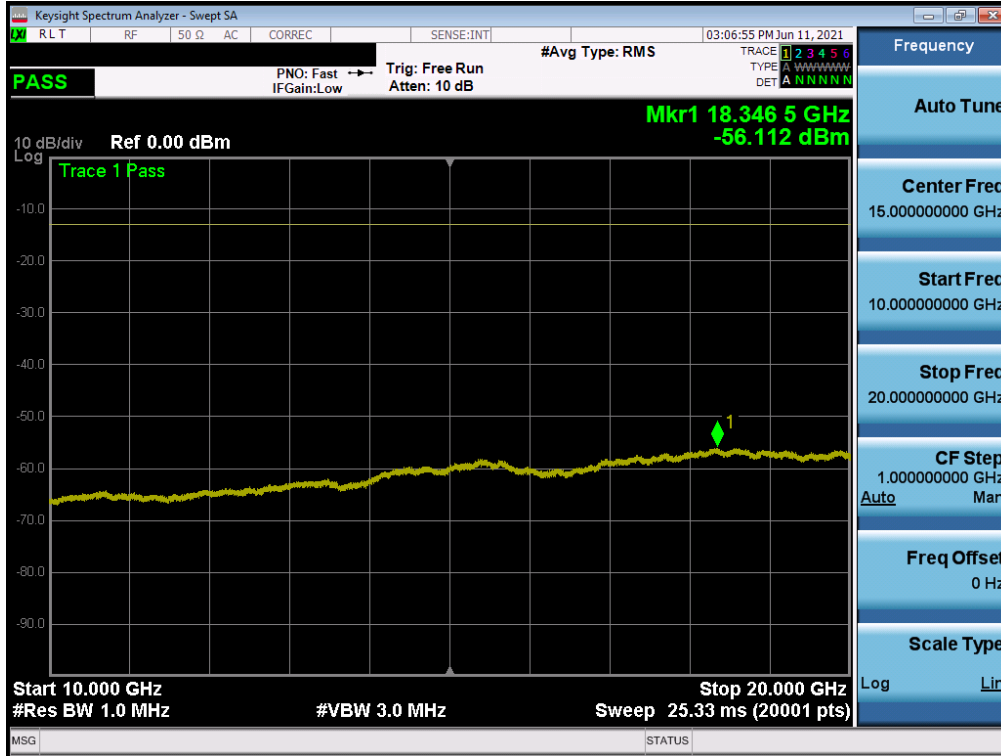

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 1513- High Channel)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 32 of 89

7.4 Band Edge Emissions at Antenna Terminal

\$2.1051, \$27.53

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

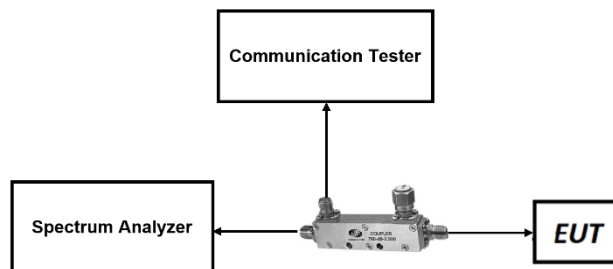


Figure 7-3. Test Instrument & Measurement Setup


FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 33 of 89

Test Notes


1. Per 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 34 of 89

LTE Band 66

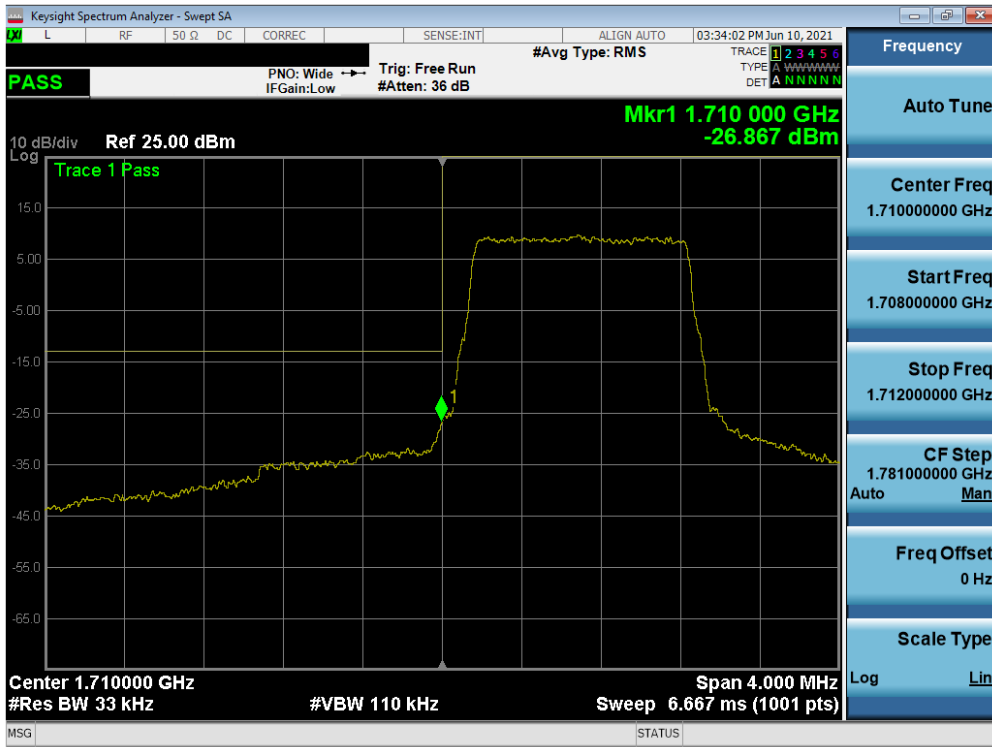


Plot 7-32. Lower Band Edge Plot (LTE Band 66 – 1.4MHz QPSK – Full RB)

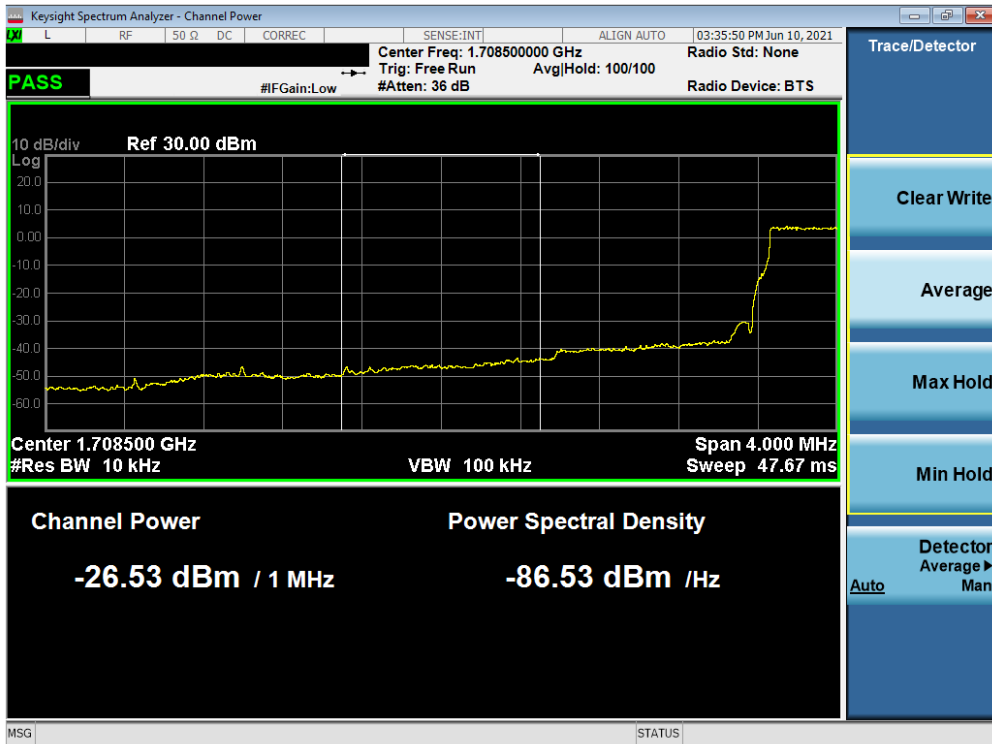


Plot 7-33. Lower Extended Band Edge Plot (LTE Band 66 – 1.4MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 35 of 89

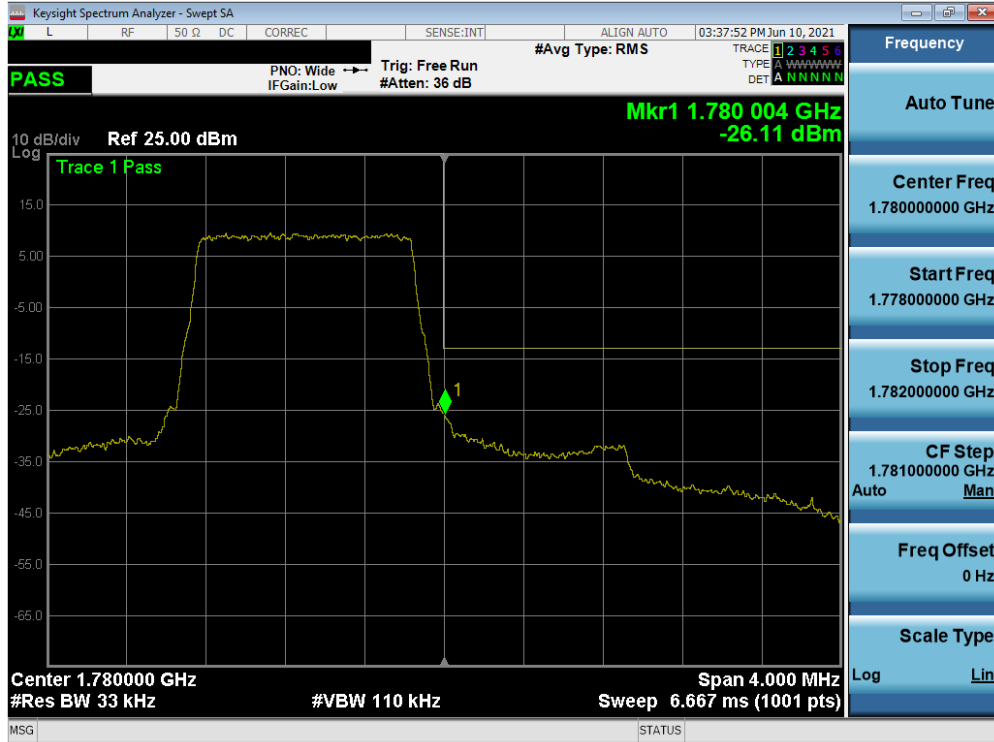


Plot 7-34. Upper Band Edge Plot (LTE Band 66 – 1.4MHz QPSK – Full RB)

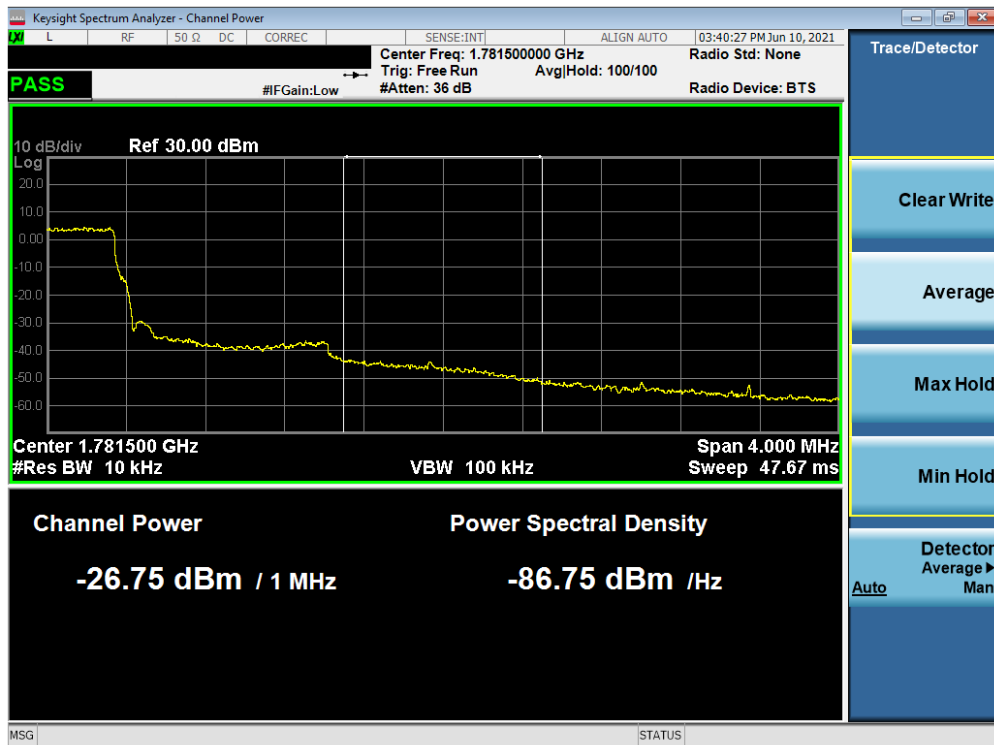


Plot 7-35. Upper Extended Band Edge Plot (LTE Band 66 – 1.4MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 36 of 89

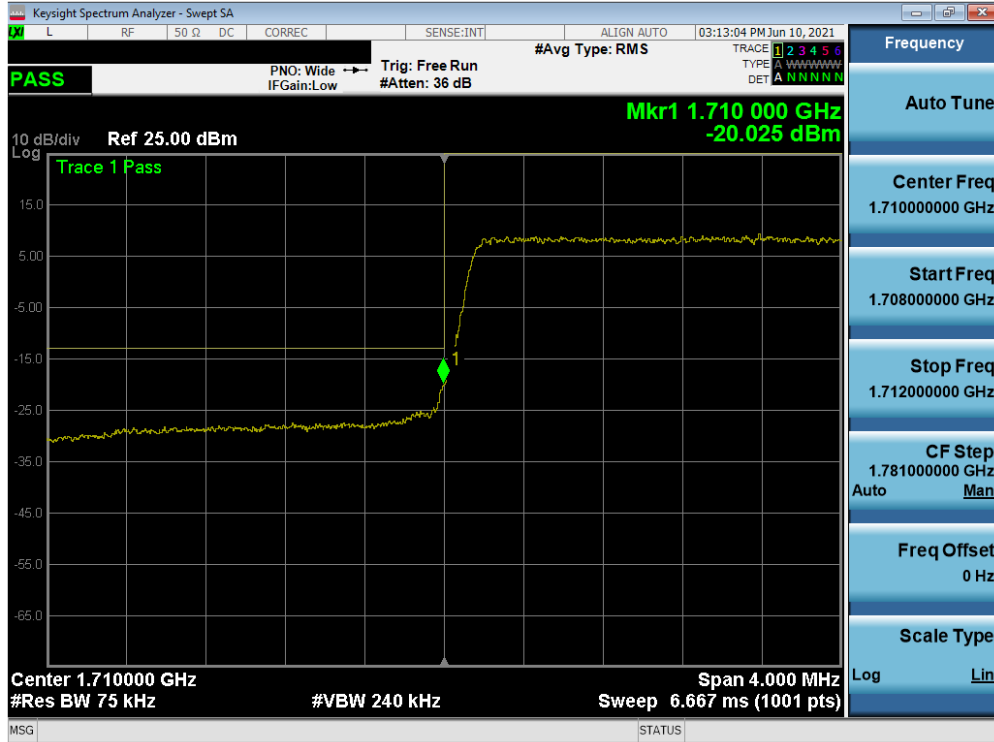

Plot 7-36. Lower Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB)

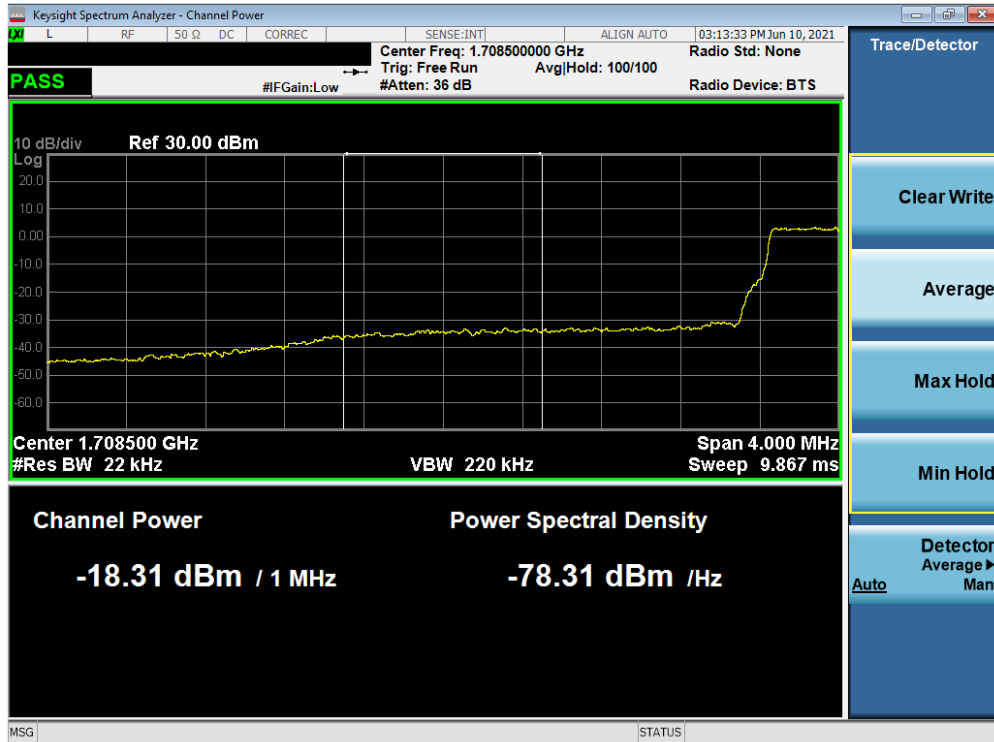


Plot 7-37. Lower Extended Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 37 of 89




Plot 7-38. Upper Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB)

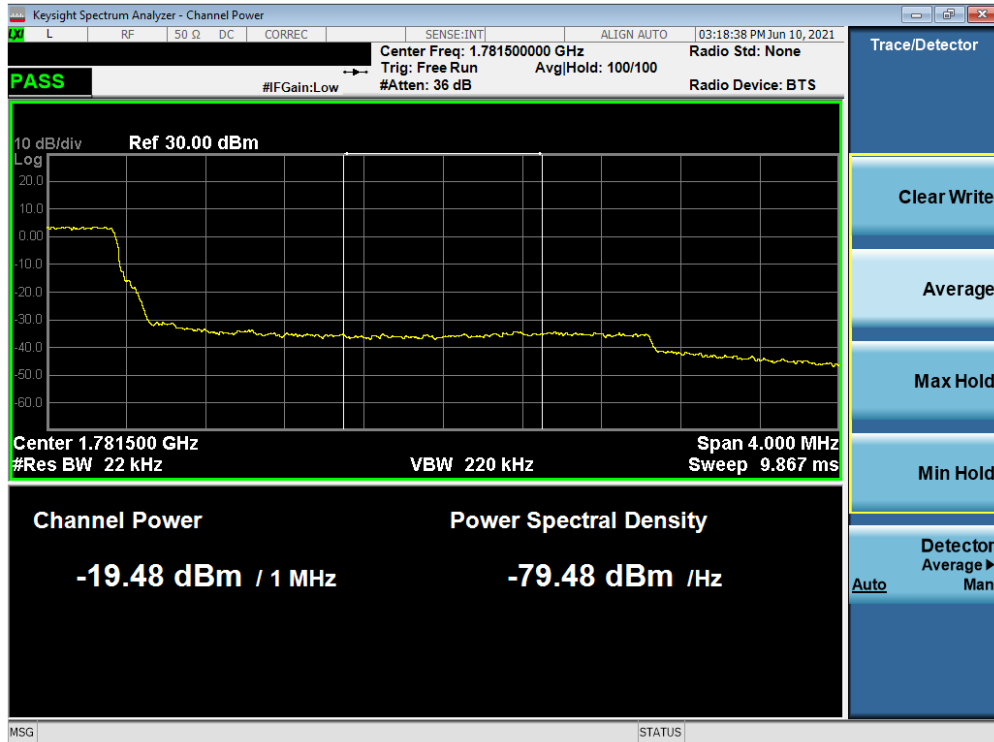


Plot 7-39. Upper Extended Band Edge Plot (LTE Band 66 - 3MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 38 of 89

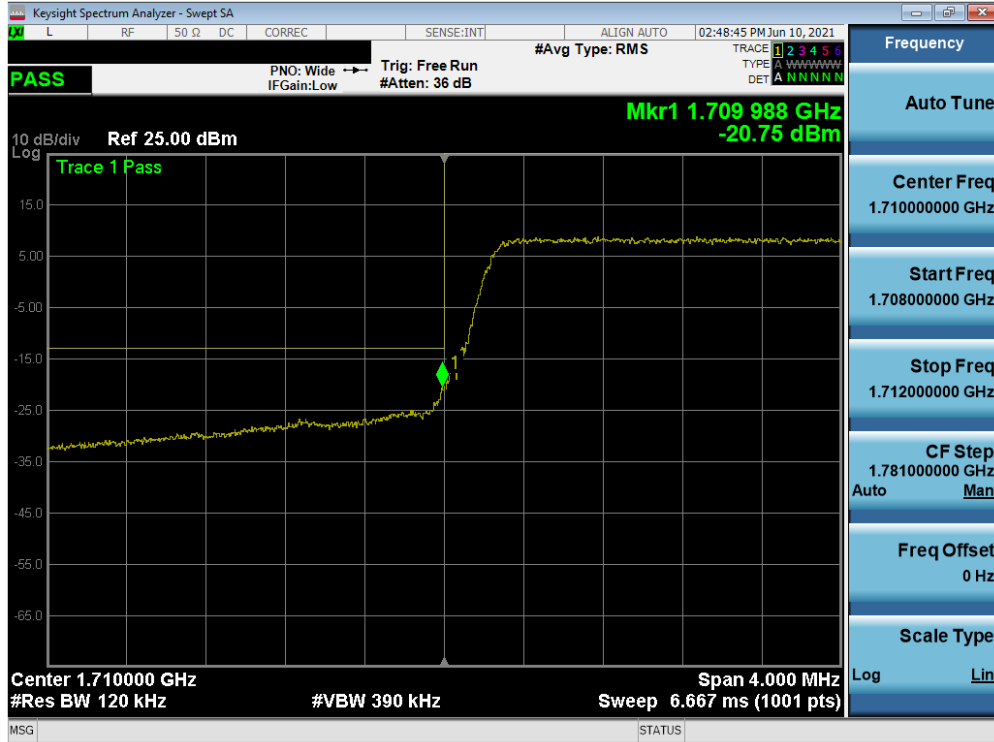

Plot 7-40. Lower Band Edge Plot (LTE Band 66 - 5MHz QPSK – Full RB)

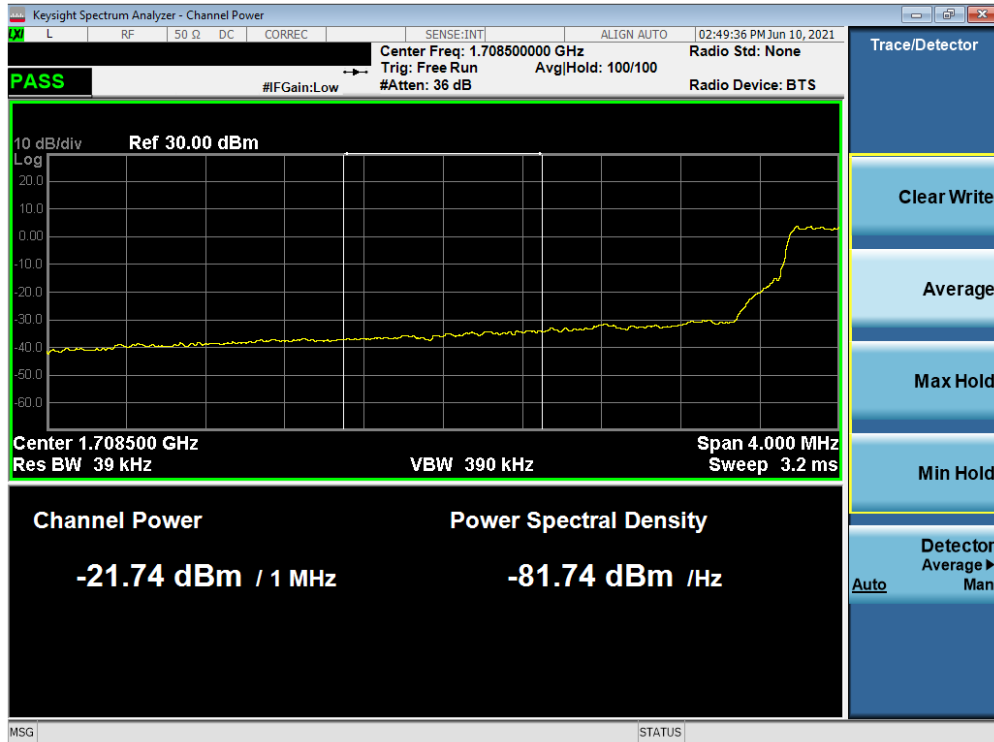


Plot 7-41. Lower Extended Band Edge Plot (LTE Band 66 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 39 of 89




Plot 7-42. Upper Band Edge Plot (LTE Band 66 - 5MHz QPSK – Full RB)

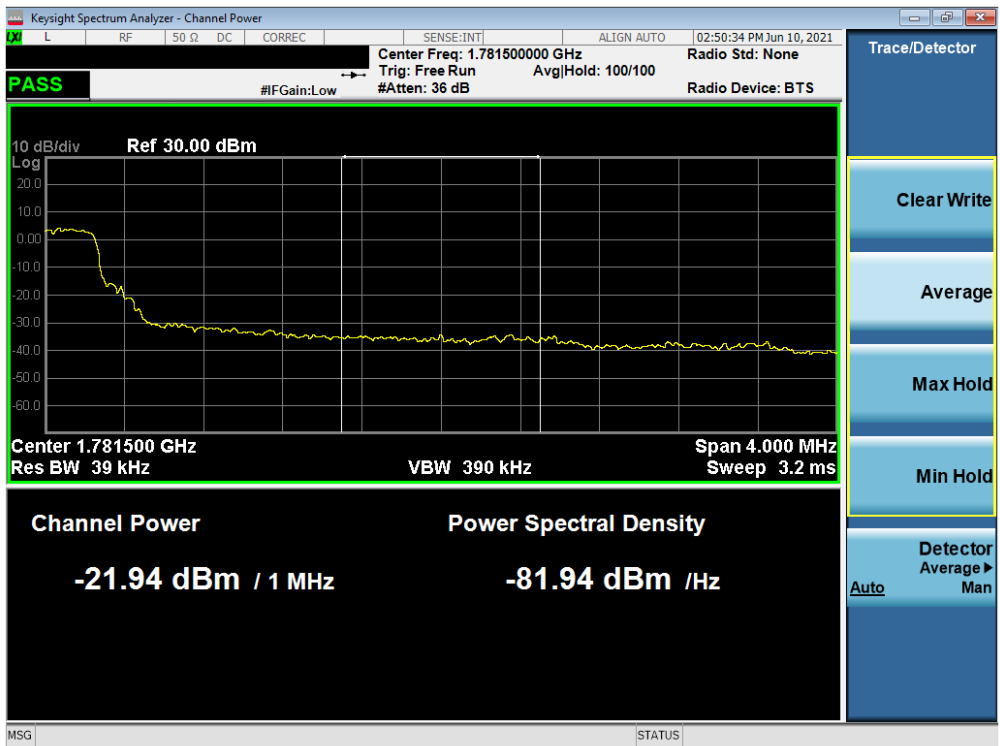


Plot 7-43. Upper Extended Band Edge Plot (LTE Band 66 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 40 of 89

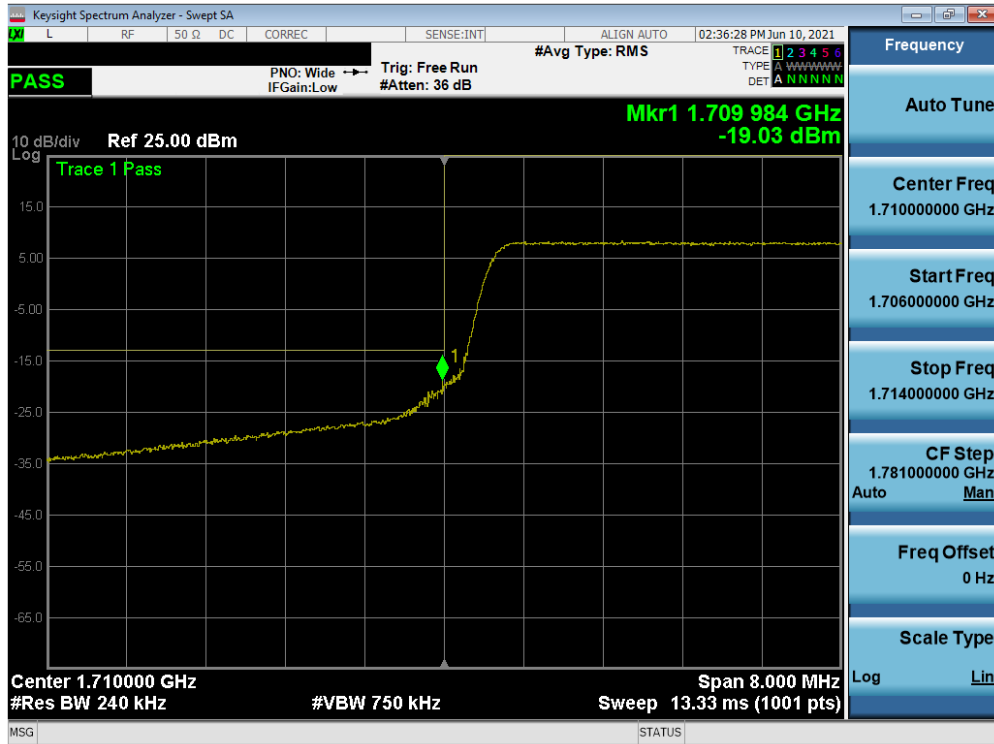

Plot 7-44. Lower Band Edge Plot (LTE Band 66 - 10MHz QPSK – Full RB)

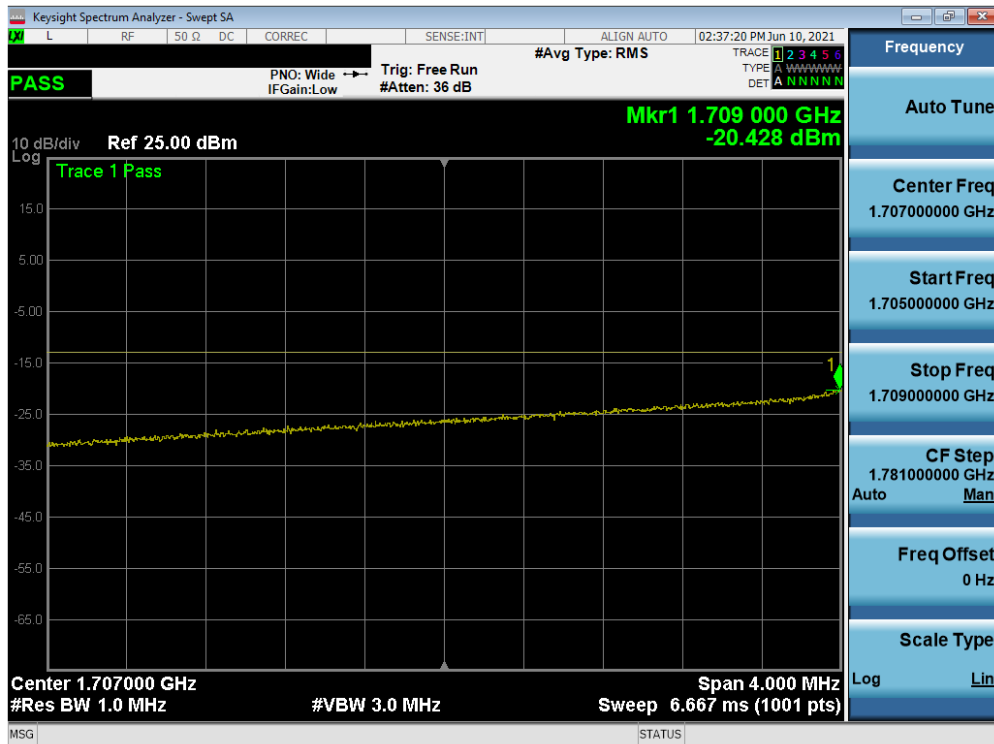


Plot 7-45. Lower Extended Band Edge Plot (LTE Band 66 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 41 of 89




Plot 7-46. Upper Band Edge Plot (LTE Band 66 - 10MHz QPSK – Full RB)

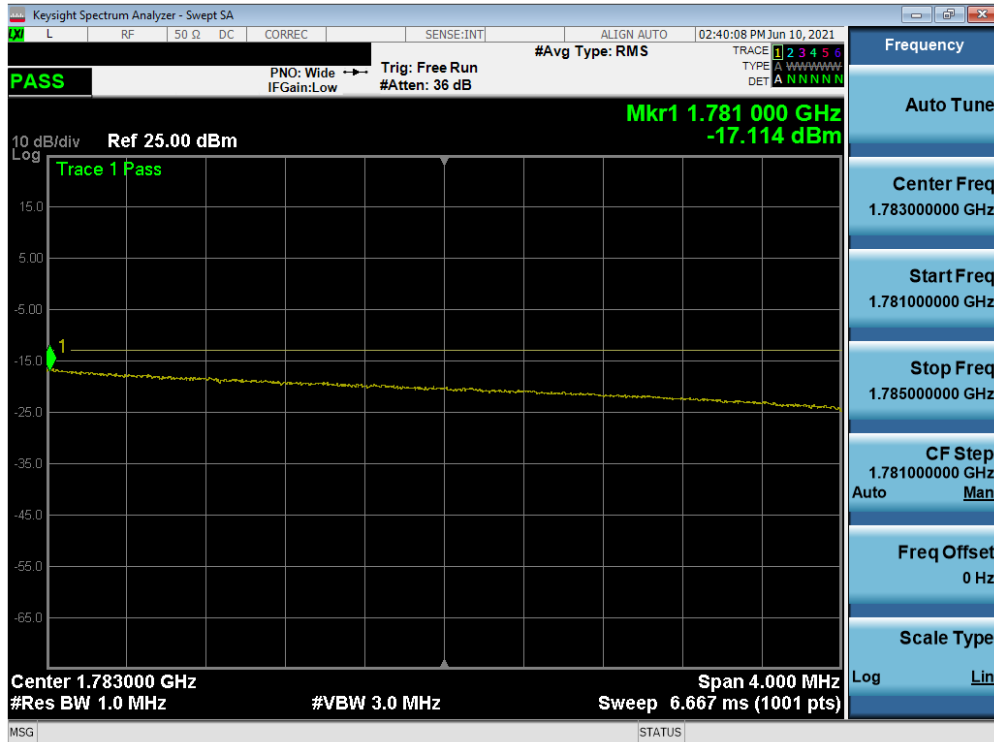


Plot 7-47. Upper Extended Band Edge Plot (LTE Band 66 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 42 of 89

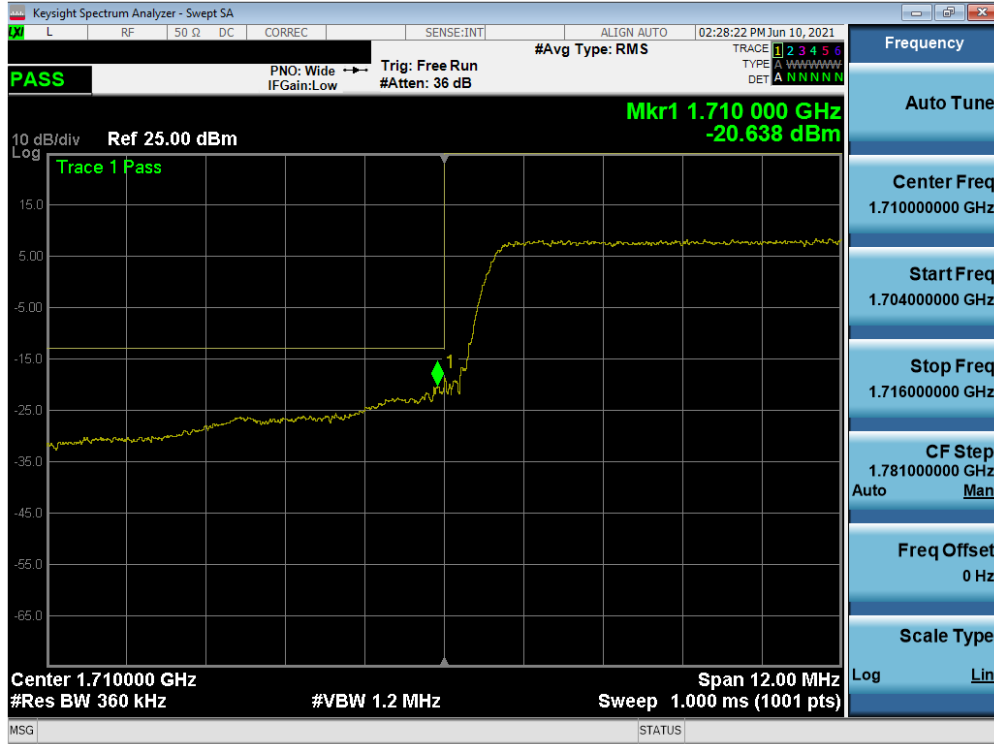

Plot 7-48. Lower Band Edge Plot (LTE Band 66 - 15MHz QPSK – Full RB)

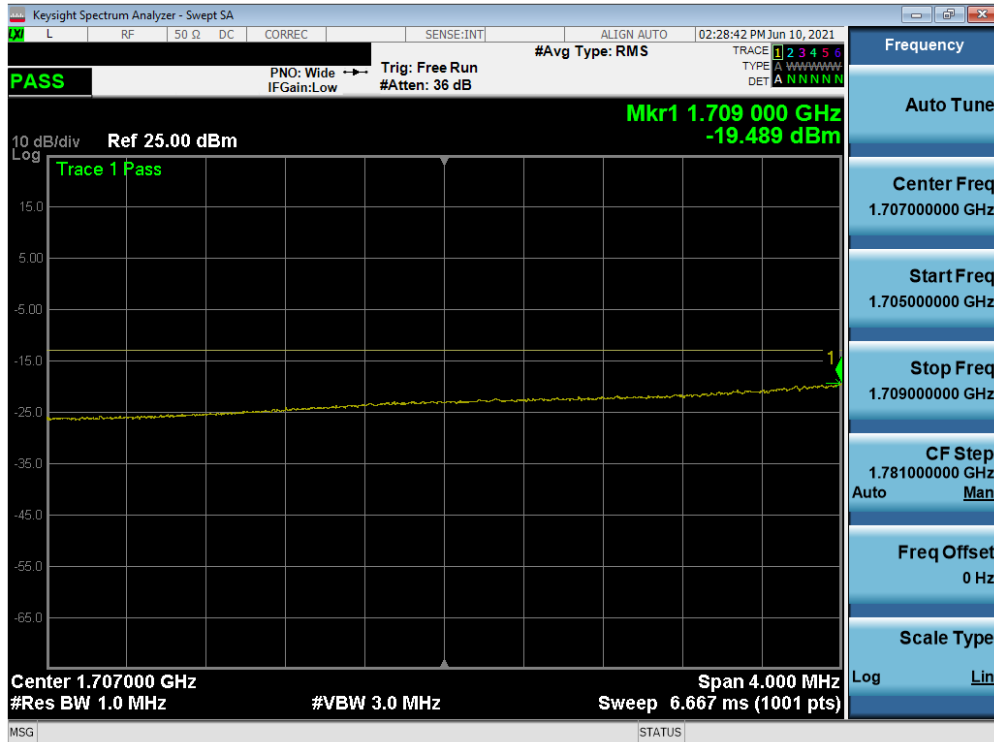


Plot 7-49. Lower Extended Band Edge Plot (LTE Band 66 - 15MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 43 of 89




Plot 7-50. Upper Band Edge Plot (LTE Band 66 - 15MHz QPSK – Full RB)

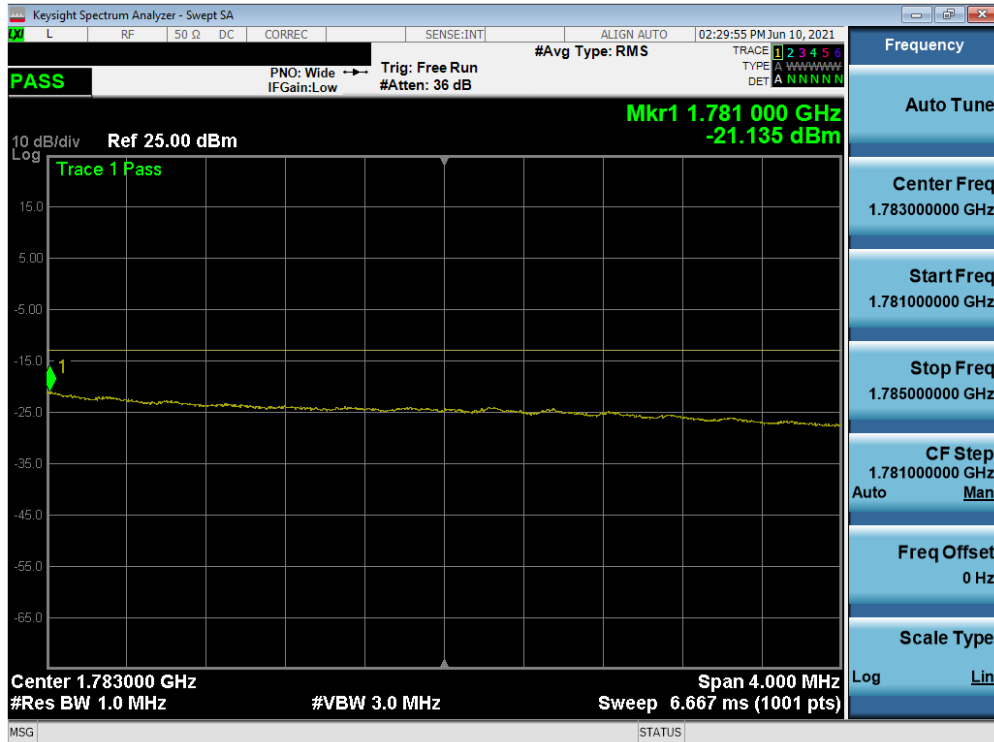

Plot 7-51. Upper Extended Band Edge Plot (LTE Band 66 - 15MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 44 of 89

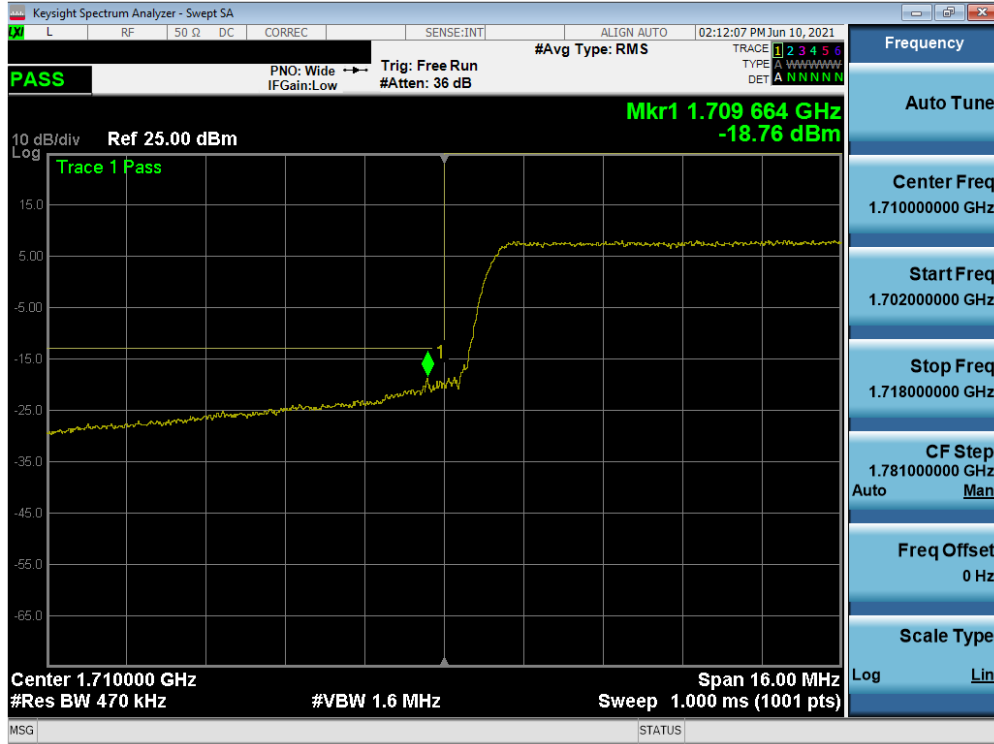

Plot 7-52. Lower Band Edge Plot (LTE Band 66 - 20MHz QPSK – Full RB)




Plot 7-53. Lower Extended Band Edge Plot (LTE Band 66 - 20MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 45 of 89




Plot 7-54. Upper Band Edge Plot (LTE Band 66 - 20MHz QPSK – Full RB)

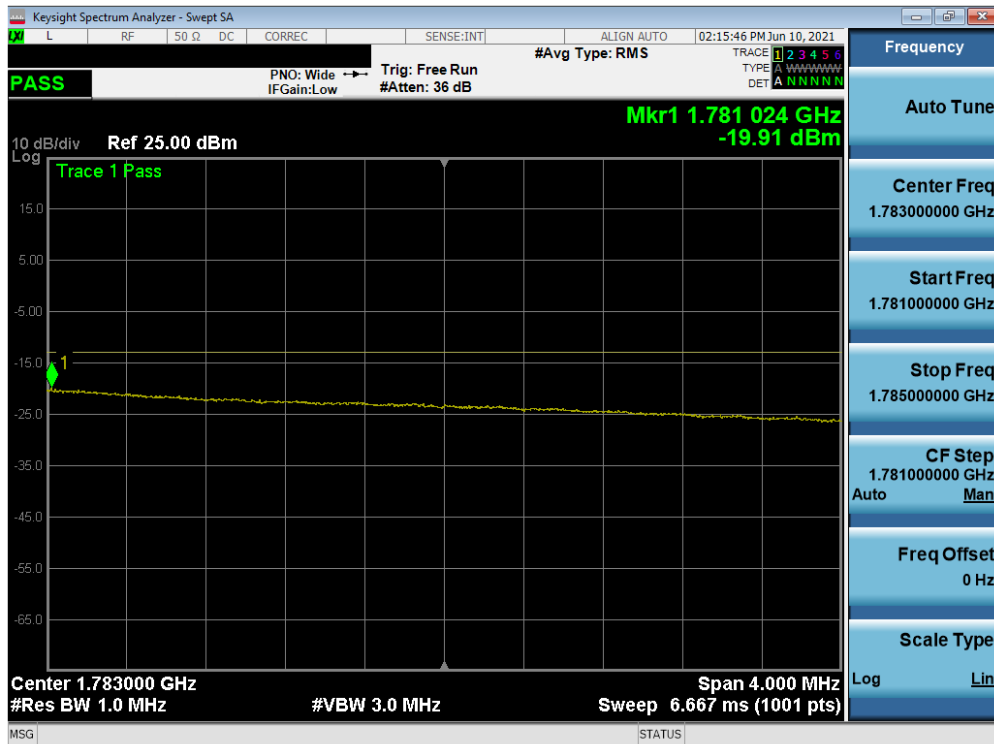


Plot 7-55. Upper Extended Band Edge Plot (LTE Band 66 - 20MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 46 of 89

LTE Band 4

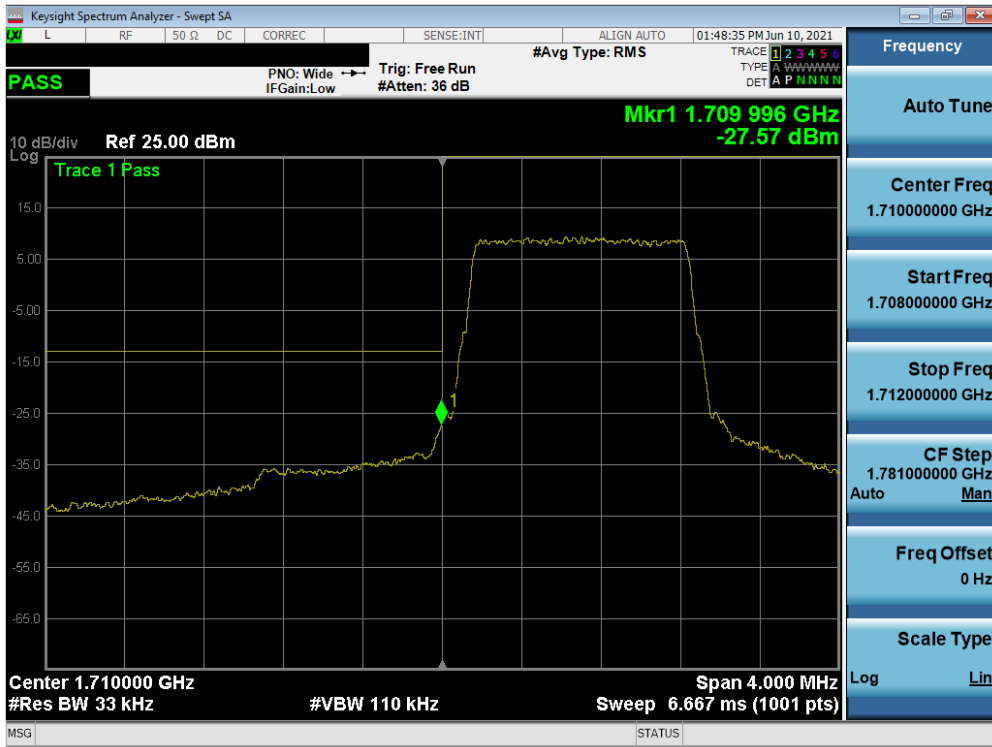

Plot 7-56. Lower Band Edge Plot (LTE Band 4 – 1.4MHz QPSK – Full RB)

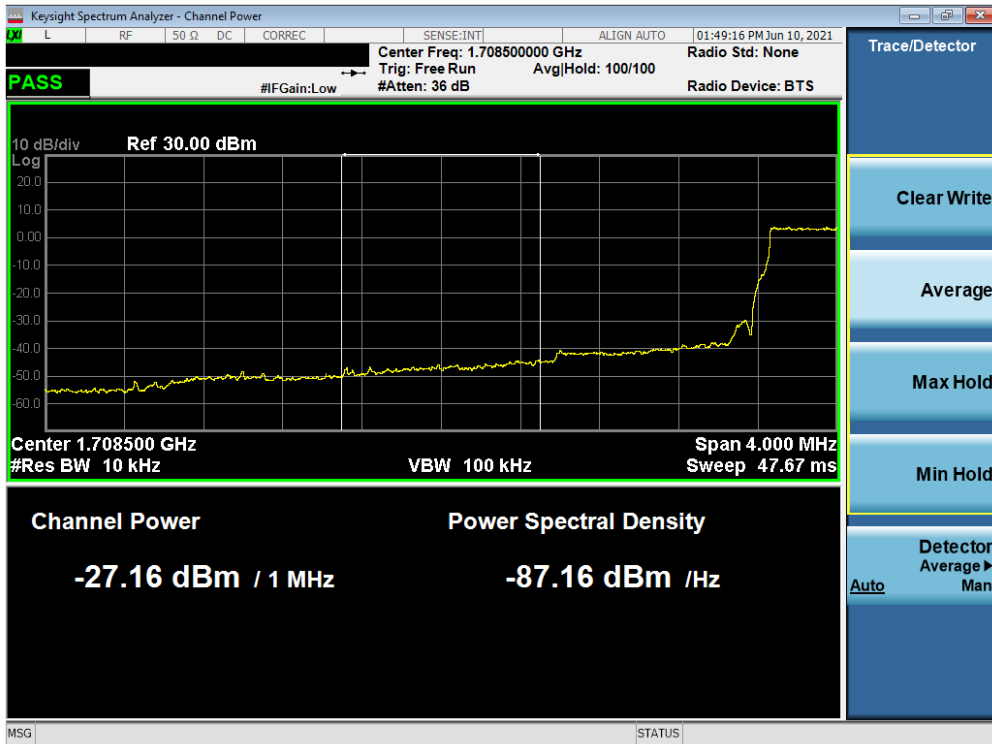


Plot 7-57. Lower Extended Band Edge Plot (LTE Band 4 – 1.4MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 47 of 89




Plot 7-58. Upper Band Edge Plot (LTE Band 4 – 1.4MHz QPSK – Full RB)

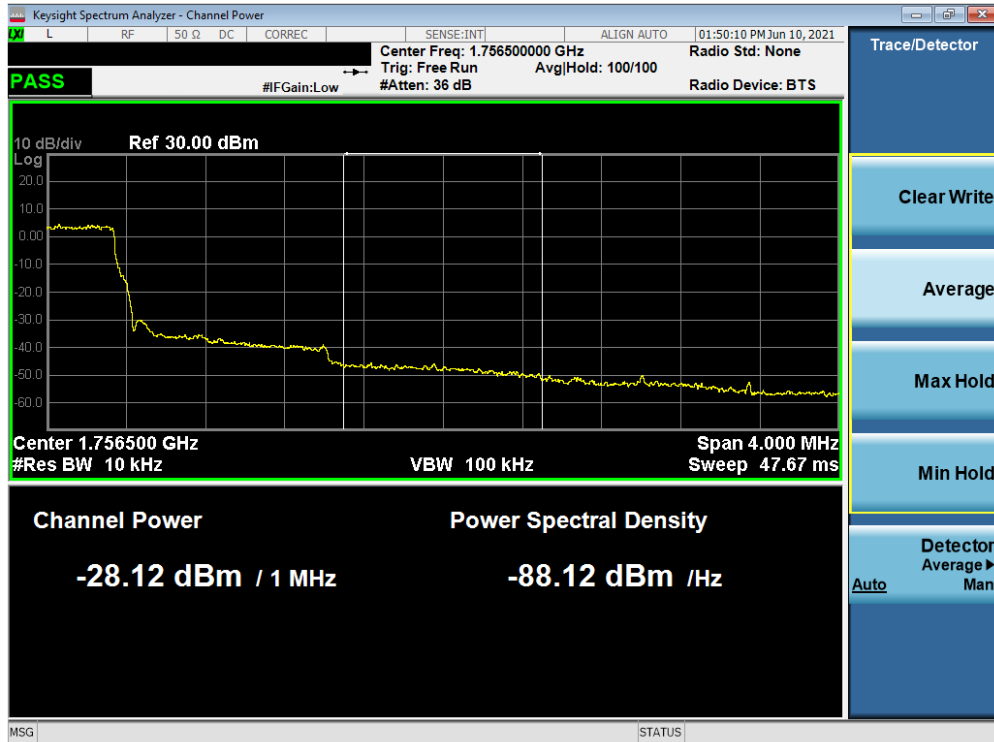


Plot 7-59. Upper Extended Band Edge Plot (LTE Band 4 – 1.4MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 48 of 89

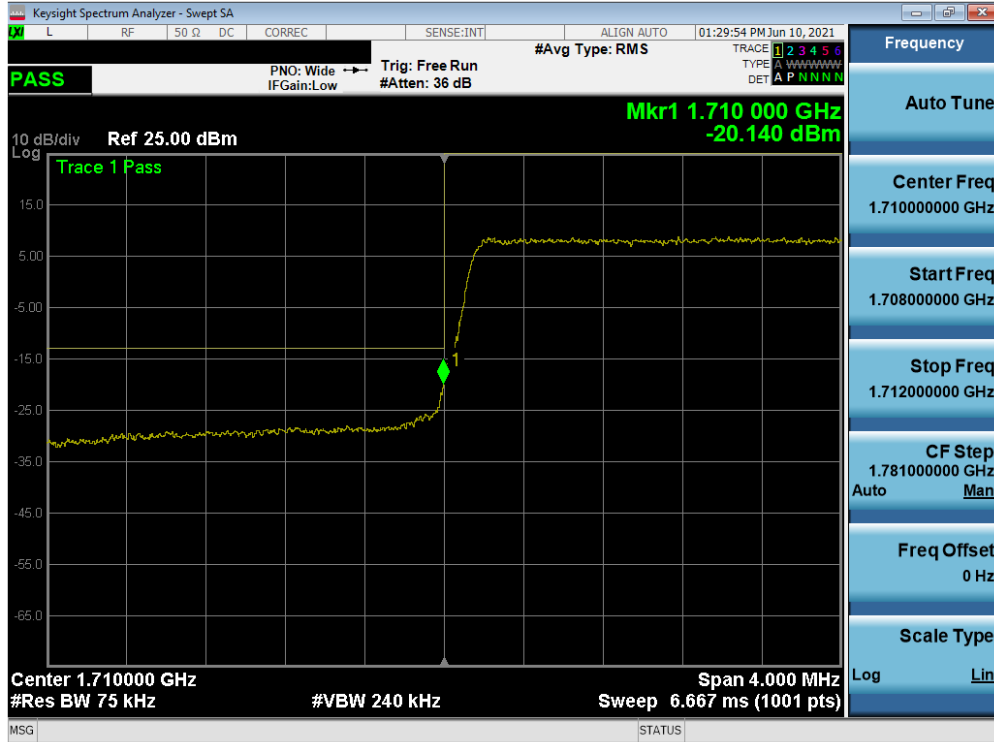


Plot 7-60. Lower Band Edge Plot (LTE Band 4 - 3MHz QPSK – Full RB)

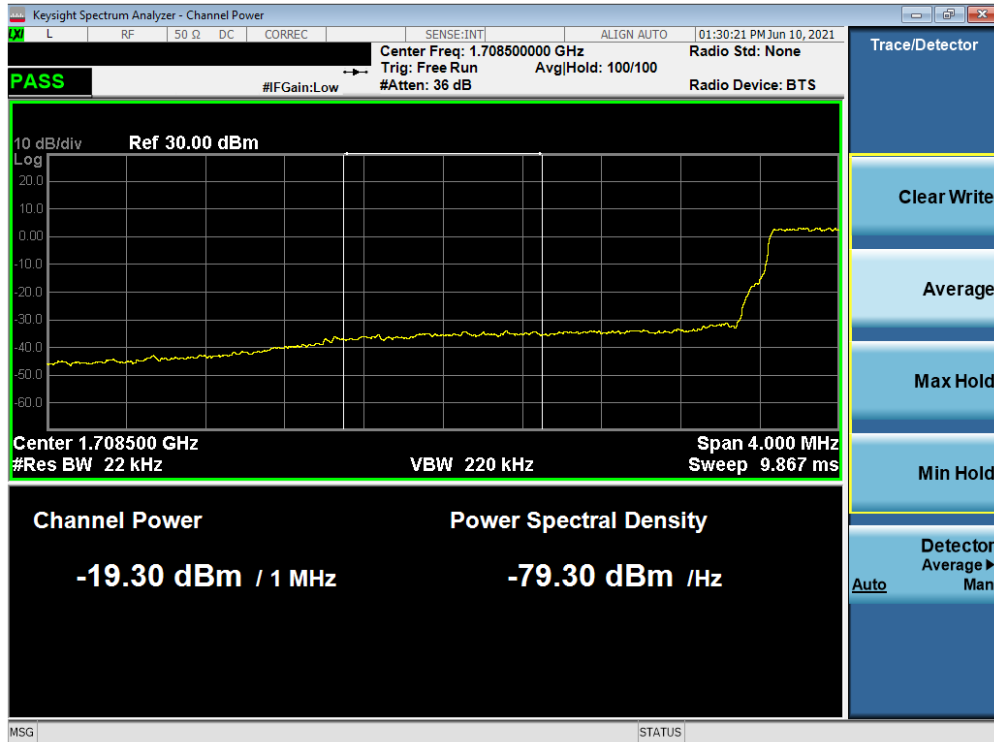


Plot 7-61. Lower Extended Band Edge Plot (LTE Band 4 - 3MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 49 of 89

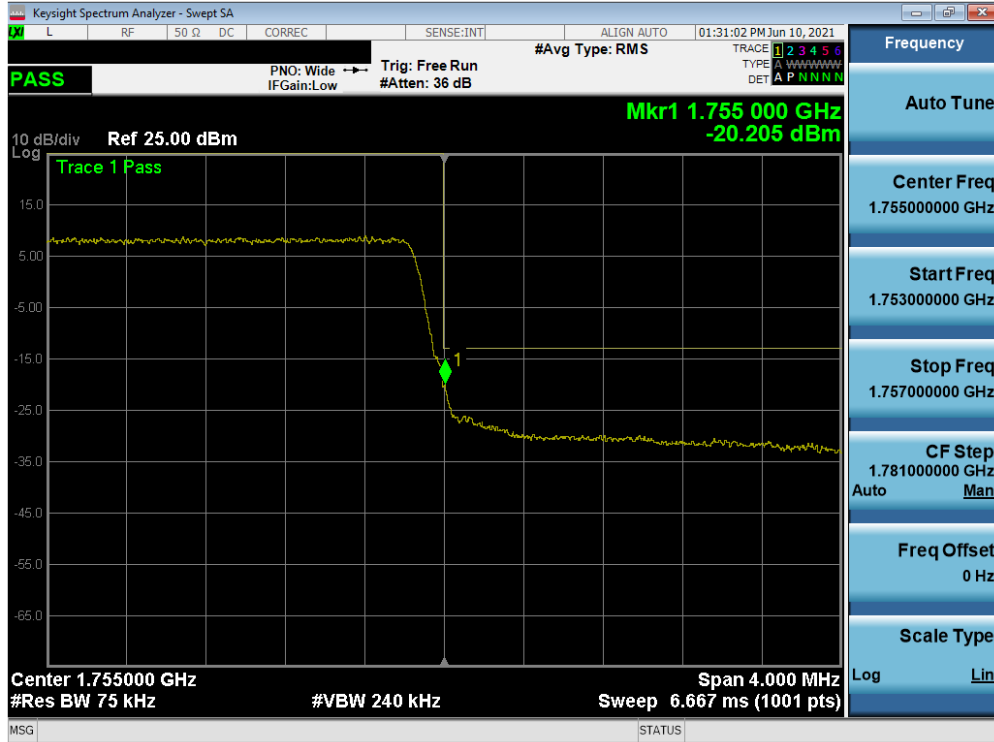


Plot 7-62. Upper Band Edge Plot (LTE Band 4 - 3MHz QPSK – Full RB)

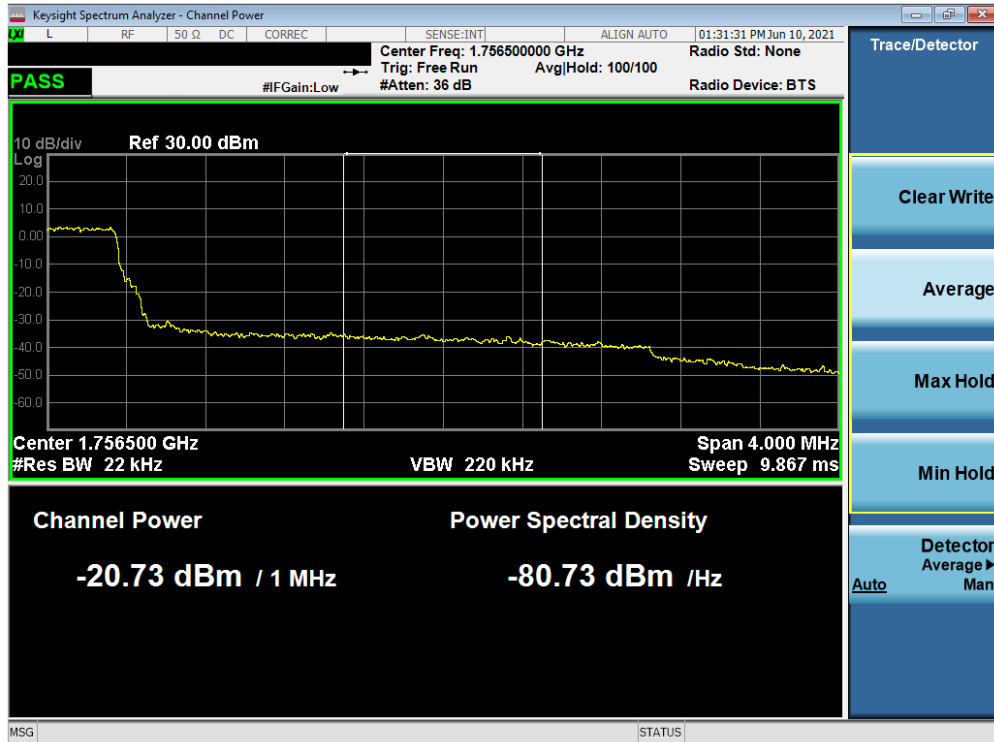


Plot 7-63. Upper Extended Band Edge Plot (LTE Band 4 - 3MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 50 of 89

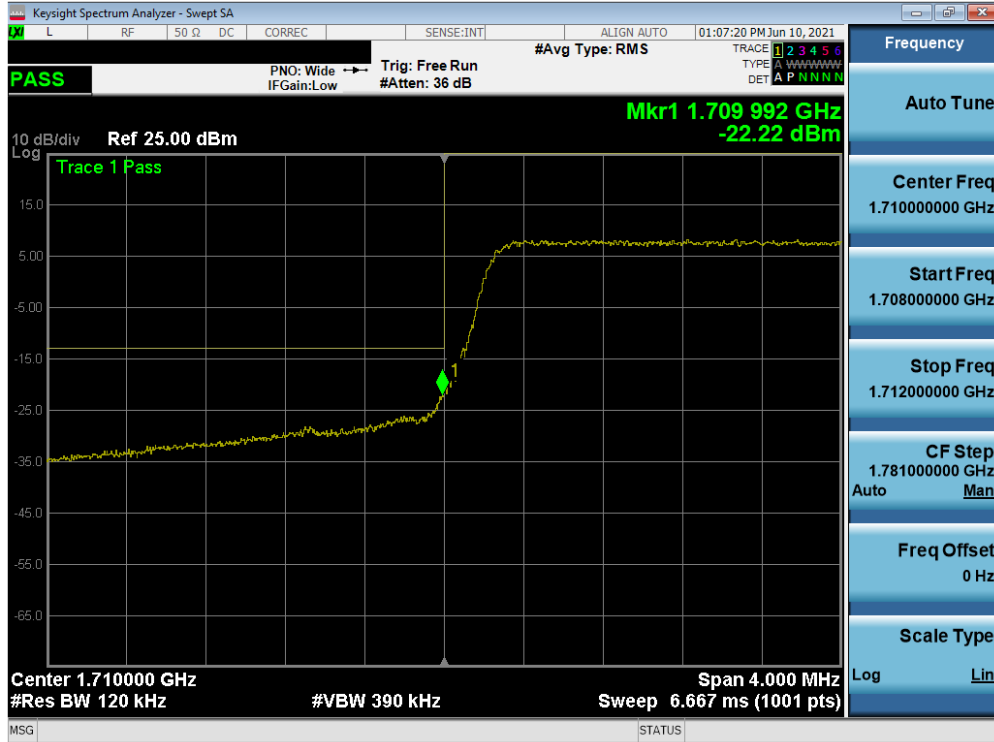

Plot 7-64. Lower Band Edge Plot (LTE Band 4 - 5MHz QPSK – Full RB)

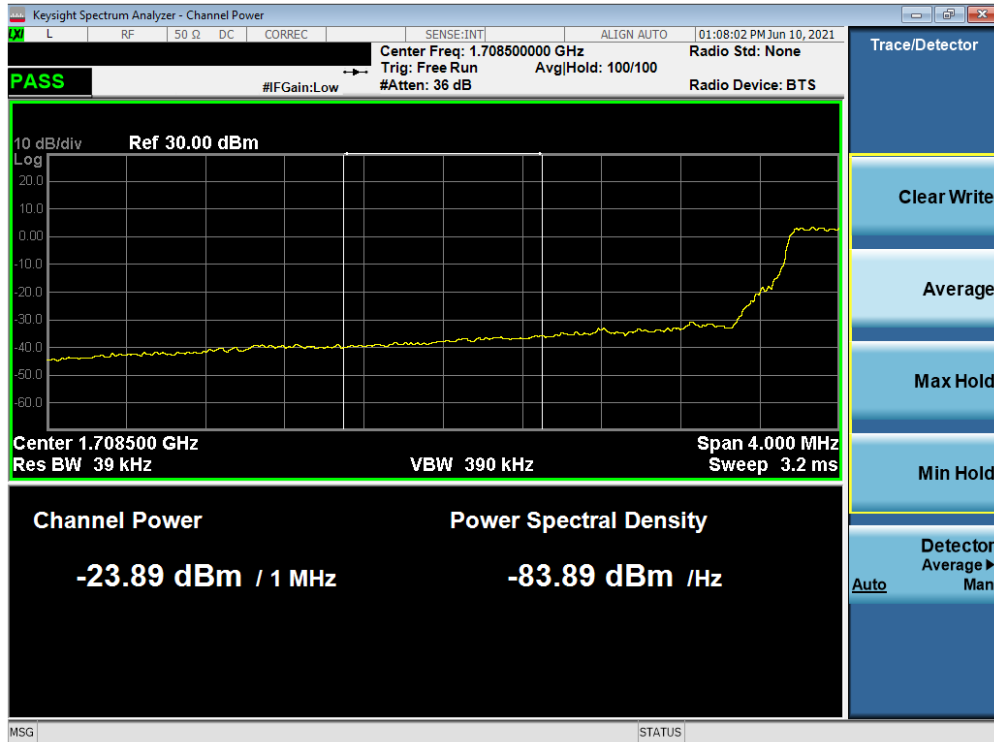


Plot 7-65. Lower Extended Band Edge Plot (LTE Band 4 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 51 of 89




Plot 7-66. Upper Band Edge Plot (LTE Band 4 - 5MHz QPSK – Full RB)

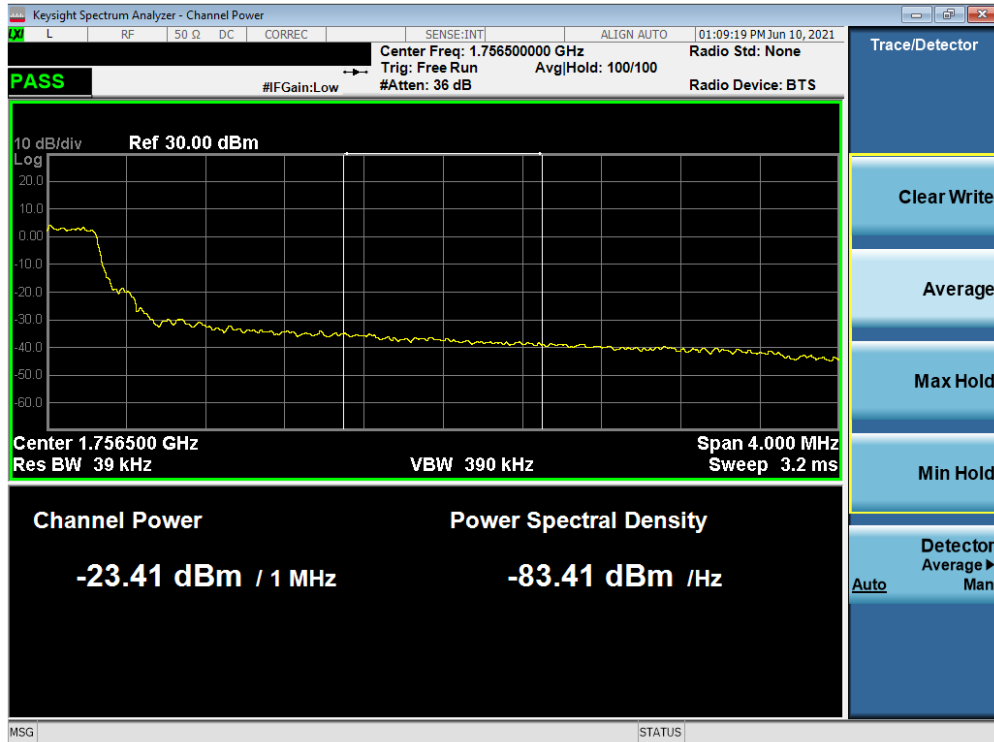


Plot 7-67. Upper Extended Band Edge Plot (LTE Band 4 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 52 of 89

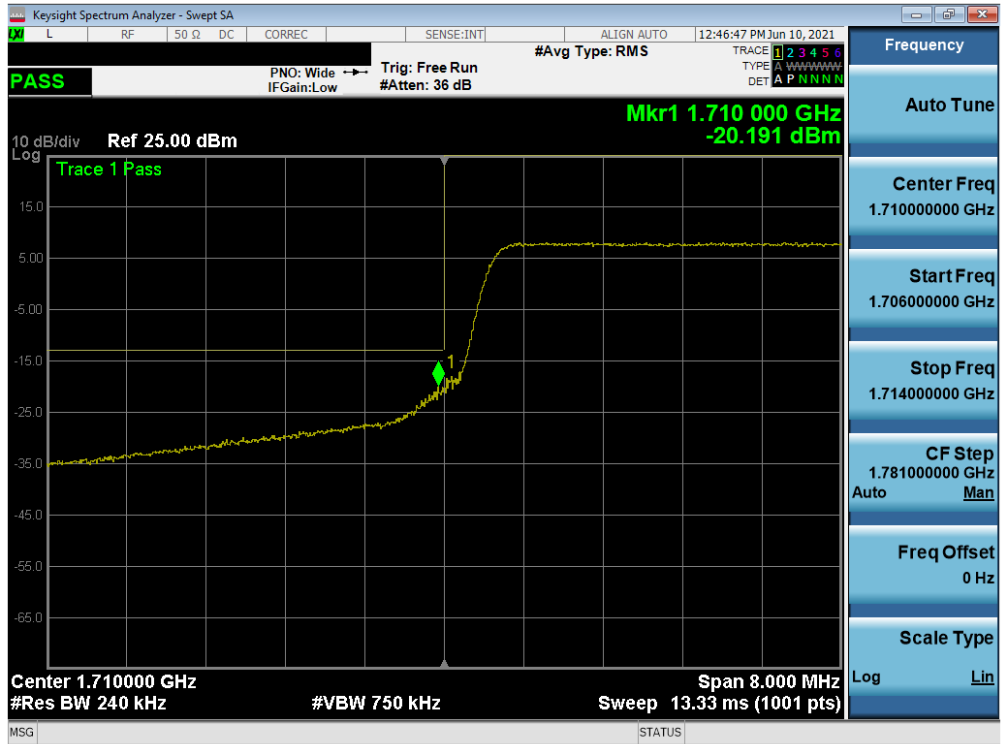


Plot 7-68. Lower Band Edge Plot (LTE Band 4 - 10MHz QPSK – Full RB)

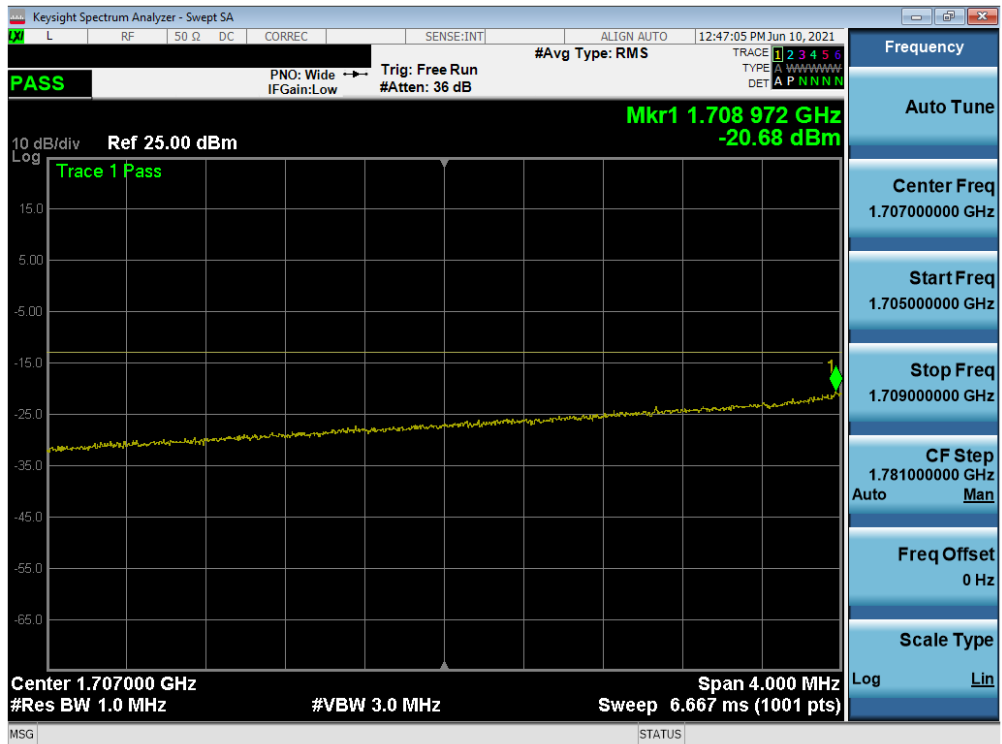


Plot 7-69. Lower Extended Band Edge Plot (LTE Band 4 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 53 of 89

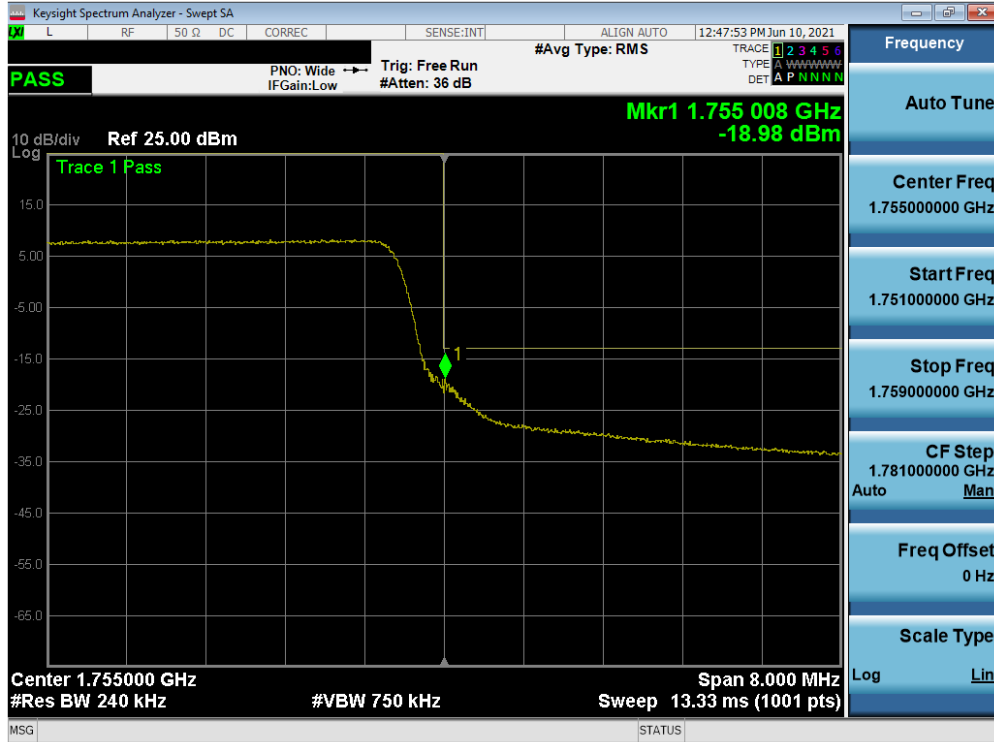


Plot 7-70. Upper Band Edge Plot (LTE Band 4 - 10MHz QPSK – Full RB)

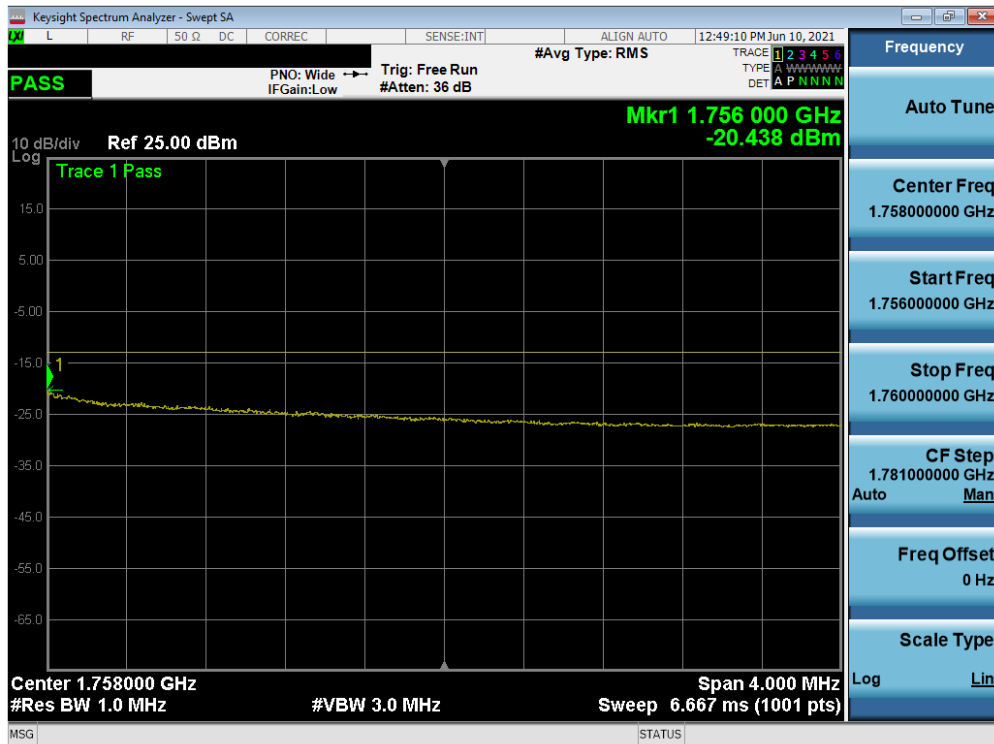


Plot 7-71. Upper Extended Band Edge Plot (LTE Band 4 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 54 of 89

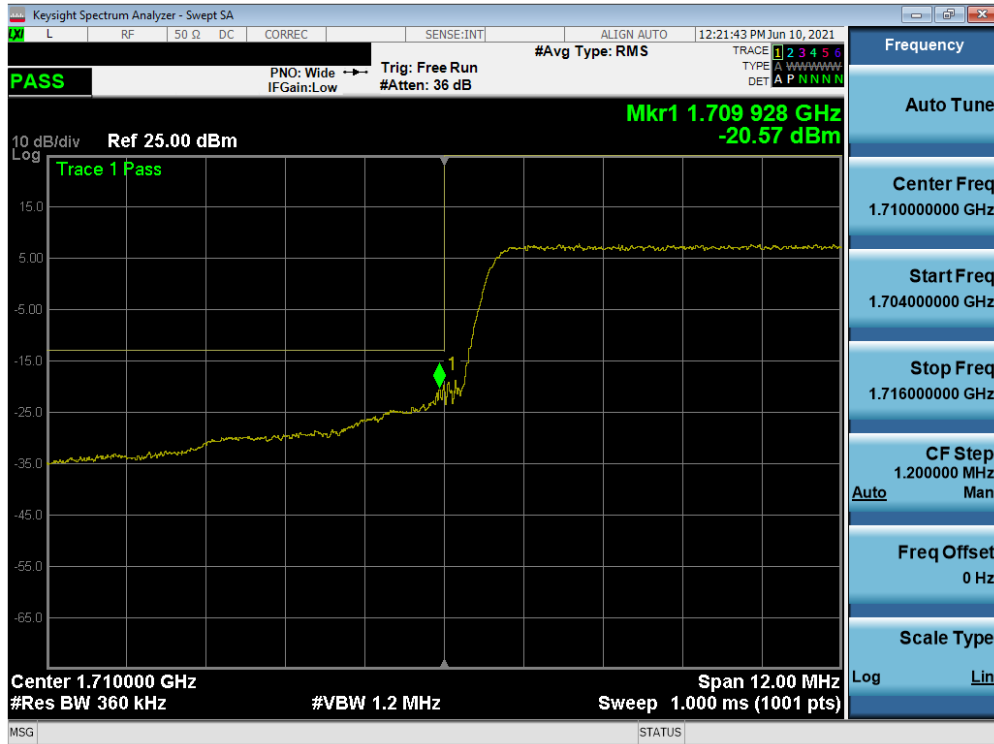

Plot 7-72. Lower Band Edge Plot (LTE Band 4 - 15MHz QPSK – Full RB)

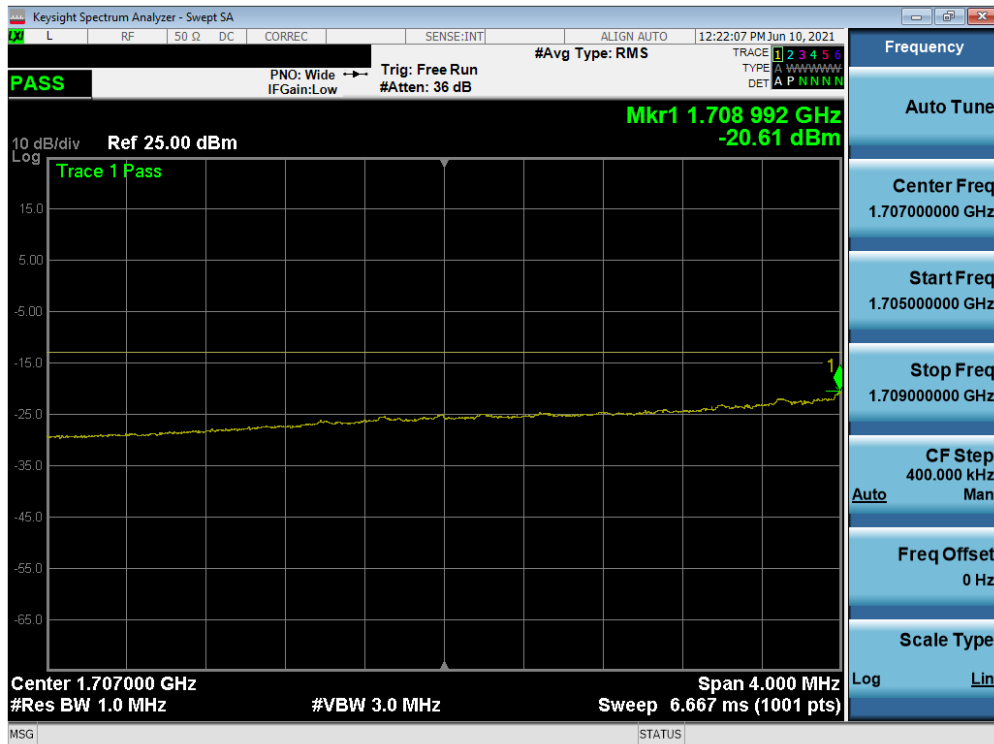

Plot 7-73. Lower Extended Band Edge Plot (LTE Band 4 - 15MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 55 of 89




Plot 7-74. Upper Band Edge Plot (LTE Band 4 - 15MHz QPSK – Full RB)




Plot 7-75. Upper Extended Band Edge Plot (LTE Band 4 - 15MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 56 of 89

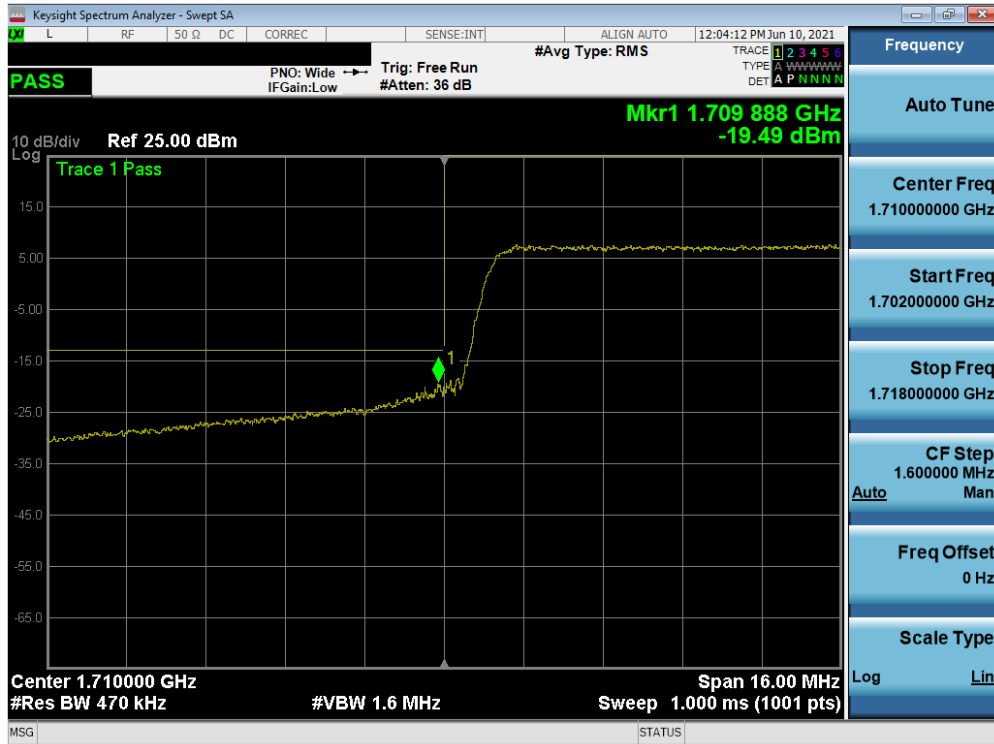

Plot 7-76. Lower Band Edge Plot (LTE Band 4 - 20MHz QPSK – Full RB)

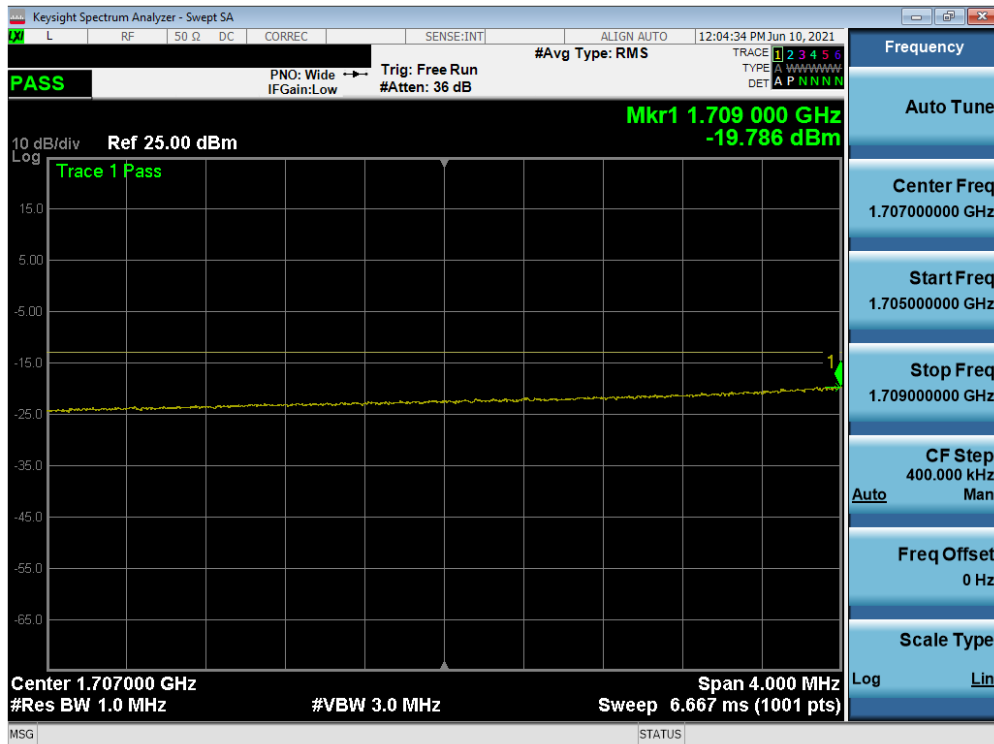


Plot 7-77. Lower Extended Band Edge Plot (LTE Band 4 - 20MHz QPSK – Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 57 of 89




Plot 7-78. Upper Band Edge Plot (LTE Band 4 - 20MHz QPSK – Full RB)

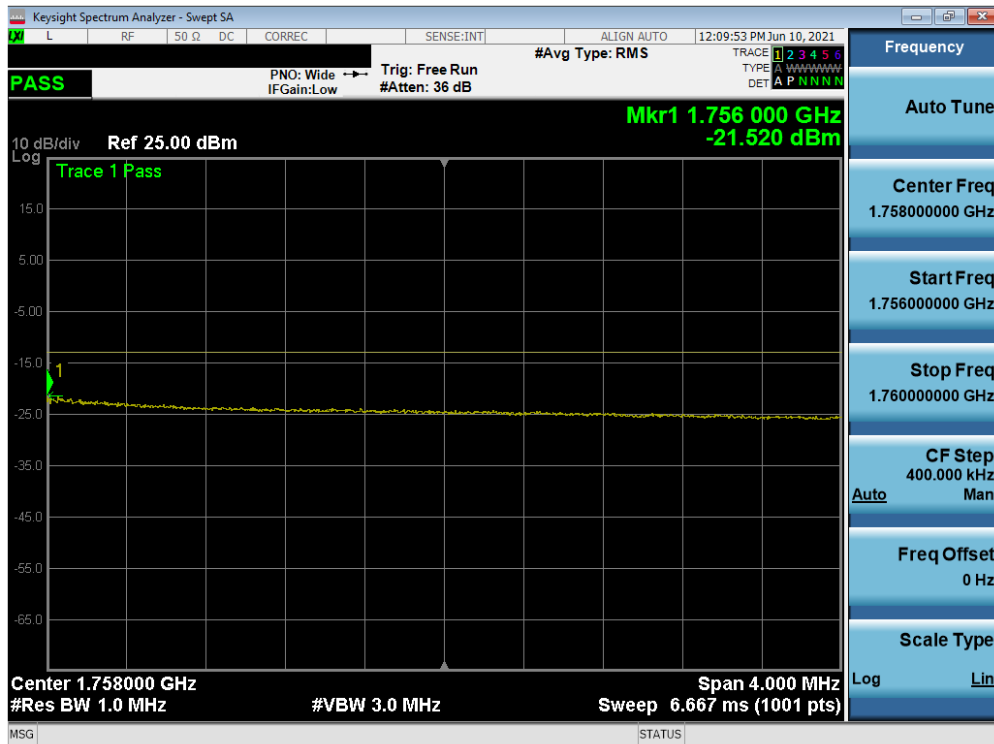


Plot 7-79. Upper Extended Band Edge Plot (LTE Band 4 - 20MHz QPSK – Full RB)

WCDMA AWS

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 58 of 89

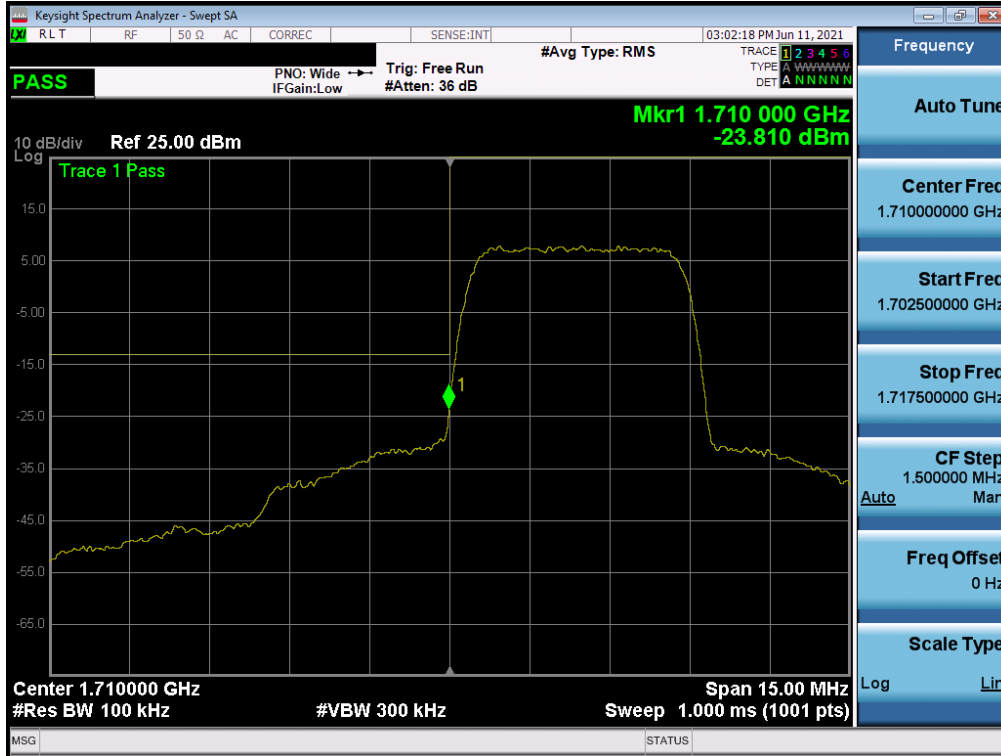


Plot 7-80. Lower Band Edge Plot (WCDMA AWS – Ch. 1312)

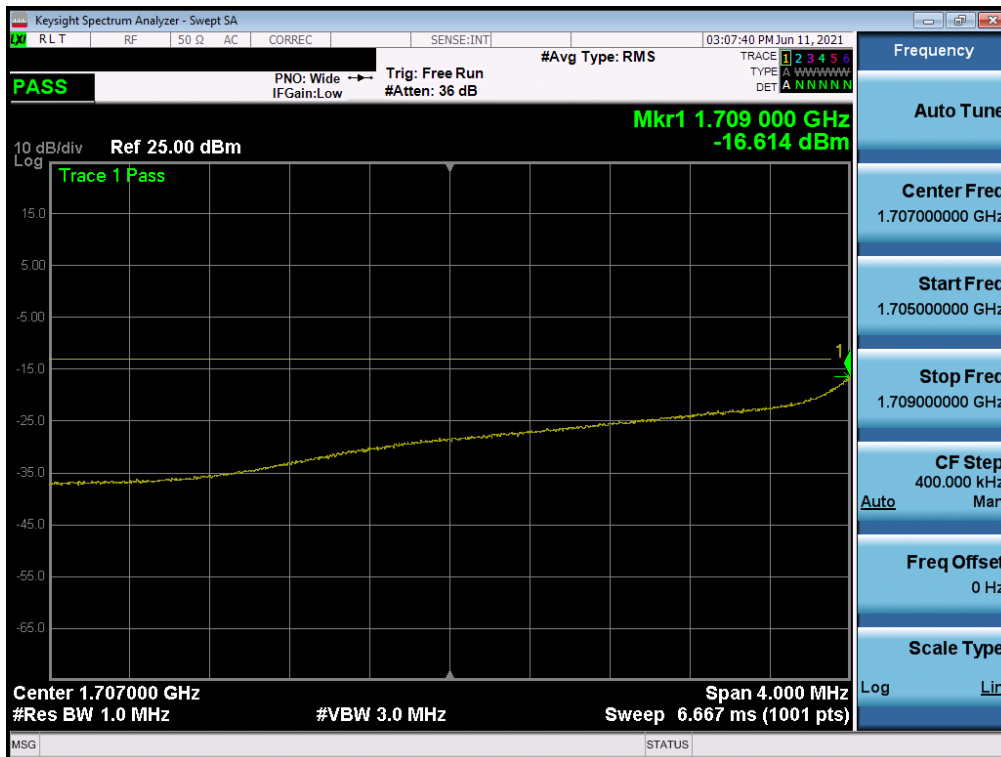

Plot 7-81. Lower Extended Band Edge Plot (WCDMA AWS – Ch. 1312)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 59 of 89

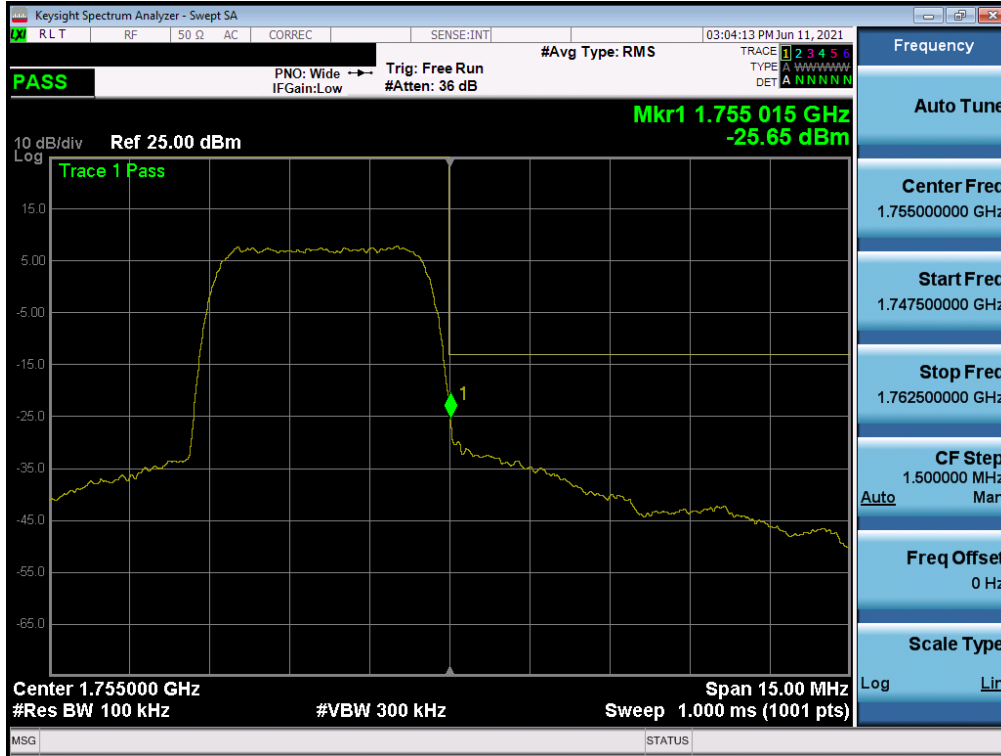

Plot 7-82. Upper Band Edge Plot (WCDMA AWS – Ch. 1513)



Plot 7-83. Upper Extended Band Edge Plot (WCDMA AWS – Ch. 1513)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 60 of 89

7.5 Peak-Average Ratio §27.50(d)(5)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW ≥ OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

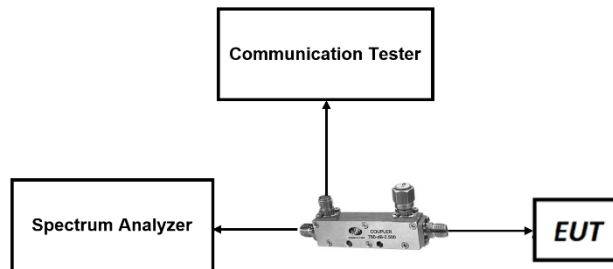



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 61 of 89

LTE Band 66

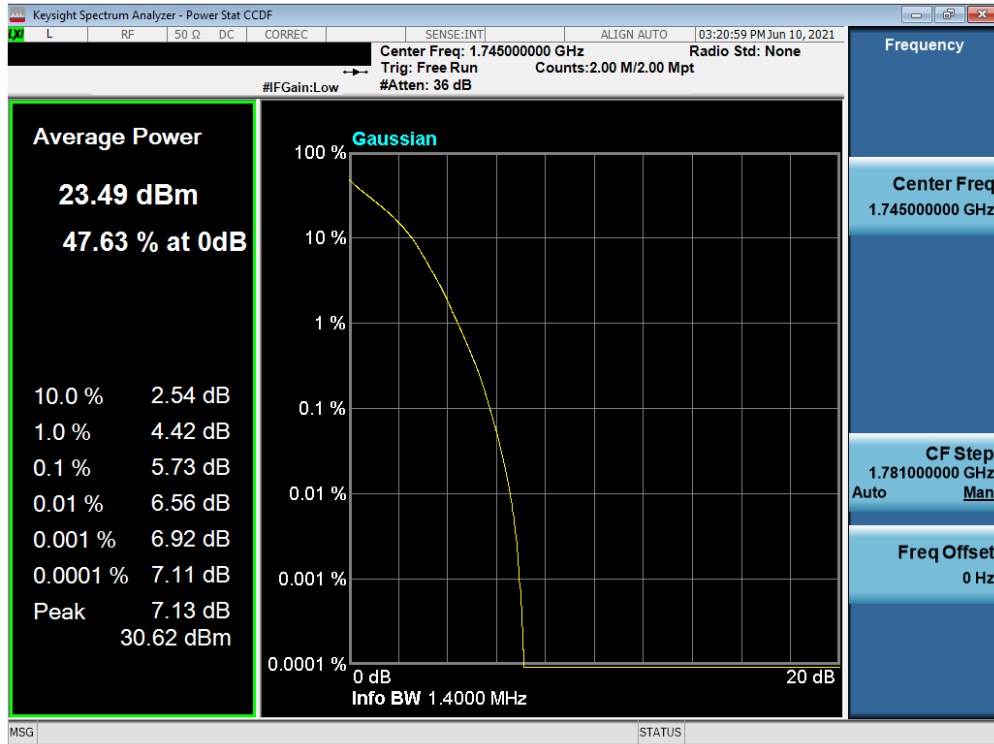


Plot 7-84. PAR Plot (LTE Band 66 - 1.4MHz QPSK - Full RB)

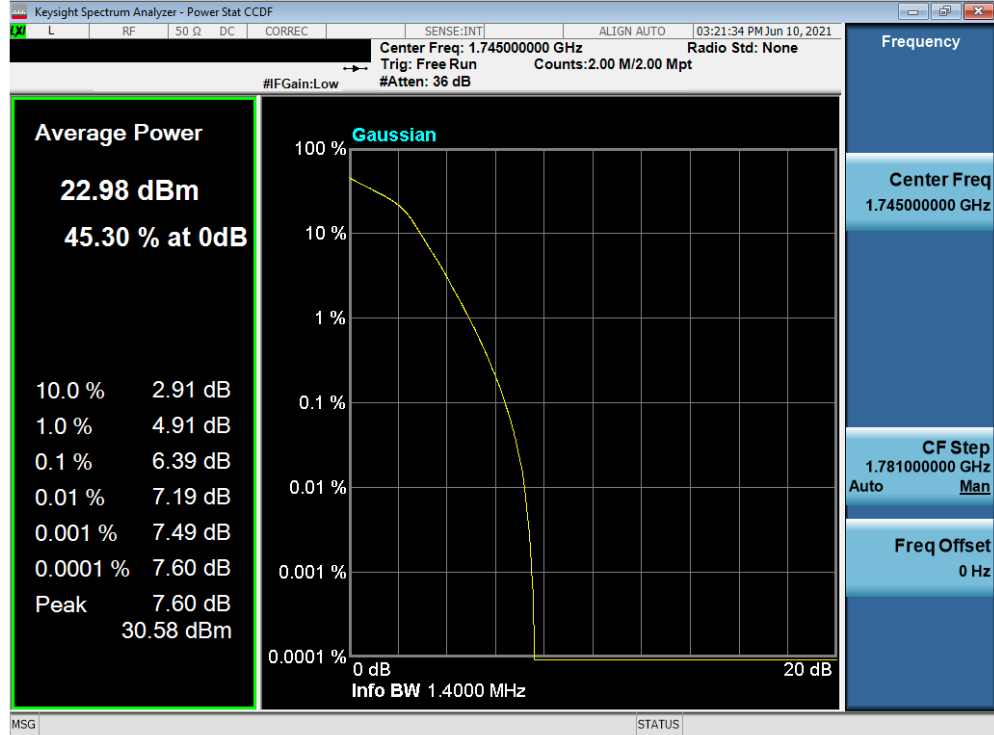


Plot 7-85. PAR Plot (LTE Band 66 - 1.4MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 62 of 89


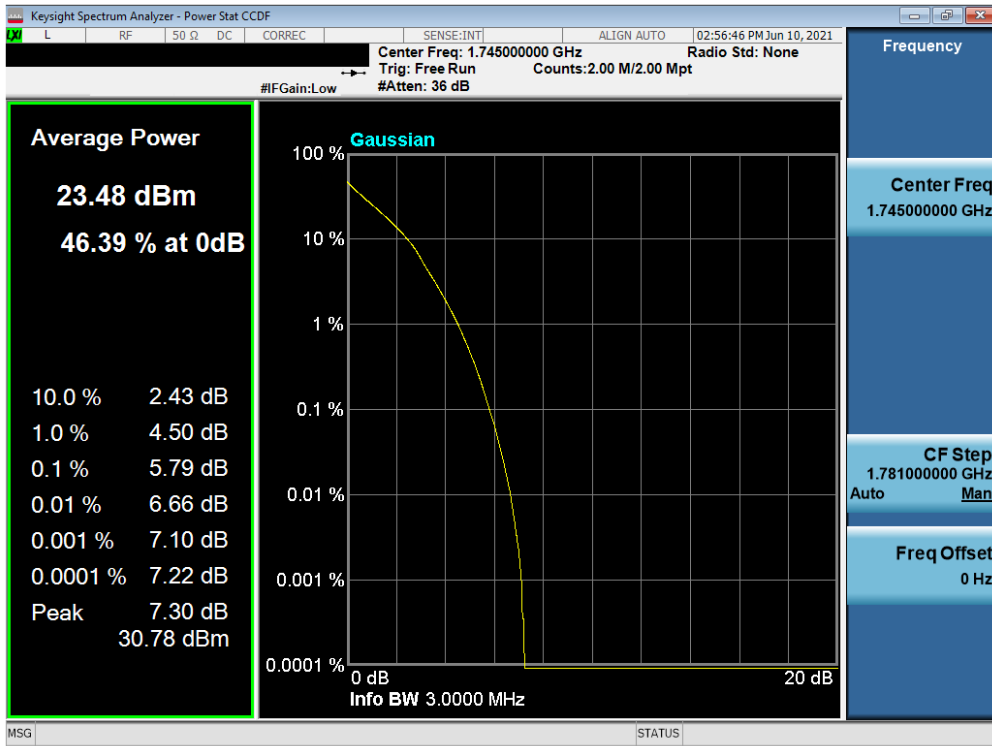


Plot 7-86. PAR Plot (LTE Band 66 - 3MHz QPSK - Full RB)

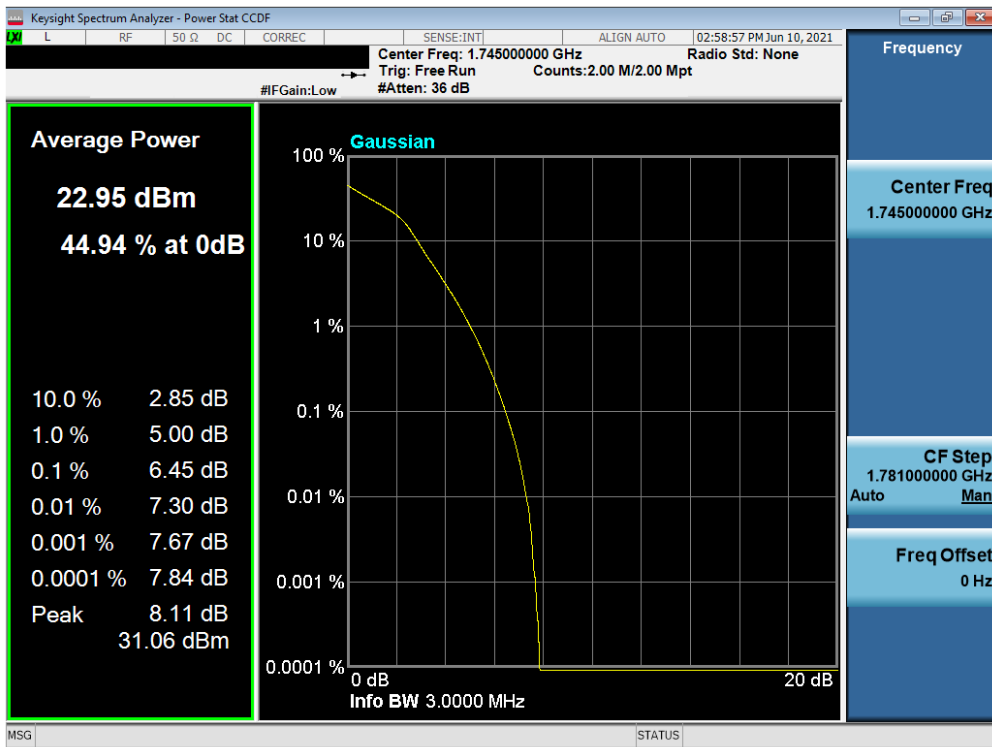


Plot 7-87. PAR Plot (LTE Band 66 - 3MHz 16-QAM - Full RB)


FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 63 of 89

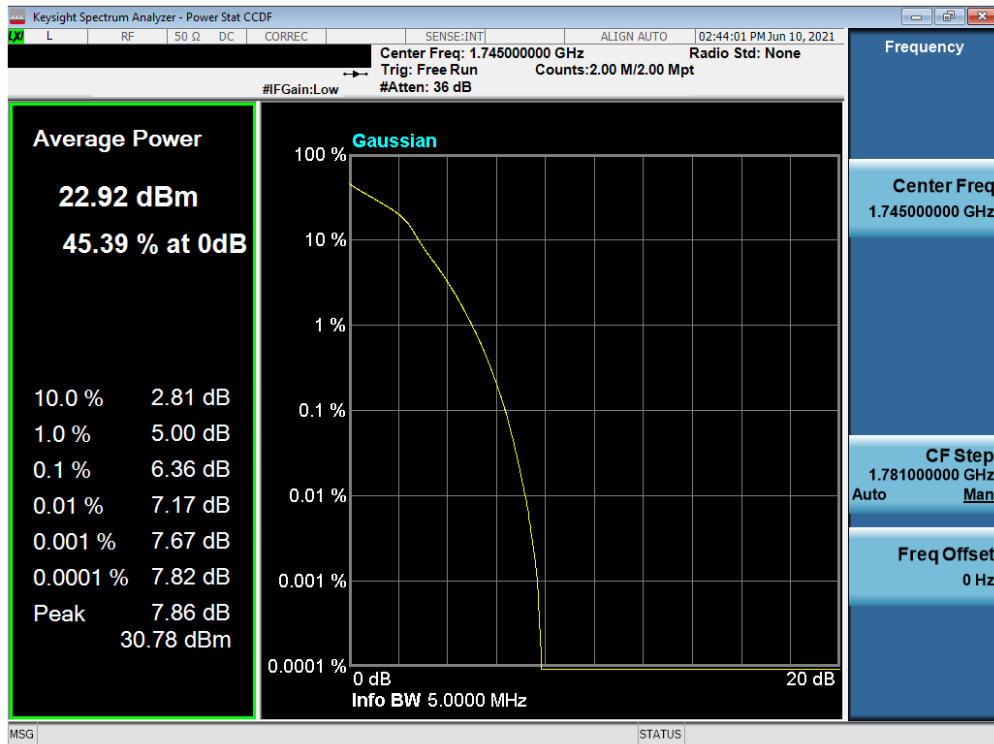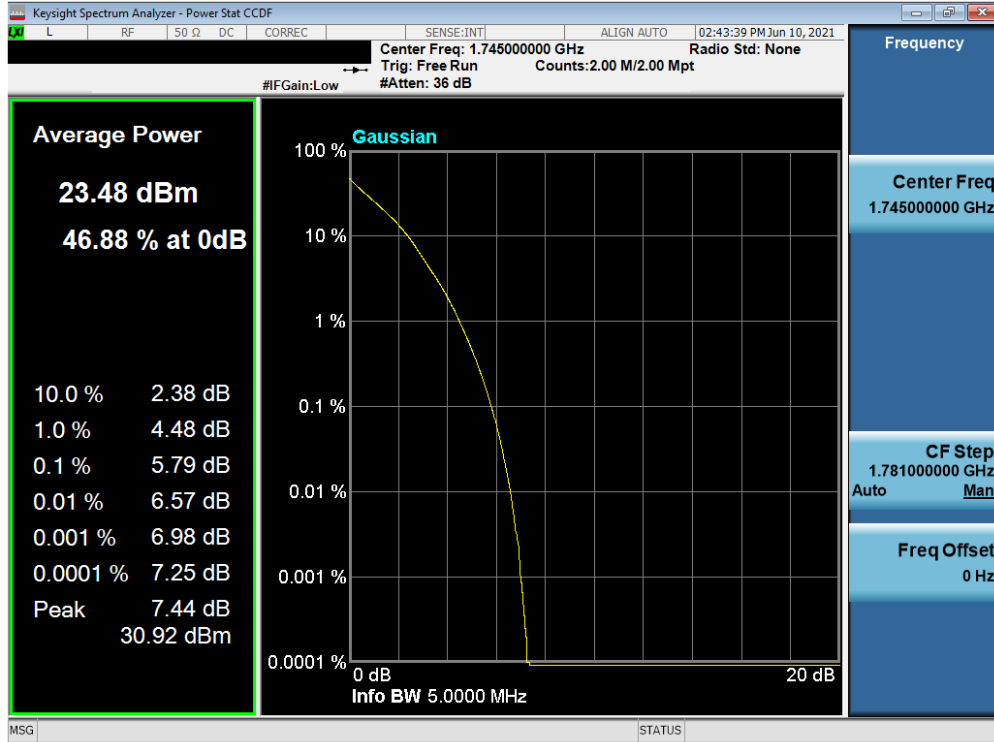

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 64 of 89

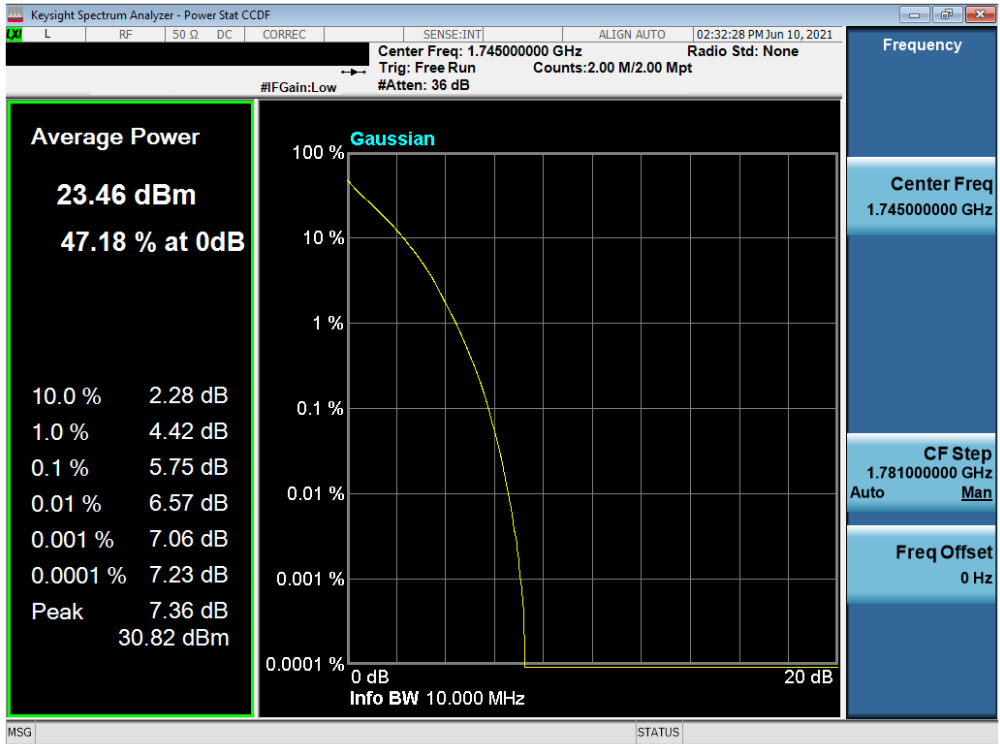


Plot 7-90. PAR Plot (LTE Band 66 - 10MHz QPSK - Full RB)

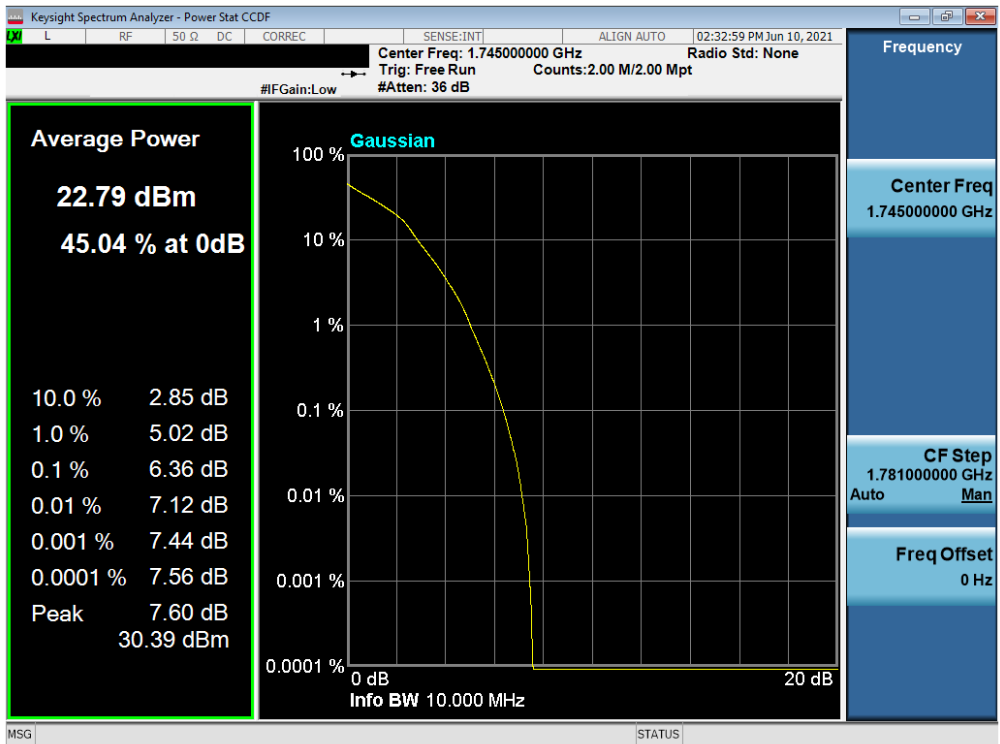


Plot 7-91. PAR Plot (LTE Band 66 - 10MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 65 of 89

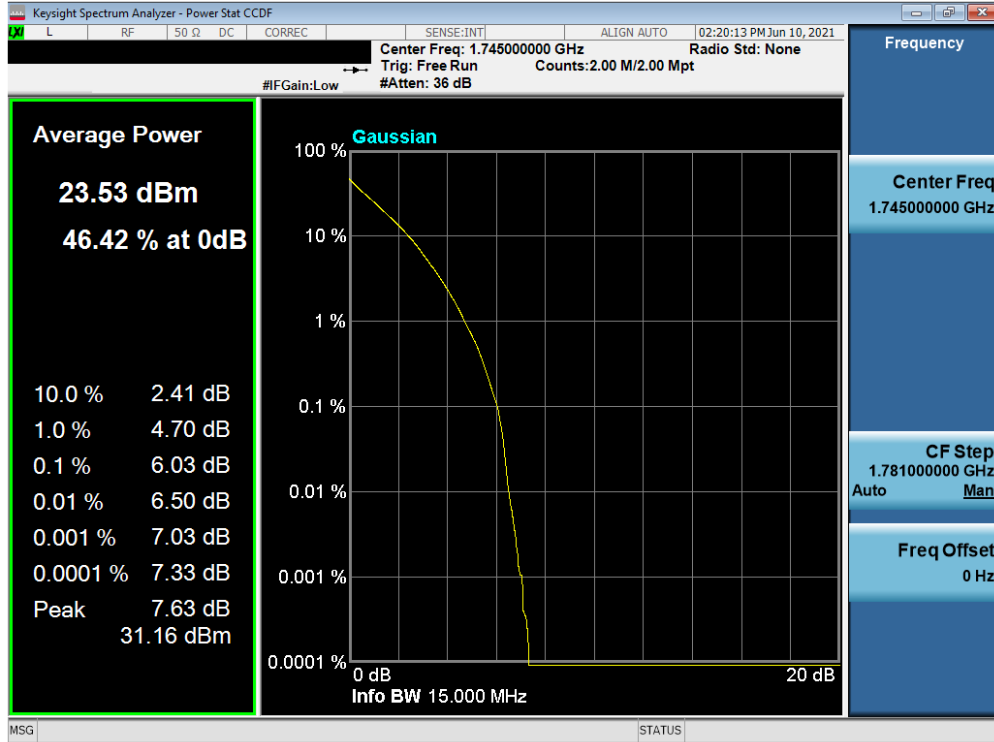


Plot 7-92. PAR Plot (LTE Band 66 - 15MHz QPSK - Full RB)

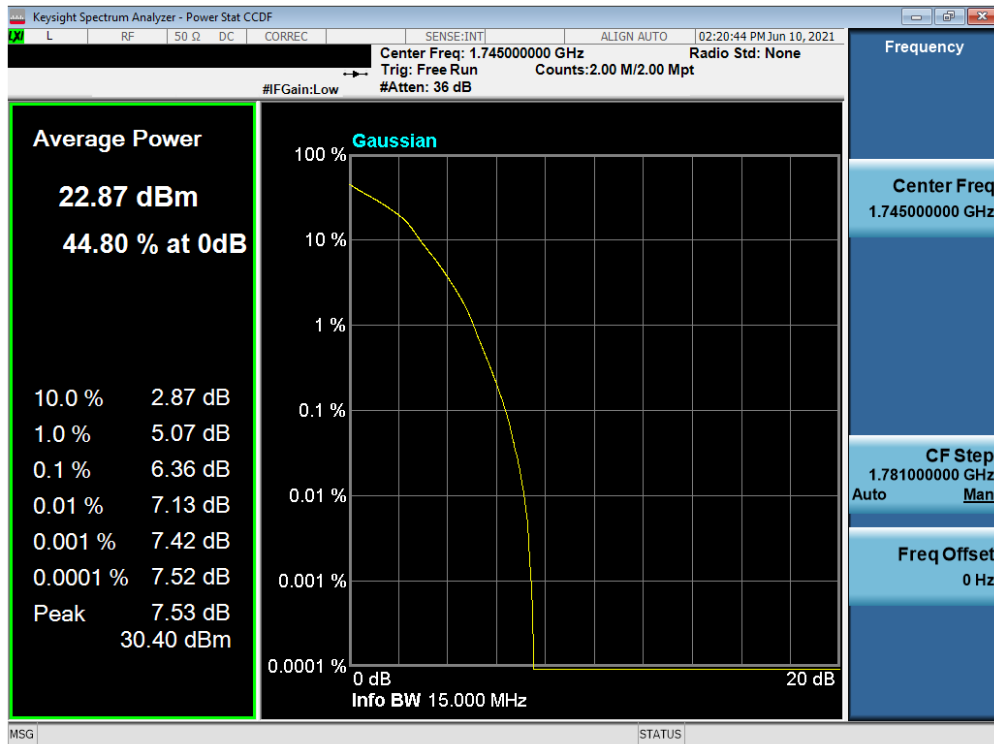


Plot 7-93. PAR Plot (LTE Band 66 - 15MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 66 of 89

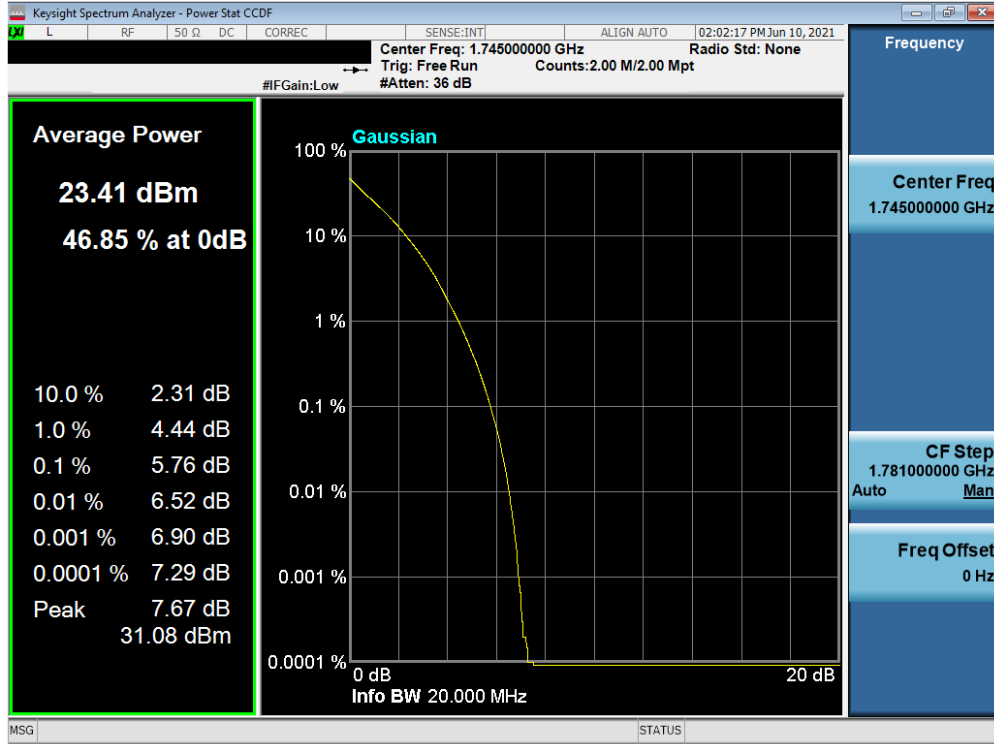


Plot 7-94. PAR Plot (LTE Band 66 - 20MHz QPSK - Full RB)

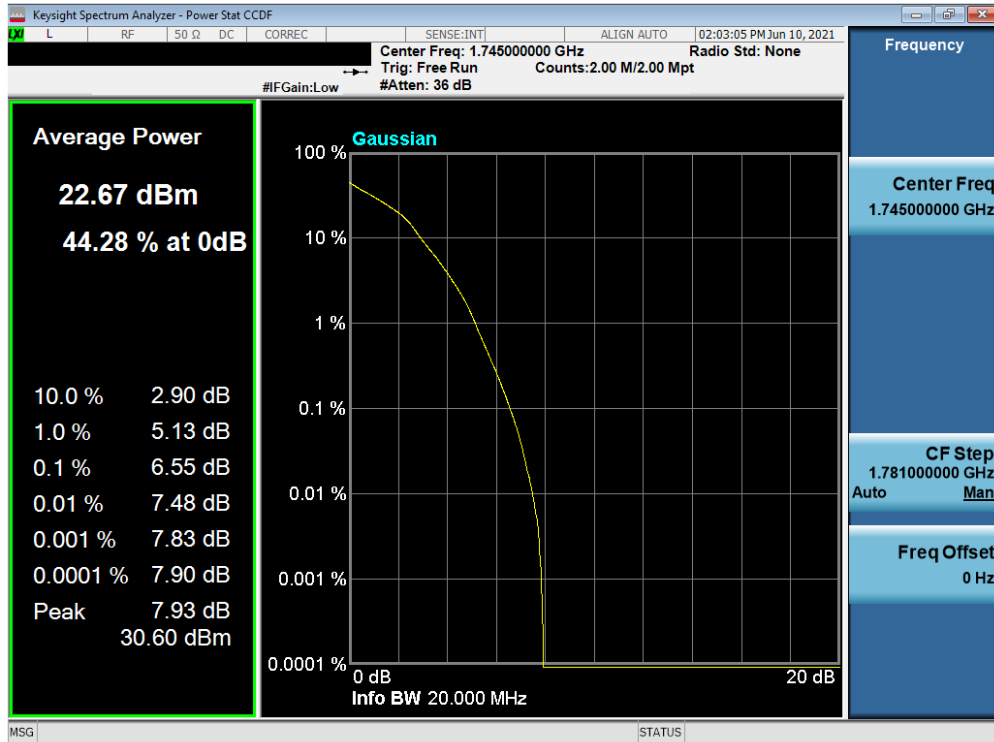


Plot 7-95. PAR Plot (LTE Band 66 - 20MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 67 of 89

LTE Band 4

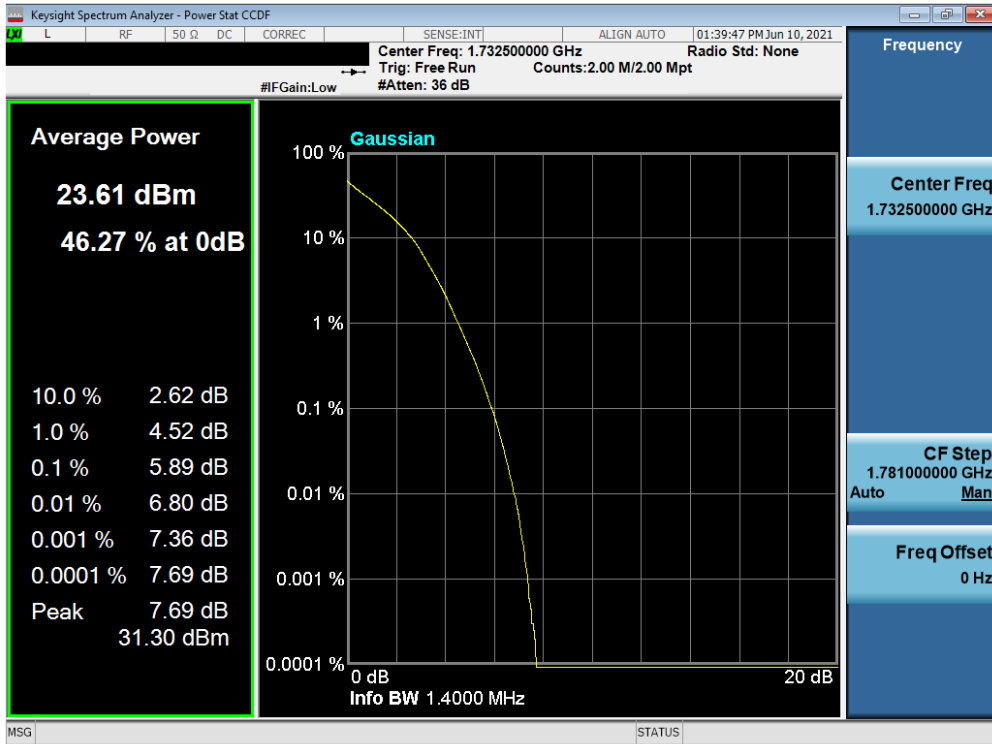


Plot 7-96. PAR Plot (LTE Band 4 - 1.4MHz QPSK - Full RB)

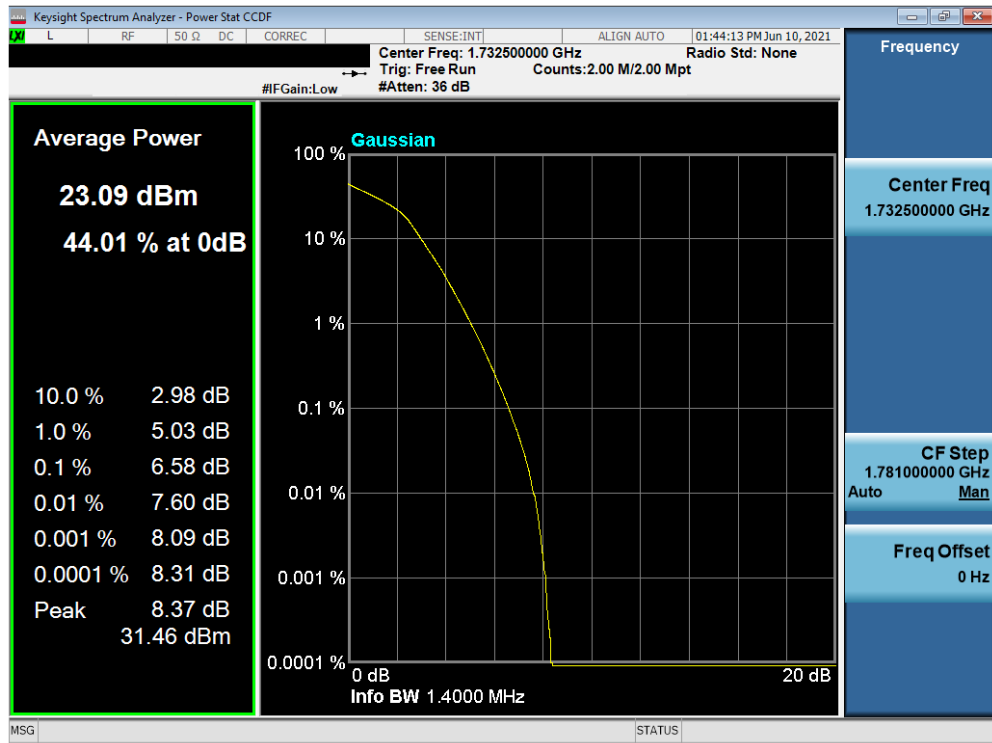


Plot 7-97. PAR Plot (LTE Band 4 - 1.4MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 68 of 89

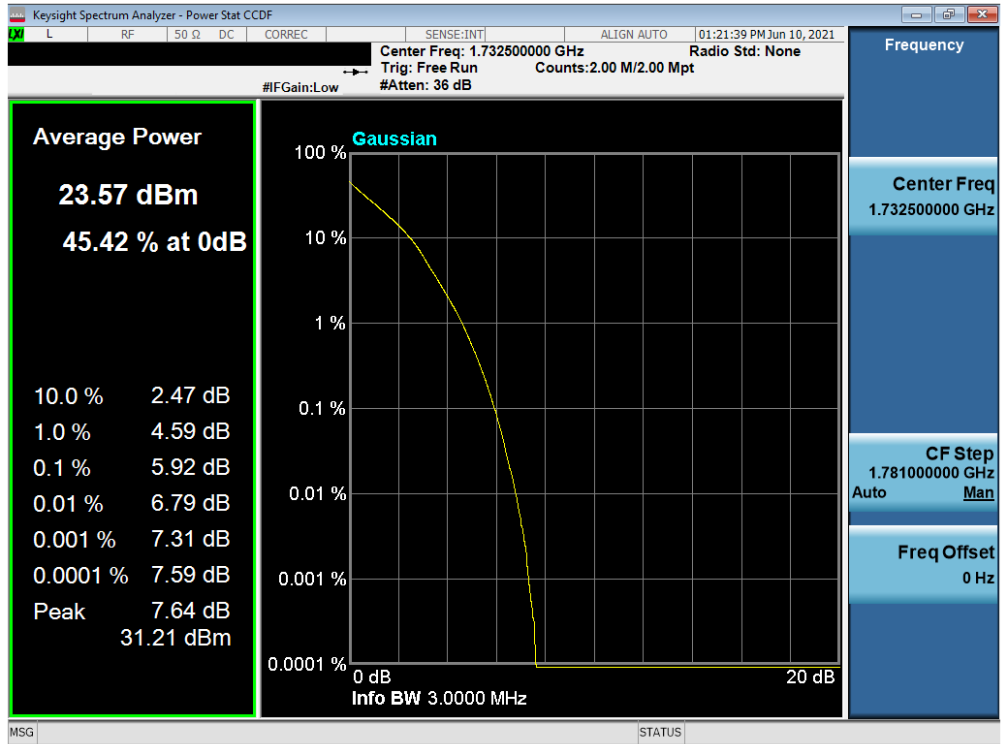


Plot 7-98. PAR Plot (LTE Band 4 - 3MHz QPSK - Full RB)

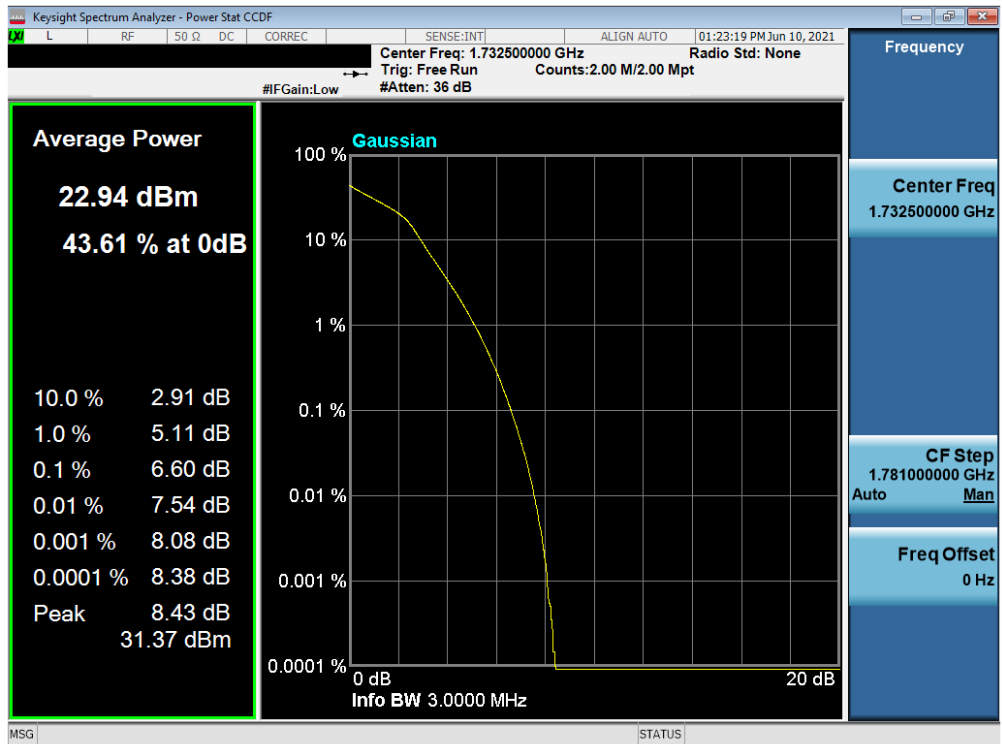


Plot 7-99. PAR Plot (LTE Band 4 - 3MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 69 of 89

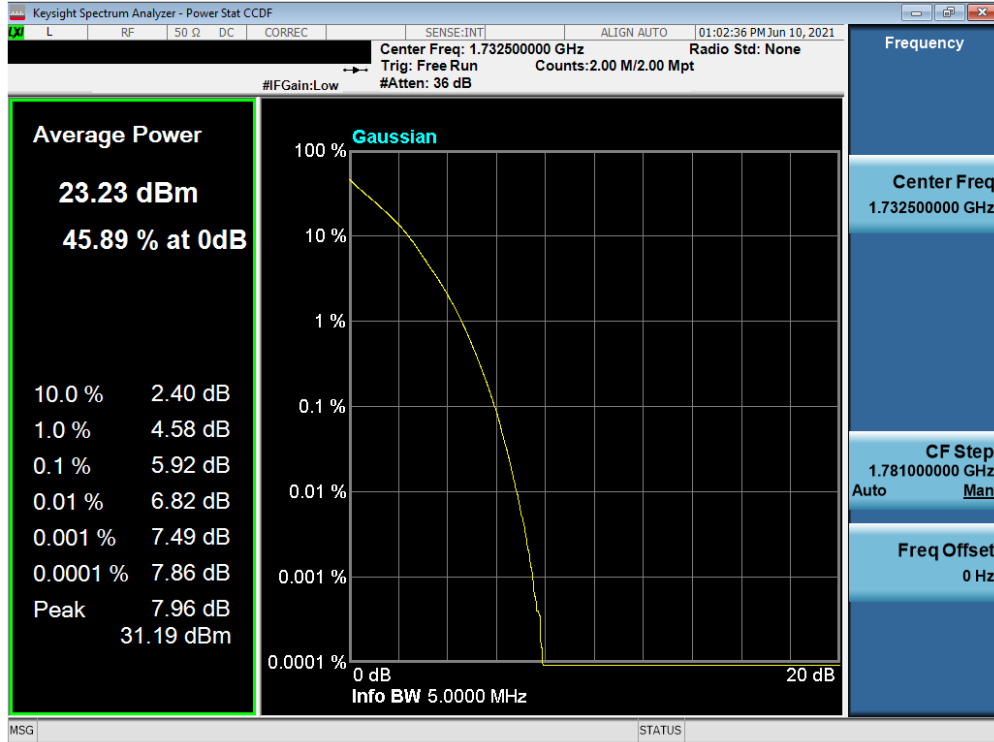


Plot 7-100. PAR Plot (LTE Band 4 - 5MHz QPSK - Full RB)

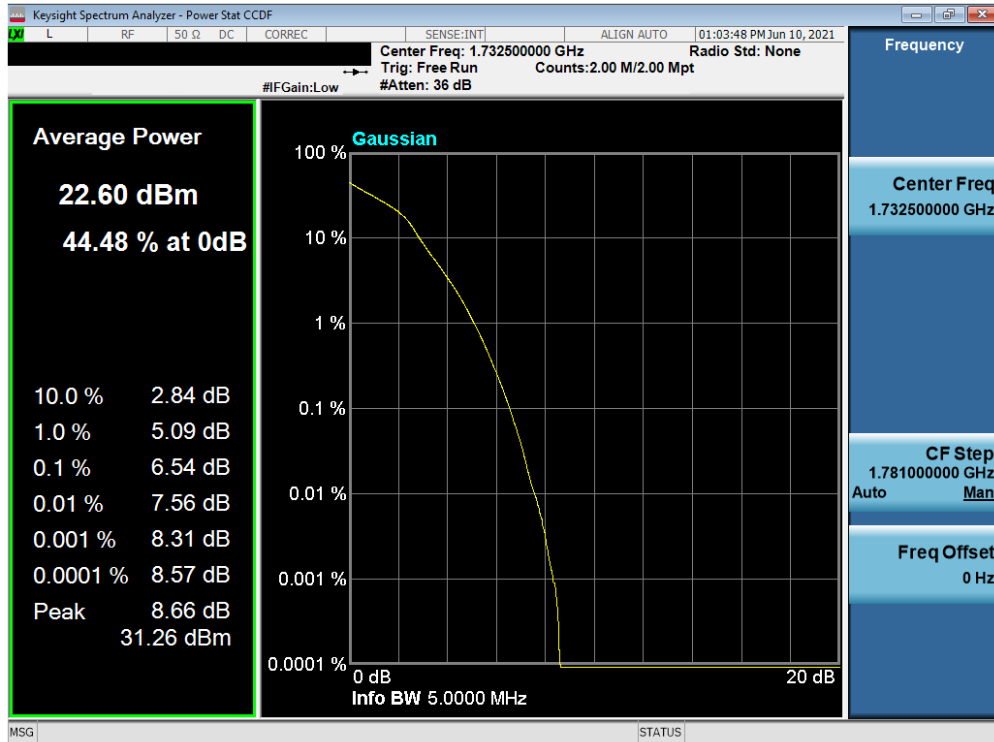


Plot 7-101. PAR Plot (LTE Band 4 - 5MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 70 of 89

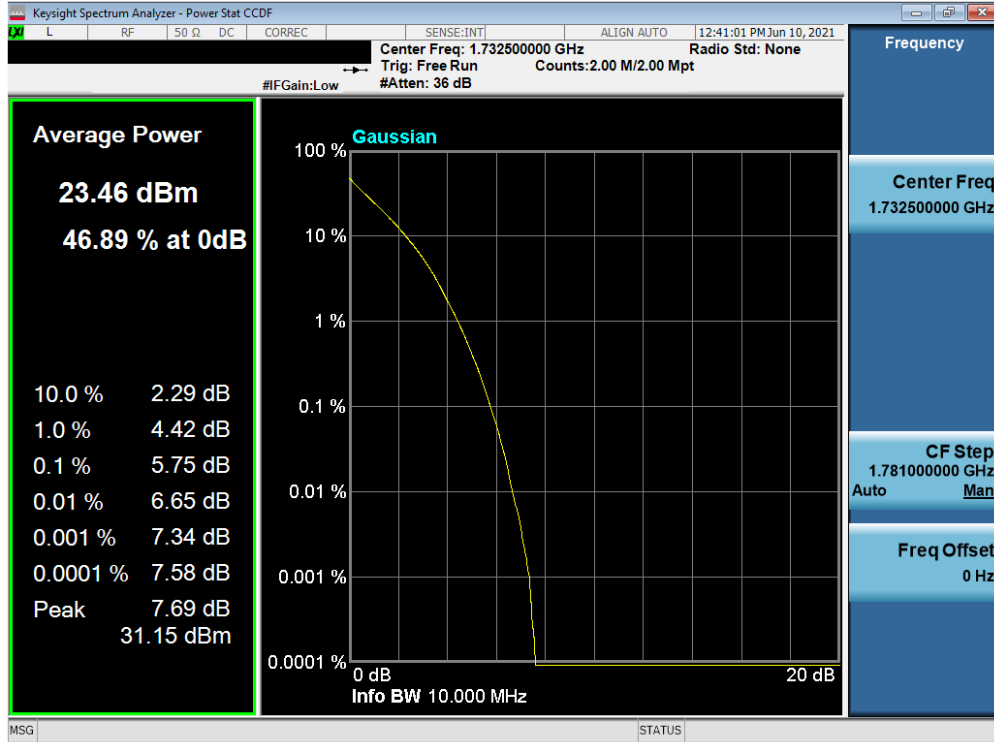


Plot 7-102. PAR Plot (LTE Band 4 - 10MHz QPSK - Full RB)

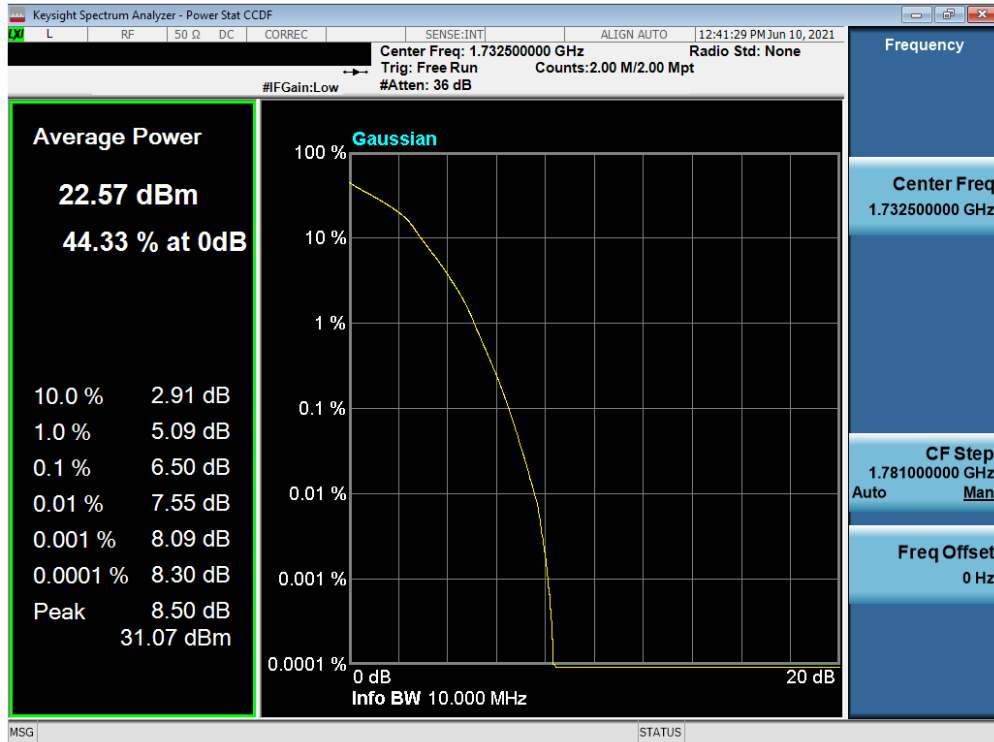


Plot 7-103. PAR Plot (LTE Band 4 - 10MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 71 of 89

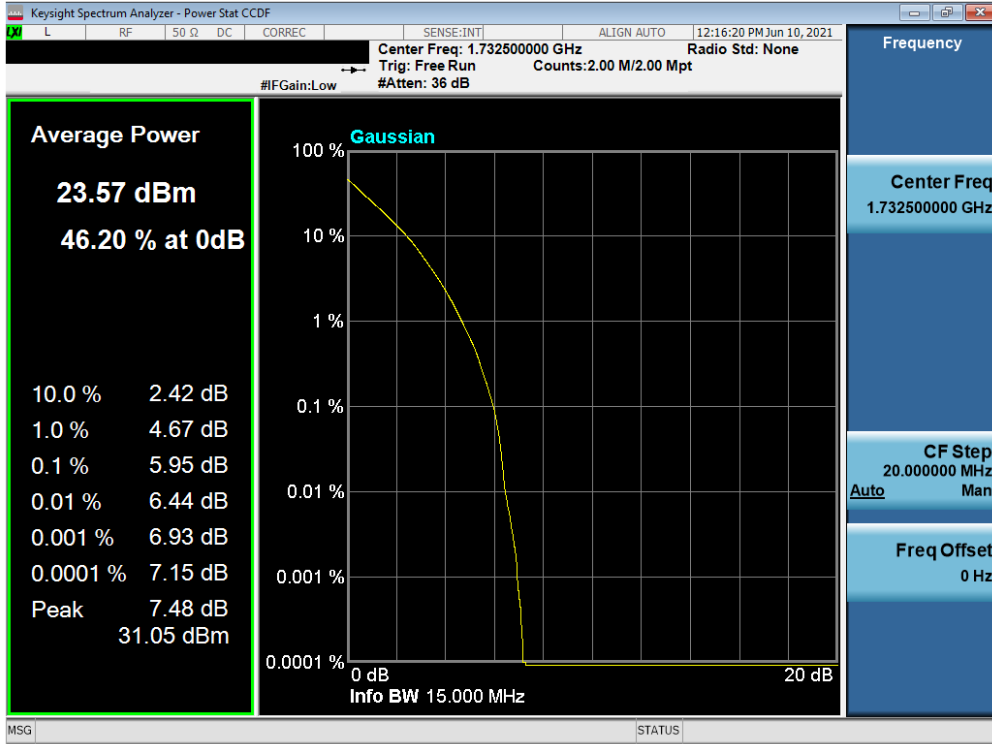


Plot 7-104. PAR Plot (LTE Band 4 - 15MHz QPSK - Full RB)

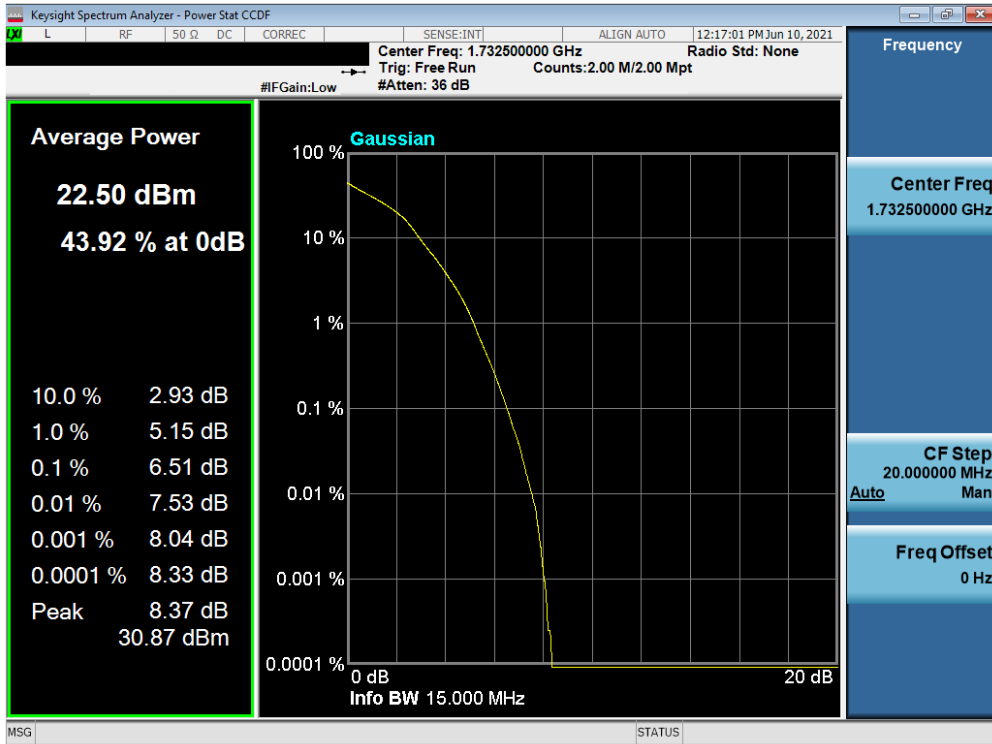


Plot 7-105. PAR Plot (LTE Band 4 - 15MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 72 of 89

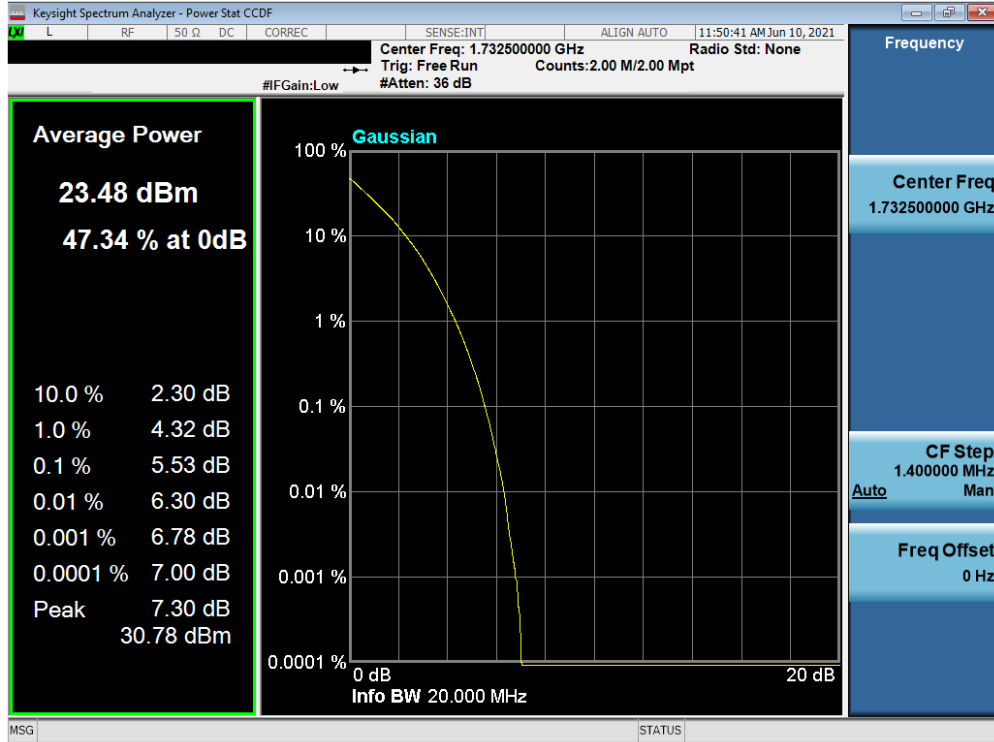


Plot 7-106. PAR Plot (LTE Band 4 - 20MHz QPSK - Full RB)

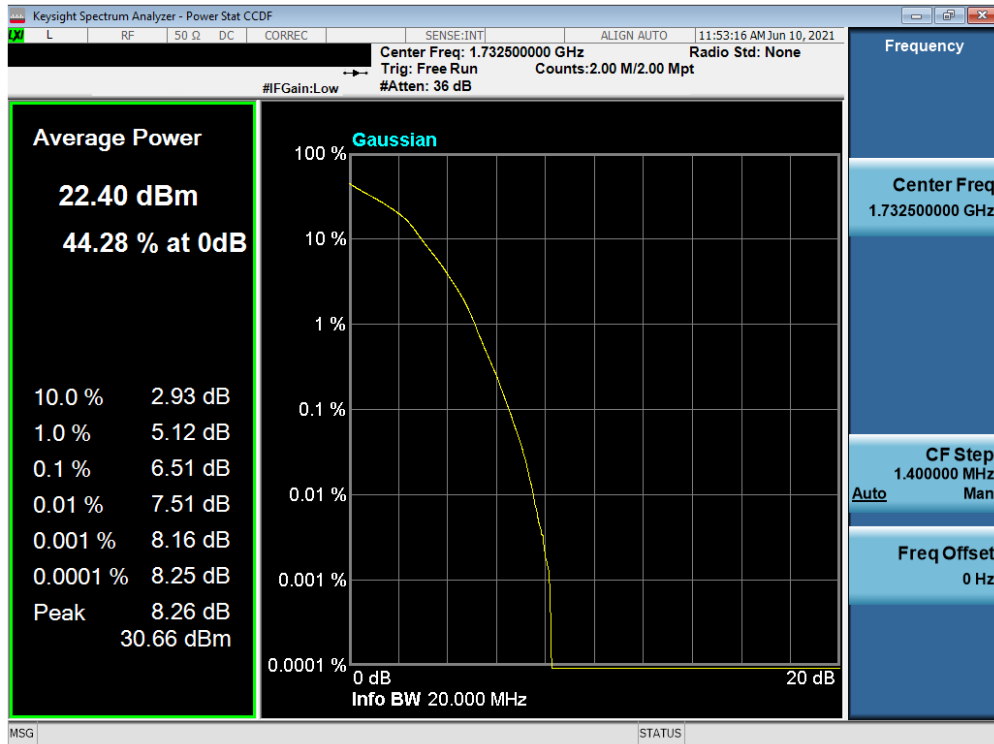

Plot 7-107. PAR Plot (LTE Band 4 - 20MHz 16-QAM - Full RB)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 73 of 89

WCDMA AWS

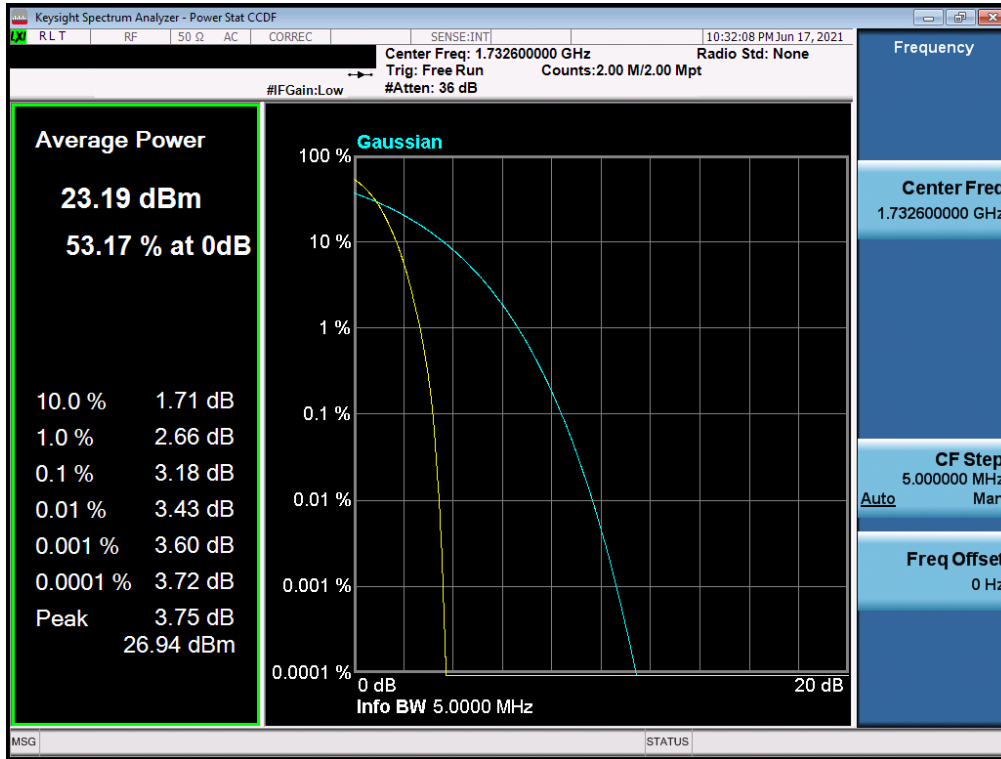

Plot 7-108. PAR Plot (WCDMA, Ch. 1413)

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 74 of 89

7.6 Radiated Power (EIRP) §27.50(b)(10), §27.50(c)(10), §27.50(d)(4)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1
ANSI C63.26-2015 – Section 5.2.5.5

Test Settings

The relevant equation for determining the EIRP from the conducted RF output power measured is:

$$EIRP = P_{Meas} - LC + GT$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as P_{Meas}, typically dBW or dBm)

P_{Meas} = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. EIRP Measurement Setup

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 75 of 89

Test Notes

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.
3. The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
4. This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
5. The Ant. Gains (GT) are listed in dBi.

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 76 of 89

Antenna FCM – EIRP

LTE Band 66

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1710.7	-12.50	1 / 0	24.41	11.91	15.524	30.00	-18.09
		1745.0	-12.50	6 / 0	24.09	11.59	14.421	30.00	-18.41
		1779.3	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
	16-QAM	1710.7	-12.50	1 / 0	23.77	11.27	13.397	30.00	-18.73
3 MHz	QPSK	1711.5	-12.50	1 / 0	24.48	11.98	15.776	30.00	-18.02
		1745.0	-12.50	1 / 7	24.21	11.71	14.825	30.00	-18.29
		1778.5	-12.50	1 / 14	24.50	12.00	15.849	30.00	-18.00
	16-QAM	1745.0	-12.50	1 / 14	23.87	11.37	13.709	30.00	-18.63
5 MHz	QPSK	1712.5	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
		1745.0	-12.50	1 / 24	24.33	11.83	15.241	30.00	-18.17
		1777.5	-12.50	1 / 24	24.43	11.93	15.596	30.00	-18.07
	16-QAM	1745.0	-12.50	1 / 24	23.91	11.41	13.836	30.00	-18.59
10 MHz	QPSK	1715.0	-12.50	1 / 25	24.40	11.90	15.488	30.00	-18.10
		1745.0	-12.50	1 / 0	24.47	11.97	15.740	30.00	-18.03
		1775.0	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
	16-QAM	1745.0	-12.50	1 / 25	23.89	11.39	13.772	30.00	-18.61
15 MHz	QPSK	1717.5	-12.50	1 / 37	24.50	12.00	15.849	30.00	-18.00
		1745.0	-12.50	1 / 74	24.50	12.00	15.849	30.00	-18.00
		1772.5	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
	16-QAM	1745.0	-12.50	1 / 74	23.90	11.40	13.804	30.00	-18.60
20 MHz	QPSK	1720.0	-12.50	1 / 0	24.42	11.92	15.560	30.00	-18.08
		1745.0	-12.50	1 / 0	24.21	11.71	14.825	30.00	-18.29
		1770.0	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
	16-QAM	1745.0	-12.50	1 / 0	23.91	11.41	13.836	30.00	-18.59

Table 7-2. Antenna FCM EIRP Data (LTE Band 66)

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 77 of 89

LTE Band 4

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1.4 MHz	QPSK	1710.7	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
		1732.5	-12.50	1 / 0	24.20	11.70	14.791	30.00	-18.30
		1754.3	-12.50	1 / 0	24.49	11.99	15.812	30.00	-18.01
	16-QAM	1732.5	-12.50	1 / 5	23.90	11.40	13.804	30.00	-18.60
3 MHz	QPSK	1711.5	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
		1732.5	-12.50	1 / 7	24.47	11.97	15.740	30.00	-18.03
		1753.5	-12.50	1 / 14	24.43	11.93	15.596	30.00	-18.07
	16-QAM	1732.5	-12.50	1 / 14	23.89	11.39	13.772	30.00	-18.61
5 MHz	QPSK	1712.5	-12.50	1 / 0	24.46	11.96	15.704	30.00	-18.04
		1732.5	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
		1752.5	-12.50	1 / 24	24.42	11.92	15.560	30.00	-18.08
	16-QAM	1732.5	-12.50	1 / 12	23.85	11.35	13.646	30.00	-18.65
10 MHz	QPSK	1715.0	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
		1732.5	-12.50	1 / 25	24.50	12.00	15.849	30.00	-18.00
		1750.0	-12.50	1 / 49	24.45	11.95	15.668	30.00	-18.05
	16-QAM	1732.5	-12.50	1 / 25	23.88	11.38	13.740	30.00	-18.62
15 MHz	QPSK	1717.5	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
		1732.5	-12.50	1 / 37	24.44	11.94	15.631	30.00	-18.06
		1747.5	-12.50	1 / 74	24.39	11.89	15.453	30.00	-18.11
	16-QAM	1732.5	-12.50	1 / 37	23.87	11.37	13.709	30.00	-18.63
20 MHz	QPSK	1720.0	-12.50	1 / 99	24.44	11.94	15.631	30.00	-18.06
		1732.5	-12.50	1 / 99	24.34	11.84	15.276	30.00	-18.16
		1745.0	-12.50	1 / 0	24.50	12.00	15.849	30.00	-18.00
	16-QAM	1732.5	-12.50	1 / 50	23.83	11.33	13.583	30.00	-18.67

Table 7-3. Antenna FCM EIRP Data (LTE Band 4)

WCDMA AWS

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	24.00	-12.50	11.50	14.125	30.00	-18.50
1732.60	WCDMA1700	23.92	-12.50	11.42	13.868	30.00	-18.58
1752.60	WCDMA1700	23.85	-12.50	11.35	13.646	30.00	-18.65

Table 7-4. Antenna FCM EIRP Data (WCDMA AWS)

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 78 of 89

7.7 Radiated Spurious Emissions

§2.1053, §27.53(f)

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI C63.26 2015, TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 79 of 89

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

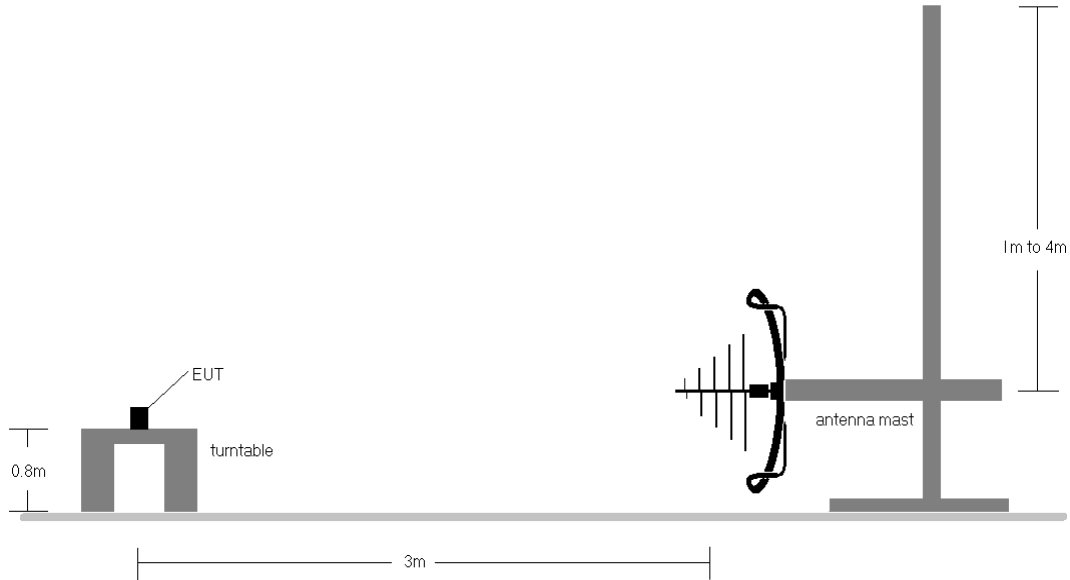


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

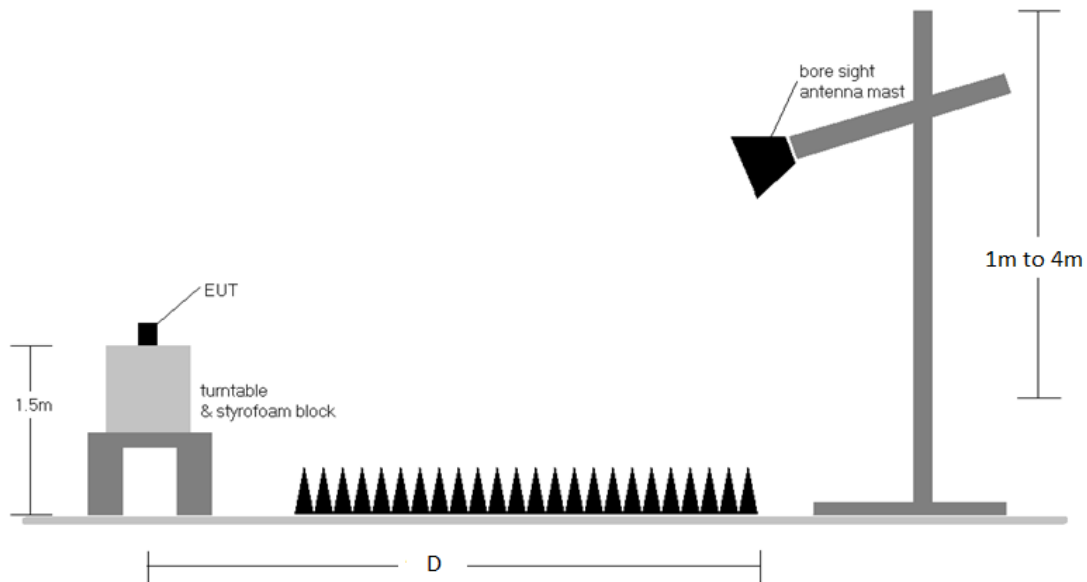


Figure 7-7. Test Instrument & Measurement Setup > 1GHz

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 80 of 89


Test Notes

1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a. $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b. $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
5. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 81 of 89

7.7.1 Antenna FCM – Radiated Spurious Emission Measurement

LTE Band 66/4

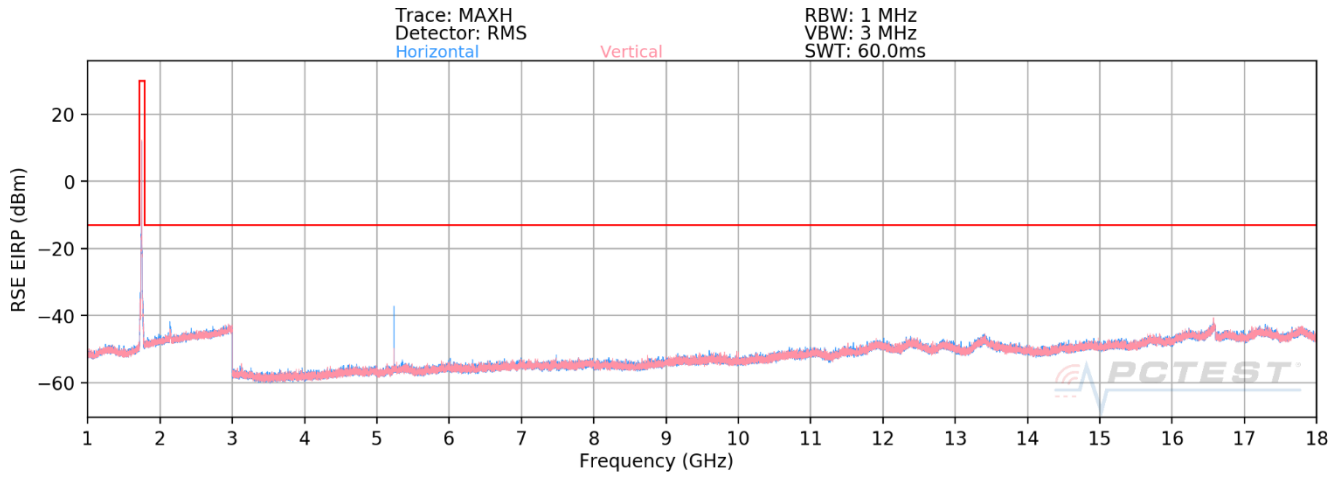

Plot 7-109. Antenna FCM Radiated Spurious Emission above 1GHz (LTE Band 66/4)

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 82 of 89

Bandwidth (MHz):	20								
Frequency (MHz):	1720.0								
RB / Offset:	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3440.0	H	-	-	-79.57	4.17	31.60	-63.65	-13.00	-50.65
5160.0	H	284	114	-69.27	7.21	44.94	-50.32	-13.00	-37.32
6880.0	H	-	-	-81.91	9.52	34.61	-60.65	-13.00	-47.65
8600.0	H	-	-	-84.07	10.91	33.84	-61.42	-13.00	-48.42
10320.0	H	-	-	-83.69	12.95	36.26	-59.00	-13.00	-46.00

Table 7-5. Antenna FCM Radiated Spurious Data (LTE Band 66/4 – Low Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	1745.0								
RB / Offset:	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3490.0	H	102	129	-79.08	4.22	32.14	-63.11	-13.00	-50.11
5235.0	H	117	104	-66.43	8.08	48.65	-46.61	-13.00	-33.61
6980.0	H	-	-	-81.92	9.63	34.71	-60.55	-13.00	-47.55
8725.0	H	-	-	-83.84	10.83	33.99	-61.26	-13.00	-48.26
10470.0	H	-	-	-83.76	13.11	36.35	-58.91	-13.00	-45.91


Table 7-6. Antenna FCM Radiated Spurious Data (LTE Band 66/4 – Mid Channel)

Bandwidth (MHz):	20								
Frequency (MHz):	1770.0								
RB / Offset:	1 / 50								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3540.00	H	102	331	-79.58	4.28	31.70	-63.55	-13.00	-50.55
5310.00	H	313	111	-67.92	8.45	47.53	-47.73	-13.00	-34.73
7080.00	H	-	-	-82.22	9.74	34.52	-60.73	-13.00	-47.73
8850.00	H	-	-	-83.53	11.30	34.77	-60.48	-13.00	-47.48
10620.00	H	-	-	-83.82	13.86	37.04	-58.22	-13.00	-45.22

Table 7-7. Antenna FCM Radiated Spurious Data (LTE Band 66/4 – High Channel)

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 83 of 89

WCDMA AWS

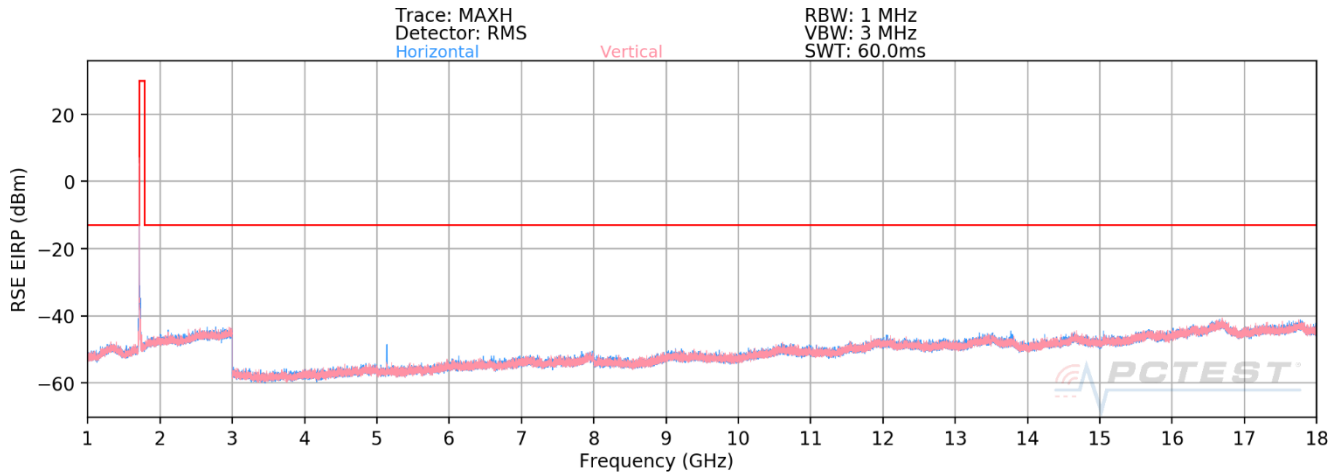

Plot 7-110. Antenna FCM Radiated Spurious Emission above 1GHz (WCDMA AWS)

FCC ID: BCG-A2478	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch	Page 84 of 89

Mode:	WCDMA RMC								
Channel:	1312								
Frequency (MHz):	1712.4								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3424.8	H	-	-	-81.60	5.65	31.05	-64.21	-13.00	-51.21
5137.2	H	248	196	-74.75	9.17	41.42	-53.84	-13.00	-40.84
6849.6	H	-	-	-83.98	11.52	34.54	-60.72	-13.00	-47.72
8562.0	H	-	-	-85.00	12.98	34.98	-60.28	-13.00	-47.28
10274.4	H	-	-	-84.42	15.17	37.75	-57.51	-13.00	-44.51

Table 7-8. Antenna FCM Radiated Spurious Data (WCDMA AWS – Low Channel)

Mode:	WCDMA RMC								
Channel:	1413								
Frequency (MHz):	1732.6								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3465.2	H	-	-	-81.74	5.90	31.16	-64.09	-13.00	-51.09
5197.8	H	302	156	-79.11	9.33	37.22	-58.04	-13.00	-45.04
6930.4	H	-	-	-84.26	11.85	34.59	-60.66	-13.00	-47.66
8663.0	H	-	-	-84.90	13.29	35.39	-59.87	-13.00	-46.87
10395.6	H	-	-	-84.91	15.98	38.07	-57.19	-13.00	-44.19

Table 7-9. Antenna FCM Radiated Spurious Data (WCDMA AWS – Mid Channel)

Mode:	WCDMA RMC								
Channel:	1513								
Frequency (MHz):	1752.6								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3505.2	H	-	-	-81.73	6.06	31.33	-63.92	-13.00	-50.92
5257.8	H	265	150	-77.56	8.99	38.43	-56.83	-13.00	-43.83
7010.4	H	-	-	-84.15	11.91	34.76	-60.49	-13.00	-47.49
8763.0	H	-	-	-84.38	13.08	35.70	-59.56	-13.00	-46.56
10515.6	H	-	-	-85.18	16.73	38.55	-56.71	-13.00	-43.71

Table 7-10. Antenna FCM Radiated Spurious Data (WCDMA AWS – High Channel)

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 85 of 89

7.8 Frequency Stability / Temperature Variation

\$2.1053, \$27.53

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26 2015

TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

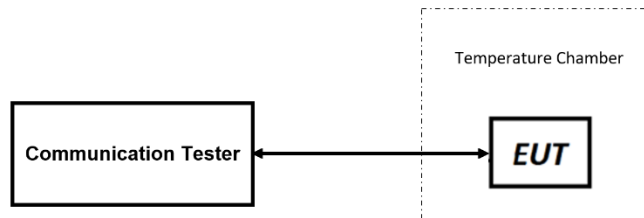


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A2478	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 86 of 89

Frequency Stability / Temperature Variation

LTE Band 66/4							
		Low Channel Frequency (Hz):		1,720,000,000			
		High Channel Frequency (Hz):		1,770,000,000			
		Ref. Voltage (VDC):		3.80			
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,720,000,000	1,770,000,001	0.11	0.10	0.0000000
		- 20	1,720,000,000	1,770,000,001	-0.56	0.30	0.0000000
		- 10	1,720,000,000	1,770,000,001	-0.18	-0.01	0.0000000
		0	1,719,999,999	1,770,000,001	-0.95	-0.18	-0.0000001
		+ 10	1,720,000,000	1,770,000,001	-0.42	0.08	0.0000000
		+ 20 (Ref)	1,720,000,000	1,770,000,001	0.00	0.00	0.0000000
		+ 30	1,720,000,000	1,770,000,001	-0.33	0.51	0.0000000
		+ 40	1,720,000,001	1,770,000,000	0.76	-0.73	0.0000000
		+ 50	1,719,999,999	1,770,000,002	-0.81	0.75	0.0000000
Battery Endpoint	3.40	+ 20	1,720,000,000	1,770,000,001	-0.57	-0.19	0.0000000

Table 7-11. LTE Band 66/4 Frequency Stability Data

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 87 of 89

Frequency Stability / Temperature Variation

WCDMA AWS							
		Low Channel Frequency (Hz):		1,712,400,000			
		High Channel Frequency (Hz):		1,752,600,000			
		Ref. Voltage (VDC):		3.80			
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	1,712,400,000	1,752,600,001	0.10	0.40	0.00000002
		- 20	1,712,400,000	1,752,600,001	0.48	0.31	0.00000003
		- 10	1,712,400,000	1,752,600,000	0.28	-0.06	0.00000002
		0	1,712,400,000	1,752,600,000	0.82	-0.35	0.00000005
		+ 10	1,712,400,000	1,752,600,005	0.54	4.47	0.00000026
		+ 20 (Ref)	1,712,400,000	1,752,600,000	0.00	0.00	0.00000000
		+ 30	1,712,400,000	1,752,600,001	0.45	0.25	0.00000003
		+ 40	1,712,400,005	1,752,600,002	5.61	1.26	0.00000033
		+ 50	1,712,400,001	1,752,600,003	1.39	2.51	0.00000014
Battery Endpoint	3.40	+ 20	1,712,400,000	1,752,600,001	0.65	0.78	0.00000004

Table 7-23. WCDMA AWS Frequency Stability Data

FCC ID: BCG-A2478		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch		Page 88 of 89

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Watch** **FCC ID: BCG-A2478** complies with all the requirements of Part 27 of the FCC rules.

FCC ID: BCG-A2478	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2106070046-03.BCG	Test Dates: 06-08-2021 – 08-04-2021	EUT Type: Watch
		Page 89 of 89