



FCC Part 1 Subpart I
FCC Part 2 Subpart J
INDUSTRY CANADA RSS 216 ISSUE 1

RF EXPOSURE REPORT

FOR

APPLE WATCH MAGNETIC CHARGING BRACELET

MODEL NUMBER: A1626

FCC ID: BCGA1626
IC: 579C-A1626

REPORT NUMBER: 14U19490-E7, REVISION C

ISSUE DATE: FEBRUARY 25, 2015

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	02/12/2015	Initial Issue	M. Mekuria
A	02/19/2015	Address TCB's Question on Section 7.	C. Pang
B	02/24/2015	Address TCB's Questions on Section 5.3 and 7.3	C. Pang
C	02/25/2015	Add Description on Section 5.2	C. Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. REFERENCES	5
4. FACILITIES AND ACCREDITATION.....	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT.....	6
5.2. DESCRIPTION OF TEST SETUP.....	6
6. TEST AND MEASUREMENT EQUIPMENT	8
7. MAXIMUM PERMISSIBLE RF EXPOSURE	8
7.1. FCC RULES.....	8
7.2. IC RULES.....	9
7.3. MEASUREMENTS ESULTS	10

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: APPLE WATCH MAGNETIC CHARGING BRACELET

MODEL: A1626

SERIAL NUMBER: DLCNT0STG4K8


DATE TESTED: JANUARY 15 – 21 AND FEBRUARY 12, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I & PART 2 SUBPART J	Pass
INDUSTRY CANADA RSS 102 ISSUE 4	Pass

UL Verification Services Inc. calculated the RF Exposure of the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



MENGISTU MEKURIA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Calculated By:



TONY WANG
LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01 and IC Safety Code 6.

3. REFERENCES

All measurements were made as documented in test report UL Verification Services Inc. Document 14U19490-E1 for operation in the 326.5 KHz band.

Output power data is excerpted from the applicable test reports.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a stainless steel magnetic charging bracelet which includes an inductive charging coil to charge the Apple Watch.

5.2. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC adapter	Apple	A1385	D29236C3AFDHLHCT	N/A
Watch	Apple	A1553	FG7NPOVLFY2H	BCG-E2871
Watch	Apple	A1554	FG7NG0CVFY1P	BCG-E2870

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	USB	Un-shielded	1.0	N/A


TEST SETUP

The following three configurations are tested:

Configuration	Test Mode	Descriptions
1	Standby	EUT without supporting device, continue transmitting
2	Operating (A1553)	EUT with Client A1553 paired and in use
3	Operating (A1554)	EUT with Client A1554 paired and in use

MEASUREMENT SETUP

The measurement was taken using a probe placed 10 cm from the center of the probe to the edge of the EUT. Measurements were taken from the top and all sides of the EUT per KDB 680106 D01

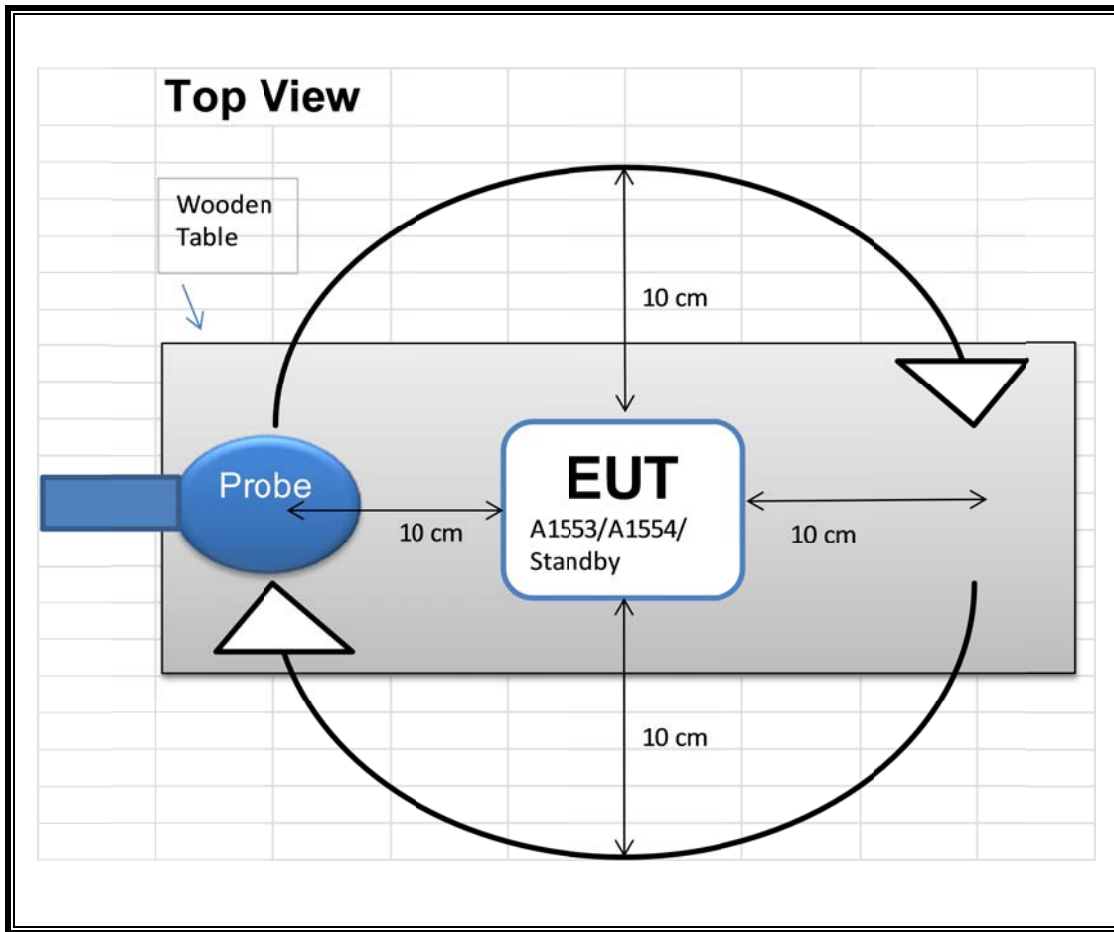

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Local ID (T No.)	Cal Date	Cal Due
Electric and Magnetic Field Probe	Narda	EHP-200A	1085	12/08/2014	12/08/2015

7. MAXIMUM PERMISSIBLE RF EXPOSURE

7.1. FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

7.2. IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

7.3. MEASUREMENTS ESULTS

RESULTS

Note: both Magnetic and electric field strength have been measured from 9 KHz to 30 MHz at 10cm.

Configuration	Test Mode	Measuring Distance (cm)	Magnetic Field (A/m)	Electric Field (V/m)
1	Standby	10	0.005	0.1
2	A1553		0.005	0.1
3	A1554		0.005	0.1

Note: For detail information, please see Section 5.2

END OF REPORT