

MEASUREMENT REPORT

FCC PART 15.247 / ISCED RSS-247 Bluetooth

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

07/27/2018-10/10/2018

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C1806050010-05.BCG

FCC ID:

BCGA1876

IC:

579C-A1876

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A1876

EUT Type:

Tablet Device

Max. RF Output Power:

108.893 mW (20.37 dBm) Peak Conducted

Frequency Range:

2402 – 2480MHz

Type of Modulation:

GFSK, $\pi/4$ -DQPSK, 8DPSK

FCC Classification:

FCC Part 15 Spread Spectrum Transmitter (DSS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 1 of 115

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	5
2.4	Test Support Equipment	6
2.5	Test Configuration	6
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	AC Line Conducted Emissions	7
3.3	Radiated Emissions	8
3.4	Environmental Conditions	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA	11
7.0	TEST RESULTS	12
7.1	Summary	12
7.2	20dB Bandwidth Measurement	13
7.3	Output Power Measurement	26
7.3.1	Peak Output Power Measurement	28
7.3.2	Average Output Power Measurement	31
7.4	Band Edge Compliance	34
7.5	Carrier Frequency Separation	48
7.6	Time of Occupancy	55
7.7	Number of Hopping Channels	60
7.8	Conducted Spurious Emissions	67
7.9	Radiated Spurious Emission Measurements – Above 1GHz	77
7.9.1	Simultaneous Tx Radiated Spurious Emission Measurements	90
7.10	Radiated Restricted Band Edge Measurements	94
7.11	Radiated Spurious Emissions Measurements – Below 1GHz	106
7.12	Line Conducted Measurement Data	111
15.	CONCLUSION	115

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 2 of 115

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 3 of 115

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA1876**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: DLXX4007KR4G, DLXX4005KR4G

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Frequency/ Channel Operations

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 4 of 115

Notes:

1. This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
Bluetooth Mode		Duty Cycle [%]
GFSK	ePA	100.0
	iPA	100.0
8DPSK	ePA	100.0
	iPA	100.0

Table 2-2. Measured Duty Cycles

2. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing, which was single antenna transmitting both 2.4GHz and 5GHz. The data for this configuration is contained in this test report.

Worst Case Configuration: ANT2 is transmitting both 2.4GHz and 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	2
Channel	39	36
Operating Frequency (MHz)	2441	5180
Data Rate (Mbps)	GFSK/1Mbps	MCS0
Mode	Bluetooth	UNII

Note: All different combinations of co-TX have been investigated and only the worst case is reported.

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna Gain (dBi)		
	Antenna 0	Antenna 1	Antenna 2
2.4	1.8	-0.4	-14.5

Table 2-3. Antenna Peak Gain

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 5 of 115

2.4 Test Support Equipment

1	Apple MacBook	Model:	A1398	S/N:	C2QKP008F6F3
	w/AC/DC Adapter	Model:	A1435	S/N:	C04325505K1F288BG
2	Apple USB-C Cable	Model:	Chimp	S/N:	300C44
3	USB-C Cable	Model:	A146	S/N:	N/A
	w/ AC Adapter	Model:	A1720	S/N:	C3D8257A2EPGKVP2C
4	USB-C to 3.5mm Aux Adapter	Model:	A2049	S/N:	DWH413100GJJKLT12
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-4. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.12 for AC line conducted emissions test setups, 7.9 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

$\pi/4$ -DQPSK has been investigated and confirmed as not the worst case.

2.6 Software and Firmware

The test was conducted with firmware version 16B64 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 6 of 115

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.20.01.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 7 of 115

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 8 of 115

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 9 of 115

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 10 of 115

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2495A	Power Meter	11/28/2017	Annual	11/28/2018	1039008
Anritsu	MA2411B	Power Sensor 10MHz-40GHz	11/28/2017	Annual	11/28/2018	1027293
COM-POWER	LIN-120A	LISN	3/7/2018	Annual	3/7/2019	241296
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	2/27/2018	Annual	2/27/2019	MY49430244
Maturo	NCD/264/205616	Mast/TT controller	N/A	N/A	N/A	NCD_264
Rohde & Schwarz	ESW44	EMI Test Receiver	12/20/2017	Annual	12/20/2018	101668
Rohde & Schwarz	ESW44	EMI Test Receiver	11/16/2017	Annual	11/16/2018	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	2/6/2018	Annual	2/6/2019	101619
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	7/5/2018	Annual	7/5/2019	102137
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	12/11/2017	Annual	12/11/2018	102136
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/11/2018	Annual	6/11/2019	100051
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/25/2018	Annual	1/25/2019	102333
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/13/2018	Annual	3/13/2019	T058601-02
Rohde & Schwarz	HL562E	Ultra Broadband Antenna (30MHz - 6GHz)	6/8/2018	Annual	6/8/2019	100810
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/13/2017	Annual	11/13/2018	101057
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/29/2017	Annual	11/29/2018	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/13/2018	Annual	3/13/2019	100519

Table 6-1. Annual Test Equipment Calibration Schedule

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 11 of 115

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA1876
 Method/System: Frequency Hopping Spread Spectrum (FHSS)
 Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)(iii)	RSS-247 [5.1(1)]	20dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.247(b)(1)	RSS-247 [5.4(2)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(2)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	Conducted > 20dBc		PASS	Section 7.4, Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.10, Section 7.11
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.12

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.0.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 12 of 115

7.2 20dB Bandwidth Measurement

§15.247 (a.1.iii); RSS-247 [5.1(1)]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Both power schemes were investigated and only the worst case is reported.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 13 of 115

Antenna 0

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	951.70
2441	1.0	GFSK	ePA	39	950.20
2480	1.0	GFSK	ePA	78	950.50
2402	2.0	8DPSK	ePA	0	1356.00
2441	2.0	8DPSK	ePA	39	1356.00
2480	2.0	8DPSK	ePA	78	1356.00

Table 7-2. Conducted 20dB Bandwidth Measurements ANT0

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 14 of 115



Plot 7-1. 20dB Bandwidth Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 0)




Plot 7-2. 20dB Bandwidth Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 15 of 115




Plot 7-3. 20dB Bandwidth Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 78)

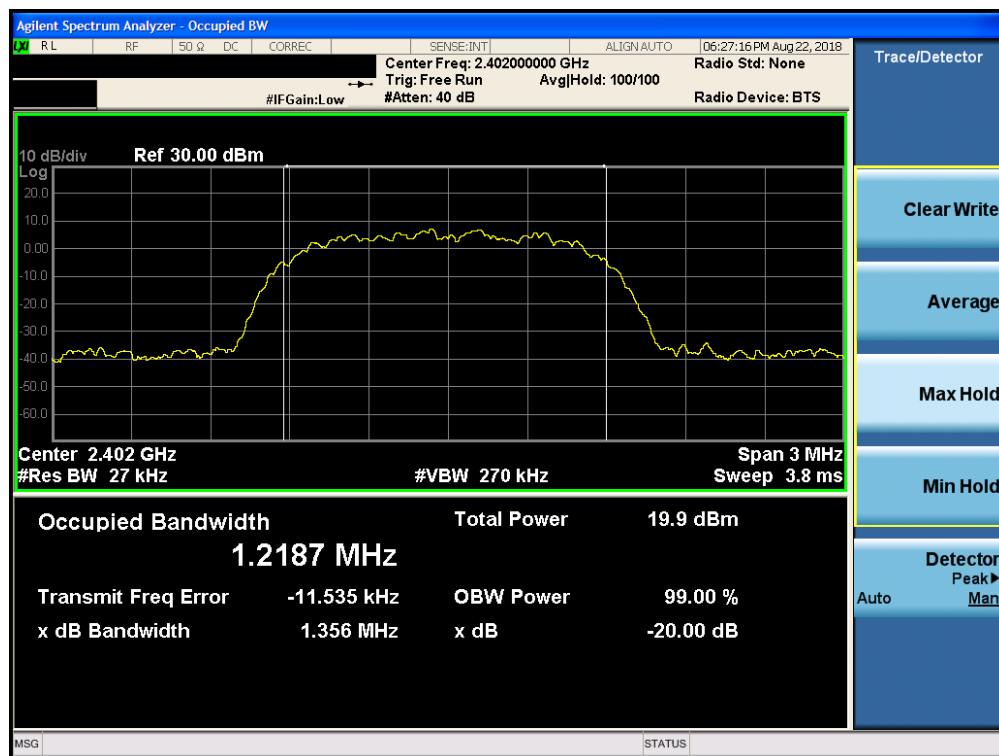


Plot 7-4. 20dB Bandwidth Plot ANT 0 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 16 of 115

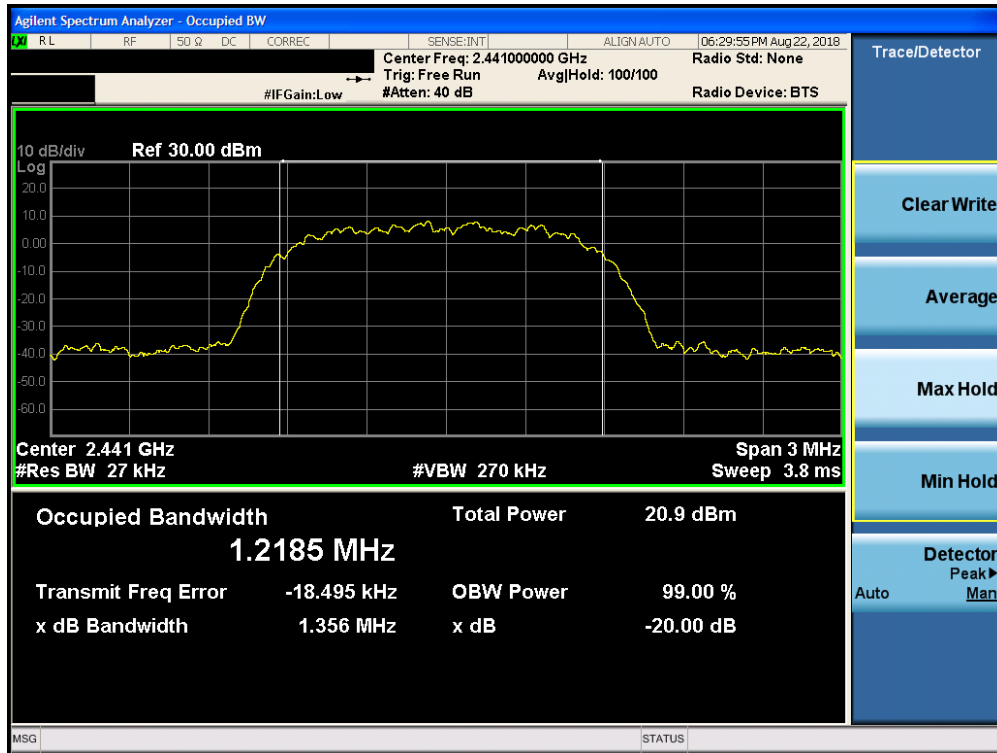

Plot 7-5. 20dB Bandwidth Plot ANT 0 (Bluetooth, 8DPSK, ePA – Ch. 39)

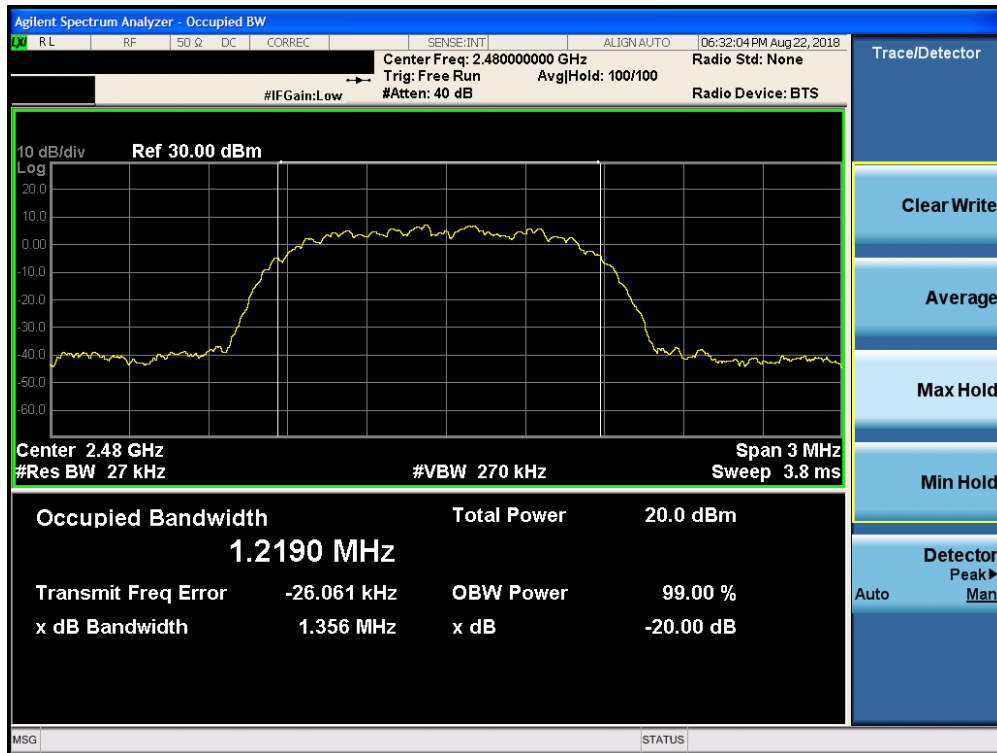

Plot 7-6. 20dB Bandwidth Plot ANT 0 (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 17 of 115

Antenna 1

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	951.10
2441	1.0	GFSK	ePA	39	951.30
2480	1.0	GFSK	ePA	78	950.90
2402	2.0	8DPSK	ePA	0	1356.00
2441	2.0	8DPSK	ePA	39	1356.00
2480	2.0	8DPSK	ePA	78	1356.00

Table 7-3. Conducted 20dB Bandwidth Measurements ANT1

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 18 of 115

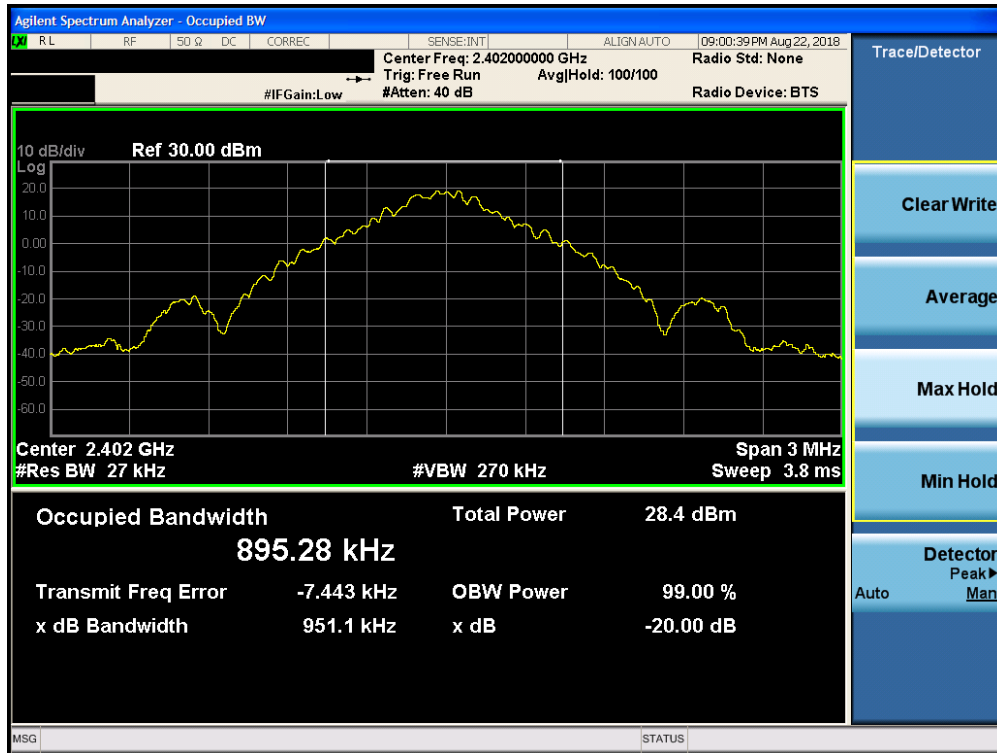


Plot 7-7. 20dB Bandwidth Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 0)




Plot 7-8. 20dB Bandwidth Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 19 of 115

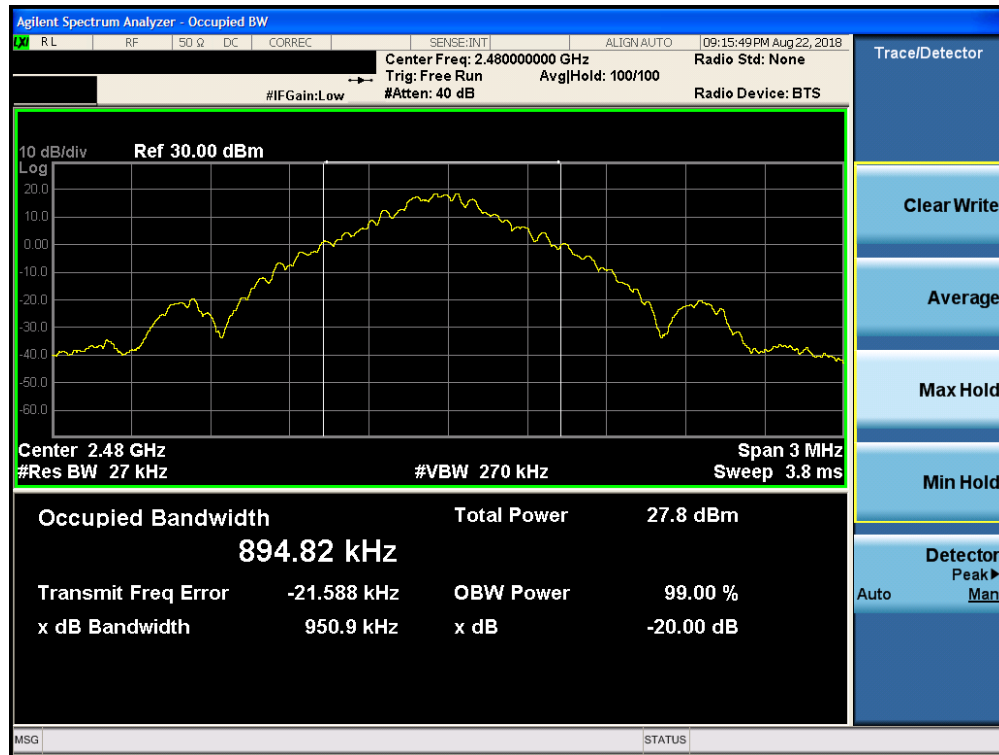


Plot 7-9. 20dB Bandwidth Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 78)

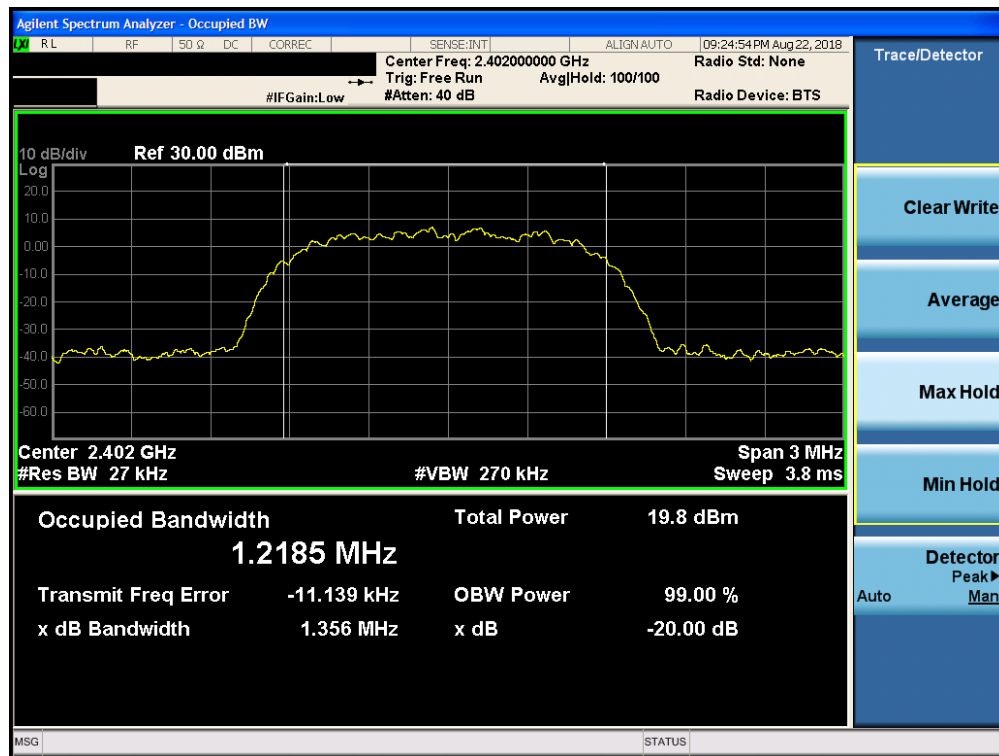


Plot 7-10. 20dB Bandwidth Plot ANT 1 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 20 of 115

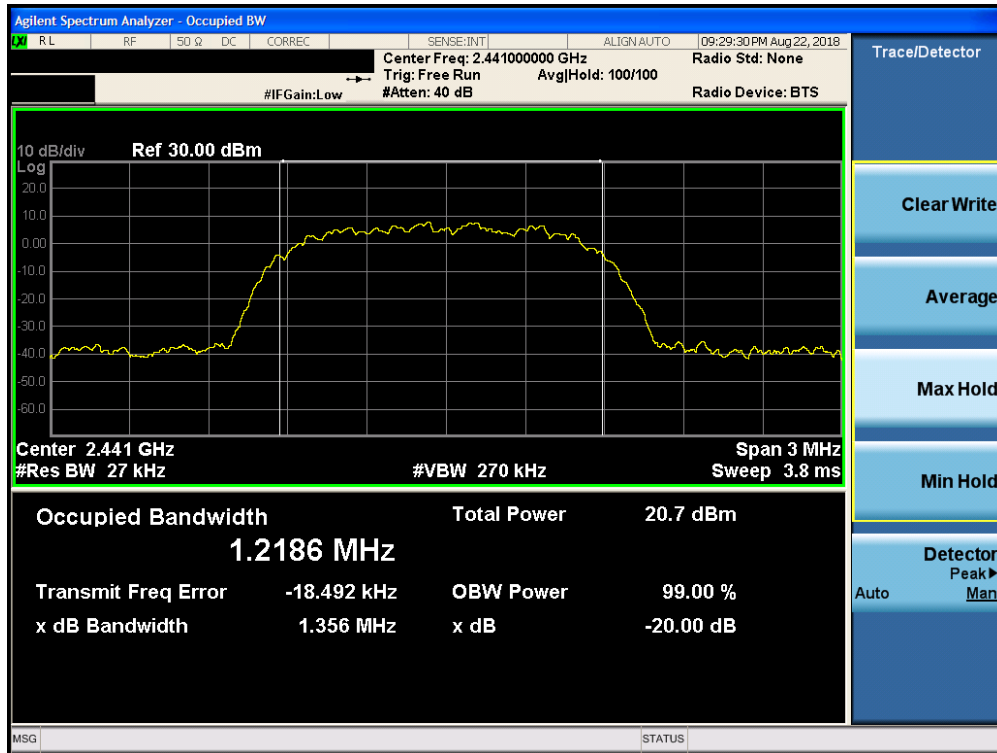

Plot 7-11. 20dB Bandwidth Plot ANT 1 (Bluetooth, 8DPSK, ePA – Ch. 39)

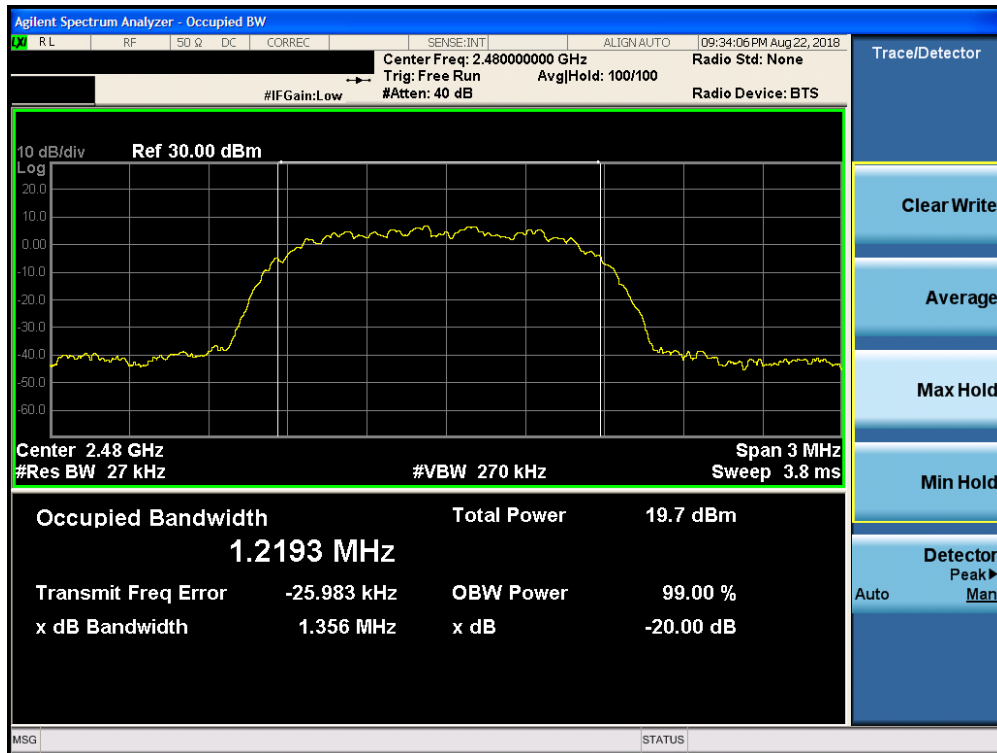

Plot 7-12. 20dB Bandwidth Plot ANT 1 (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 21 of 115

Antenna 2


Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	1.0	GFSK	ePA	0	952.00
2441	1.0	GFSK	ePA	39	952.00
2480	1.0	GFSK	ePA	78	951.10
2402	2.0	8DPSK	ePA	0	1355.00
2441	2.0	8DPSK	ePA	39	1357.00
2480	2.0	8DPSK	ePA	78	1356.00

Table 7-4. Conducted 20dB Bandwidth Measurements ANT2

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 22 of 115

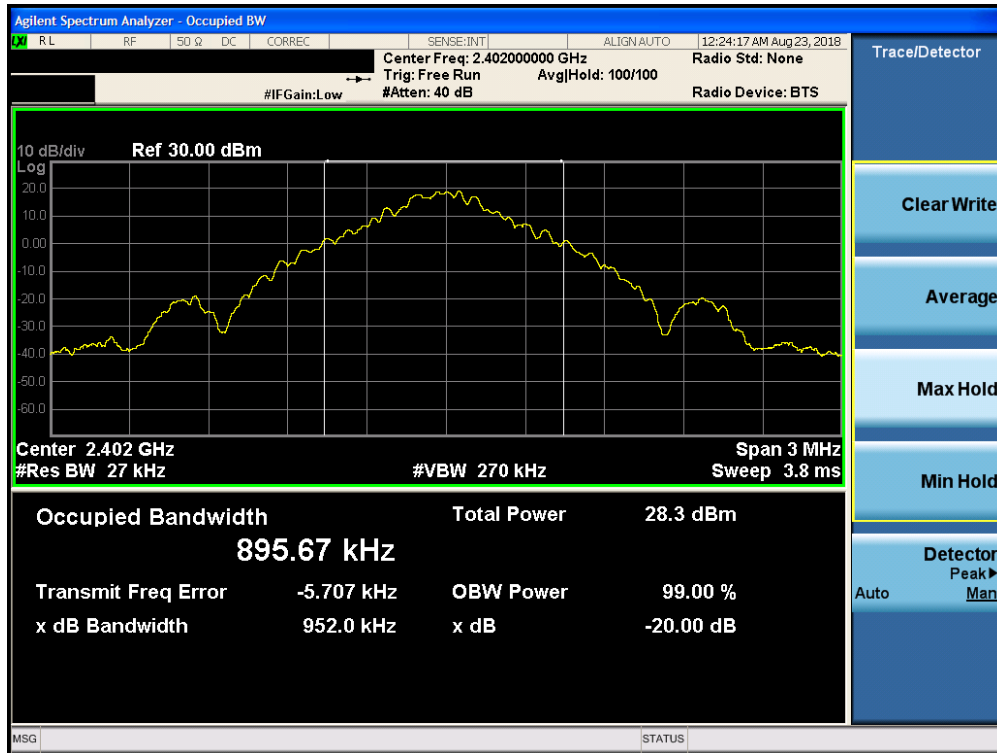


Plot 7-13. 20dB Bandwidth Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 0)

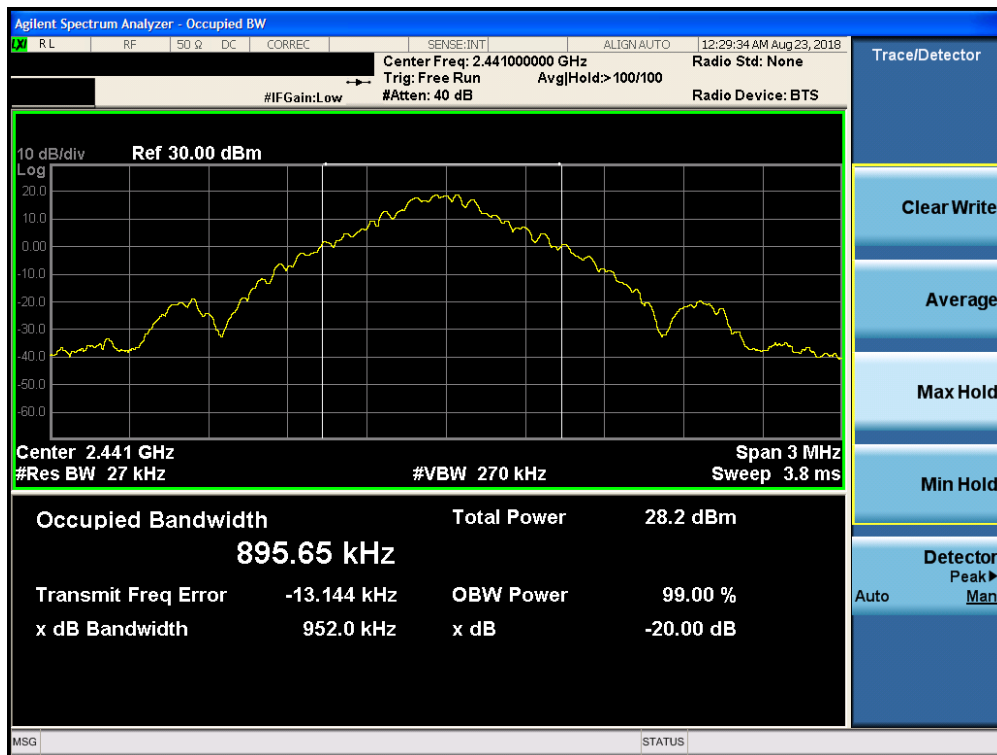


Plot 7-14. 20dB Bandwidth Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 23 of 115

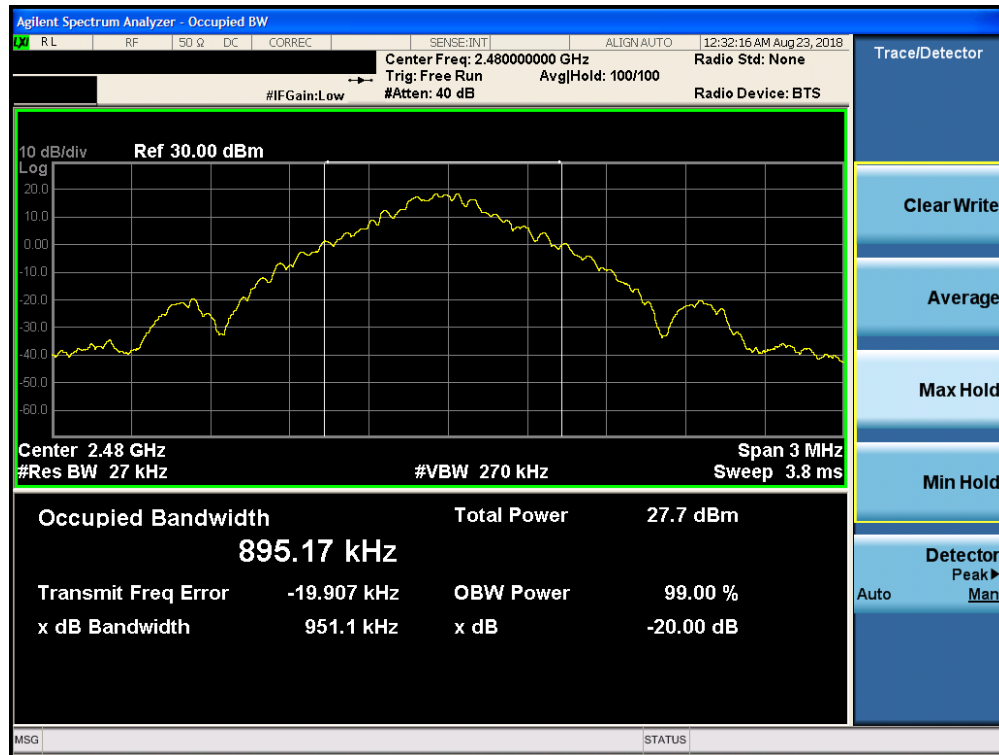


Plot 7-15. 20dB Bandwidth Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 78)

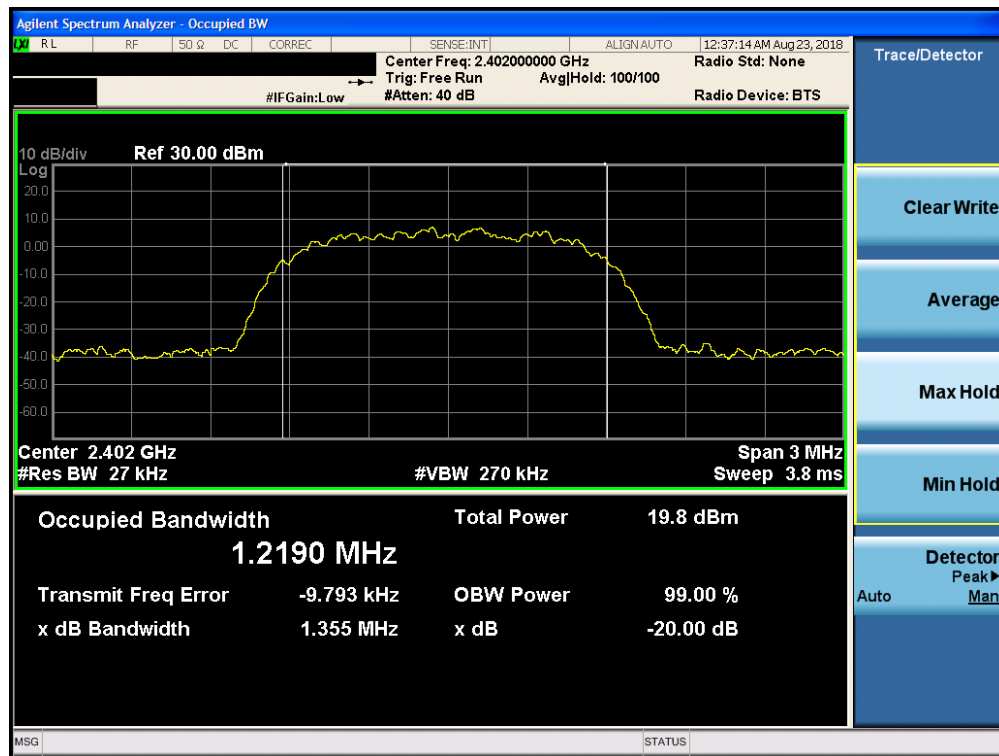


Plot 7-16. 20dB Bandwidth Plot ANT 2 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 24 of 115

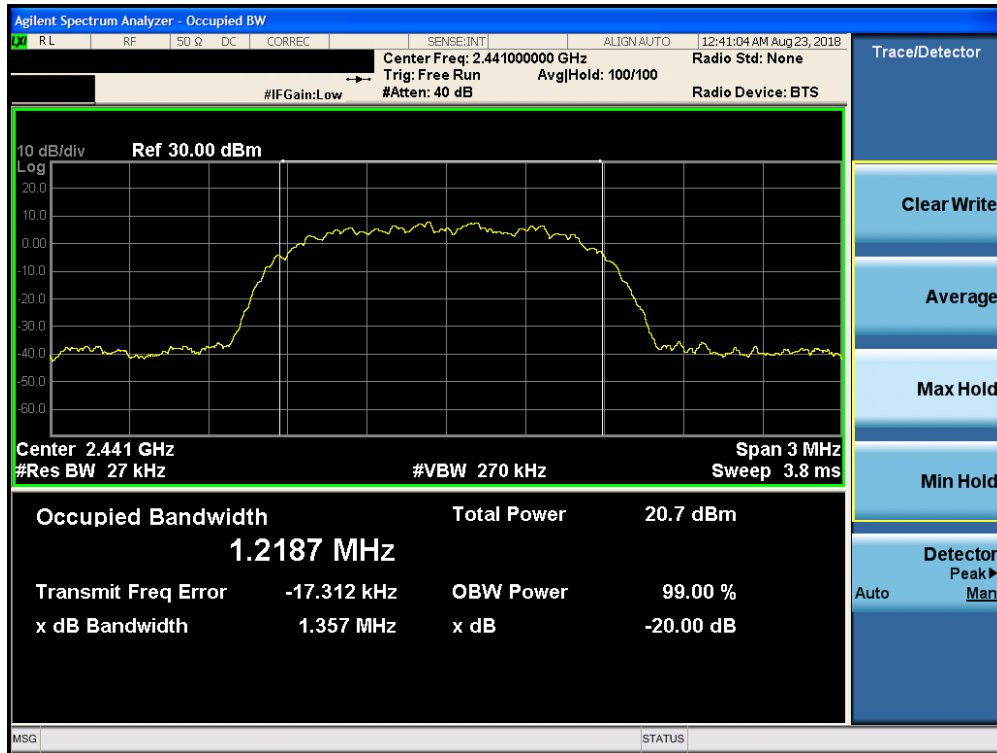

Plot 7-17. 20dB Bandwidth Plot ANT 2 (Bluetooth, 8DPSK, ePA – Ch. 39)

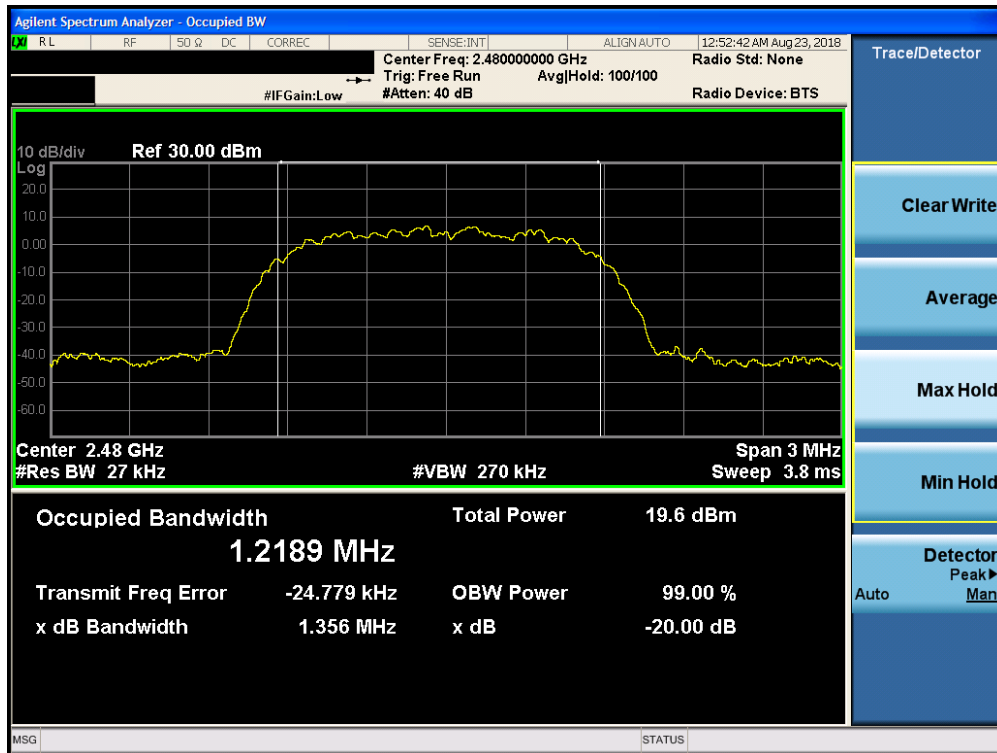

Plot 7-18. 20dB Bandwidth Plot ANT 2 (Bluetooth, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 25 of 115

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(2)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. Peak and Average power measurements are performed using a broadband power meter with a pulse sensor.

The maximum permissible output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

Test Settings

Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 26 of 115

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement

Note

1. This unit was tested with all possible data rates and the highest peak power is reported with the unit transmitting at GFSK and 8DPSK.
2. The EUT was tested for the average power with a broadband power meter for reporting purposes only.
3. Final results were obtained using calibrated couplers, attenuators and cables. The following formula was used:

$$\text{Output Power (dBm)} = \text{Raw Analyzer Level (dBm)} + \text{Cable Loss (dB)}$$

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 27 of 115

7.3.1 Peak Output Power Measurement

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Peak Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	18.02	63.387
2441	GFSK	ePA	39	18.39	69.024
2480	GFSK	ePA	78	18.49	70.632
2402	GFSK	iPA	0	12.91	19.543
2441	GFSK	iPA	39	12.27	16.866
2480	GFSK	iPA	78	12.40	17.378
2402	8DPSK	ePA	0	16.80	47.863
2441	8DPSK	ePA	39	18.10	64.565
2480	8DPSK	ePA	78	17.85	60.954
2402	8DPSK	iPA	0	12.98	19.861
2441	8DPSK	iPA	39	12.95	19.724
2480	8DPSK	iPA	78	12.94	19.679

Table 7-5. ANT0 Peak Conducted Output Power Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 28 of 115

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Peak Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	15.32	34.041
2441	GFSK	ePA	39	15.37	34.435
2480	GFSK	ePA	78	15.38	34.514
2402	GFSK	iPA	0	12.00	15.849
2441	GFSK	iPA	39	11.75	14.962
2480	GFSK	iPA	78	11.45	13.964
2402	8DPSK	ePA	0	17.01	50.234
2441	8DPSK	ePA	39	17.21	52.602
2480	8DPSK	ePA	78	17.52	56.494
2402	8DPSK	iPA	0	12.27	16.866
2441	8DPSK	iPA	39	12.56	18.030
2480	8DPSK	iPA	78	12.16	16.444

Table 7-6. ANT1 Peak Conducted Output Power Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 29 of 115

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Peak Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	20.14	103.276
2441	GFSK	ePA	39	20.37	108.893
2480	GFSK	ePA	78	19.69	93.111
2402	GFSK	iPA	0	12.50	17.783
2441	GFSK	iPA	39	12.33	17.100
2480	GFSK	iPA	78	12.24	16.749
2402	8DPSK	ePA	0	16.96	49.659
2441	8DPSK	ePA	39	17.16	52.000
2480	8DPSK	ePA	78	17.56	57.016
2402	8DPSK	iPA	0	12.35	17.179
2441	8DPSK	iPA	39	12.20	16.596
2480	8DPSK	iPA	78	12.50	17.783

Table 7-7. ANT2 Peak Conducted Output Power Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 30 of 115

7.3.2 Average Output Power Measurement

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	17.88	61.376
2441	GFSK	ePA	39	18.00	63.096
2480	GFSK	ePA	78	18.00	63.096
2402	GFSK	iPA	0	12.50	17.783
2441	GFSK	iPA	39	12.20	16.596
2480	GFSK	iPA	78	12.34	17.140
2402	8DPSK	ePA	0	14.10	25.704
2441	8DPSK	ePA	39	15.00	31.623
2480	8DPSK	ePA	78	14.96	31.333
2402	8DPSK	iPA	0	9.96	9.908
2441	8DPSK	iPA	39	9.92	9.817
2480	8DPSK	iPA	78	9.97	9.931

Table 7-8. ANT0 Average Conducted Output Power Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 31 of 115

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	15.09	32.285
2441	GFSK	ePA	39	15.13	32.584
2480	GFSK	ePA	78	15.21	33.189
2402	GFSK	iPA	0	11.85	15.311
2441	GFSK	iPA	39	11.70	14.791
2480	GFSK	iPA	78	11.41	13.836
2402	8DPSK	ePA	0	14.15	26.002
2441	8DPSK	ePA	39	14.32	27.040
2480	8DPSK	ePA	78	14.50	28.184
2402	8DPSK	iPA	0	9.27	8.453
2441	8DPSK	iPA	39	9.50	8.913
2480	8DPSK	iPA	78	9.14	8.204

Table 7-9. ANT1 Average Conducted Output Power Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 32 of 115

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	20.00	100.000
2441	GFSK	ePA	39	20.00	100.000
2480	GFSK	ePA	78	19.52	89.536
2402	GFSK	iPA	0	12.50	17.783
2441	GFSK	iPA	39	12.35	17.179
2480	GFSK	iPA	78	12.26	16.827
2402	8DPSK	ePA	0	14.20	26.303
2441	8DPSK	ePA	39	14.27	26.730
2480	8DPSK	ePA	78	14.50	28.184
2402	8DPSK	iPA	0	9.31	8.531
2441	8DPSK	iPA	39	9.21	8.337
2480	8DPSK	iPA	78	9.50	8.913

Table 7-10. ANT2 Average Conducted Output Power Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 33 of 115

7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 34 of 115

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.
2. Both power schemes were investigated, and only worst case is reported

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 35 of 115

Antenna 0

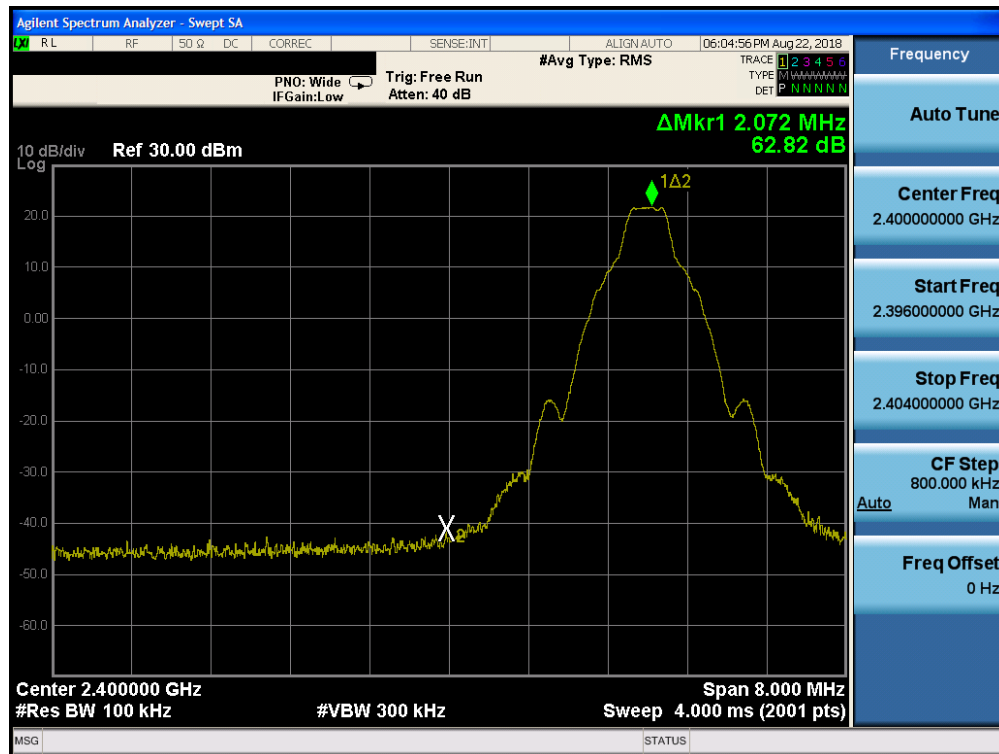


Plot 7-19. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

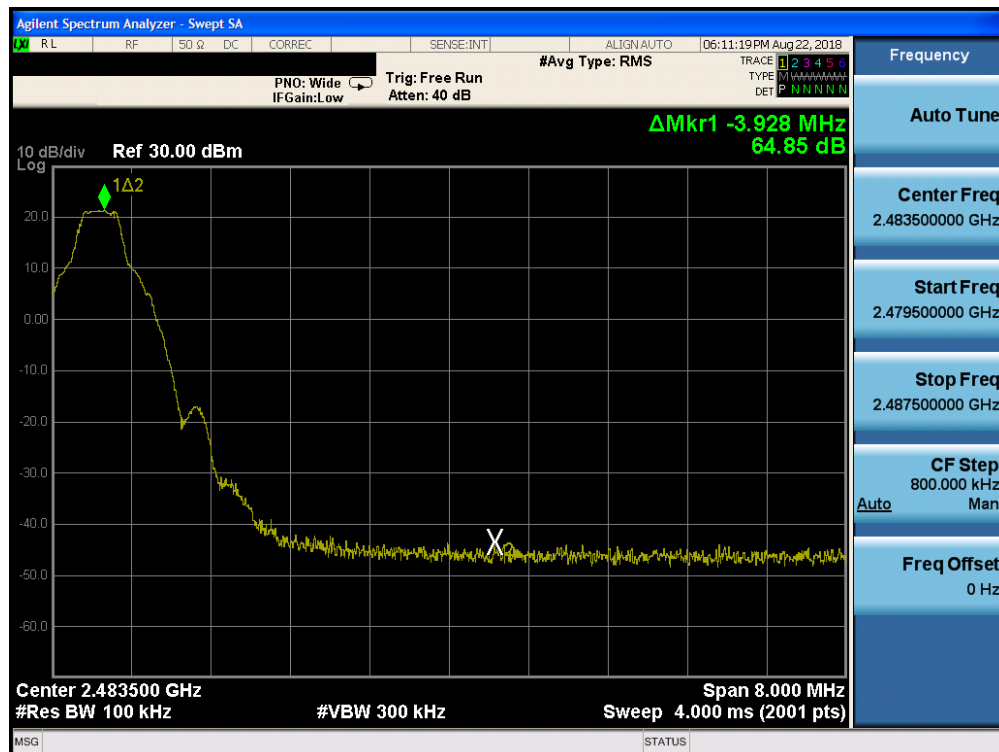


Plot 7-20. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 36 of 115

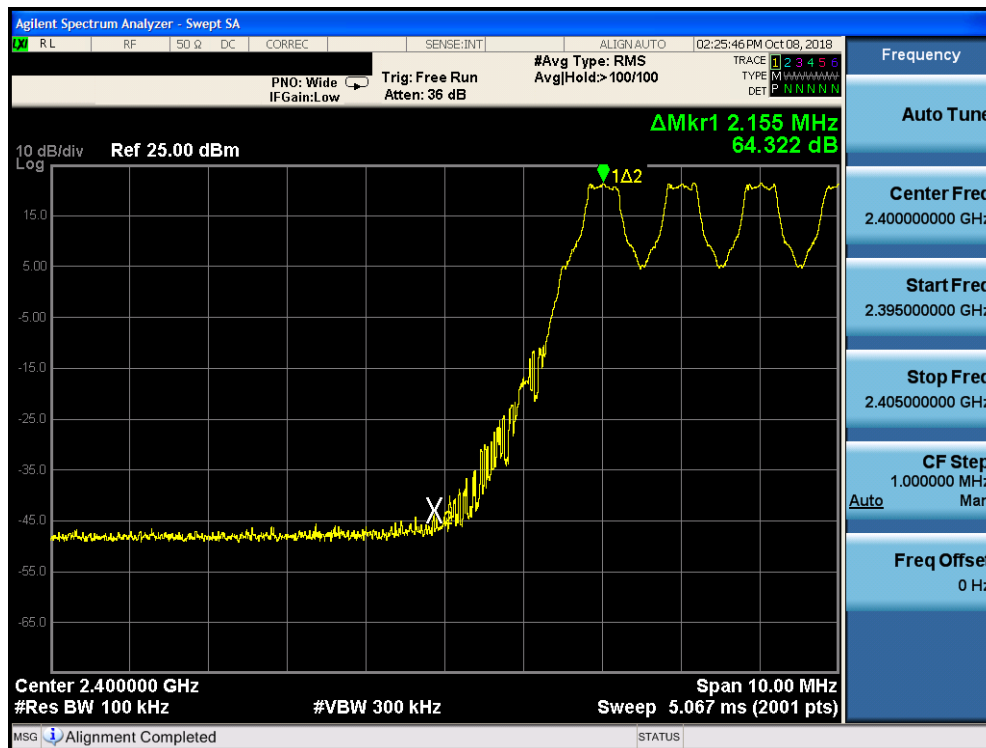


Plot 7-21. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, GFSK, ePA)

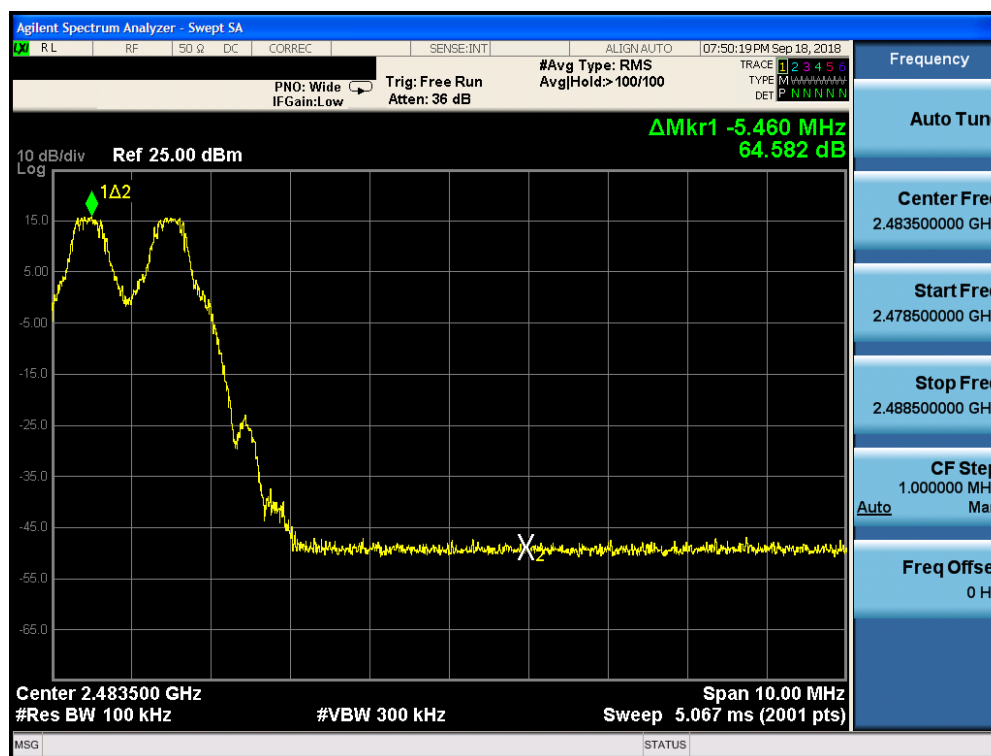


Plot 7-22. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 37 of 115

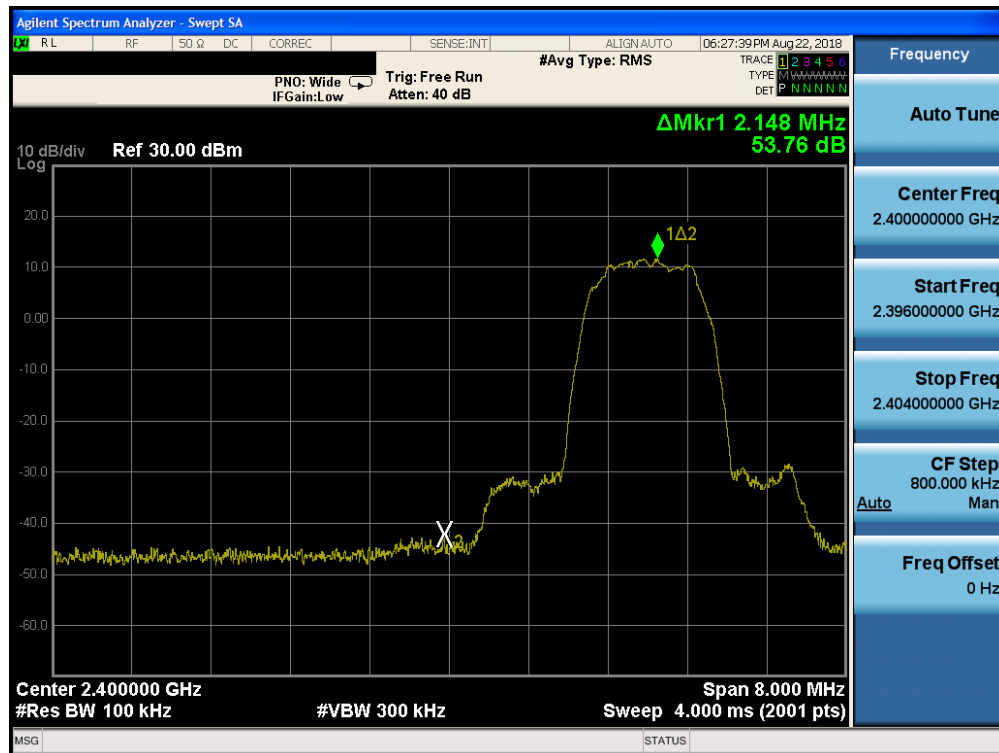


Plot 7-23. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

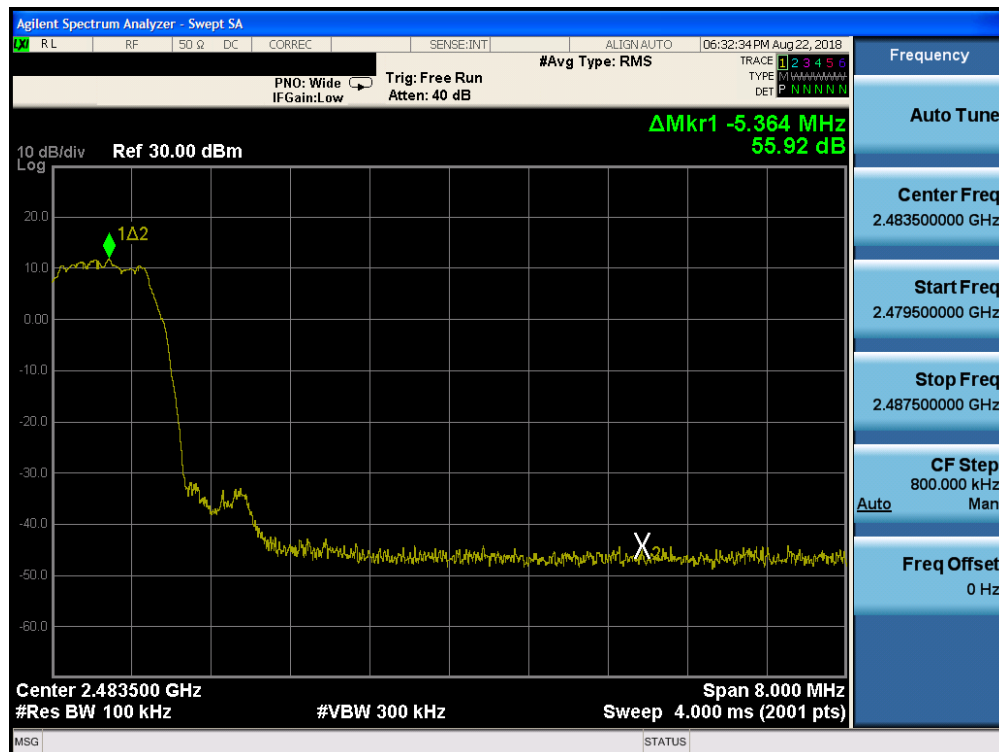


Plot 7-24. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 38 of 115

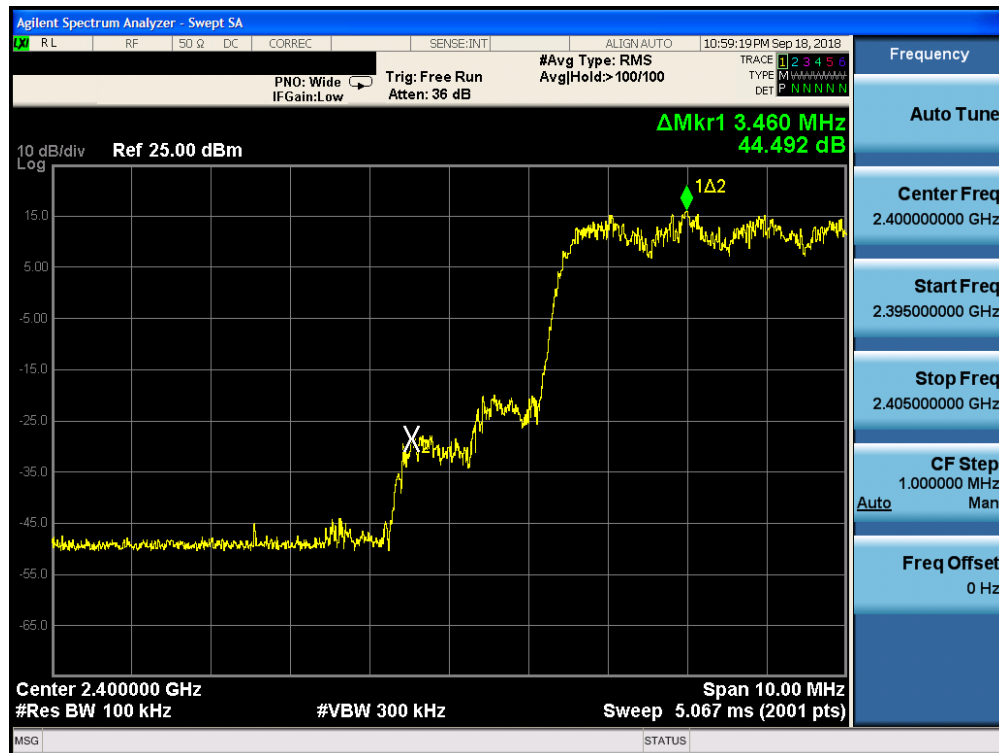


Plot 7-25. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

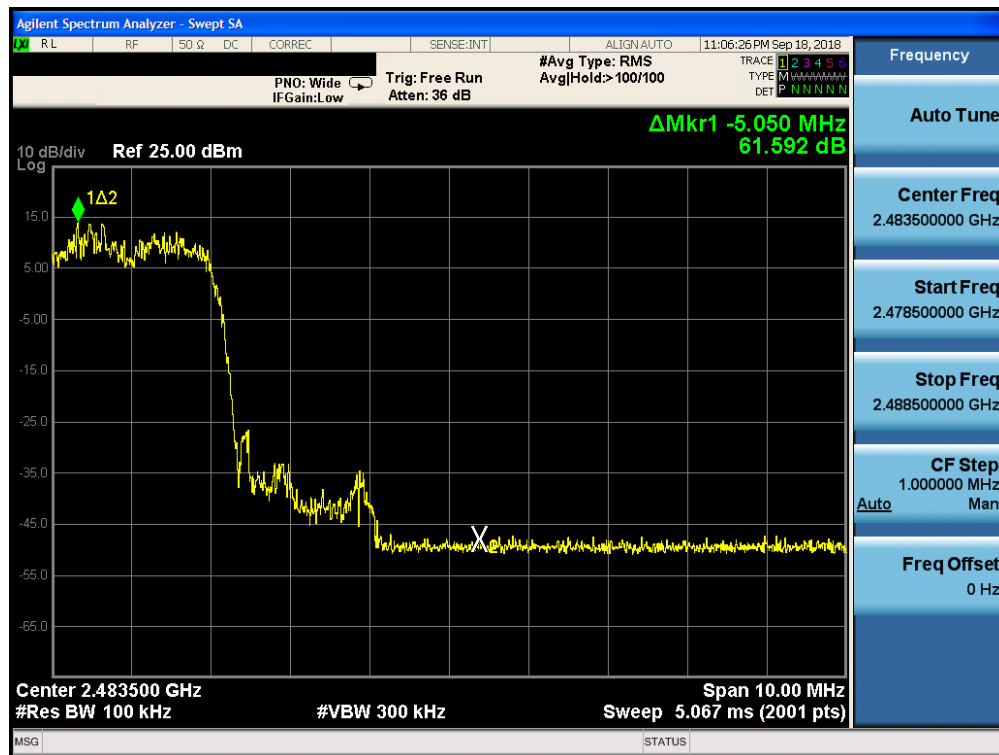


Plot 7-26. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 39 of 115

Antenna 1

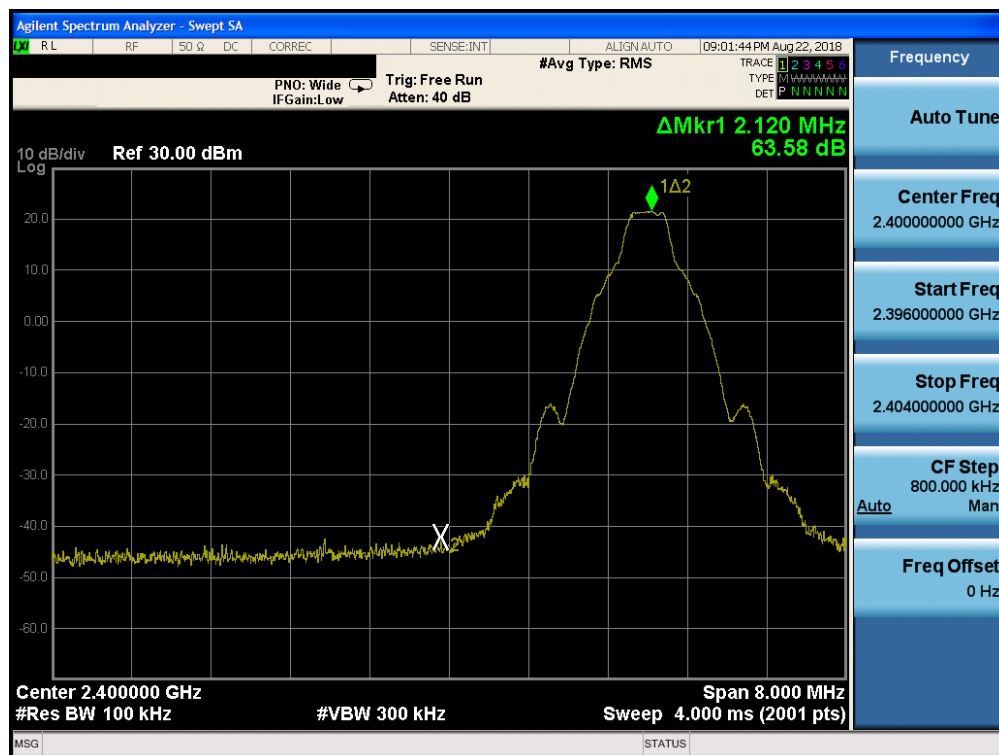


Plot 7-27. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

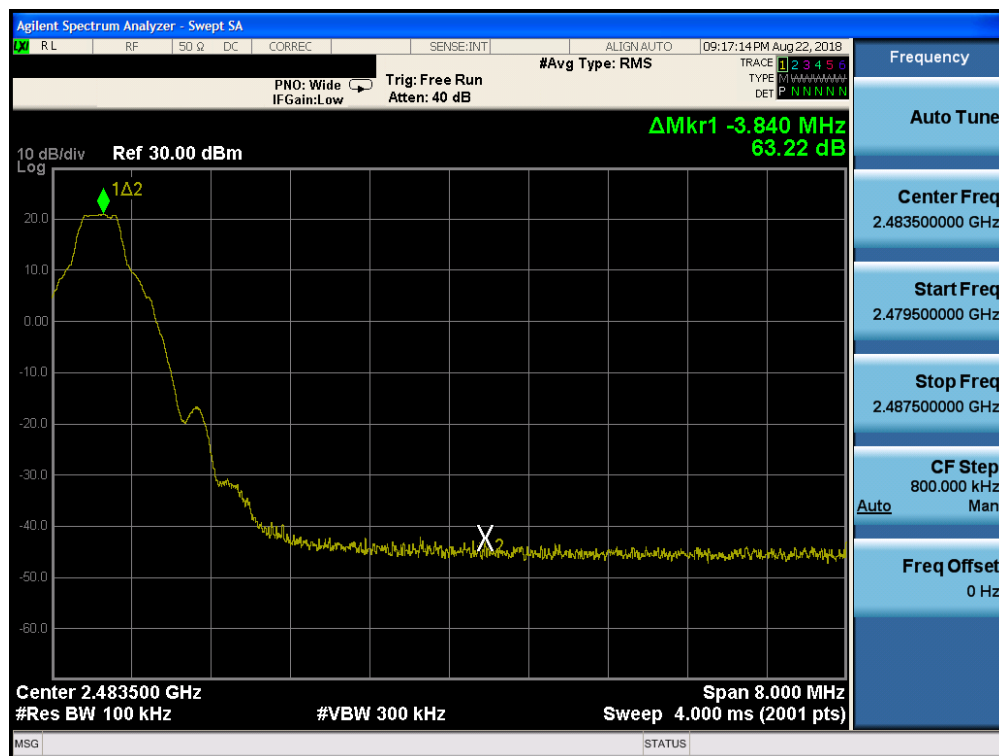


Plot 7-28. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 40 of 115

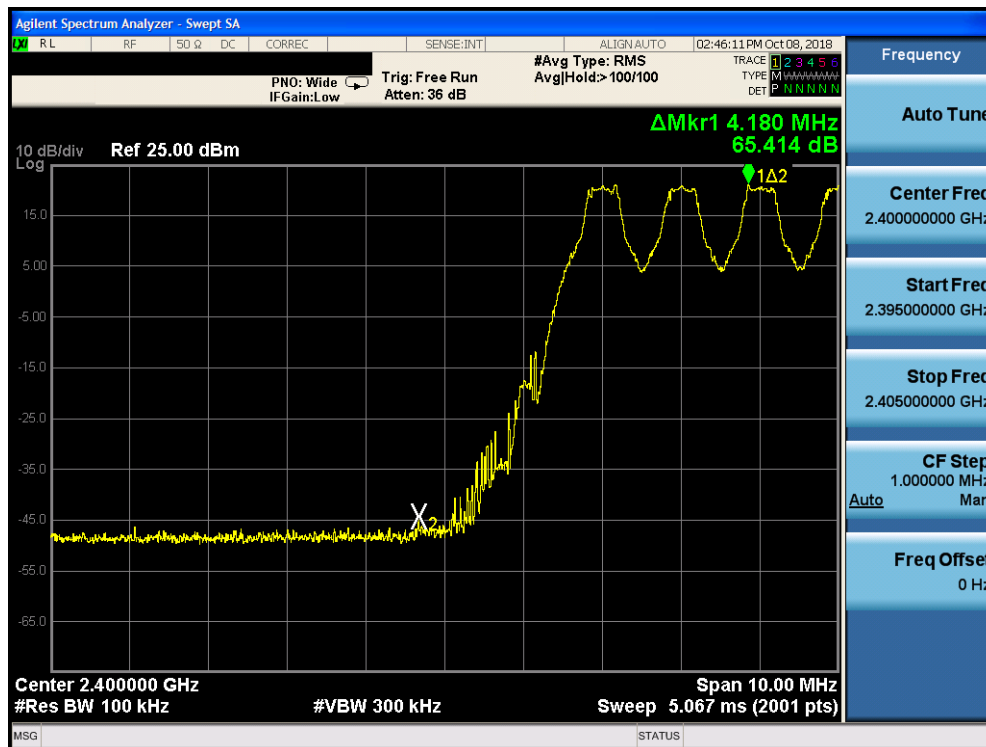


Plot 7-29. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, GFSK, ePA)

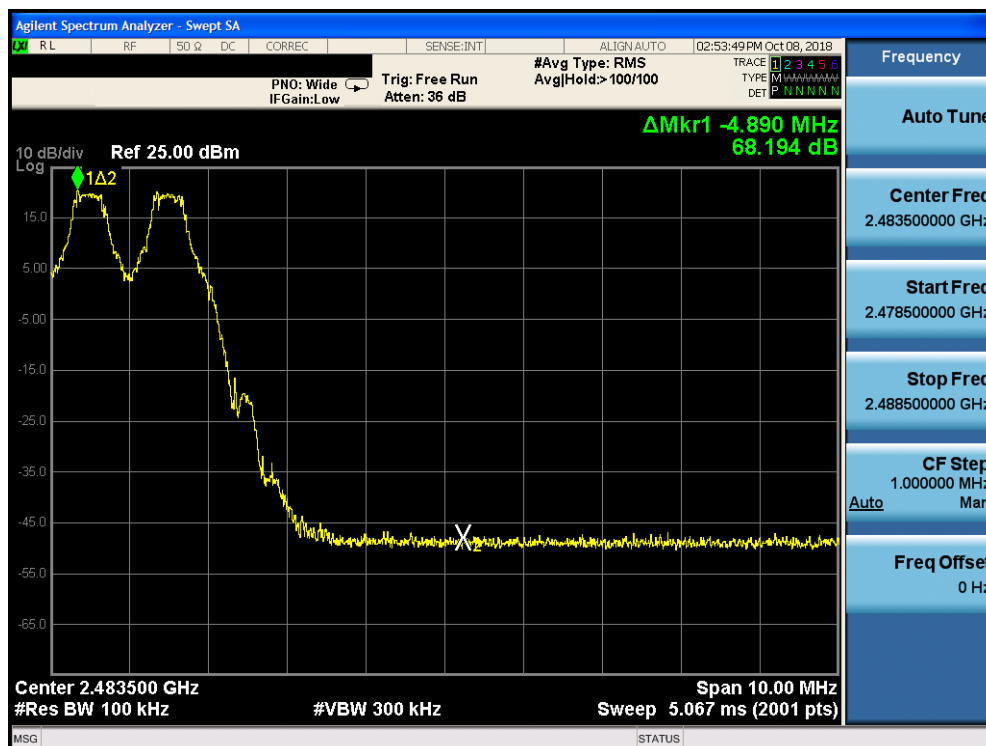


Plot 7-30. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 41 of 115

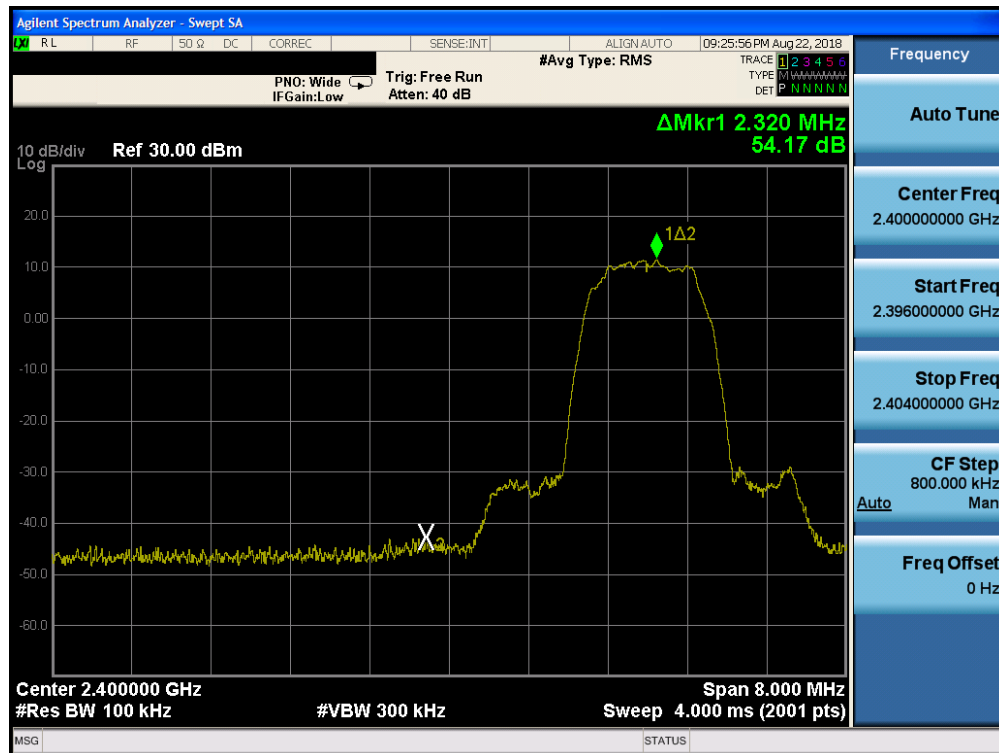

Plot 7-31. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

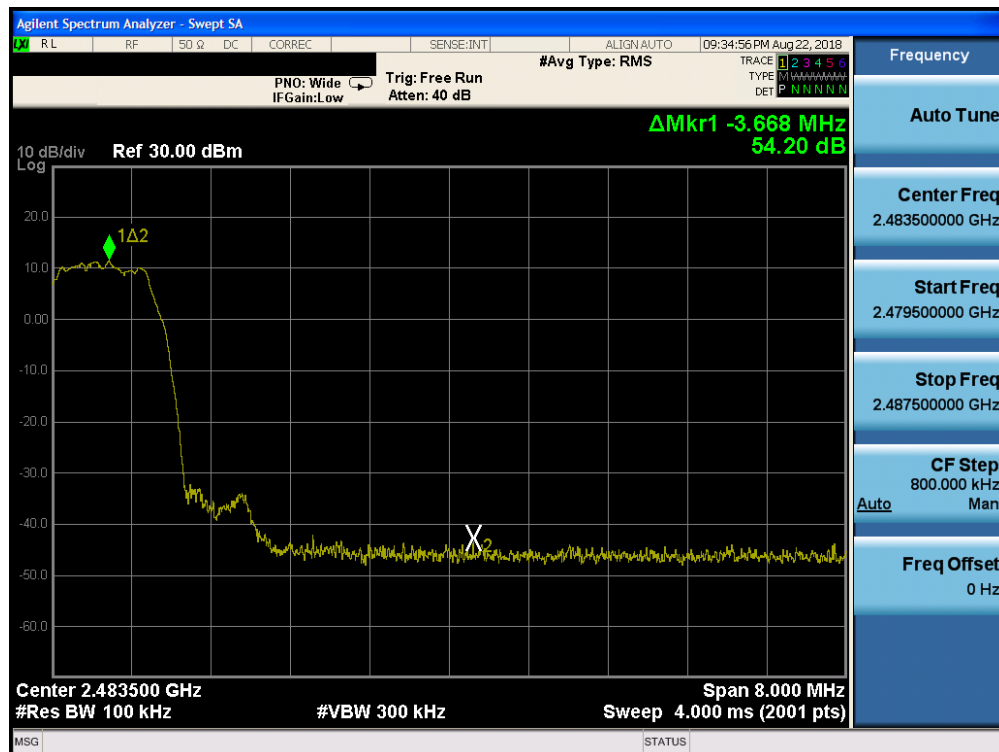

Plot 7-32. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 42 of 115




Plot 7-33. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, 8DPSK, ePA)




Plot 7-34. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 43 of 115

Antenna 2

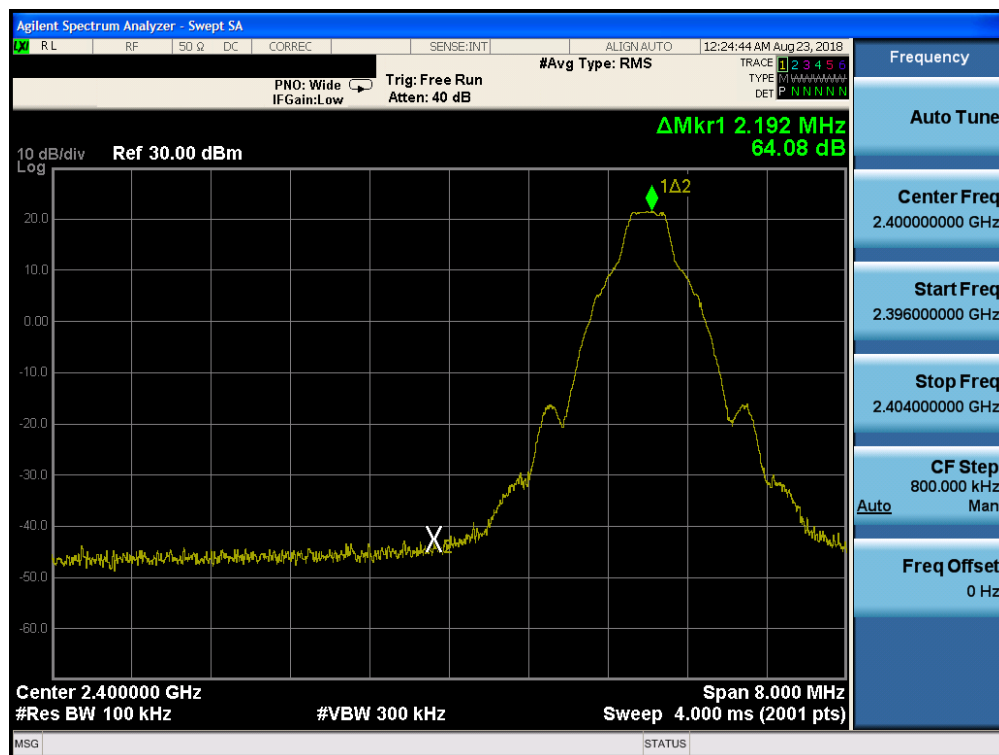


Plot 7-35. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

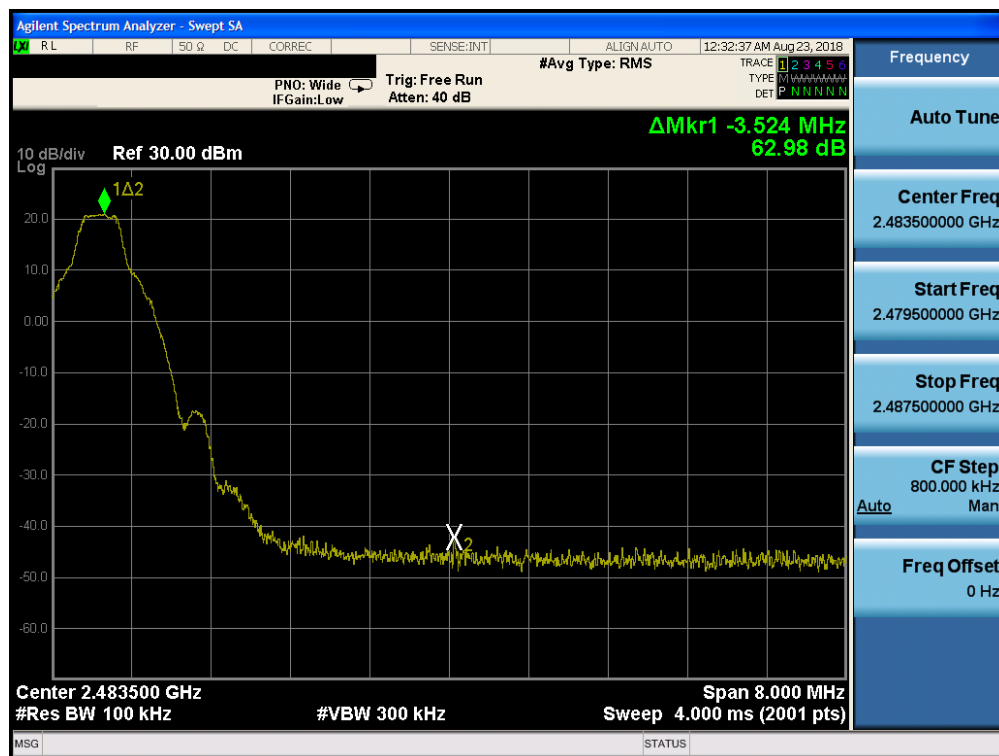


Plot 7-36. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 44 of 115

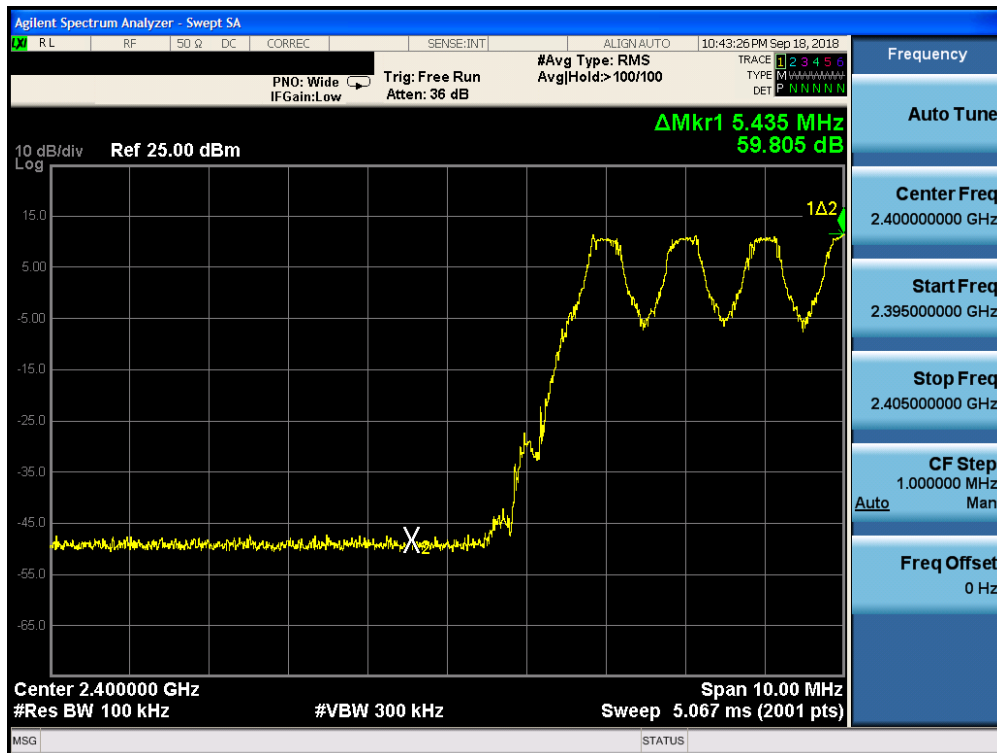


Plot 7-37. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, GFSK, ePA)

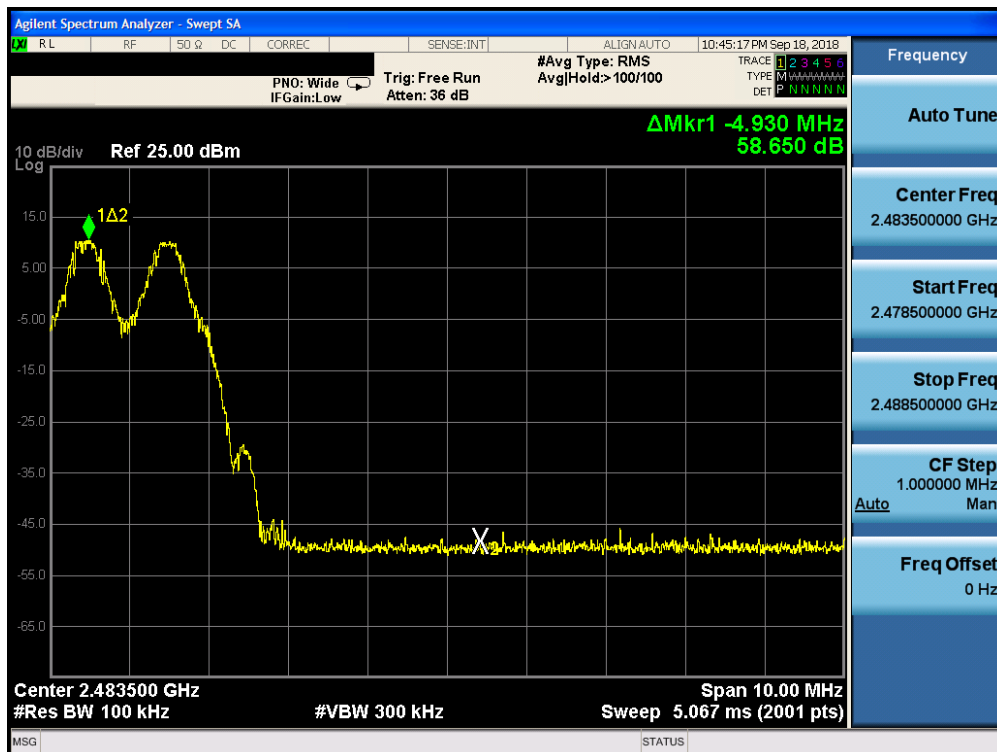


Plot 7-38. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 45 of 115

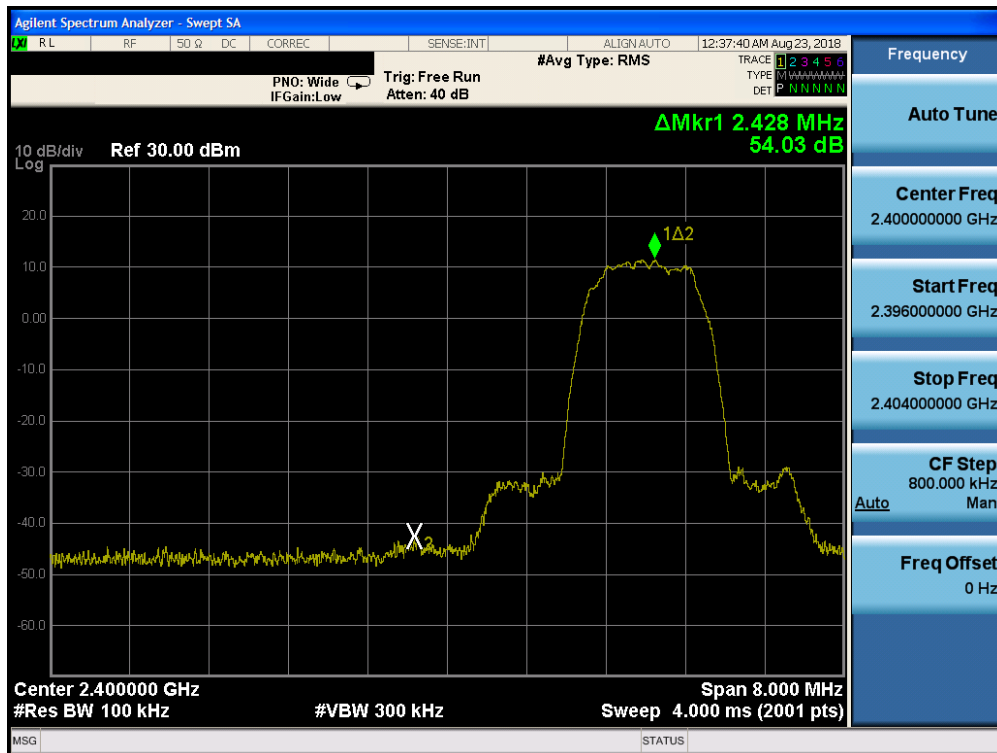

Plot 7-39. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

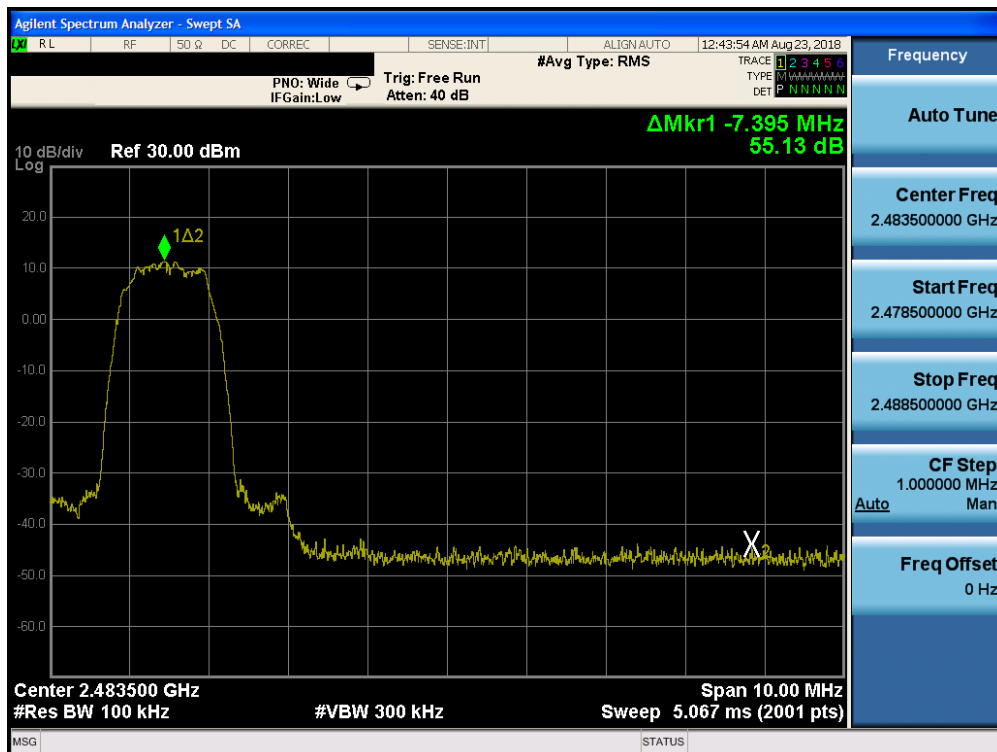


Plot 7-40. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 46 of 115



Plot 7-41. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

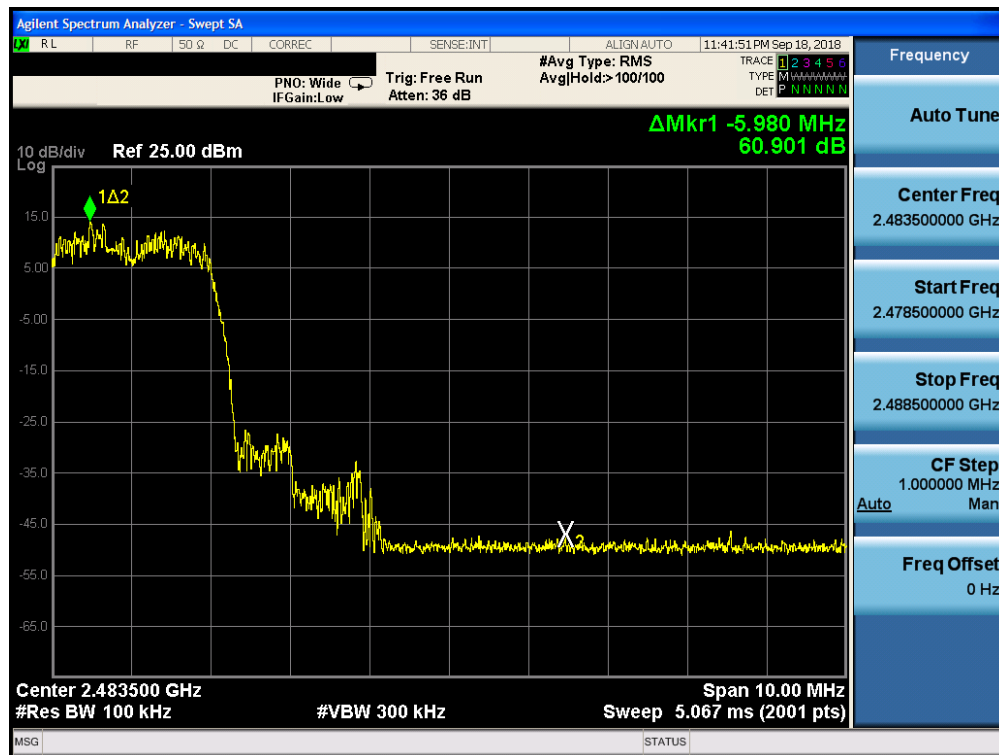

Plot 7-42. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 47 of 115

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(2)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


1. The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.
2. Both power schemes were investigated and only the worst case is reported.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 48 of 115

Antenna 0

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	ePA	0	0.634
2441	1.0	GFSK	ePA	39	0.633
2480	1.0	GFSK	ePA	78	0.634
2402	2.0	8DPSK	ePA	0	0.904
2441	2.0	8DPSK	ePA	39	0.904
2480	2.0	8DPSK	ePA	78	0.904

Table 7-11. Minimum Channel Separation ANT0

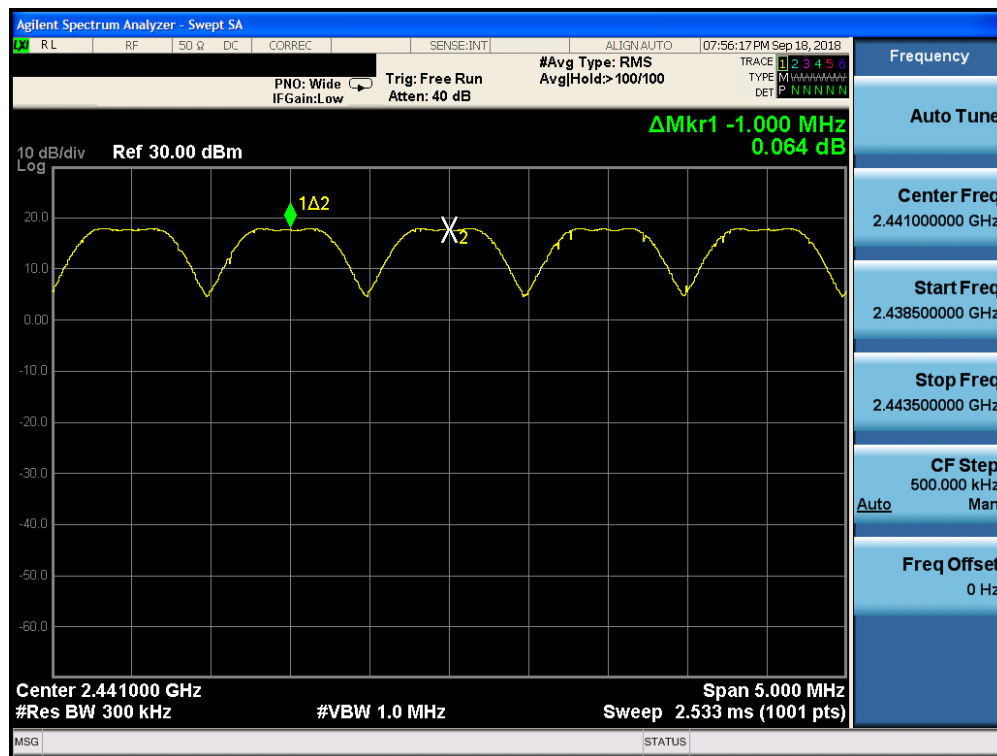

Plot 7-43. Channel Spacing Plot ANT0 (Bluetooth, GFSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 49 of 115




Plot 7-44. Channel Spacing Plot ANT0 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 50 of 115

Antenna 1

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	ePA	0	0.634
2441	1.0	GFSK	ePA	39	0.634
2480	1.0	GFSK	ePA	78	0.634
2402	2.0	8DPSK	ePA	0	0.904
2441	2.0	8DPSK	ePA	39	0.904
2480	2.0	8DPSK	ePA	78	0.904

Table 7-12. Minimum Channel Separation ANT1

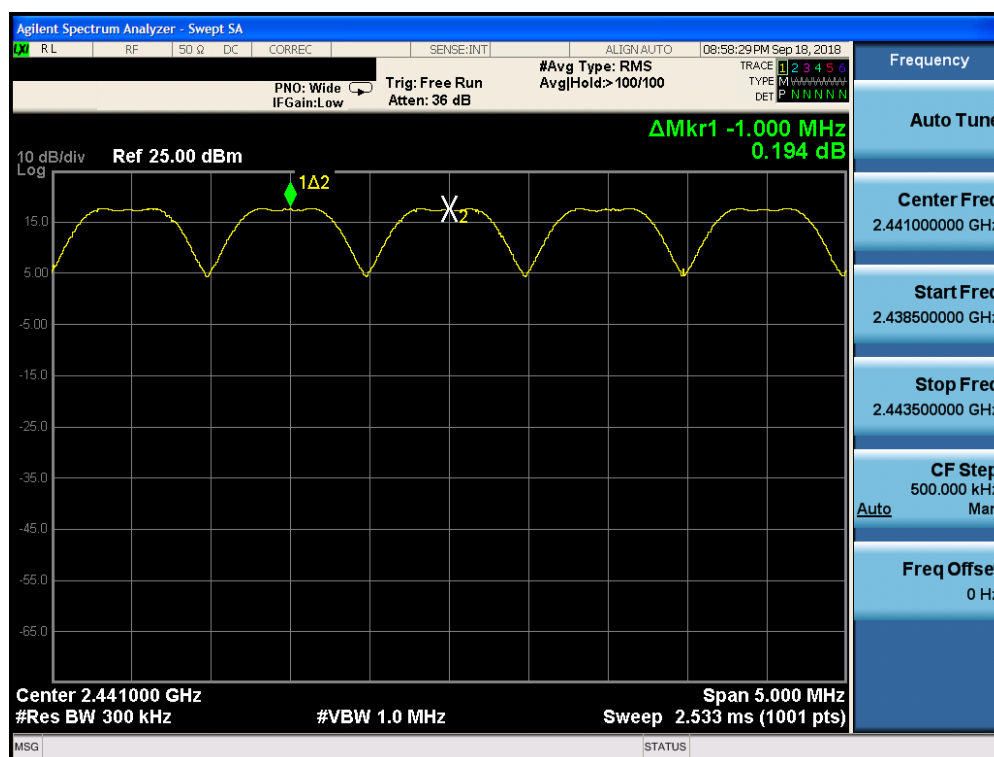

Plot 7-45. Channel Spacing Plot ANT1 (Bluetooth, GFSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 51 of 115




Plot 7-46. Channel Spacing Plot ANT1 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 52 of 115

Antenna 2

Frequency [MHz]	Data Rate [Mbps]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	ePA	0	0.635
2441	1.0	GFSK	ePA	39	0.635
2480	1.0	GFSK	ePA	78	0.634
2402	2.0	8DPSK	ePA	0	0.903
2441	2.0	8DPSK	ePA	39	0.905
2480	2.0	8DPSK	ePA	78	0.904

Table 7-13. Minimum Channel Separation ANT2

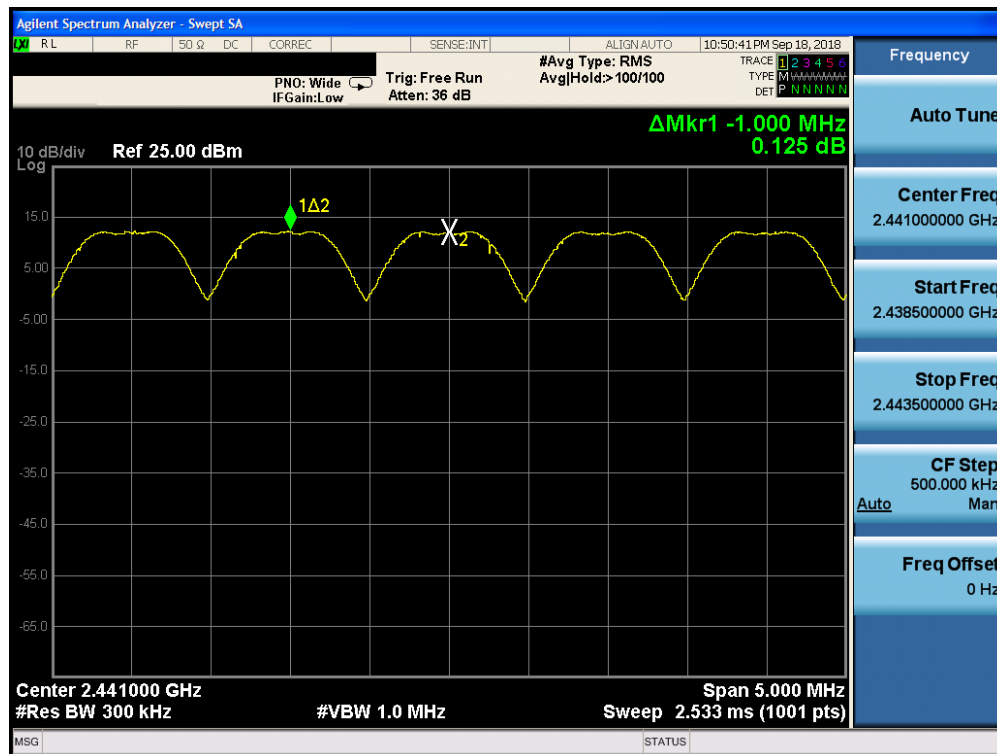

Plot 7-47. Channel Spacing Plot ANT2 (Bluetooth, GFSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 53 of 115



Plot 7-48. Channel Spacing Plot ANT2 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 54 of 115

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. ***The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW $\leq$ channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. Test Instrument & Measurement Setup

Test Notes


1. Both power schemes were investigated, and only worst case is reported.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 55 of 115

Antenna 0

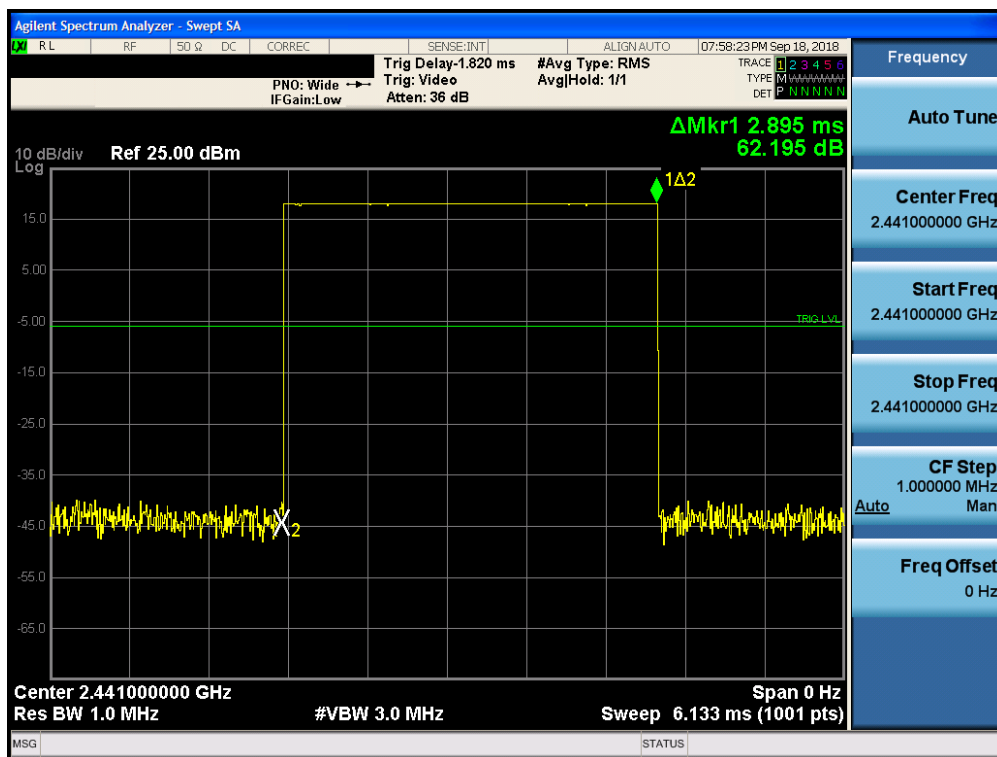


Plot 7-49. Time of Occupancy Plot ANT0(Bluetooth, GFSK, ePA)

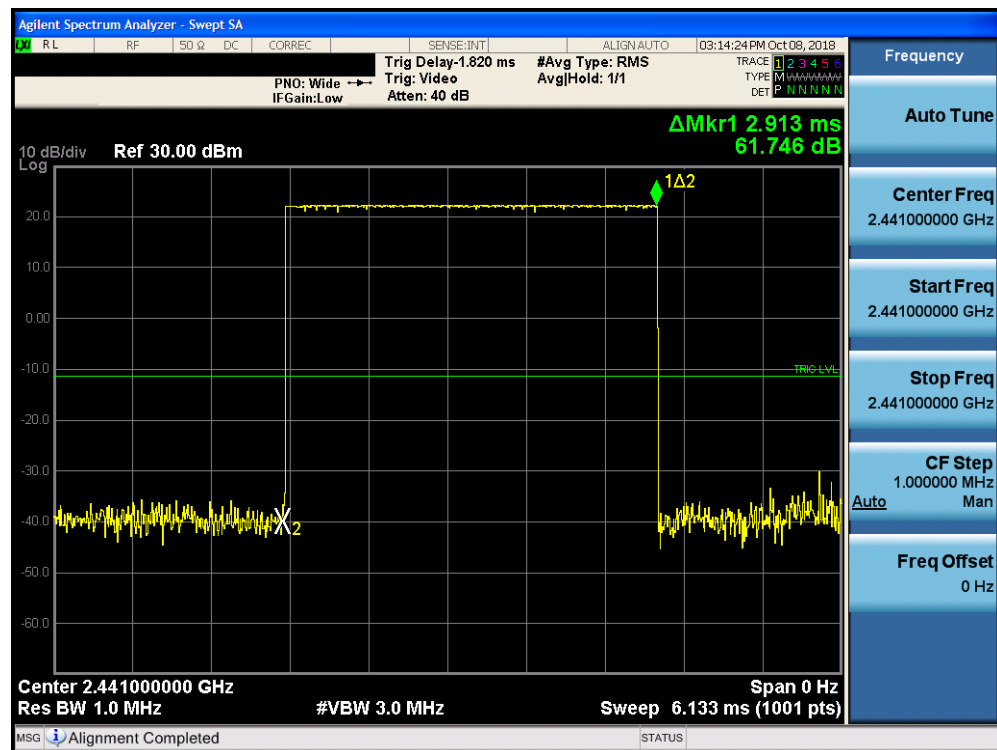


Plot 7-50. Time of Occupancy Plot ANT0(Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 56 of 115

Antenna 1

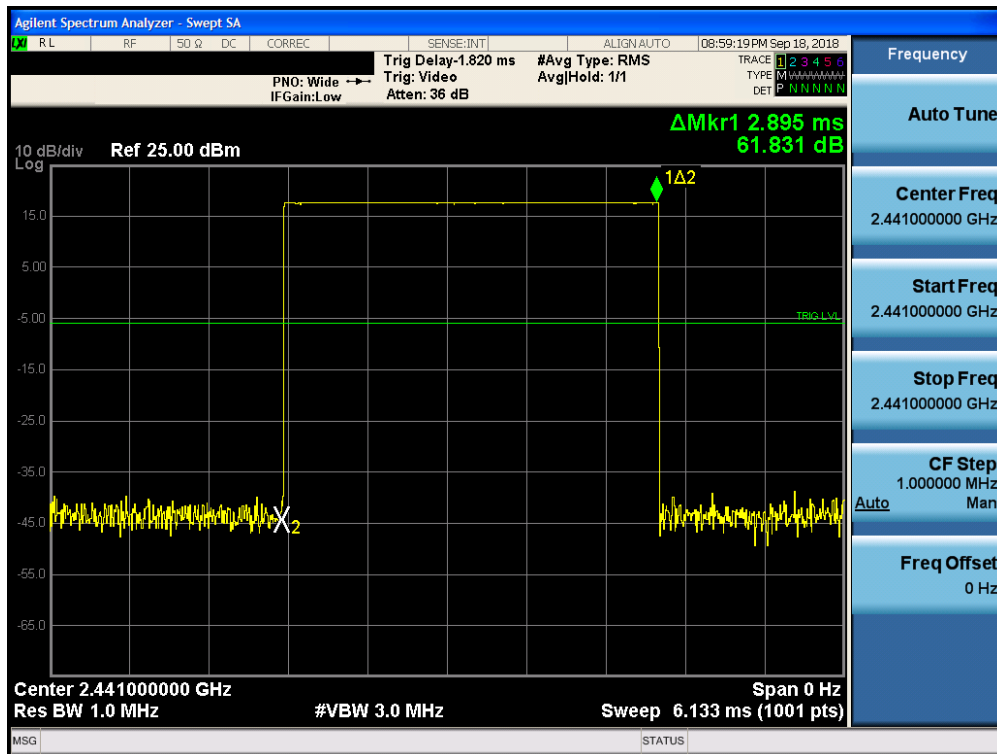


Plot 7-51. Time of Occupancy Plot ANT1(Bluetooth, GFSK, ePA)

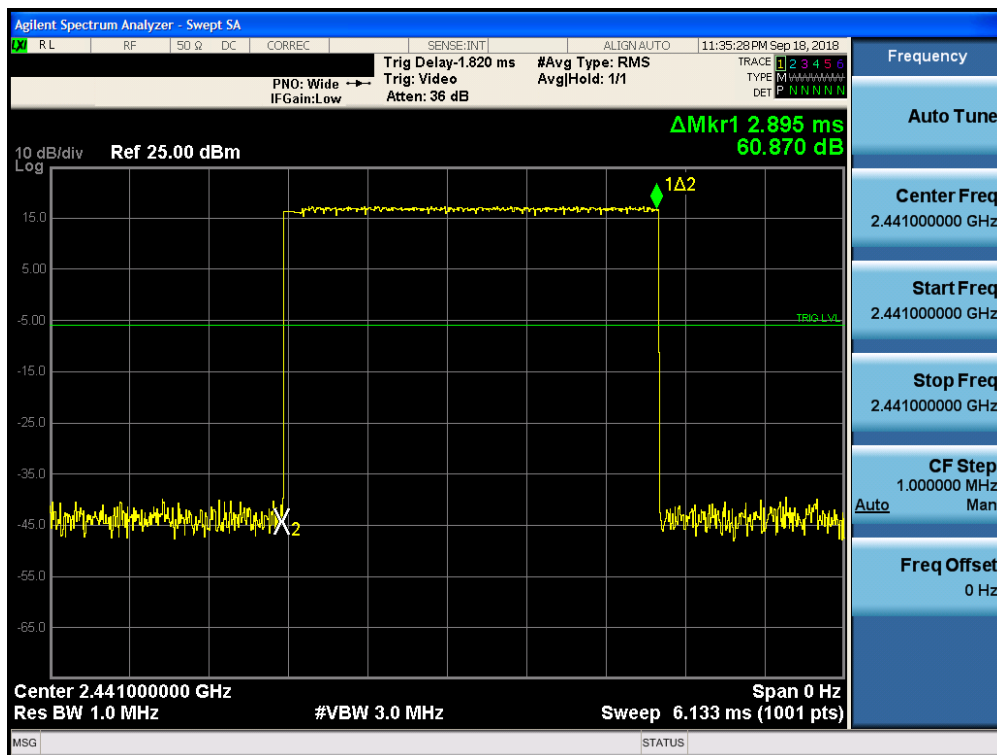


Plot 7-52. Time of Occupancy Plot ANT1(Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 57 of 115

Antenna 2

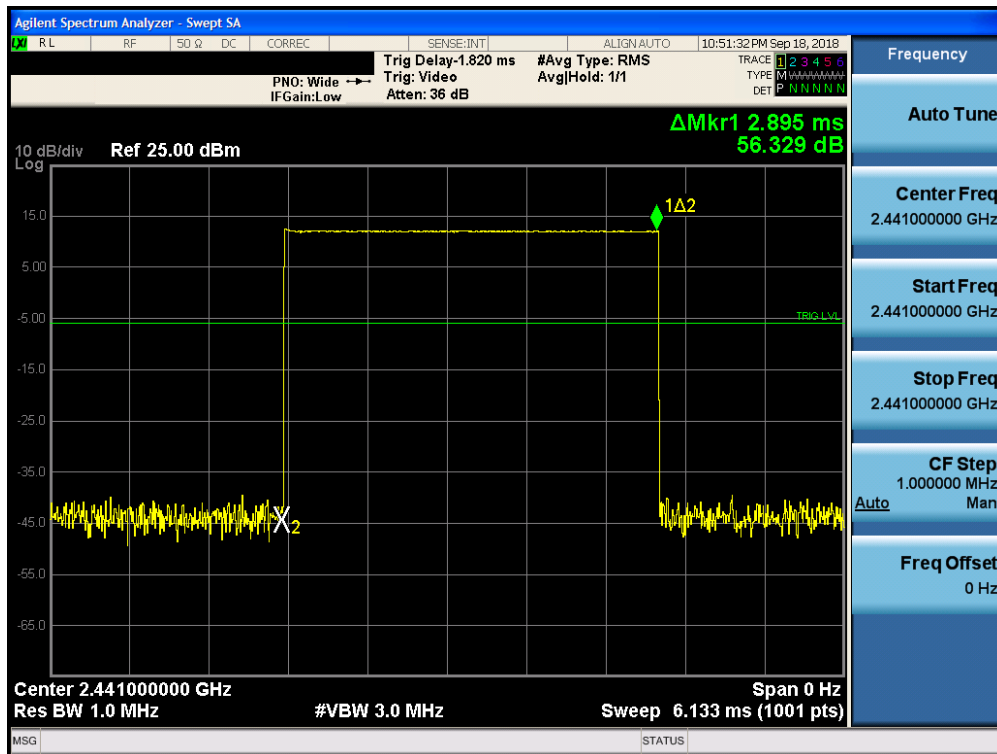

Plot 7-53. Time of Occupancy Plot ANT2(Bluetooth, GFSK, ePA)

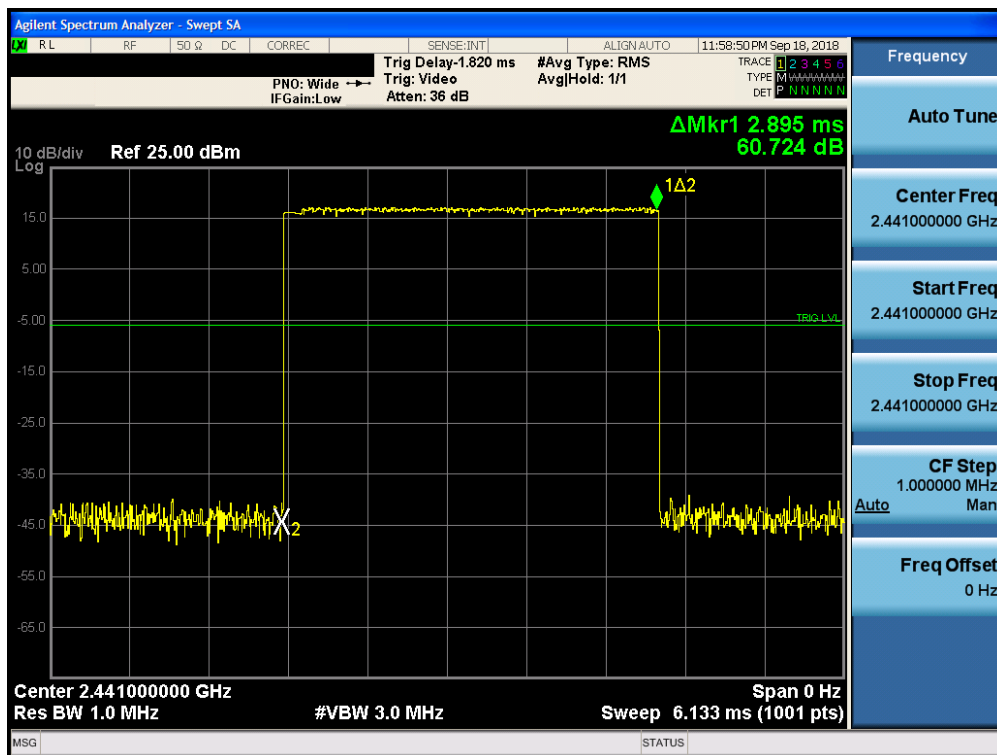

Plot 7-54. Time of Occupancy Plot ANT2(Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 58 of 115

Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- o $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- o Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- o $266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second}$ (# of hops/second on one channel)
- o $3.38 \text{ hops/second/channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops}$ (# hops over a 31.6 second period)
- o $106.67 \text{ hops} \times \text{N/A ms/channel} = \text{N/A ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- o $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- o Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- o $133.3 \text{ hops/s} / 20 \text{ channels} = 6.67 \text{ hops/second}$ (# of hops/second on one channel)
- o $6.67 \text{ hops/s} / \text{channel} \times 8 \text{ seconds} = 53.34 \text{ hops}$ (# hops over a 8 second period)
- o $53.34 \text{ hops} \times \text{N/A ms/channel} = \text{N/A ms}$ (worst case dwell time for one channel in AFH mode)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 59 of 115

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-6. Test Instrument & Measurement Setup

Test Notes


1. The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.
2. Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 60 of 115

Antenna 0

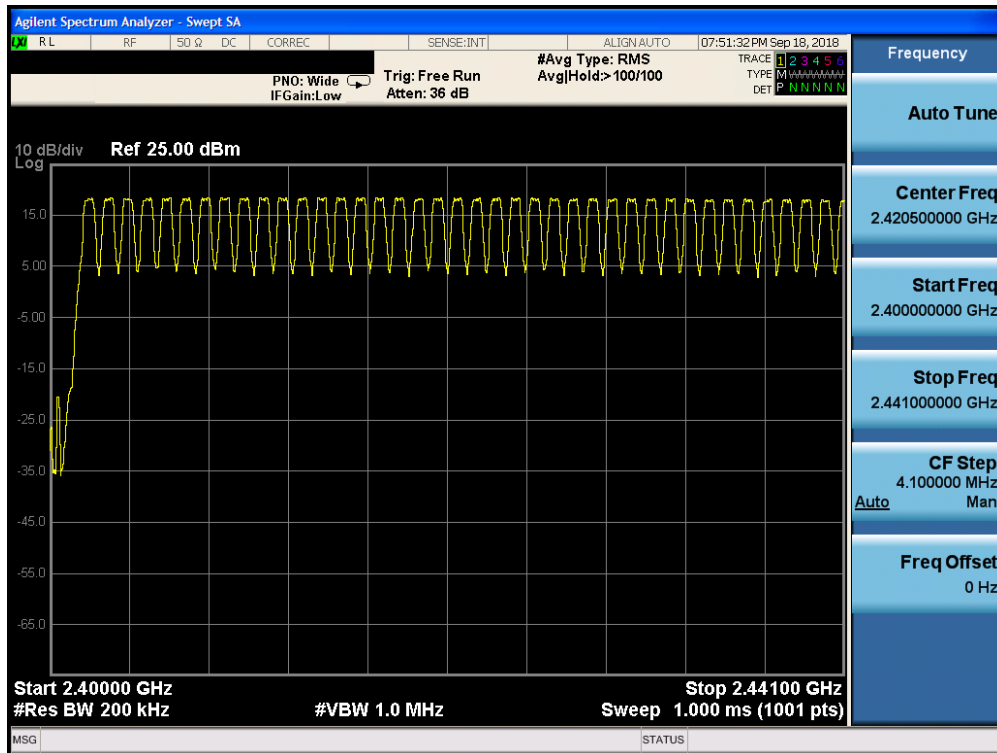


Plot 7-55. Low End Spectrum Channel Hopping Plot ANT0 (Bluetooth, GFSK, ePA)

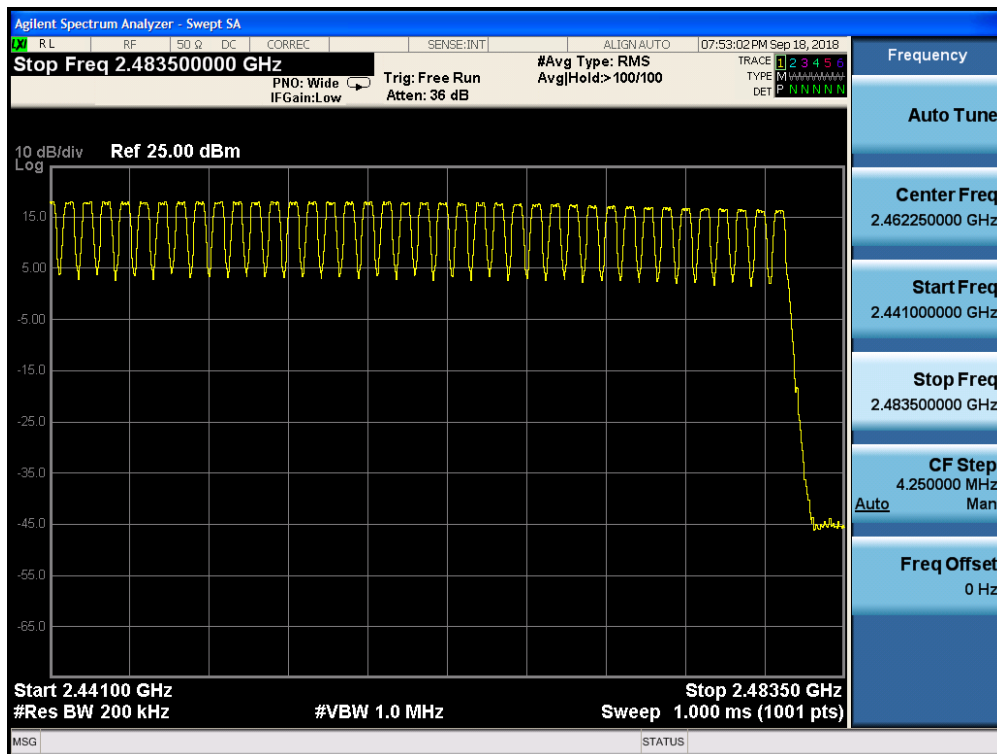


Plot 7-56. High End Spectrum Channel Hopping Plot ANT0 (Bluetooth, GFSK, ePA)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 61 of 115

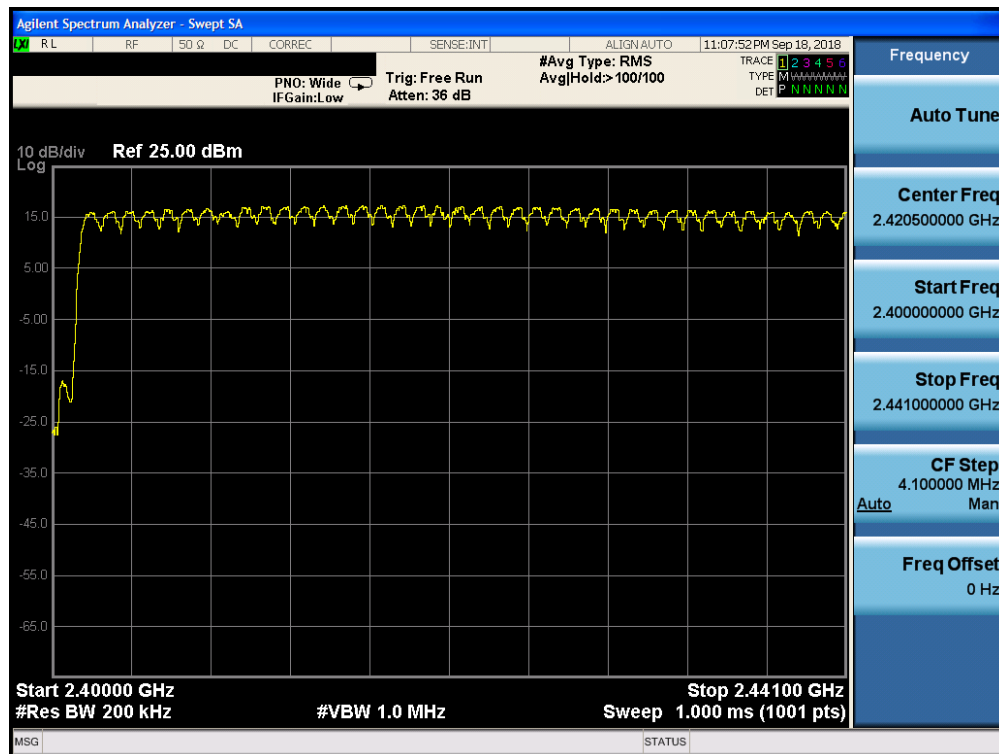


Plot 7-57. Low End Spectrum Channel Hopping Plot ANT0 (Bluetooth, 8DPSK, ePA)

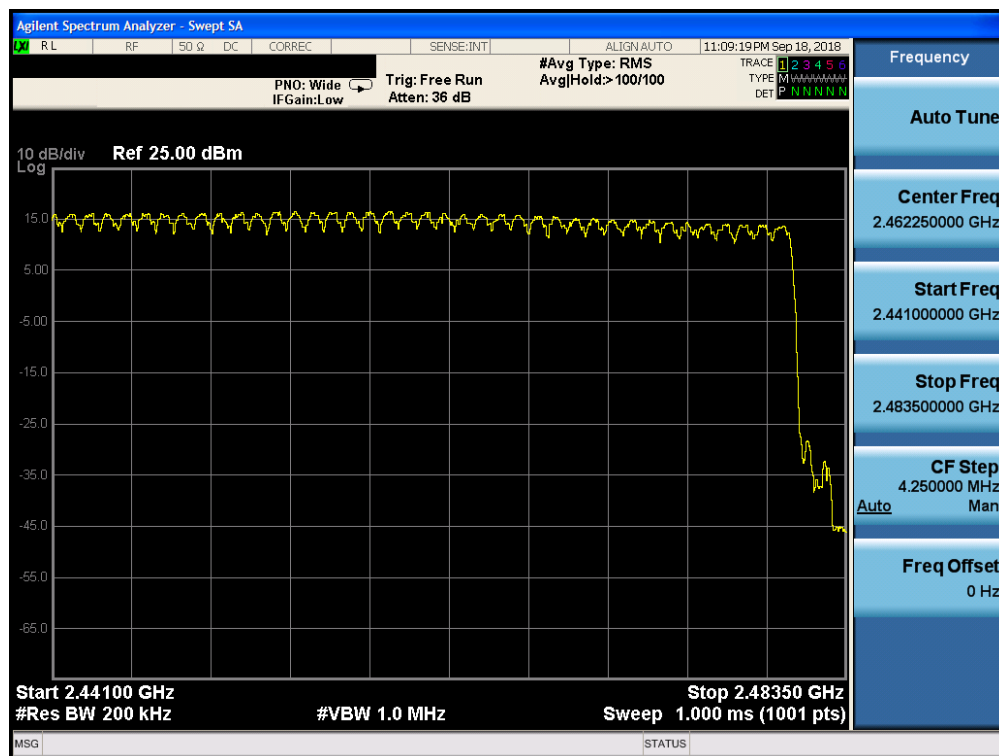


Plot 7-58. High End Spectrum Channel Hopping Plot ANT0 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 62 of 115

Antenna 1

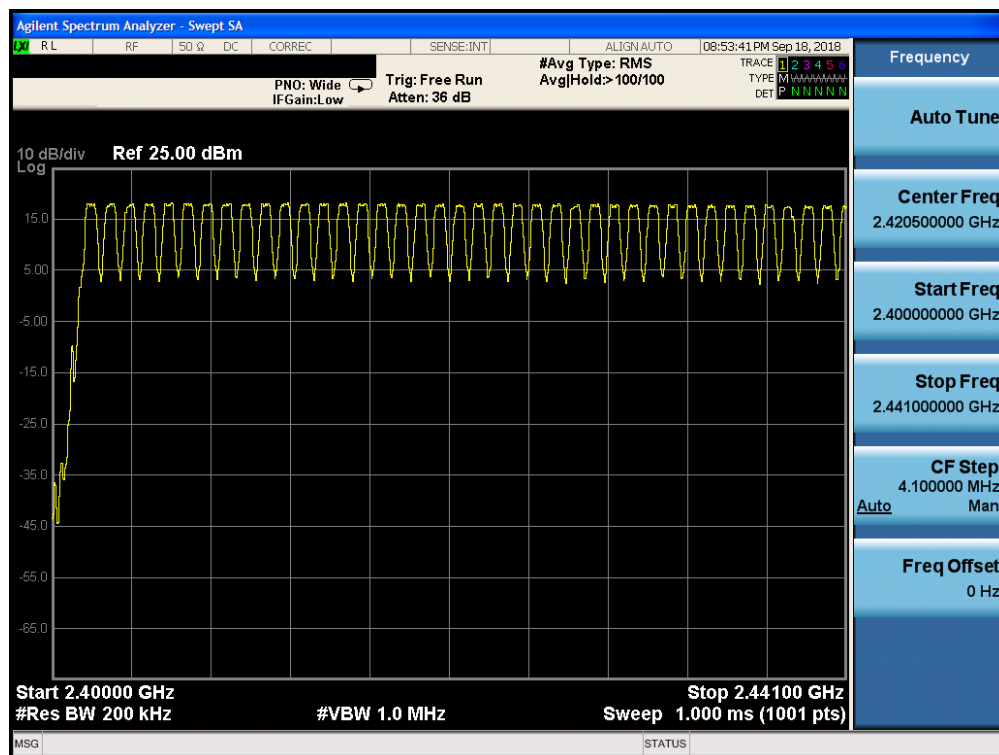


Plot 7-59. Low End Spectrum Channel Hopping Plot ANT1 (Bluetooth, GFSK, ePA)

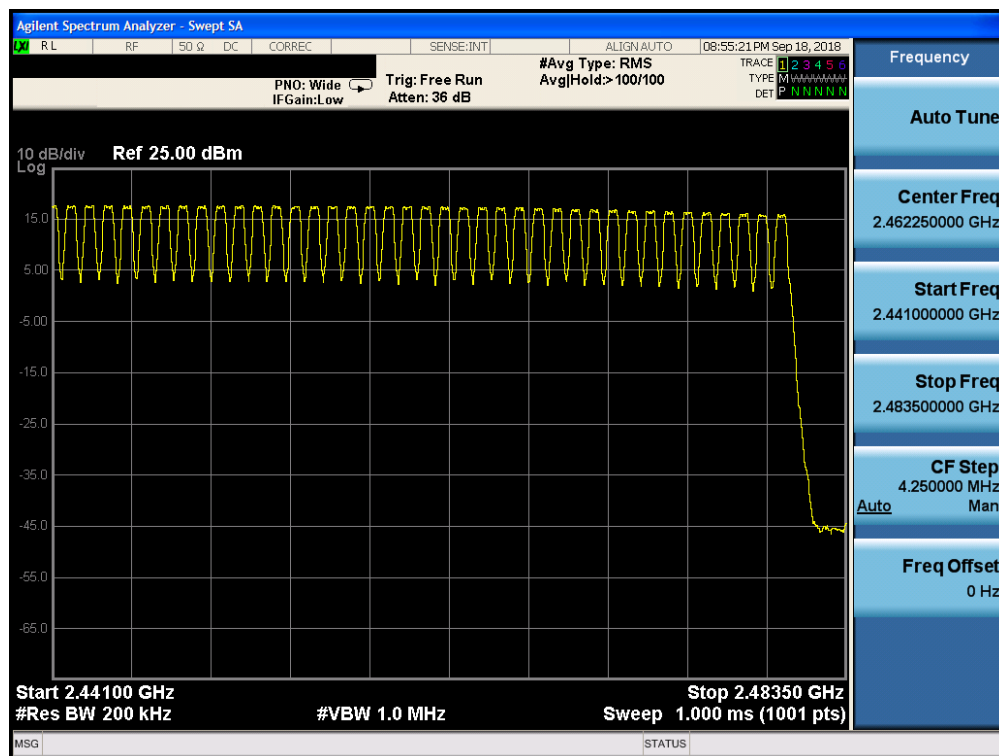


Plot 7-60. High End Spectrum Channel Hopping Plot ANT1 (Bluetooth, GFSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 63 of 115

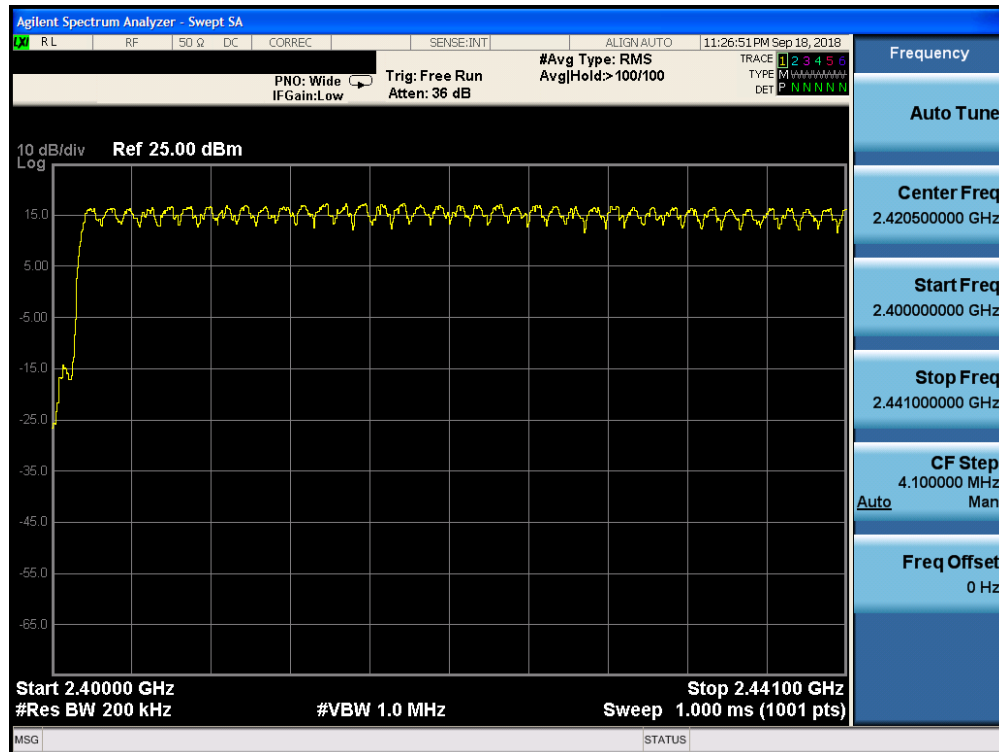


Plot 7-61. Low End Spectrum Channel Hopping Plot ANT1 (Bluetooth, 8DPSK, ePA)

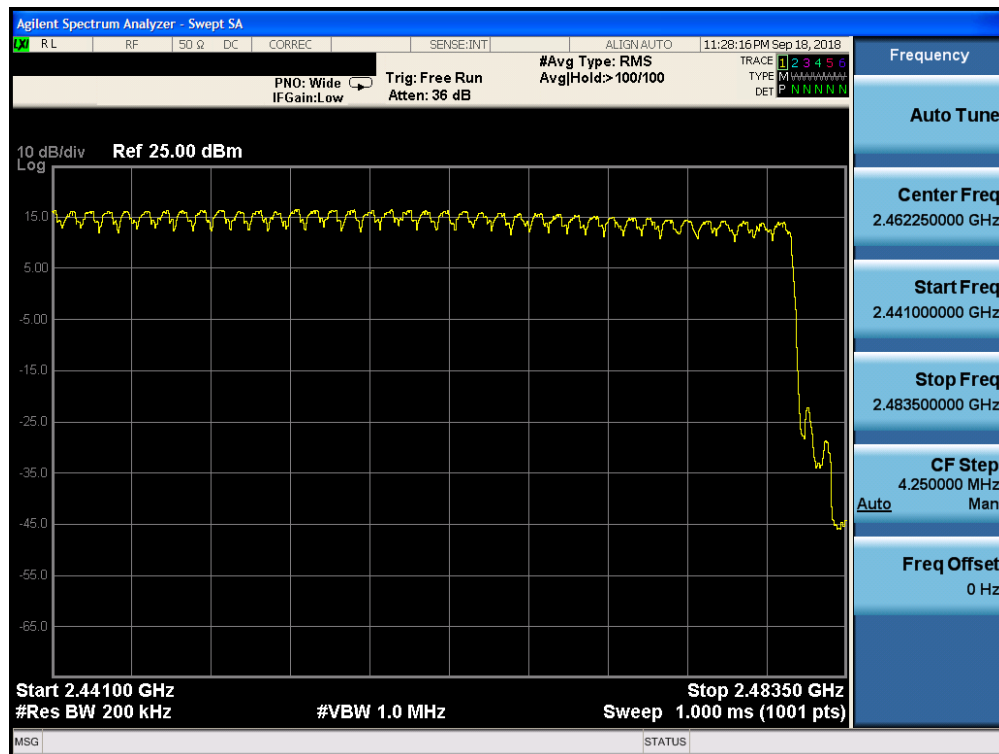


Plot 7-62. High End Spectrum Channel Hopping Plot ANT1 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 64 of 115

Antenna 2

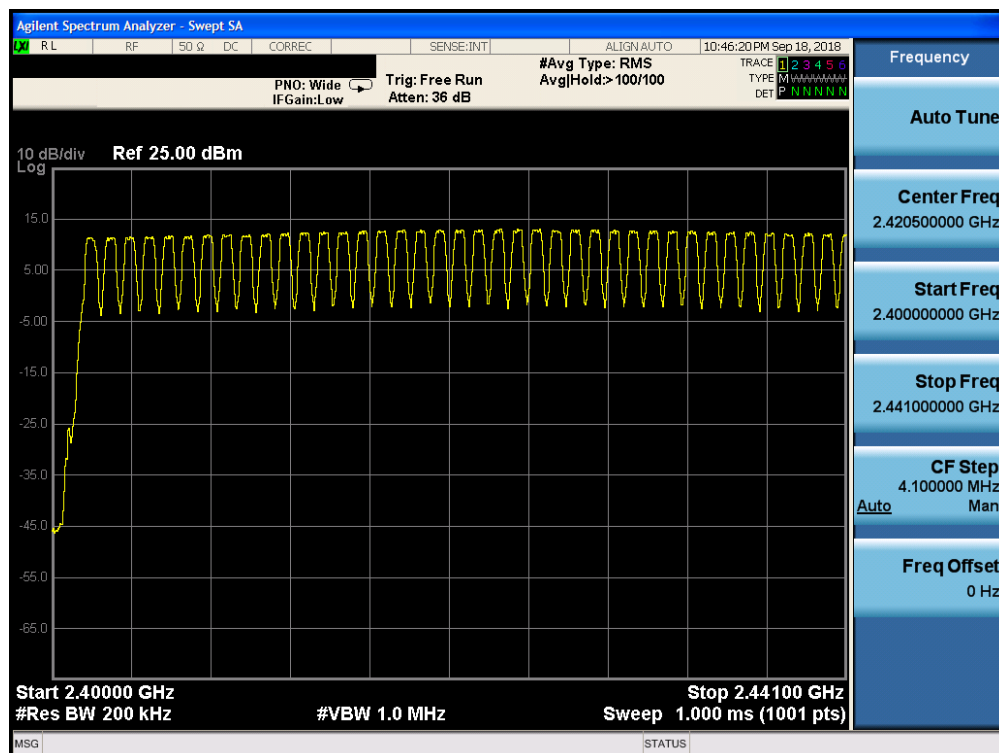


Plot 7-63. Low End Spectrum Channel Hopping Plot ANT2 (Bluetooth, GFSK, ePA)

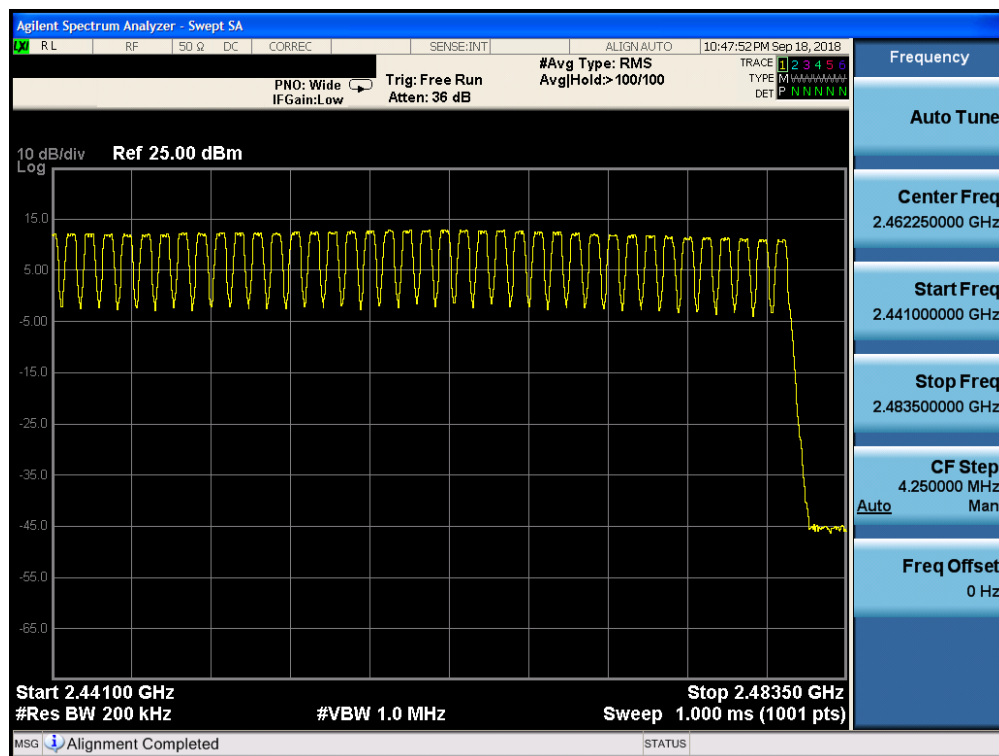


Plot 7-64. High End Spectrum Channel Hopping Plot ANT2 (Bluetooth, GFSK, ePA)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 65 of 115

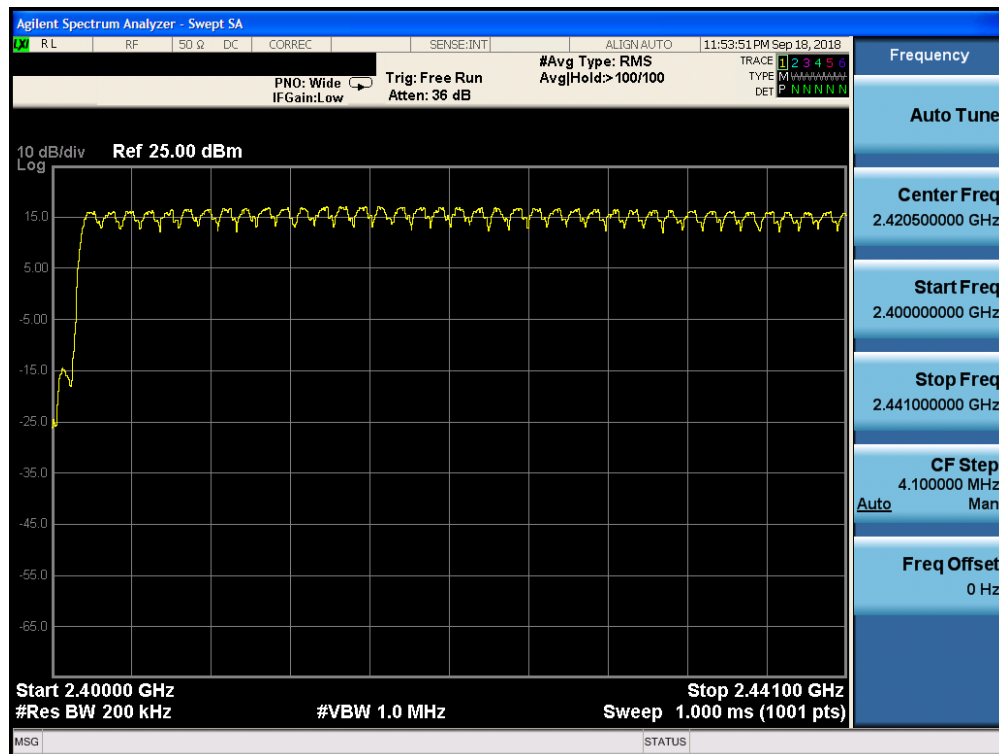

Plot 7-65. Low End Spectrum Channel Hopping Plot ANT2 (Bluetooth, 8DPSK, ePA)

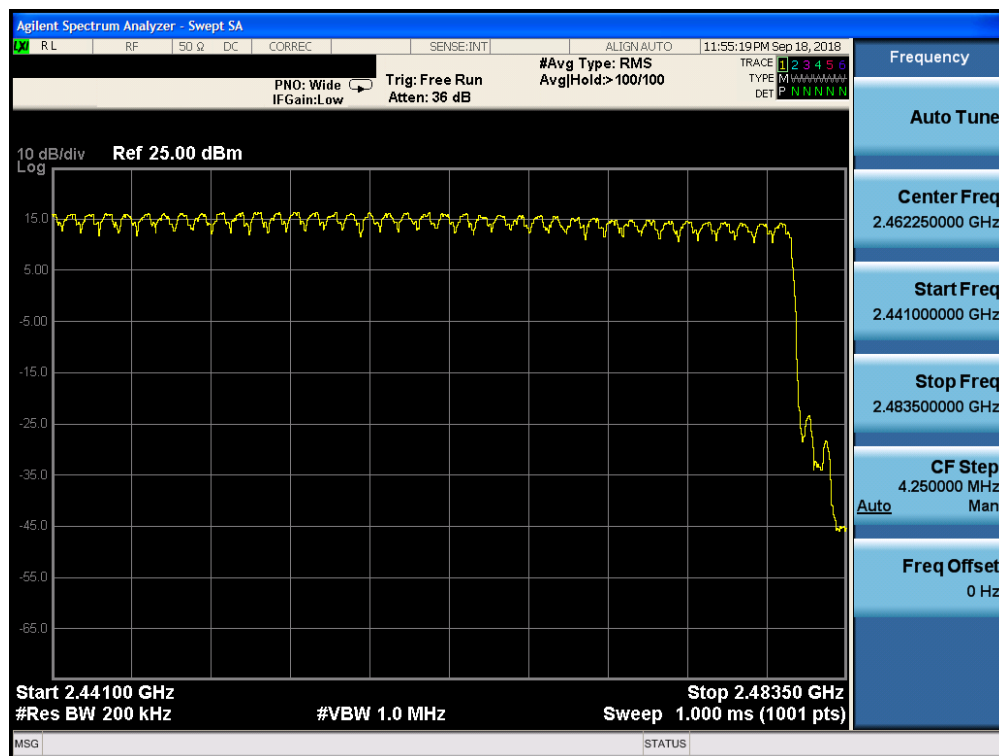

Plot 7-66. High End Spectrum Channel Hopping Plot ANT2 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 66 of 115

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-7. Test Instrument & Measurement Setup

Test Notes


1. Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at N/AMbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
2. Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 67 of 115

Antenna 0

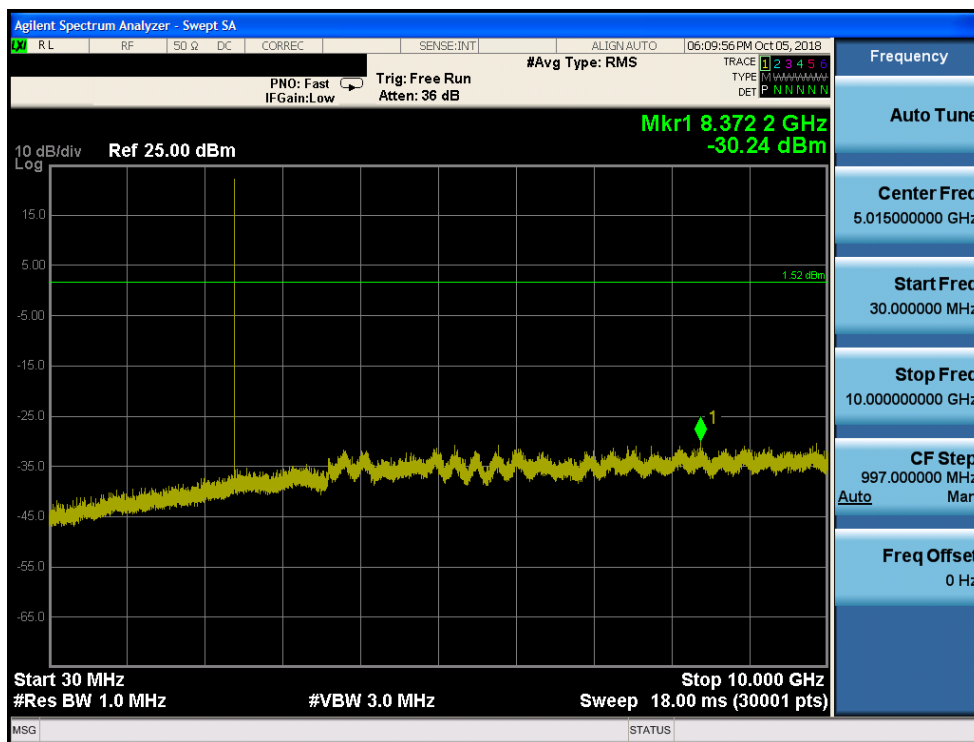


Plot 7-67. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 0)

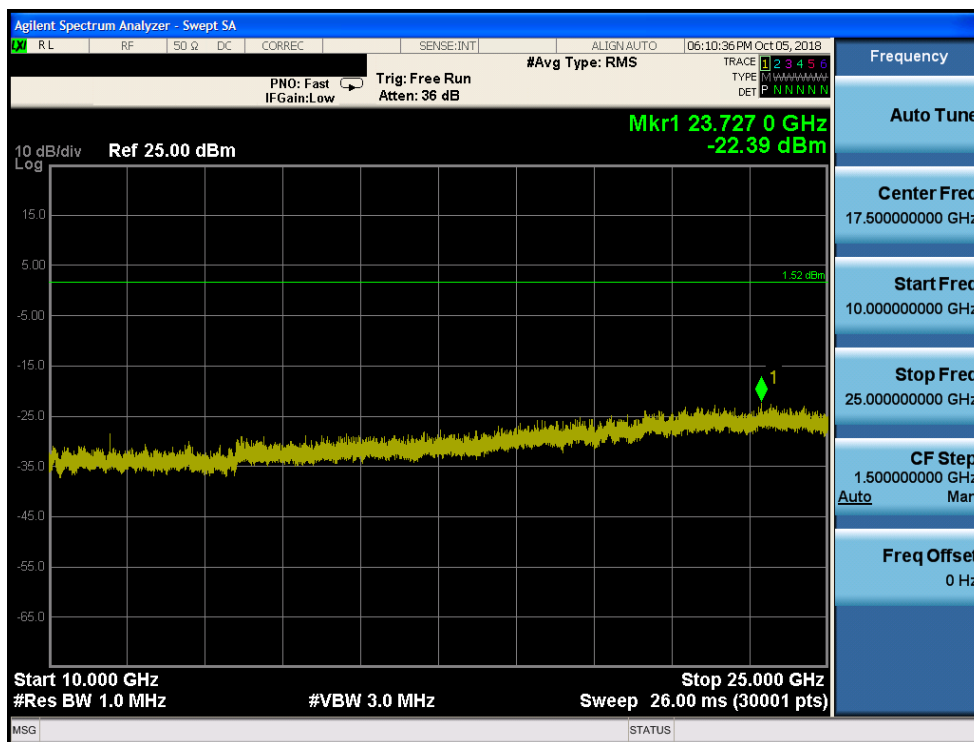


Plot 7-68. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 68 of 115

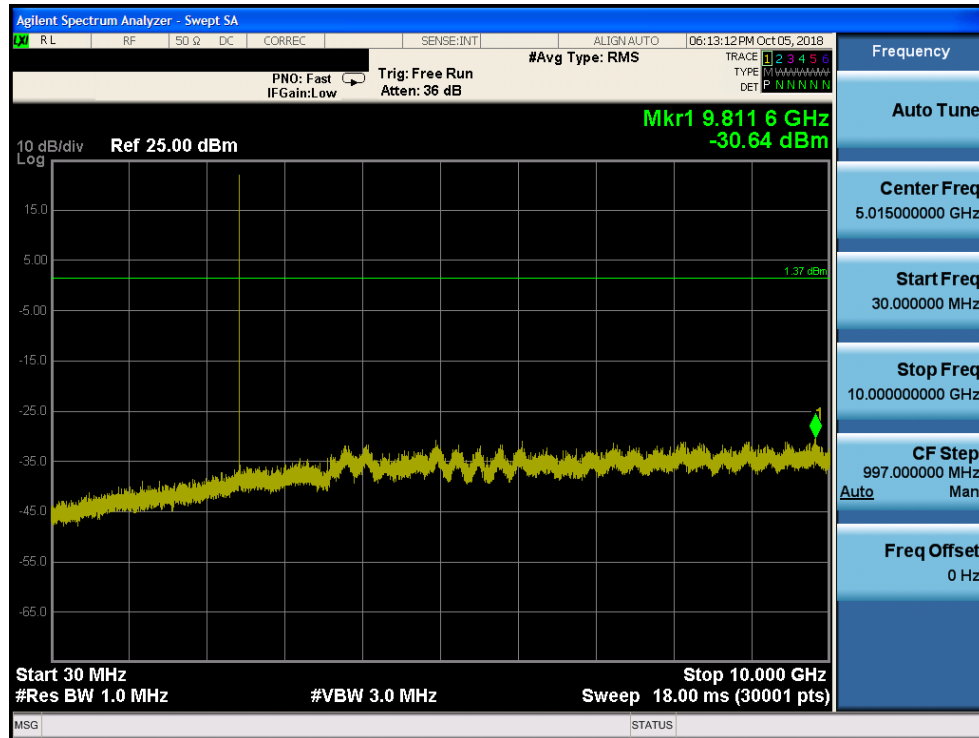


Plot 7-69. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 39)

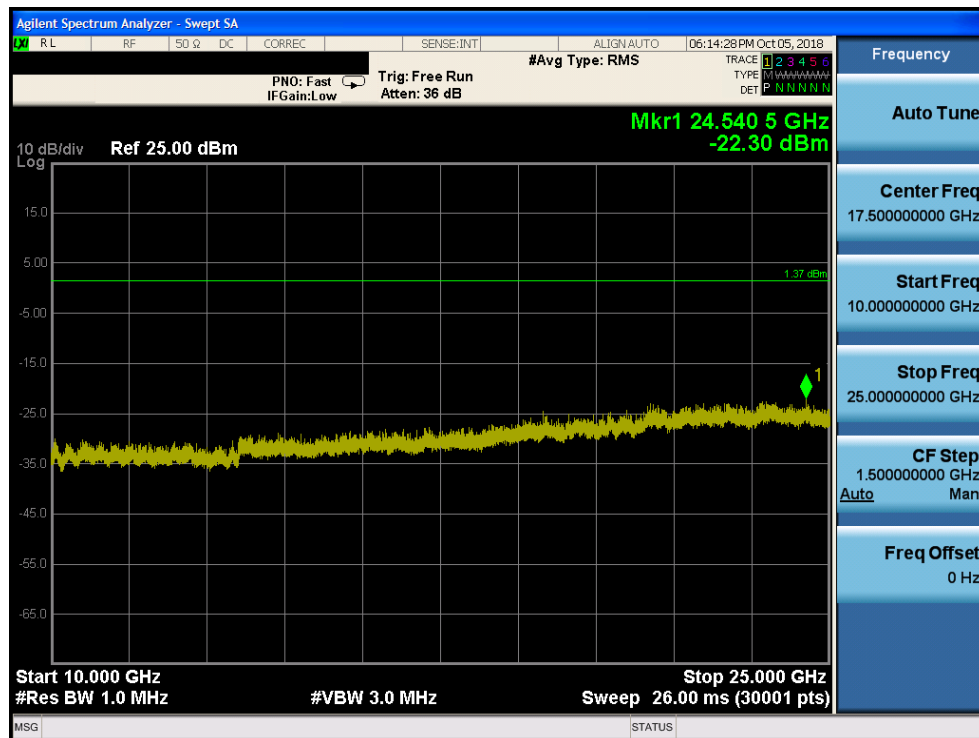


Plot 7-70. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 69 of 115

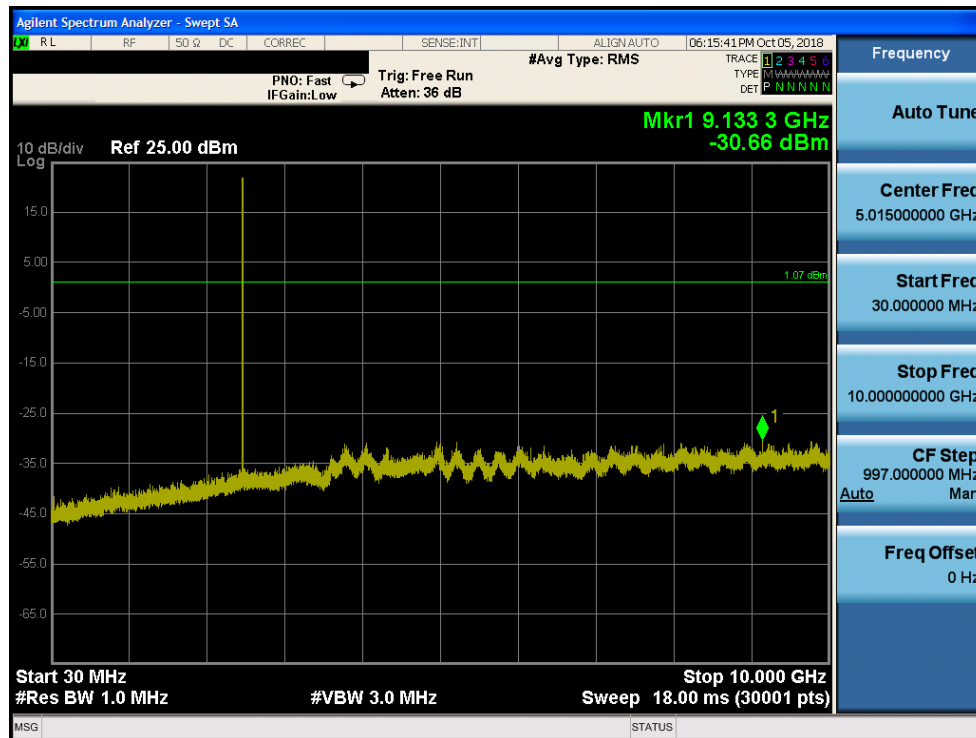

Plot 7-71. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 78)

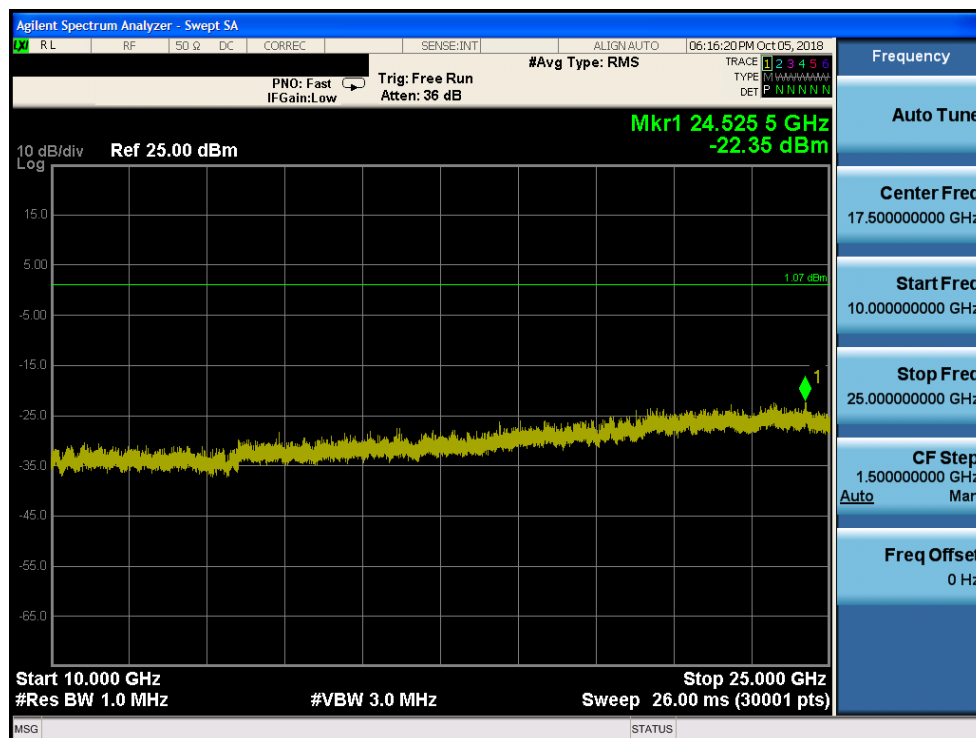


Plot 7-72. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 78)


FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 70 of 115



© 2018 PCTEST Engineering Laboratory, Inc. V 8.5 08/29/2018
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

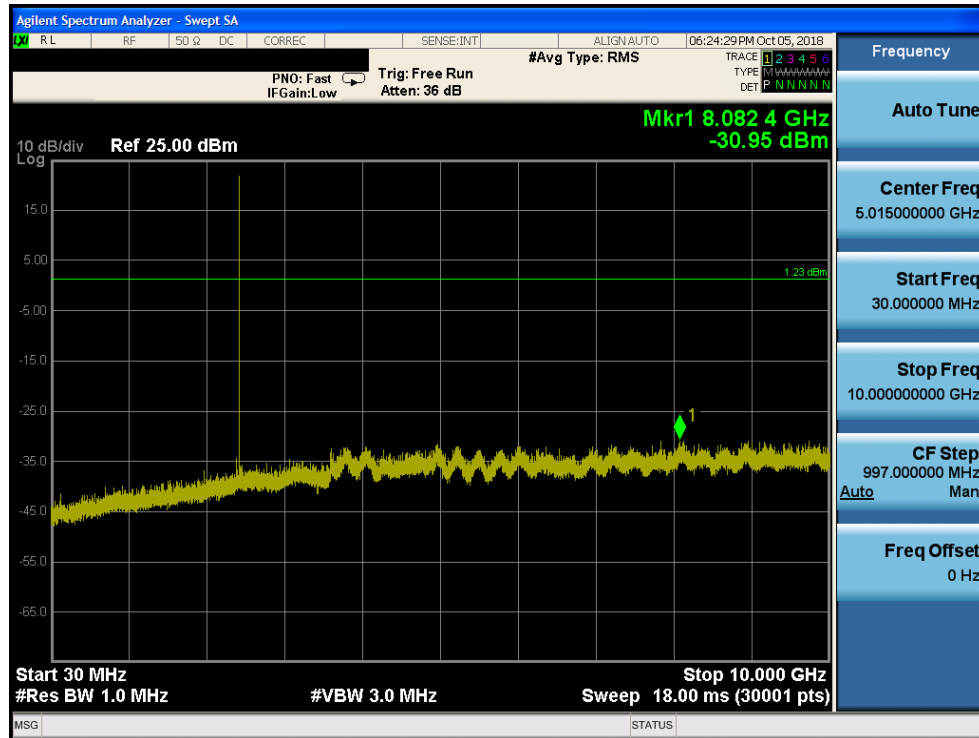


Plot 7-75. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 39)

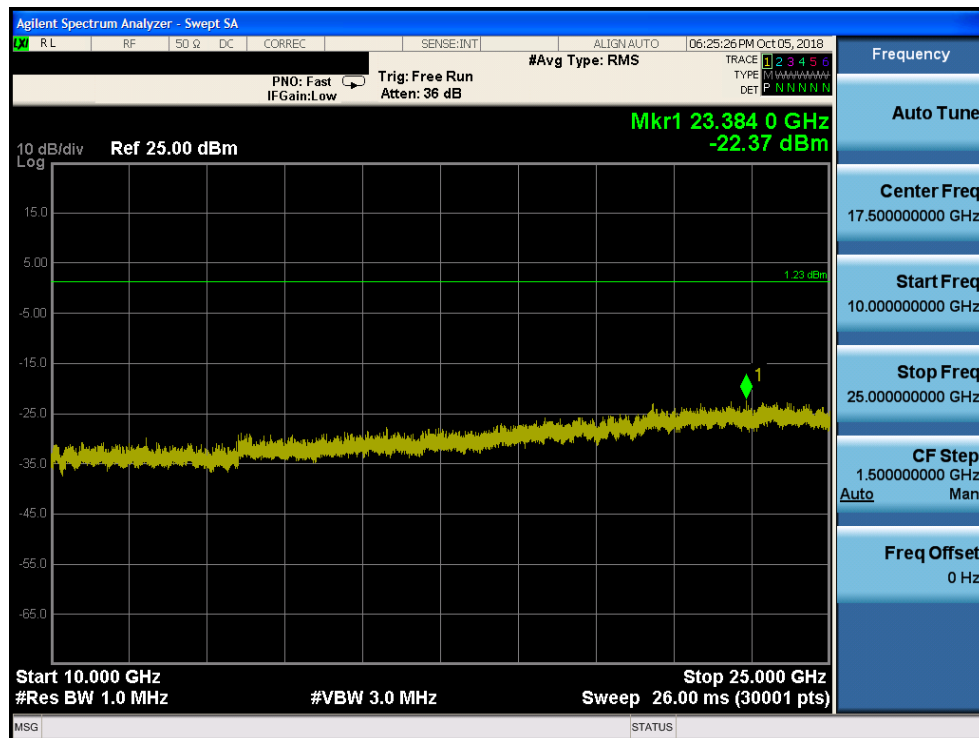


Plot 7-76. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 72 of 115

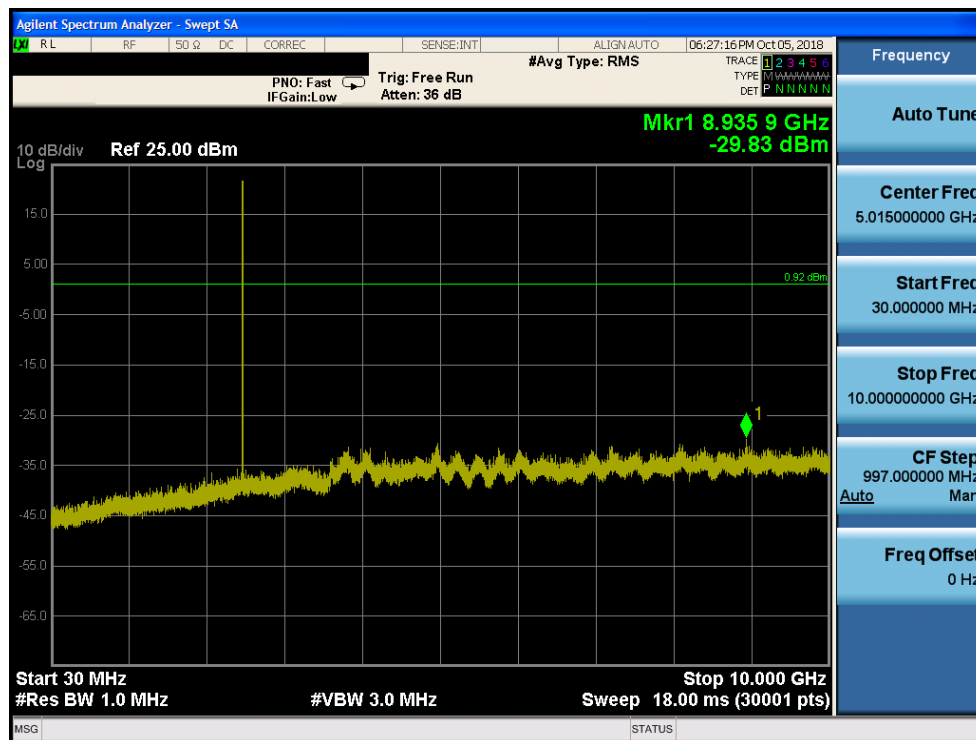


Plot 7-77. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 78)

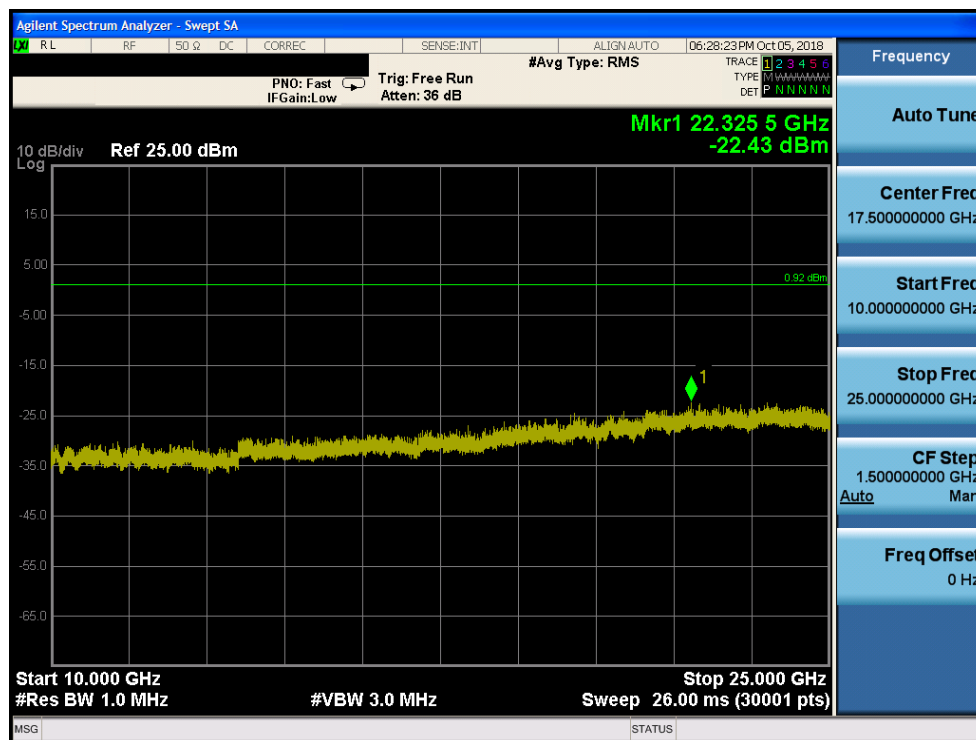


Plot 7-78. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 73 of 115

Antenna 2

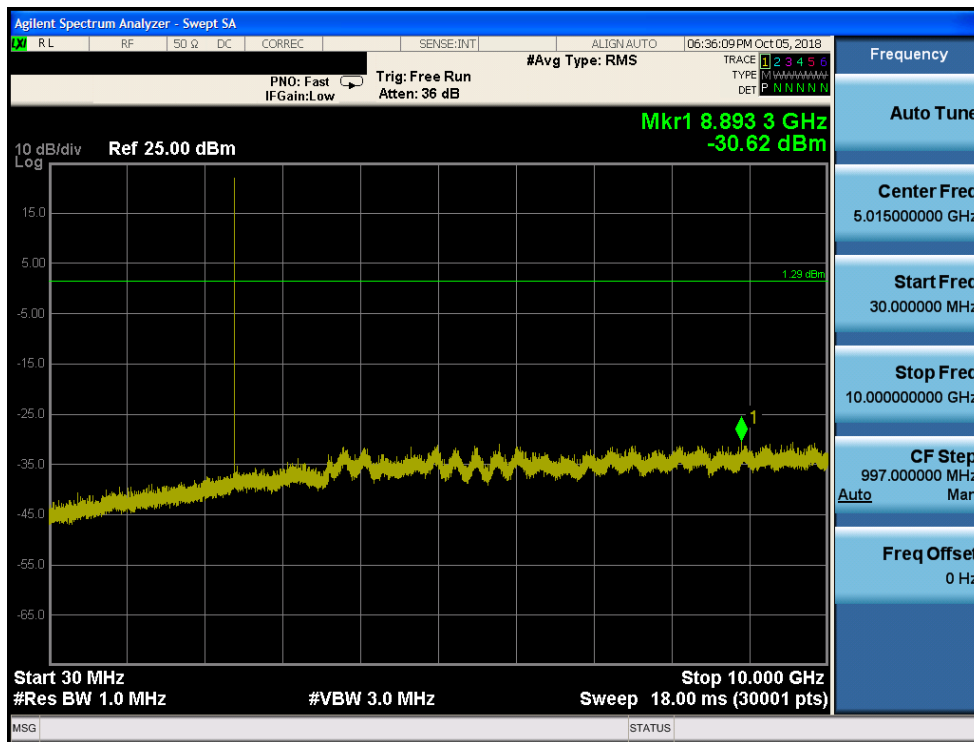


Plot 7-79. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 0)

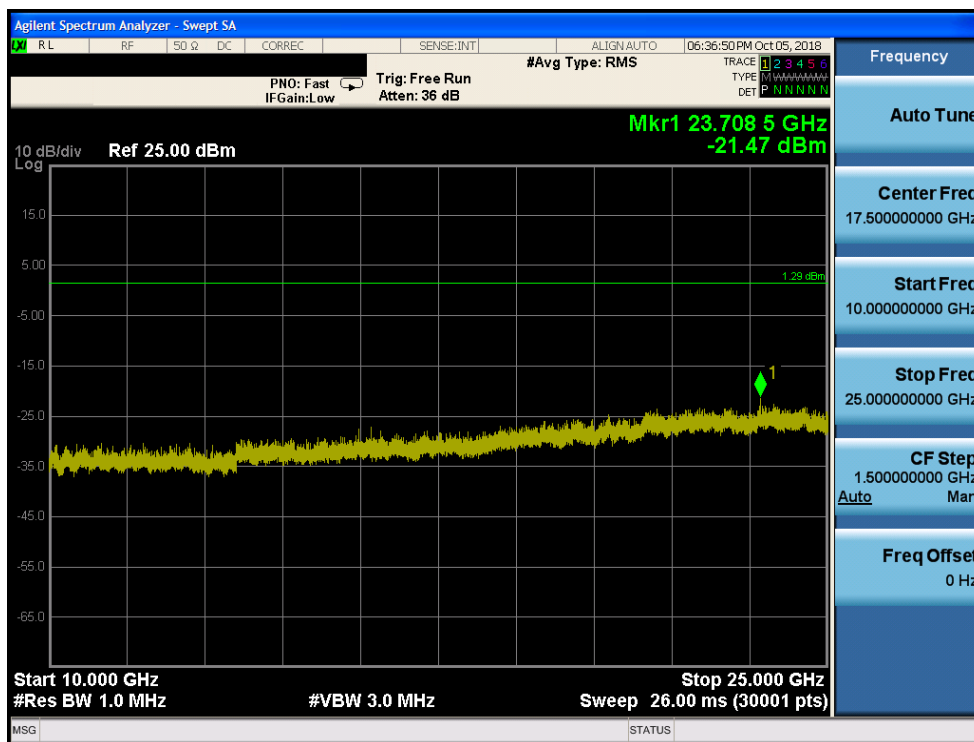


Plot 7-80. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 74 of 115

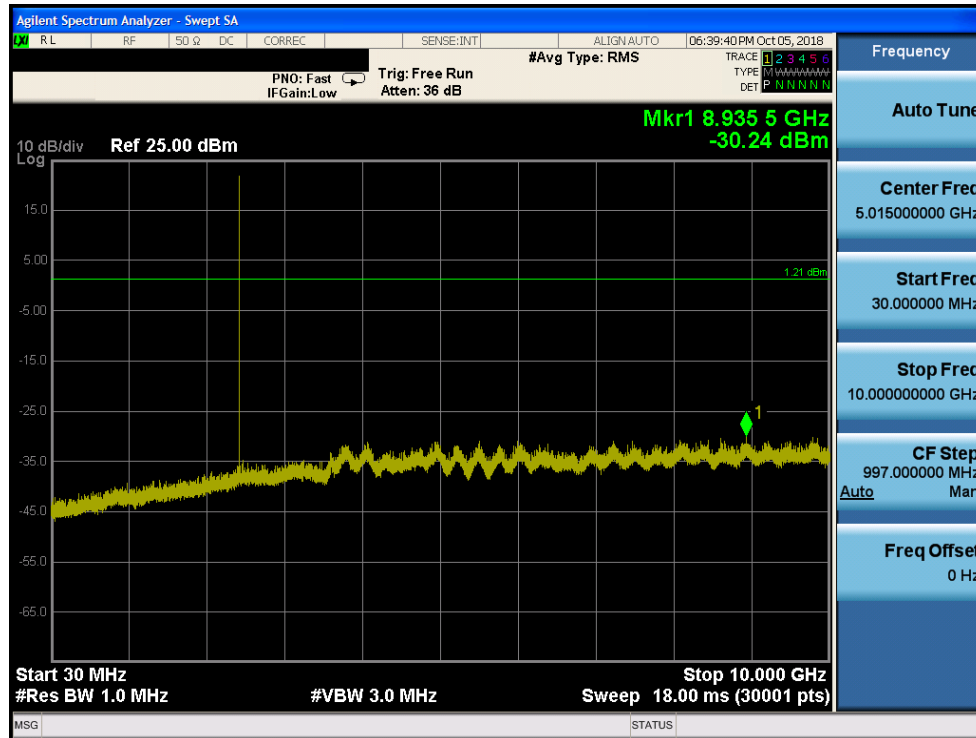


Plot 7-81. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 39)

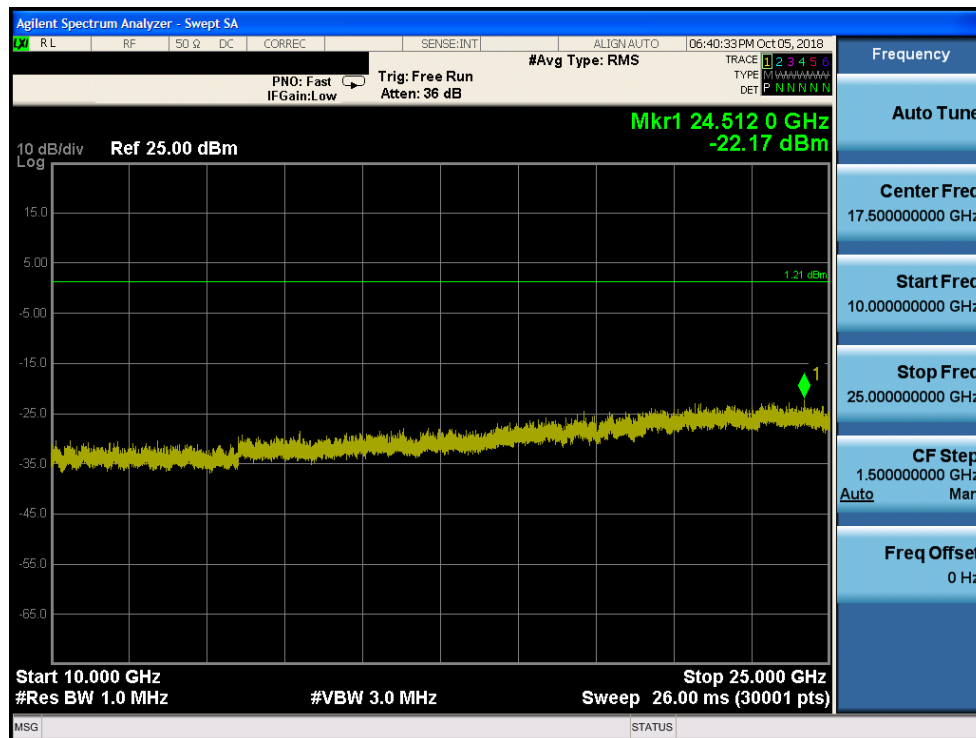


Plot 7-82. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 75 of 115

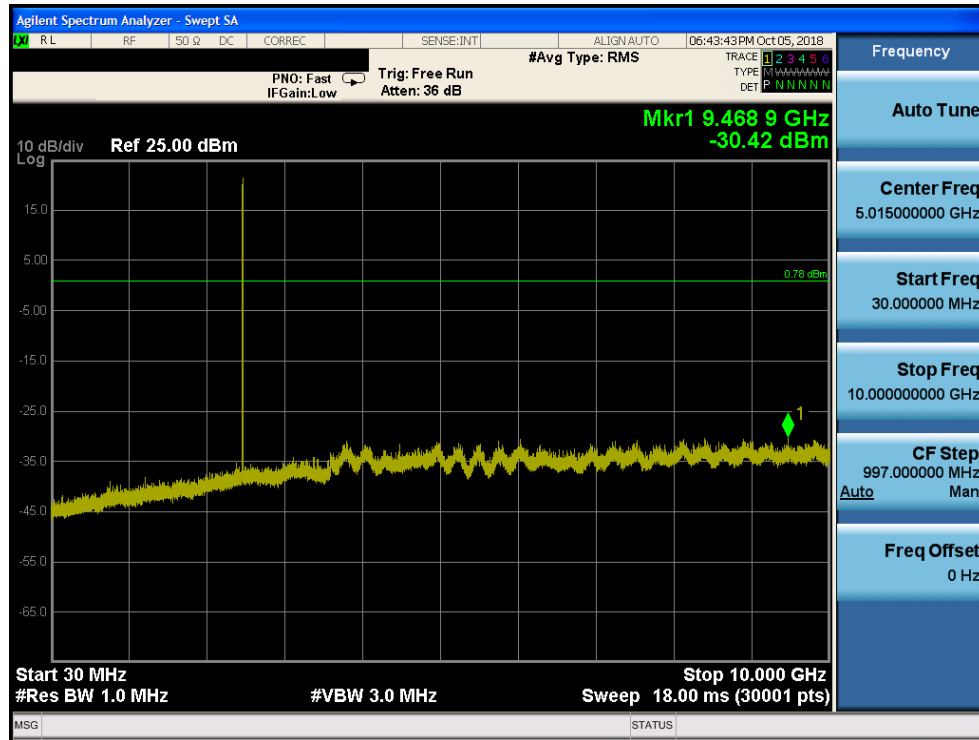

Plot 7-83. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 78)

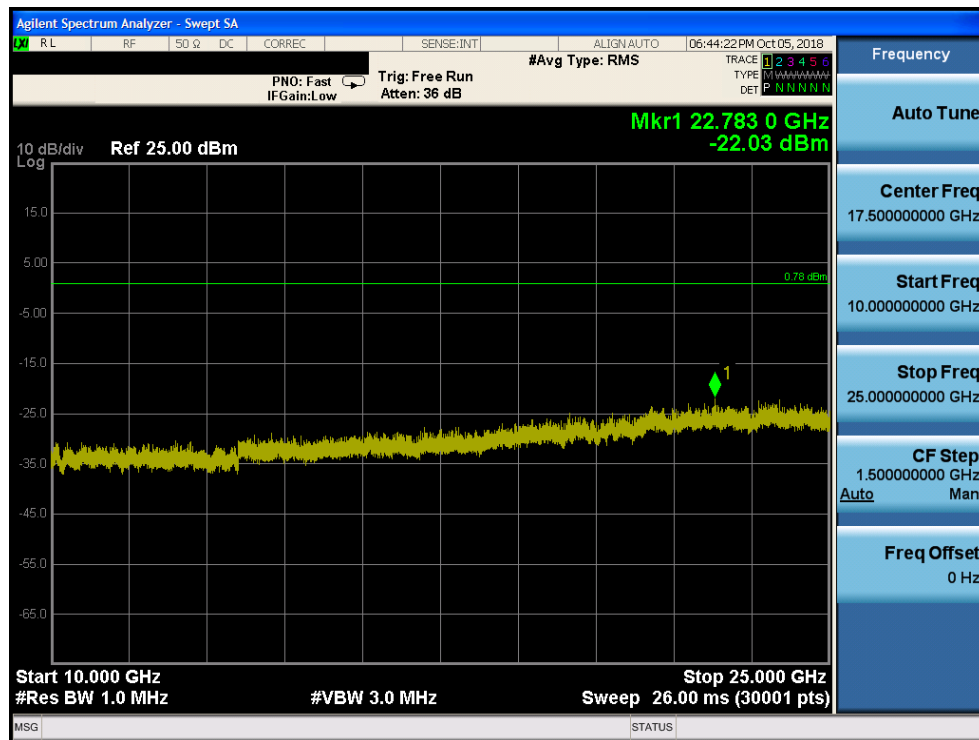

Plot 7-84. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 76 of 115

7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-14 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-14. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements per Section 4.1.4.2.3 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements per Section 4.1.4.2.2 of ANSI C63.10-2013

8. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
9. RBW is set depending on measurement frequency, as specified in Table 7-15 below
10. VBW = 3MHz
11. Detector = peak
12. Sweep time = auto couple
13. Trace mode = max hold
14. Trace was allowed to stabilize

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 77 of 115

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-15. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

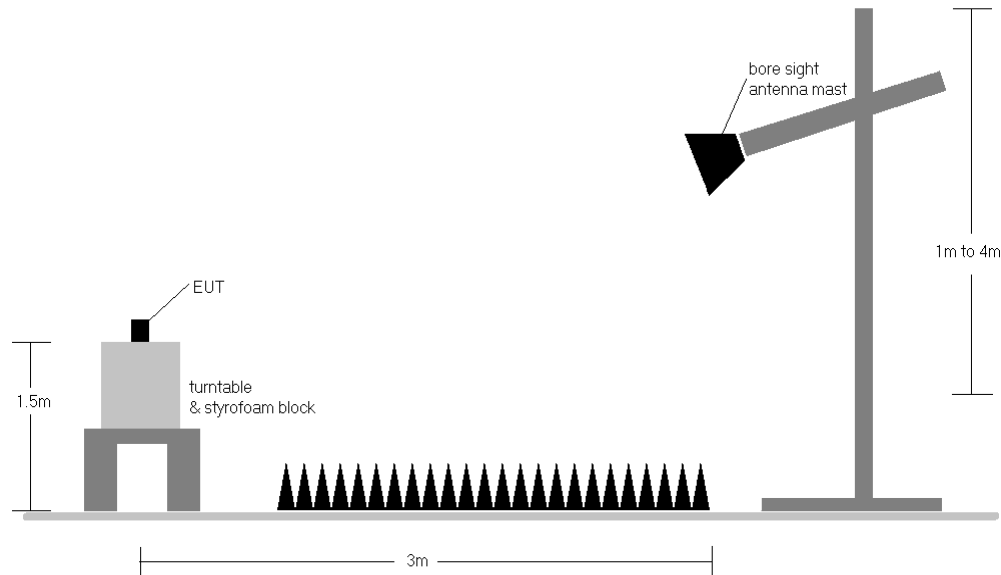


Figure 7-8. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-14.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. The duty cycle correction factor was not applied to noise floor measurements.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 78 of 115

Sample Calculation


- o Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]} + \text{Duty Cycle Correction }_{[dB]}$
- o $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- o $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 79 of 115


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Antenna 0

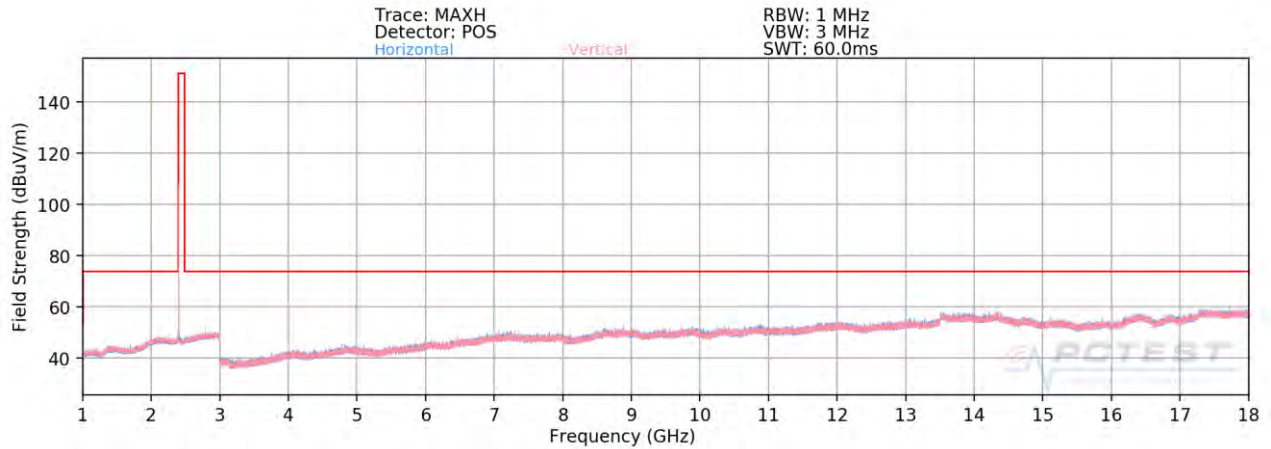

Plot 7-85. Radiated Spurious Plot above 1GHz ANT0 (BT GFSK ePA – Ch. 0)

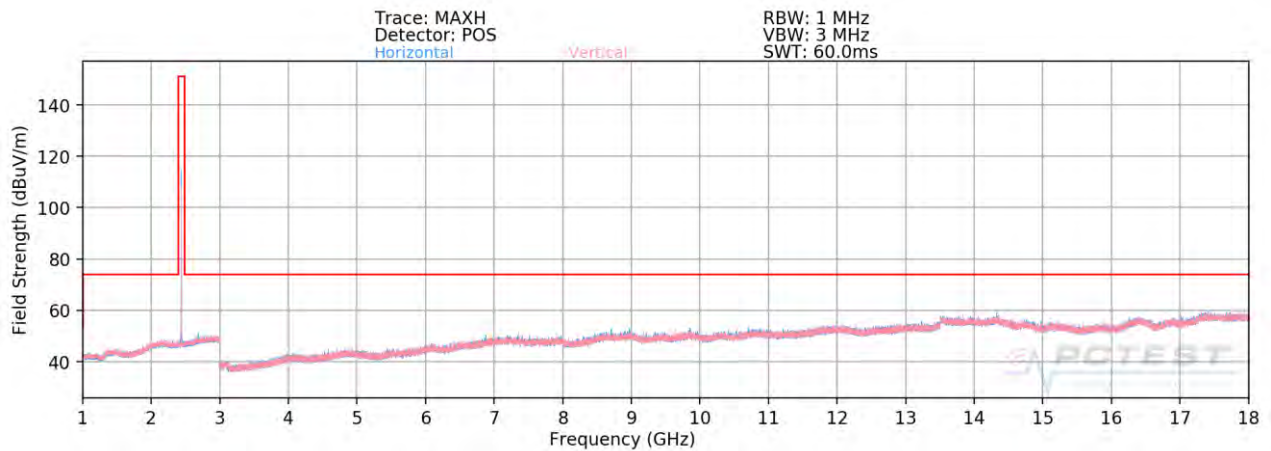

Plot 7-86. Radiated Spurious Plot above 1GHz ANT0 (BT GFSK ePA – Ch. 39)

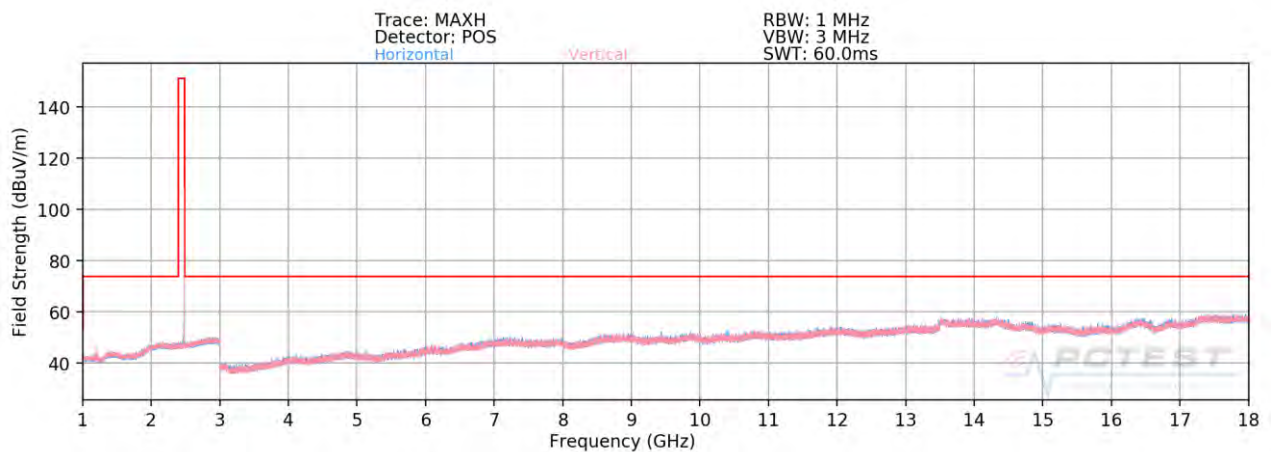


Plot 7-87. Radiated Spurious Plot above 1GHz ANT0 (BT GFSK ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 80 of 115


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Antenna 1

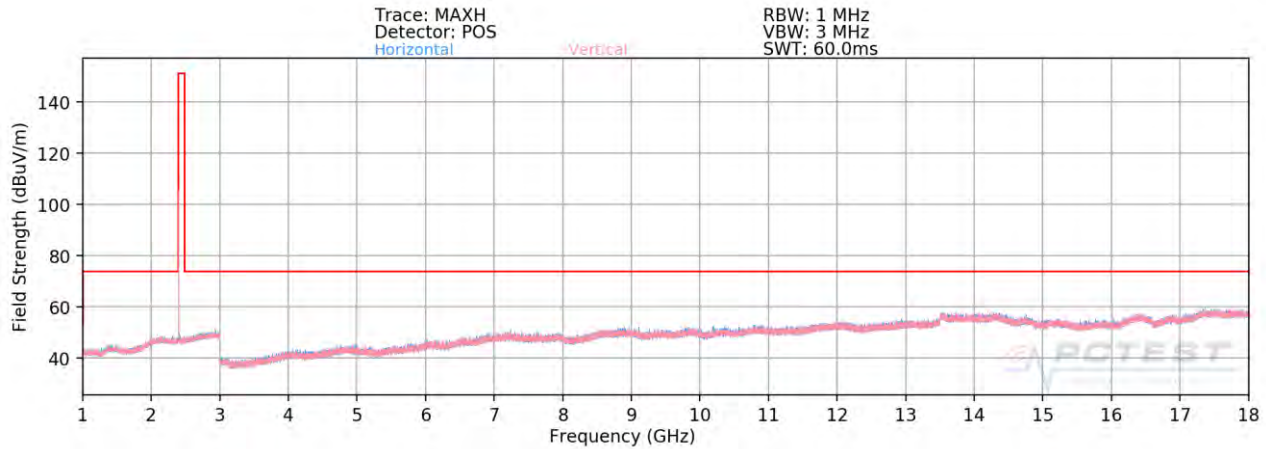

Plot 7-88. Radiated Spurious Plot above 1GHz ANT1 (BT GFSK ePA – Ch. 0)

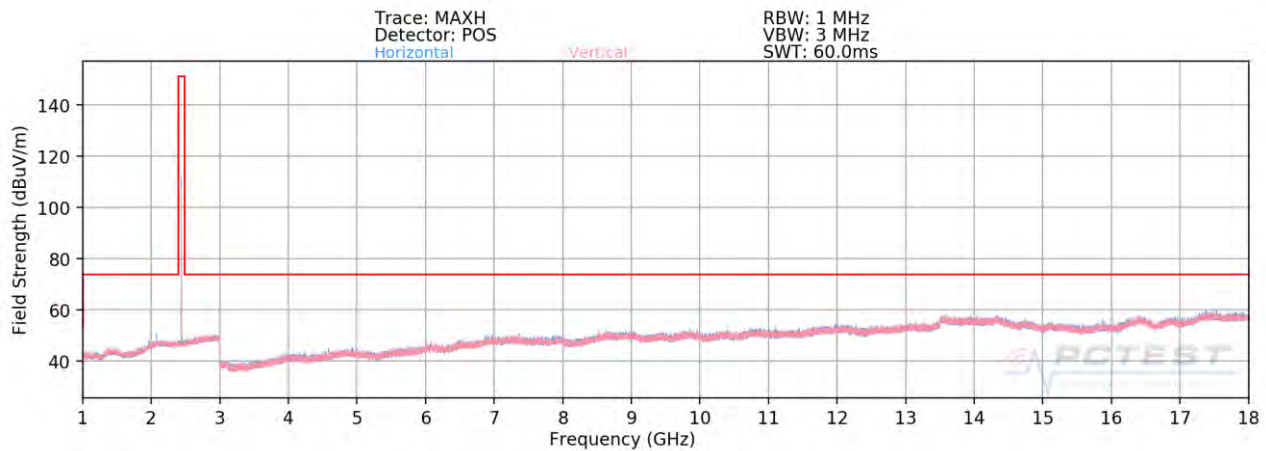

Plot 7-89. Radiated Spurious Plot above 1GHz ANT1 (BT GFSK ePA – Ch. 39)

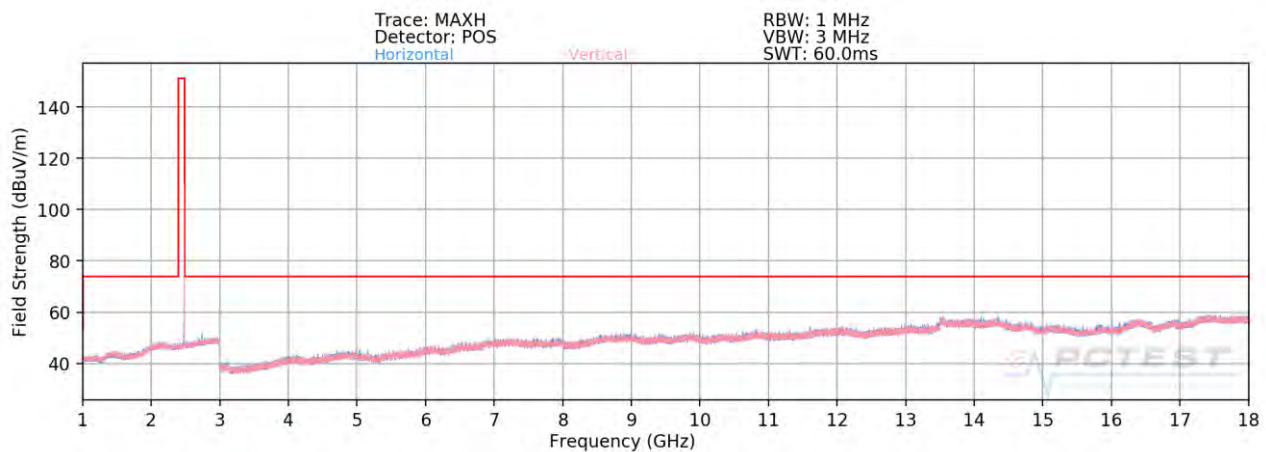


Plot 7-90. Radiated Spurious Plot above 1GHz ANT1 (BT GFSK ePA – Ch. 78)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 81 of 115


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Antenna 2

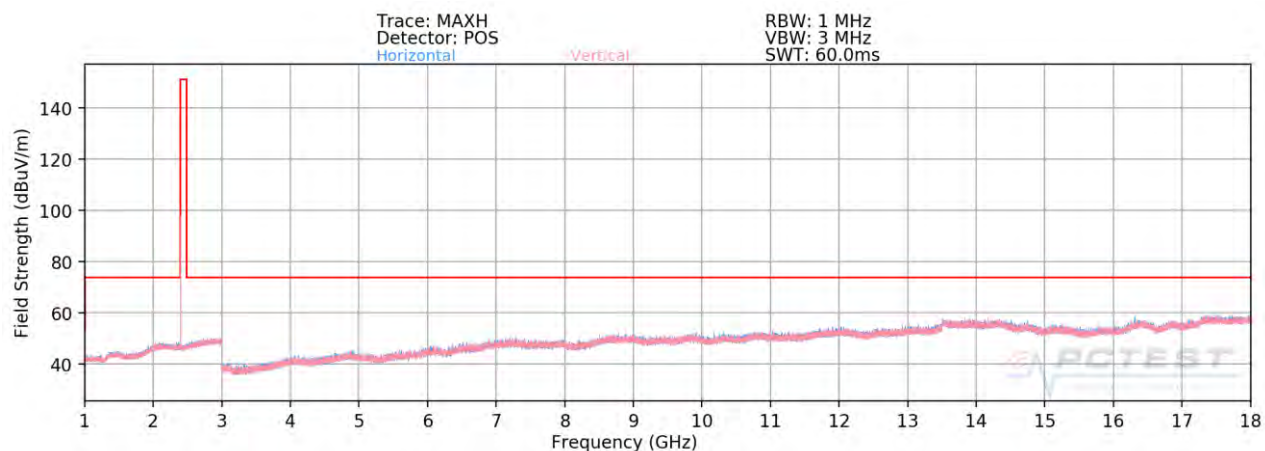

Plot 7-91. Radiated Spurious Plot above 1GHz ANT2 (BT GFSK ePA – Ch. 0)

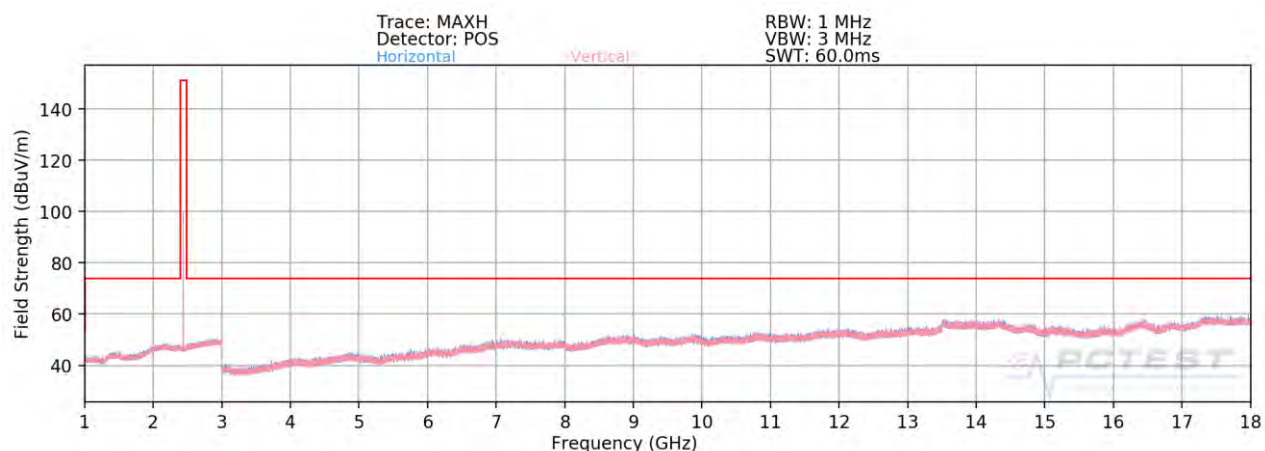

Plot 7-92. Radiated Spurious Plot above 1GHz ANT2 (BT GFSK ePA – Ch. 39)

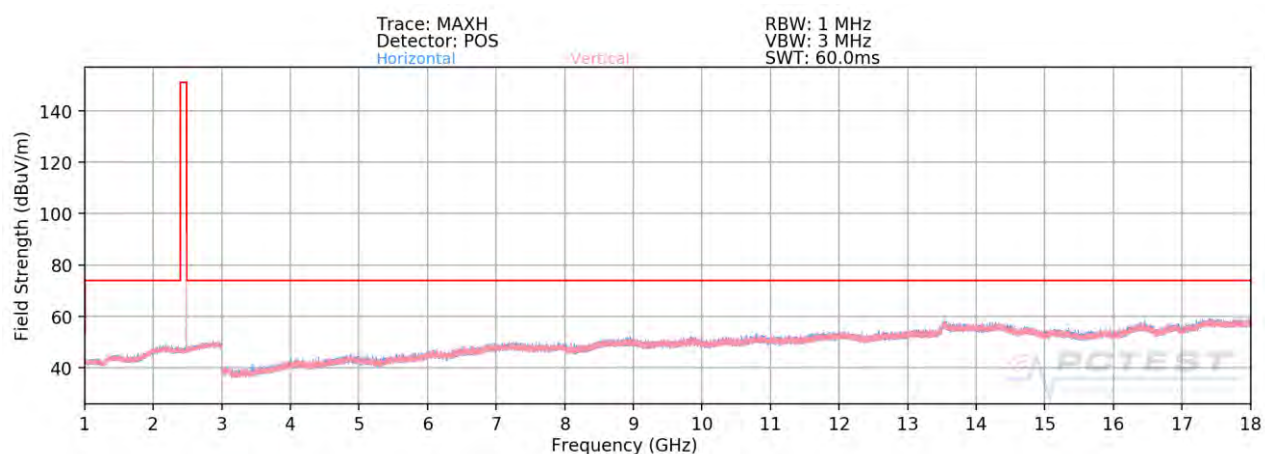


Plot 7-93. Radiated Spurious Plot above 1GHz ANT2 (BT GFSK ePA – Ch. 78)


FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 82 of 115

Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

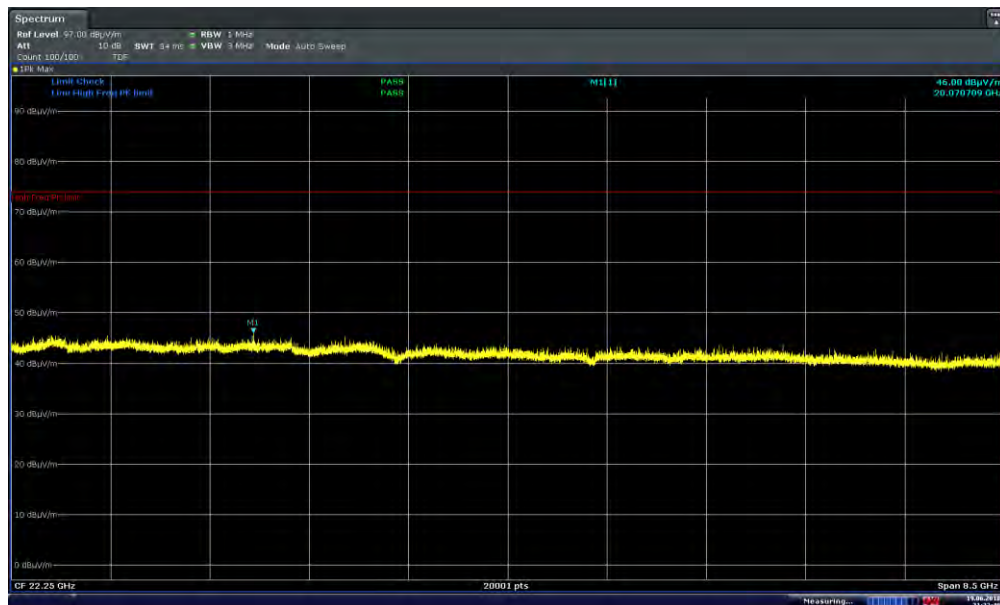

Plot 7-94. Radiated Spurious Plot above 18GHz (GFSK ePA Ch. 39, Pol. H)

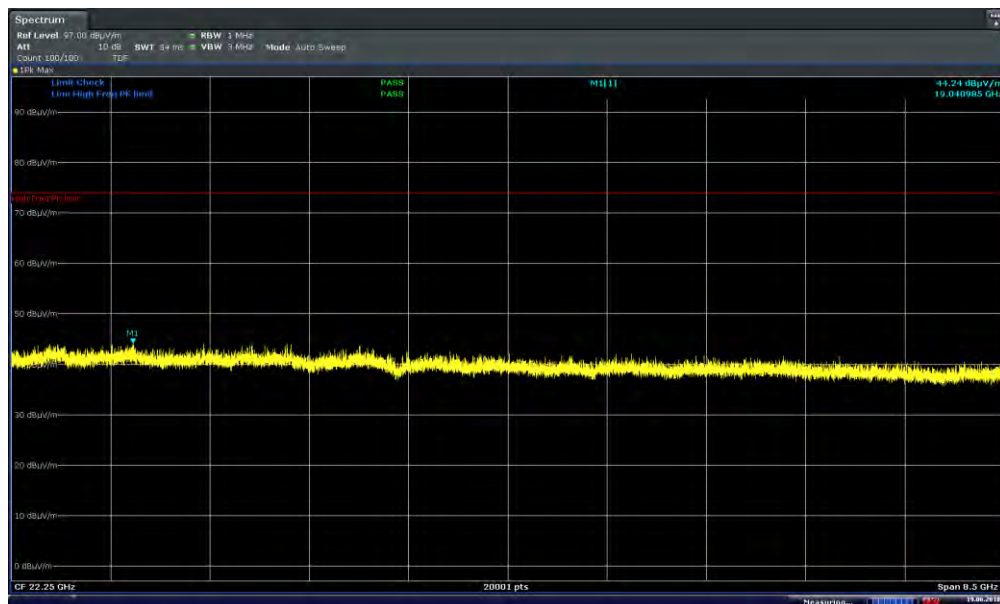

Plot 7-95. Radiated Spurious Plot above 18GHz (GFSK ePA Ch. 39, Pol. V)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 83 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna 0

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	-	-	-80.33	5.44	32.11	53.98	-21.87
4804.00	Peak	H	-	-	-66.86	5.44	45.58	73.98	-28.40
12010.00	Avg	H	-	-	-85.20	19.33	41.13	53.98	-12.85
12010.00	Peak	H	-	-	-72.84	19.33	53.49	73.98	-20.49

Table 7-16. Radiated Measurements

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.13	5.73	32.60	53.98	-21.38
4882.00	Peak	H	-	-	-67.07	5.73	45.66	73.98	-28.32
7323.00	Avg	H	-	-	-83.09	12.76	36.67	53.98	-17.31
7323.00	Peak	H	-	-	-69.42	12.76	50.34	73.98	-23.64
12205.00	Avg	H	-	-	-85.51	20.11	41.60	53.98	-12.38
12205.00	Peak	H	-	-	-72.98	20.11	54.13	73.98	-19.85

Table 7-17. Radiated Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 84 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-80.04	5.00	31.96	53.98	-22.02
4960.00	Peak	H	-	-	-66.93	5.00	45.07	73.98	-28.91
7440.00	Avg	H	-	-	-82.51	12.49	36.98	53.98	-17.00
7440.00	Peak	H	-	-	-69.15	12.49	50.34	73.98	-23.64
12400.00	Avg	H	-	-	-86.30	20.06	40.76	53.98	-13.22
12400.00	Peak	H	-	-	-73.93	20.06	53.13	73.98	-20.85

Table 7-18. Radiated Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 85 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna 1

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	-	-	-80.31	5.44	32.13	53.98	-21.85
4804.00	Peak	H	-	-	-67.61	5.44	44.83	73.98	-29.15
12010.00	Avg	H	-	-	-85.21	19.33	41.12	53.98	-12.86
12010.00	Peak	H	-	-	-72.57	19.33	53.76	73.98	-20.22

Table 7-19. Radiated Measurements

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.14	5.73	32.59	53.98	-21.39
4882.00	Peak	H	-	-	-67.21	5.73	45.52	73.98	-28.46
7323.00	Avg	H	-	-	-82.38	12.76	37.38	53.98	-16.60
7323.00	Peak	H	-	-	-69.25	12.76	50.51	73.98	-23.47
12205.00	Avg	H	-	-	-85.39	20.11	41.72	53.98	-12.26
12205.00	Peak	H	-	-	-71.36	20.11	55.75	73.98	-18.23

Table 7-20. Radiated Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 86 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-79.98	5.00	32.02	53.98	-21.96
4960.00	Peak	H	-	-	-66.47	5.00	45.53	73.98	-28.45
7440.00	Avg	H	-	-	-82.51	12.49	36.98	53.98	-17.00
7440.00	Peak	H	-	-	-69.77	12.49	49.72	73.98	-24.26
12400.00	Avg	H	-	-	-86.53	20.06	40.53	53.98	-13.45
12400.00	Peak	H	-	-	-72.98	20.06	54.08	73.98	-19.90

Table 7-21. Radiated Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 87 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna 2

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2402MHz
Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4804.00	Avg	H	-	-	-80.20	5.44	32.24	53.98	-21.74
4804.00	Peak	H	-	-	-67.08	5.44	45.36	73.98	-28.62
12010.00	Avg	H	-	-	-85.15	19.33	41.18	53.98	-12.80
12010.00	Peak	H	-	-	-73.02	19.33	53.31	73.98	-20.67

Table 7-22. Radiated Measurements

Worst Case Mode: Bluetooth
Worst Case Modulation: GFSK
Worst Case Power Scheme: ePA
Measurement Distance: 3 Meters
Operating Frequency: 2441MHz
Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.21	5.73	32.52	53.98	-21.46
4882.00	Peak	H	-	-	-67.49	5.73	45.24	73.98	-28.74
7323.00	Avg	H	-	-	-82.41	12.76	37.35	53.98	-16.63
7323.00	Peak	H	-	-	-69.64	12.76	50.12	73.98	-23.86
12205.00	Avg	H	-	-	-85.39	20.11	41.72	53.98	-12.26
12205.00	Peak	H	-	-	-72.66	20.11	54.45	73.98	-19.53

Table 7-23. Radiated Measurements

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 88 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	-	-	-80.91	5.00	31.09	53.98	-22.89
4960.00	Peak	H	-	-	-67.14	5.00	44.86	73.98	-29.12
7440.00	Avg	H	-	-	-82.20	12.49	37.29	53.98	-16.69
7440.00	Peak	H	-	-	-69.71	12.49	49.78	73.98	-24.20
12400.00	Avg	H	-	-	-85.52	20.06	41.54	53.98	-12.44
12400.00	Peak	H	-	-	-72.08	20.06	54.98	73.98	-19.00

Table 7-24. Radiated Measurements


FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 89 of 115

Simultaneous Tx Radiated Spurious Emission Measurements

§15.247 §15.205 & §15.209; RSS-Gen [8.9]


Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	2
Channel	39	116
Operating Frequency (MHz)	2441	5580
Data Rate (Mbps)	GFSK/1Mbps	MCS0
Mode	Bluetooth	UNII

Table 7-25. Worst Case Simultaneous Transmission Config

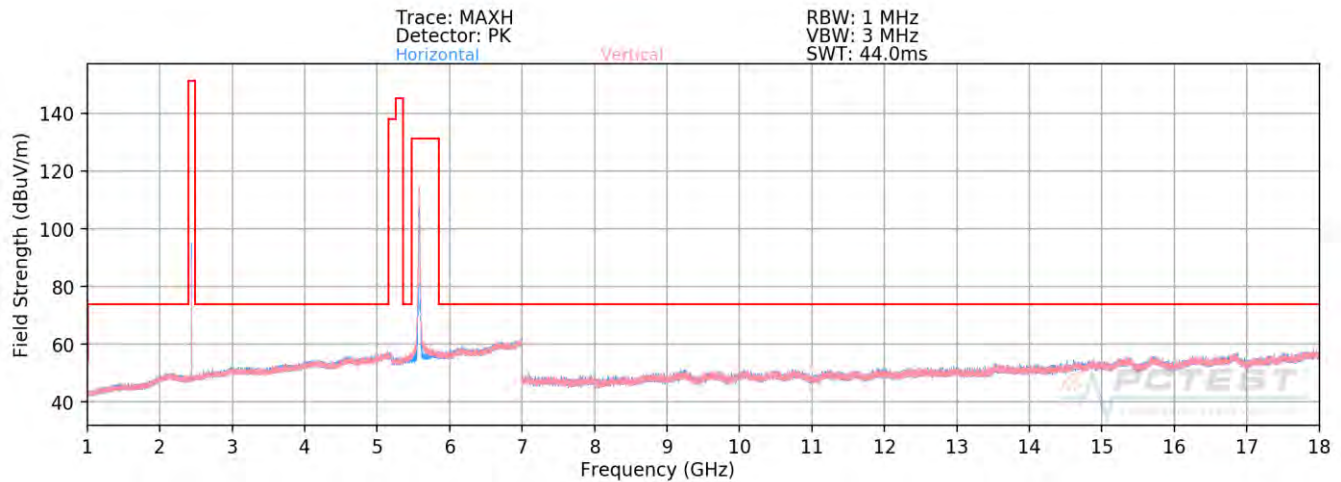


Plot 7-96. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 90 of 115

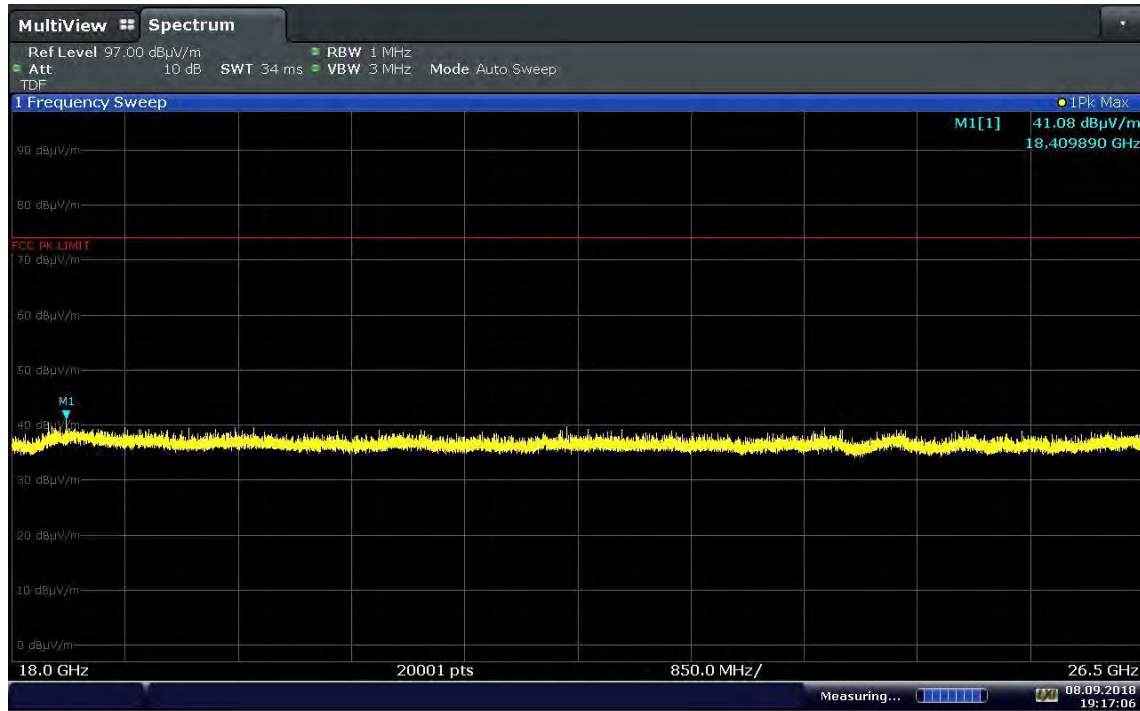

19:17:06 08.09.2018


Plot 7-97. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz) Pol. H

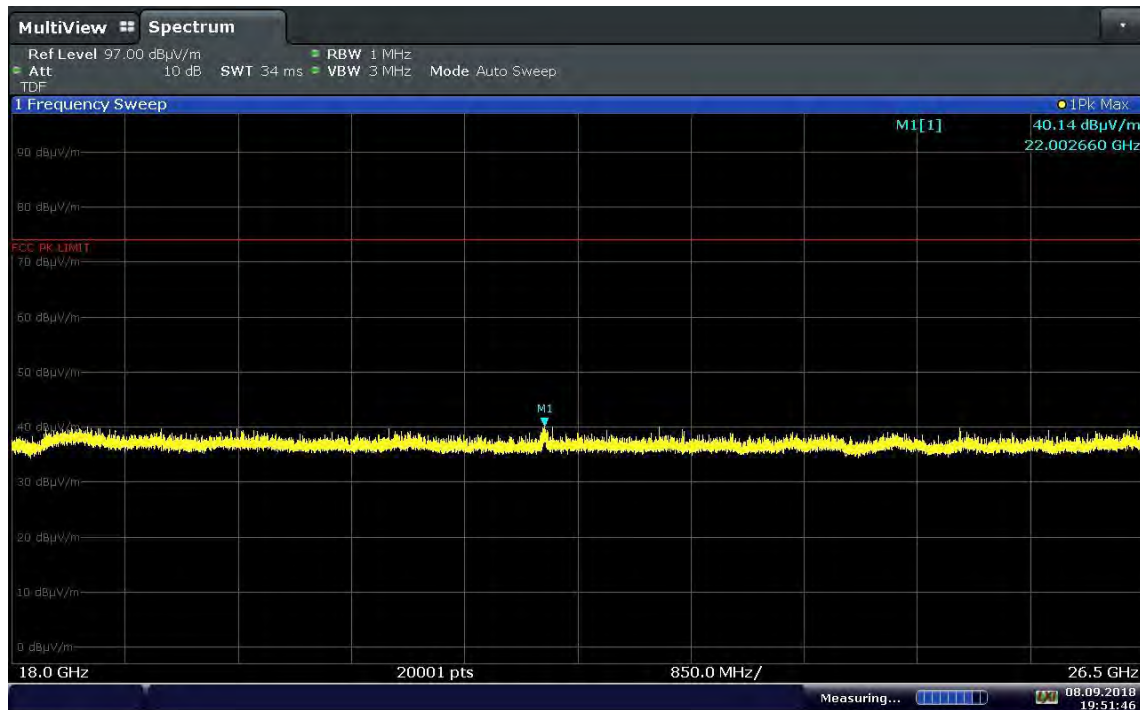

19:51:47 08.09.2018


Plot 7-98. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz) Pol. V

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 91 of 115

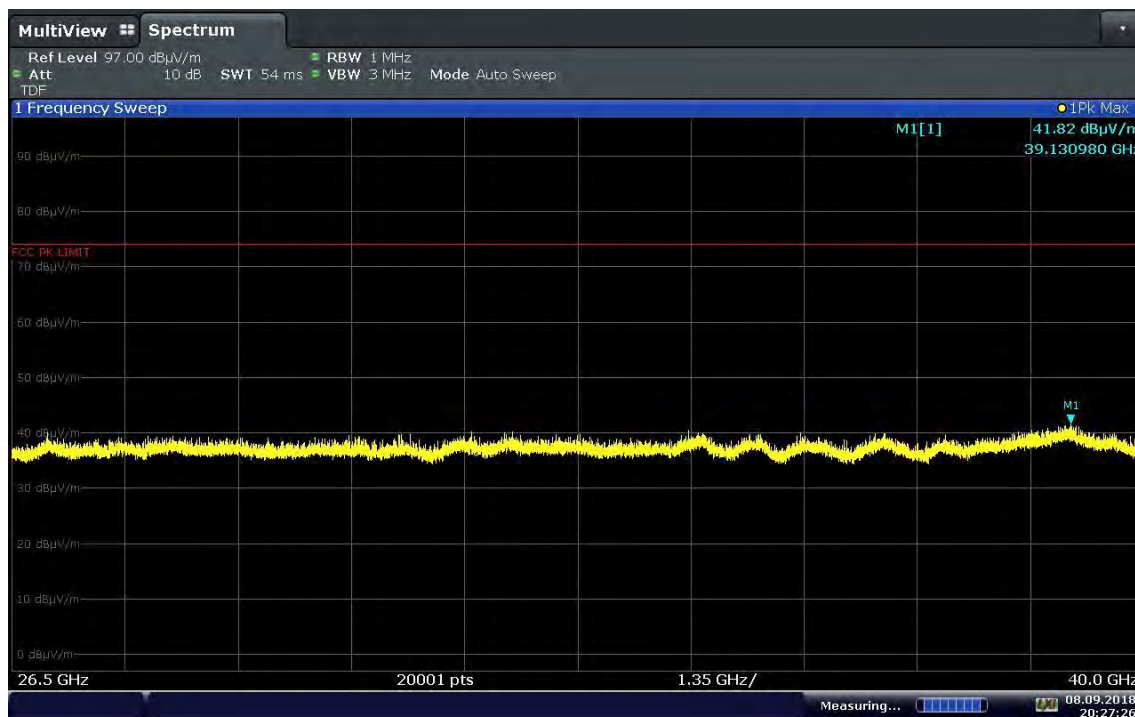

20:27:26 08.09.2018

Plot 7-99. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz) Pol. H

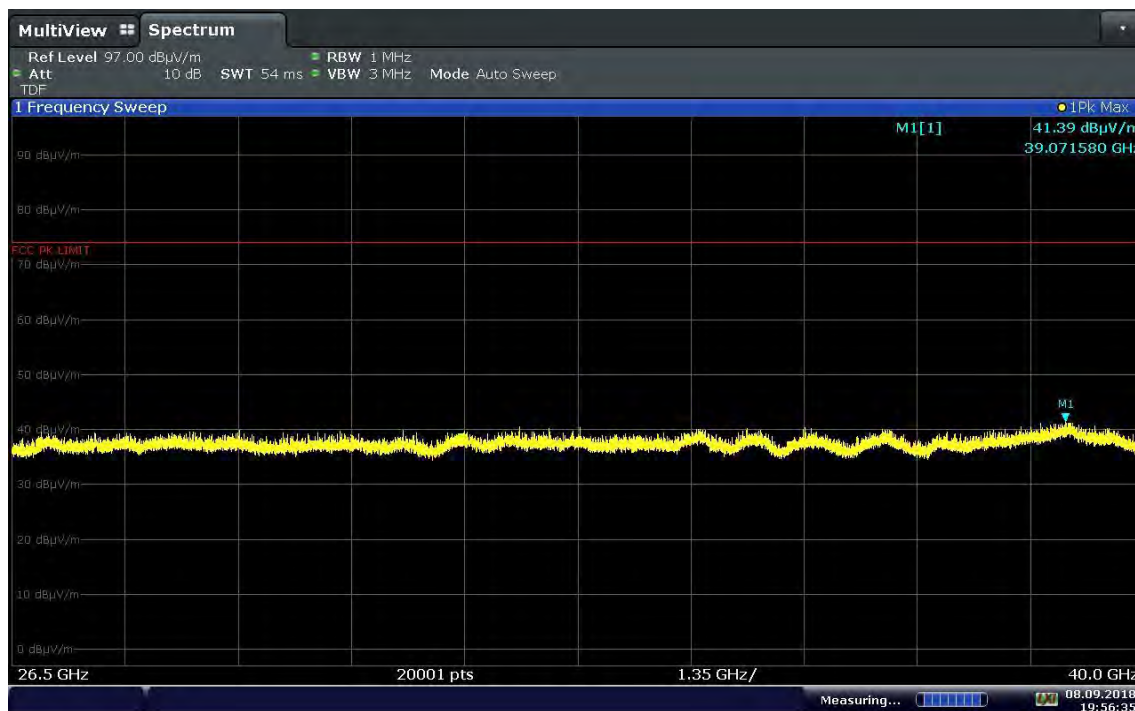

19:56:36 08.09.2018

Plot 7-100. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz) Pol. V

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 92 of 115

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4882.00	Avg	H	-	-	-79.96	14.37	41.41	53.98	-12.57
4882.00	Peak	H	-	-	-70.10	14.37	51.27	73.98	-22.71
7323.00	Avg	H	-	-	-80.44	10.71	37.27	53.98	-16.71
7323.00	Peak	H	-	-	-69.66	10.71	48.05	73.98	-25.93
12205.00	Avg	H	-	-	-82.77	14.63	38.86	53.98	-15.12
12205.00	Peak	H	-	-	-73.92	14.63	47.71	73.98	-26.27
11160.00	Avg	H	-	-	-81.72	14.36	39.64	53.98	-14.34
11160.00	Peak	H	-	-	-71.85	14.36	49.51	73.98	-24.47
16740.00	Avg	H	-	-	-83.73	20.19	43.46	53.98	-10.52
16740.00	Peak	H	-	-	-72.69	20.19	54.50	73.98	-19.48
8719.00	Avg	H	-	-	-80.83	12.45	38.62	53.98	-15.36
8719.00	Peak	H	-	-	-71.68	12.45	47.77	73.98	-26.21
11858.00	Avg	H	-	-	-83.12	14.46	38.34	53.98	-15.64
11858.00	Peak	H	-	-	-73.17	14.46	48.29	73.98	-25.69
3837.00	Avg	H	-	-	-69.60	12.00	49.40	53.98	-4.58
3837.00	Peak	H	-	-	-80.65	12.00	38.35	73.98	-35.63

Table 7-26. Radiated Measurements (Antenna 2 2.4GHz – Antenna 2 5GHz)

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 93 of 115

7.10 Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain + DCCF

Antenna 0

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

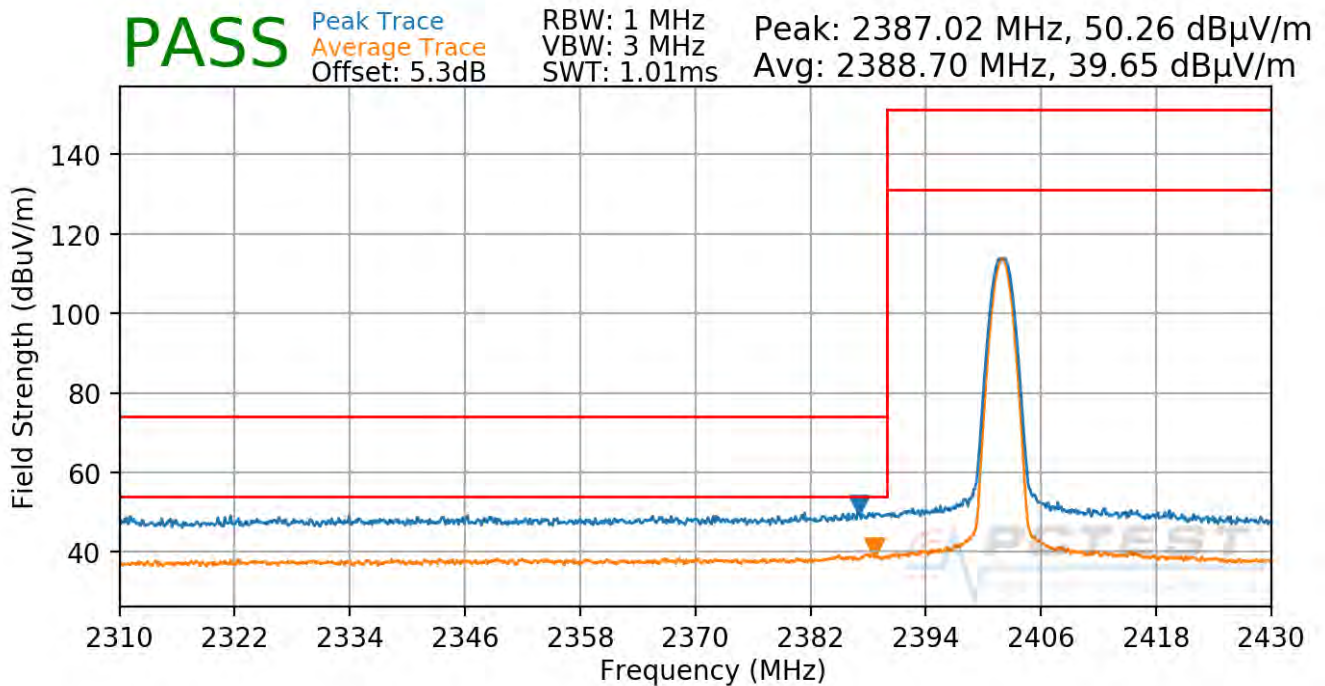


Plot 7-101. Radiated Restricted Lower Band Edge Measurement ANT0 (Average & Peak)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 94 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

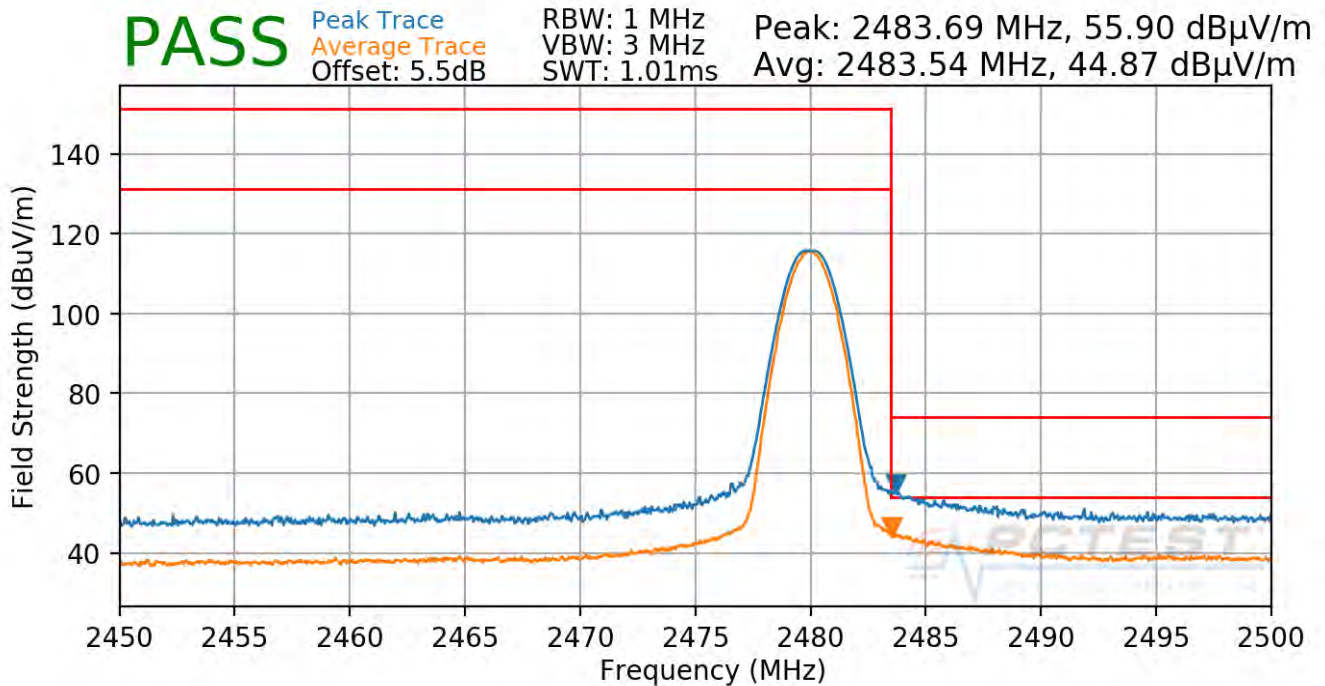


Plot 7-102. Radiated Restricted Upper Band Edge Measurement ANT0 (Average & Peak)

FCC ID: BCGA1876	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 95 of 115

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

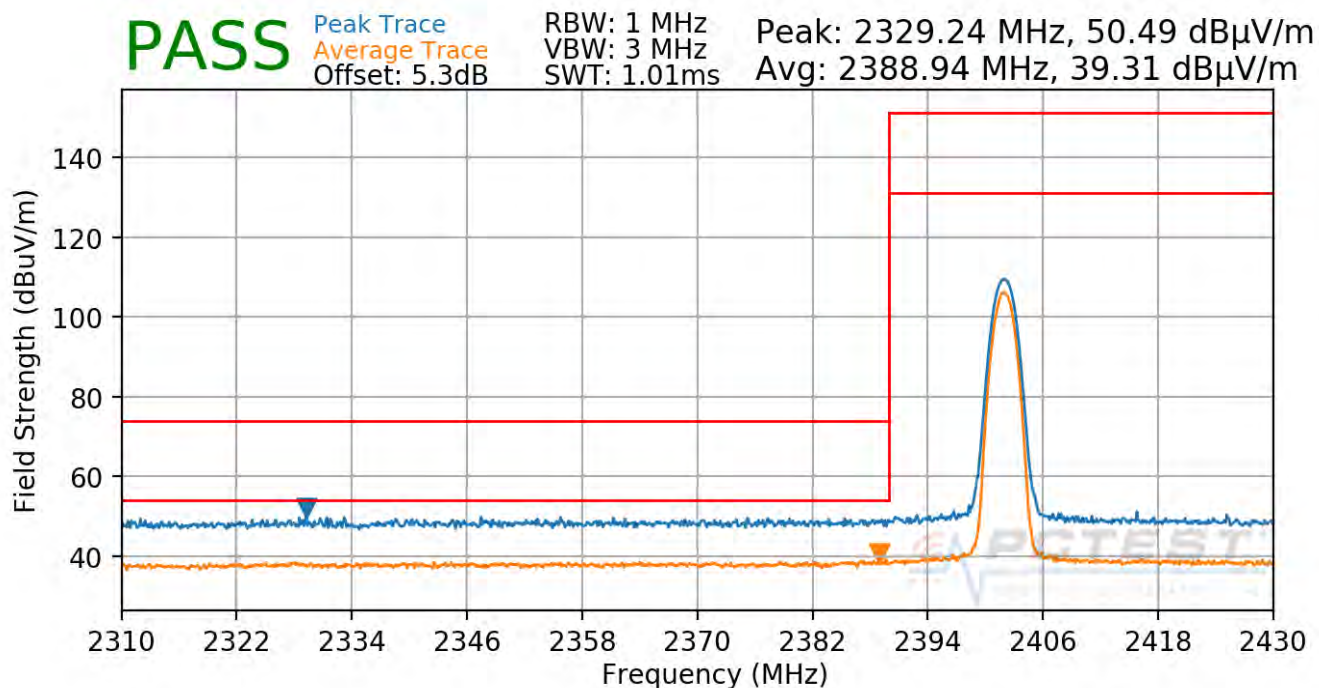


Plot 7-103. Radiated Restricted Lower Band Edge Measurement ANT0 (Average & Peak)

FCC ID: BCGA1876	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 96 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

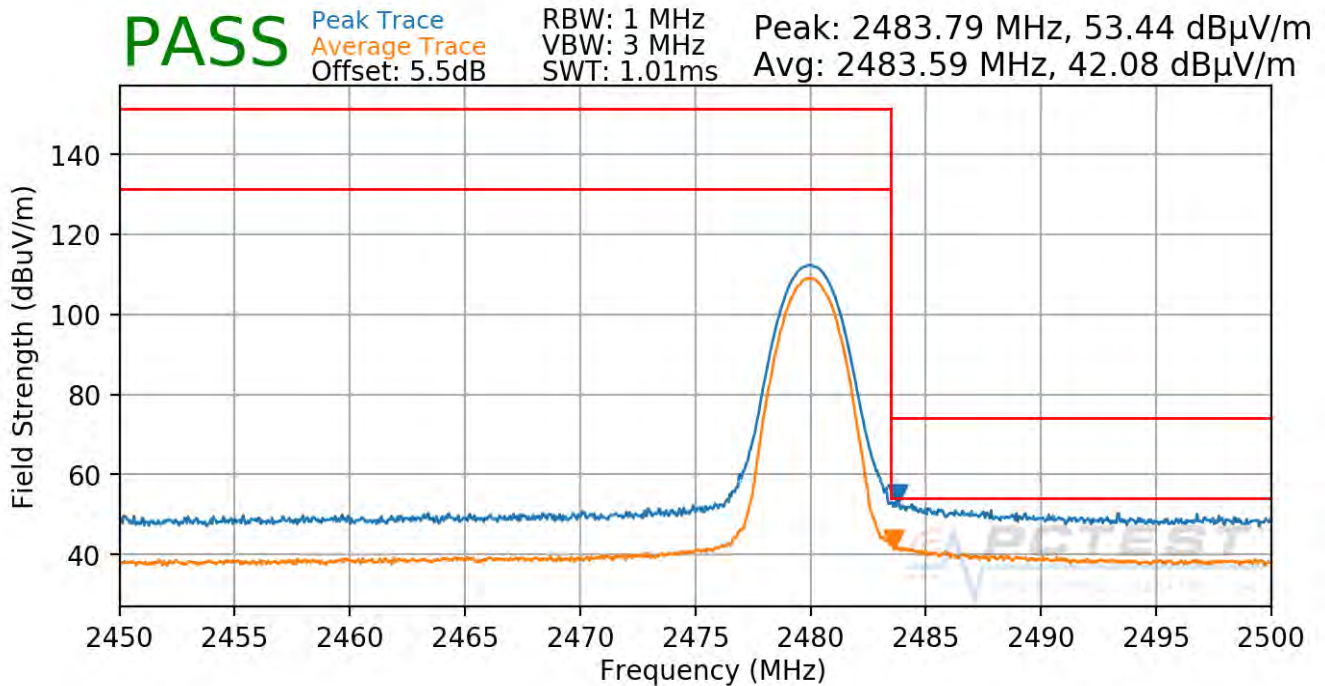

Plot 7-104. Radiated Restricted Upper Band Edge Measurement ANT0 (Average & Peak)


FCC ID: BCGA1876	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 97 of 115

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna 1

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

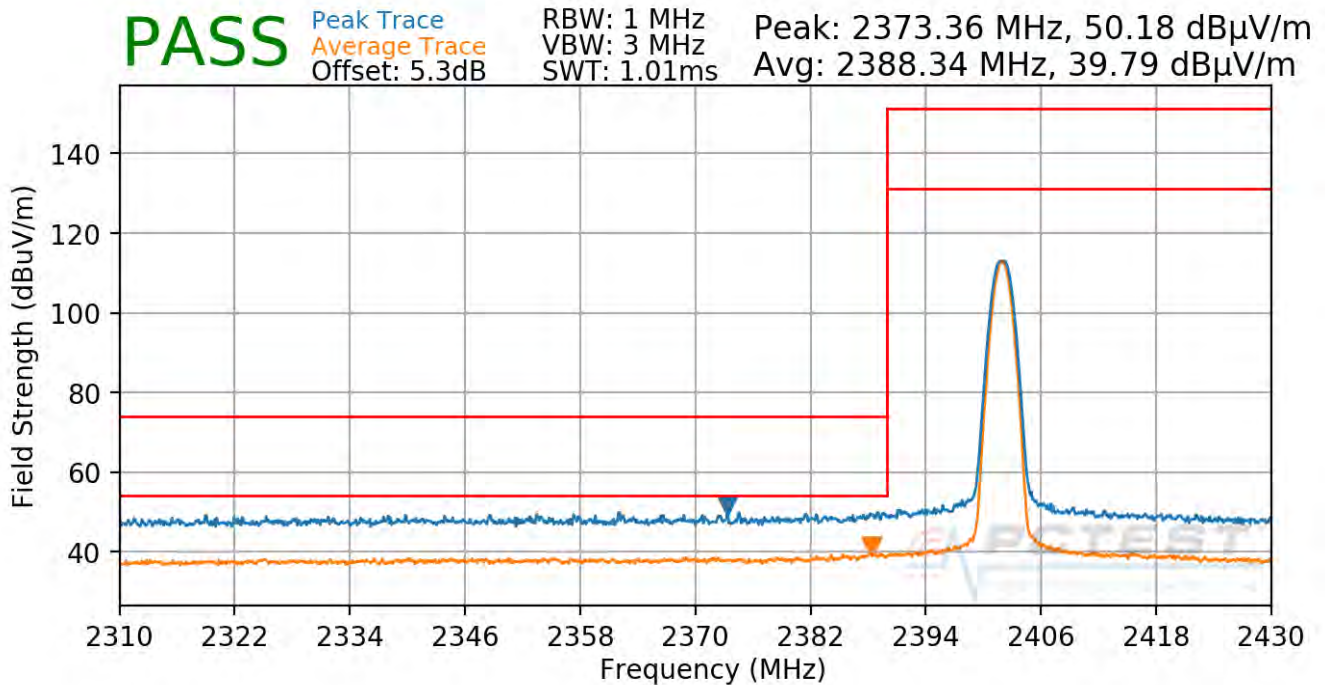


Plot 7-105. Radiated Restricted Lower Band Edge Measurement ANT1 (Average & Peak)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 98 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

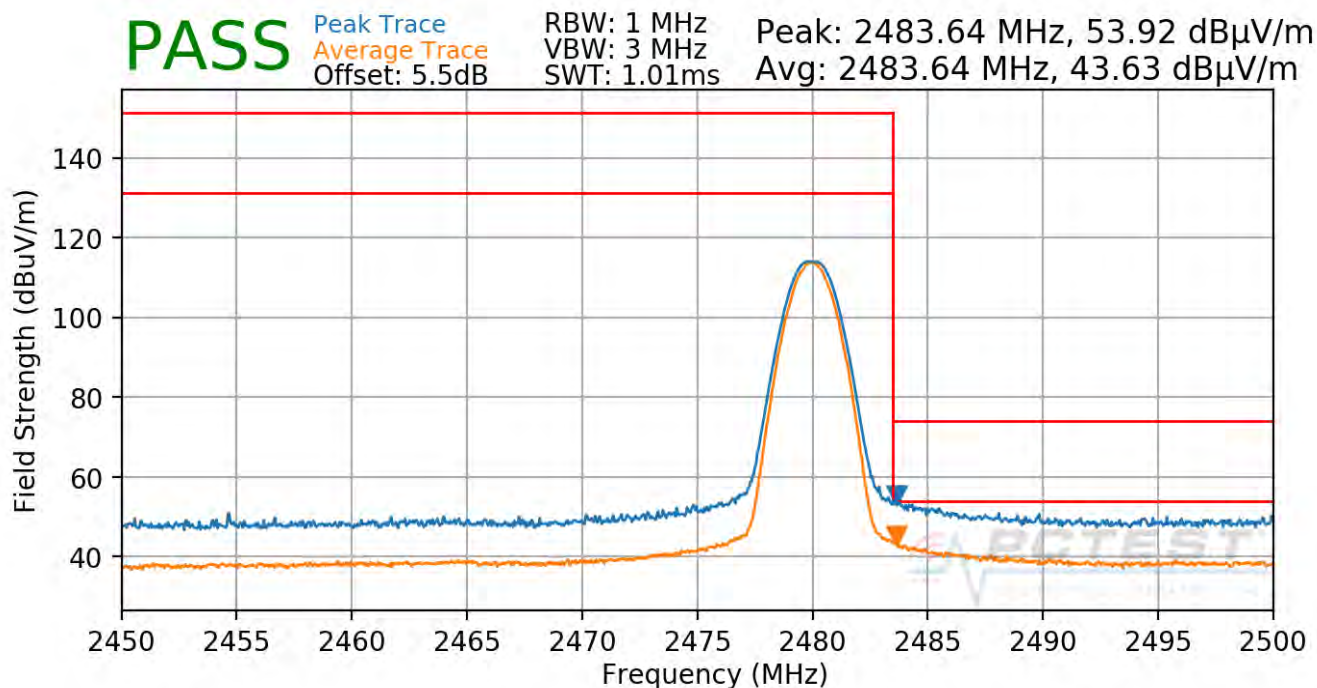


Plot 7-106. Radiated Restricted Upper Band Edge Measurement ANT1 (Average & Peak)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 99 of 115

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

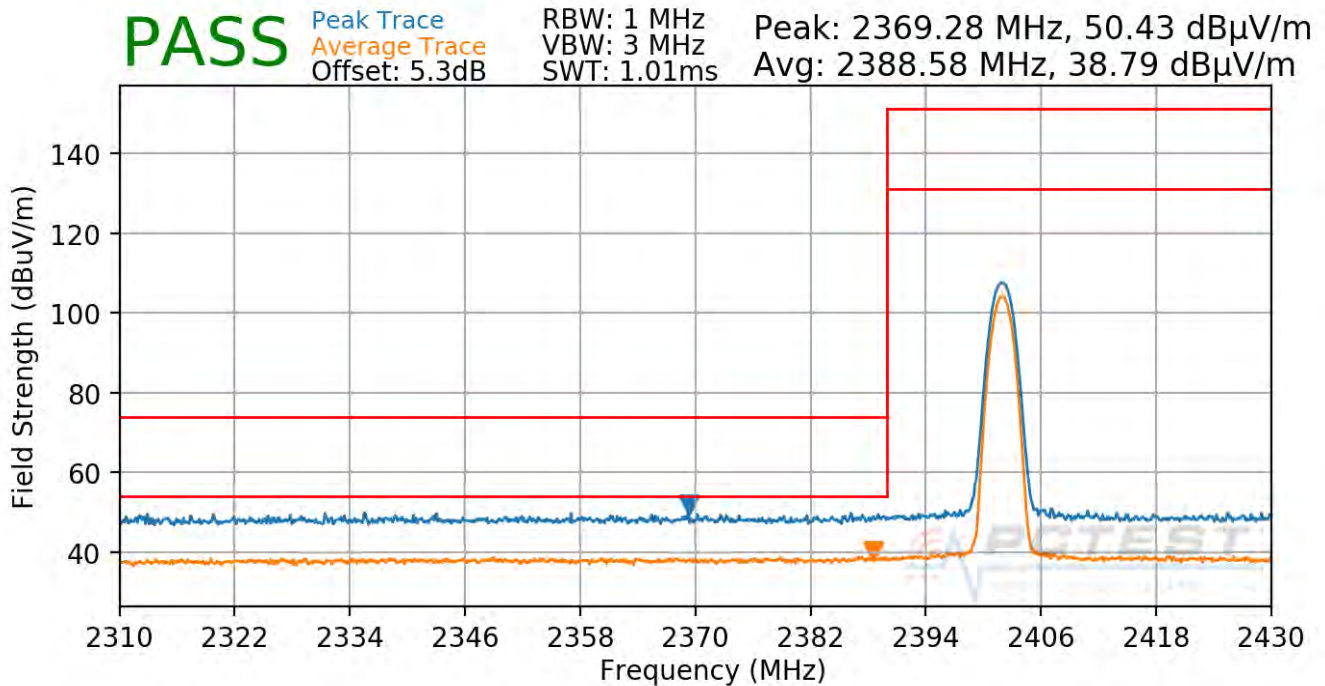


Plot 7-107. Radiated Restricted Lower Band Edge Measurement ANT1 (Average & Peak)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 100 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

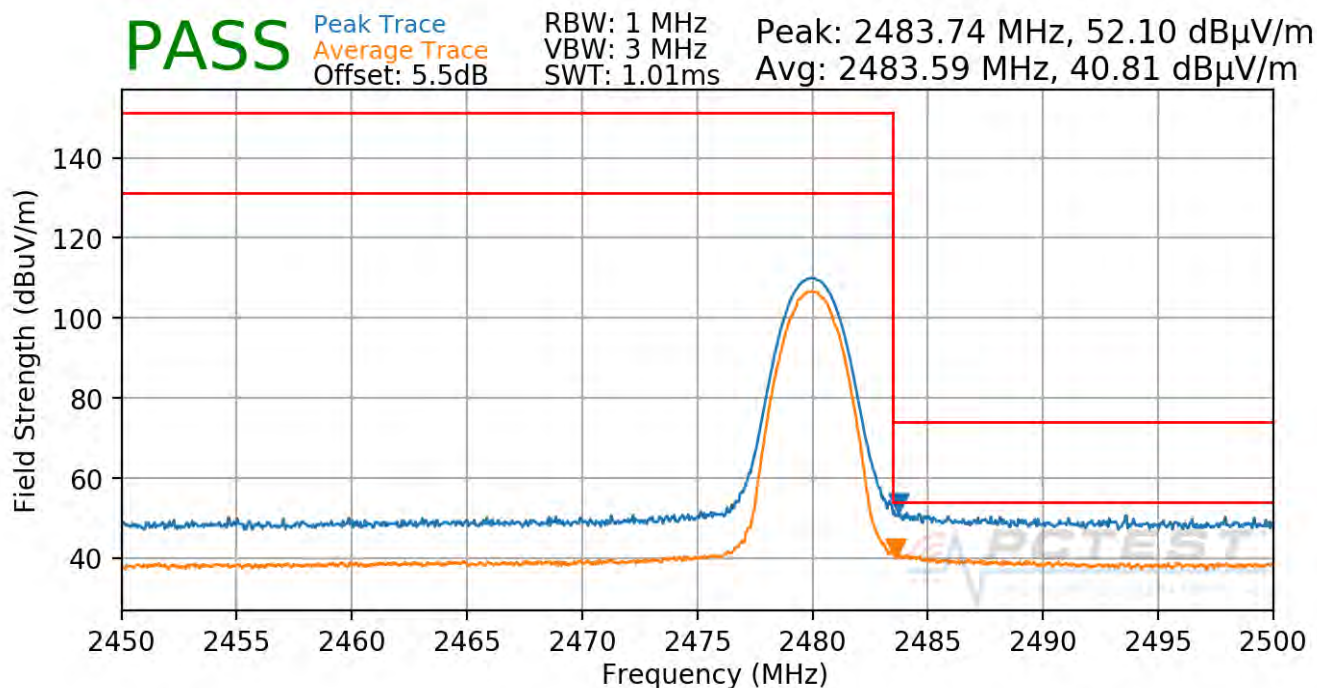

Plot 7-108. Radiated Restricted Upper Band Edge Measurement ANT1 (Average & Peak)


FCC ID: BCGA1876	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 101 of 115

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Antenna 2

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

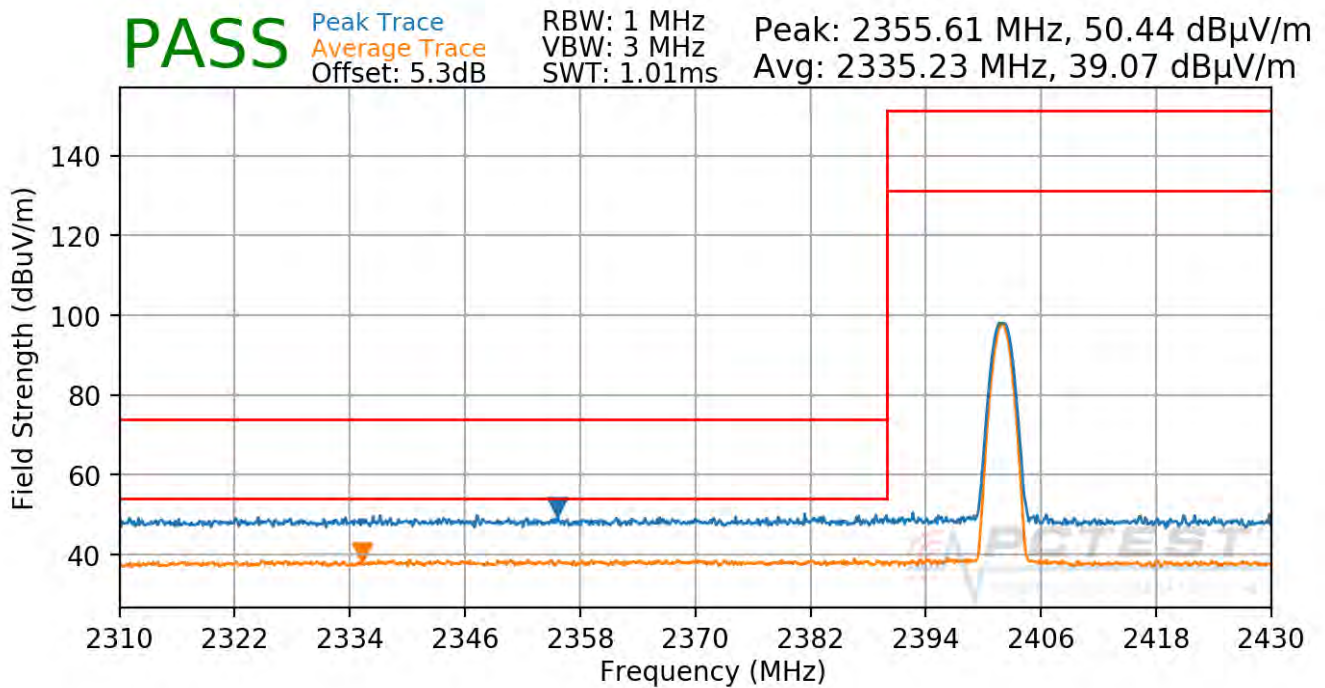


Plot 7-109. Radiated Restricted Lower Band Edge Measurement ANT2 (Average & Peak)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 102 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	GFSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

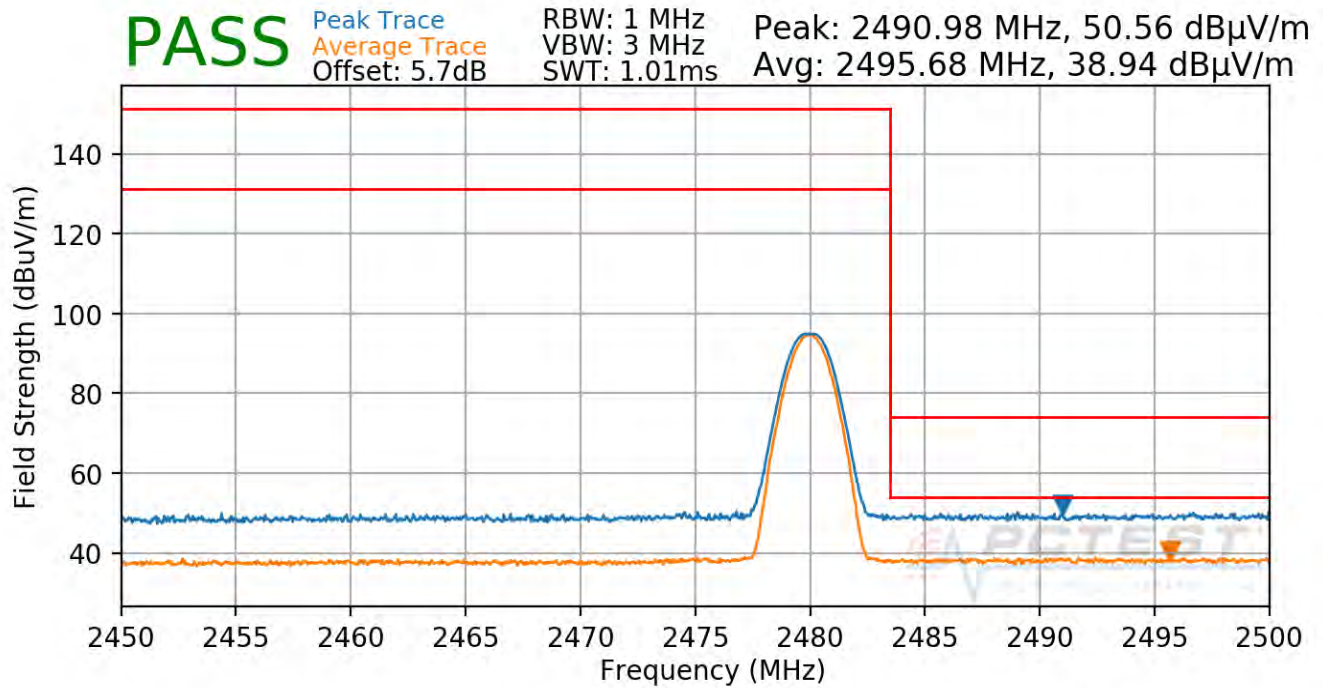


FCC ID: BCGA1876	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 103 of 115

Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Plot 7-110. Radiated Restricted Upper Band Edge Measurement ANT2 (Average & Peak)

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2402MHz
Channel:	0

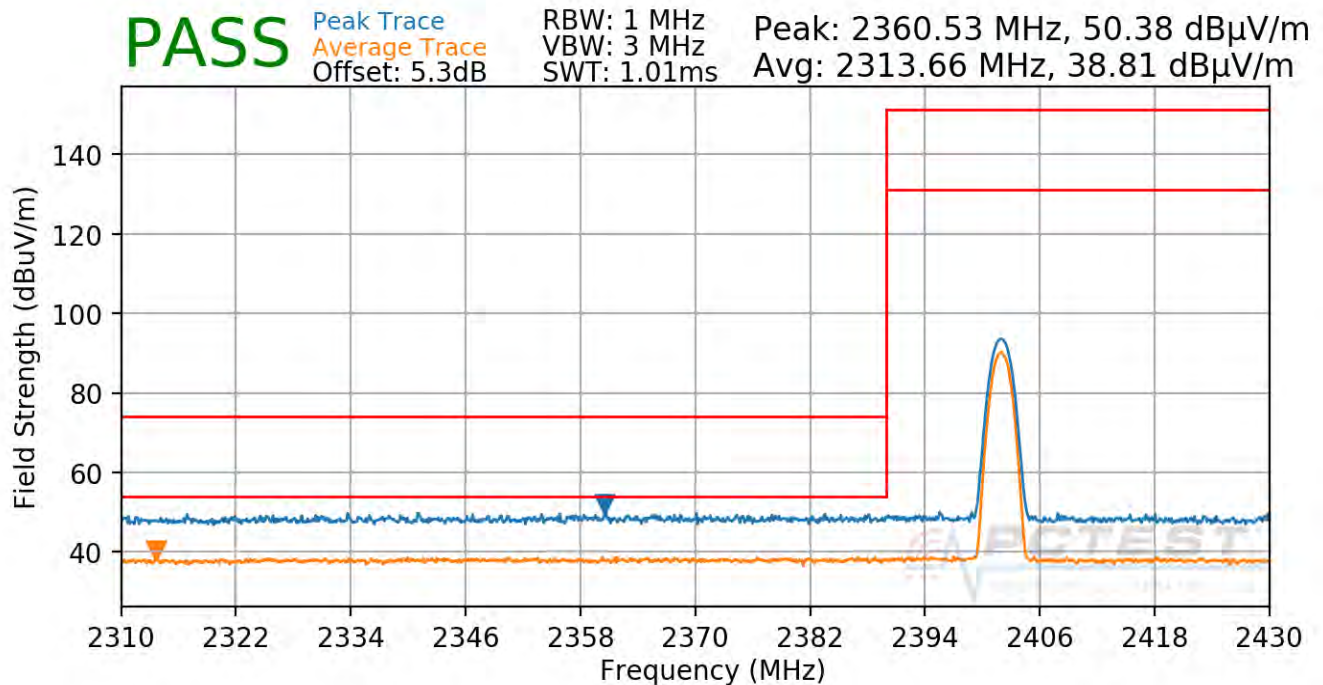


Plot 7-111. Radiated Restricted Lower Band Edge Measurement ANT2 (Average & Peak)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 104 of 115

Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode:	Bluetooth
Worst Case Modulation:	8DPSK
Worst Case Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

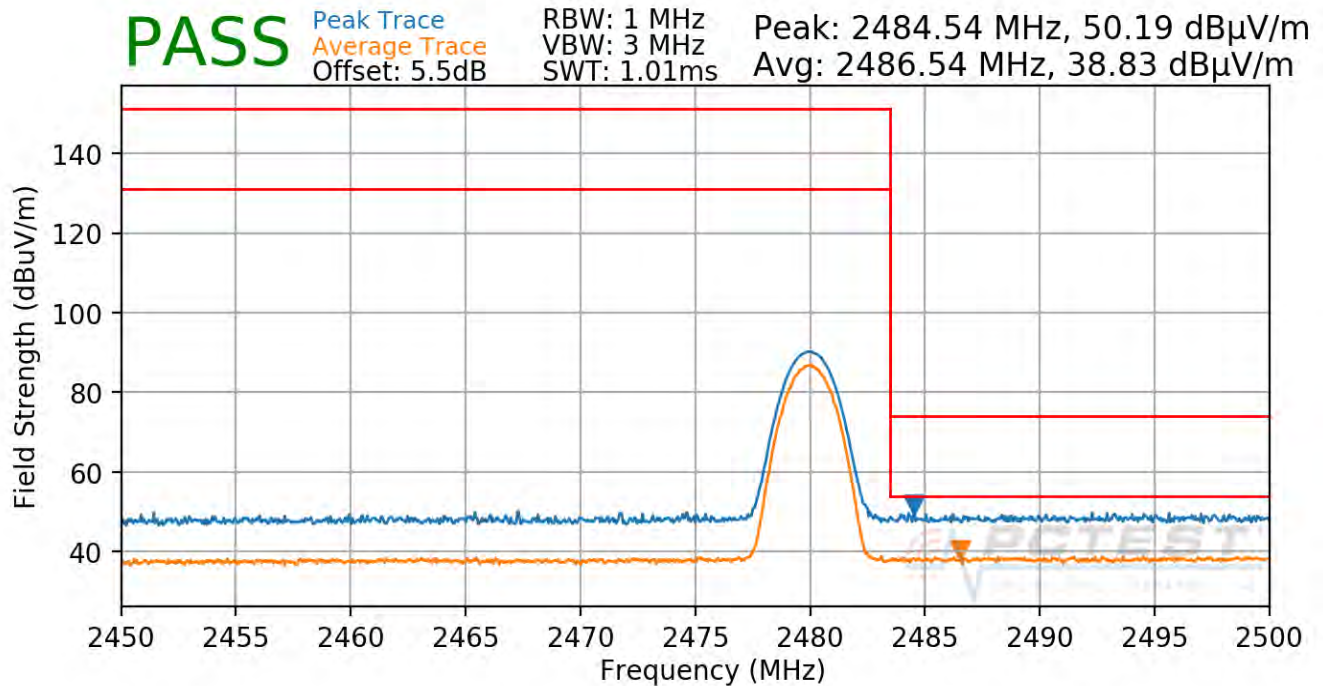

Plot 7-112. Radiated Restricted Upper Band Edge Measurement ANT2 (Average & Peak)

FCC ID: BCGA1876	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 105 of 115

7.11 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-27. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 106 of 115

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

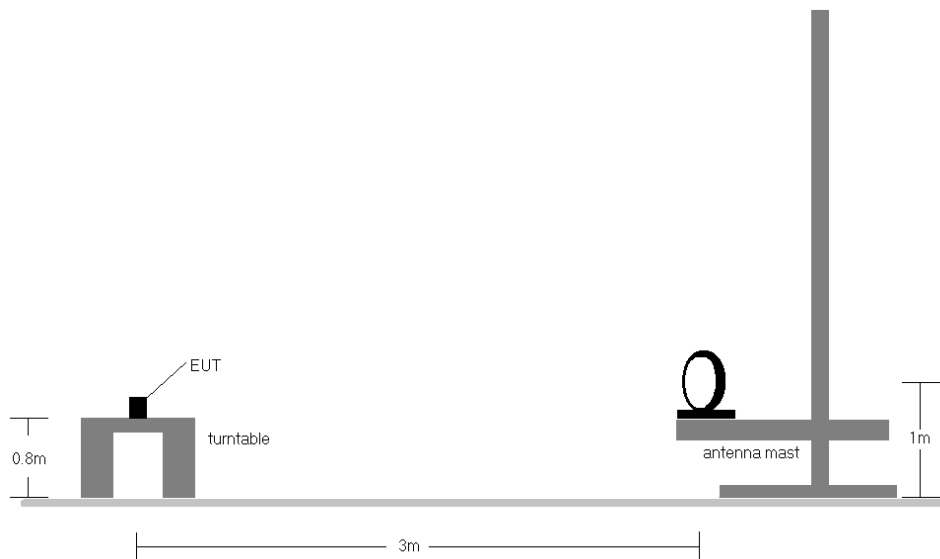


Figure 7-9. Radiated Test Setup < 30Mhz

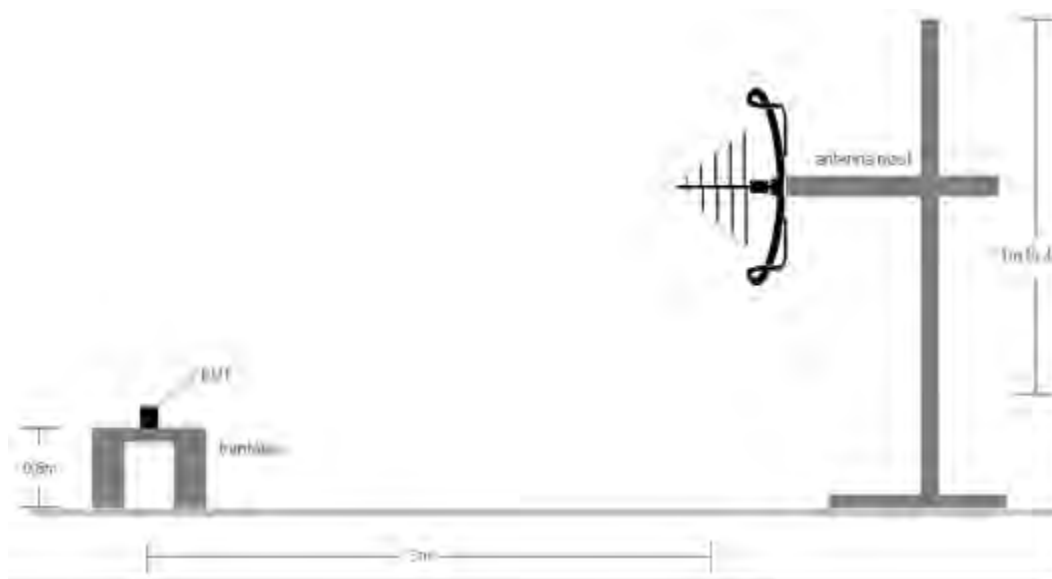


Figure 7-10. Radiated Test Setup < 1GHz

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 107 of 115


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 108 of 115

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

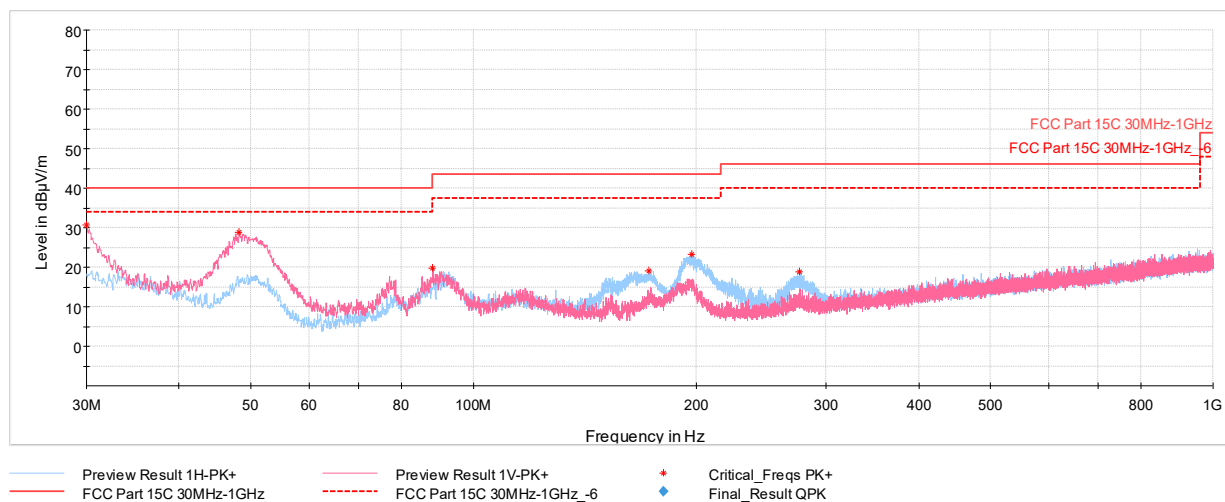

Plot 7-113. Radiated Spurious Plot below 1GHz (GFSK ePA Ch. 39, Pol. H & V, with AC/DC Adapter)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
30.00	Max Peak	V	100	32	-67.44	-8.89	30.67	40.00	-9.33
48.28	Max Peak	V	100	124	-57.99	-20.20	28.81	40.00	-11.19
88.15	Max Peak	V	100	292	-68.92	-18.29	19.79	43.52	-23.73
172.83	Max Peak	H	250	32	-71.84	-16.09	19.07	43.52	-24.45
197.66	Max Peak	H	100	14	-64.71	-19.01	23.28	43.52	-20.24
276.38	Max Peak	H	100	173	-71.63	-16.48	18.89	46.02	-27.13

Table 7-28. Radiated Spurious Emissions Below 1GHz (GFSK ePA Ch. 39 with AC/DC Adapter)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 109 of 115

Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

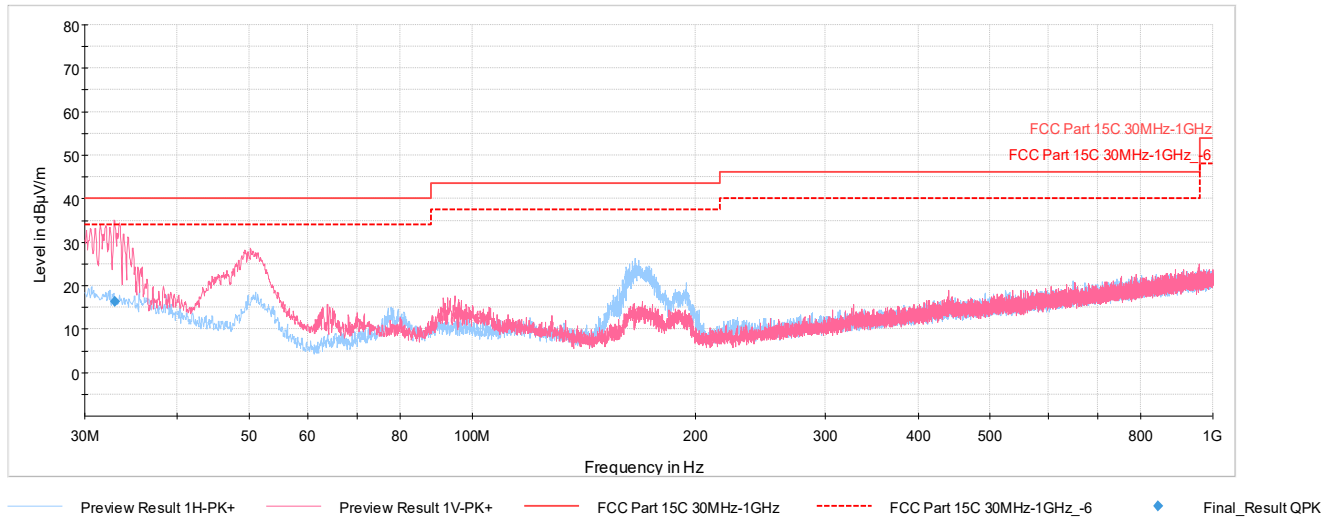

Plot 7-114. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
32.91	Max Peak	V	114	153	-60.66	-11.36	34.98	40.00	-5.02
50.18	Max Peak	V	100	35	-56.19	-22.40	28.41	40.00	-11.59
69.96	Max Peak	V	100	243	-72.74	-20.51	13.75	40.00	-26.25
78.06	Max Peak	H	250	189	-72.55	-19.59	14.86	40.00	-25.14
167.74	Max Peak	H	100	261	-62.77	-18.35	25.88	43.52	-17.64
440.26	Max Peak	V	100	248	-75.96	-12.30	18.74	46.02	-27.28

Plot 7-115. Radiated Spurious Plot below 1GHz (Dual Band Simult. Tx)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 110 of 115

7.12 Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-29. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 111 of 115

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


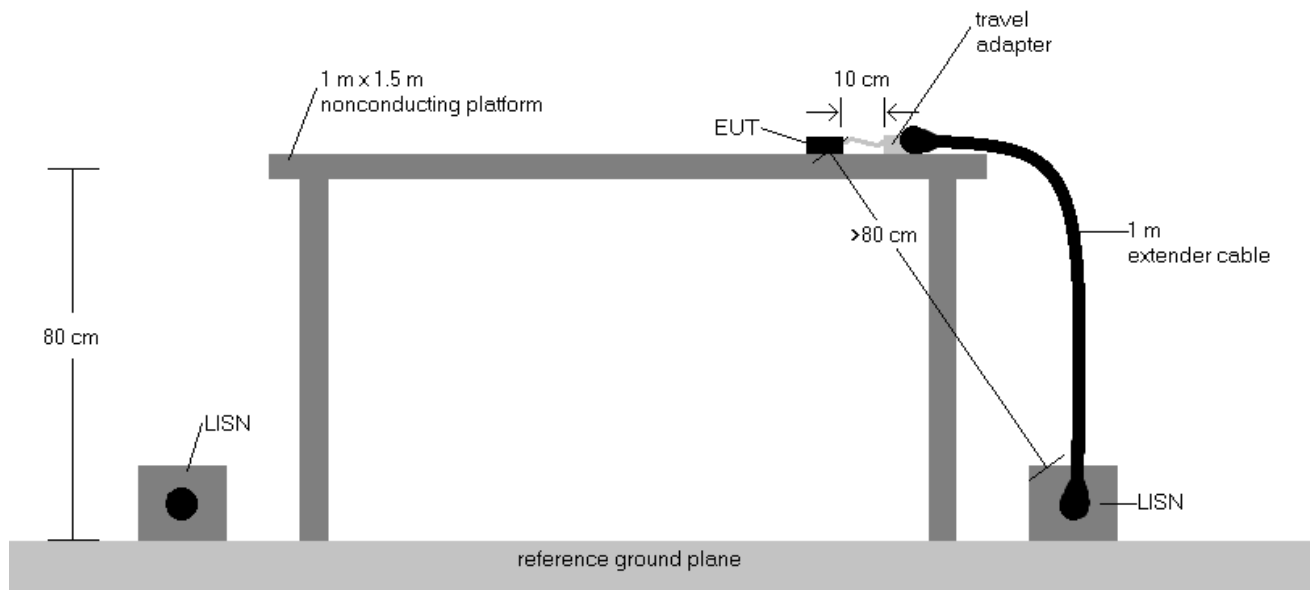


Figure 7-11. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.
8. Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 112 of 115

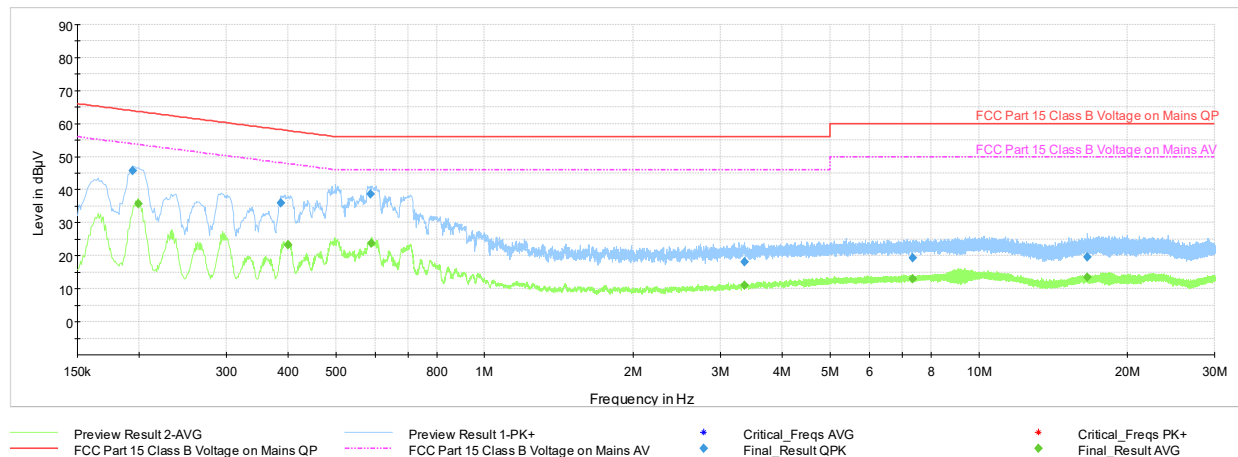


Plot 7-116. Line-Conducted Test Plot GFSK ePA Ch. 39 (L1, with AC/DC Adapter)

Frequency MHz	Process State	QuasiPeak dBμV	Average dBμV	Limit dBμV	Margin dB	Bandwidth kHz	Line	PE
0.194000	FINAL	45.84	—	63.86	-18.02	9.000	L1	GND
0.199000	FINAL	—	35.84	53.65	-17.81	9.000	L1	GND
0.387000	FINAL	36.04	—	58.13	-22.09	9.000	L1	GND
0.400000	FINAL	—	23.32	47.85	-24.53	9.000	L1	GND
0.588000	FINAL	38.76	—	56.00	-17.24	9.000	L1	GND
0.590000	FINAL	—	23.75	46.00	-22.25	9.000	L1	GND
3.356000	FINAL	18.10	—	56.00	-37.90	9.000	L1	GND
3.356000	FINAL	—	11.10	46.00	-34.90	9.000	L1	GND
7.346000	FINAL	—	13.08	50.00	-36.92	9.000	L1	GND
7.356000	FINAL	19.24	—	60.00	-40.76	9.000	L1	GND
16.576000	FINAL	—	13.36	50.00	-36.64	9.000	L1	GND
16.592000	FINAL	19.48	—	60.00	-40.52	9.000	L1	GND

Table 7-30. Line-Conducted Test Data GFSK ePA Ch. 39 (L1, with AC/DC Adapter)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 113 of 115

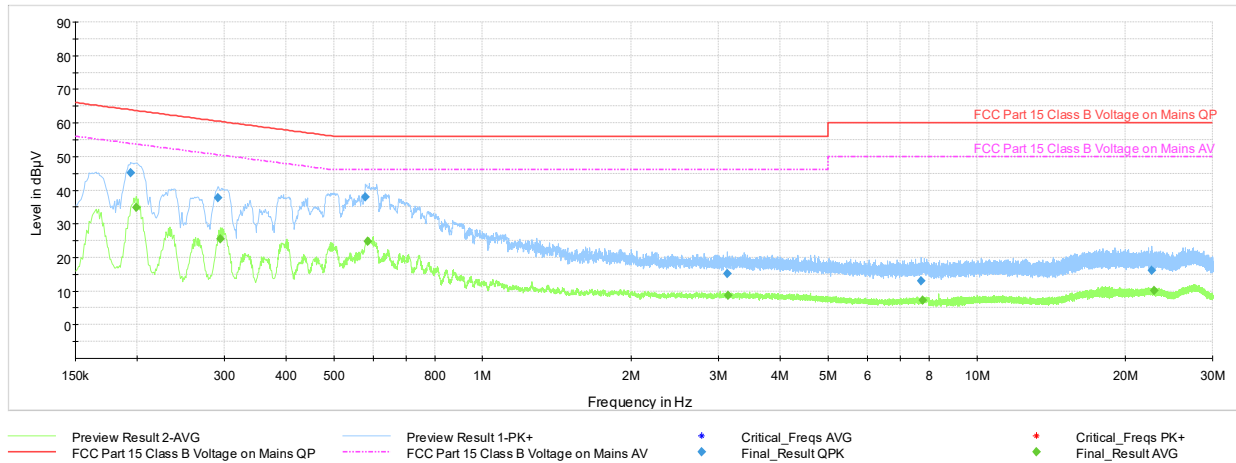

Plot 7-117. Line-Conducted Test Plot GFSK ePA Ch. 39 (N, with AC/DC Adapter)

Frequency MHz	Process State	QuasiPeak dBμV	Average dBμV	Limit dBμV	Margin dB	Bandwidth kHz	Line	PE
0.194000	FINAL	45.04	—	63.86	-18.82	9.000	N	GND
0.199000	FINAL	—	34.86	53.65	-18.79	9.000	N	GND
0.291000	FINAL	37.83	—	60.50	-22.67	9.000	N	GND
0.295000	FINAL	—	25.44	50.38	-24.94	9.000	N	GND
0.579000	FINAL	37.90	—	56.00	-18.10	9.000	N	GND
0.586000	FINAL	—	24.67	46.00	-21.33	9.000	N	GND
3.123000	FINAL	15.11	—	56.00	-40.89	9.000	N	GND
3.139000	FINAL	—	8.74	46.00	-37.26	9.000	N	GND
7.719000	FINAL	13.13	—	60.00	-46.87	9.000	N	GND
7.765000	FINAL	—	7.32	50.00	-42.68	9.000	N	GND
22.625000	FINAL	16.04	—	60.00	-43.96	9.000	N	GND
22.814000	FINAL	—	10.20	50.00	-39.80	9.000	N	GND

Table 7-31. Line-Conducted Test Data GFSK ePA Ch. 39 (N, with AC/DC Adapter)

FCC ID: BCGA1876	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 114 of 115

15. CONCLUSION

The data collected relate only to the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA1876** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA1876	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050010-05.BCG	Test Dates: 07/27/2018-10/10/2018	EUT Type: Tablet Device	Page 115 of 115