**MEASUREMENT REPORT**
FCC PART 15.247 / ISED RSS-247 Bluetooth**Applicant Name:**Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States**Date of Testing:**

07/27/2018-10/03/2018

Test Site/Location:

PCTEST Lab. Morgan Hill, CA, USA

Test Report Serial No.:

1C1806050012-08.BCG

FCC ID:**BCGA2013****IC:****579C-A2013****APPLICANT:****Apple Inc.****Application Type:**

Certification

Model/HVIN:

A2013

EUT Type:

Tablet Device

Max. RF Output Power:

79.799 mW (19.02 dBm) Peak Conducted

Frequency Range:

2402 – 2480MHz

Type of Modulation:GFSK, $\pi/4$ -DQPSK, 8DPSK**FCC Classification:**

FCC Part 15 Spread Spectrum Transmitter (DSS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 1 of 112

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	5
2.4	Test Support Equipment	6
2.5	Test Configuration	6
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	AC Line Conducted Emissions	7
3.3	Radiated Emissions	8
3.4	Environmental Conditions	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA	11
7.0	TEST RESULTS	12
7.1	Summary	12
7.2	20dB Bandwidth Measurement	13
7.3	Output Power Measurement	26
7.3.1	Peak Output Power Measurement	27
7.3.2	Average Output Power Measurement	30
7.4	Band Edge Compliance	33
7.5	Carrier Frequency Separation	46
7.6	Time of Occupancy	53
7.7	Number of Hopping Channels	58
7.8	Conducted Spurious Emissions	65
7.9	Radiated Spurious Emission Measurements – Above 1GHz	75
7.10	Radiated Restricted Band Edge Measurement	92
7.11	Radiated Spurious Emissions Measurements – Below 1GHz	104
7.12	Line Conducted Measurement Data	108
8.	CONCLUSION	112

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 2 of 112

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 3 of 112

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2013**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - A) The hopping sequence is pseudorandom
 - B) All channels are used equally on average
 - C) The receiver input bandwidth equals the transmit bandwidth
 - D) The receiver hops in sequence with the transmit signal
- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.

Test Device Serial No.: DLXX4040KR54, DLXX4036KR54, DLXWX006KR50

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

Ch.	Frequency (MHz)
00	2402
:	:
39	2441
:	:
78	2480

Table 2-1. Frequency/ Channel Operations

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 4 of 112

Notes:

1. This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
Bluetooth Mode		Duty Cycle [%]
GFSK	ePA	100.0
	iPA	100.0
8DPSK	ePA	100.0
	iPA	100.0

Table 2-2. Measured Duty Cycles

2. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing, which was single antenna transmitting both 2.4GHz and 5GHz. The data for this configuration is contained in this test report.

Worst Case Configuration: ANT2 is transmitting both 2.4GHz and 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	2
Channel	39	40
Operating Frequency (MHz)	2441	5200
Data Rate (Mbps)	GFSK/1Mbps	MCS0
Mode	Bluetooth	UNII

All combination has been investigated and only the worst case was reported.

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna Gain (dBi)		
	Antenna 0	Antenna 1	Antenna 2
2.4	0.5	1.7	-10.9

Table 2-3. Antenna Peak Gain

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 5 of 112

2.4 Test Support Equipment

1	Apple MacBook	Model: A1398	S/N: C2QKP008F6F3
	w/AC/DC Adapter	Model: A1435	S/N: C04325505K1F288BG
2	Apple USB-C Cable	Model: Chimp	S/N: 300C44
3	USB-C Cable	Model: A146	S/N: N/A
	w/ AC Adapter	Model: A1720	S/N: C3D8257A2EPGKVP2C
4	USB-C to 3.5mm Aux Adapter	Model: A2049	S/N: DWH413100GJJKLT12
5	DC Power Supply	Model: KPS3010D	S/N: N/A

Table 2-4. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.12 for AC line conducted emissions test setups, 7.9 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

$\pi/4$ -DQPSK has been investigated and confirmed as not the worst case.

2.6 Software and Firmware

The test was conducted with firmware version 16B64 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 6 of 112

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.12. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.20.01.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 7 of 112

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 8 of 112

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 9 of 112

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 10 of 112

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2495A	Power Meter	11/28/2017	Annual	11/28/2018	1039008
Anritsu	MA2411B	Power Sensor 10MHz-40GHz	11/28/2017	Annual	11/28/2018	1027293
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/13/2018	Annual	3/13/2019	T058601-02
COM-POWER	LIN-120A	LISN	3/7/2018	Annual	3/7/2019	241296
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	2/27/2018	Annual	2/27/2019	MY49430244
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	2/6/2018	Annual	2/6/2019	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	12/20/2017	Annual	12/20/2018	101668
Rohde & Schwarz	ESW44	EMI Test Receiver	11/16/2017	Annual	11/16/2018	101570
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	7/5/2018	Annual	7/5/2019	102137
Rohde & Schwarz	SFUNIT-RX	Shielded Filter Unit	12/11/2017	Annual	12/11/2018	102136
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/11/2018	Annual	6/11/2019	100051
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/25/2018	Annual	1/25/2019	102333
Rohde & Schwarz	HL562E	Ultra Broadband Antenna (30MHz - 6GHz)	6/8/2018	Annual	6/8/2019	100810
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/13/2017	Annual	11/13/2018	101057
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/29/2017	Annual	11/29/2018	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/13/2018	Annual	3/13/2019	100519

Table 6-1. Annual Test Equipment Calibration Schedule

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 11 of 112

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2013
 Method/System: Frequency Hopping Spread Spectrum (FHSS)
 Number of Channels: 79

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(1)(iii)	RSS-247 [5.1(1)]	20dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.247(b)(1)	RSS-247 [5.4(2)]	Peak Transmitter Output Power	< 1 Watt if ≥ 75 non-overlapping channels used		PASS	Section 7.3
15.247(a)(1)	RSS-247 [5.1(2)]	Channel Separation	> 2/3 of 20 dB BW for systems with Output Power < 125mW		PASS	Section 7.5
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Number of Channels	> 15 Channels		PASS	Section 7.7
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Time of Occupancy	< 0.4 sec in 31.6 sec period		PASS	Section 7.6
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	Conducted > 20dBc		PASS	Section 7.4, Section 7.8
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	RADIATED	PASS	Section 7.9, Section 7.10, Section 7.11
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8] limits)	LINE CONDUCTED	PASS	Section 7.12

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "BT Auto," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.0.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 12 of 112

7.2 20dB Bandwidth Measurement

§15.247 (a.1.iii); RSS-247 [5.1(1)]

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 13 of 112

Antenna 0

Frequency [MHz]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	GFSK	ePA	0	948.70
2441	GFSK	ePA	39	949.40
2480	GFSK	ePA	78	949.60
2402	8DPSK	ePA	0	1355.00
2441	8DPSK	ePA	39	1354.00
2480	8DPSK	ePA	78	1354.00

Table 7-2. Conducted 20dB Bandwidth Measurements ANT0

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 14 of 112




Plot 7-1. 20dB Bandwidth Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 0)




Plot 7-2. 20dB Bandwidth Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 15 of 112

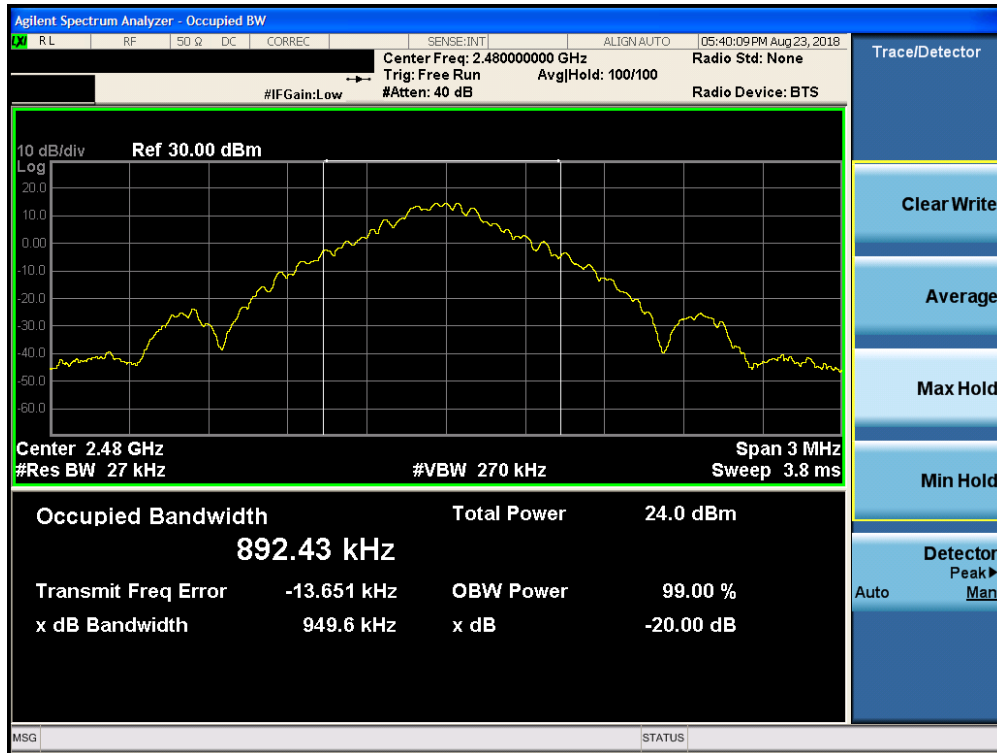


Plot 7-3. 20dB Bandwidth Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 78)

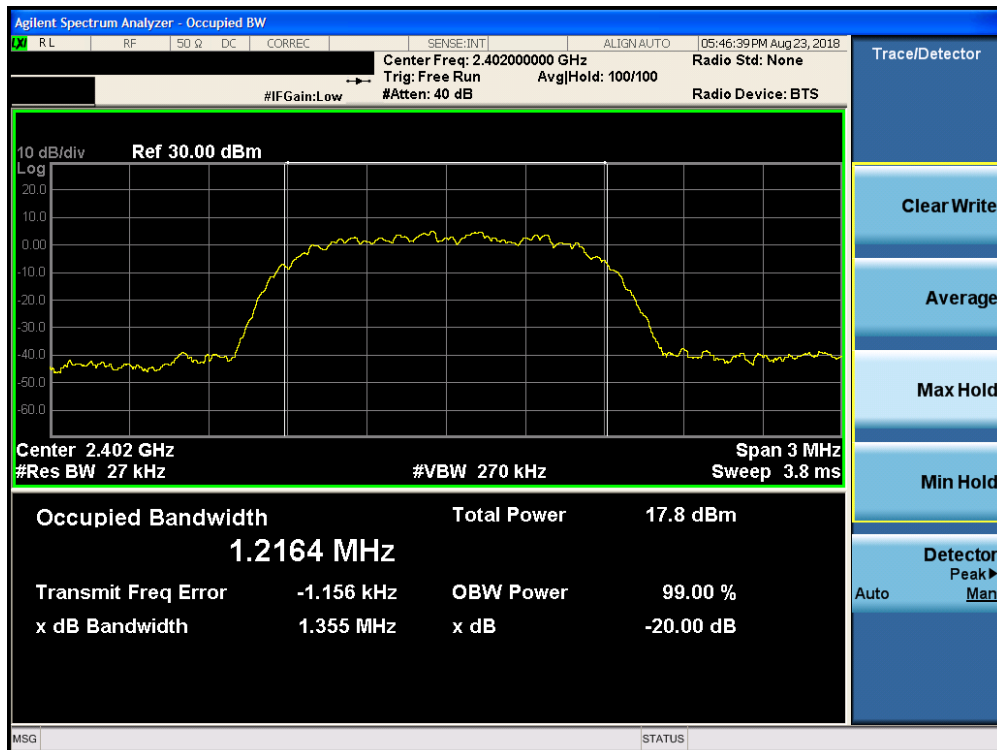


Plot 7-4. 20dB Bandwidth Plot ANT 0 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 16 of 112

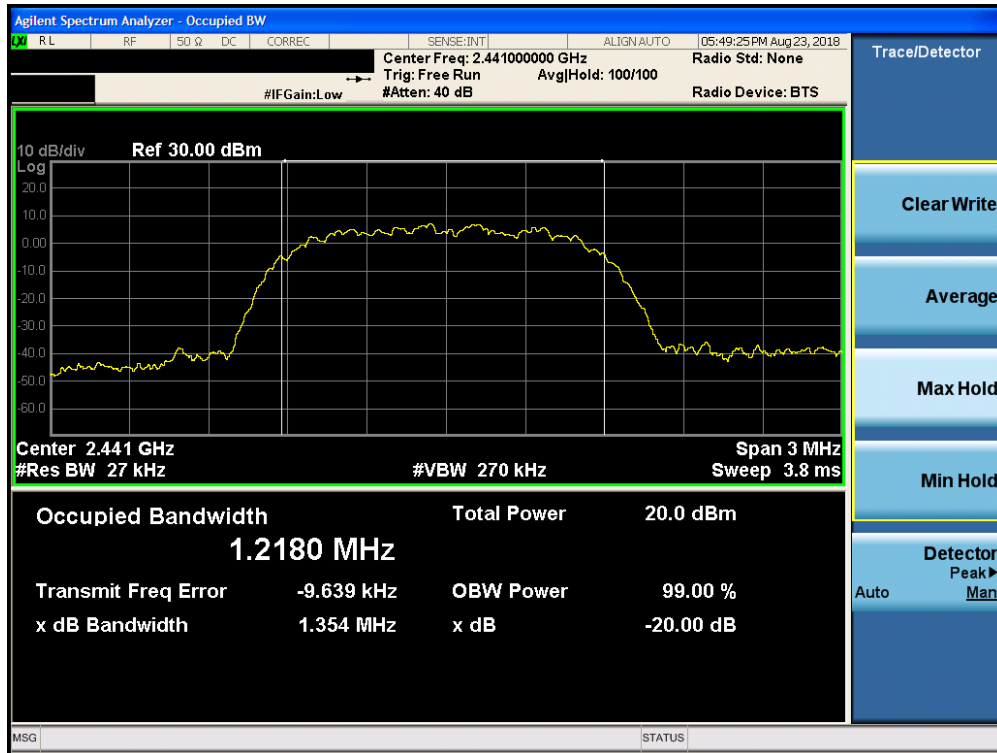

Plot 7-5. 20dB Bandwidth Plot ANT 0 (Bluetooth, 8DPSK, ePA – Ch. 39)

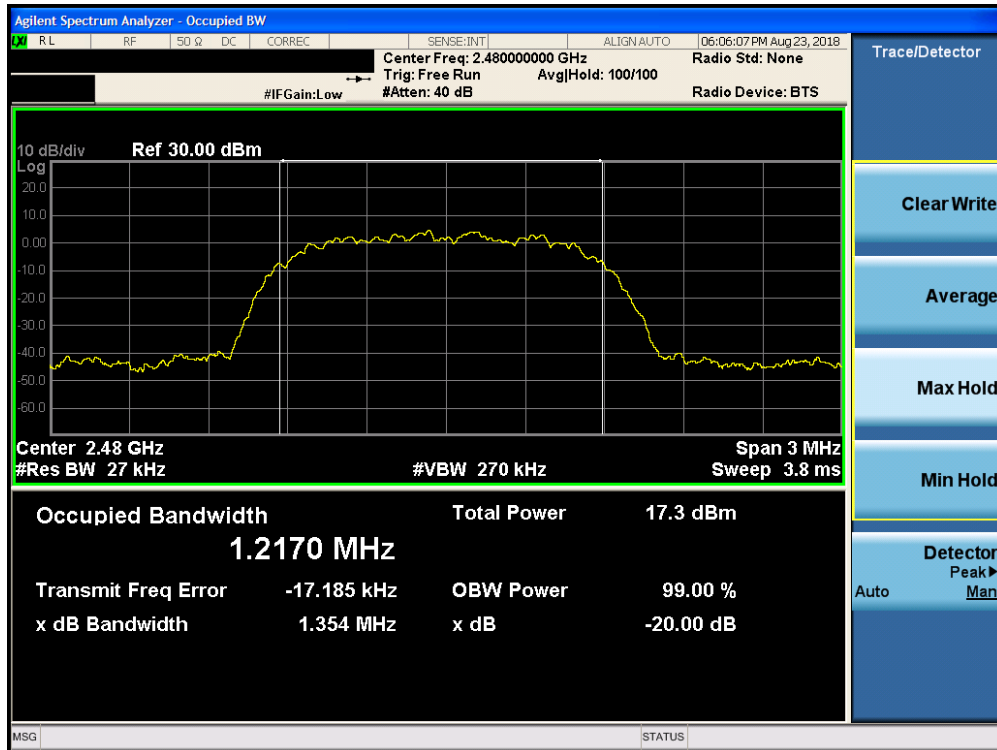

Plot 7-6. 20dB Bandwidth Plot ANT 0 (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 17 of 112

Antenna 1

Frequency [MHz]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	GFSK	ePA	0	949.20
2441	GFSK	ePA	39	949.00
2480	GFSK	ePA	78	949.60
2402	8DPSK	ePA	0	1355.00
2441	8DPSK	ePA	39	1354.00
2480	8DPSK	ePA	78	1355.00

Table 7-3. Conducted 20dB Bandwidth Measurements ANT1

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 18 of 112

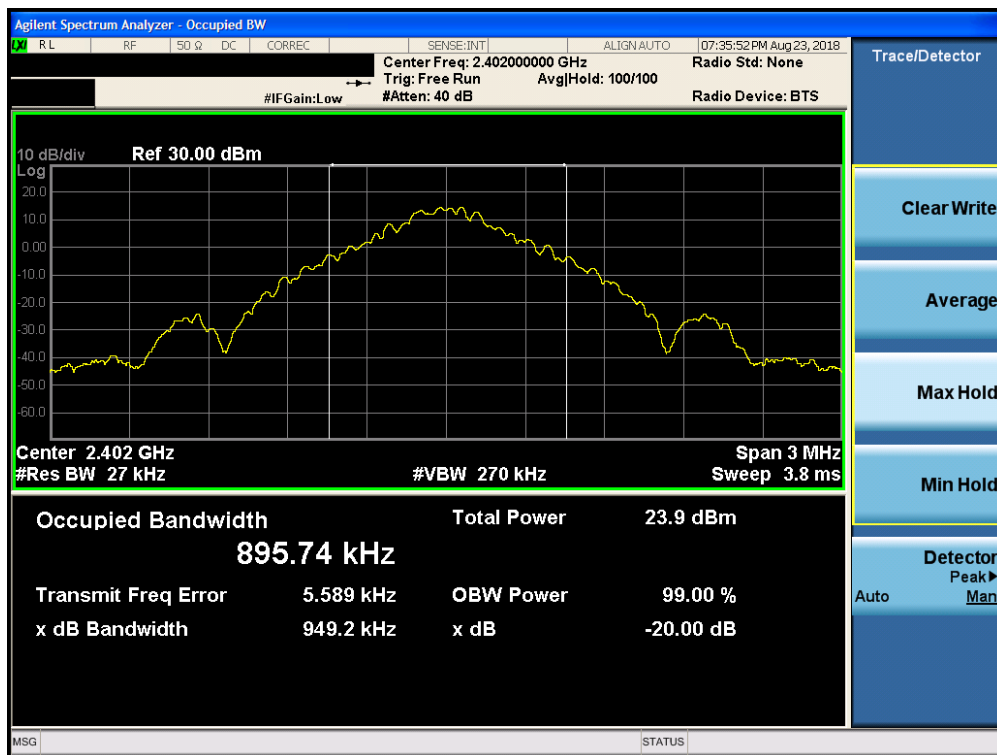


Plot 7-7. 20dB Bandwidth Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 0)




Plot 7-8. 20dB Bandwidth Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 19 of 112

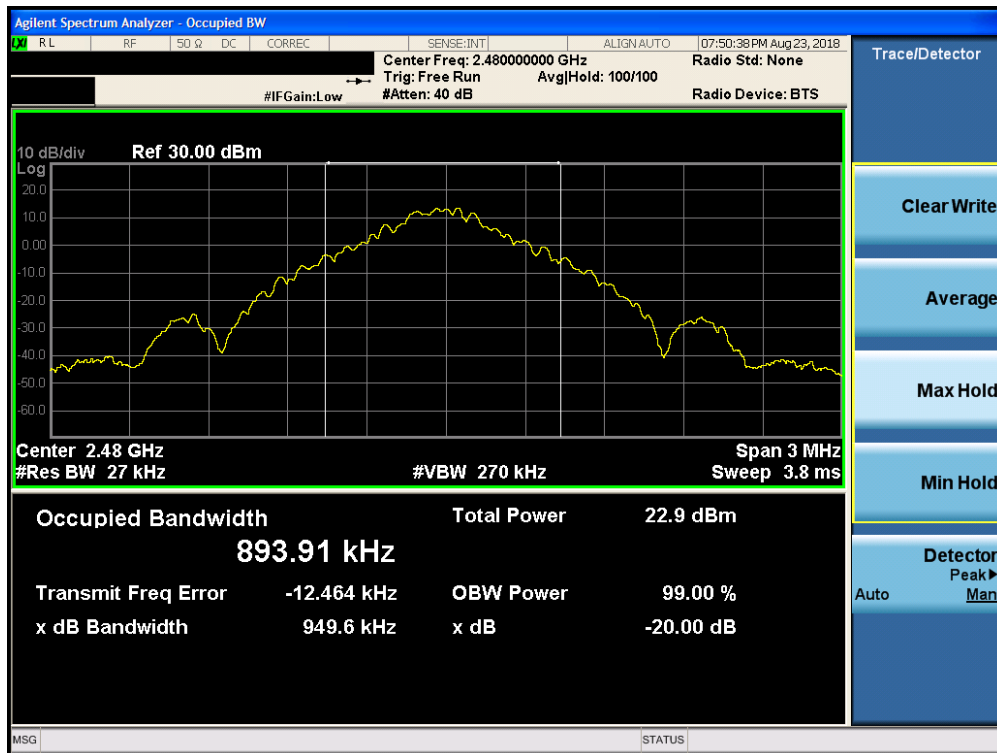


Plot 7-9. 20dB Bandwidth Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 78)

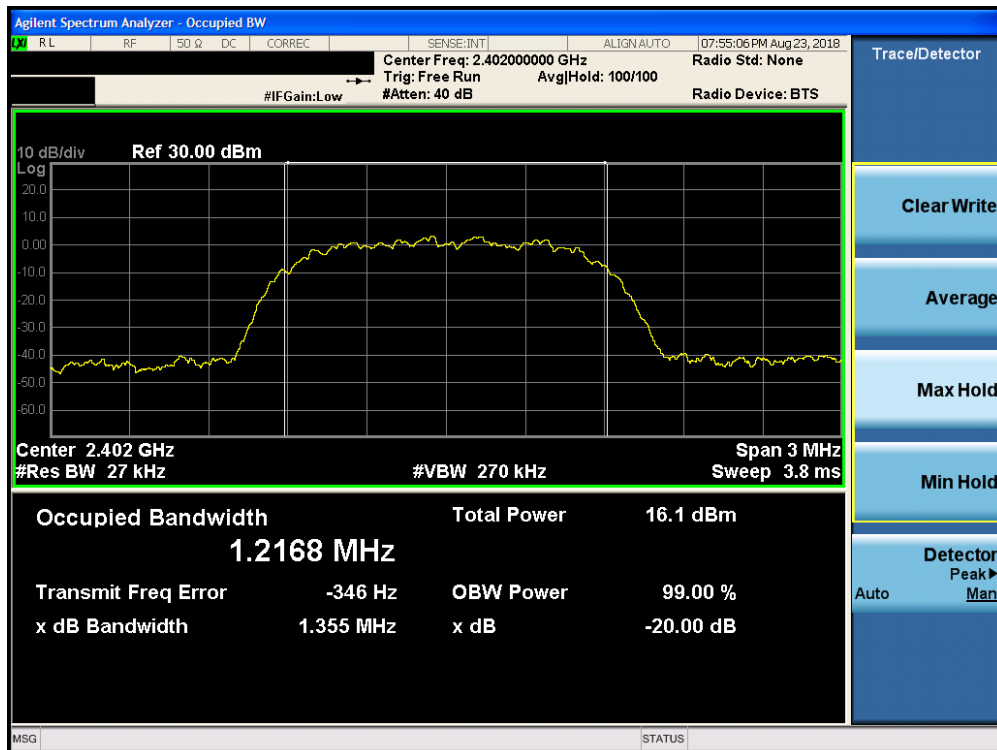


Plot 7-10. 20dB Bandwidth Plot ANT 1 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 20 of 112

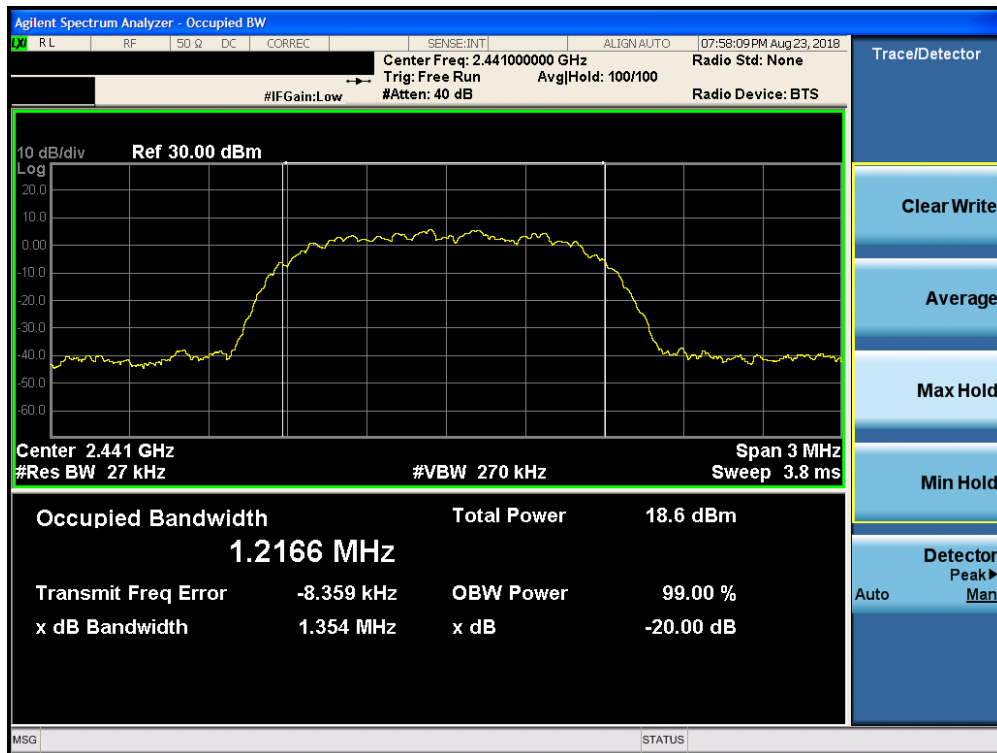

Plot 7-11. 20dB Bandwidth Plot ANT 1 (Bluetooth, 8DPSK, ePA – Ch. 39)

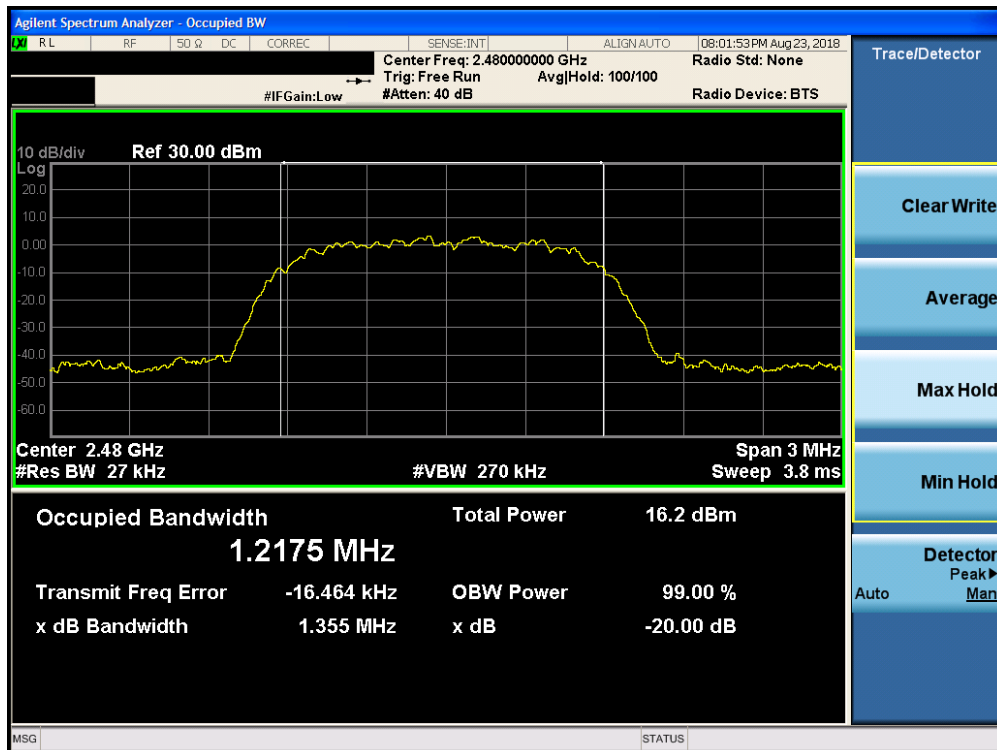

Plot 7-12. 20dB Bandwidth Plot ANT 1 (Bluetooth, 8DPSK, ePA – Ch. 78)


FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 21 of 112

Antenna 2

Frequency [MHz]	Mod.	Power Scheme	Channel No.	20dB Bandwidth Test Results [kHz]
2402	GFSK	ePA	0	950.60
2441	GFSK	ePA	39	949.20
2480	GFSK	ePA	78	949.00
2402	8DPSK	ePA	0	1354.00
2441	8DPSK	ePA	39	1354.00
2480	8DPSK	ePA	78	1355.00

Table 7-4. Conducted 20dB Bandwidth Measurements ANT2

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 22 of 112

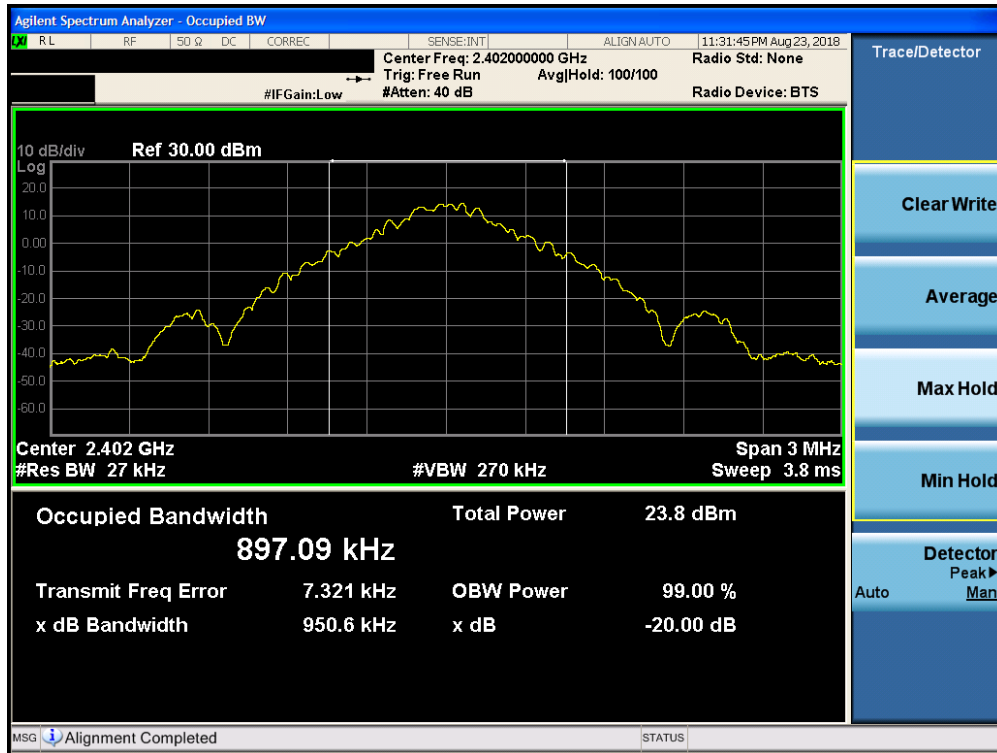

Plot 7-13. 20dB Bandwidth Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 0)




Plot 7-14. 20dB Bandwidth Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 39)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 23 of 112




Plot 7-15. 20dB Bandwidth Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 78)

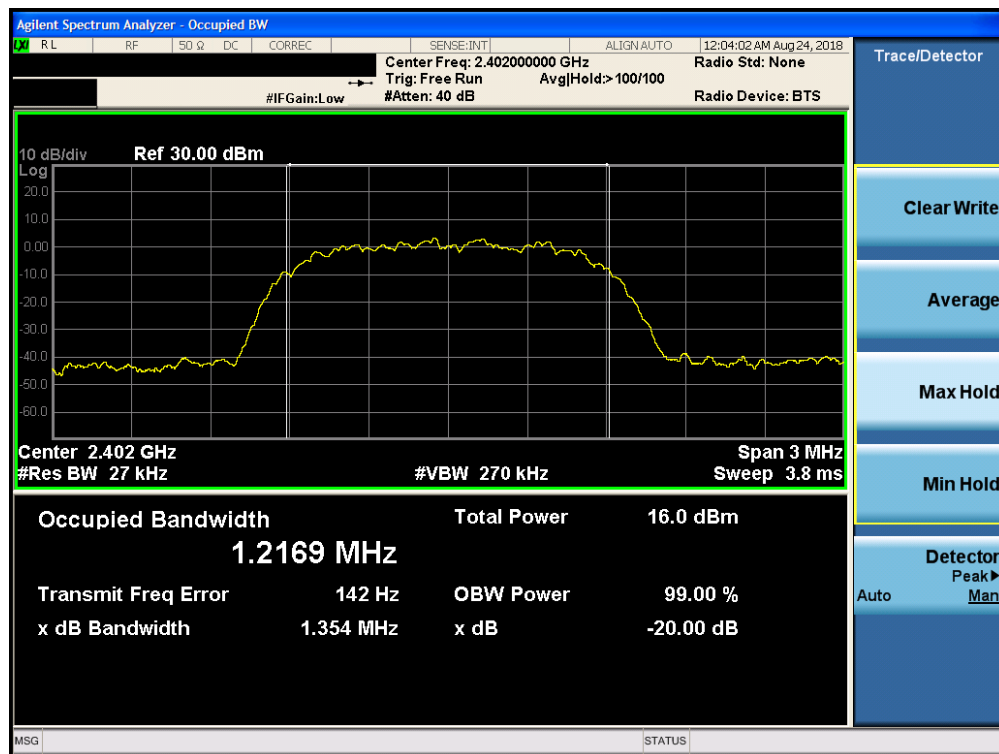


Plot 7-16. 20dB Bandwidth Plot ANT 2 (Bluetooth, 8DPSK, ePA – Ch. 0)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 24 of 112

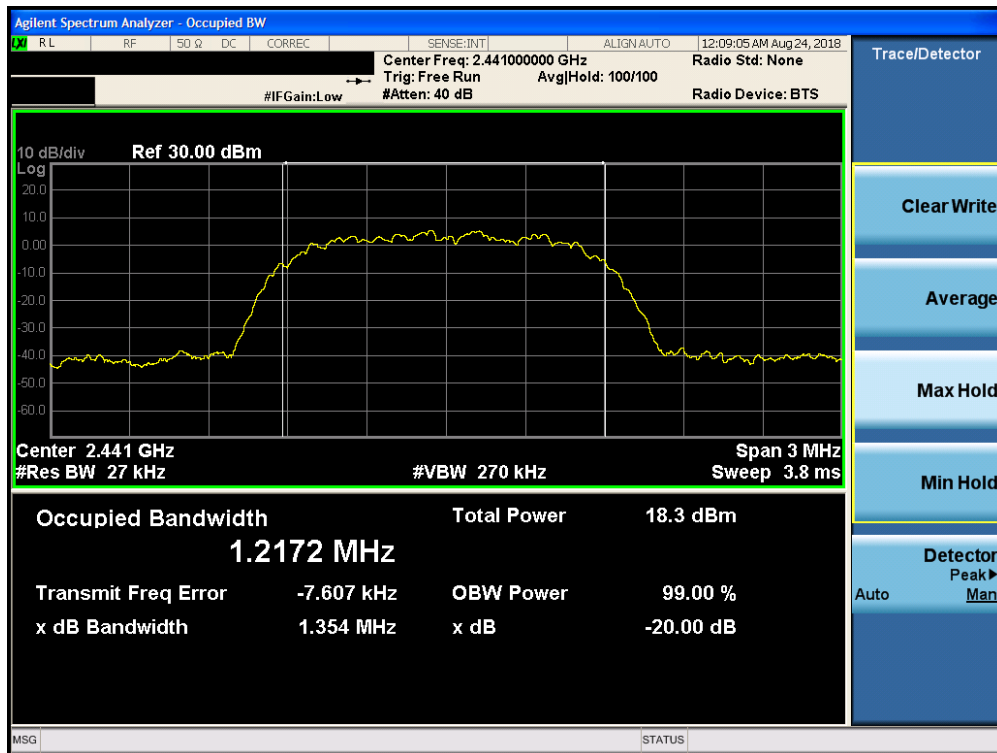

Plot 7-17. 20dB Bandwidth Plot ANT 2 (Bluetooth, 8DPSK, ePA – Ch. 39)

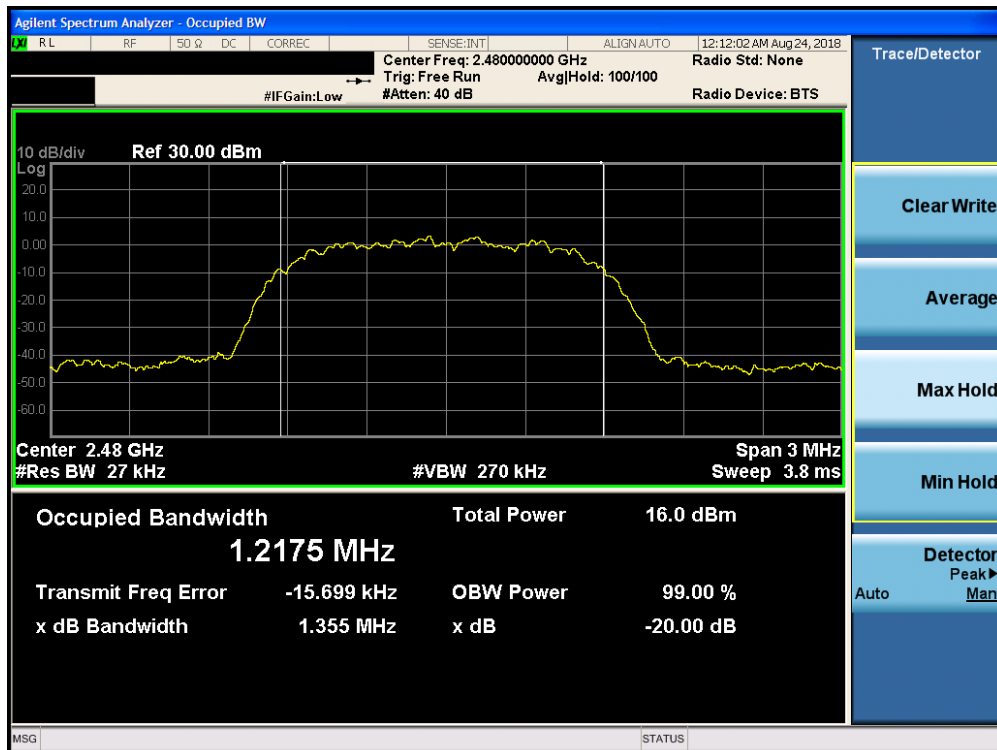

Plot 7-18. 20dB Bandwidth Plot ANT 2 (Bluetooth, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 25 of 112

7.3 Output Power Measurement

§15.247 (b.1); RSS-247 [5.4(2)]

Test Overview and Limits

Measurement is made while the EUT is operating in non-hopping transmission mode. Peak and Average power measurements are performed using a broadband power meter with a pulse sensor.

The maximum permissible output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

Test Settings

Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement

Note

This unit was tested with all possible data rates and the highest peak power is reported with the unit transmitting at GFSK and 8DPSK.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 26 of 112

7.3.1 Peak Output Power Measurement

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Peak Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	16.15	41.210
2441	GFSK	ePA	39	16.14	41.115
2480	GFSK	ePA	78	16.01	39.902
2402	GFSK	iPA	0	10.36	10.864
2441	GFSK	iPA	39	11.87	15.382
2480	GFSK	iPA	78	9.91	9.795
2402	8DPSK	ePA	0	16.78	47.643
2441	8DPSK	ePA	39	16.80	47.863
2480	8DPSK	ePA	78	16.28	42.462
2402	8DPSK	iPA	0	10.61	11.508
2441	8DPSK	iPA	39	11.01	12.618
2480	8DPSK	iPA	78	10.88	12.246

Table 7-5. ANT0 Peak Conducted Output Power Measurements

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 27 of 112

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Peak Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	15.44	34.995
2441	GFSK	ePA	39	15.68	36.983
2480	GFSK	ePA	78	15.80	38.019
2402	GFSK	iPA	0	8.18	6.577
2441	GFSK	iPA	39	9.63	9.183
2480	GFSK	iPA	78	8.39	6.902
2402	8DPSK	ePA	0	14.47	27.990
2441	8DPSK	ePA	39	14.50	28.184
2480	8DPSK	ePA	78	14.05	25.410
2402	8DPSK	iPA	0	8.29	6.745
2441	8DPSK	iPA	39	8.15	6.531
2480	8DPSK	iPA	78	8.13	6.501

Table 7-6. ANT1 Peak Conducted Output Power Measurements

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 28 of 112

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Peak Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	18.80	75.858
2441	GFSK	ePA	39	19.02	79.799
2480	GFSK	ePA	78	18.63	72.946
2402	GFSK	iPA	0	8.88	7.727
2441	GFSK	iPA	39	9.53	8.974
2480	GFSK	iPA	78	9.16	8.241
2402	8DPSK	ePA	0	14.16	26.062
2441	8DPSK	ePA	39	14.20	26.303
2480	8DPSK	ePA	78	13.87	24.378
2402	8DPSK	iPA	0	8.59	7.228
2441	8DPSK	iPA	39	8.41	6.934
2480	8DPSK	iPA	78	8.58	7.211

Table 7-7. ANT2 Peak Conducted Output Power Measurements

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 29 of 112

7.3.2 Average Output Power Measurement

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	15.92	39.084
2441	GFSK	ePA	39	15.91	38.994
2480	GFSK	ePA	78	15.71	37.239
2402	GFSK	iPA	0	10.19	10.447
2441	GFSK	iPA	39	11.42	13.868
2480	GFSK	iPA	78	9.77	9.484
2402	8DPSK	ePA	0	13.43	22.029
2441	8DPSK	ePA	39	13.50	22.387
2480	8DPSK	ePA	78	13.43	22.029
2402	8DPSK	iPA	0	7.49	5.610
2441	8DPSK	iPA	39	7.44	5.546
2480	8DPSK	iPA	78	7.50	5.623

Table 7-8. ANT0 Average Conducted Output Power Measurements

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 30 of 112

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	14.92	31.046
2441	GFSK	ePA	39	15.00	31.623
2480	GFSK	ePA	78	15.00	31.623
2402	GFSK	iPA	0	8.00	6.310
2441	GFSK	iPA	39	8.98	7.907
2480	GFSK	iPA	78	8.23	6.653
2402	8DPSK	ePA	0	11.00	12.589
2441	8DPSK	ePA	39	10.93	12.388
2480	8DPSK	ePA	78	10.96	12.474
2402	8DPSK	iPA	0	4.99	3.155
2441	8DPSK	iPA	39	5.00	3.162
2480	8DPSK	iPA	78	5.00	3.162

Table 7-9. ANT1 Average Conducted Output Power Measurements

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 31 of 112

Frequency [MHz]	Mod.	Power Scheme	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	ePA	0	18.46	70.146
2441	GFSK	ePA	39	18.50	70.795
2480	GFSK	ePA	78	18.49	70.632
2402	GFSK	iPA	0	8.74	7.482
2441	GFSK	iPA	39	9.41	8.730
2480	GFSK	iPA	78	9.04	8.017
2402	8DPSK	ePA	0	11.03	12.677
2441	8DPSK	ePA	39	11.20	13.183
2480	8DPSK	ePA	78	10.79	11.995
2402	8DPSK	iPA	0	5.46	3.516
2441	8DPSK	iPA	39	5.34	3.420
2480	8DPSK	iPA	78	5.45	3.508

Table 7-10. ANT2 Average Conducted Output Power Measurements

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 32 of 112

7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup


Test Notes

Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.


Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 33 of 112

Antenna 0

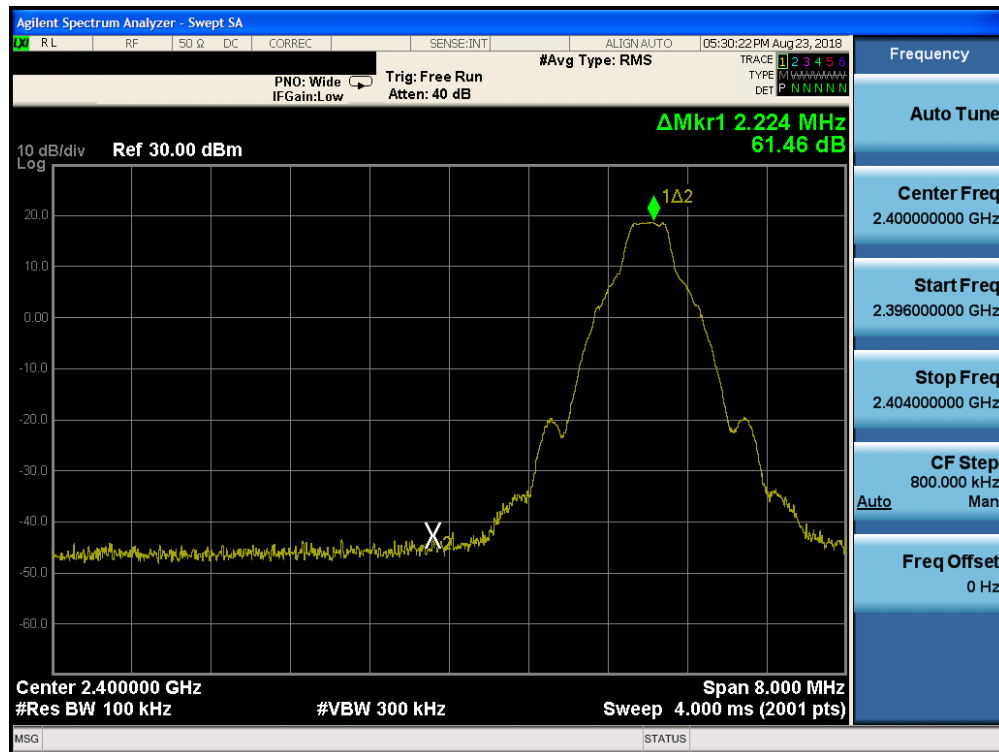


Plot 7-19. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

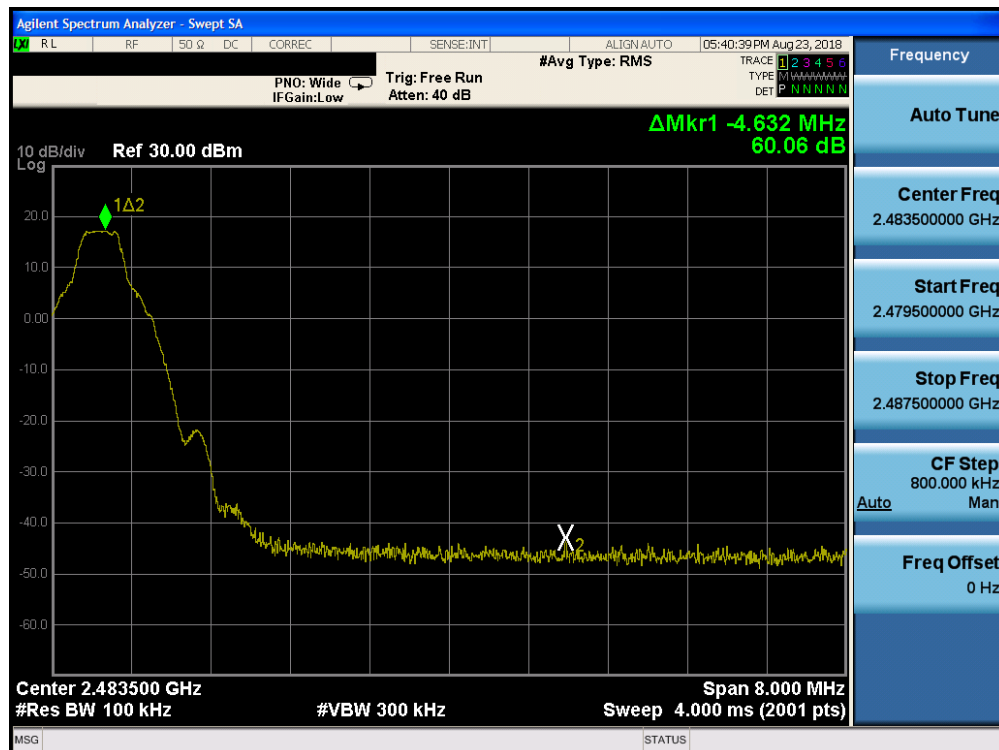


Plot 7-20. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 34 of 112

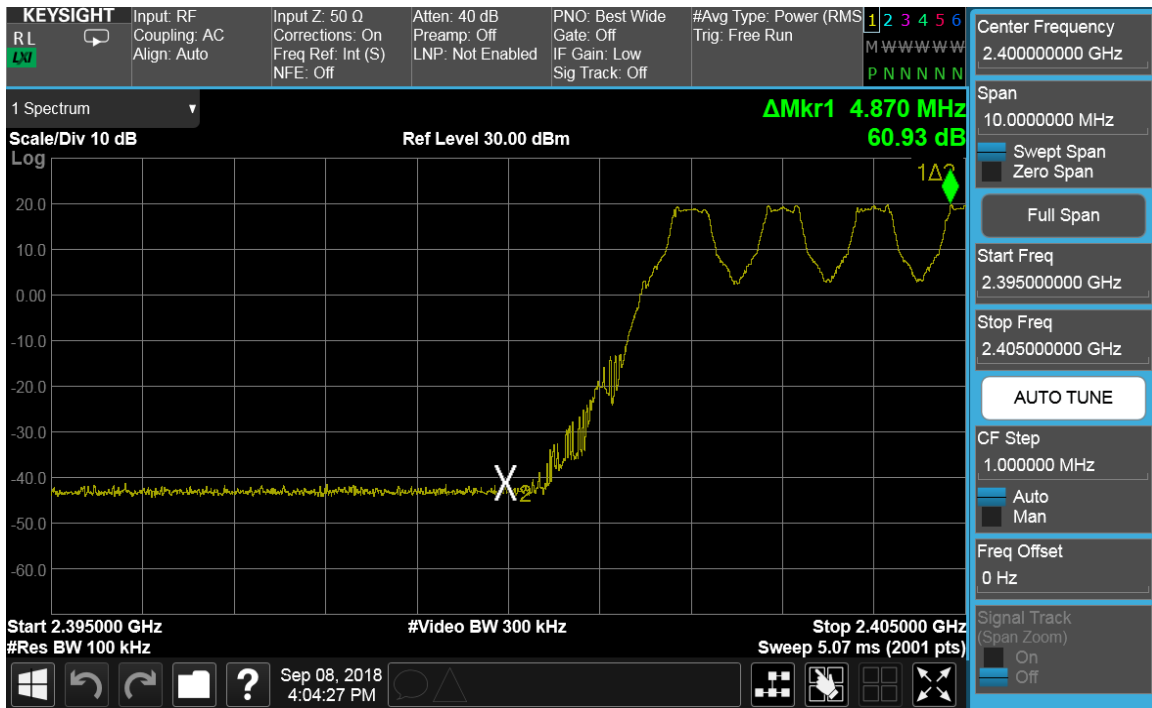


Plot 7-21. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, GFSK, ePA)

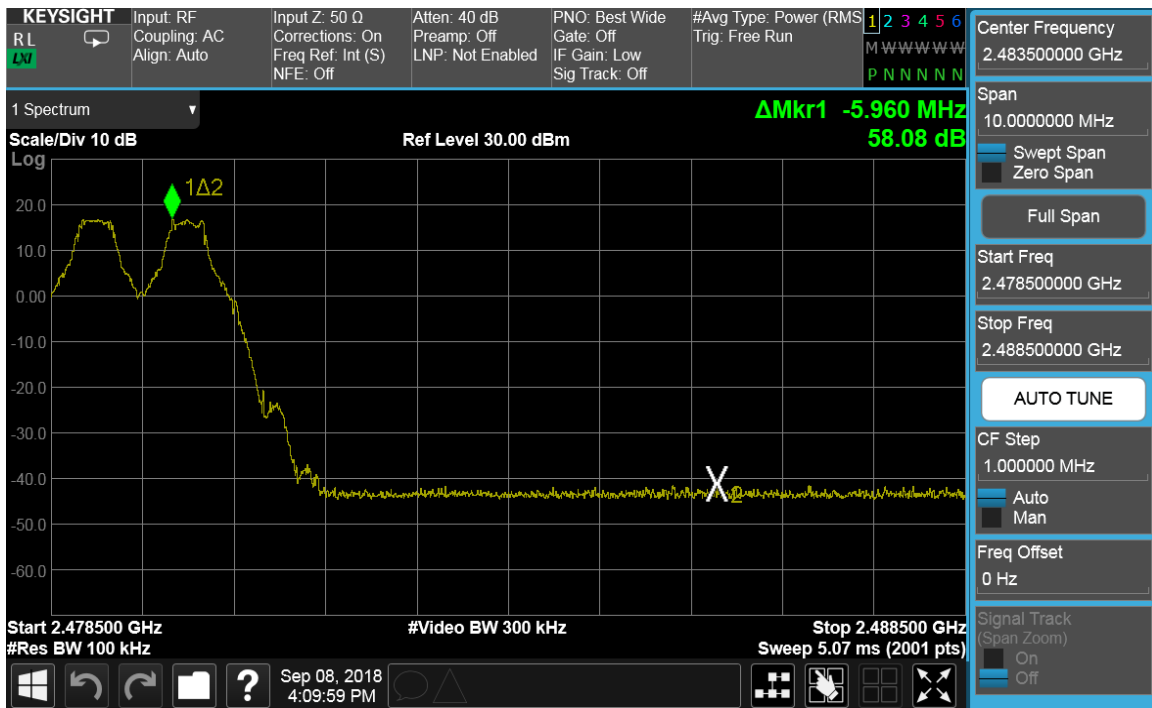


Plot 7-22. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 35 of 112

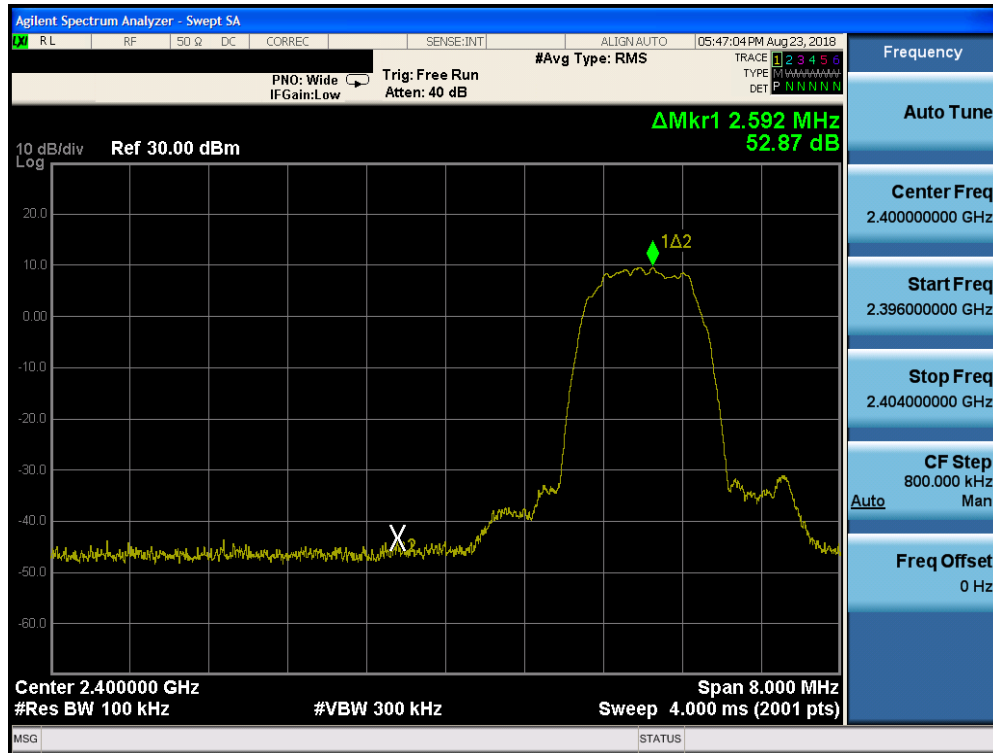

Plot 7-23. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

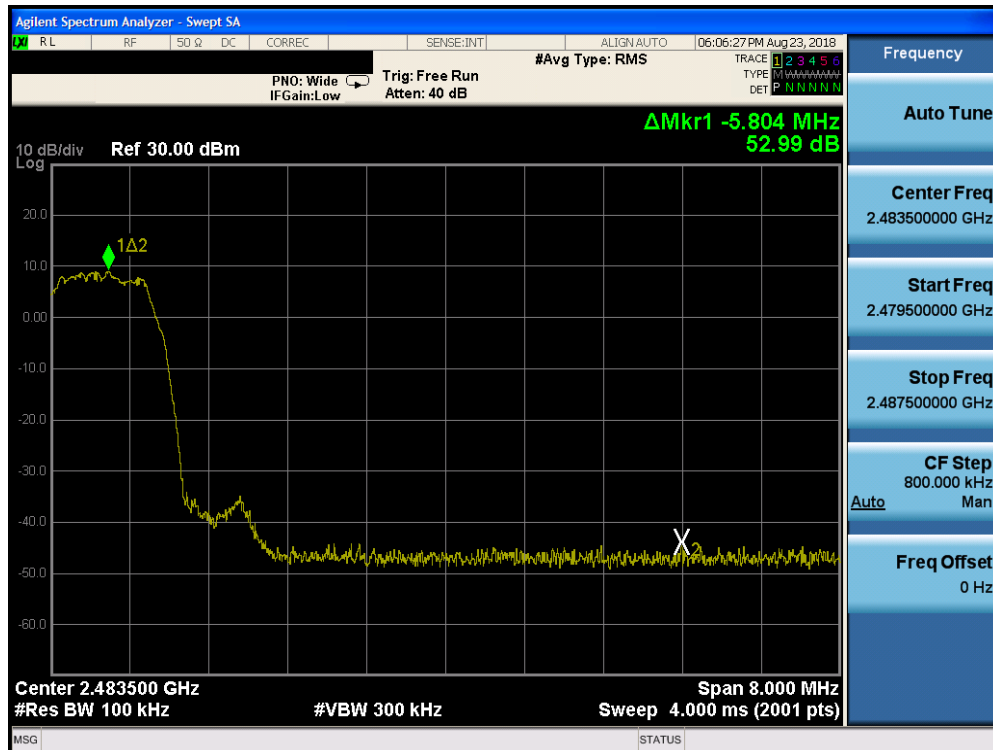

Plot 7-24. Band Edge Plot ANT 0 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 36 of 112




Plot 7-25. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, 8DPSK, ePA)




Plot 7-26. Band Edge Plot ANT 0 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 37 of 112

Antenna 1

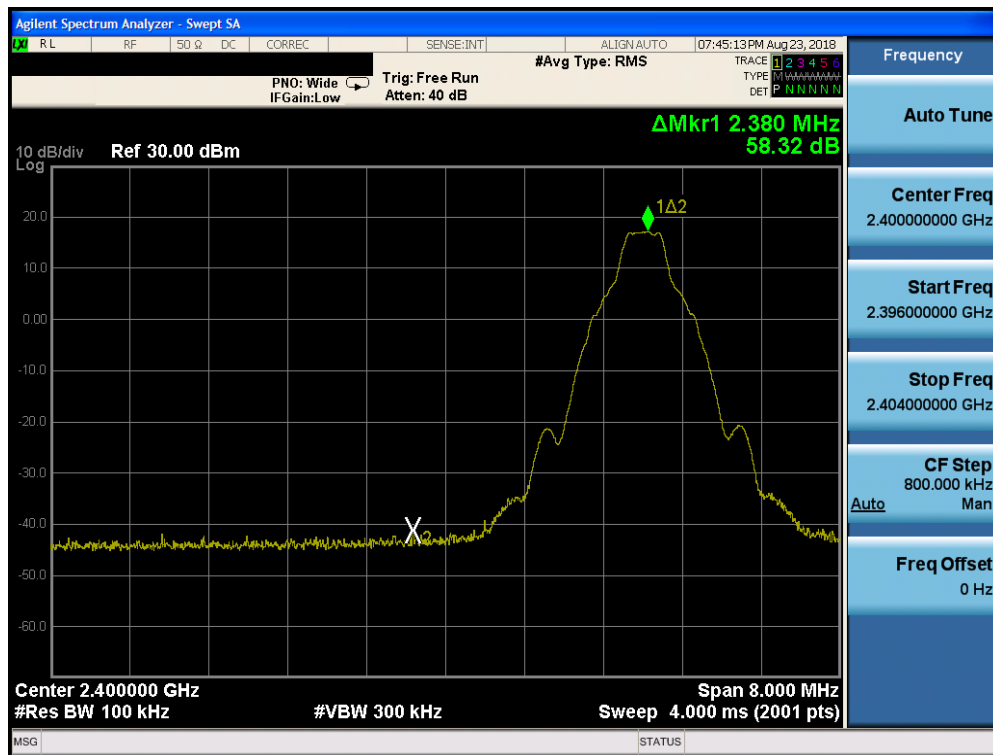


Plot 7-27. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

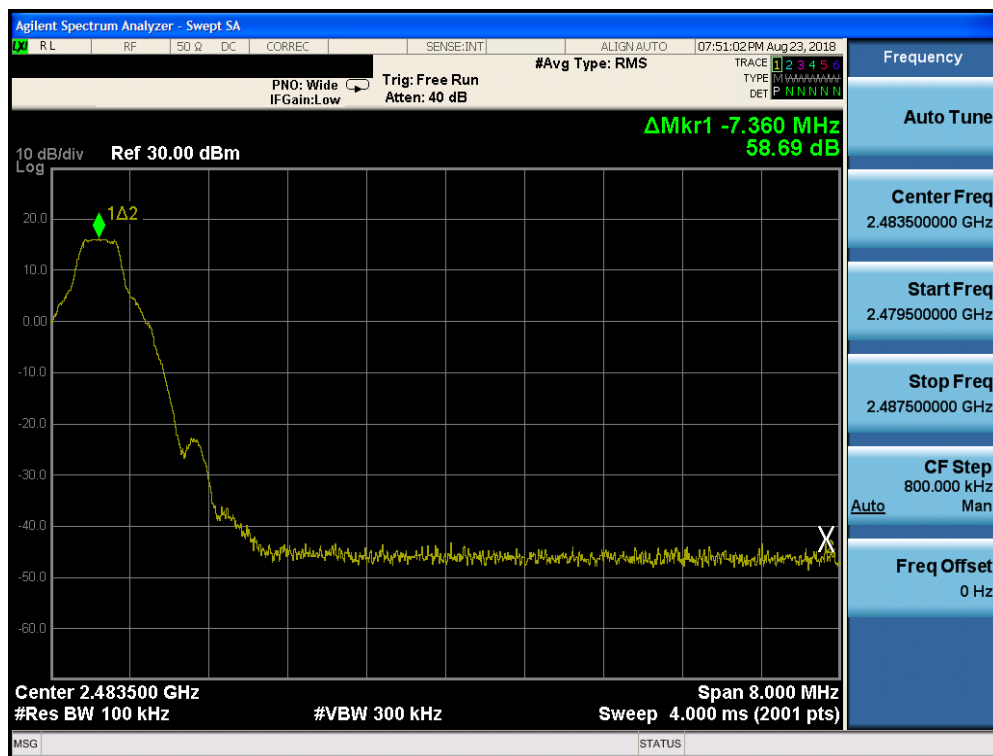


Plot 7-28. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 38 of 112

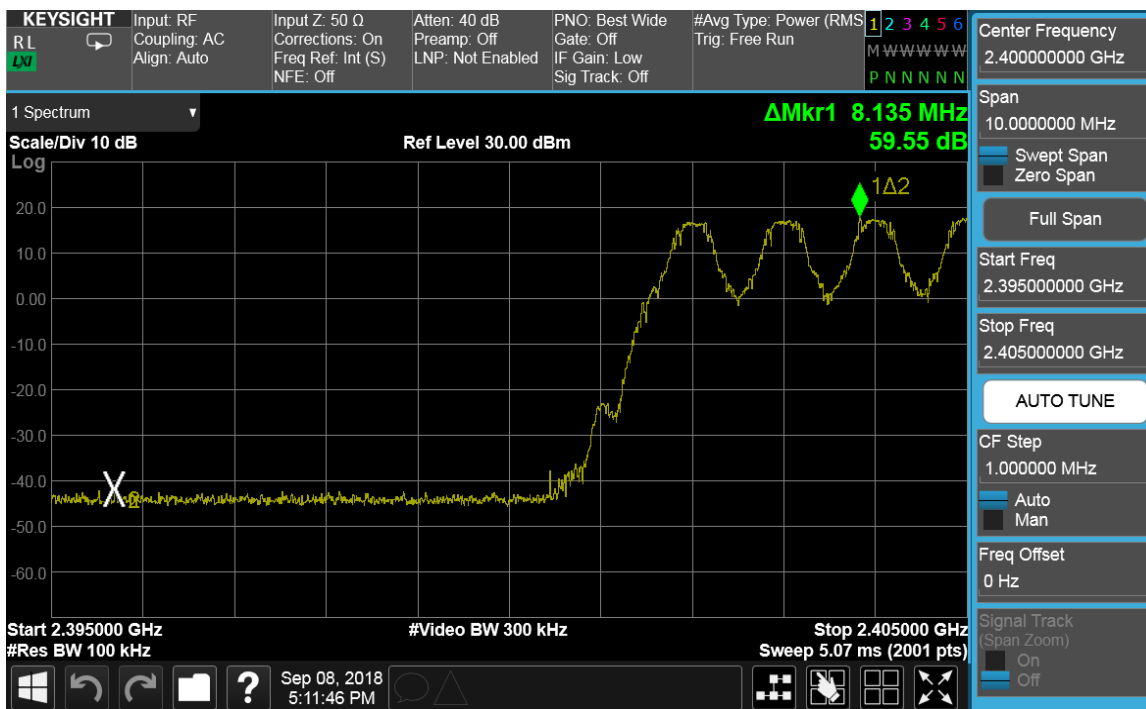


Plot 7-29. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, GFSK, ePA)

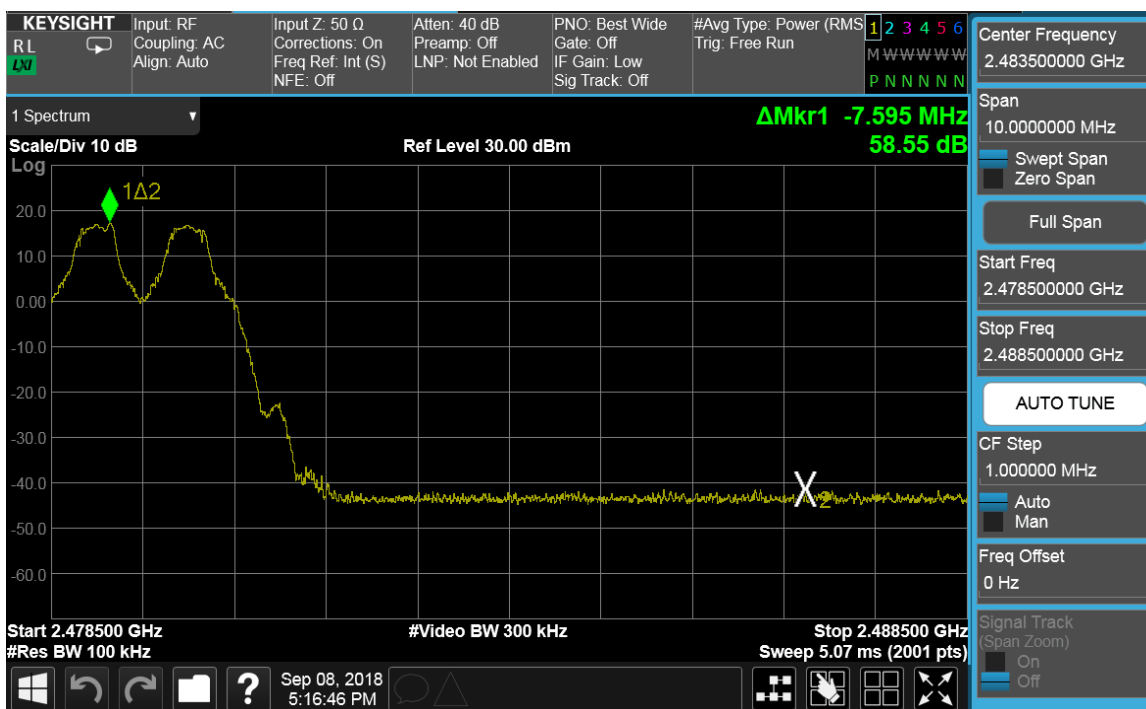


Plot 7-30. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 39 of 112

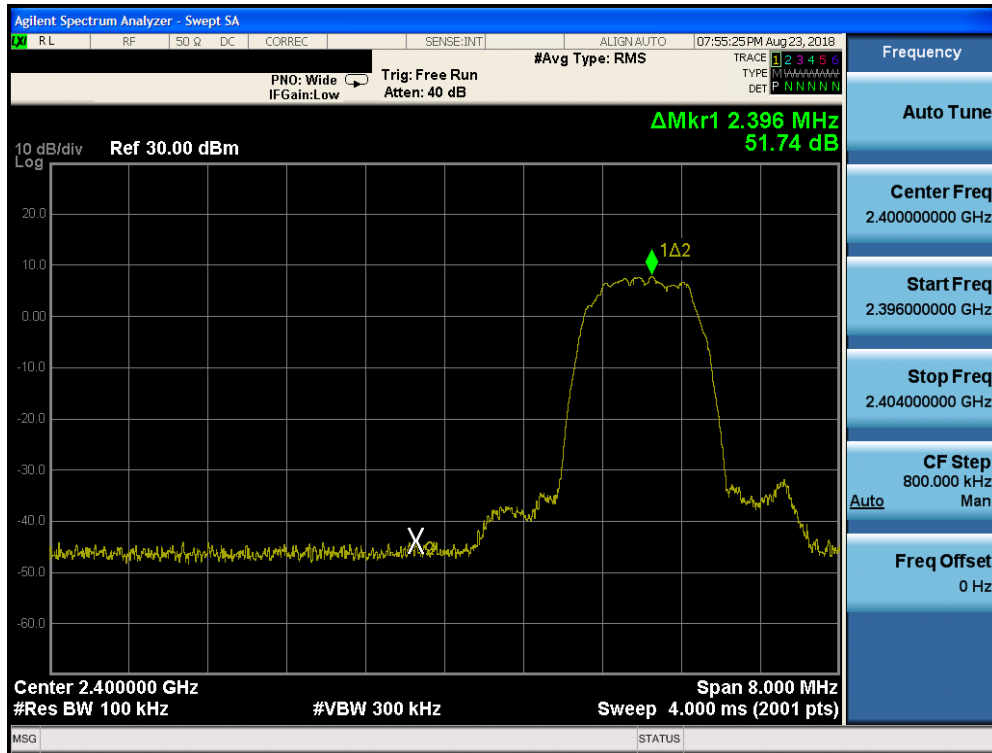

Plot 7-31. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

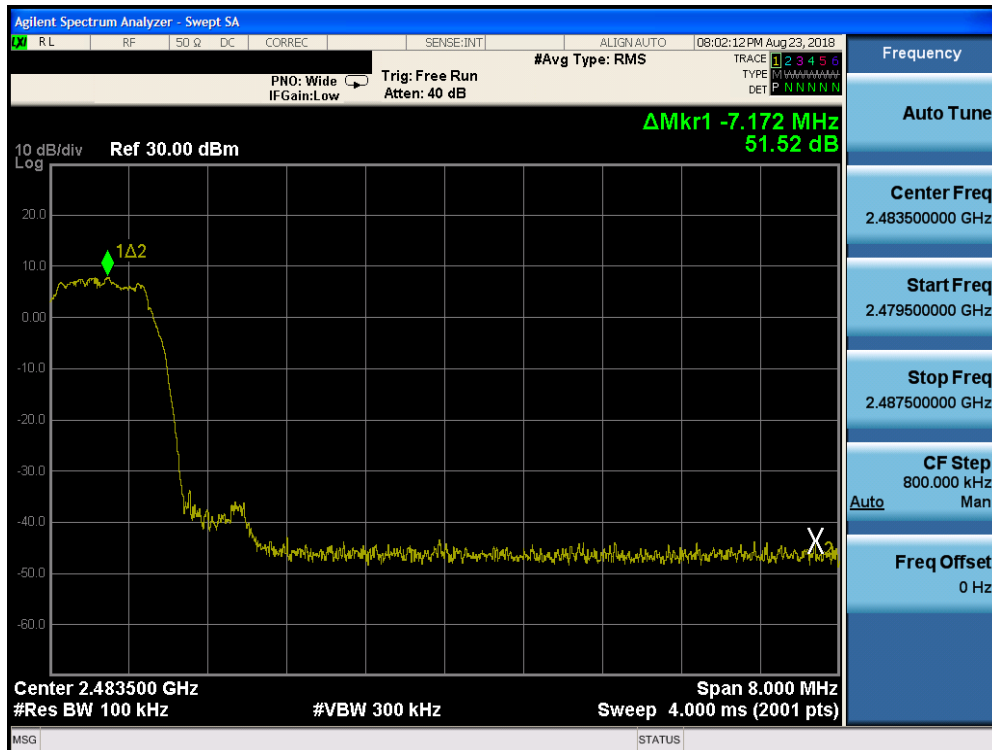


Plot 7-32. Band Edge Plot ANT 1 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 40 of 112




Plot 7-33. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

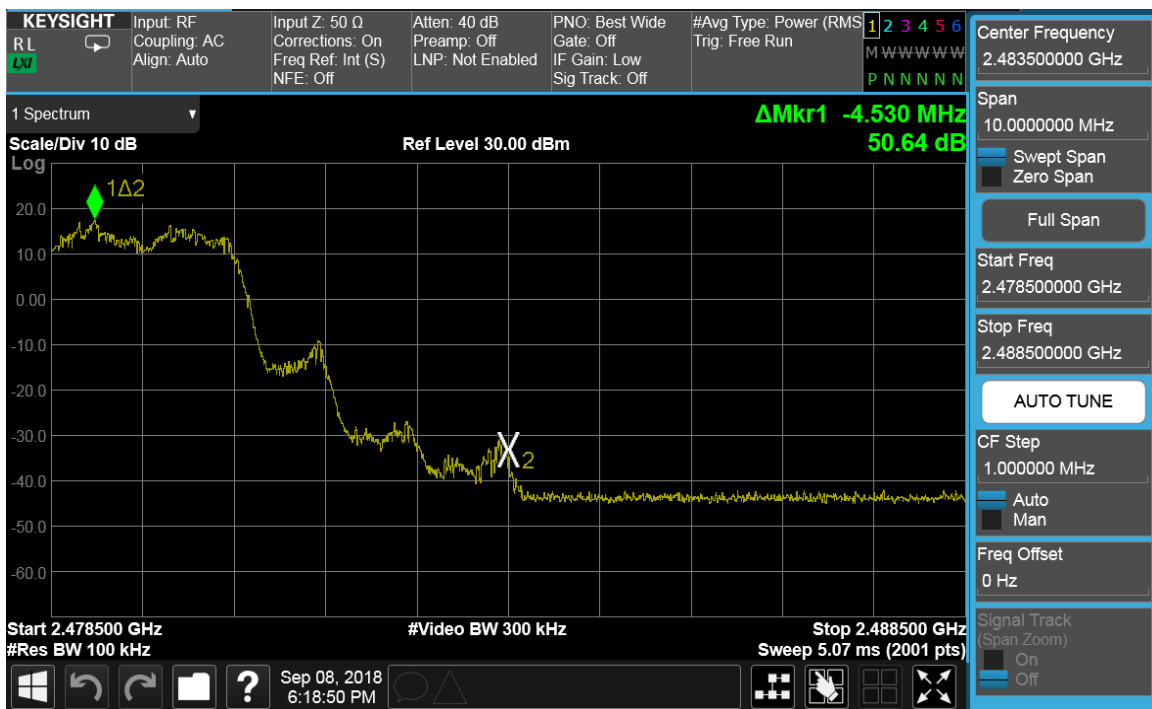


Plot 7-34. Band Edge Plot ANT 1 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 41 of 112

Antenna 2

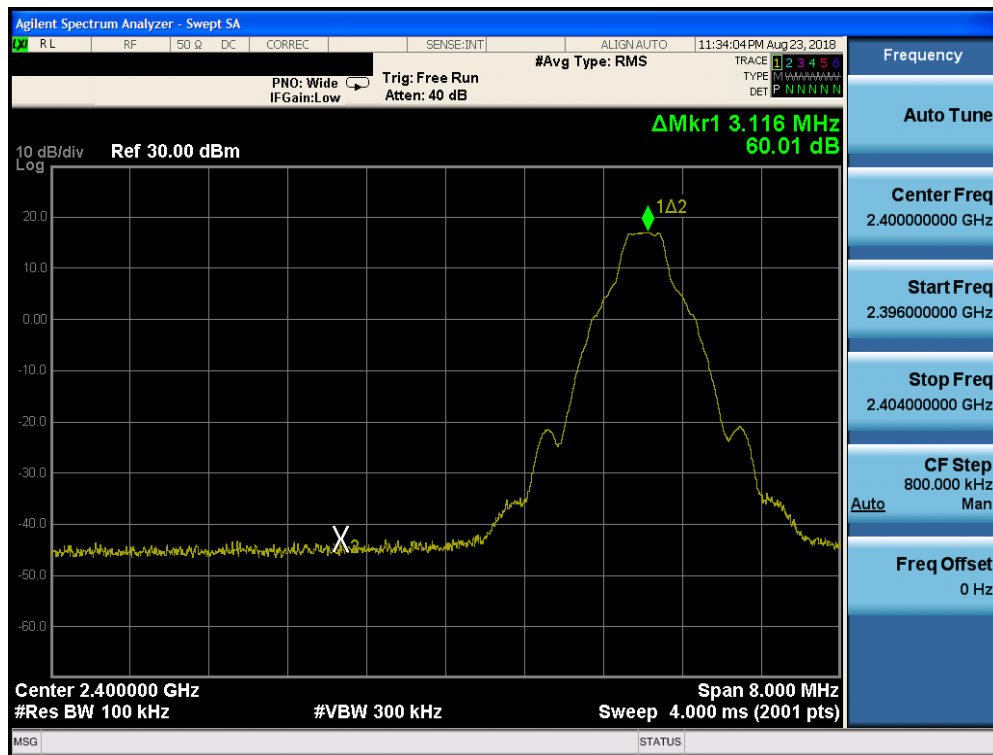


Plot 7-35. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 0)

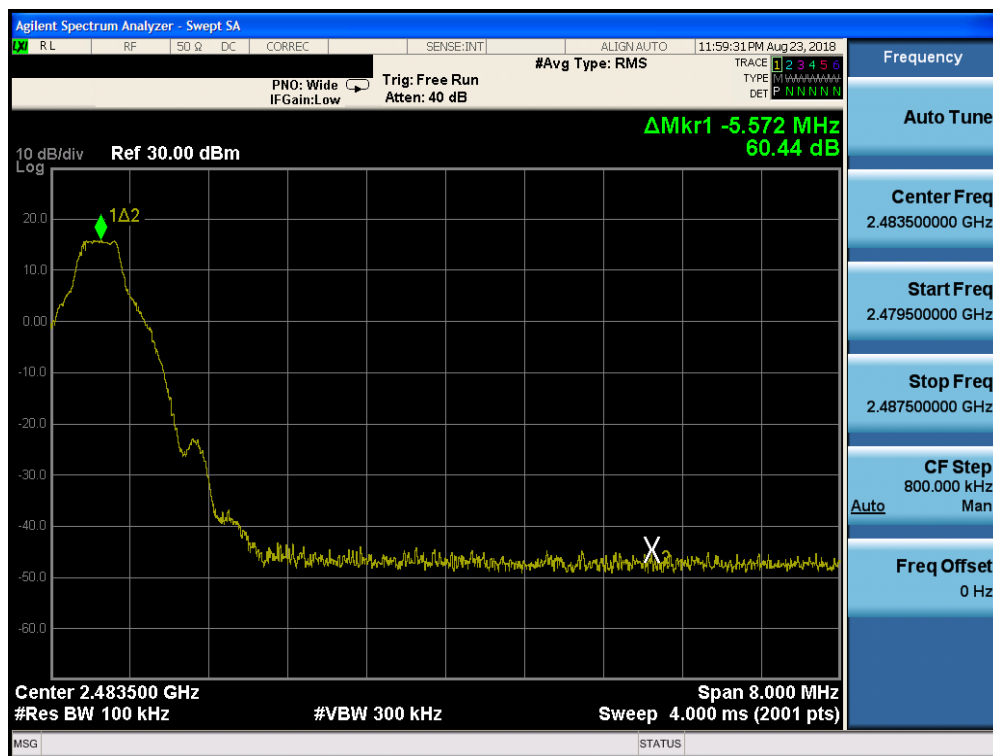


Plot 7-36. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, GFSK, ePA – Ch. 78)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 42 of 112

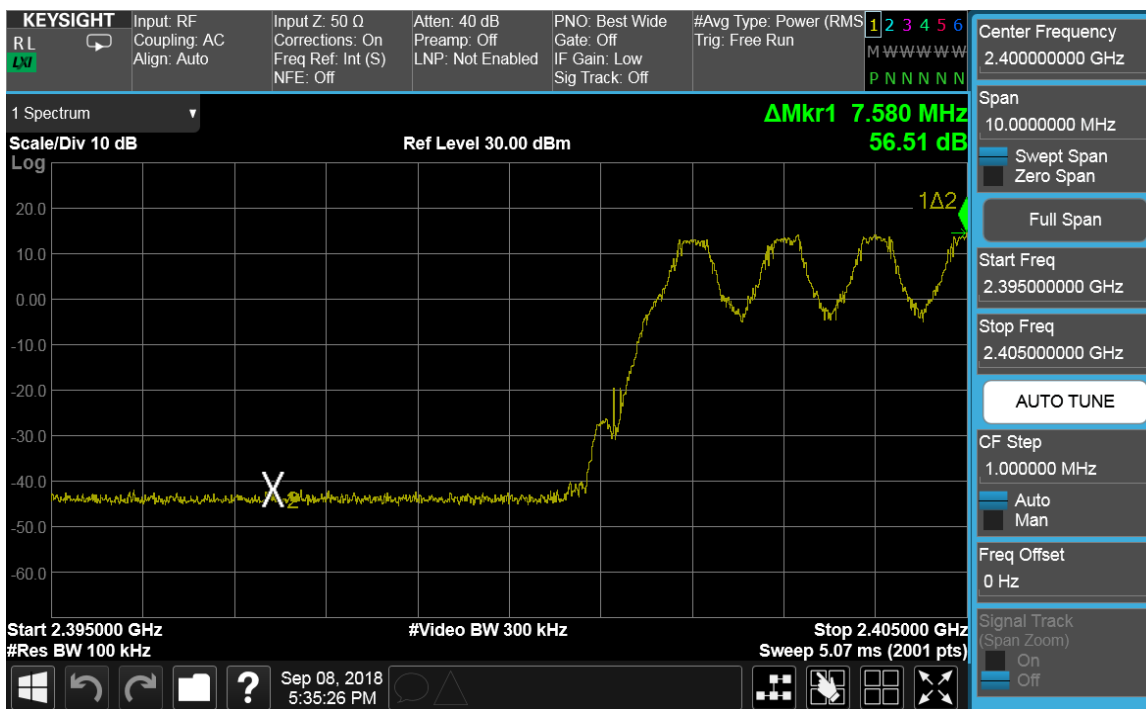


Plot 7-37. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, GFSK, ePA)

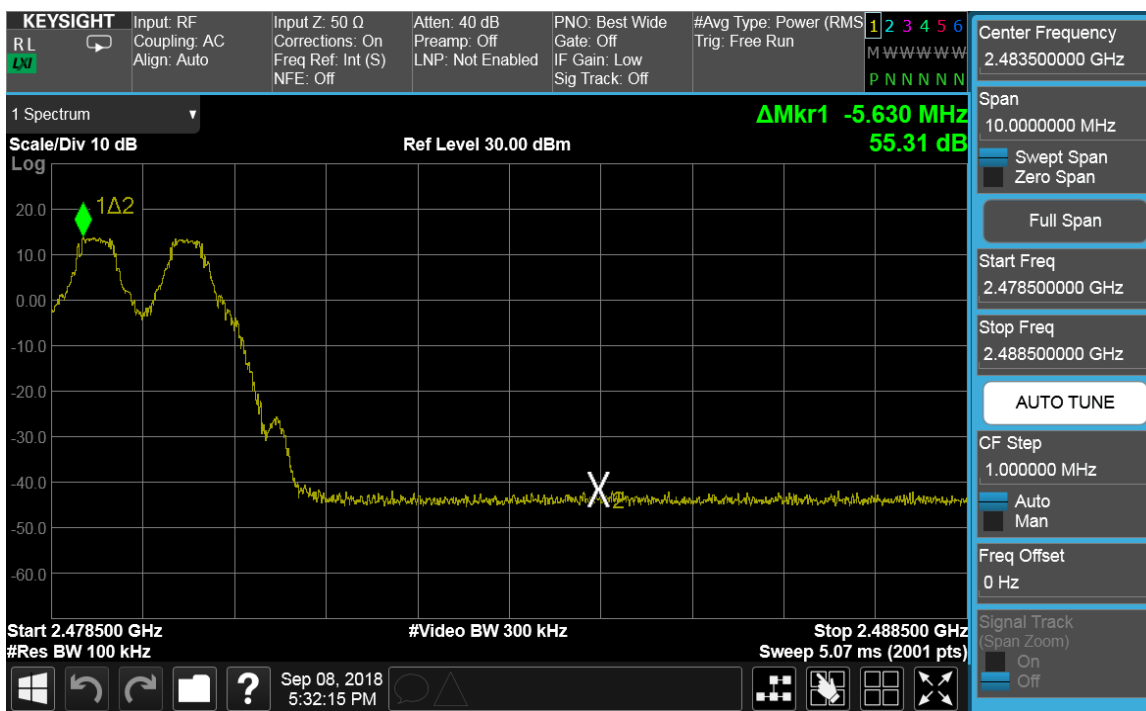


Plot 7-38. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, GFSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 43 of 112

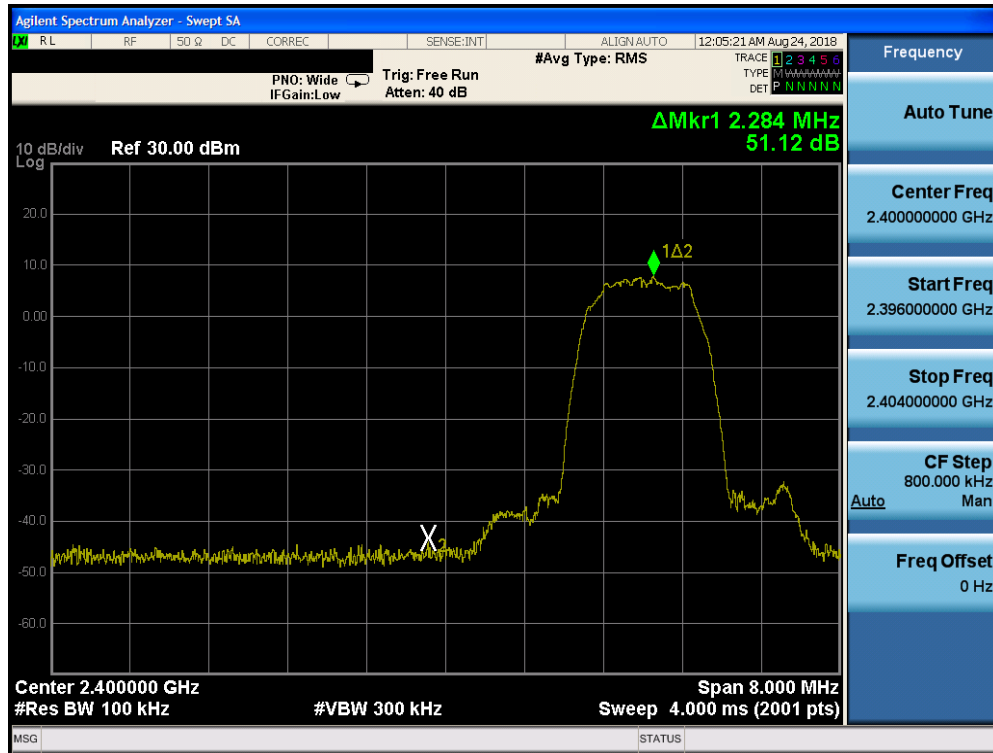

Plot 7-39. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 0)

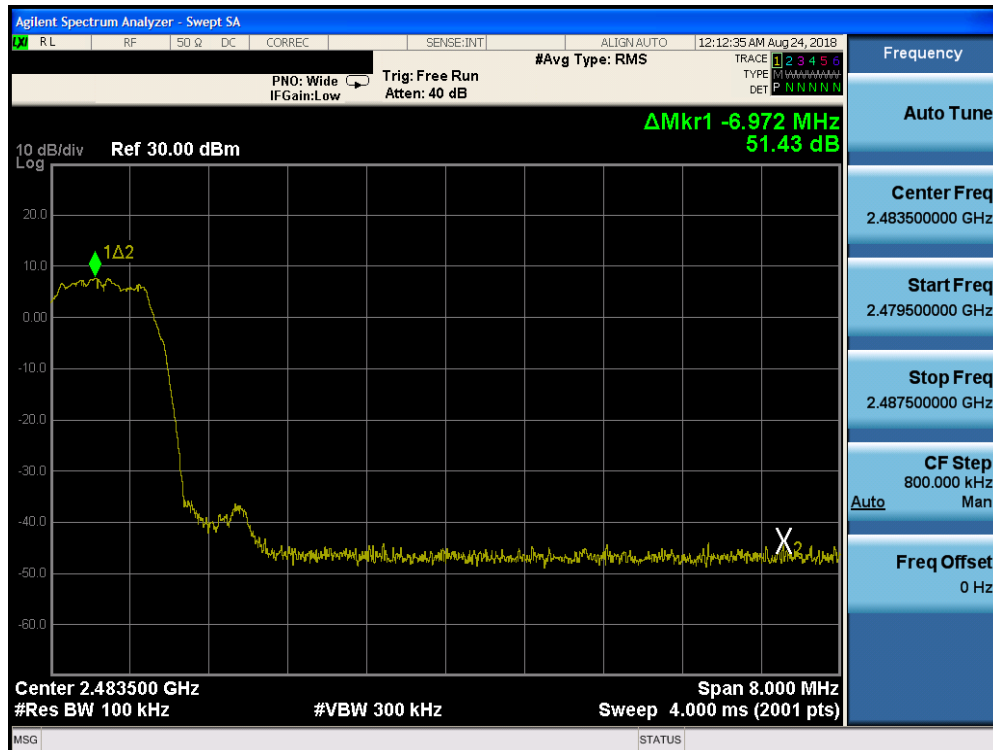


Plot 7-40. Band Edge Plot ANT 2 (Bluetooth with Hopping Disabled, 8DPSK, ePA – Ch. 78)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 44 of 112



Plot 7-41. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

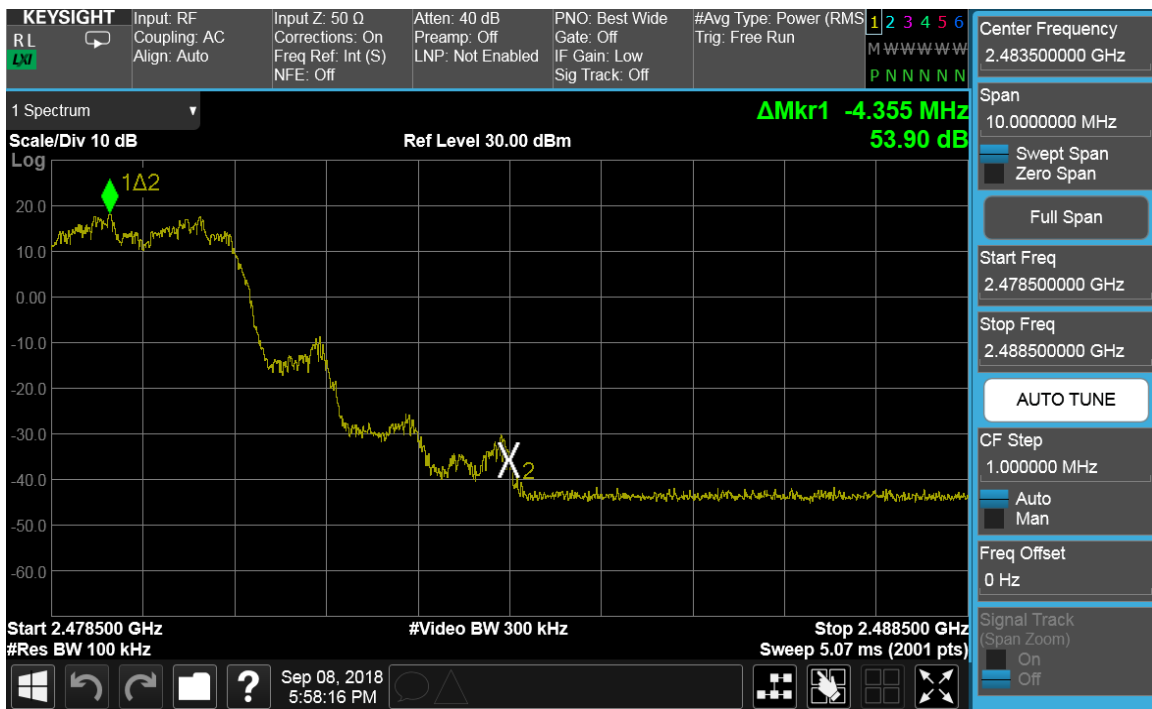

Plot 7-42. Band Edge Plot ANT 2 (Bluetooth with Hopping Enabled, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 45 of 112

7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(2)]

Test Overview and Limit

Measurement is made with EUT operating in hopping mode. ***The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.

Both power schemes were investigated, and only the worst case is reported.


FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 46 of 112

Antenna 0


Frequency [MHz]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	GFSK	ePA	0	0.632
2441	GFSK	ePA	39	0.633
2480	GFSK	ePA	78	0.633
2402	8DPSK	ePA	0	0.903
2441	8DPSK	ePA	39	0.903
2480	8DPSK	ePA	78	0.903

Table 7-11. Minimum Channel Separation ANT0

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 47 of 112

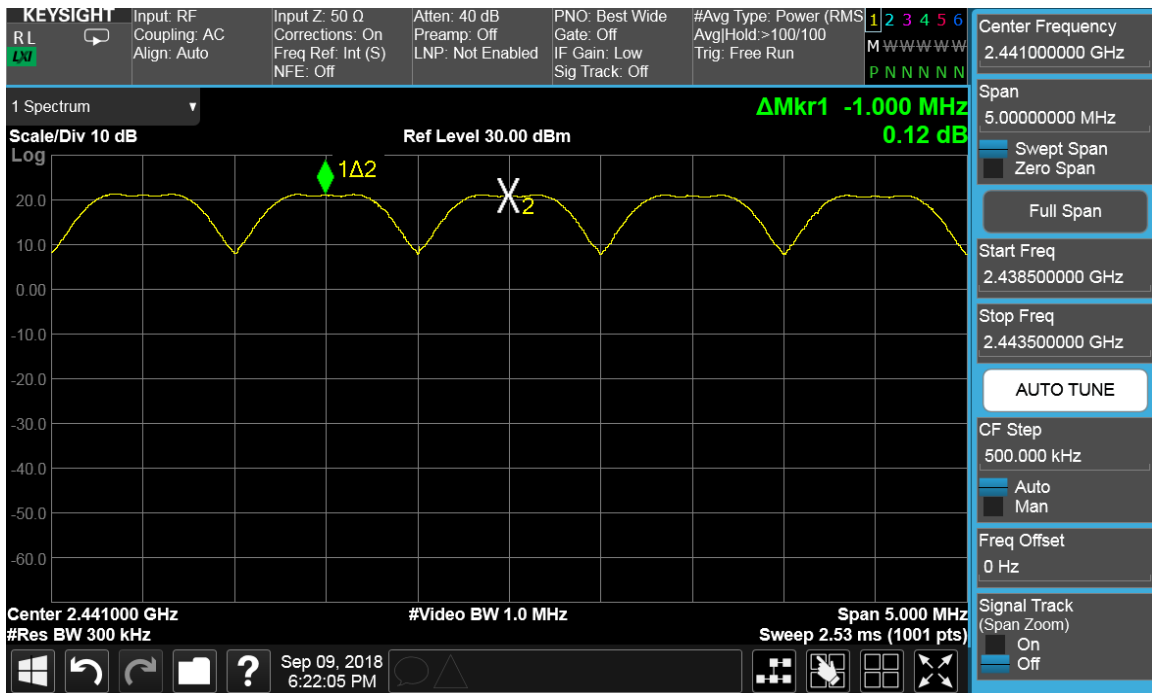

Plot 7-43. Channel Spacing Plot ANT0 (Bluetooth, GFSK, ePA)

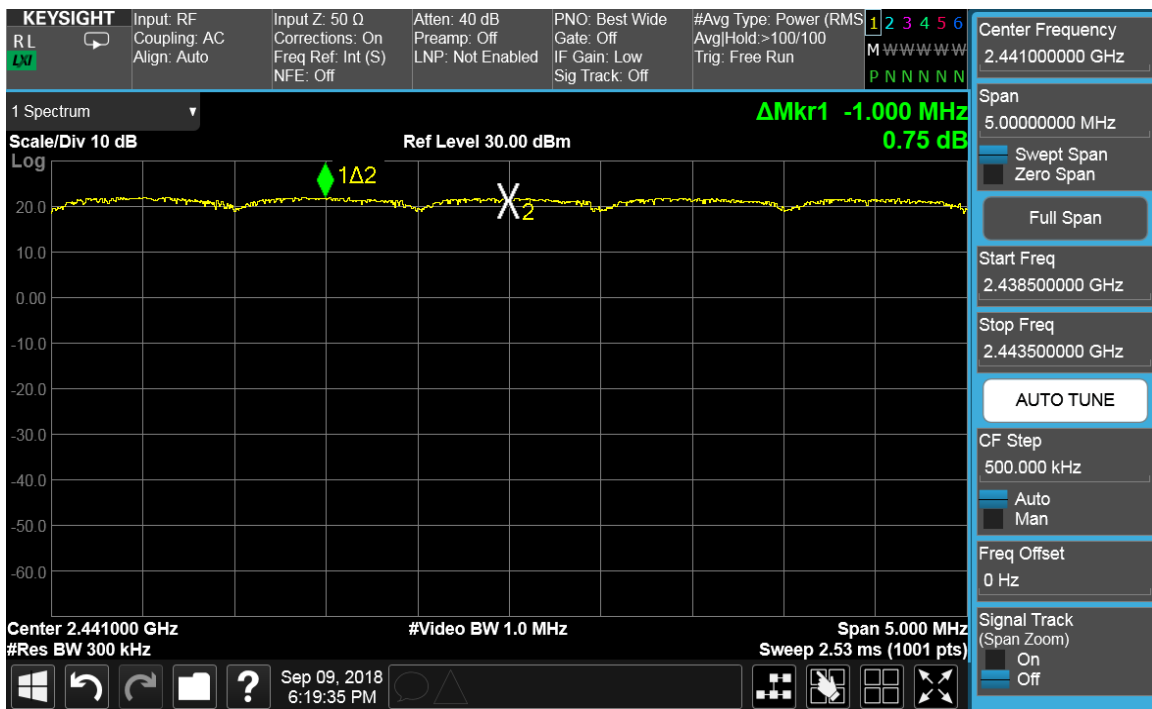

Plot 7-44. Channel Spacing Plot ANT0 (Bluetooth, 8DPSK, ePA)


FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 48 of 112

Antenna 1


Frequency [MHz]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	GFSK	ePA	0	0.633
2441	GFSK	ePA	39	0.633
2480	GFSK	ePA	78	0.633
2402	8DPSK	ePA	0	0.903
2441	8DPSK	ePA	39	0.903
2480	8DPSK	ePA	78	0.903

Table 7-12. Minimum Channel Separation ANT1

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 49 of 112

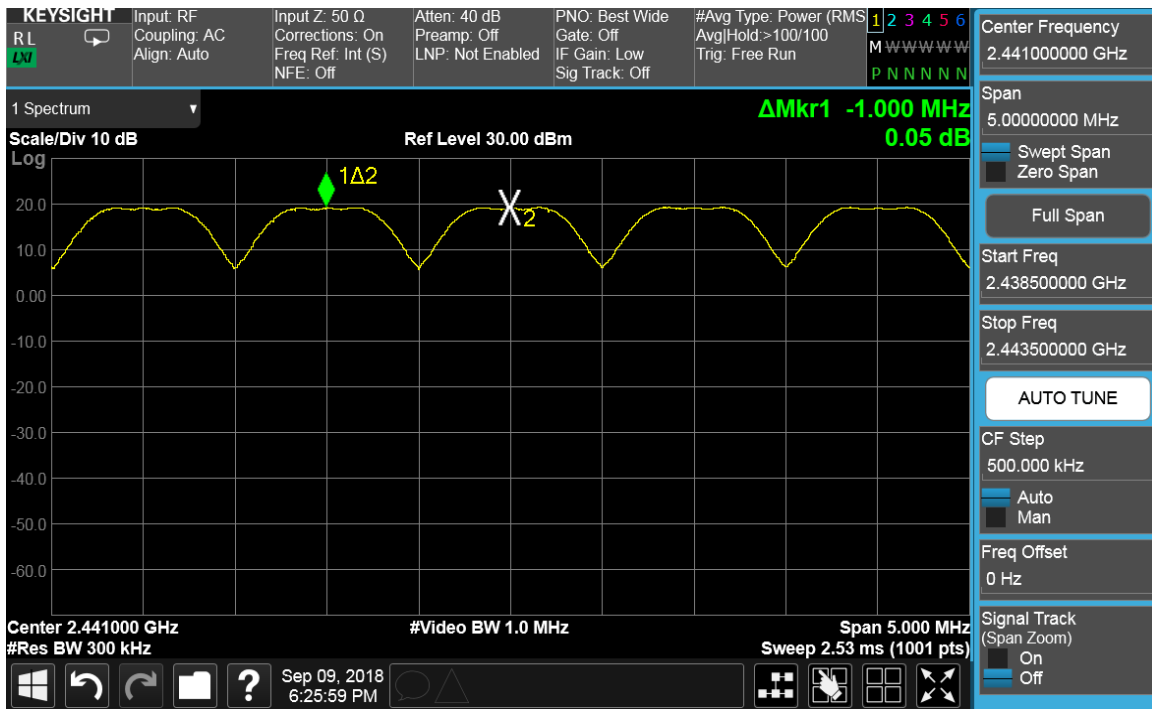

Plot 7-45. Channel Spacing Plot ANT1 (Bluetooth, GFSK, ePA)

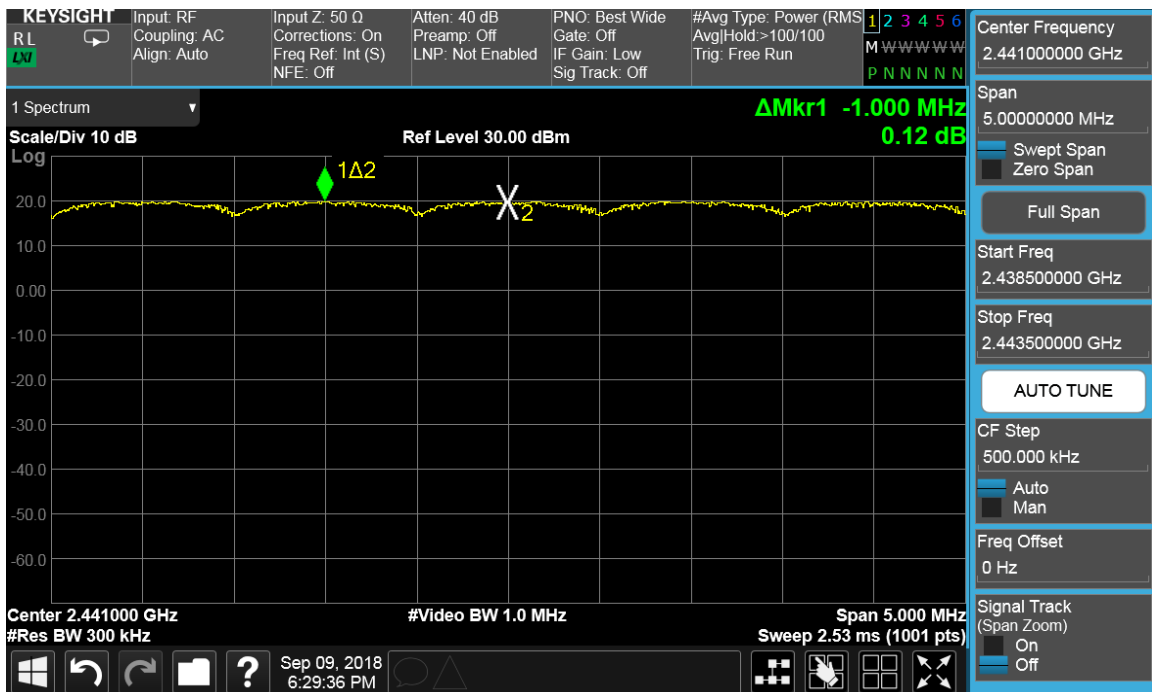

Plot 7-46. Channel Spacing Plot ANT1 (Bluetooth, 8DPSK, ePA)


FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 50 of 112

Antenna 2


Frequency [MHz]	Mod.	Power Scheme	Channel No.	Min. Channel Separation [MHz]
2402	GFSK	ePA	0	0.634
2441	GFSK	ePA	39	0.633
2480	GFSK	ePA	78	0.633
2402	8DPSK	ePA	0	0.903
2441	8DPSK	ePA	39	0.903
2480	8DPSK	ePA	78	0.903

Table 7-13. Minimum Channel Separation ANT2

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 51 of 112

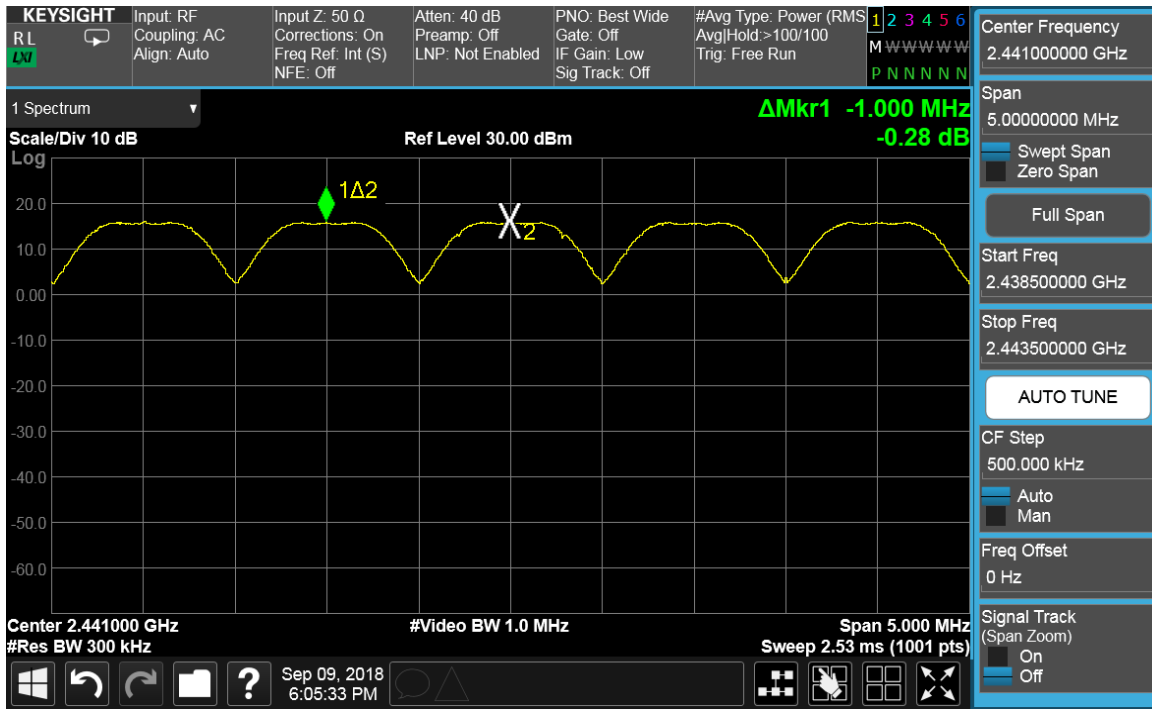

Plot 7-47. Channel Spacing Plot ANT2 (Bluetooth, GFSK, ePA)

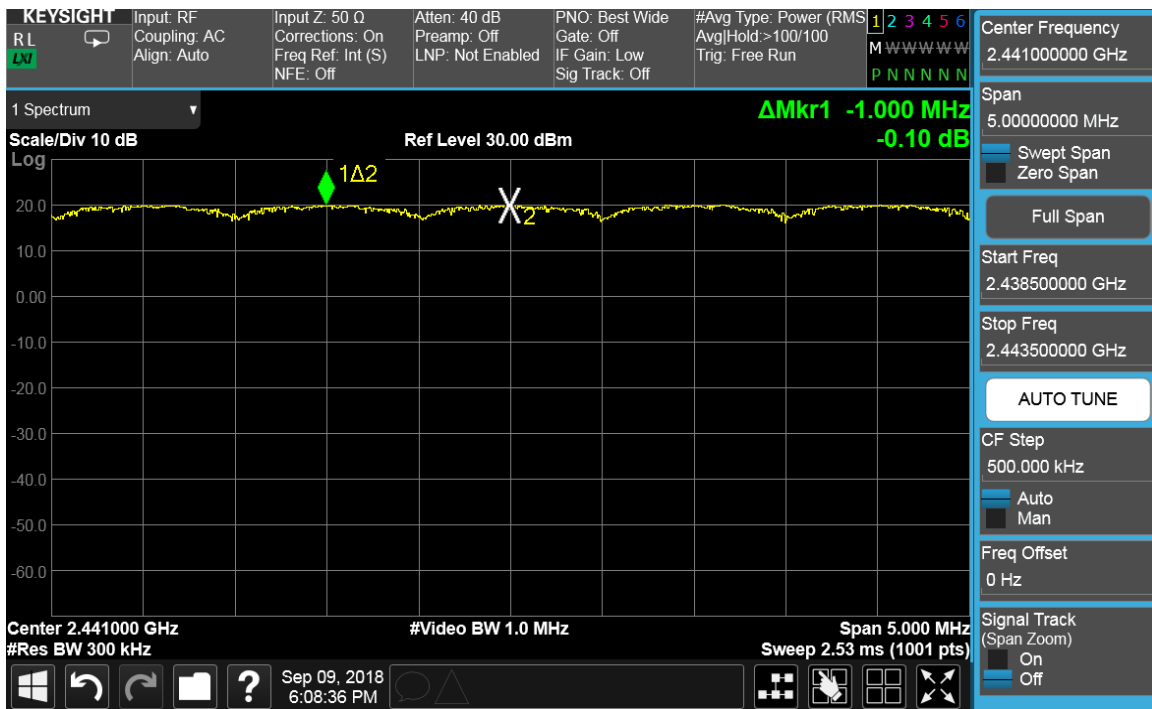

Plot 7-48. Channel Spacing Plot ANT2 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 52 of 112

7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. ***The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW $\leq$ channel spacing and $\gg 1/T$, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup

Test Notes

Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 53 of 112

Antenna 0




Plot 7-49. Time of Occupancy Plot ANT0(Bluetooth, GFSK, ePA)




Plot 7-50. Time of Occupancy Plot ANT0(Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 54 of 112

Antenna 1

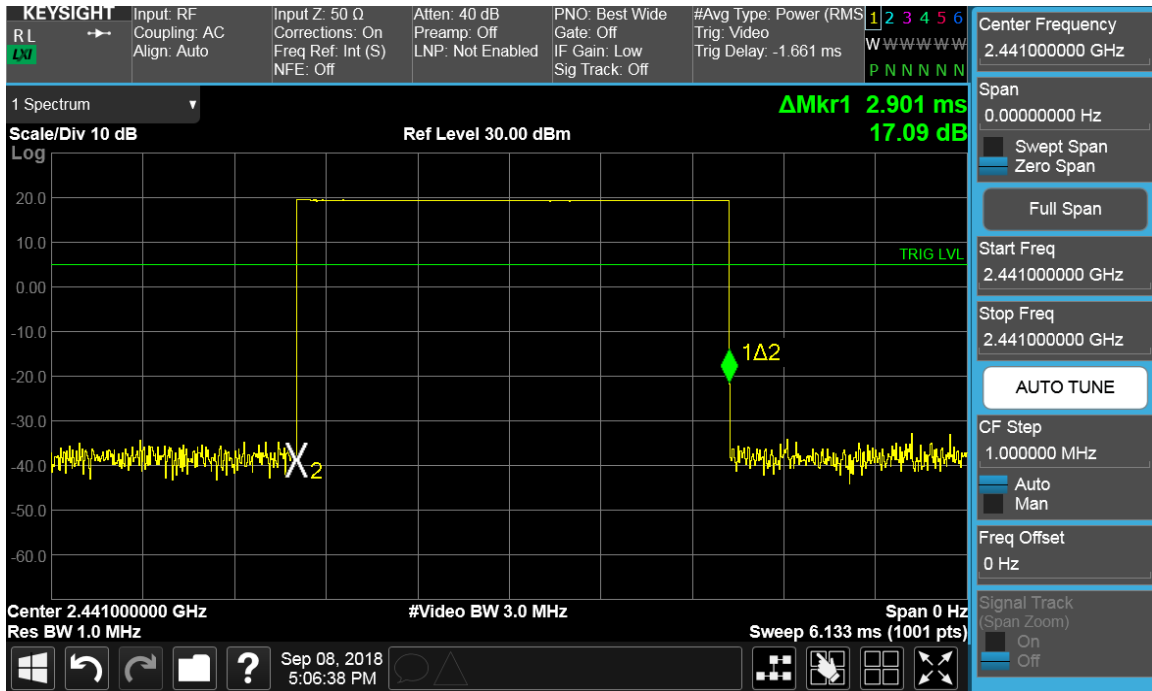


Plot 7-51. Time of Occupancy Plot ANT1(Bluetooth, GFSK, ePA)

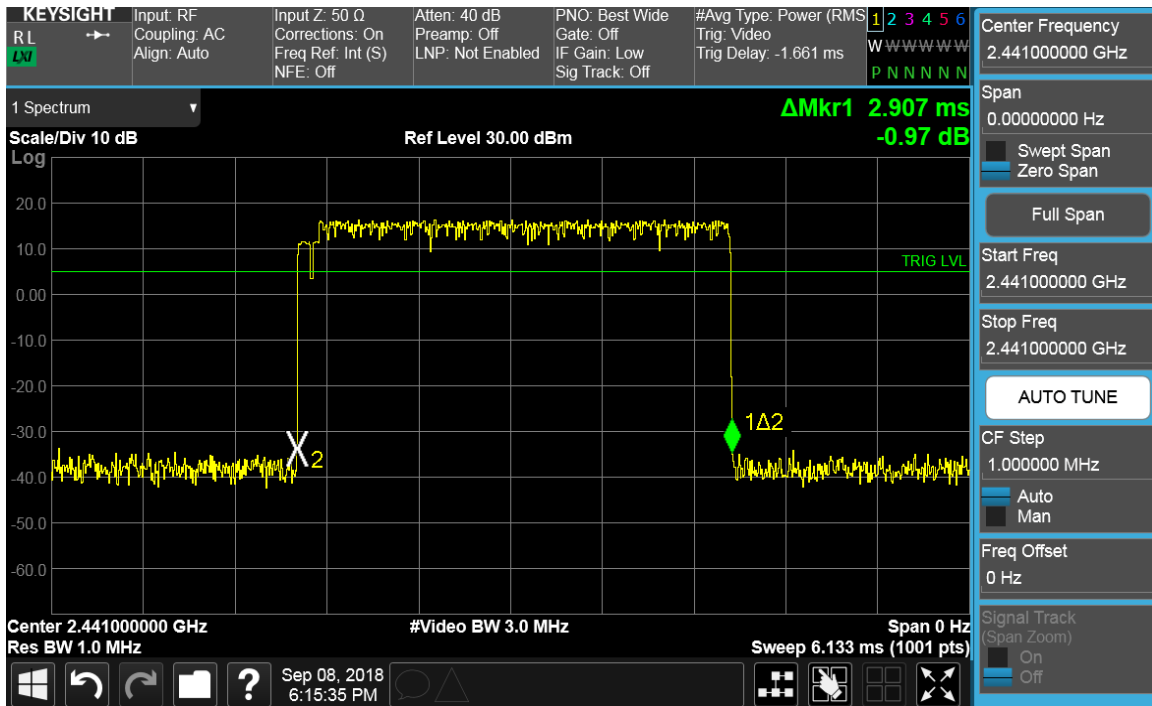

Plot 7-52. Time of Occupancy Plot ANT1(Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 55 of 112

Antenna 2

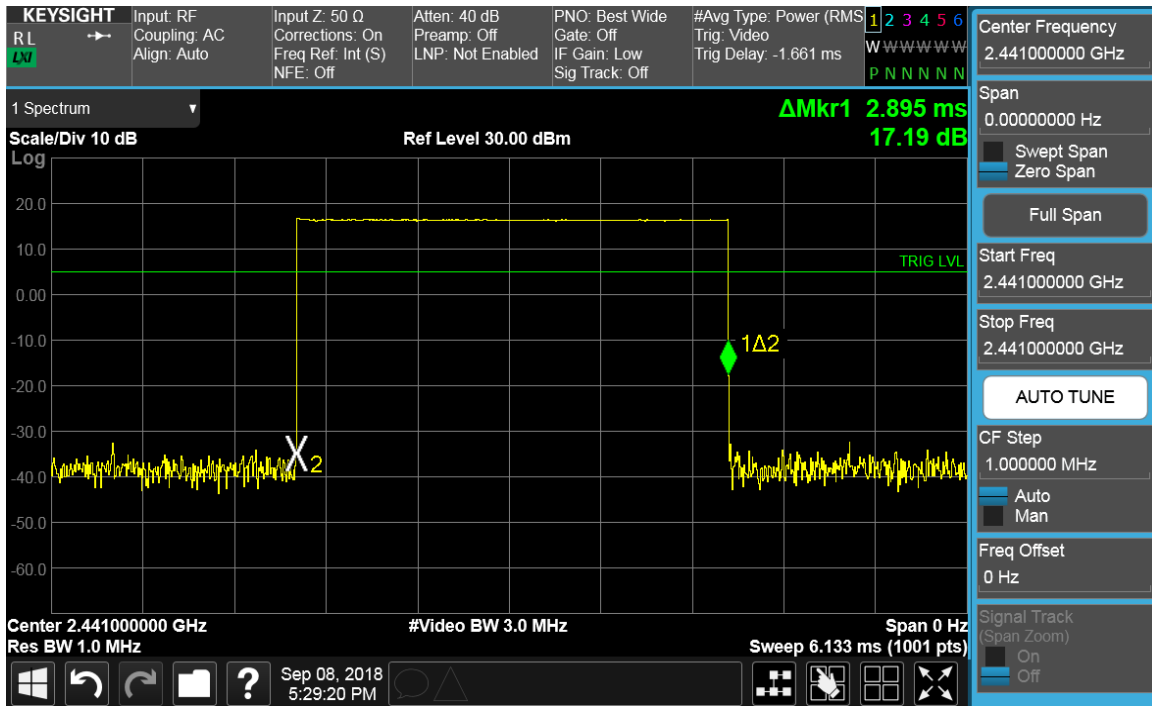

Plot 7-53. Time of Occupancy Plot ANT2(Bluetooth, GFSK, ePA)



Plot 7-54. Time of Occupancy Plot ANT2(Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 56 of 112

Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600 / 6 = 266.67$ hops/s/slot

- $400\text{ms} \times 79$ hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79$ channels = 3.38 hops/second (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6$ seconds = 106.67 hops (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.907 \text{ ms/channel}$ = 310.09 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of $800 / 6 = 133.3$ hops/s/slot

- $400\text{ms} \times 20$ hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20$ channels = 6.67 hops/second (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8$ seconds = 53.34 hops (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.907 \text{ ms/channel}$ = 155.06 ms (worst case dwell time for one channel in AFH mode)

The measured worst case dwell time is below the limit of 0.4s.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 57 of 112

7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(4)]

Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-6. Test Instrument & Measurement Setup


Test Notes

The frequency spectrum was broken up into two sub-ranges to clearly show all of the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.


Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 58 of 112

Antenna 0

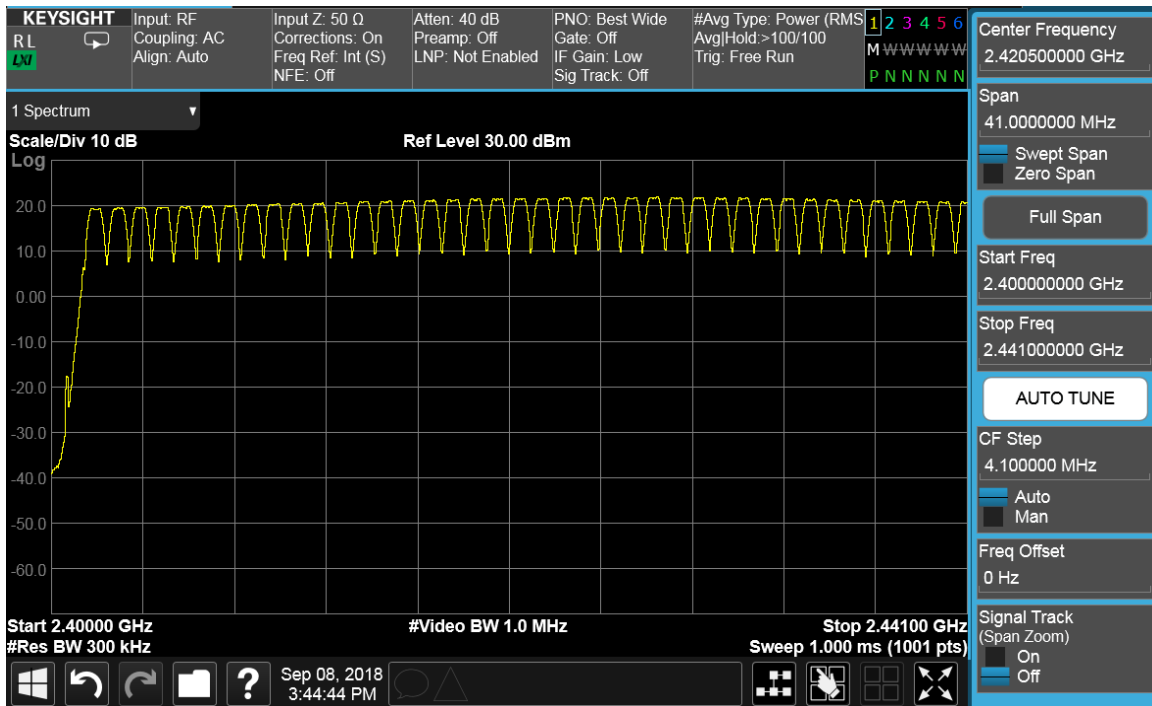

Plot 7-55. Low End Spectrum Channel Hopping Plot ANT0 (Bluetooth, GFSK, ePA)

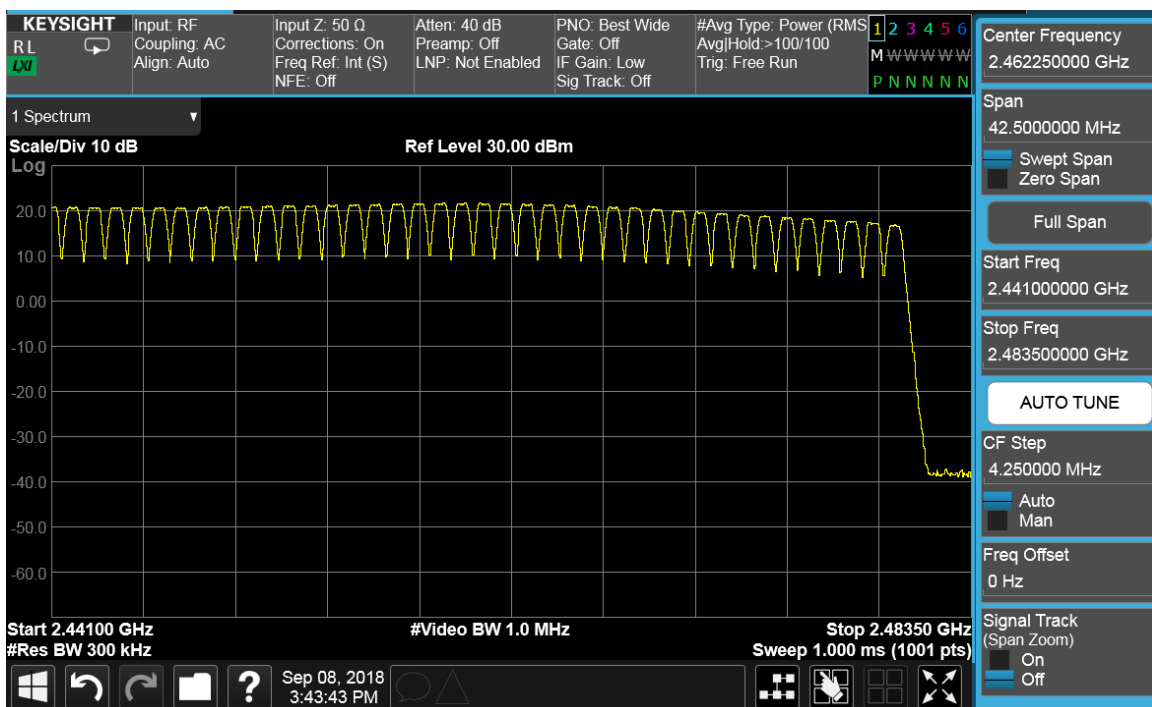


Plot 7-56. High End Spectrum Channel Hopping Plot ANT0 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 59 of 112




Plot 7-57. Low End Spectrum Channel Hopping Plot ANT0 (Bluetooth, 8DPSK, ePA)

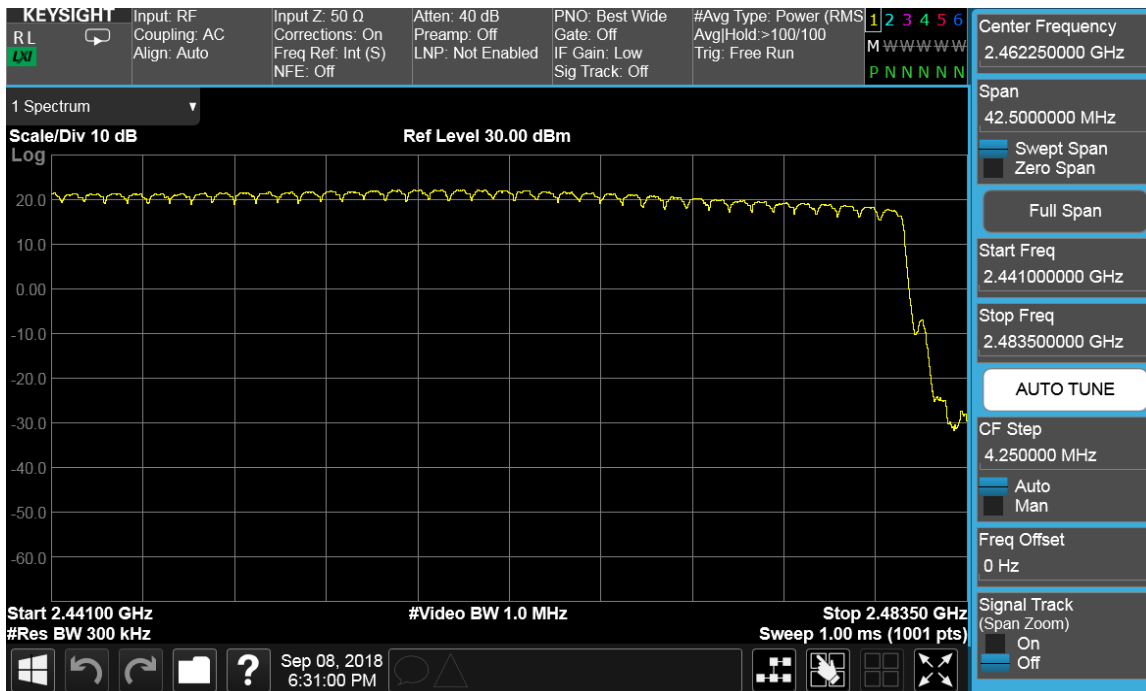


Plot 7-58. High End Spectrum Channel Hopping Plot ANT0 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 60 of 112

Antenna 1

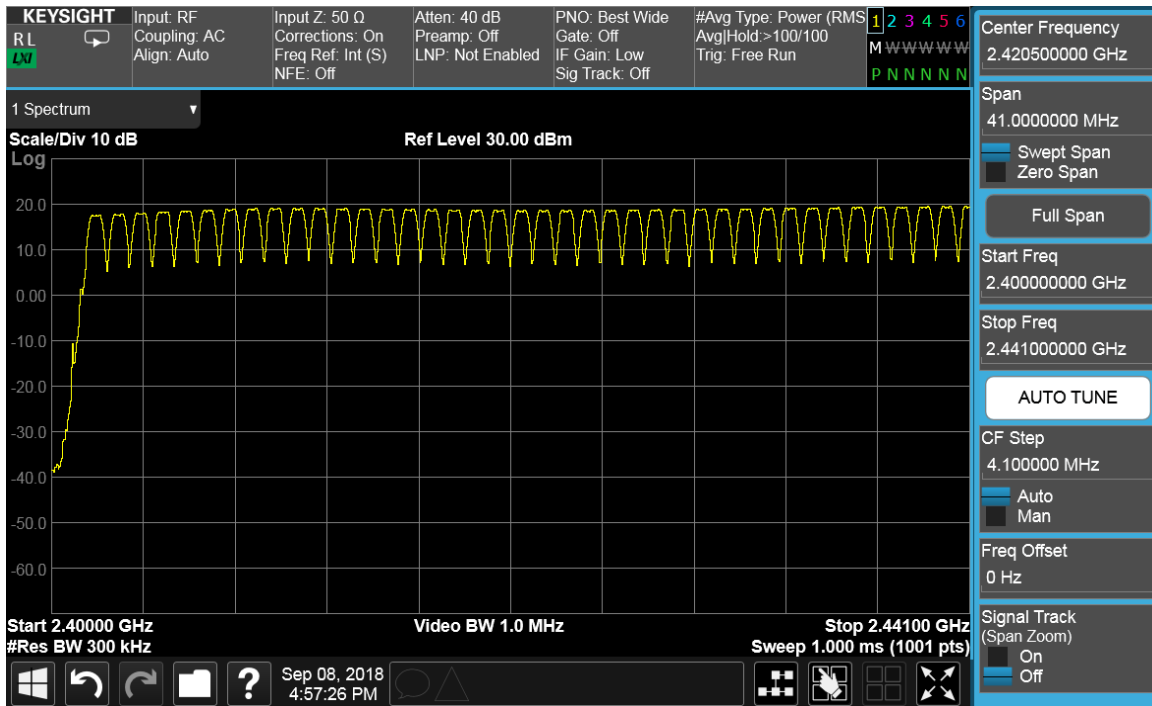


Plot 7-59. Low End Spectrum Channel Hopping Plot ANT1 (Bluetooth, GFSK, ePA)

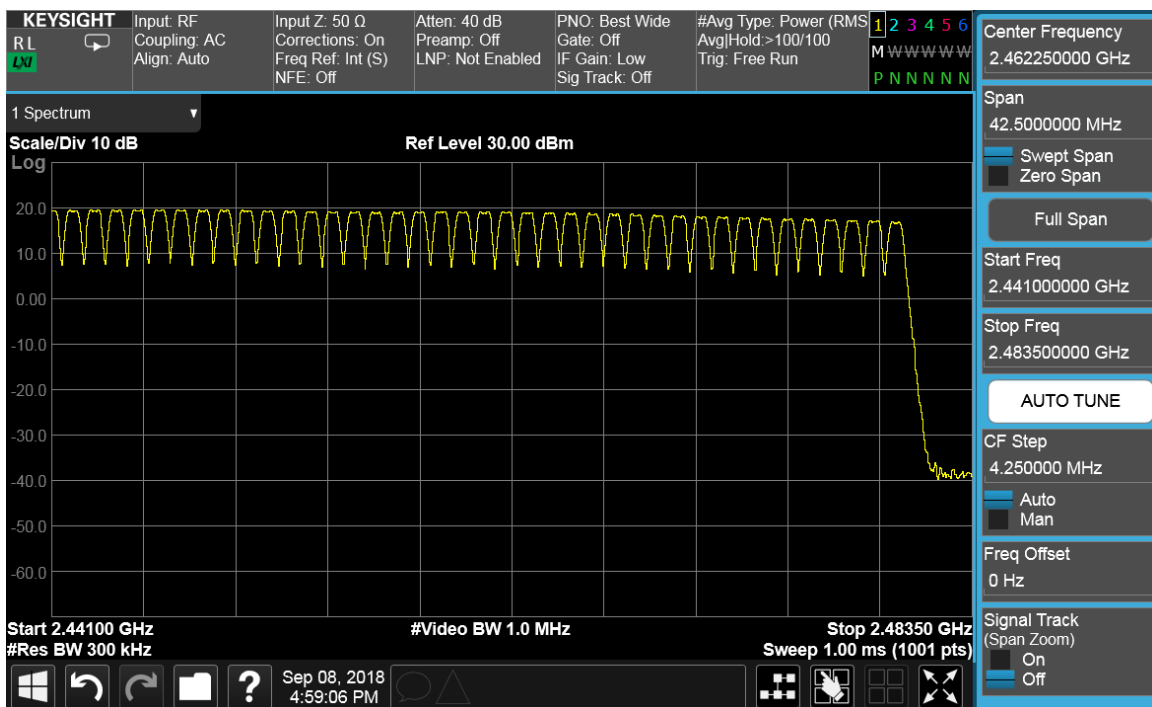


Plot 7-60. High End Spectrum Channel Hopping Plot ANT1 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 61 of 112

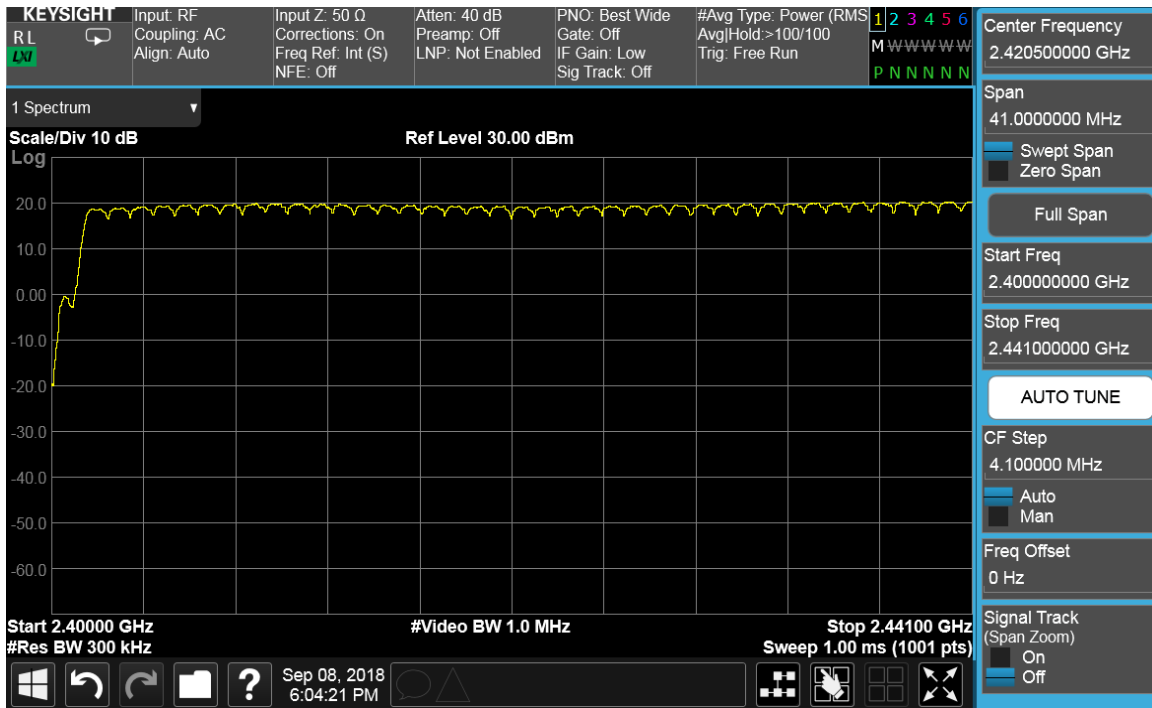


Plot 7-61. Low End Spectrum Channel Hopping Plot ANT1 (Bluetooth, 8DPSK, ePA)

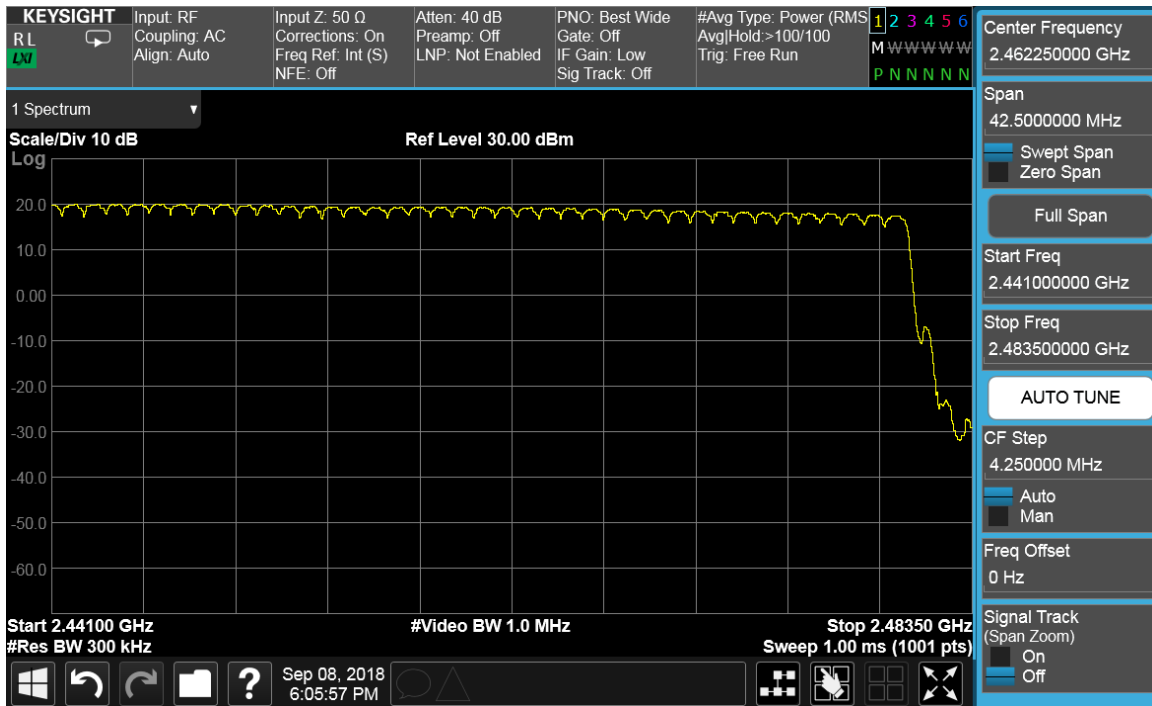


Plot 7-62. High End Spectrum Channel Hopping Plot ANT1 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2013	PCTEST ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 62 of 112	

Antenna 2

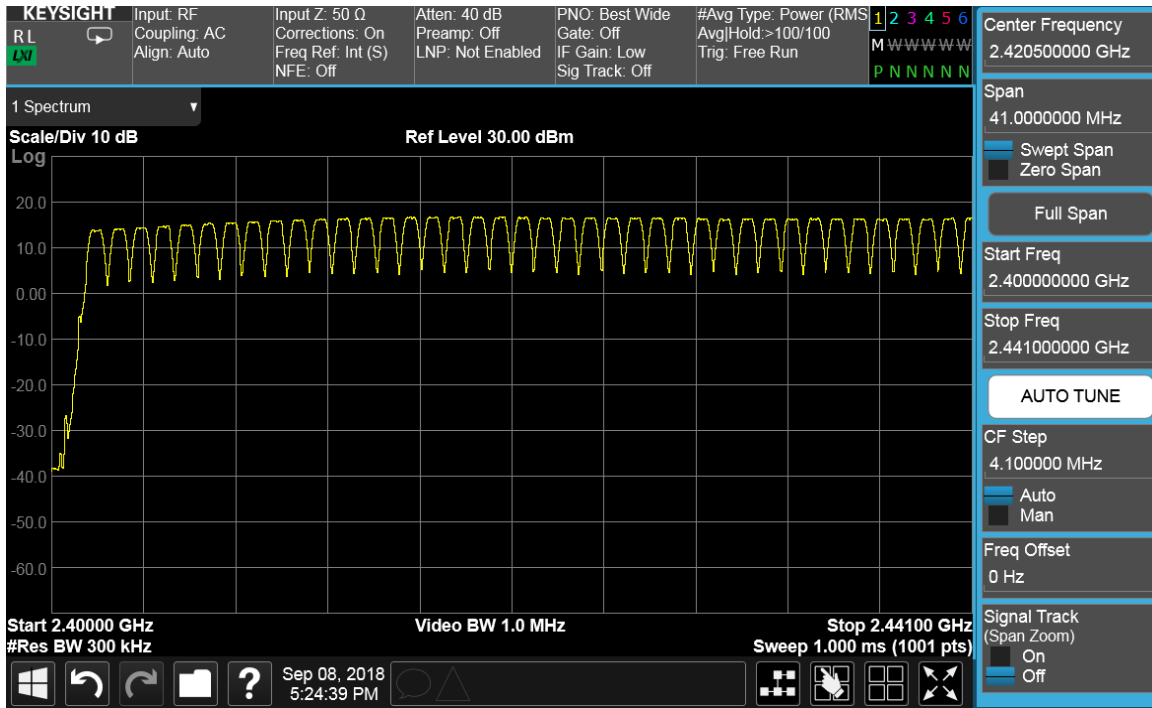


Plot 7-63. Low End Spectrum Channel Hopping Plot ANT2 (Bluetooth, GFSK, ePA)

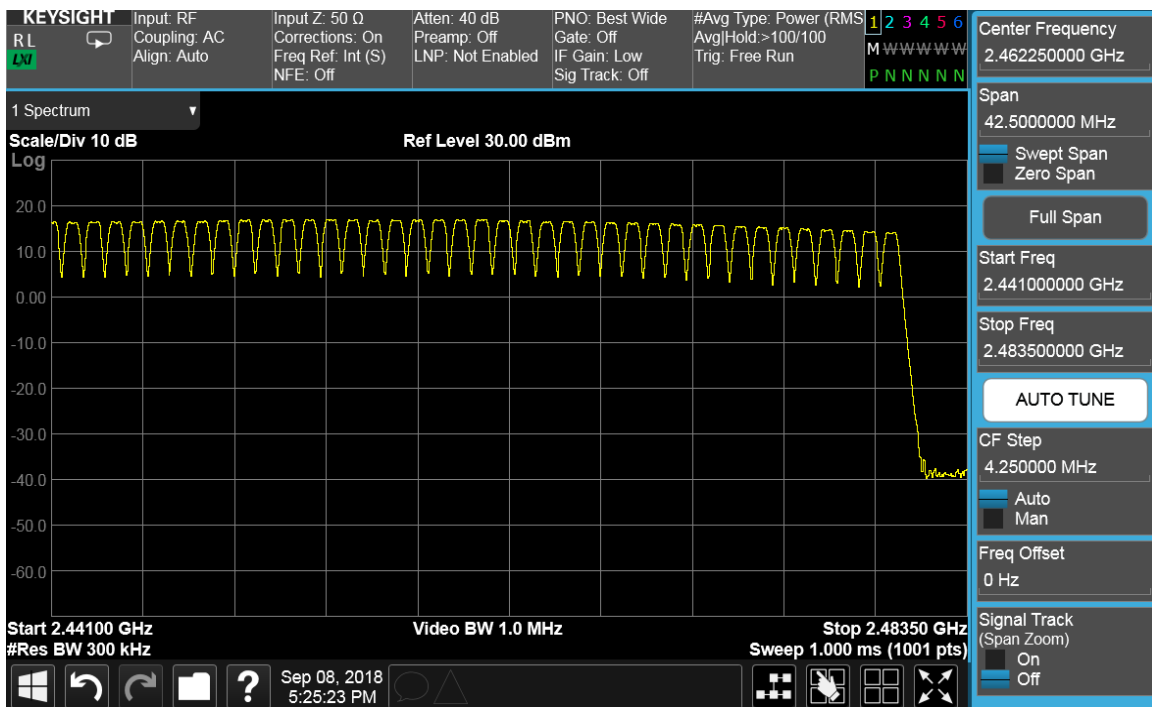


Plot 7-64. High End Spectrum Channel Hopping Plot ANT2 (Bluetooth, GFSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 63 of 112

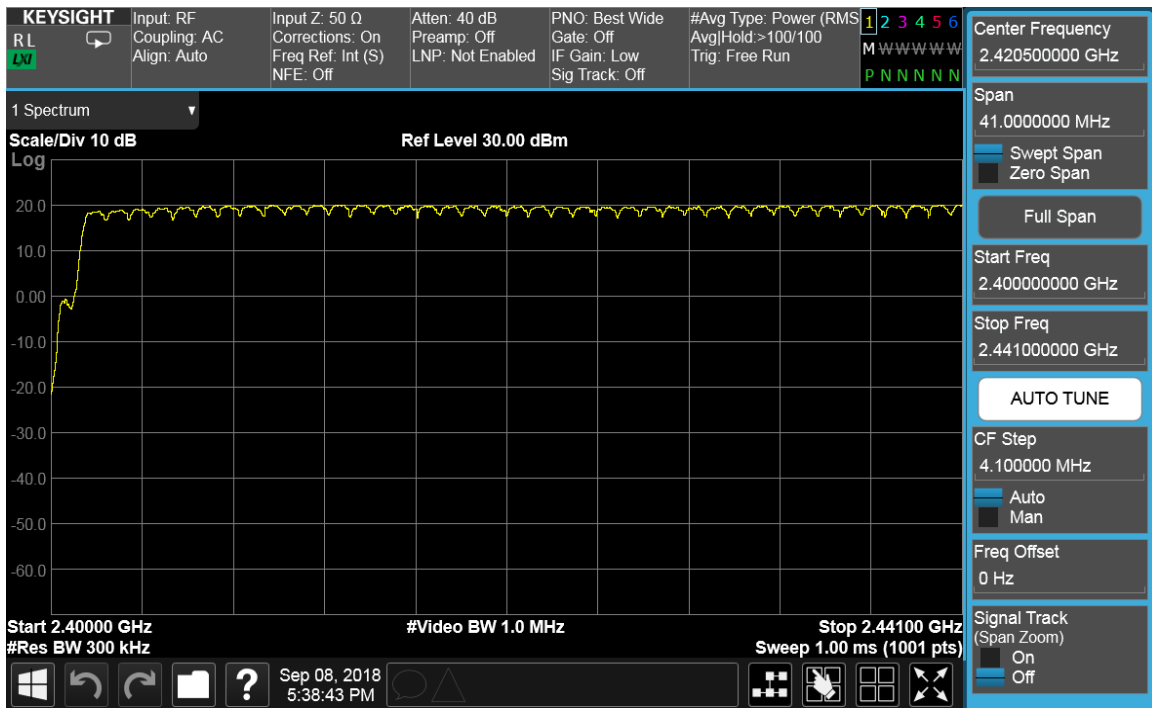

Plot 7-65. Low End Spectrum Channel Hopping Plot ANT2 (Bluetooth, 8DPSK, ePA)

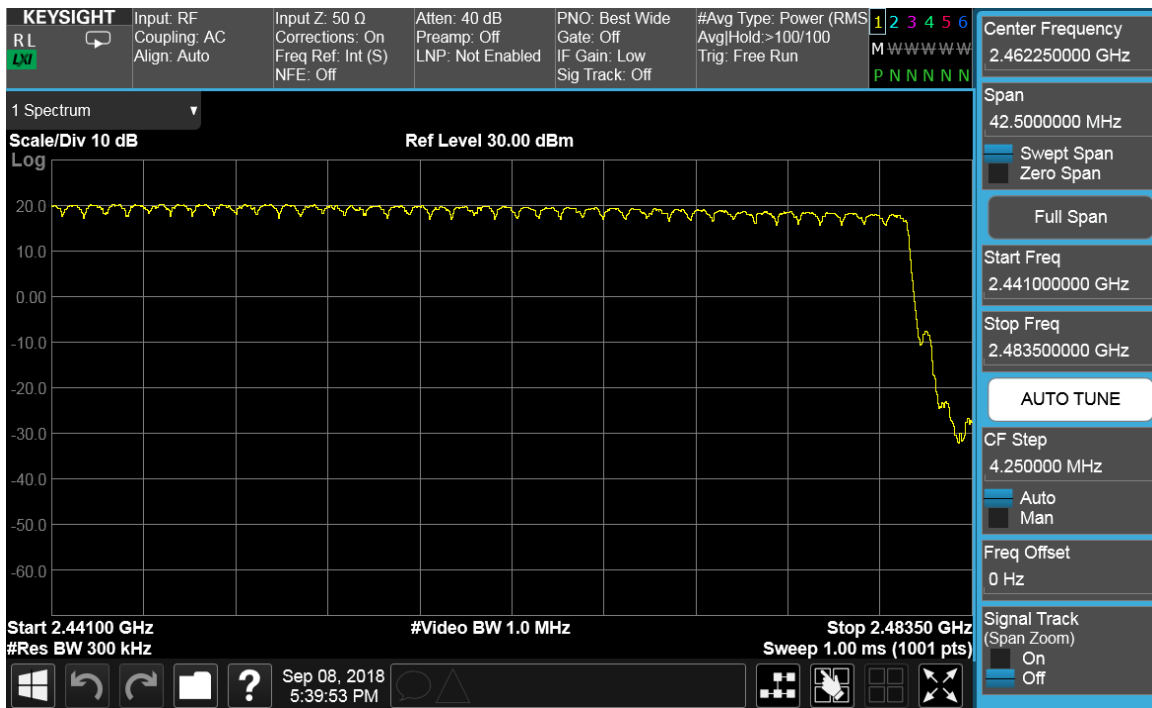

Plot 7-66. High End Spectrum Channel Hopping Plot ANT2 (Bluetooth, 8DPSK, ePA)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 64 of 112

7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10th harmonic of the fundamental transmit frequency. ***The maximum permissible out-of-band emission level is 20 dBc.***

Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-7. Test Instrument & Measurement Setup


Test Notes

Out-of-band conducted spurious emissions were investigated for all data rates and the worst case emissions were found with the EUT transmitting at 1Mbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.


Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 65 of 112

Antenna 0

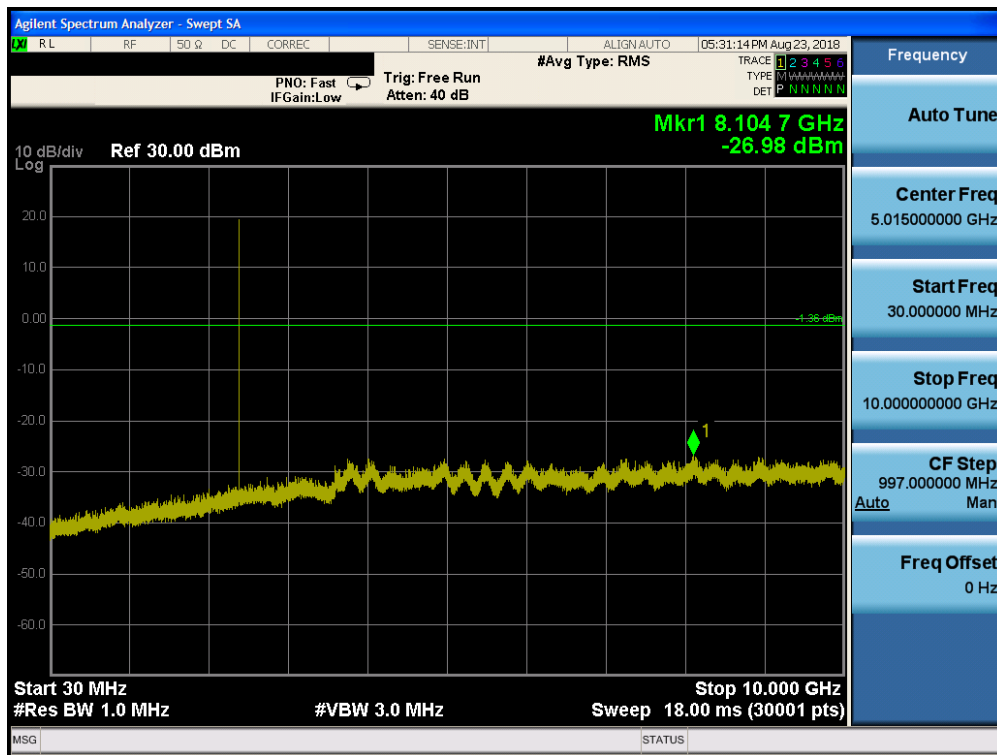


Plot 7-67. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 0)

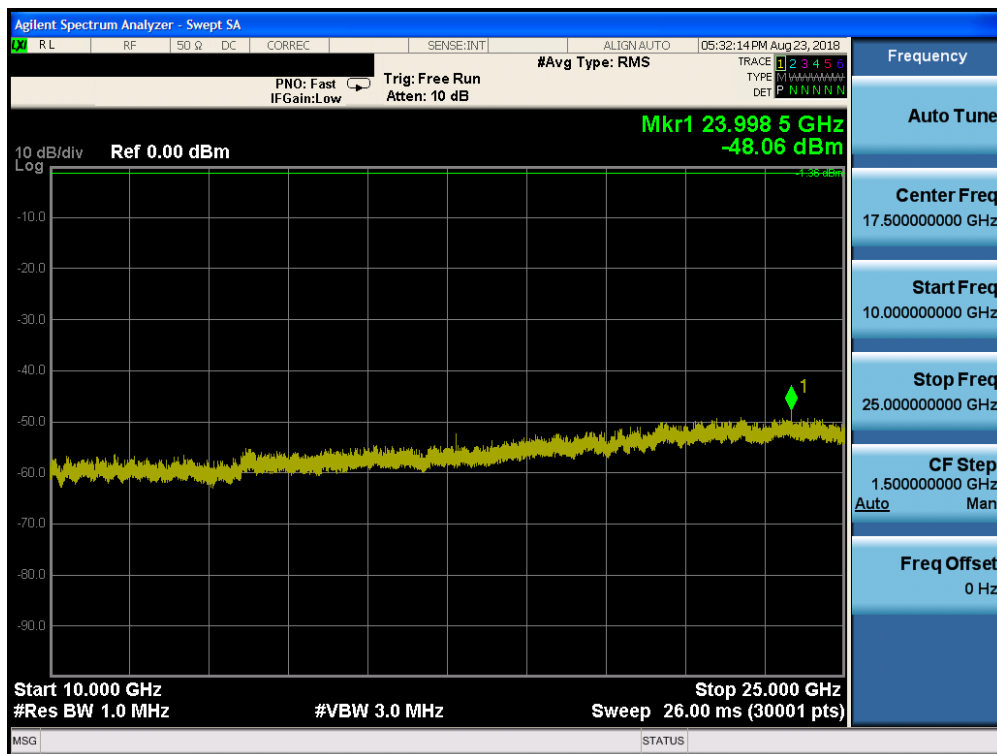


Plot 7-68. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 66 of 112

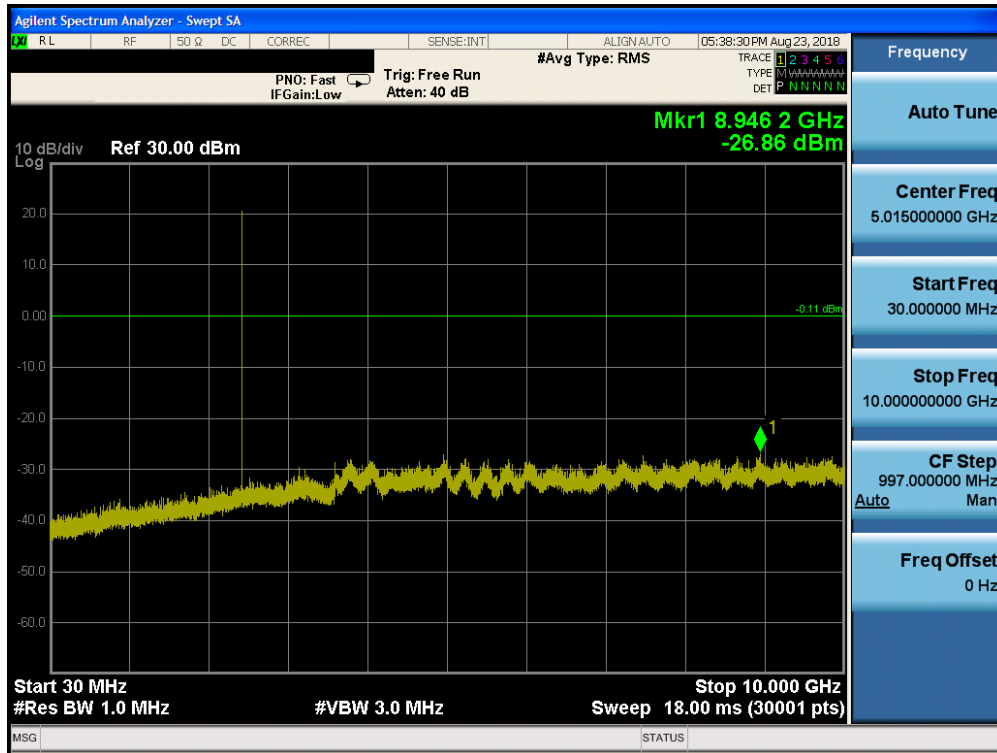


Plot 7-69. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 39)

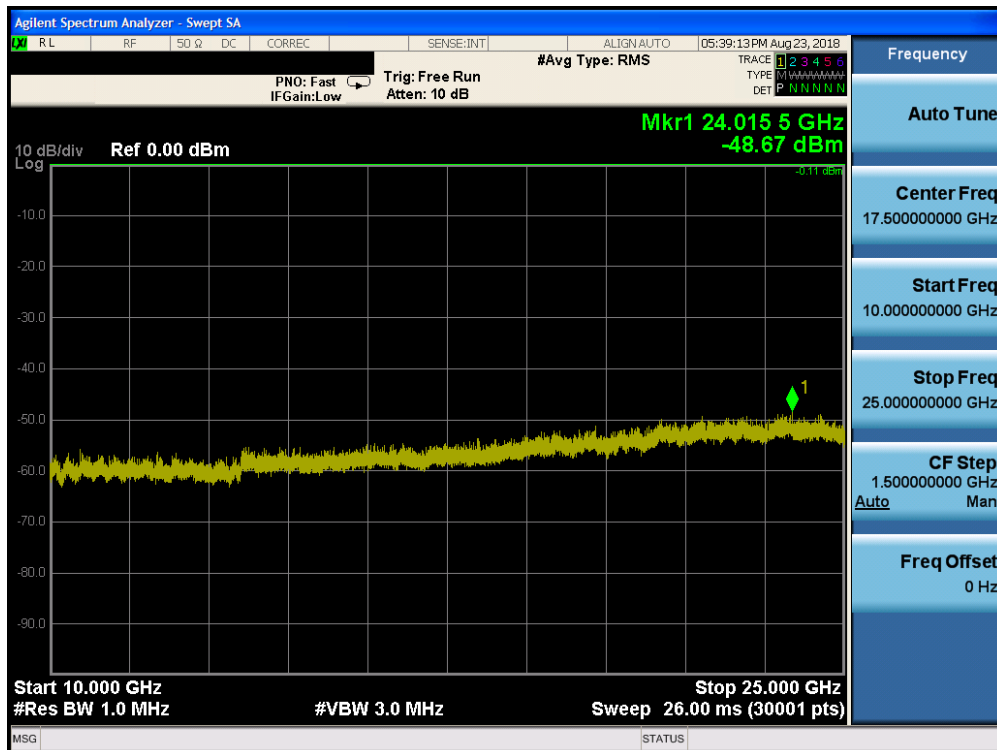


Plot 7-70. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 67 of 112

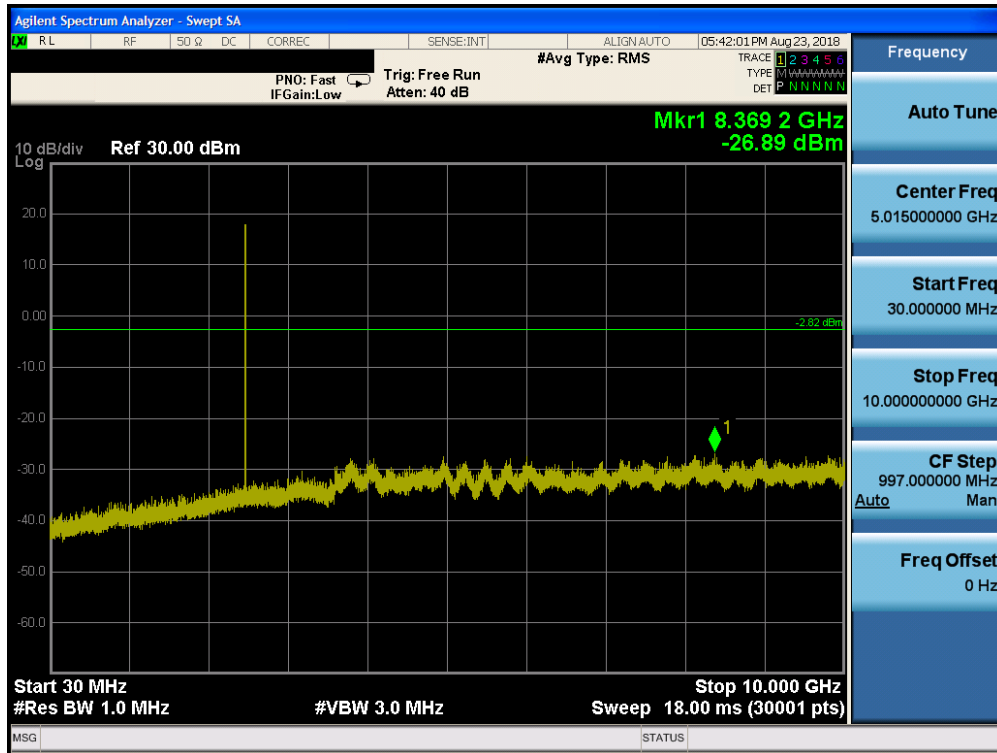


Plot 7-71. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 78)

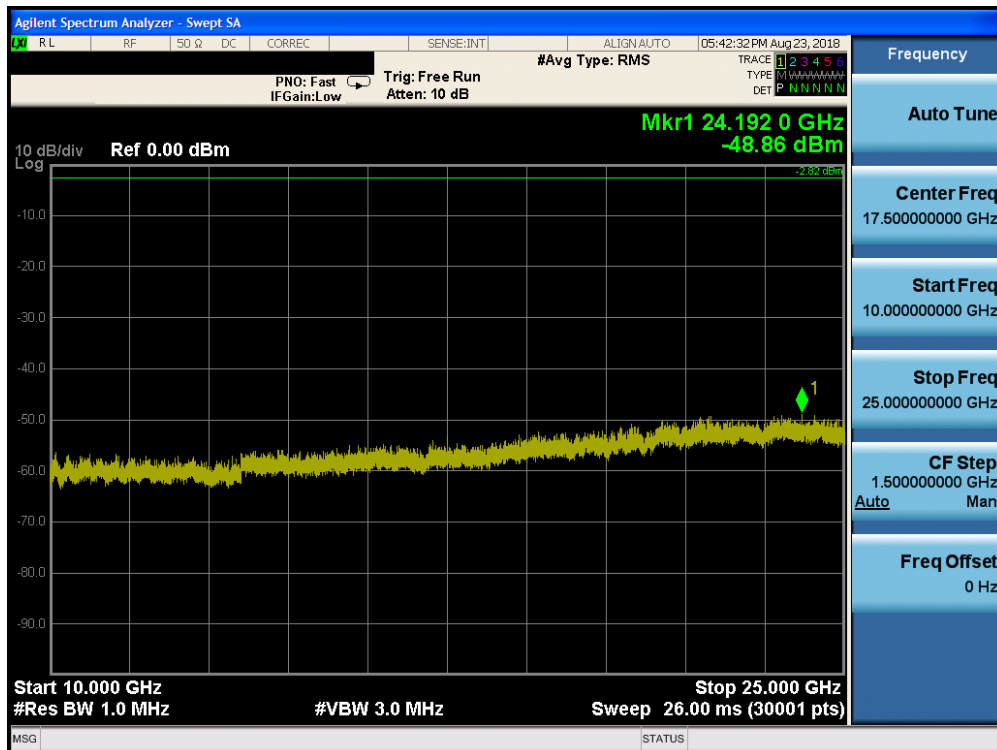


Plot 7-72. Conducted Spurious Plot ANT 0 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 68 of 112

Antenna 1

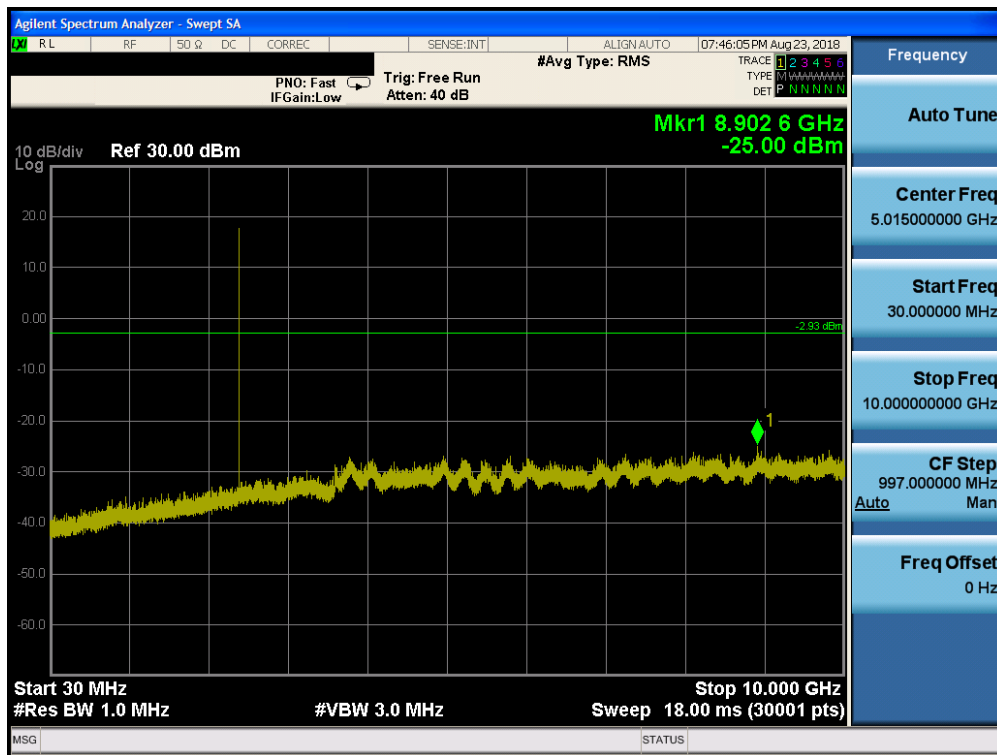


Plot 7-73. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 0)

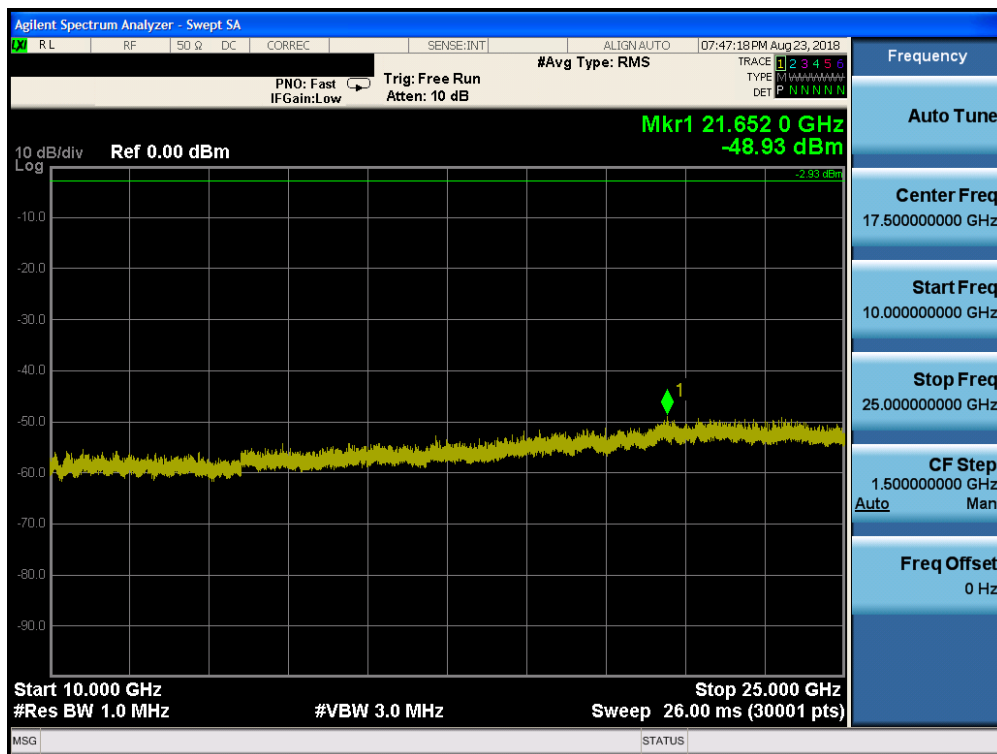


Plot 7-74. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 69 of 112

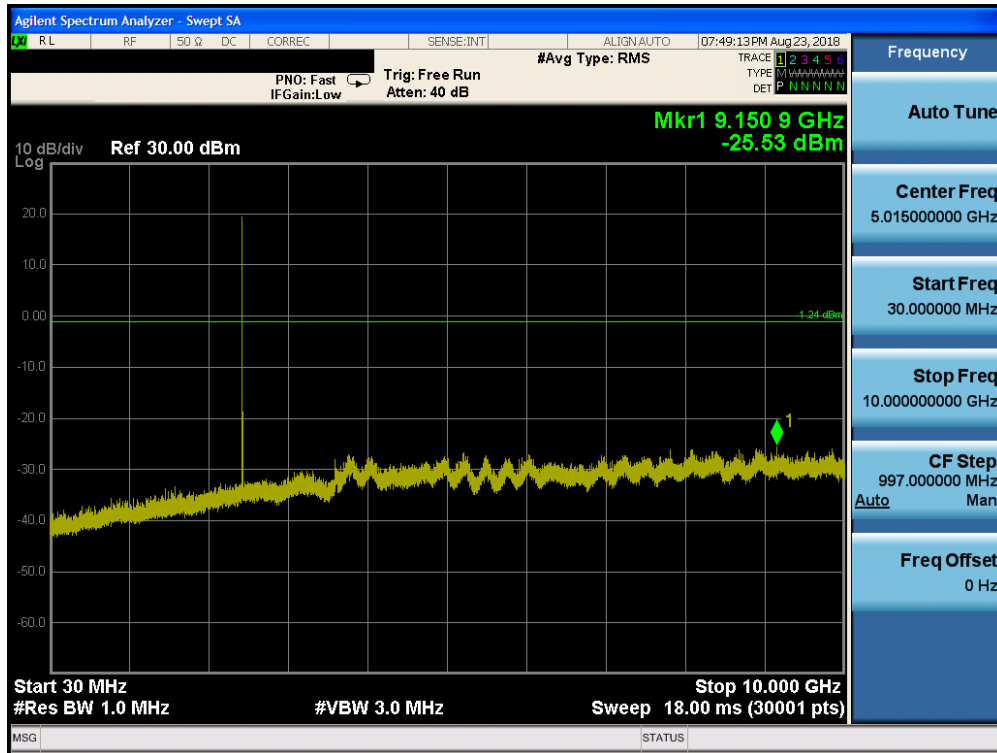


Plot 7-75. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 39)

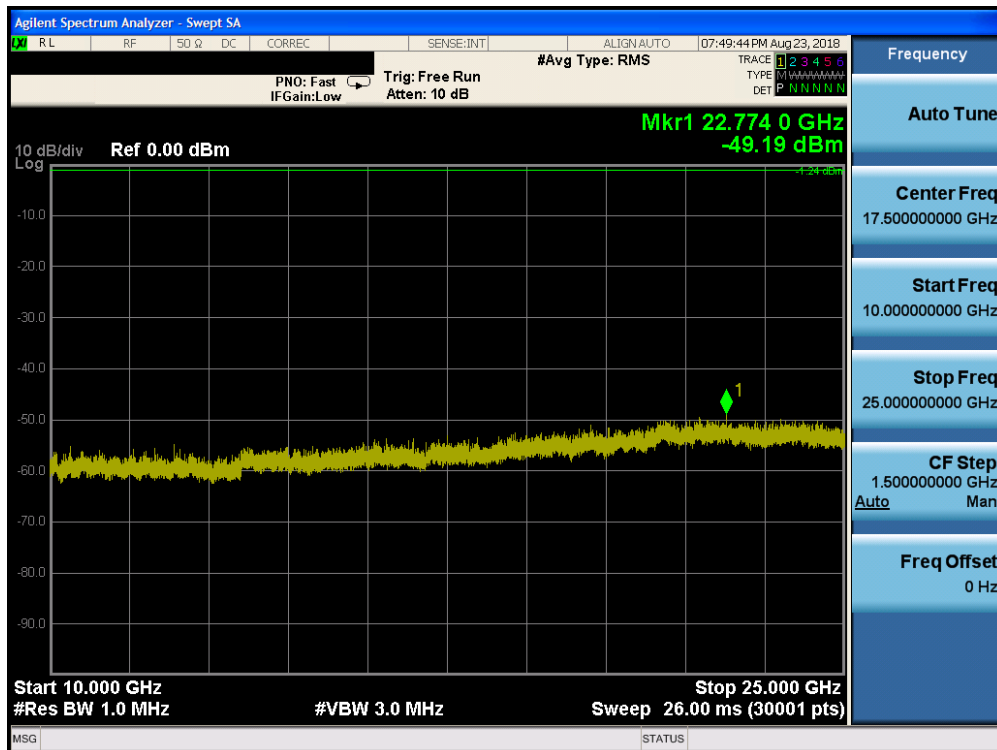


Plot 7-76. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 70 of 112

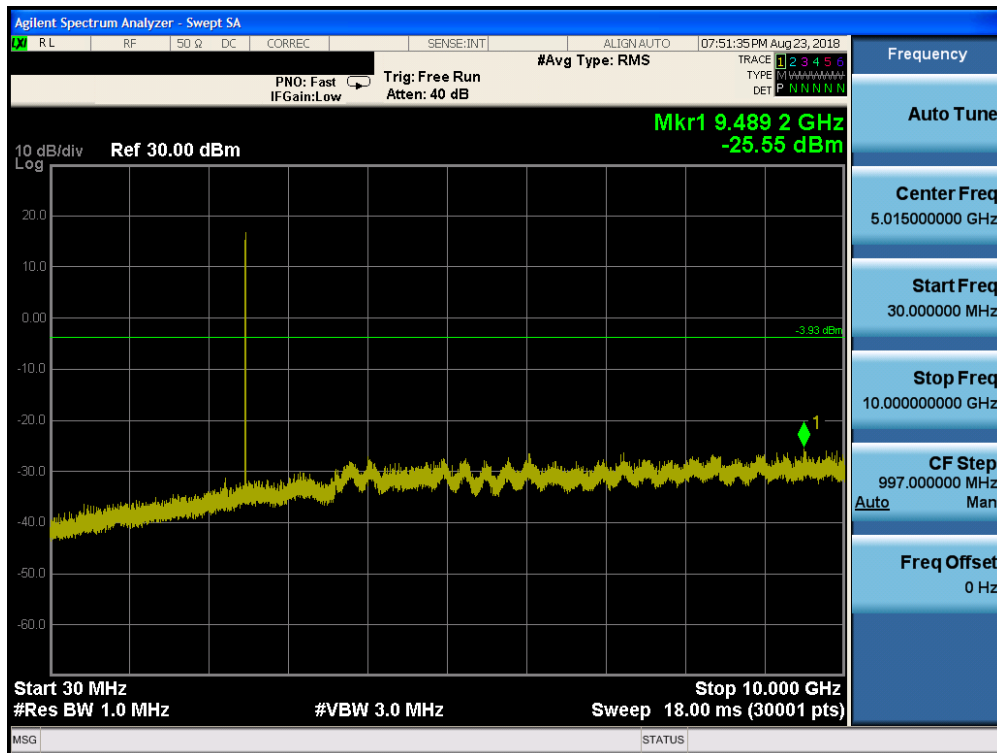


Plot 7-77. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 78)

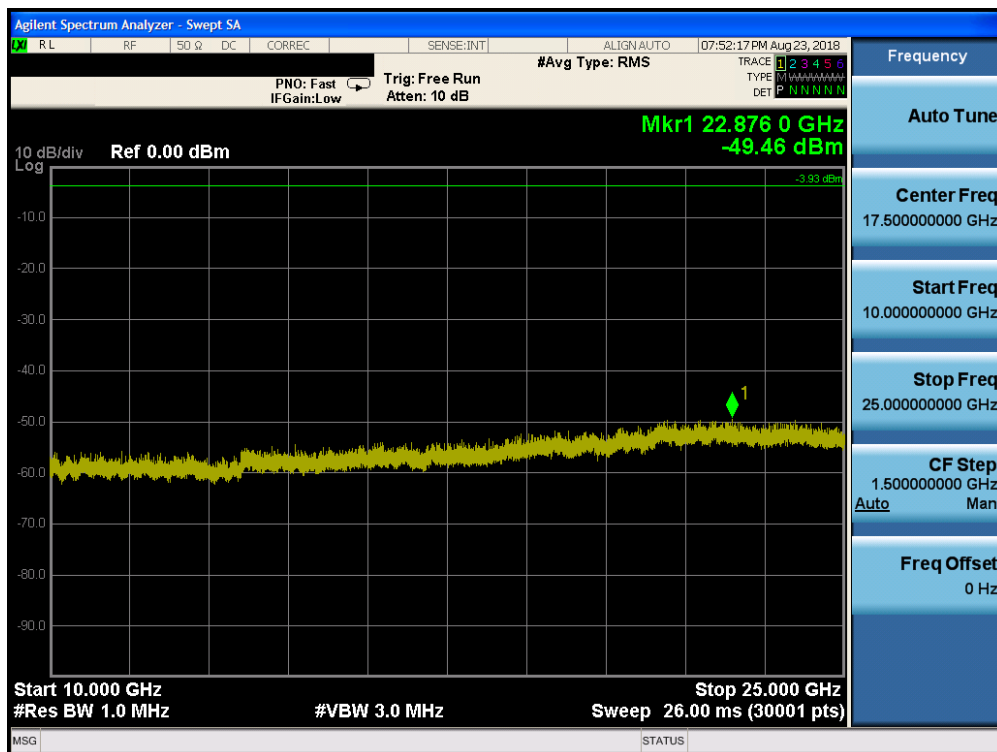


Plot 7-78. Conducted Spurious Plot ANT 1 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 71 of 112

Antenna 2

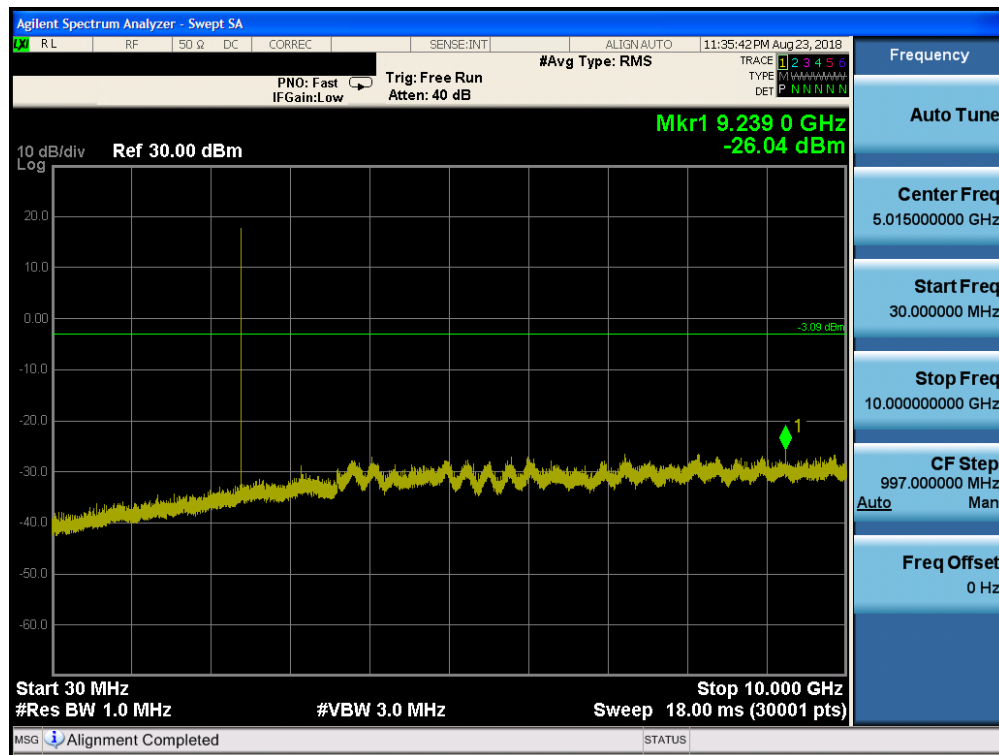


Plot 7-79. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 0)

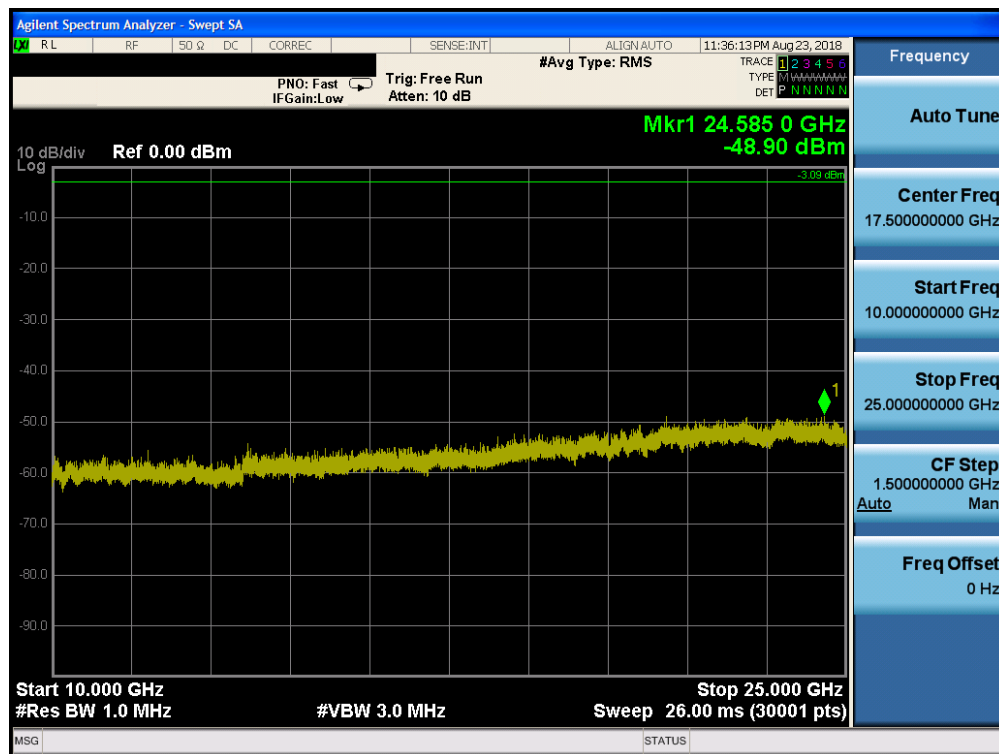


Plot 7-80. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 0)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 72 of 112

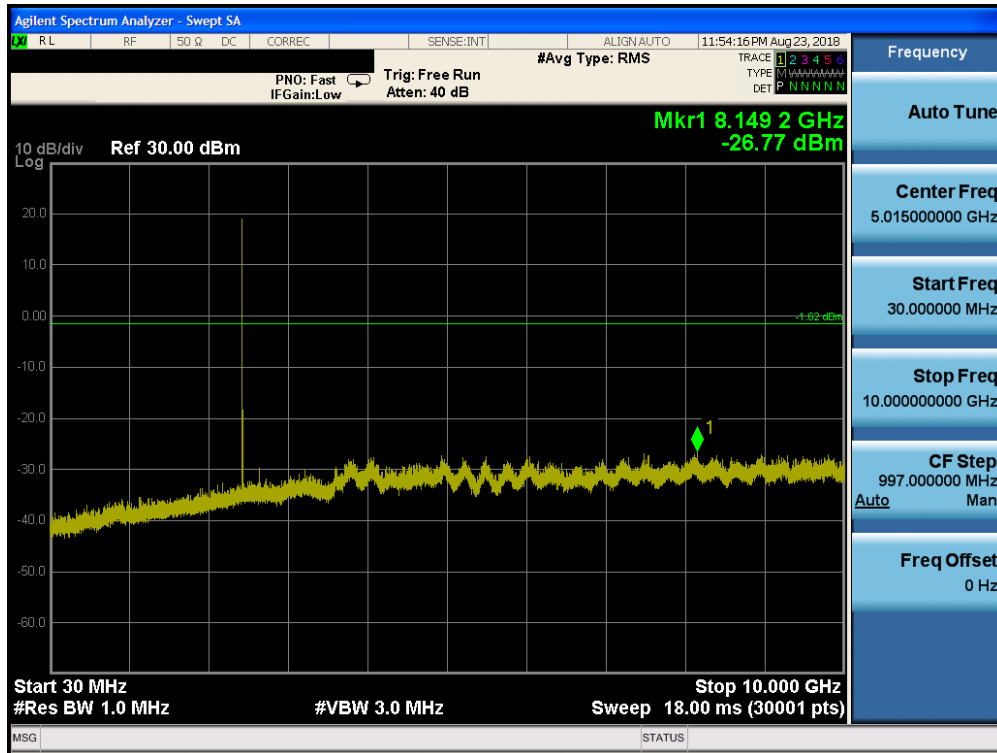


Plot 7-81. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 39)

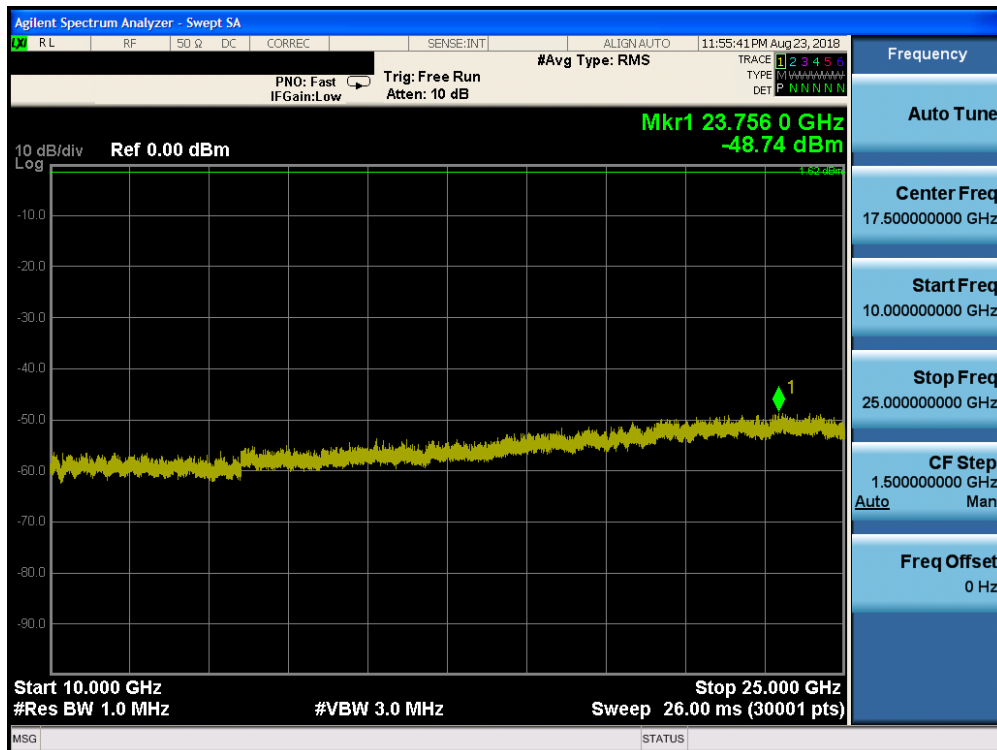


Plot 7-82. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA Ch. 39)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 73 of 112

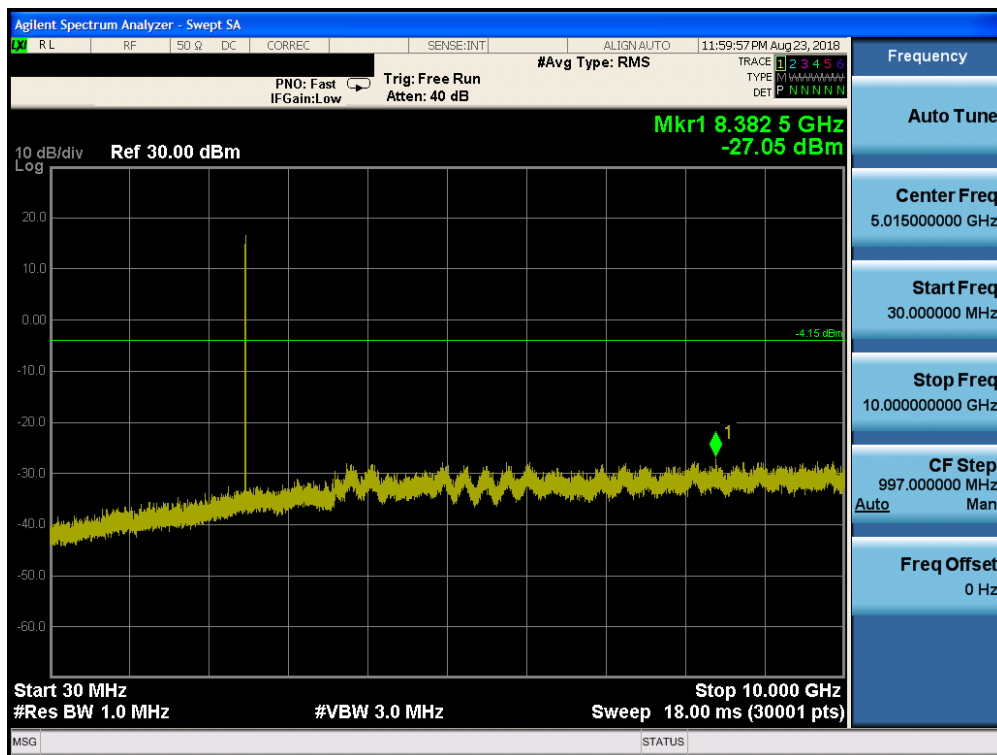

Plot 7-83. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 78)

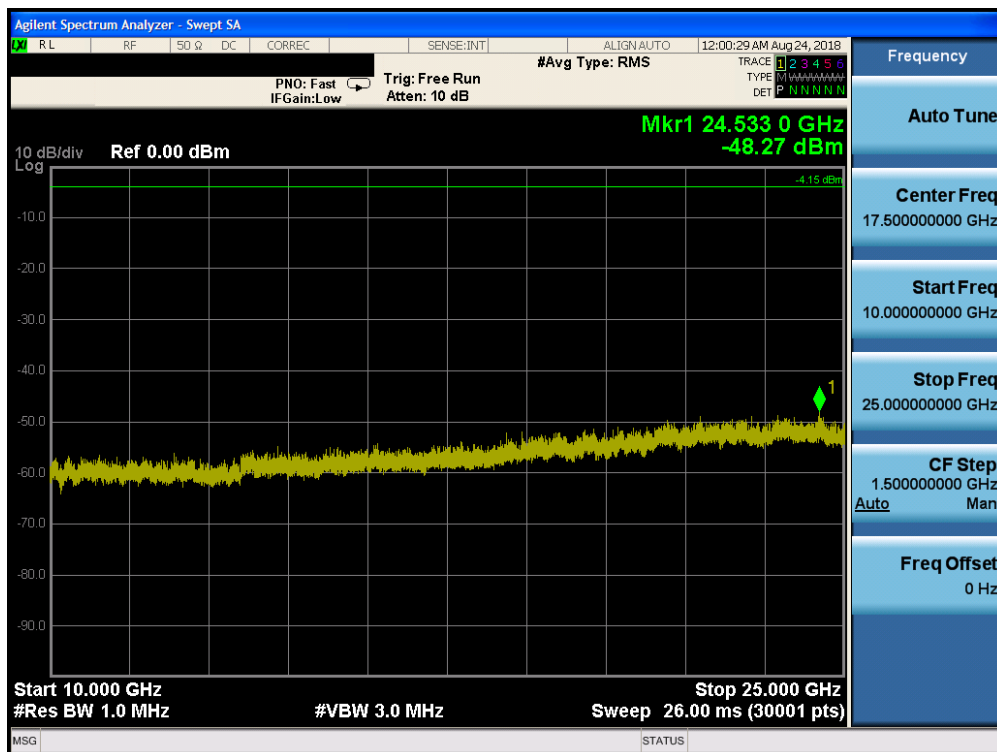

Plot 7-84. Conducted Spurious Plot ANT 2 (Bluetooth, GFSK, ePA – Ch. 78)

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 74 of 112

7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-14 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-14. Radiated Limits

Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-15 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 75 of 112

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

Table 7-15. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

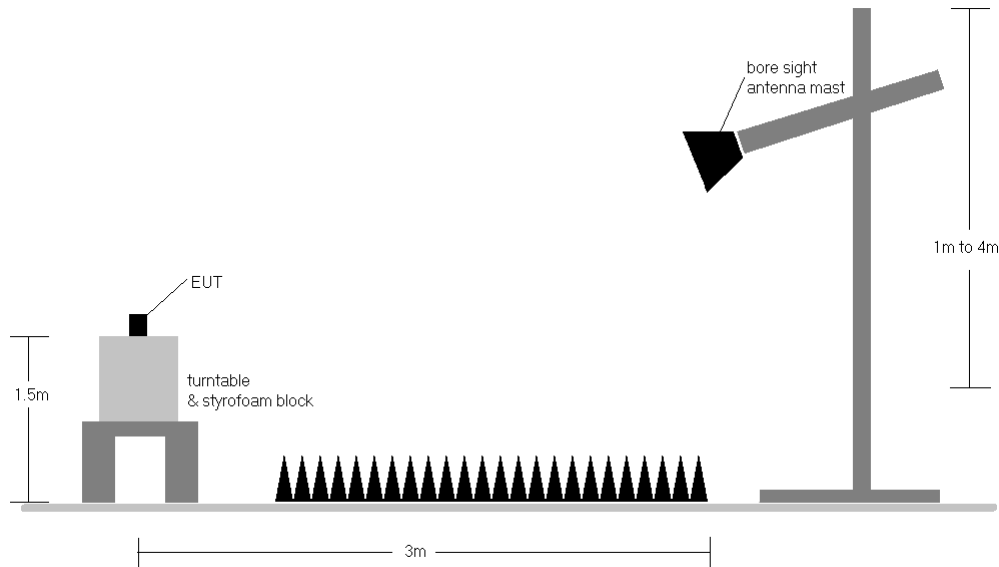


Figure 7-8. Radiated Test Setup >1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-14.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. The duty cycle correction factor was not applied to noise floor measurements.
6. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. Both power schemes were investigated, and only the worst case is reported.

FCC ID: BCGA2013	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 76 of 112

Sample Calculation


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]} + \text{Duty Cycle Correction }_{[dB]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 77 of 112


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Antenna 0

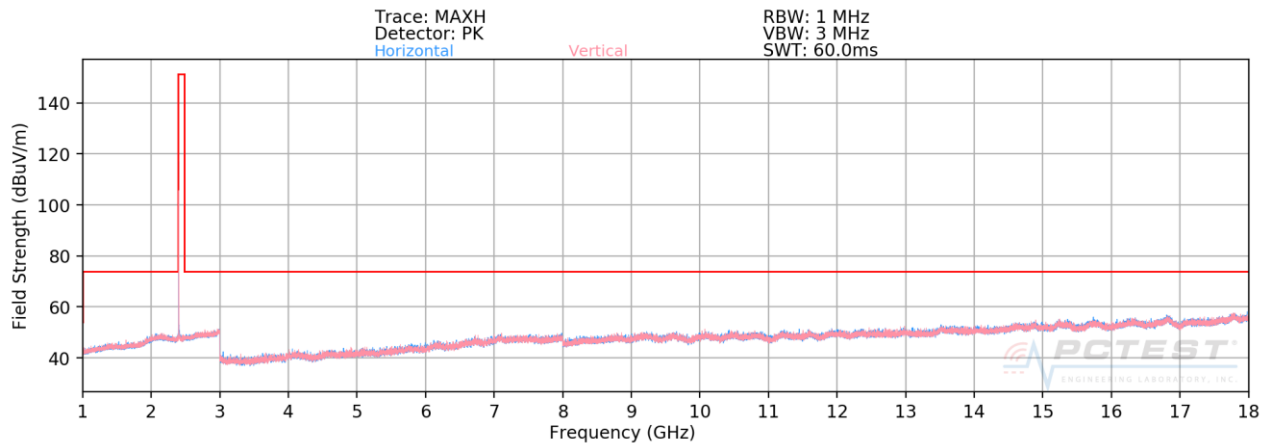

Plot 7-85. Radiated Spurious Plot above 1GHz ANT0 (BT GFSK ePA – Ch. 0)

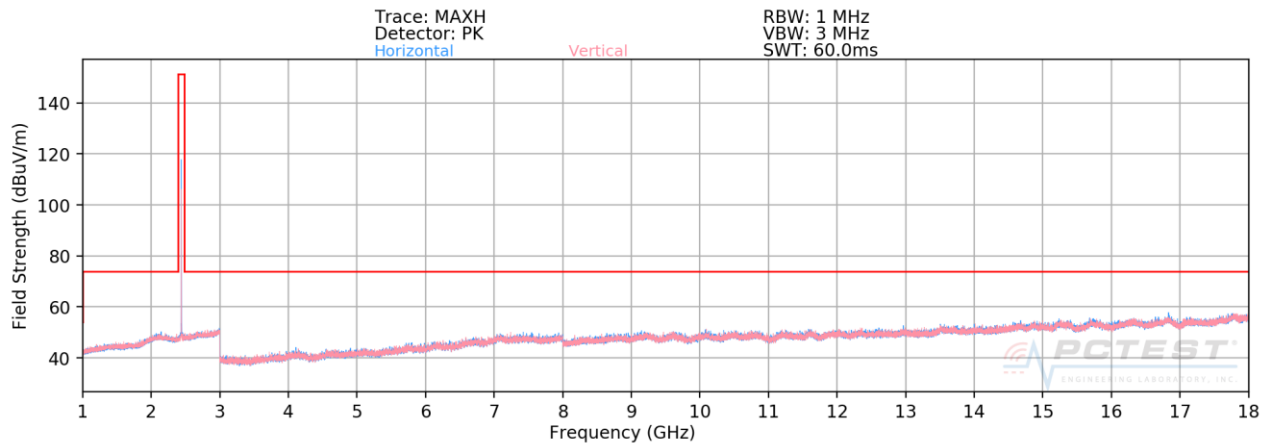

Plot 7-86. Radiated Spurious Plot above 1GHz ANT0 (BT GFSK ePA – Ch. 39)

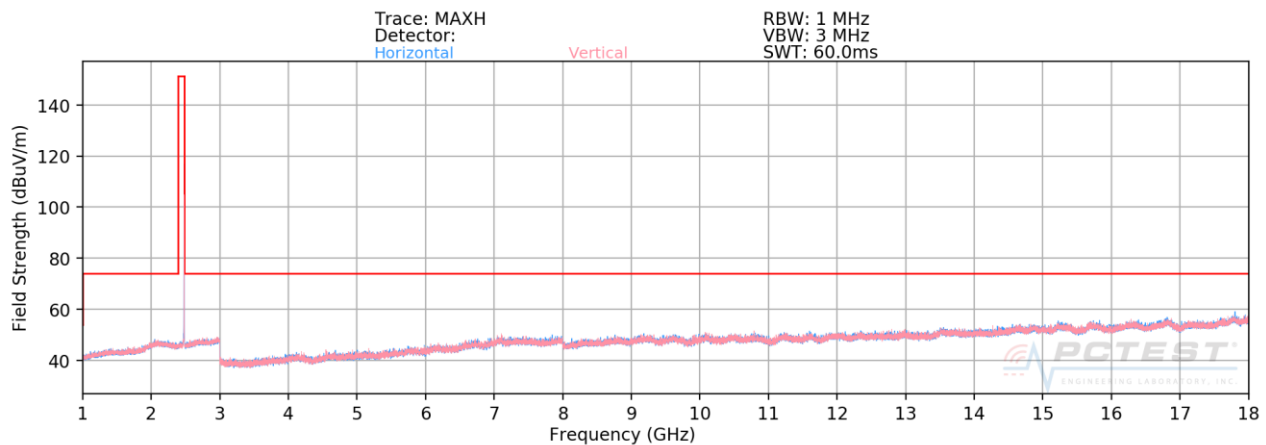


Plot 7-87. Radiated Spurious Plot above 1GHz ANT0 (BT GFSK ePA – Ch. 78)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 78 of 112


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]


Antenna 1

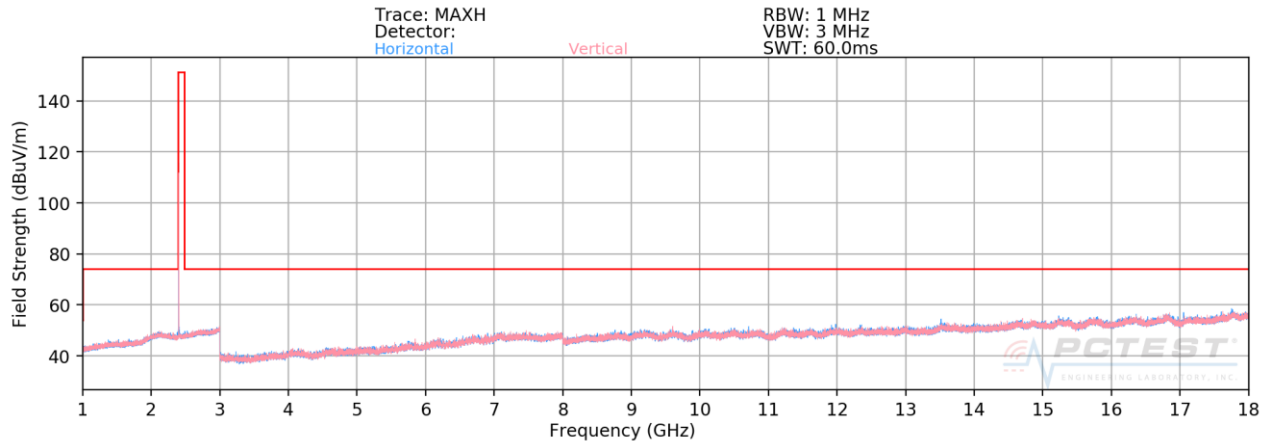

Plot 7-88. Radiated Spurious Plot above 1GHz ANT1 (BT GFSK ePA – Ch. 0)

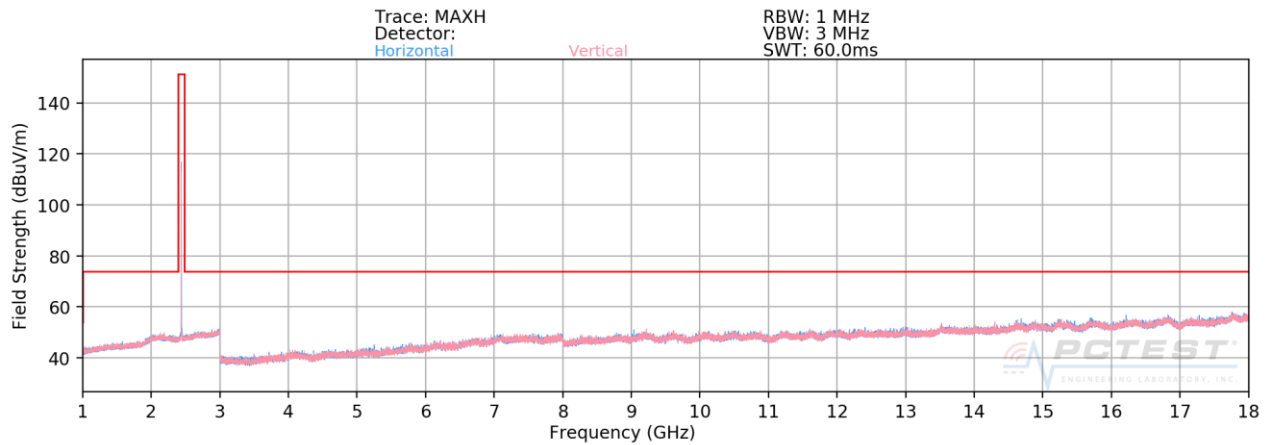

Plot 7-89. Radiated Spurious Plot above 1GHz ANT1 (BT GFSK ePA – Ch. 39)

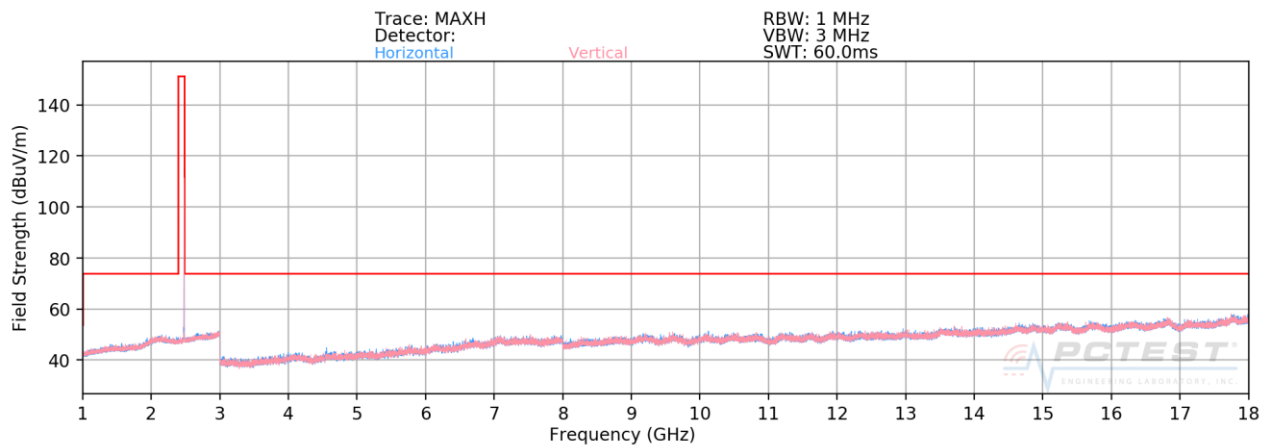

Plot 7-90. Radiated Spurious Plot above 1GHz ANT1 (BT GFSK ePA – Ch. 78)

FCC ID: BCGA2013	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1806050012-08.BCG	Test Dates: 07/27/2018-10/03/2018	EUT Type: Tablet Device	Page 79 of 112