




PCTEST

18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctest.com>



MEASUREMENT REPORT FCC PART 15.247 / ISED RSS-247 Bluetooth (HDR)

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

12/10/2019 - 02/12/2020

Test Site/Location:

PCTEST, Morgan Hill, CA, USA

Test Report Serial No.:

1C1912170053-04.BCG

FCC ID:

BCGA2229

IC:

579C-A2229

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2229

EUT Type:

Tablet Device

Max. RF Output Power:

48.865 mW (16.89 dBm) Peak Conducted

Frequency Range:

2404 – 2478MHz

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President



FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 1 of 102

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description	4
2.2	Device Capabilities	4
2.3	Antenna Description	5
2.4	Test Support Equipment	5
2.5	Test Configuration	5
2.6	Software and Firmware	6
2.7	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	AC Line Conducted Emissions	7
3.3	Radiated Emissions	8
3.4	Environmental Conditions	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA	11
7.0	TEST RESULTS	12
7.1	Summary	12
7.2	6dB Bandwidth Measurement – Bluetooth (HDR)	13
7.3	Output Power Measurement – Bluetooth (HDR)	22
7.3.1	Peak Output Power Measurement - Bluetooth (HDR)	23
7.3.2	Average Output Power Measurement - Bluetooth (HDR)	25
7.4	Power Spectral Density – Bluetooth (HDR)	27
7.5	Conducted Emissions at the Band Edge	55
7.6	Conducted Spurious Emissions	60
7.7	Radiated Spurious Emission Measurements	68
7.8	Radiated Restricted Band Edge Measurements	82
7.9	Radiated Spurious Emissions Measurements – Below 1GHz	94
7.10	AC Line-Conducted Test Data	98
8.0	CONCLUSION	102

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 2 of 102

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 3 of 102

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2229**. The data found in this test report was taken with the EUT operating in Bluetooth HDR mode. While in HDR mode, the Bluetooth transmitter hops pseudo-randomly between 75 channels.

Test Device Serial No.: DLPXZR032P572, DLXZR01CP573

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

Ch.	Frequency (MHz)
1	2404
:	:
38	2441
:	:
75	2478

Table 2-1. Frequency / Channel Operations

Measured Duty Cycles				
HDR Mode		Duty Cycle (%)		
		Ant WF8	Ant WF7	TxBF
HDR4	ePA	100.0	100.0	100.0
	iPA	100.0	100.0	100.0
HDR8	ePA	100.0	100.0	100.0
	iPA	100.0	100.0	100.0

Table 2-2. Measured Duty Cycles

This device supports BT Beamforming

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 4 of 102

2.3 Antenna Description

Following antenna were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Ant WF8	Ant WF7
2.4	0.8	-1.5

Table 2-3. Highest Antenna Gain

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 75 different channels in the 2404 – 2478MHz band.

2.4 Test Support Equipment

1	Apple MacBook w/ AC/DC Adapter	Model: A1398 Model: A1435	S/N: C2QKP008F6F3 S/N: C04325505K1F288BG
2	Apple USB-C Cable	Model: Chimp	S/N: 304523
3	USB-C Cable w / AC/DC Adapter	Model: A1997 Model: A1720	S/N: N/A S/N: C3D9274B06YLHDAE
4	Apple Pencil	Model: A2051	S/N: GQXYGSXCJKM9
5	DC Power Supply	Model: KPS3010D	S/N N/A

Table 2-4. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 5 of 102



2.6 Software and Firmware

The test was conducted with firmware version 17E228 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 6 of 102

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.35.04.

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 7 of 102

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 8 of 102

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 9 of 102

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.29
Conducted Disturbance	2.48
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.70
Radiated Disturbance (>18GHz)	5.01

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 10 of 102

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/13/2019	Annual	3/13/2020	MY49430244
Anritsu	ML2496A	Power Meter	10/29/2019	Annual	10/29/2020	184005
Anritsu	MA2411B	Pulse Power Sensor	10/29/2019	Annual	10/29/2020	1726261
Anritsu	MA2411B	Pulse Power Sensor	10/29/2019	Annual	10/29/2020	1726262
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	10/29/2019	Annual	10/29/2020	T058701-02
COM-POWER	LIN-120A	LISN	3/13/2019	Annual	3/13/2020	241297
ETS-Lindgren	3142E-PA	Pre-Amplifier (30MHz - 6GHz)	9/19/2019	Annual	9/19/2020	213236
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	8/14/2019	Annual	8/14/2020	224569
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/12/2019	Annual	3/12/2020	205956
Rohde & Schwarz	ESW26	EMI Test Receiver	5/21/2019	Annual	5/21/2020	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	7/27/2019	Annual	7/27/2020	101668
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	9/19/2019	Annual	9/19/2020	100051
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	11/14/2019	Annual	11/14/2020	101057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/21/2019	Annual	3/21/2020	100519

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 11 of 102

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2229
 FCC Classification: Digital Transmission System (DTS)
 Number of Channels: 75

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4(d)]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen[8.8])	LINE CONDUCTED	PASS	Section 7.10

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4. For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 1.3.1.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 12 of 102

7.2 6dB Bandwidth Measurement – Bluetooth (HDR)

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

Both power schemes were investigated, and only the worst case is reported.


FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 13 of 102

Ant WF8


Frequency [MHz]	Data Rate	Power Scheme	Channel No.	Measured Bandwidth [kHz]	Minimum Bandwidth [kHz]	Pass / Fail
2404	4 Mbps	ePA	1	2100.0	500	Pass
2441	4 Mbps	ePA	38	2099.0	500	Pass
2478	4 Mbps	ePA	75	2101.0	500	Pass
2404	8 Mbps	ePA	1	4131.0	500	Pass
2441	8 Mbps	ePA	38	4151.0	500	Pass
2478	8 Mbps	ePA	75	4160.0	500	Pass

Table 7-2. Conducted Bandwidth Measurements Ant WF8

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 14 of 102

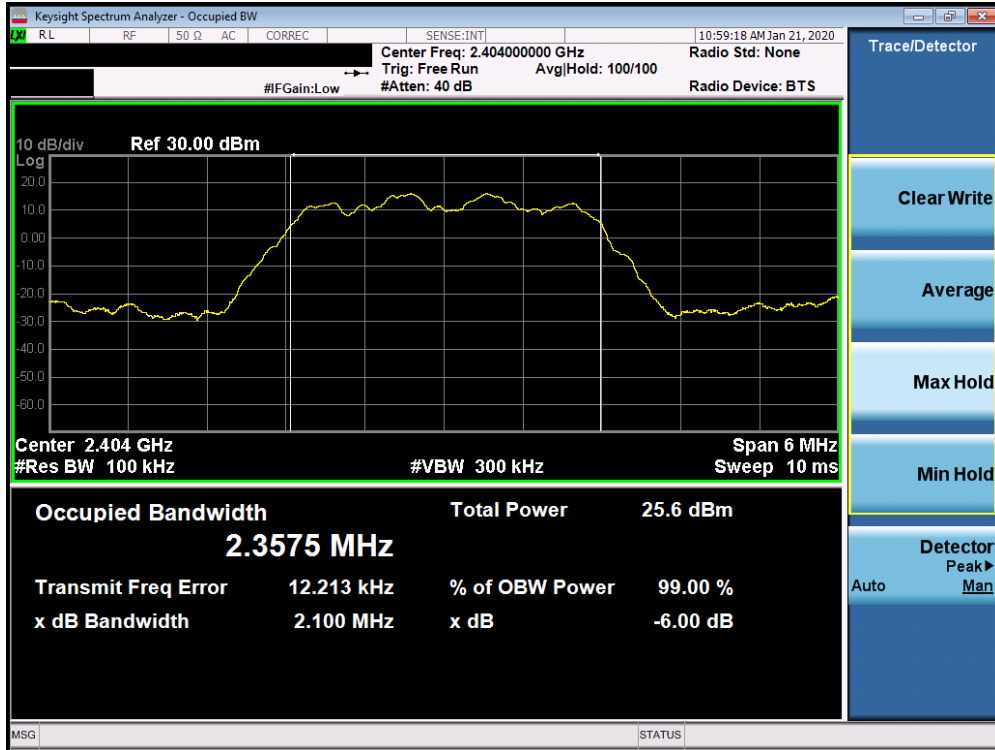


Plot 7-1. 6dB Bandwidth Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

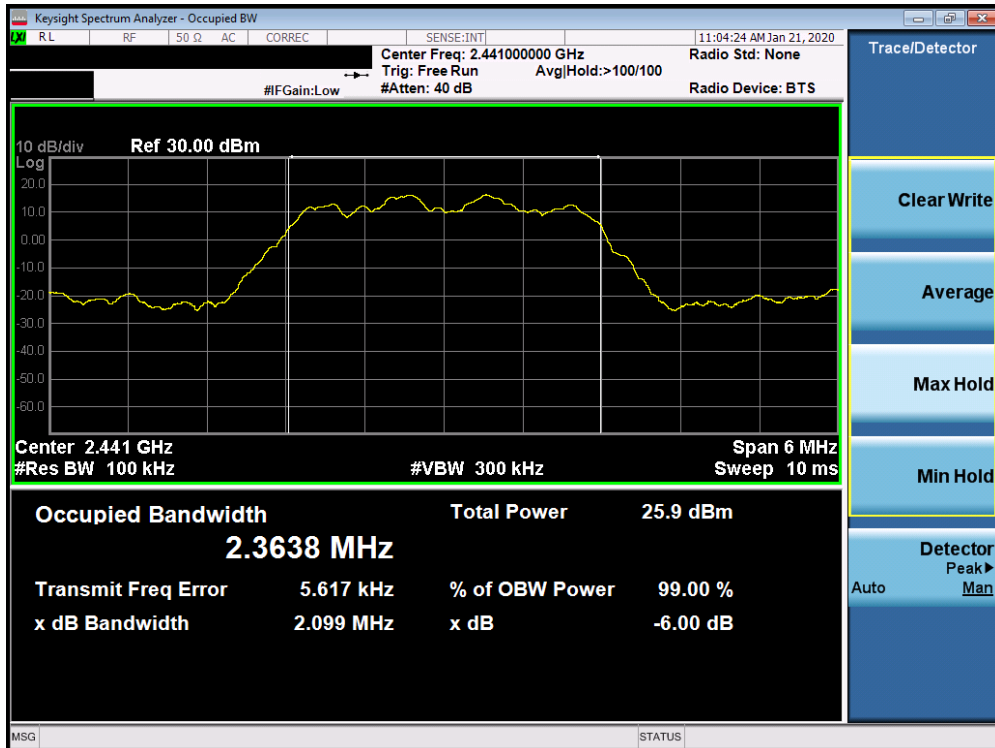


Plot 7-2. 6dB Bandwidth Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 15 of 102

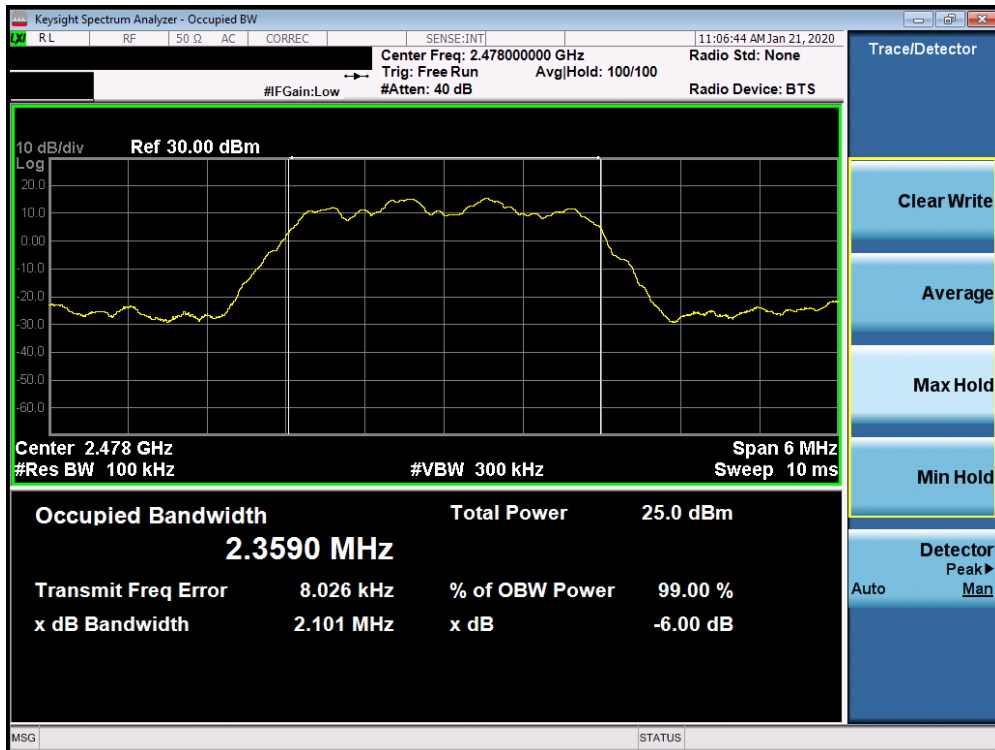


Plot 7-3. 6dB Bandwidth Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

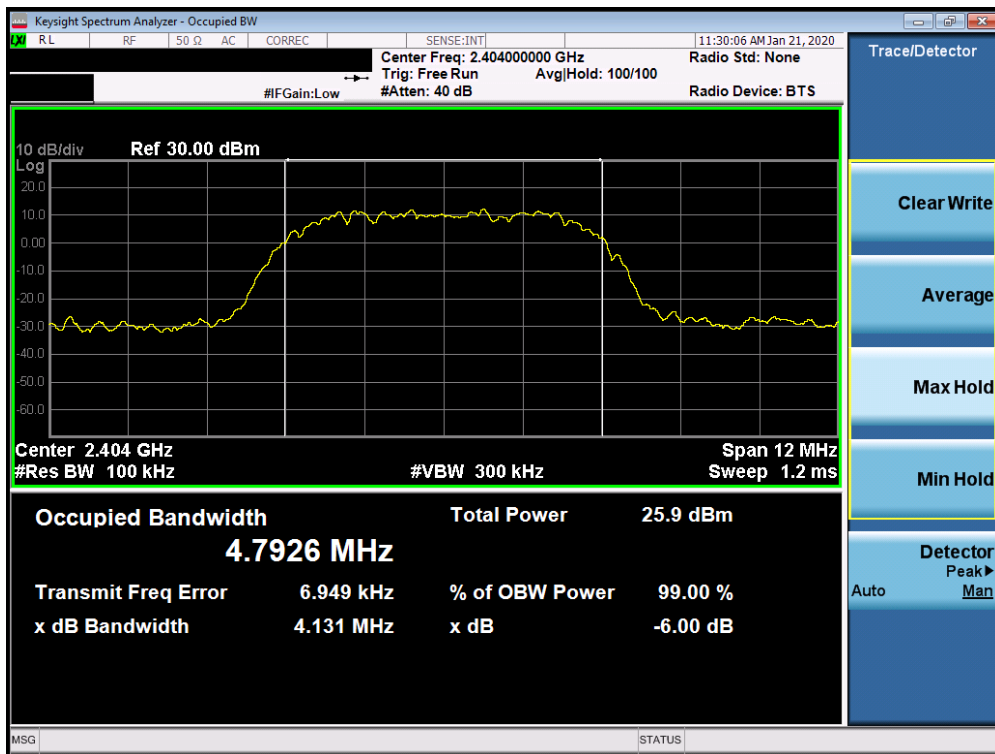


Plot 7-4. 6dB Bandwidth Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 16 of 102

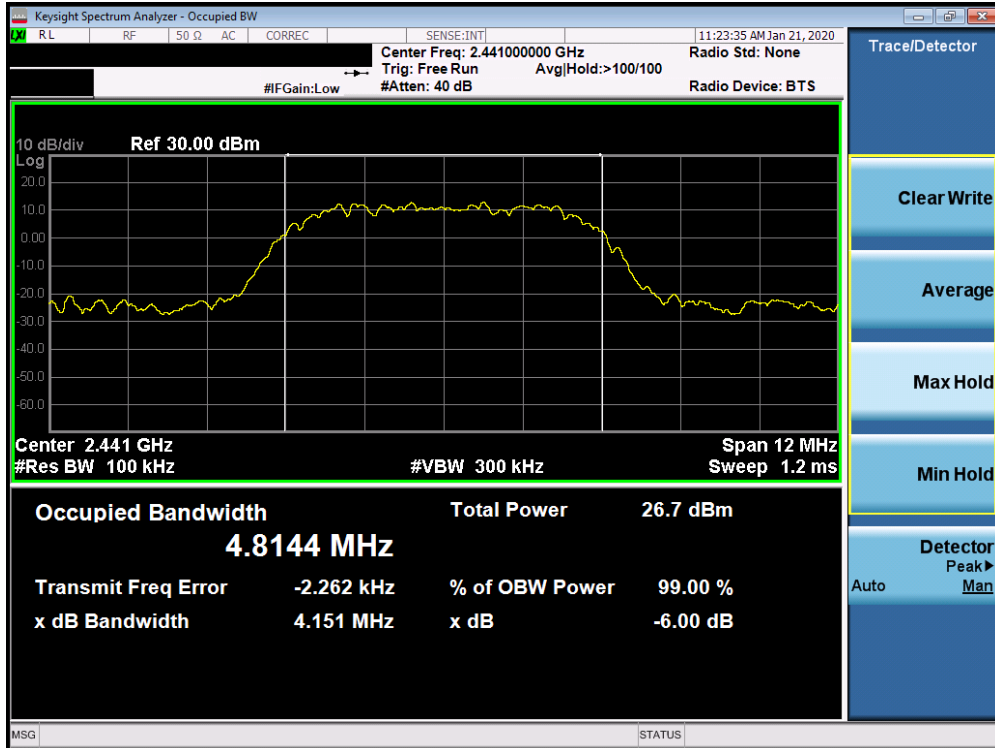

Plot 7-5. 6dB Bandwidth Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

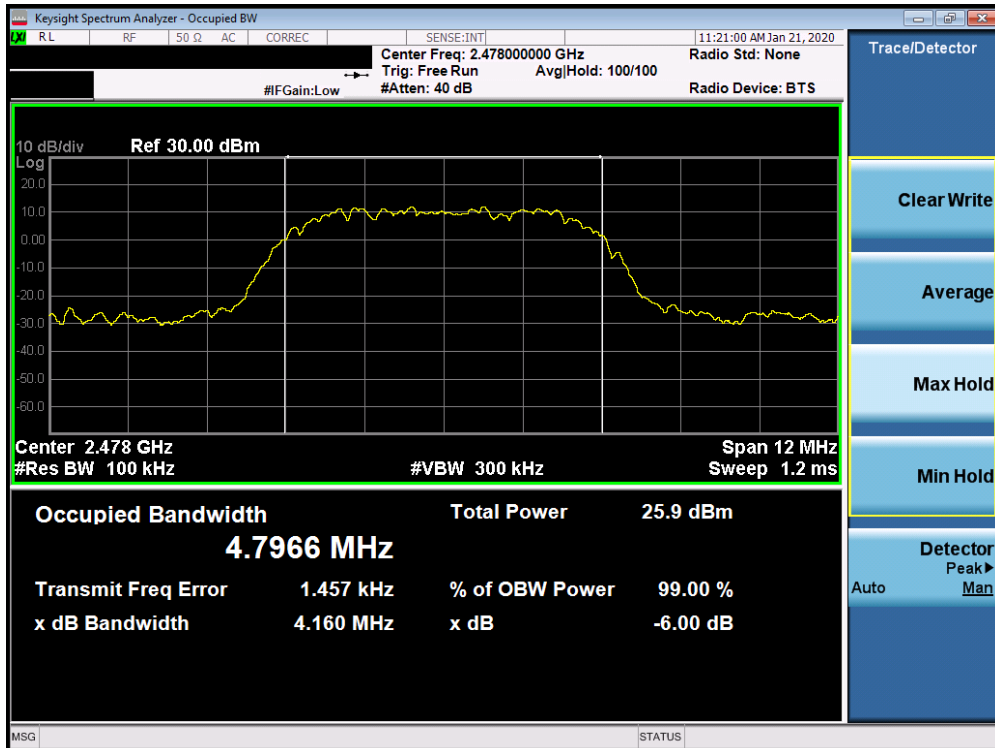

Plot 7-6. 6dB Bandwidth Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 75)


FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 17 of 102

Ant WF7


Frequency [MHz]	Data Rate	Power Scheme	Channel No.	Measured Bandwidth [kHz]	Minimum Bandwidth [kHz]	Pass / Fail
2404	4 Mbps	ePA	1	2103.0	500	Pass
2441	4 Mbps	ePA	38	2103.0	500	Pass
2478	4 Mbps	ePA	75	2104.0	500	Pass
2404	8 Mbps	ePA	1	4158.0	500	Pass
2441	8 Mbps	ePA	38	4157.0	500	Pass
2478	8 Mbps	ePA	75	4167.0	500	Pass

Table 7-3. Conducted Bandwidth Measurements Ant WF7

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 18 of 102

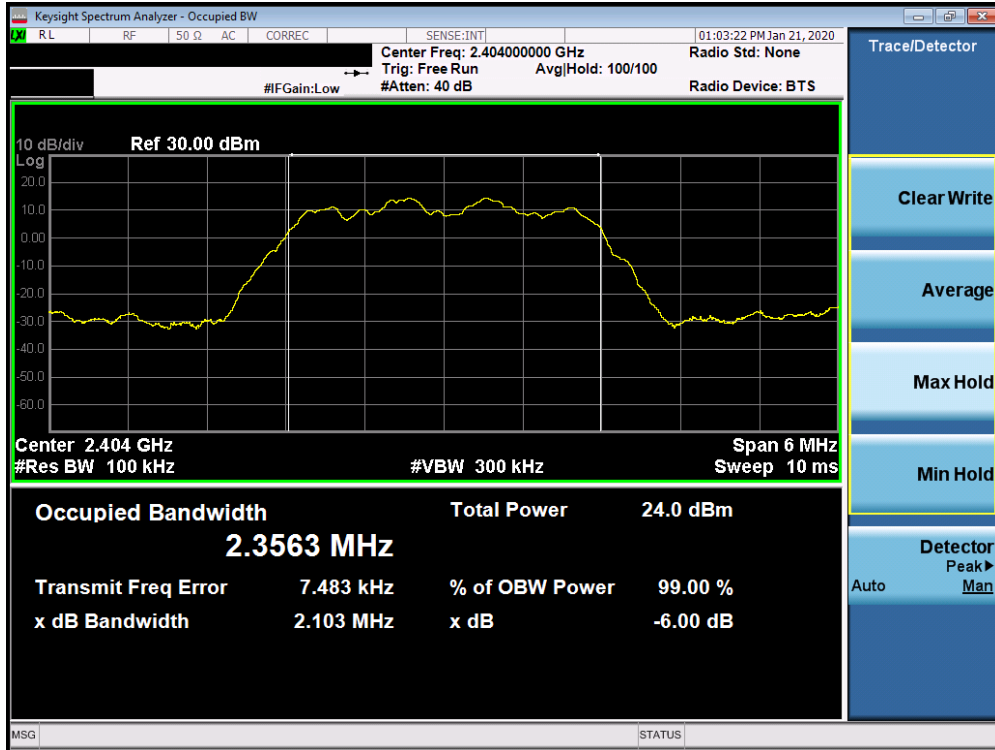


Plot 7-7. 6dB Bandwidth Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

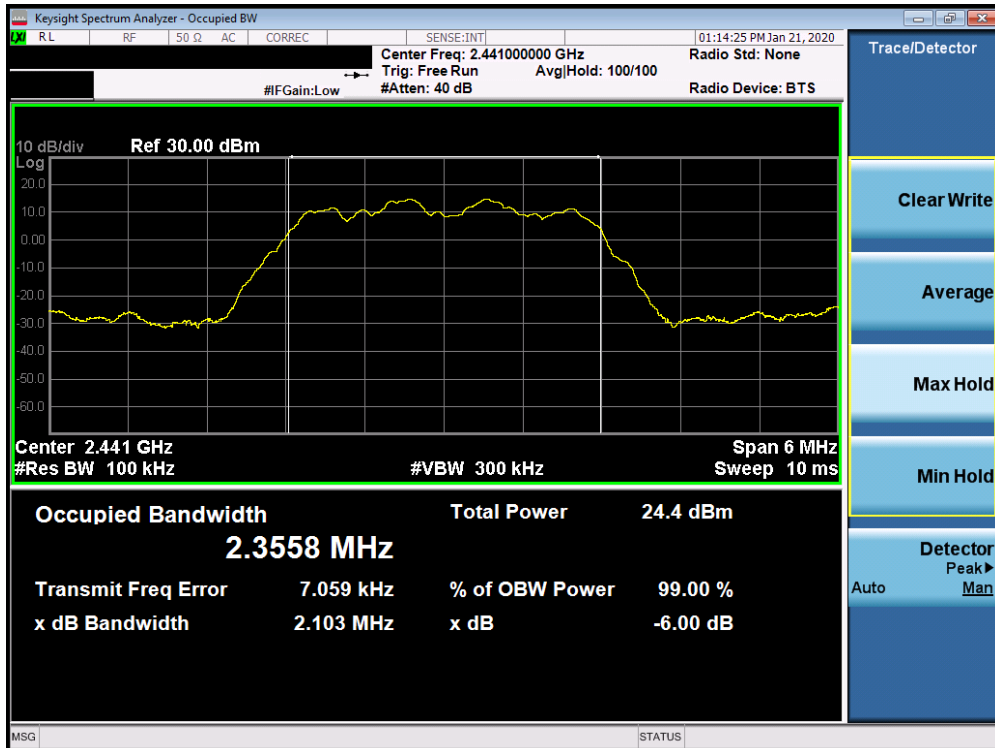


Plot 7-8. 6dB Bandwidth Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 19 of 102

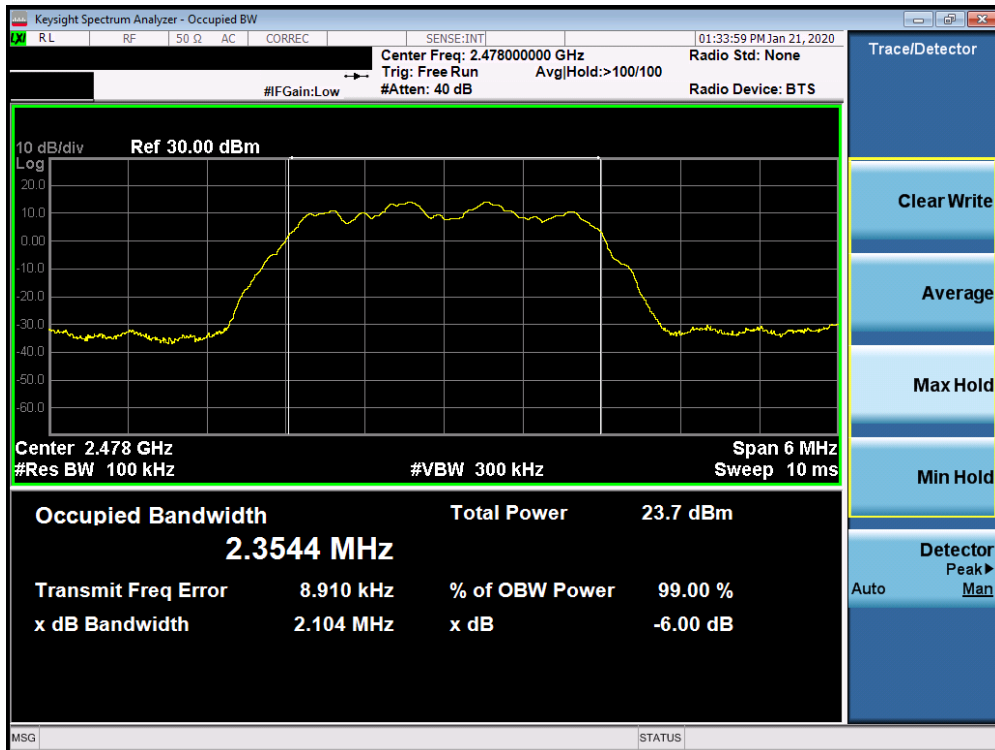


Plot 7-9. 6dB Bandwidth Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

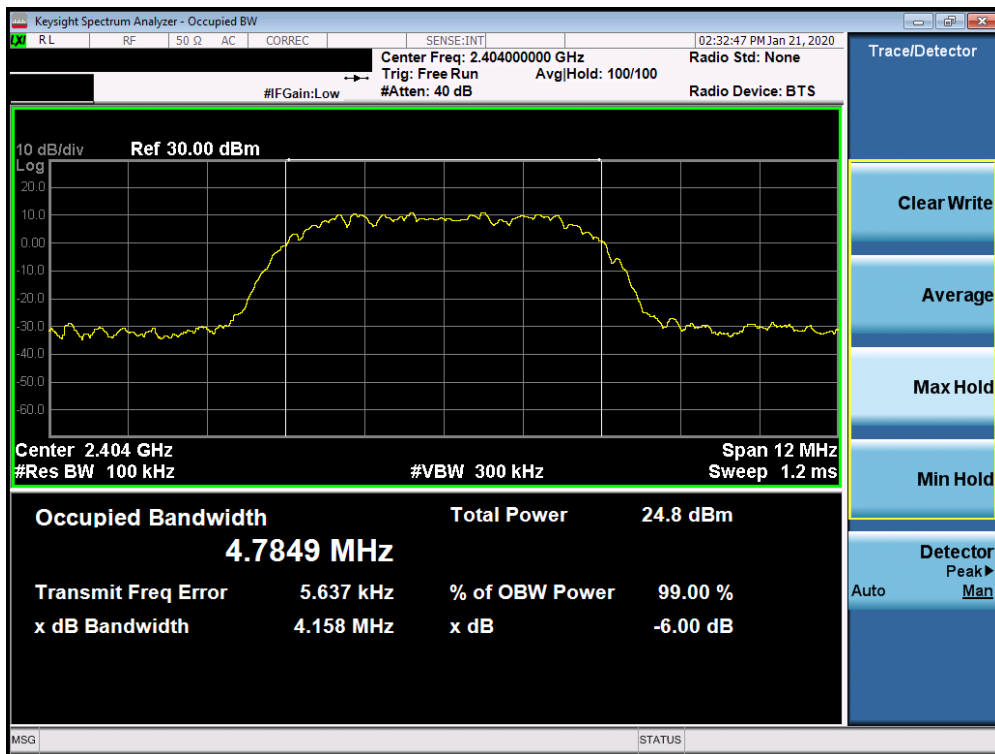


Plot 7-10. 6dB Bandwidth Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 20 of 102

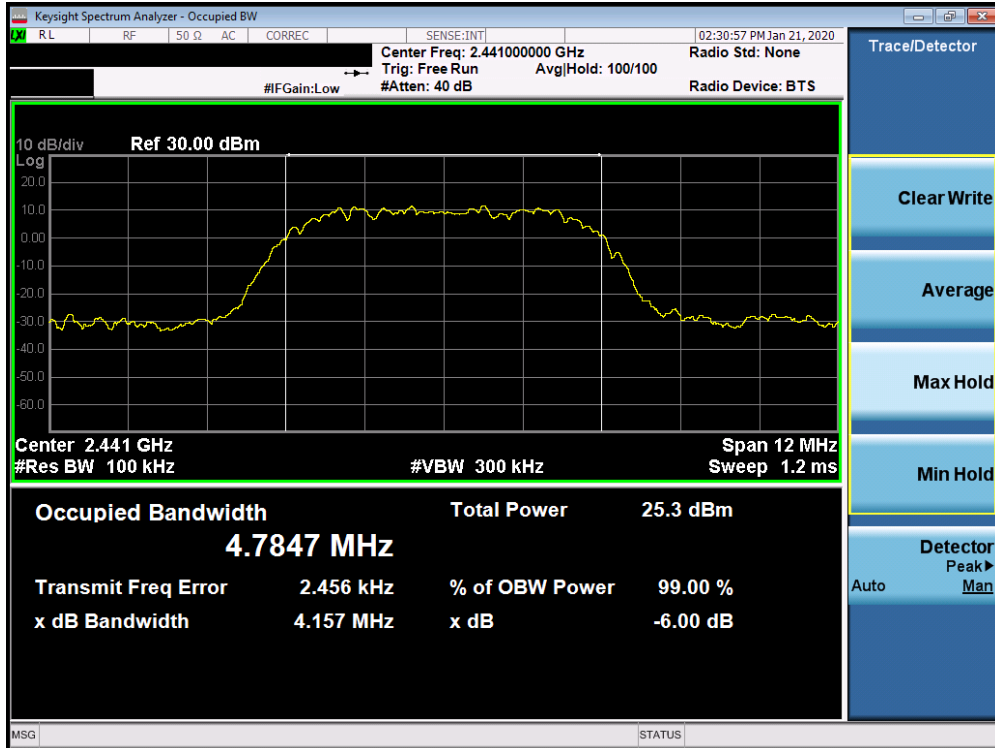

Plot 7-11. 6dB Bandwidth Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

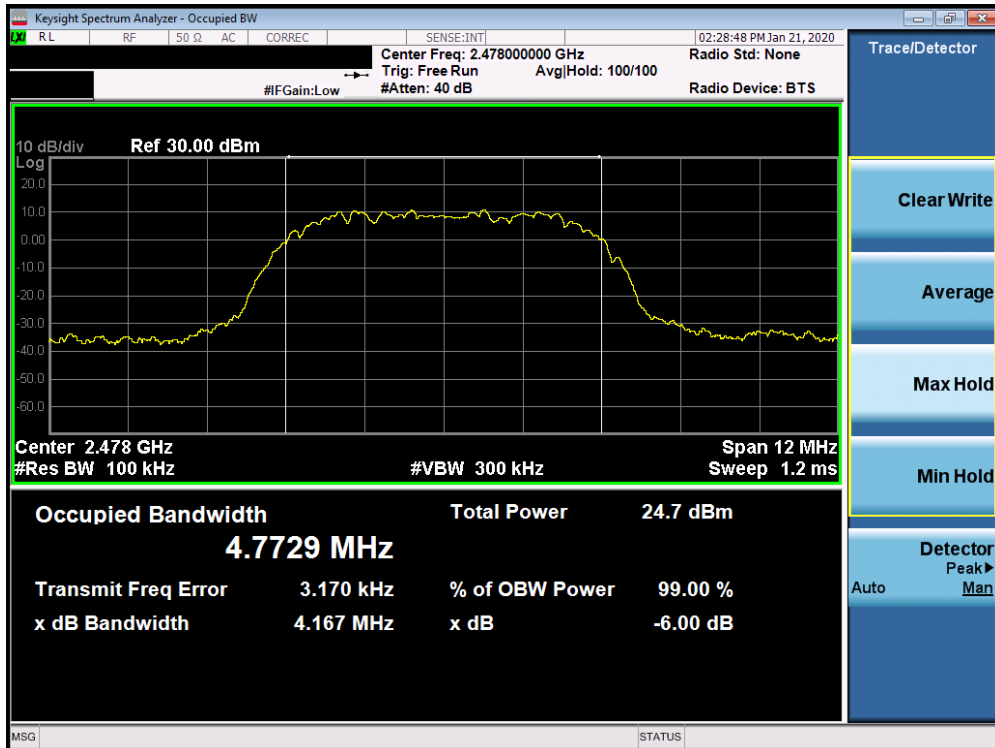

Plot 7-12. 6dB Bandwidth Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 21 of 102

7.3 Output Power Measurement – Bluetooth (HDR) §15.247(b.3); RSS-247 [5.4(d)]

Test Overview and Limits

The transmitter antenna terminal of the EUT is connected to the input of a spectrum analyzer. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3
 ANSI C63.10-2013 – Section 11.9.2.3.2
 KDB 558074 D01 v05r02 – Section 8.3.1.3
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup for Peak and Average Power Measurement

Test Notes

None

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 22 of 102

7.3.1 Peak Output Power Measurement - Bluetooth (HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
				[dBm]	[mW]				
2404	4.0	ePA	1	14.24	26.546	0.80	15.04	36.02	-20.98
2441	4.0	ePA	38	14.16	26.062	0.80	14.96	36.02	-21.06
2478	4.0	ePA	75	14.33	27.102	0.80	15.13	36.02	-20.89
2404	4.0	iPA	1	10.92	12.359	0.80	11.72	36.02	-24.30
2441	4.0	iPA	38	10.18	10.423	0.80	10.98	36.02	-25.04
2478	4.0	iPA	75	10.45	11.092	0.80	11.25	36.02	-24.77
2404	8.0	ePA	1	15.36	34.356	0.80	16.16	36.02	-19.86
2441	8.0	ePA	38	15.23	33.343	0.80	16.03	36.02	-19.99
2478	8.0	ePA	75	14.94	31.189	0.80	15.74	36.02	-20.28
2404	8.0	iPA	1	10.82	12.078	0.80	11.62	36.02	-24.40
2441	8.0	iPA	38	10.78	11.967	0.80	11.58	36.02	-24.44
2478	8.0	iPA	75	11.08	12.823	0.80	11.88	36.02	-24.14

Table 7-4. Ant WF8 Peak Conducted Output Power Measurements (Bluetooth (HDR))

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 23 of 102

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
				[dBm]	[mW]				
2404	4.0	ePA	1	12.12	16.293	-1.50	10.62	36.02	-25.40
2441	4.0	ePA	38	12.20	16.596	-1.50	10.70	36.02	-25.32
2478	4.0	ePA	75	12.18	16.520	-1.50	10.68	36.02	-25.34
2404	4.0	iPA	1	8.11	6.471	-1.50	6.61	36.02	-29.41
2441	4.0	iPA	38	8.05	6.383	-1.50	6.55	36.02	-29.47
2478	4.0	iPA	75	8.33	6.808	-1.50	6.83	36.02	-29.19
2404	8.0	ePA	1	12.24	16.749	-1.50	10.74	36.02	-25.28
2441	8.0	ePA	38	12.25	16.788	-1.50	10.75	36.02	-25.27
2478	8.0	ePA	75	12.17	16.482	-1.50	10.67	36.02	-25.35
2404	8.0	iPA	1	8.12	6.486	-1.50	6.62	36.02	-29.40
2441	8.0	iPA	38	8.08	6.427	-1.50	6.58	36.02	-29.44
2478	8.0	iPA	75	8.18	6.577	-1.50	6.68	36.02	-29.34

Table 7-5. Ant WF7 Peak Conducted Output Power Measurements (Bluetooth (HDR))

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Peak Conducted Power						Directional Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
				Ant WF8		Ant WF7		Summed					
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]				
2404	4.0	ePA	1	14.11	25.769	12.06	16.069	16.22	41.879	2.74	18.96	36.02	-17.06
2441	4.0	ePA	38	14.12	25.823	12.01	15.885	16.20	41.687	2.74	18.94	36.02	-17.08
2478	4.0	ePA	75	14.25	26.607	12.00	15.849	16.28	42.462	2.74	19.02	36.02	-17.00
2404	4.0	iPA	1	9.95	9.886	8.11	6.471	12.14	16.368	2.74	14.88	36.02	-21.14
2441	4.0	iPA	38	10.19	10.447	8.02	6.339	12.25	16.788	2.74	14.99	36.02	-21.03
2478	4.0	iPA	75	10.25	10.593	8.07	6.412	12.31	17.022	2.74	15.05	36.02	-20.97
2404	8.0	ePA	1	15.12	32.509	12.10	16.218	16.88	48.753	2.74	19.62	36.02	-16.40
2441	8.0	ePA	38	15.22	33.266	11.93	15.596	16.89	48.865	2.74	19.63	36.02	-16.39
2478	8.0	ePA	75	14.85	30.549	11.86	15.346	16.62	45.920	2.74	19.36	36.02	-16.66
2404	8.0	iPA	1	11.07	12.794	8.09	6.442	12.84	19.231	2.74	15.58	36.02	-20.44
2441	8.0	iPA	38	10.78	11.967	8.01	6.324	12.62	18.281	2.74	15.36	36.02	-20.66
2478	8.0	iPA	75	10.83	12.106	8.07	6.412	12.68	18.535	2.74	15.42	36.02	-20.60

Table 7-6. TxBF Peak Conducted Output Power Measurements (Bluetooth (HDR))

FCC ID: BCGA2229			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 24 of 102

7.3.2 Average Output Power Measurement - Bluetooth (HDR)

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
				[dBm]	[mW]				
2404	4.0	ePA	1	11.68	14.723	0.80	12.48	36.02	-23.54
2441	4.0	ePA	38	11.63	14.555	0.80	12.43	36.02	-23.59
2478	4.0	ePA	75	11.80	15.136	0.80	12.60	36.02	-23.42
2404	4.0	iPA	1	8.00	6.310	0.80	8.80	36.02	-27.22
2441	4.0	iPA	38	7.66	5.834	0.80	8.46	36.02	-27.56
2478	4.0	iPA	75	7.89	6.152	0.80	8.69	36.02	-27.33
2404	8.0	ePA	1	12.00	15.849	0.80	12.80	36.02	-23.22
2441	8.0	ePA	38	11.99	15.812	0.80	12.79	36.02	-23.23
2478	8.0	ePA	75	11.81	15.171	0.80	12.61	36.02	-23.41
2404	8.0	iPA	1	7.68	5.861	0.80	8.48	36.02	-27.54
2441	8.0	iPA	38	7.65	5.821	0.80	8.45	36.02	-27.57
2478	8.0	iPA	75	7.95	6.237	0.80	8.75	36.02	-27.27

Table 7-7. Ant WF8 Average Conducted Output Power Measurements (Bluetooth (HDR))

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 25 of 102

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power		Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
				[dBm]	[mW]				
2404	4.0	ePA	1	11.95	15.668	-1.50	10.45	36.02	-25.57
2441	4.0	ePA	38	11.98	15.776	-1.50	10.48	36.02	-25.54
2478	4.0	ePA	75	11.95	15.668	-1.50	10.45	36.02	-25.57
2404	4.0	iPA	1	7.96	6.252	-1.50	6.46	36.02	-29.56
2441	4.0	iPA	38	7.85	6.095	-1.50	6.35	36.02	-29.67
2478	4.0	iPA	75	8.00	6.310	-1.50	6.50	36.02	-29.52
2404	8.0	ePA	1	12.00	15.849	-1.50	10.50	36.02	-25.52
2441	8.0	ePA	38	11.99	15.812	-1.50	10.49	36.02	-25.53
2478	8.0	ePA	75	11.93	15.596	-1.50	10.43	36.02	-25.59
2404	8.0	iPA	1	7.95	6.237	-1.50	6.45	36.02	-29.57
2441	8.0	iPA	38	7.91	6.180	-1.50	6.41	36.02	-29.61
2478	8.0	iPA	75	7.96	6.252	-1.50	6.46	36.02	-29.56

Table 7-8. Ant WF7 Average Conducted Output Power Measurements (Bluetooth (HDR))

Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Average Conducted Power						Directional Ant. Gain [dBi]	EIRP [dBm]	Limit [dBm]	Margin [dB]
				Ant WF8		Ant WF7		Summed					
				[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]				
2404	4.0	ePA	1	11.55	14.289	12.00	15.849	14.79	30.130	2.74	17.53	36.02	-18.49
2441	4.0	ePA	38	11.60	14.454	11.92	15.560	14.77	29.992	2.74	17.51	36.02	-18.51
2478	4.0	ePA	75	11.72	14.859	11.95	15.668	14.85	30.549	2.74	17.59	36.02	-18.43
2404	4.0	iPA	1	7.42	5.521	8.00	6.310	10.73	11.830	2.74	13.47	36.02	-22.55
2441	4.0	iPA	38	7.67	5.848	7.92	6.194	10.81	12.050	2.74	13.55	36.02	-22.47
2478	4.0	iPA	75	7.74	5.943	7.97	6.266	10.87	12.218	2.74	13.61	36.02	-22.41
2404	8.0	ePA	1	11.97	15.740	12.00	15.849	15.00	31.623	2.74	17.74	36.02	-18.28
2441	8.0	ePA	38	12.00	15.849	11.80	15.136	14.91	30.974	2.74	17.65	36.02	-18.37
2478	8.0	ePA	75	11.77	15.031	11.80	15.136	14.80	30.200	2.74	17.54	36.02	-18.48
2404	8.0	iPA	1	7.91	6.180	8.00	6.310	10.97	12.503	2.74	13.71	36.02	-22.31
2441	8.0	iPA	38	7.62	5.781	7.94	6.223	10.79	11.995	2.74	13.53	36.02	-22.49
2478	8.0	iPA	75	7.65	5.821	7.99	6.295	10.83	12.106	2.74	13.57	36.02	-22.45

Table 7-9. TxBF Average Conducted Output Power Measurements (Bluetooth (HDR))

FCC ID: BCGA2229			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 26 of 102	

7.4 Power Spectral Density – Bluetooth (HDR)

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD
 KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission
 ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None


FCC ID: BCGA2229			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 27 of 102

Ant WF8


Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Measured Power Spectral Density [dBm / 3kHz]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2404	4 Mbps	ePA	1	2.34	8.0	-5.66
2441	4 Mbps	ePA	38	2.99	8.0	-5.01
2478	4 Mbps	ePA	75	2.08	8.0	-5.92
2404	4 Mbps	iPA	1	-5.22	8.0	-13.22
2441	4 Mbps	iPA	38	-4.17	8.0	-12.17
2478	4 Mbps	iPA	75	-4.94	8.0	-12.94
2404	8 Mbps	ePA	1	-0.63	8.0	-8.63
2441	8 Mbps	ePA	38	0.27	8.0	-7.73
2478	8 Mbps	ePA	75	-0.56	8.0	-8.56
2404	8 Mbps	iPA	1	-7.99	8.0	-15.99
2441	8 Mbps	iPA	38	-6.84	8.0	-14.84
2478	8 Mbps	iPA	75	-7.54	8.0	-15.54

Table 7-10. Conducted Power Density Measurements Ant WF8

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 28 of 102

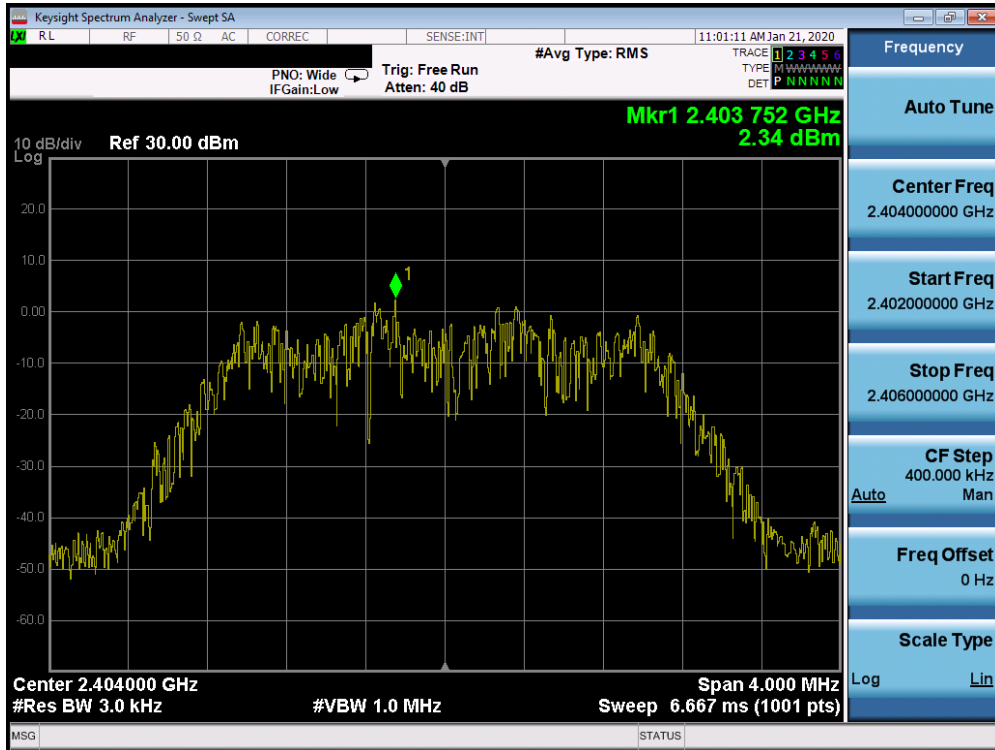


Plot 7-13. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

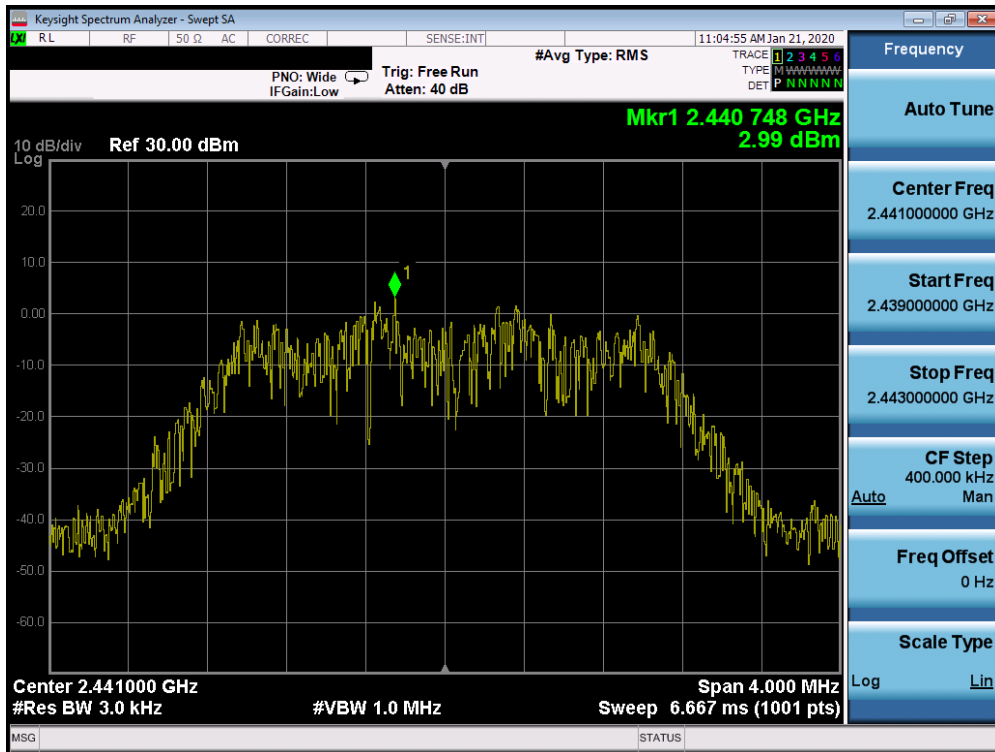


Plot 7-14. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 29 of 102

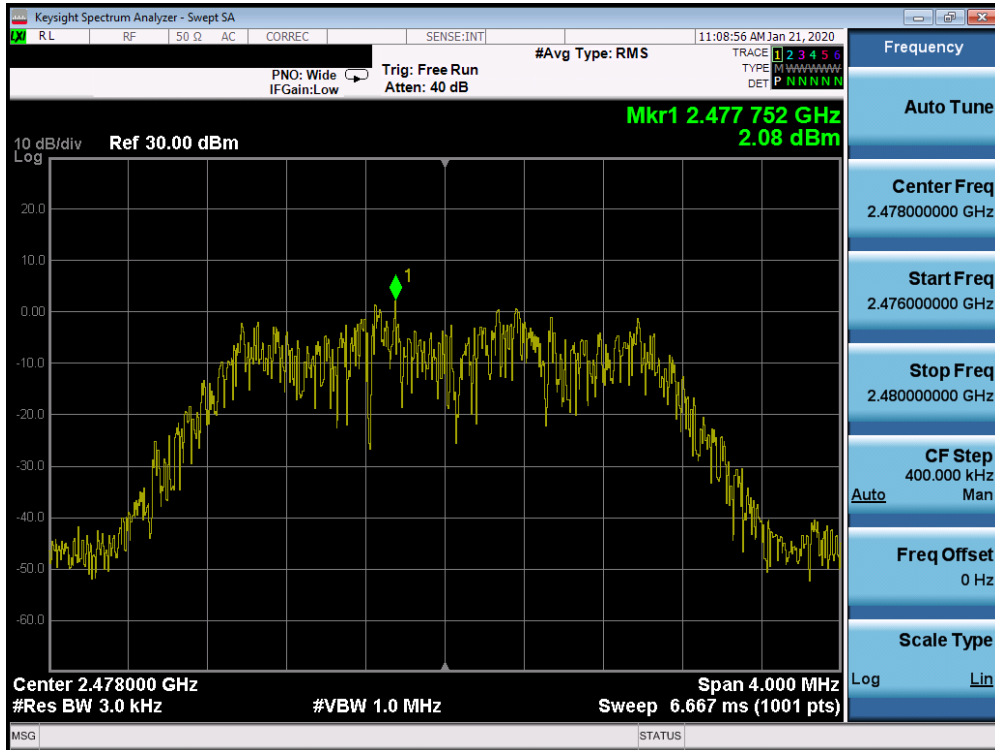


Plot 7-15. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

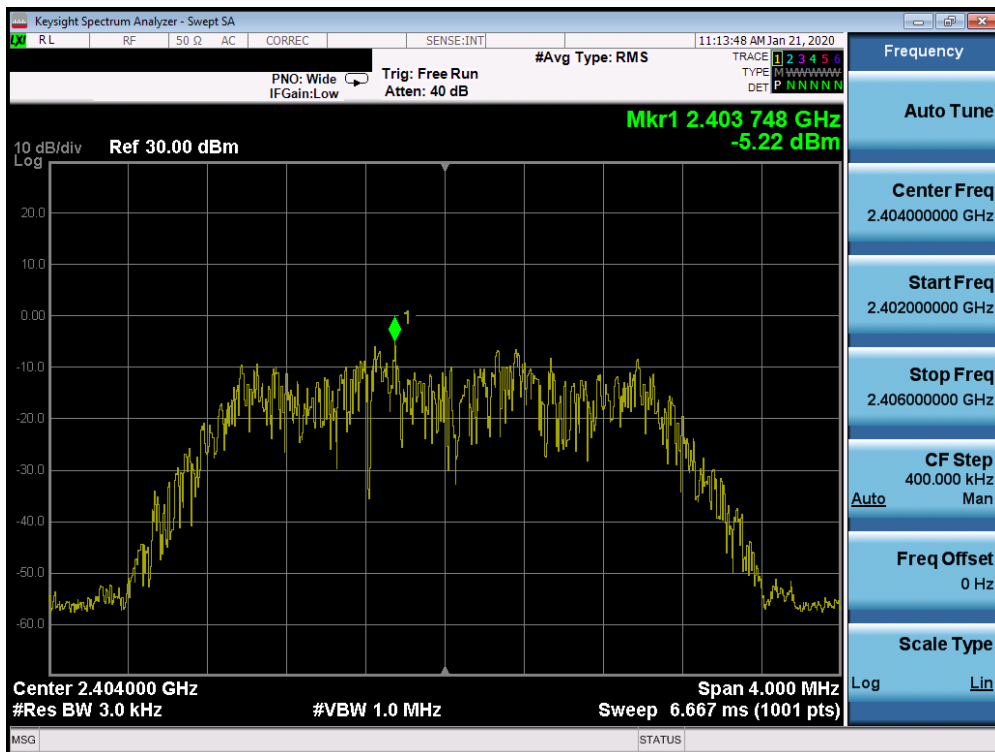


Plot 7-16. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 30 of 102

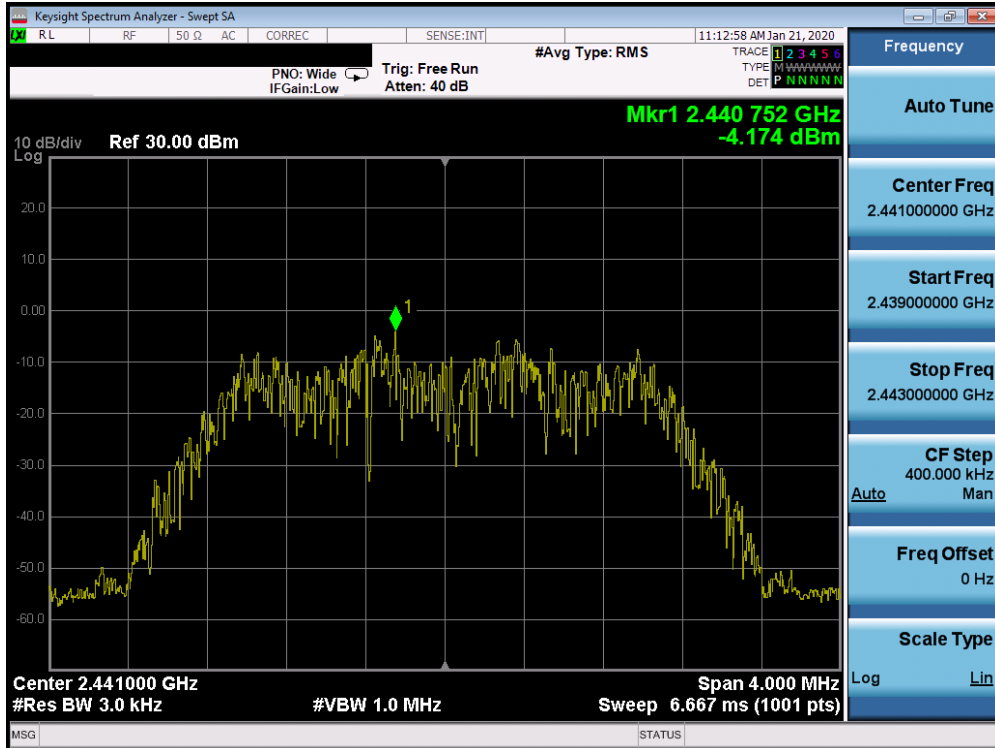


Plot 7-17. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

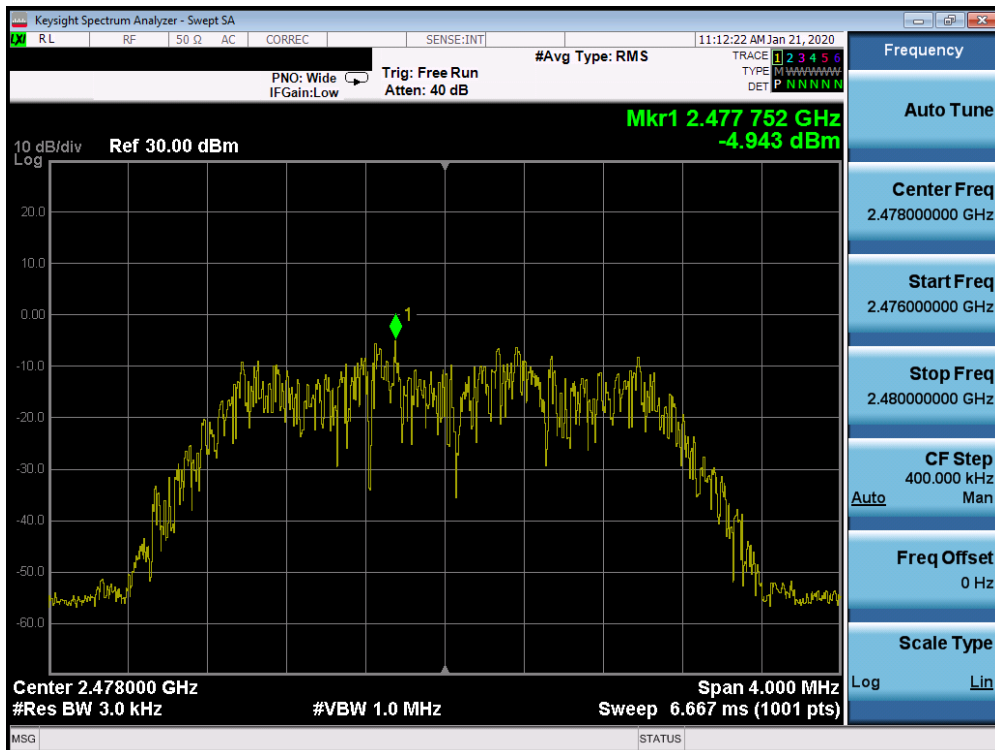


Plot 7-18. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 31 of 102

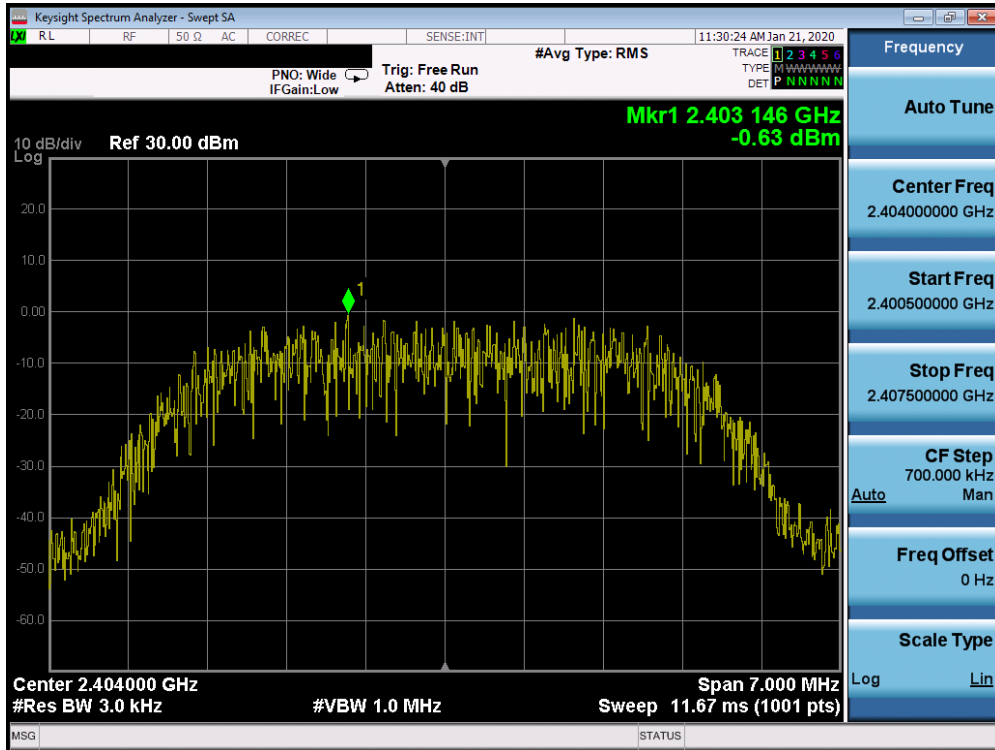


Plot 7-19. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

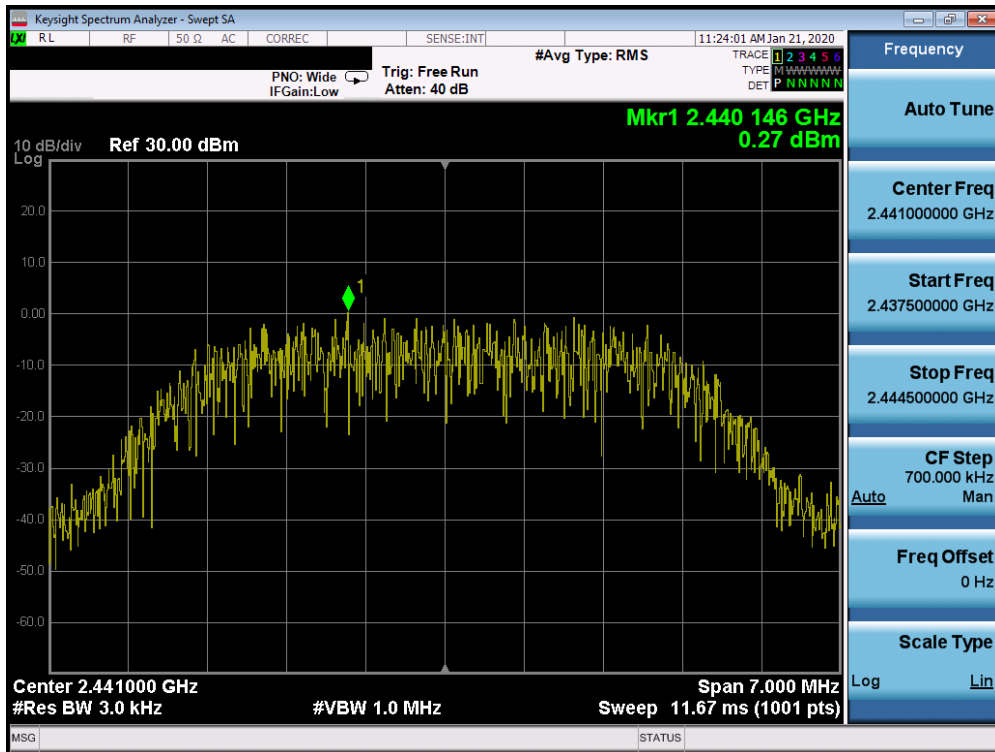


Plot 7-20. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 32 of 102

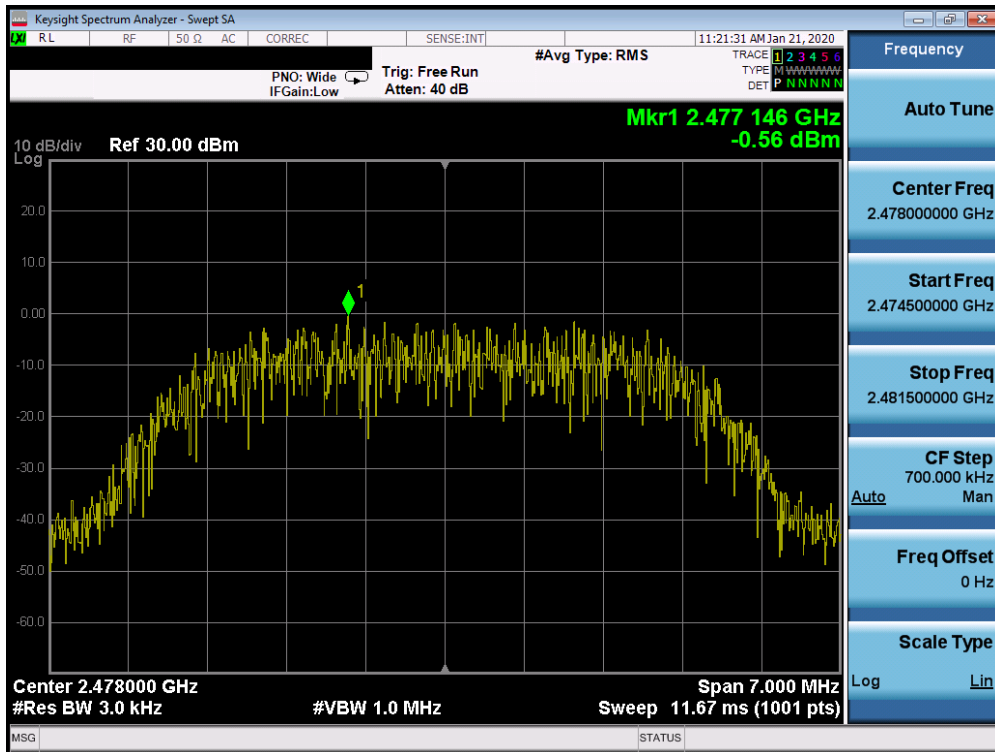


Plot 7-21. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 75)

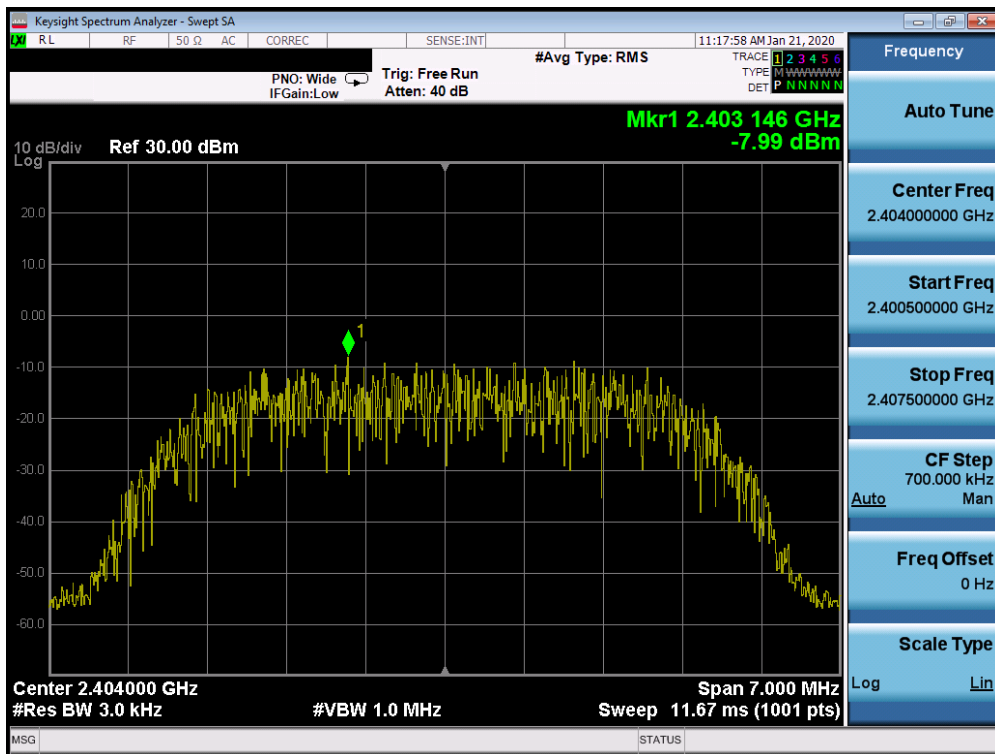


Plot 7-22. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 33 of 102

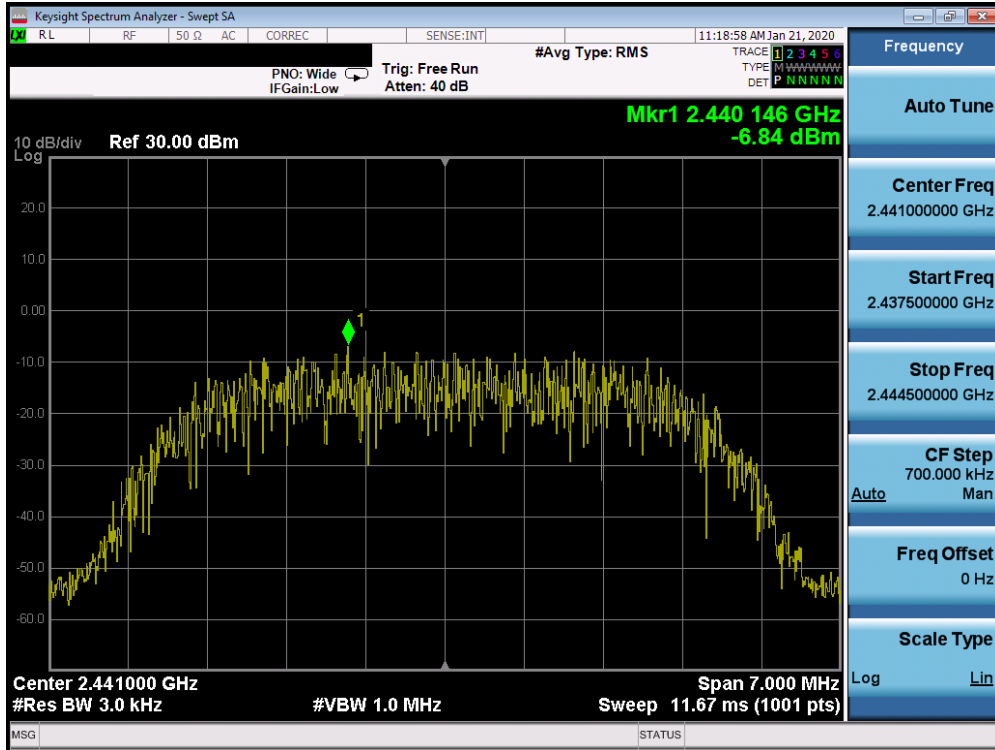

Plot 7-23. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

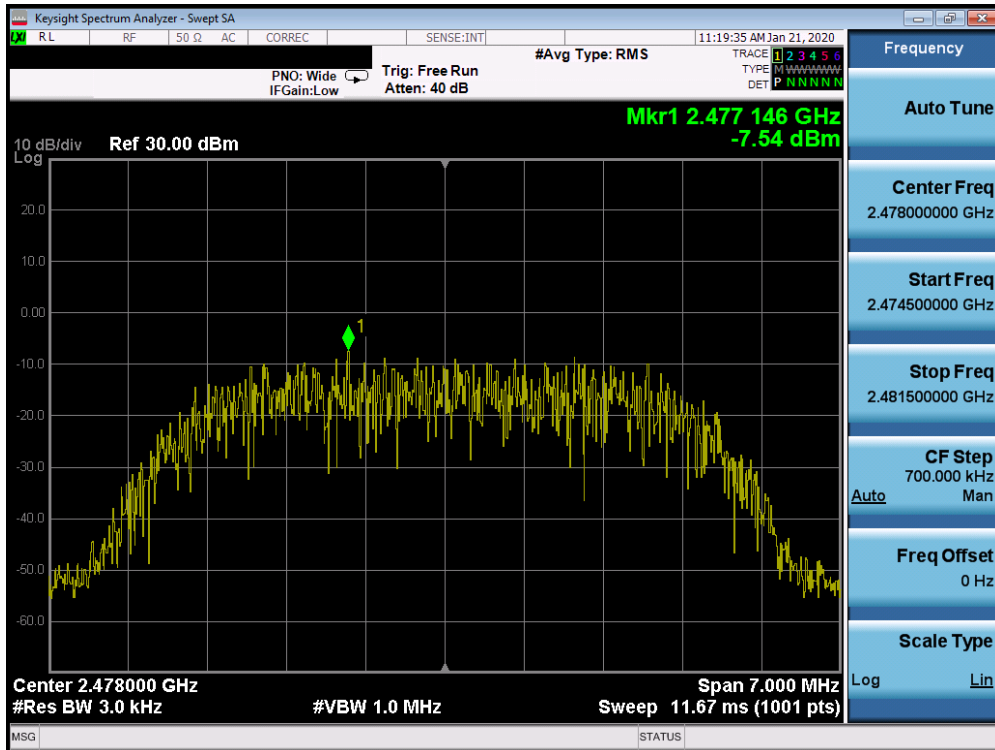

Plot 7-24. Power Spectral Density Plot Ant WF8 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 75)


FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 34 of 102

Ant WF7


Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Measured Power Spectral Density [dBm / 3kHz]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
2404	4 Mbps	ePA	1	1.09	8.0	-6.91
2441	4 Mbps	ePA	38	1.57	8.0	-6.43
2478	4 Mbps	ePA	75	0.81	8.0	-7.19
2404	4 Mbps	iPA	1	-6.17	8.0	-14.17
2441	4 Mbps	iPA	38	-5.74	8.0	-13.74
2478	4 Mbps	iPA	75	-6.41	8.0	-14.41
2404	8 Mbps	ePA	1	-1.63	8.0	-9.63
2441	8 Mbps	ePA	38	-1.07	8.0	-9.07
2478	8 Mbps	ePA	75	-1.71	8.0	-9.71
2404	8 Mbps	iPA	1	-8.88	8.0	-16.88
2441	8 Mbps	iPA	38	-8.33	8.0	-16.33
2478	8 Mbps	iPA	75	-9.09	8.0	-17.09

Table 7-11. Conducted Power Density Measurements Ant WF7

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 35 of 102

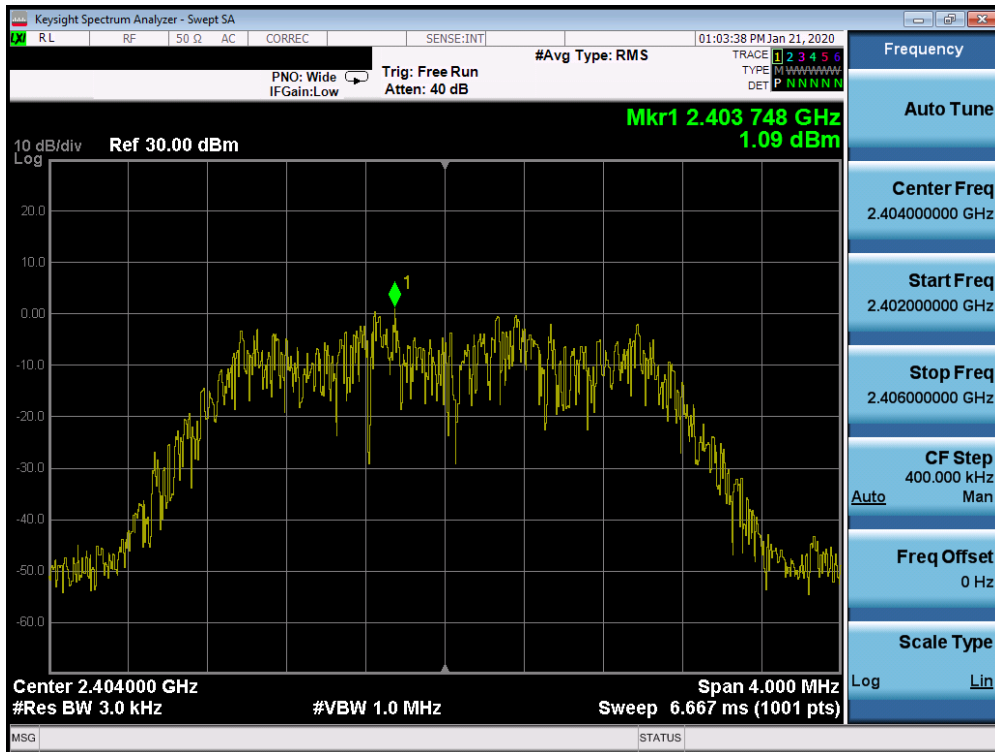


Plot 7-25. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

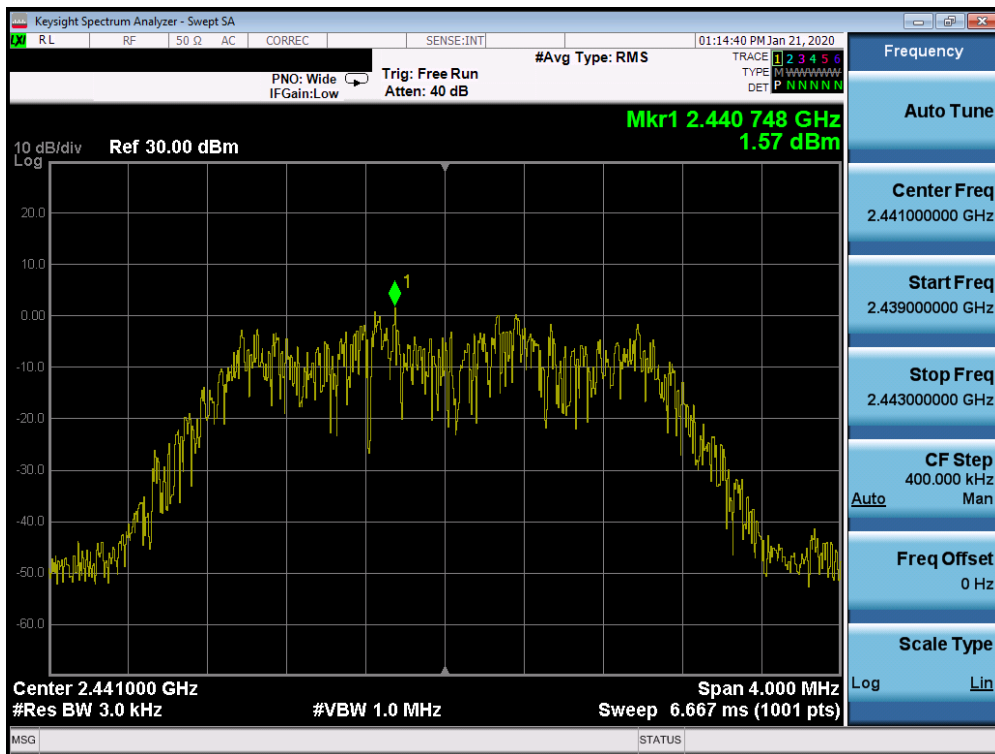


Plot 7-26. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 36 of 102

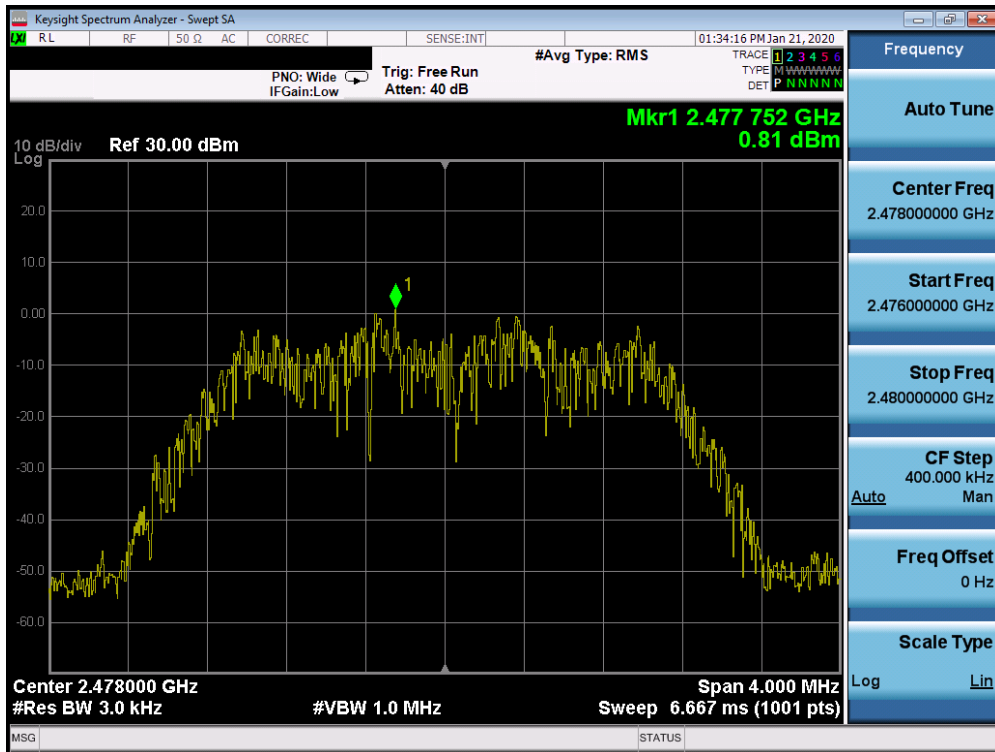


Plot 7-27. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

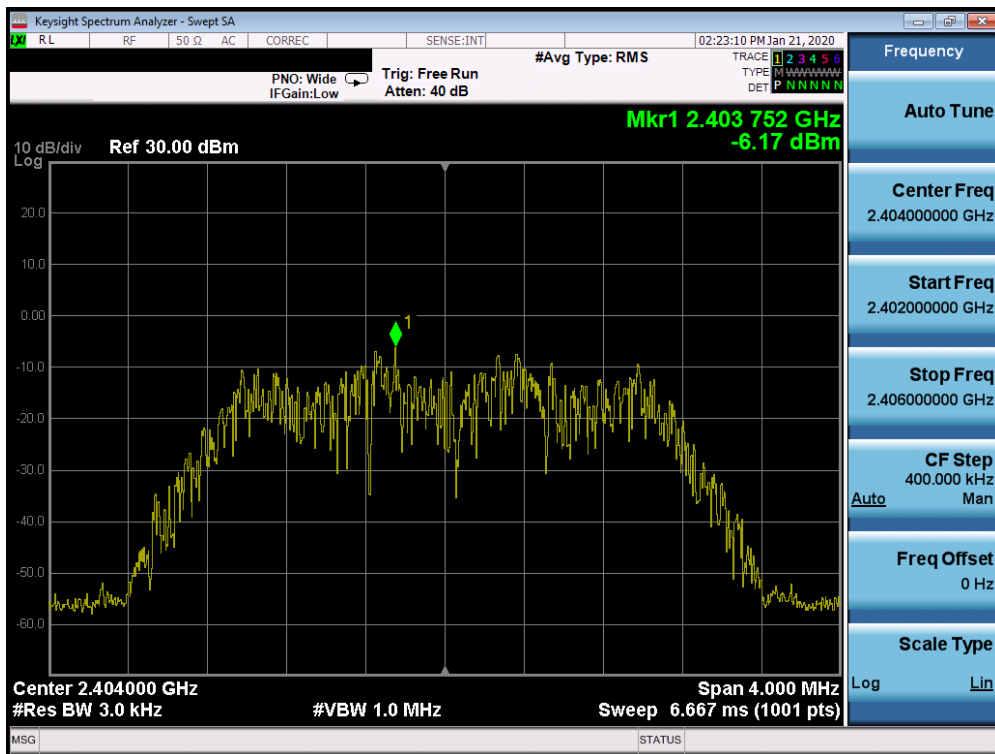


Plot 7-28. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 37 of 102

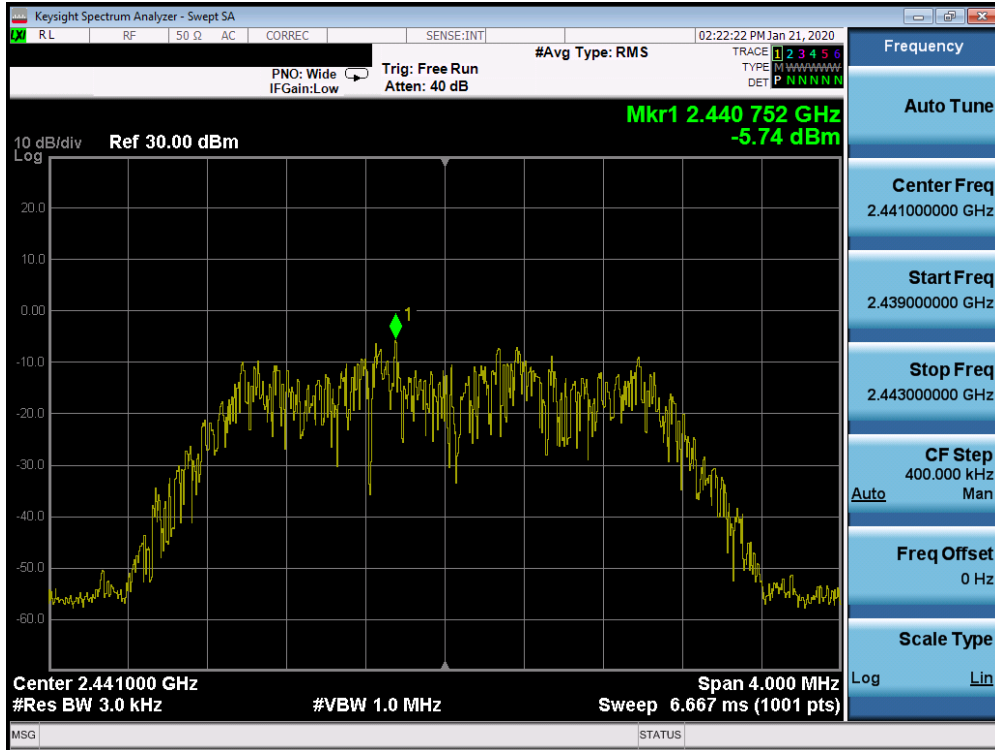


Plot 7-29. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

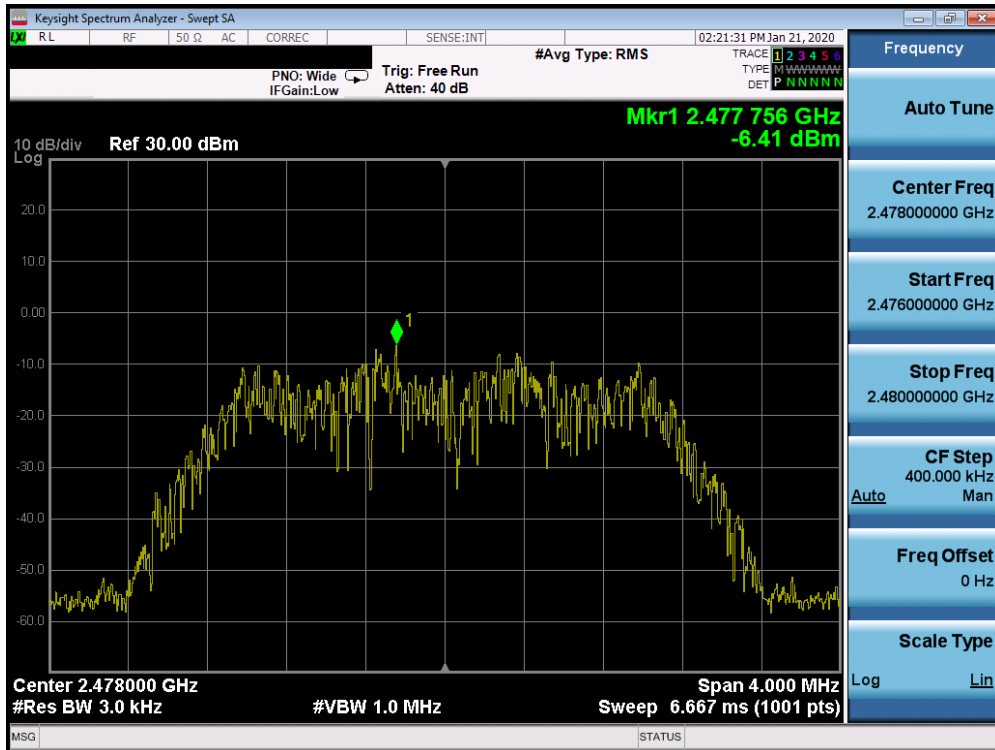


Plot 7-30. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 38 of 102

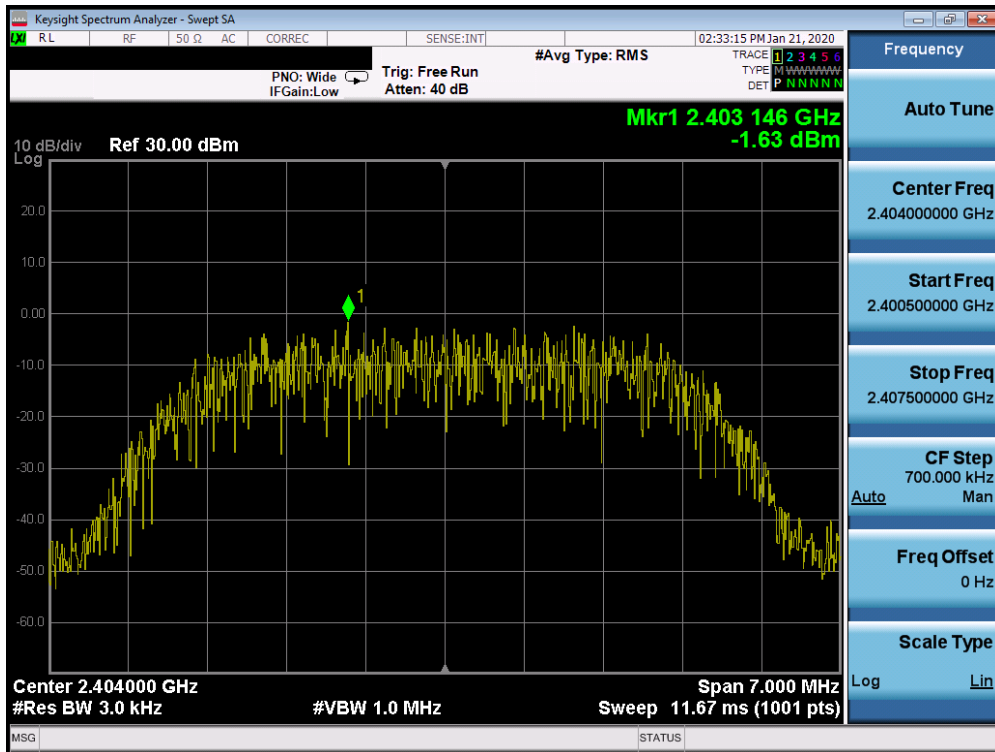


Plot 7-31. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

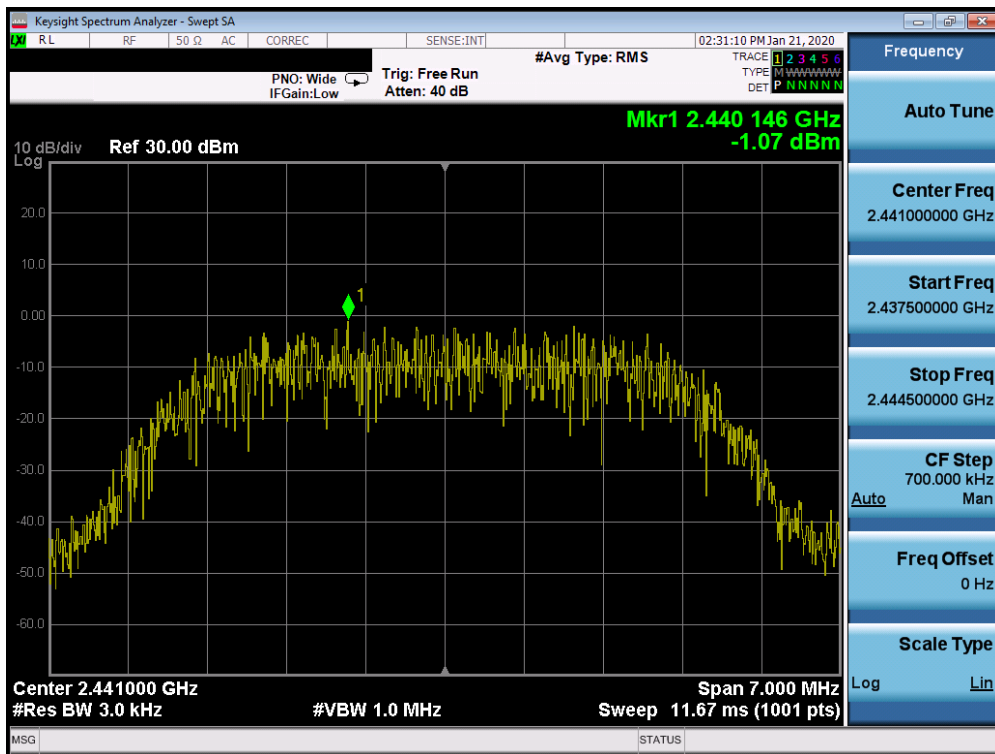


Plot 7-32. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 39 of 102

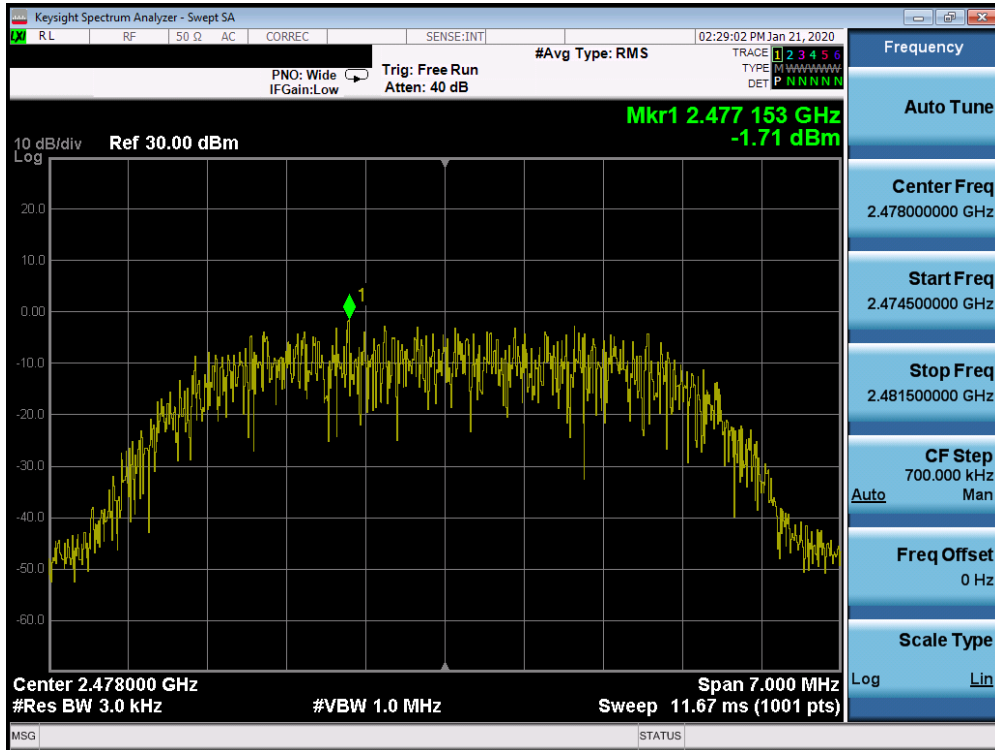


Plot 7-33. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 75)

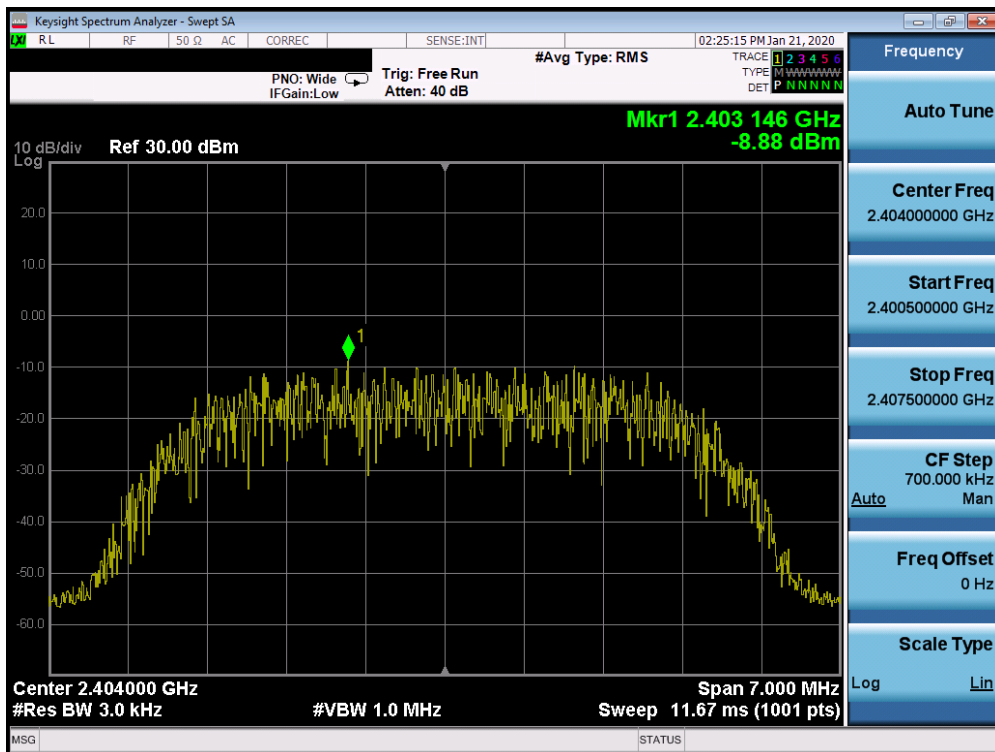


Plot 7-34. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 40 of 102

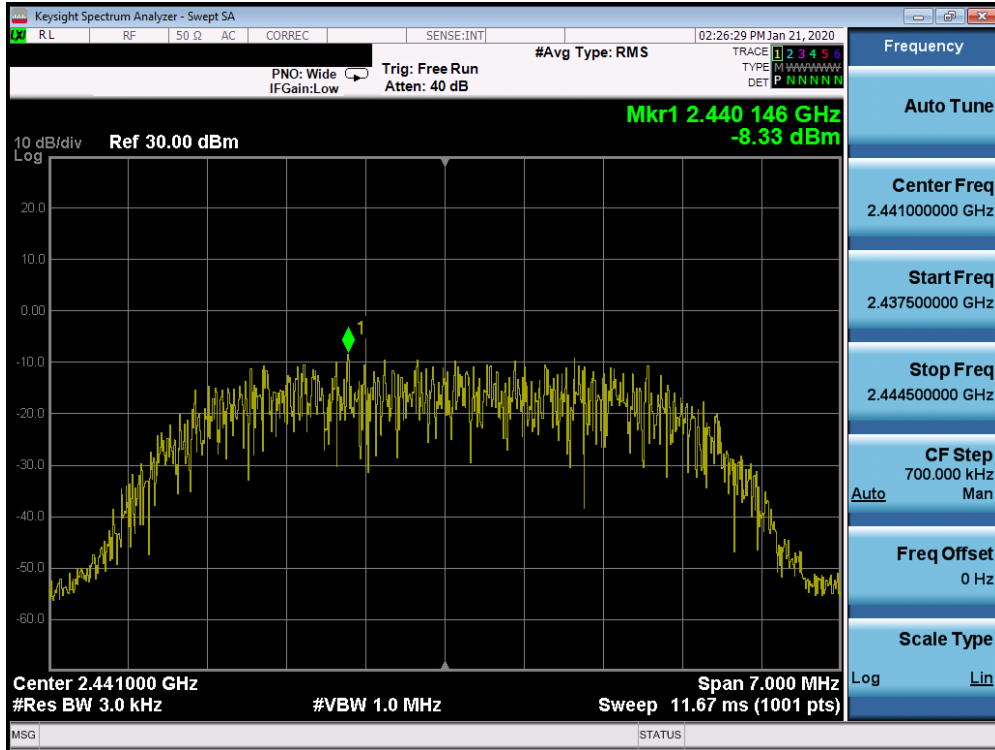

Plot 7-35. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

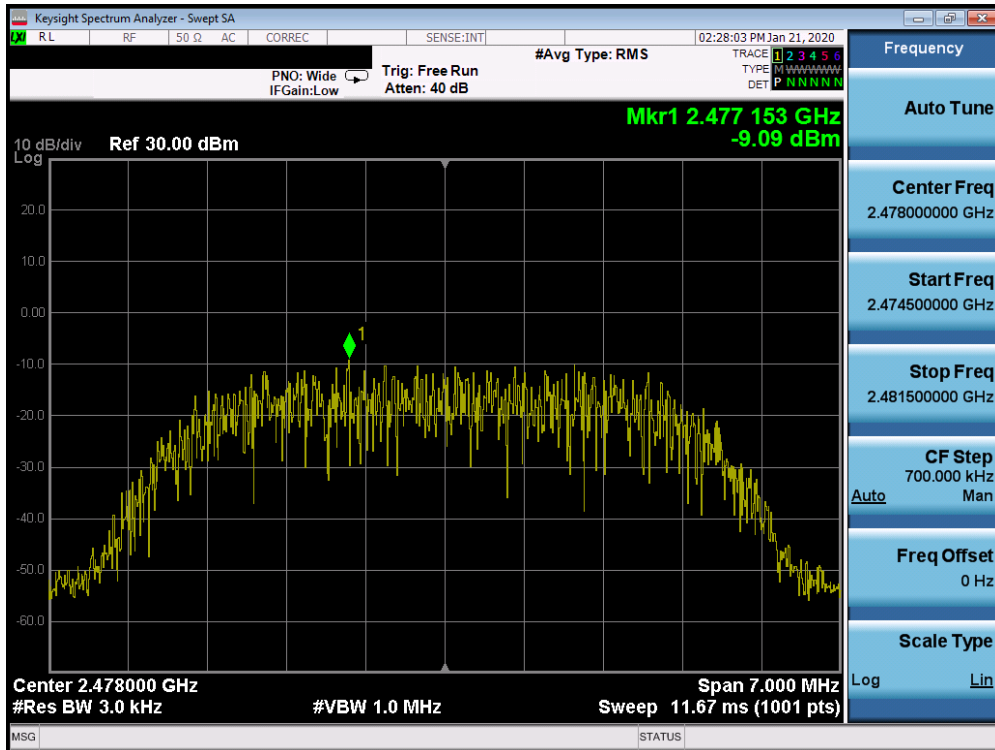

Plot 7-36. Power Spectral Density Plot Ant WF7 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 75)


FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 41 of 102

TxBF


Frequency [MHz]	Data Rate [Mbps]	Power Scheme	Channel No.	Measured Power Spectral Density [dBm / 3kHz]			Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]
				Ant WF8	Ant WF7	Summed		
2404	4.0	ePA	1	-5.41	-4.98	-2.18	8.0	-10.18
2441	4.0	ePA	38	-5.22	-5.06	-2.13	8.0	-10.13
2478	4.0	ePA	75	-5.36	-5.19	-2.26	8.0	-10.26
2404	4.0	iPA	1	-8.70	-8.83	-5.75	8.0	-13.75
2441	4.0	iPA	38	-9.08	-9.06	-6.06	8.0	-14.06
2478	4.0	iPA	75	-9.22	-9.12	-6.16	8.0	-14.16
2404	8.0	ePA	1	-6.09	-5.64	-2.85	8.0	-10.85
2441	8.0	ePA	38	-6.35	-5.86	-3.09	8.0	-11.09
2478	8.0	ePA	75	-6.37	-6.04	-3.19	8.0	-11.19
2404	8.0	iPA	1	-7.87	-8.38	-5.11	8.0	-13.11
2441	8.0	iPA	38	-6.87	-7.91	-4.35	8.0	-12.35
2478	8.0	iPA	75	-8.00	-9.47	-5.66	8.0	-13.66

Table 7-12. Conducted Power Density Measurements TxBF

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 42 of 102

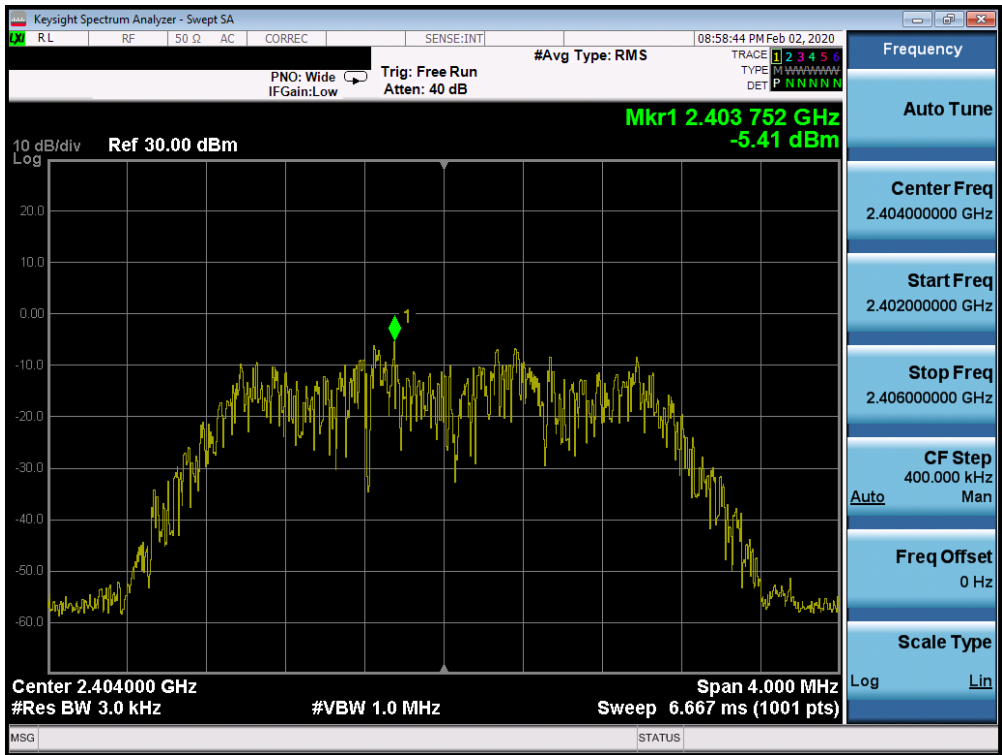


Plot 7-37. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

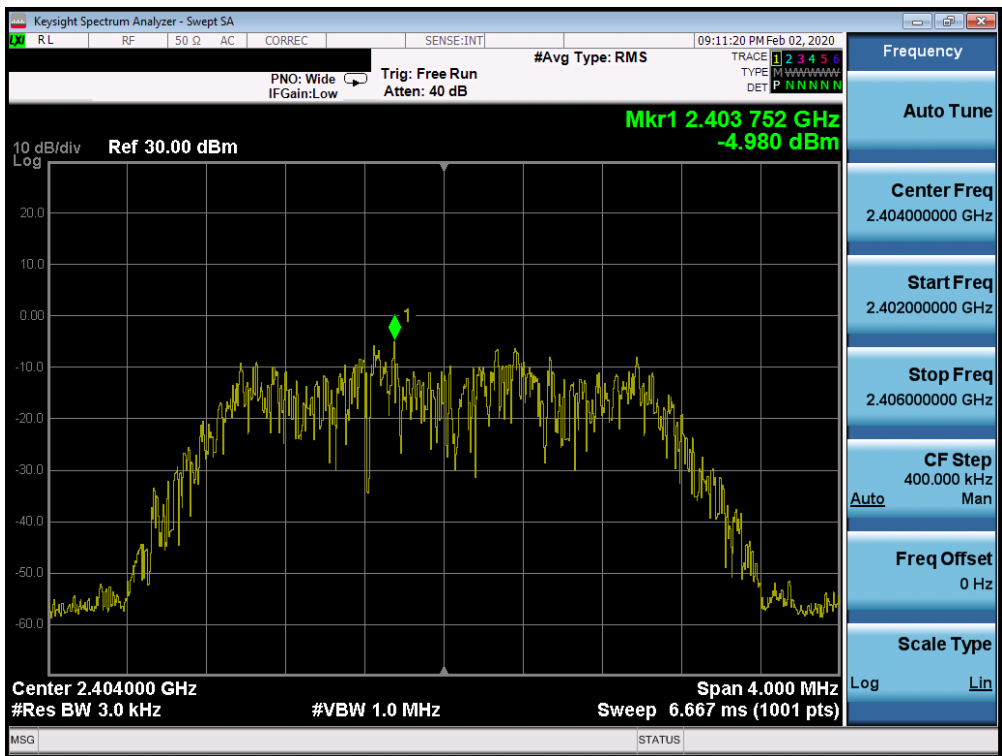


Plot 7-38. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 43 of 102

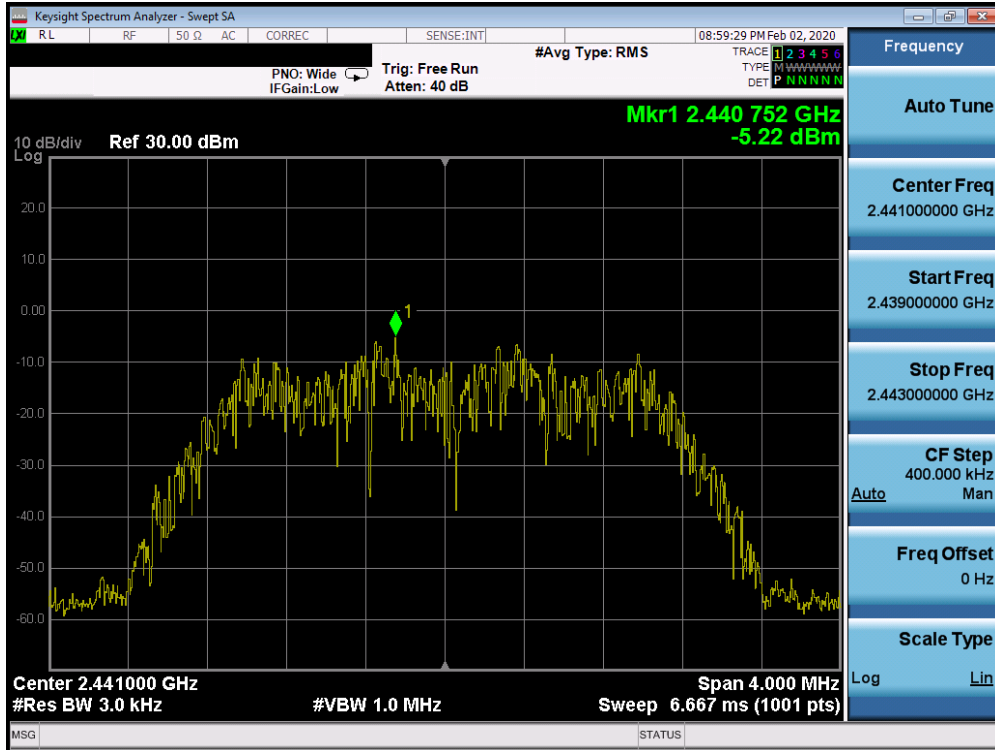


Plot 7-39. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

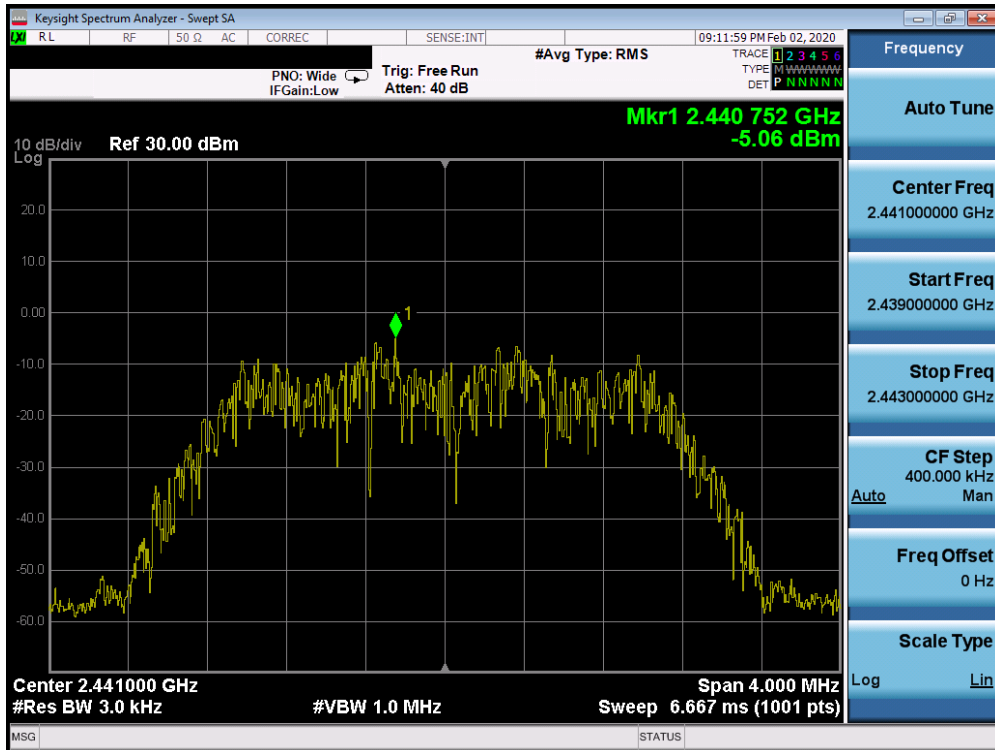


Plot 7-40. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 44 of 102

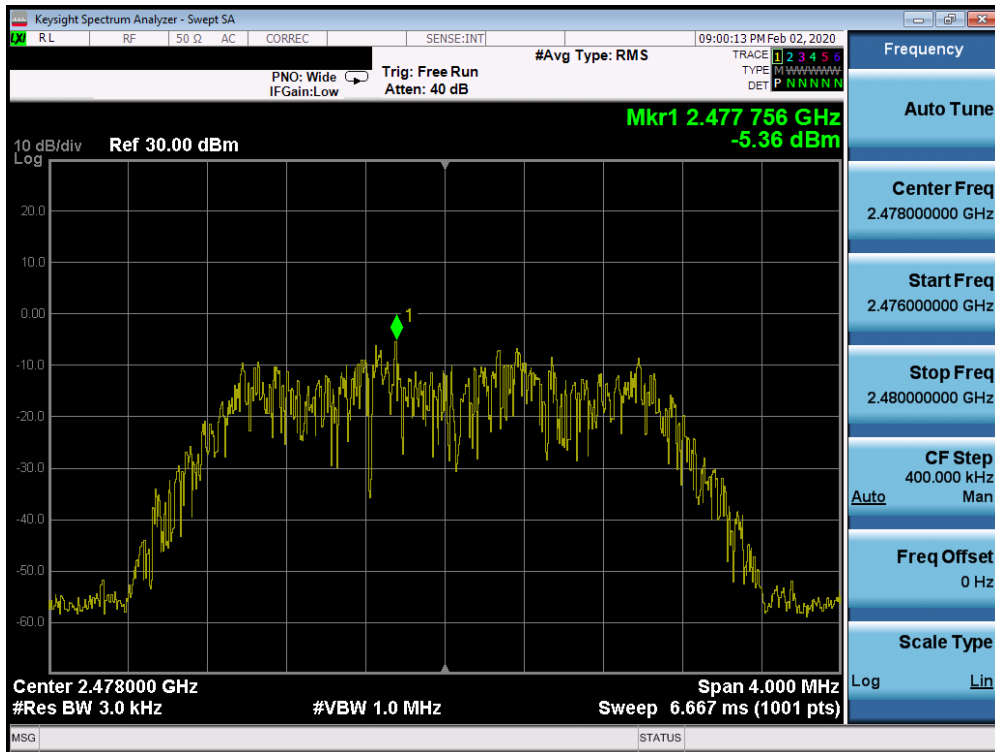


Plot 7-41. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

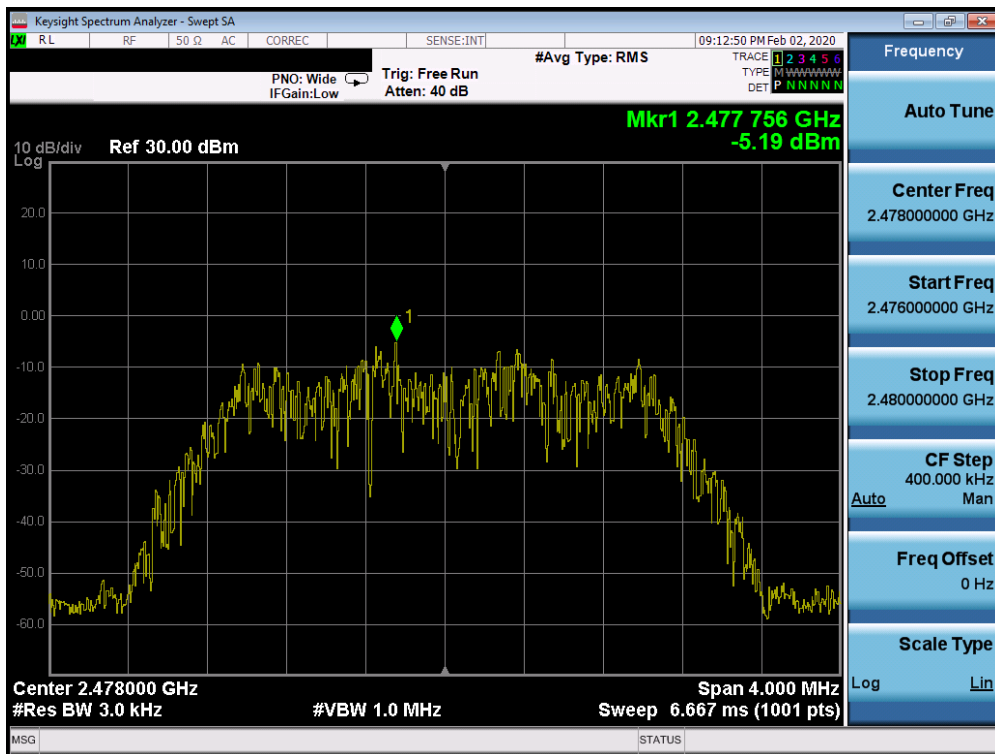


Plot 7-42. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 45 of 102

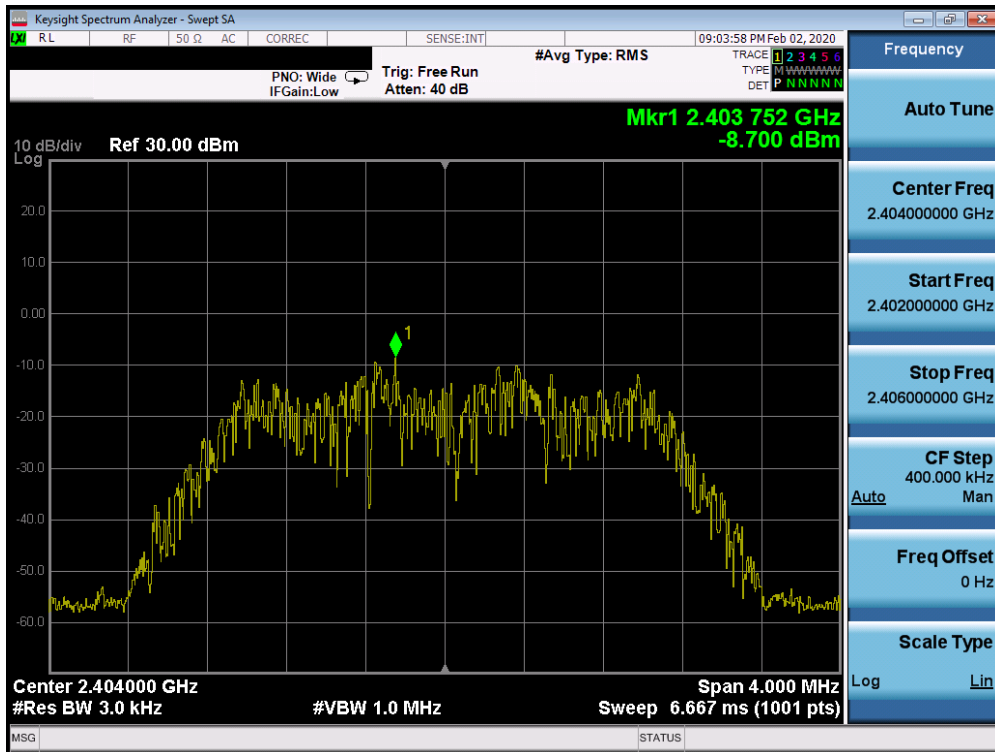


Plot 7-43. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

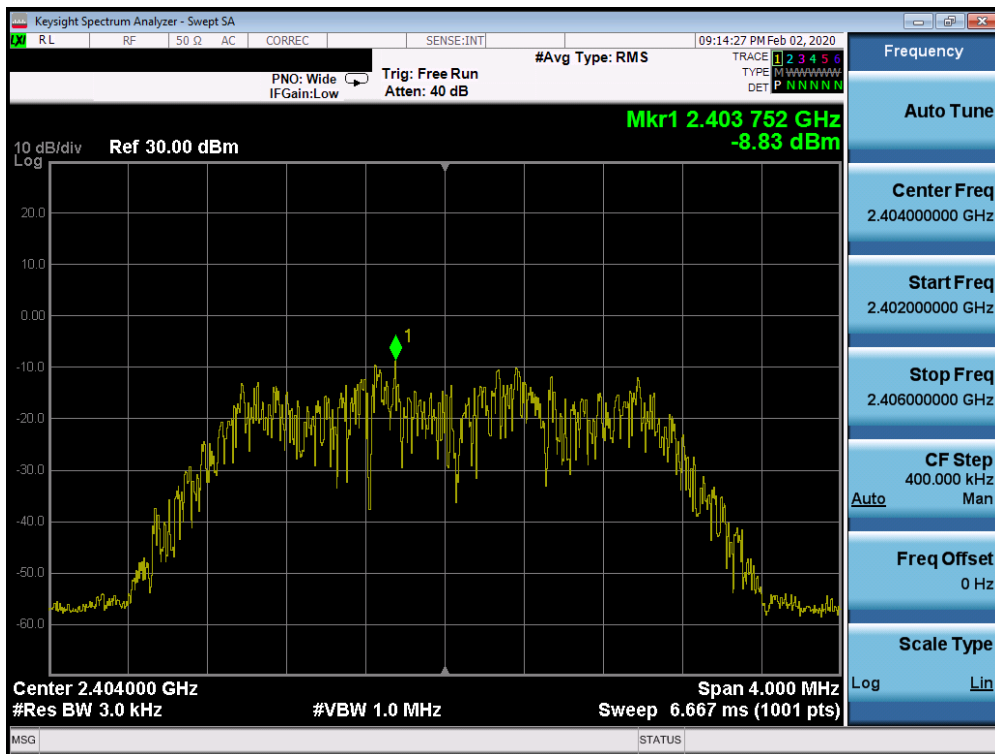


Plot 7-44. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 46 of 102

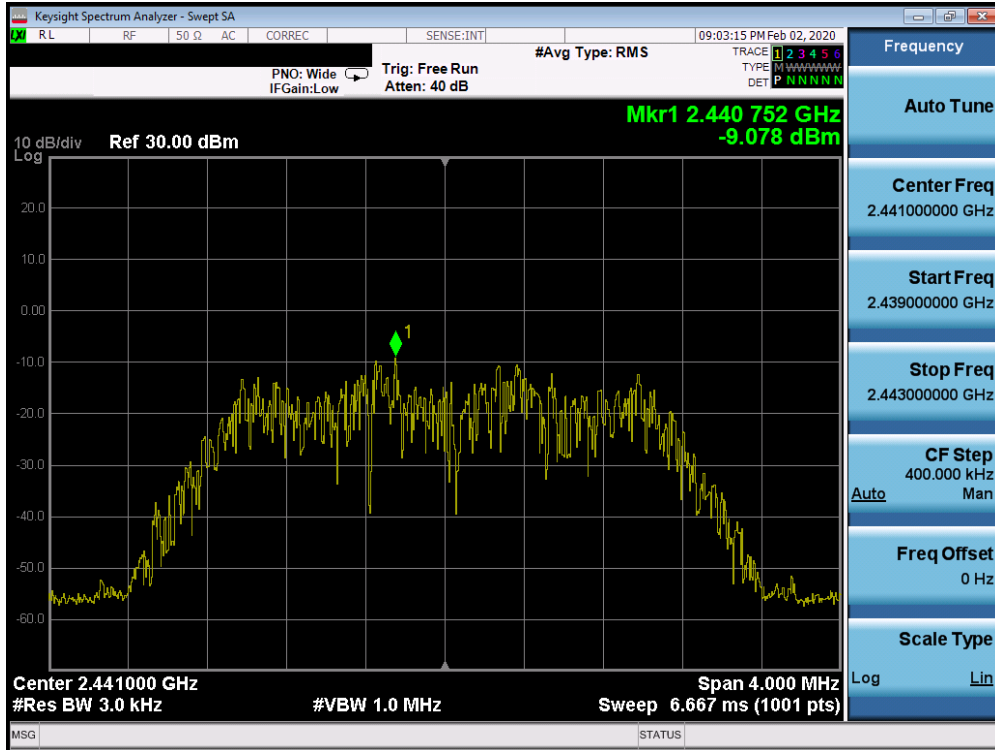


Plot 7-45. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

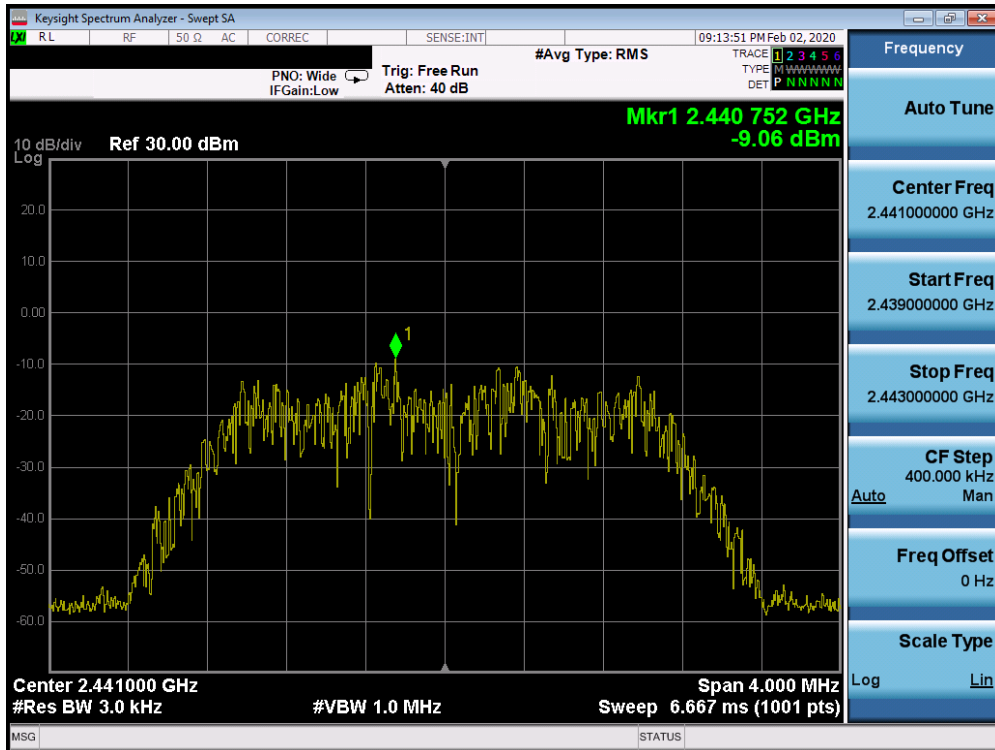


Plot 7-46. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 47 of 102

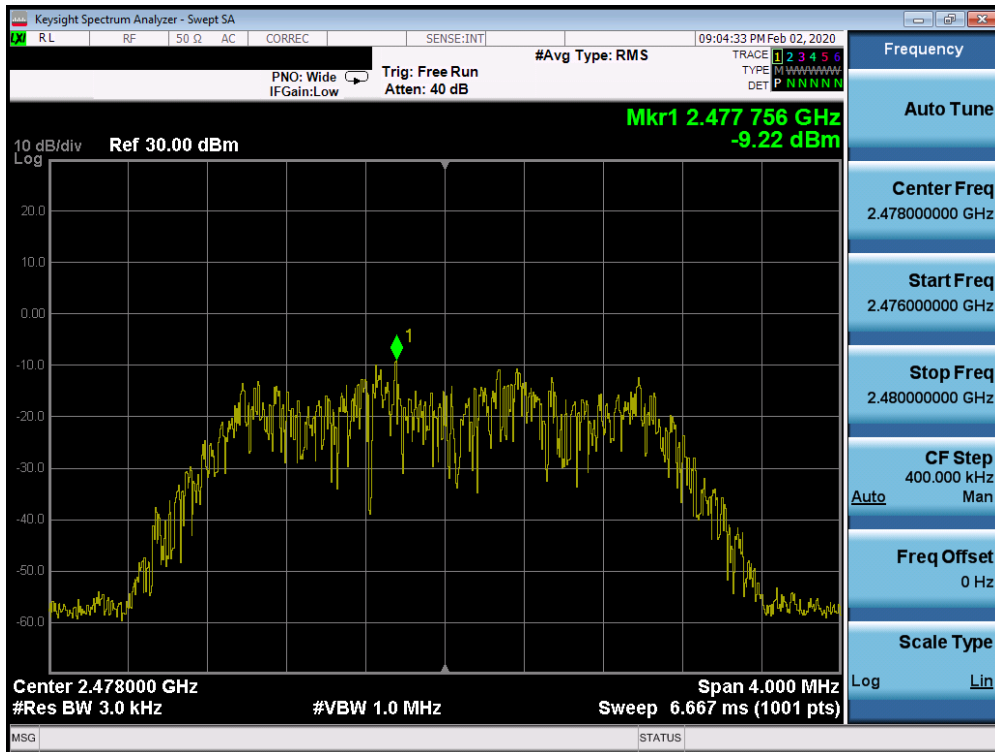


Plot 7-47. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 75)

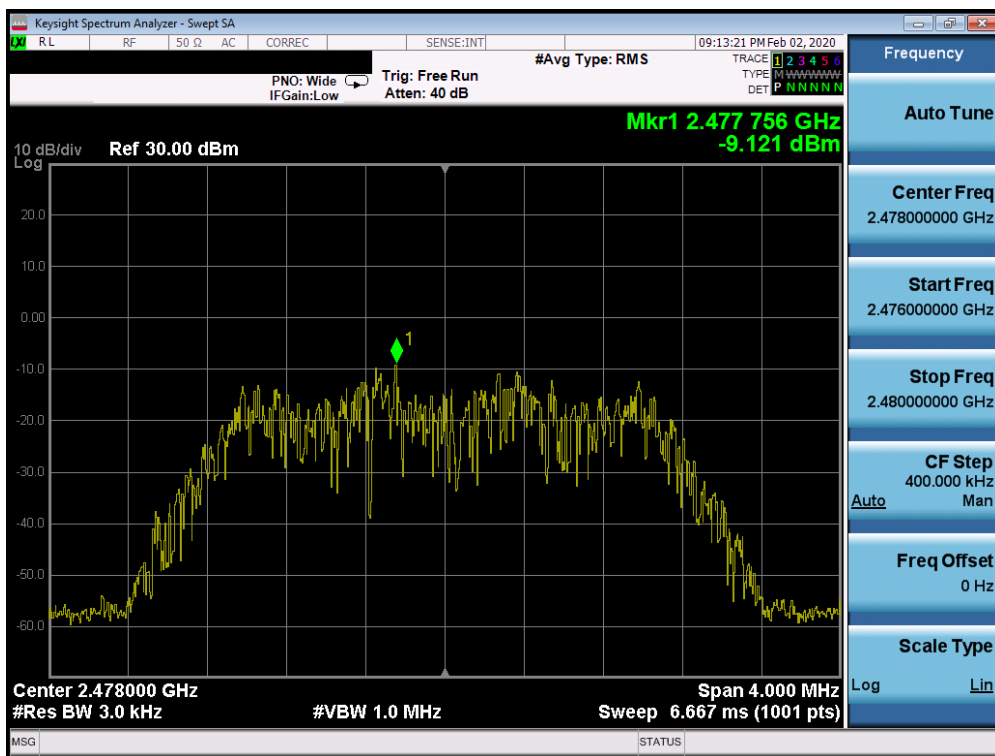


Plot 7-48. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR4), 4Mbps, iPA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 48 of 102

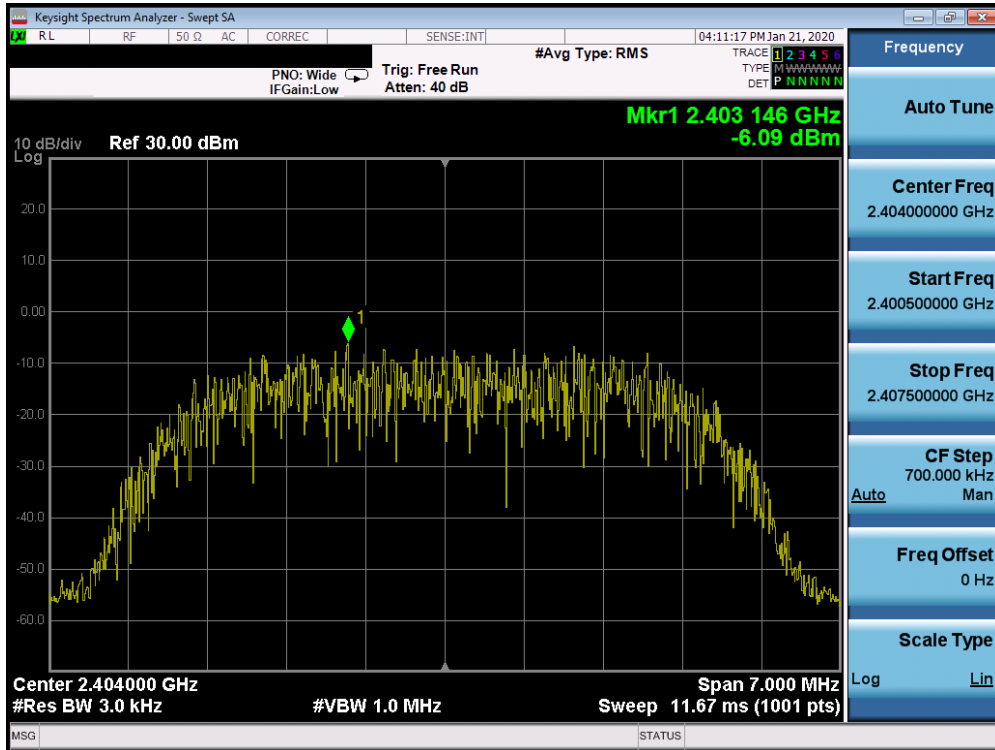


Plot 7-49. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

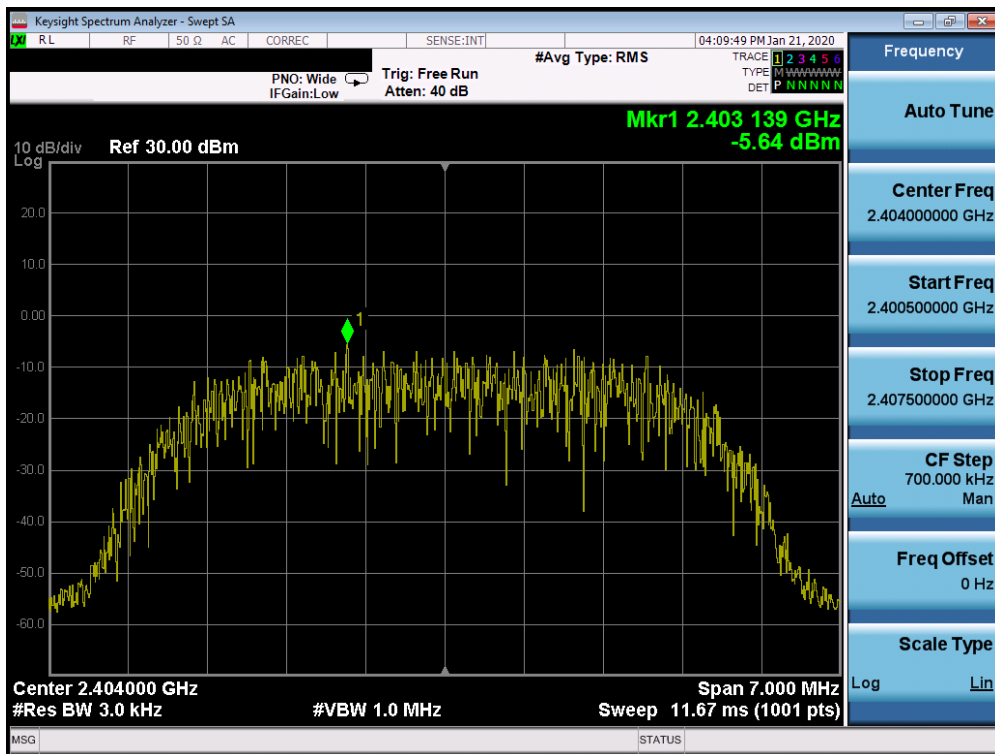


Plot 7-50. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 49 of 102

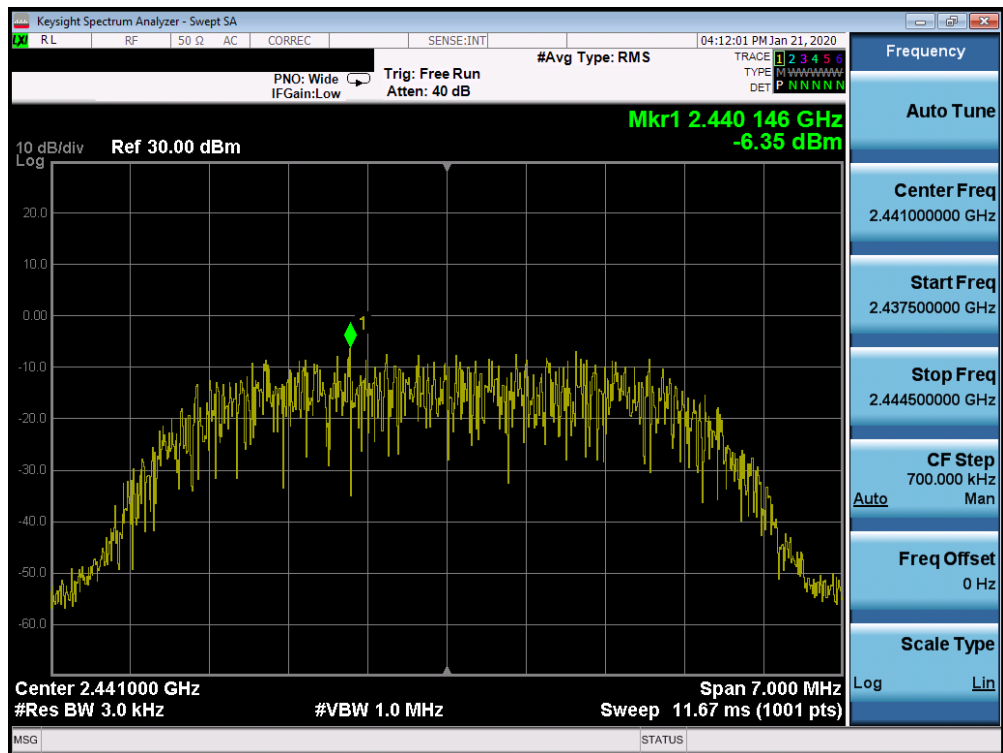


Plot 7-51. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

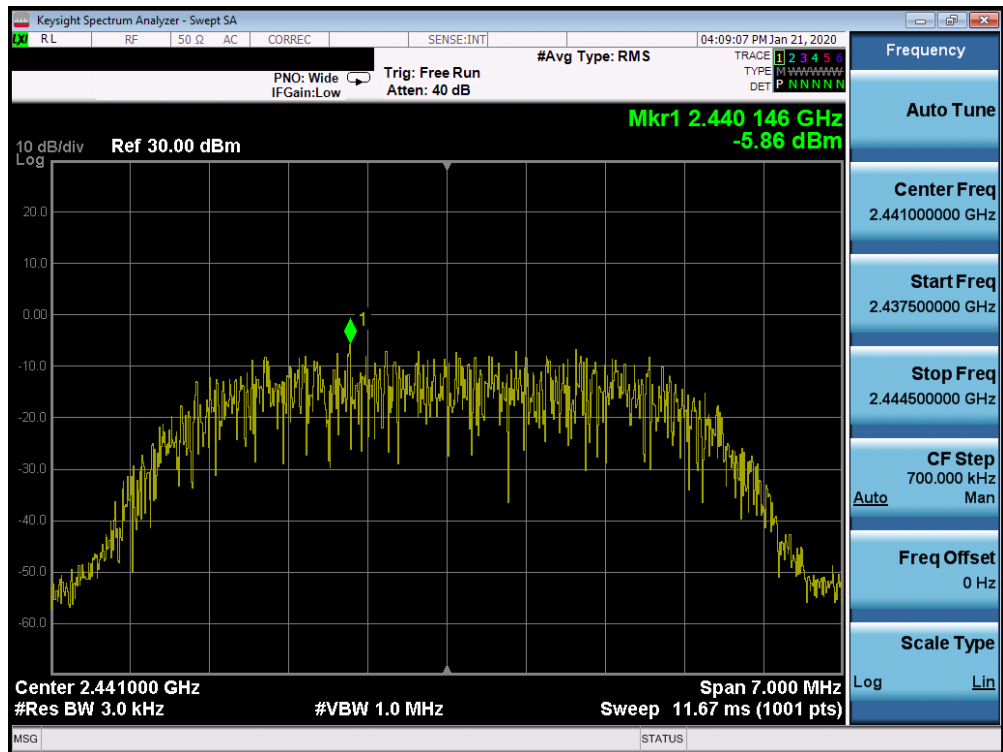


Plot 7-52. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 50 of 102

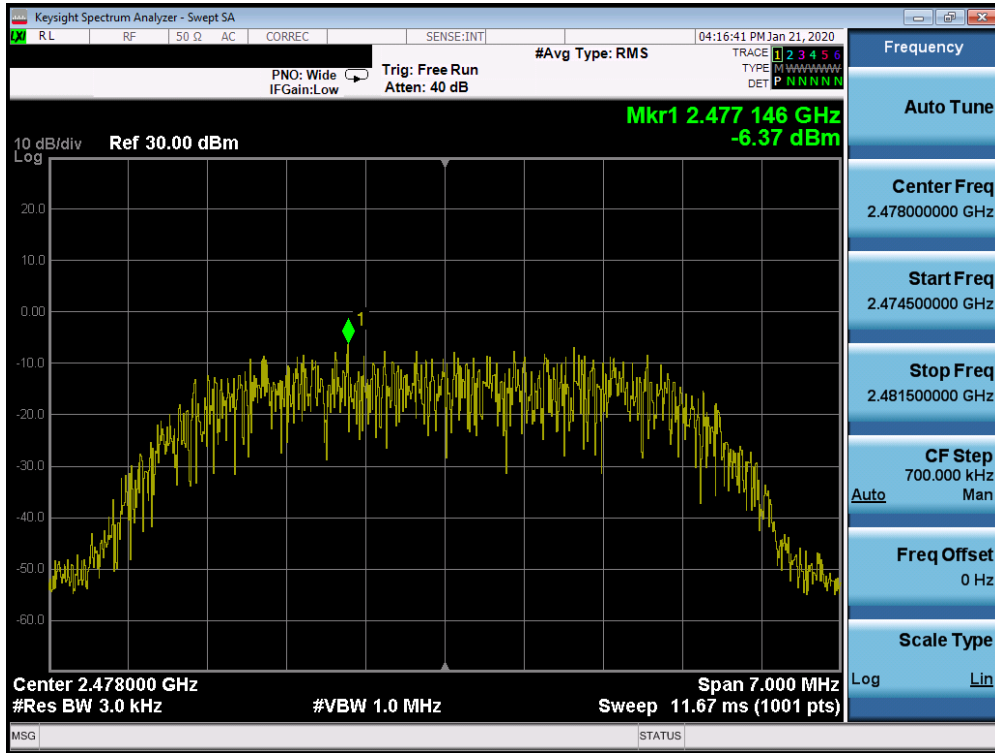


Plot 7-53. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 75)

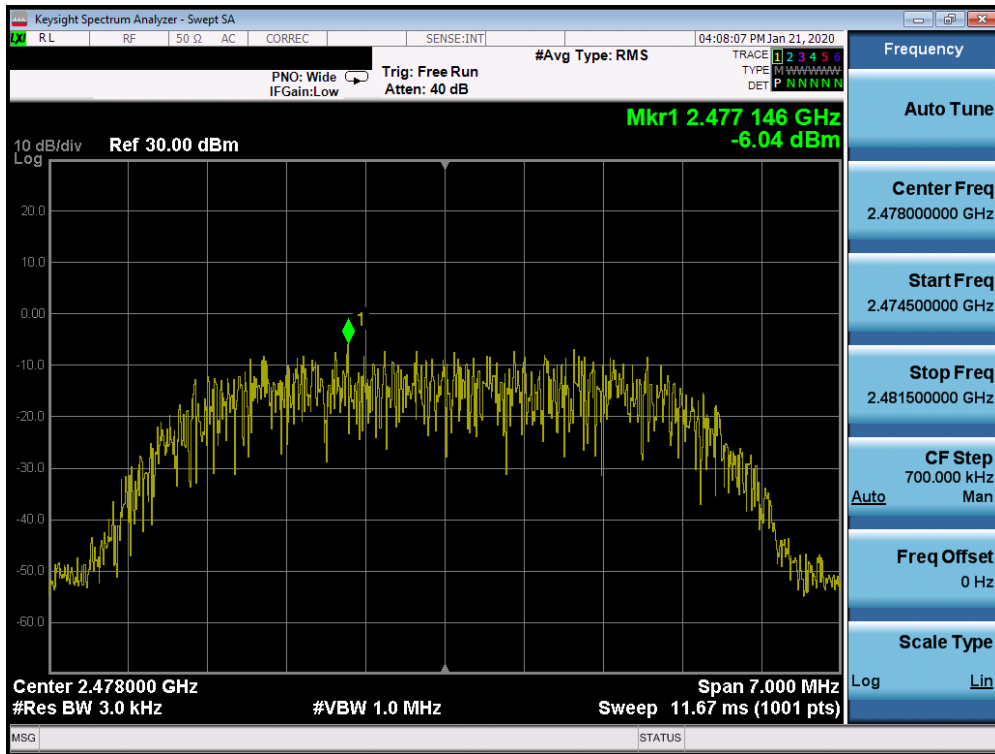


Plot 7-54. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR8), 8Mbps, ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 51 of 102

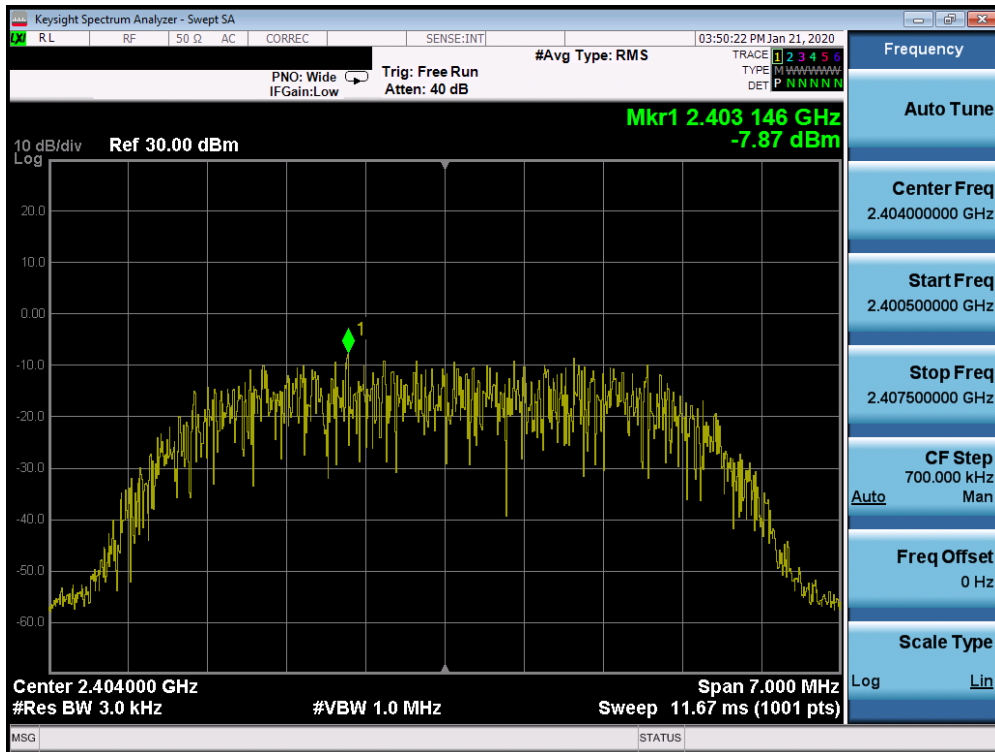


Plot 7-55. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

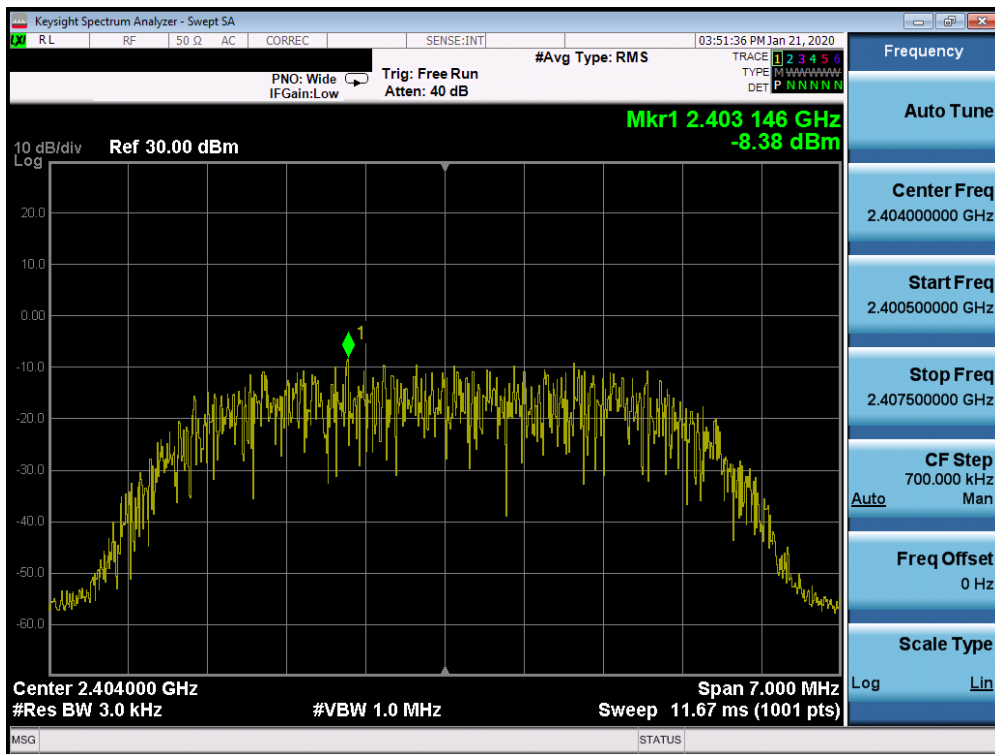


Plot 7-56. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 52 of 102

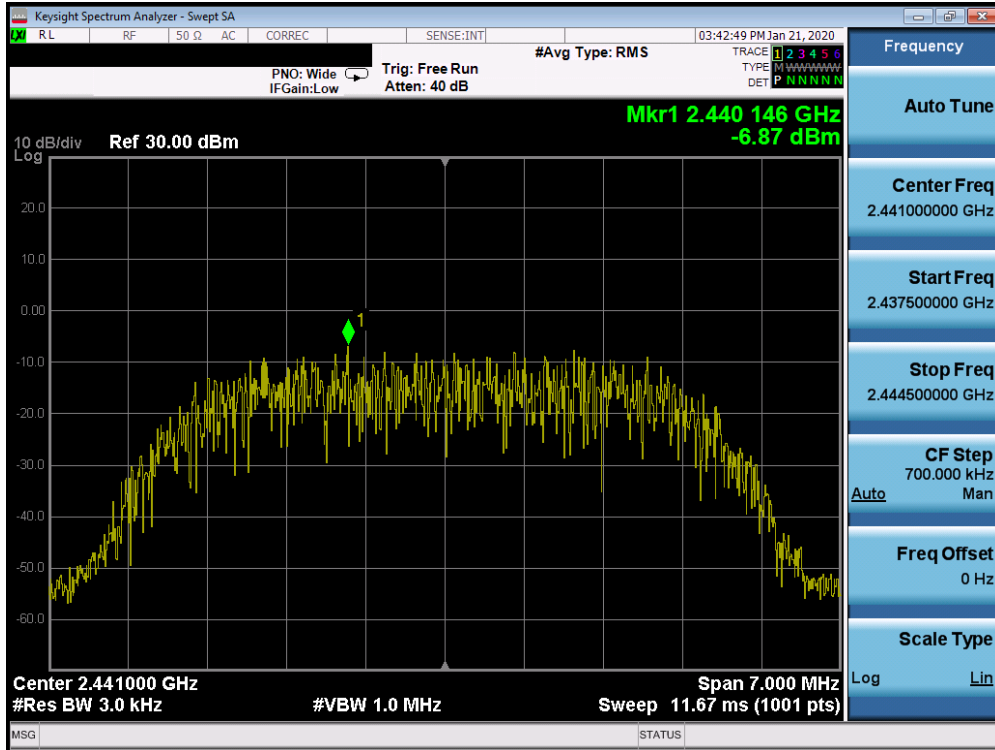


Plot 7-57. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

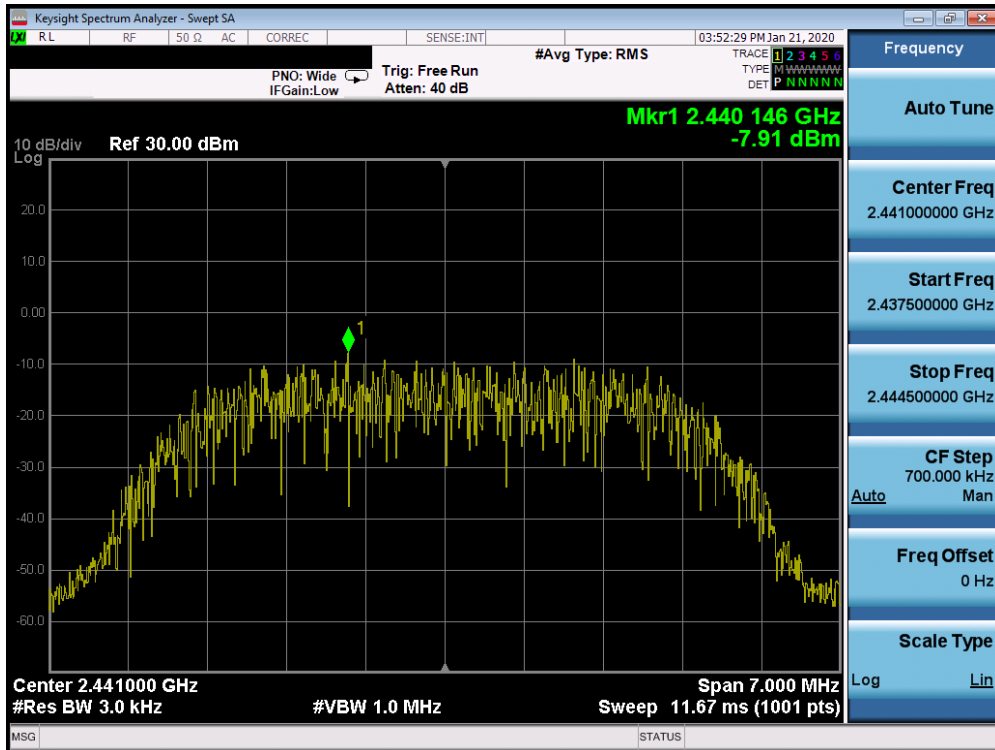


Plot 7-58. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 53 of 102

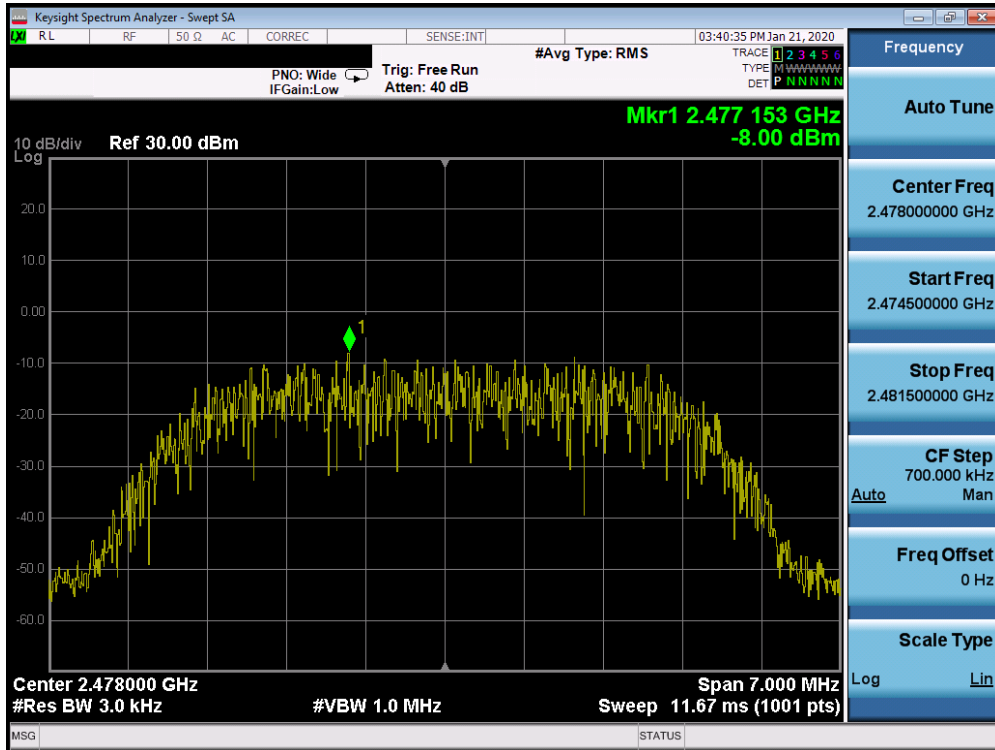

Plot 7-59. Power Spectral Density Plot TxBF Ant WF8 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 75)

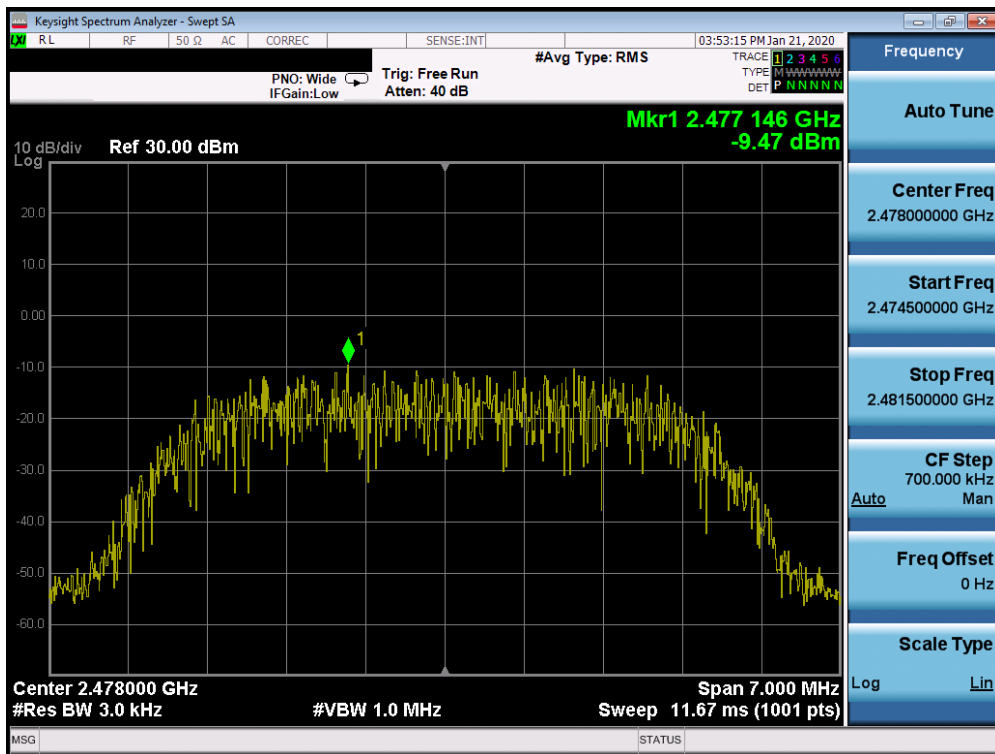

Plot 7-60. Power Spectral Density Plot TxBF Ant WF7 (Bluetooth (HDR8), 8Mbps, iPA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 54 of 102

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

For the following out of band conducted spurious emissions plots at the band edge, the EUT was set to transmit at maximum power with the largest packet size available. These settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes

Both power schemes were investigated and only the worst case is reported.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 55 of 102

Ant WF8

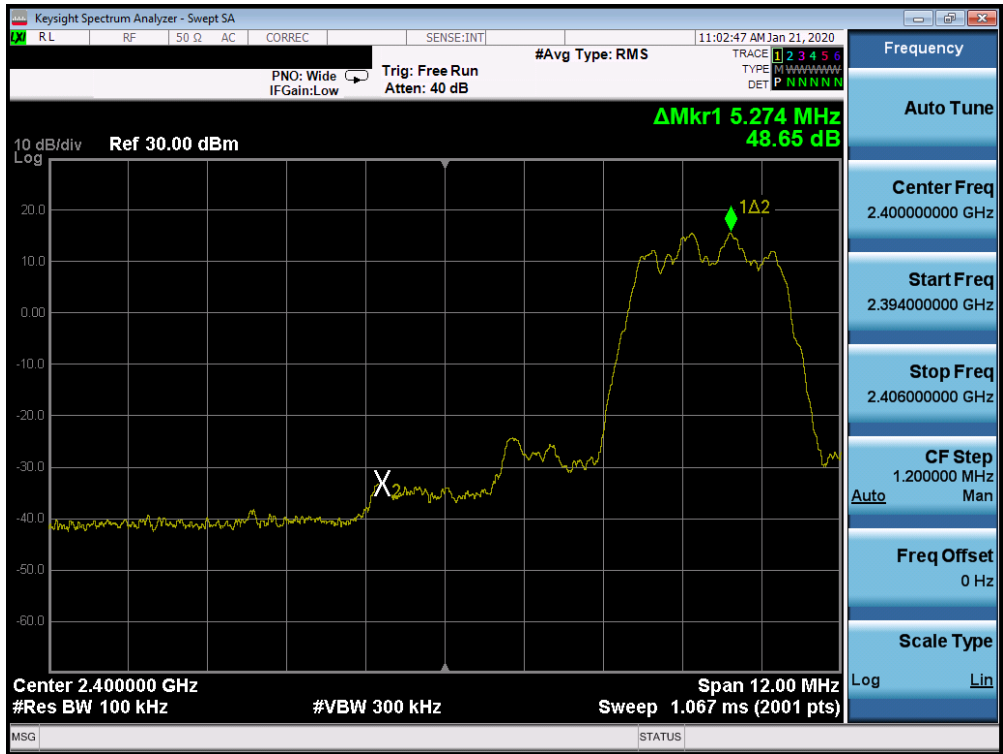


Plot 7-61. Band Edge Plot Ant WF8 (Bluetooth (HDR4), ePA – Ch. 1)



Plot 7-62. Band Edge Plot Ant WF8 (Bluetooth (HDR4), ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 56 of 102

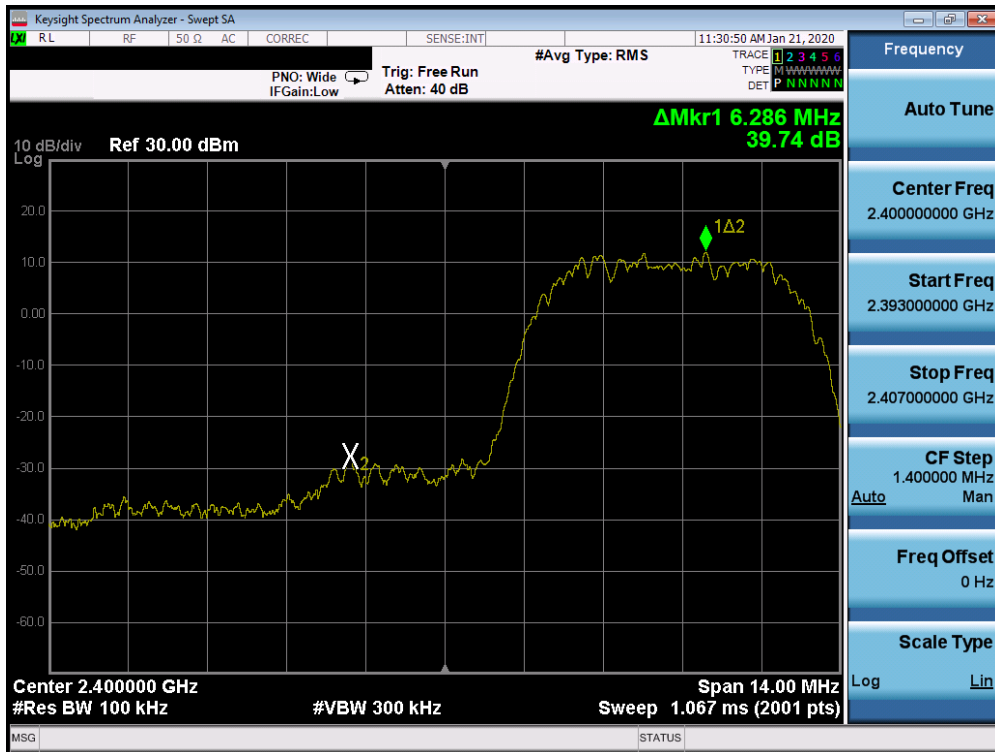

Plot 7-63. Band Edge Plot Ant WF8 (Bluetooth (HDR8), ePA – Ch. 1)




Plot 7-64. Band Edge Plot Ant WF8 (Bluetooth (HDR8), ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 57 of 102




Plot 7-65. Band Edge Plot Ant WF7 (Bluetooth (HDR4), ePA – Ch. 1)

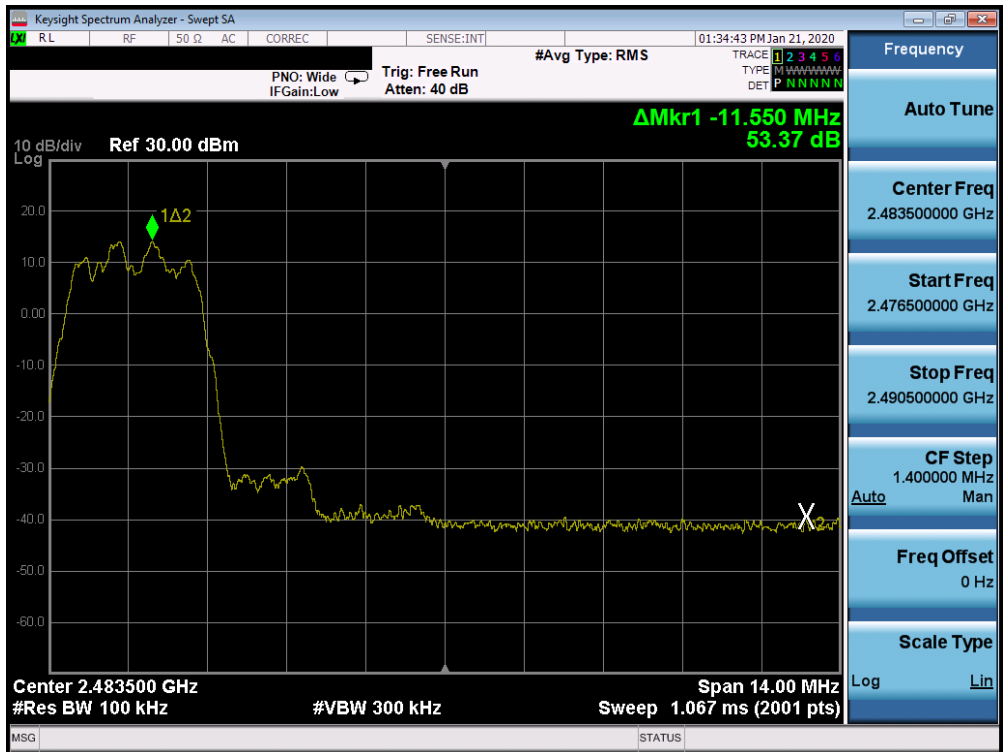


Plot 7-66. Band Edge Plot Ant WF7 (Bluetooth (HDR4), ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 58 of 102

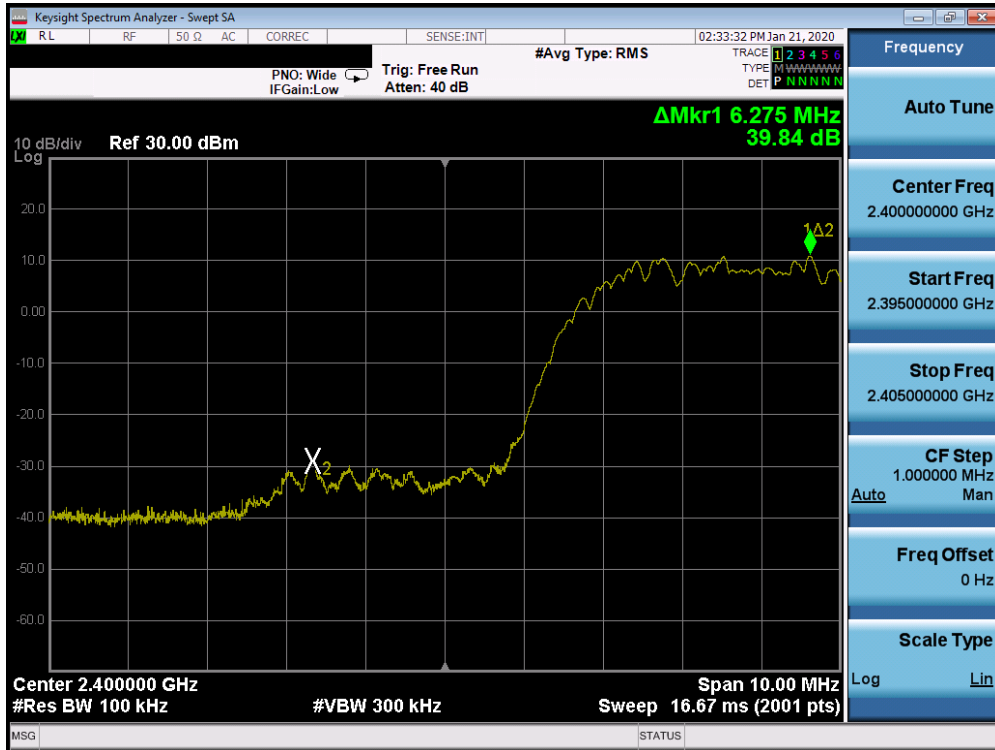

Plot 7-67. Band Edge Plot Ant WF7 (Bluetooth (HDR8), ePA – Ch. 1)

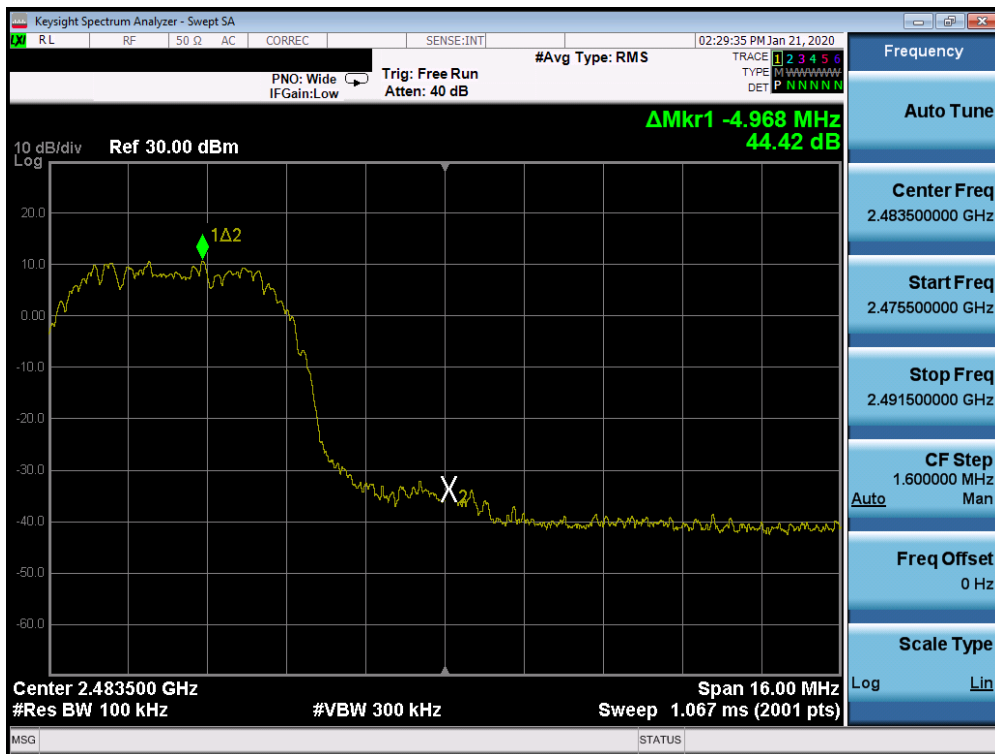

Plot 7-68. Band Edge Plot Ant WF7 (Bluetooth (HDR8), ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 59 of 102

7.6 Conducted Spurious Emissions

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 8.5 of KDB 558074 D01 v05r02 and Section 11.11 of ANSI C63.10-2013.

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 60 of 102




Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The unit was tested with all possible mode and power schemes and only the highest emission is reported.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 61 of 102

Ant WF8

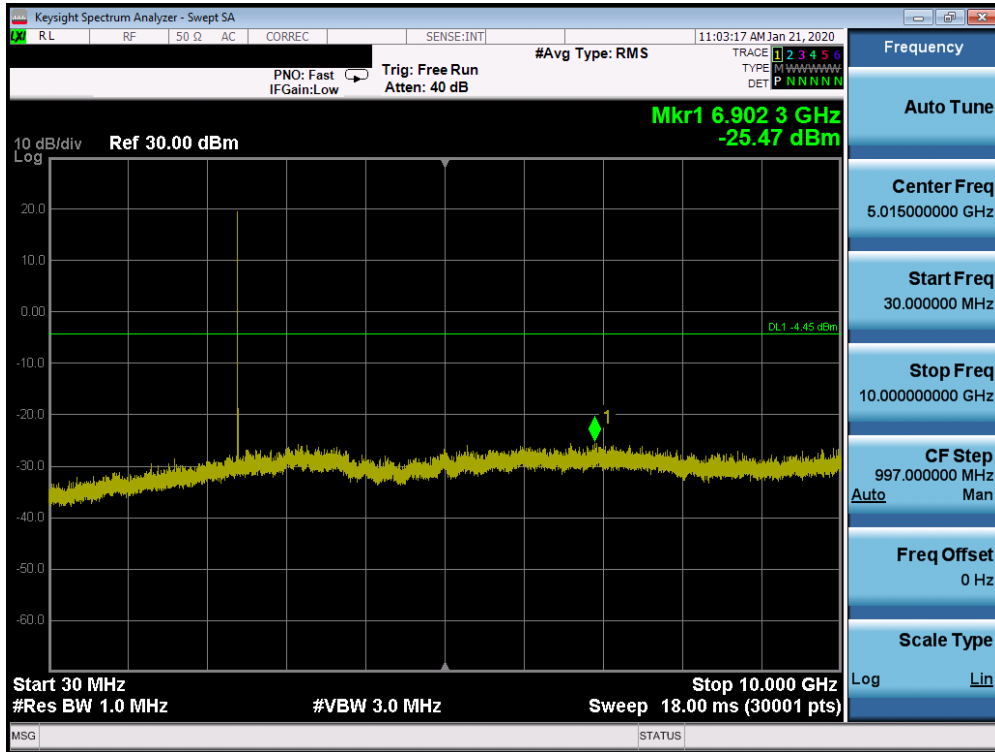


Plot 7-69. Conducted Spurious Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

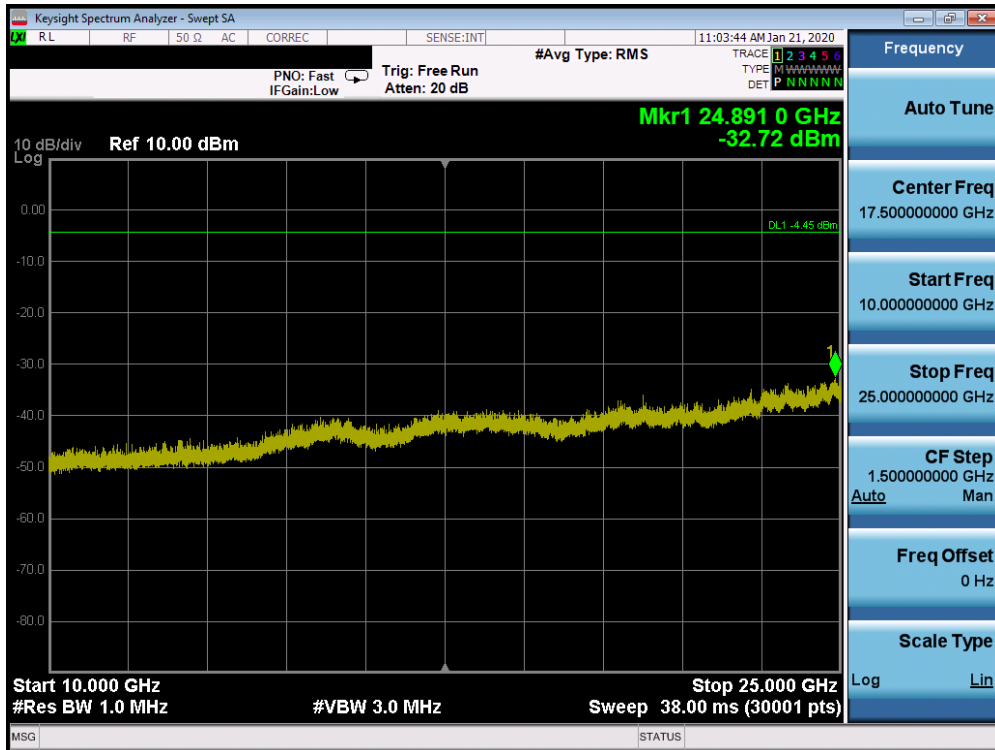


Plot 7-70. Conducted Spurious Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 62 of 102

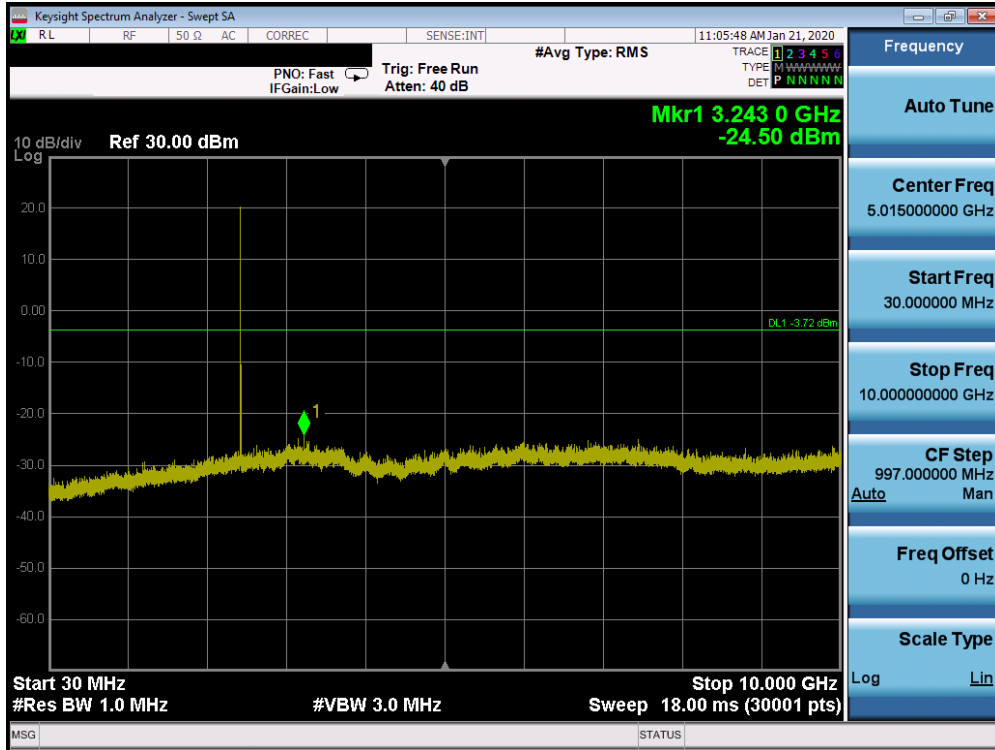


Plot 7-71. Conducted Spurious Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

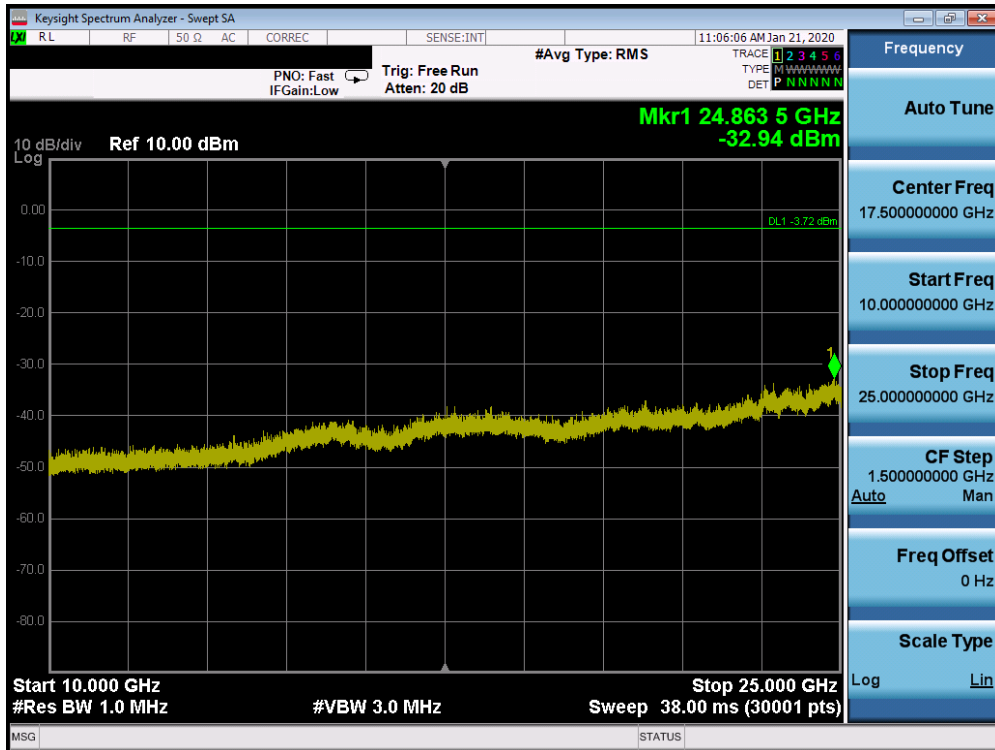


Plot 7-72. Conducted Spurious Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 63 of 102

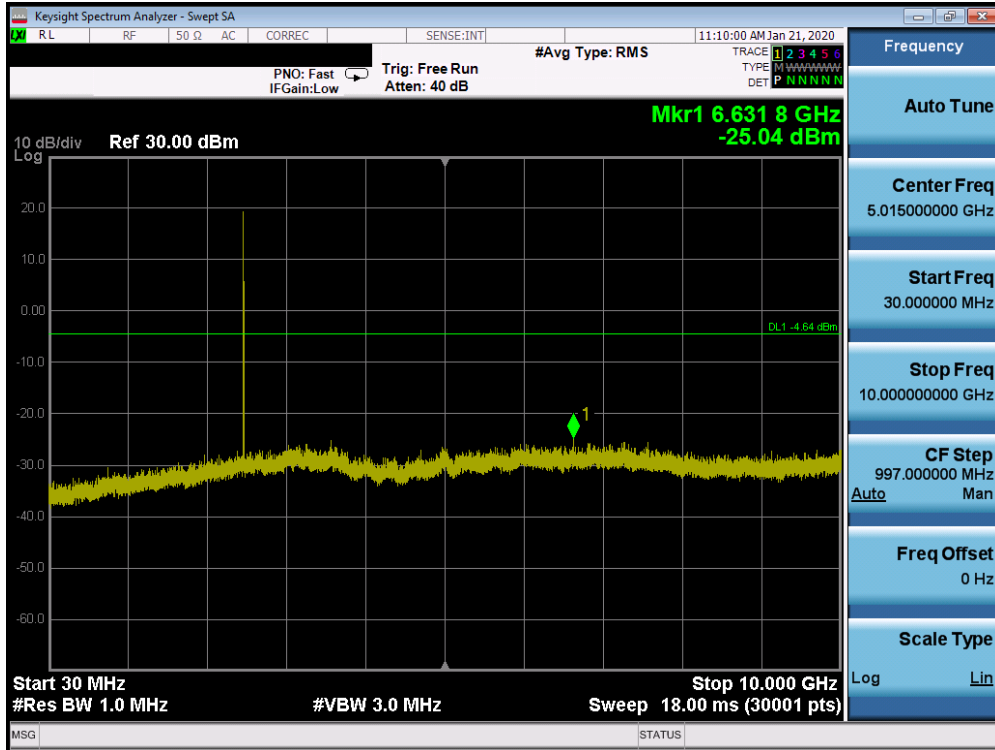


Plot 7-73. Conducted Spurious Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

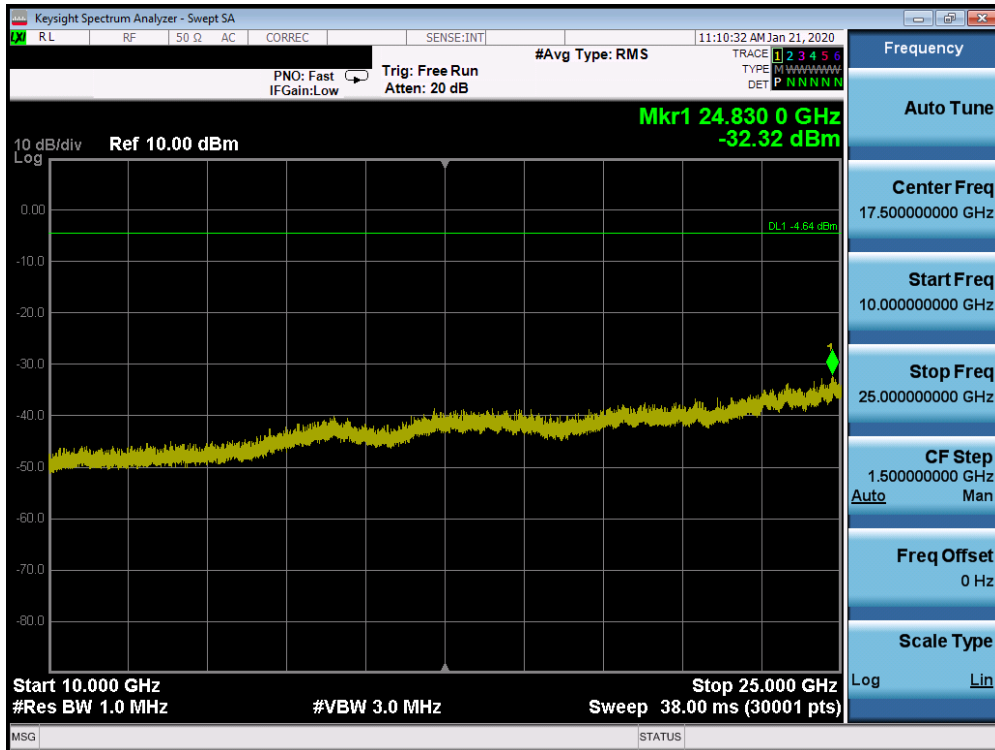


Plot 7-74. Conducted Spurious Plot Ant WF8 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 64 of 102

Ant WF7

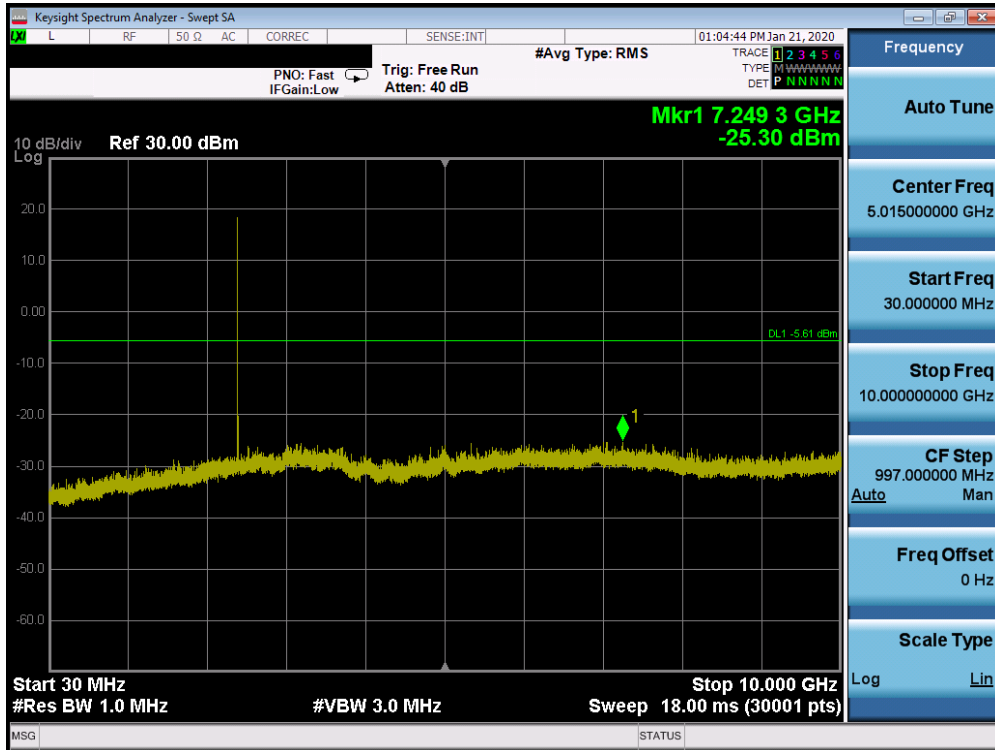


Plot 7-75. Conducted Spurious Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

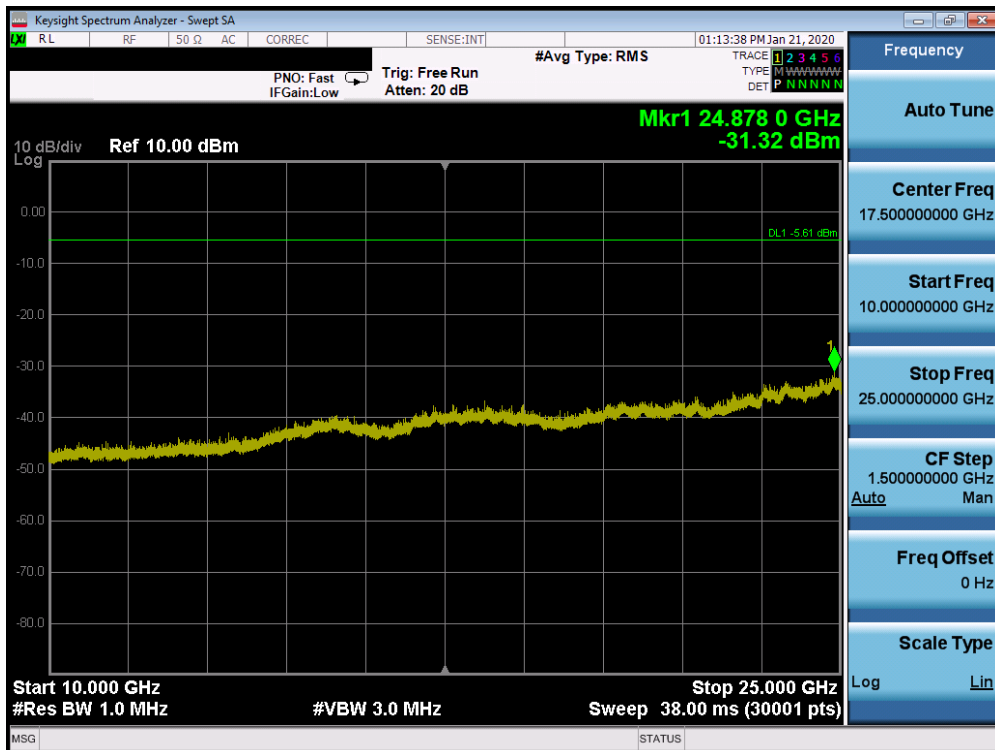


Plot 7-76. Conducted Spurious Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 1)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 65 of 102

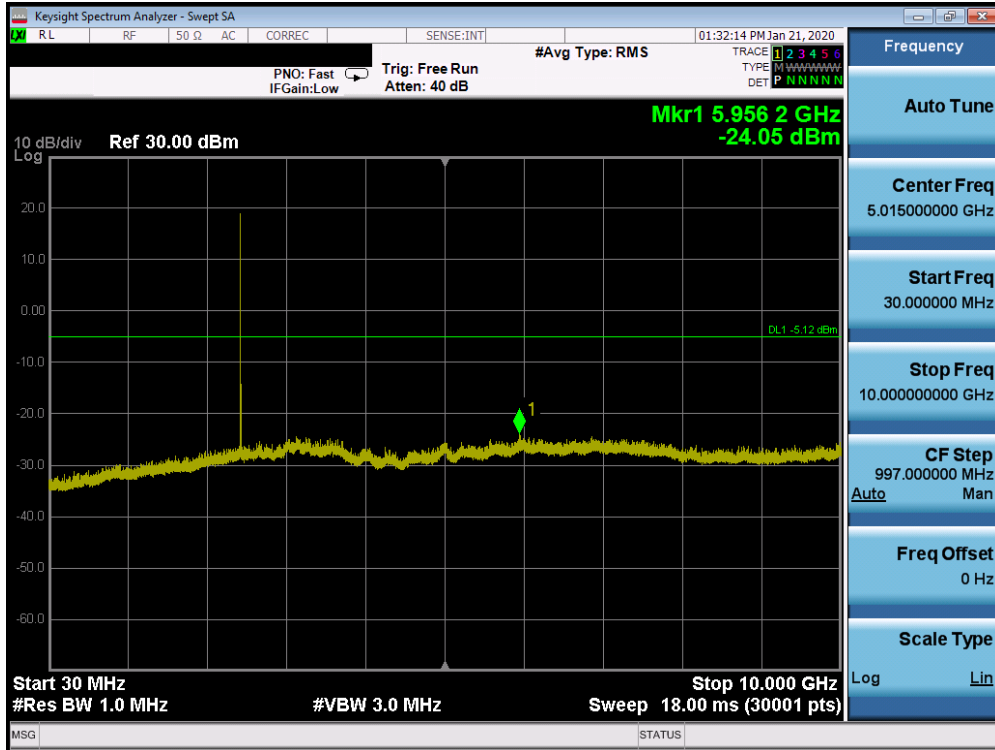


Plot 7-77. Conducted Spurious Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

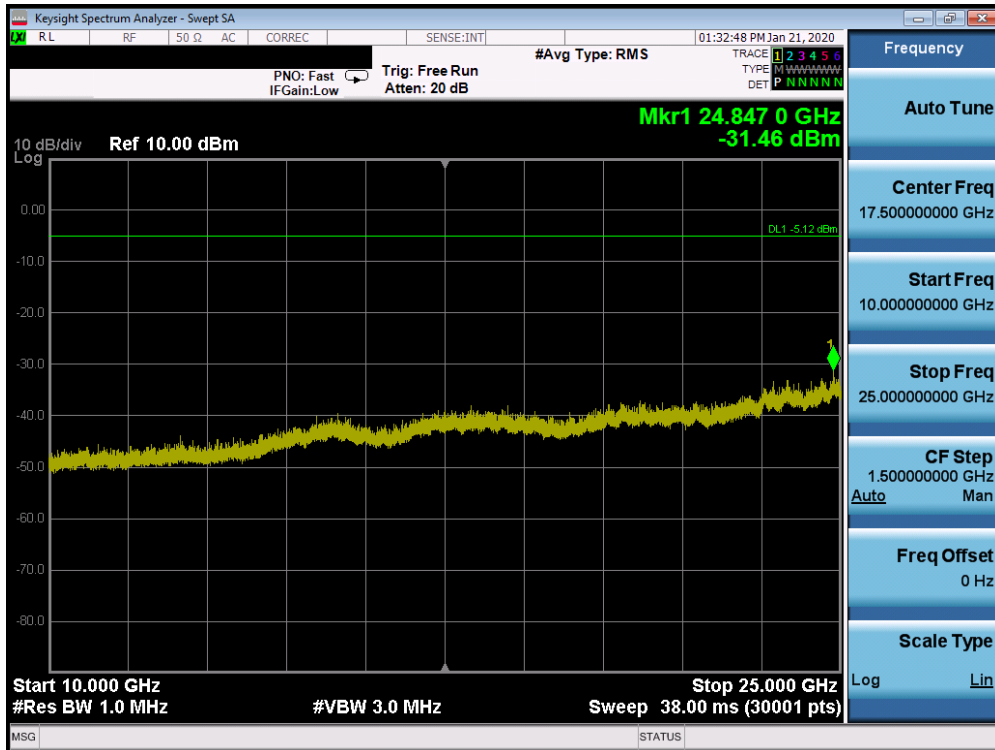


Plot 7-78. Conducted Spurious Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 38)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 66 of 102

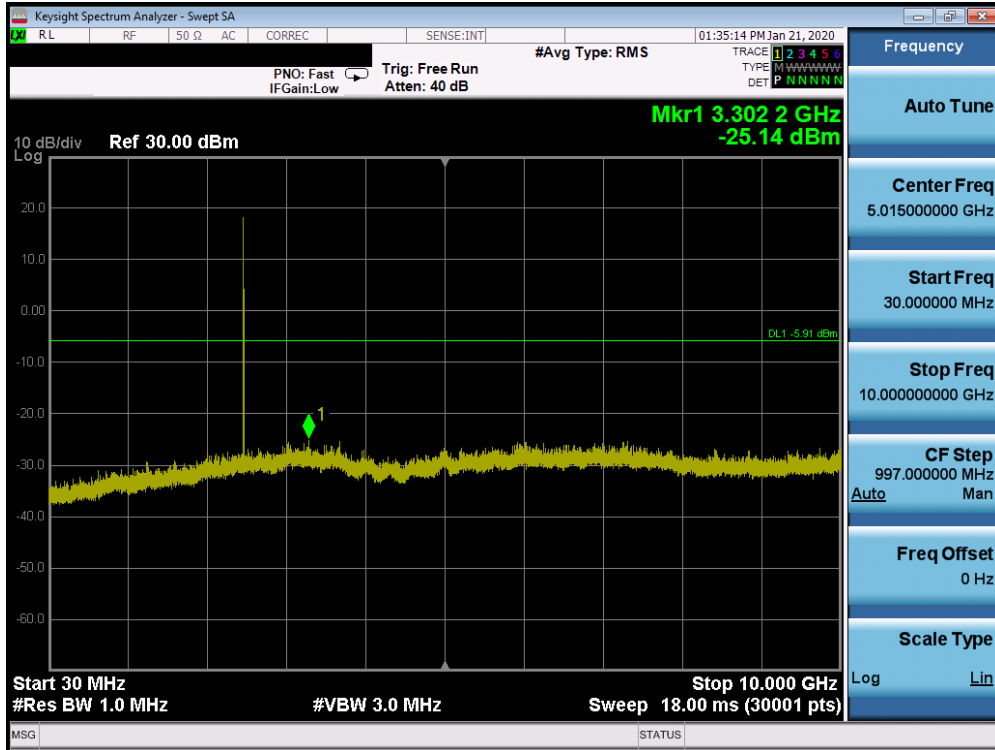

Plot 7-79. Conducted Spurious Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

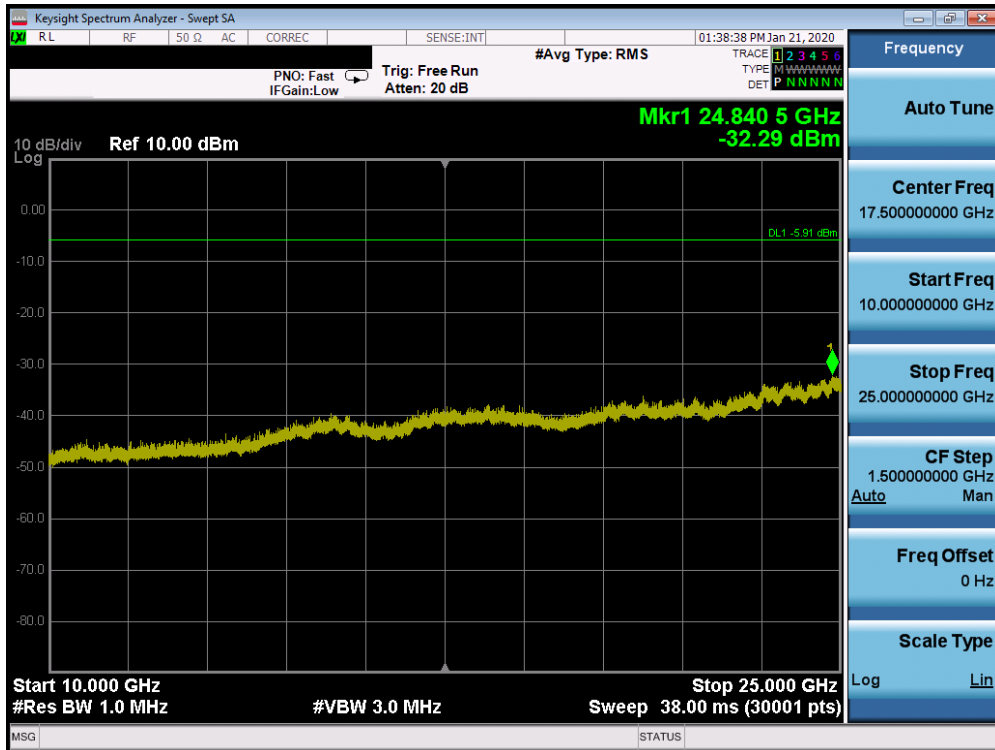

Plot 7-80. Conducted Spurious Plot Ant WF7 (Bluetooth (HDR4), 4Mbps, ePA – Ch. 75)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 67 of 102



7.7 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-13 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-13. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v05r02 – Section 8.6, 8.7

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 68 of 102

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

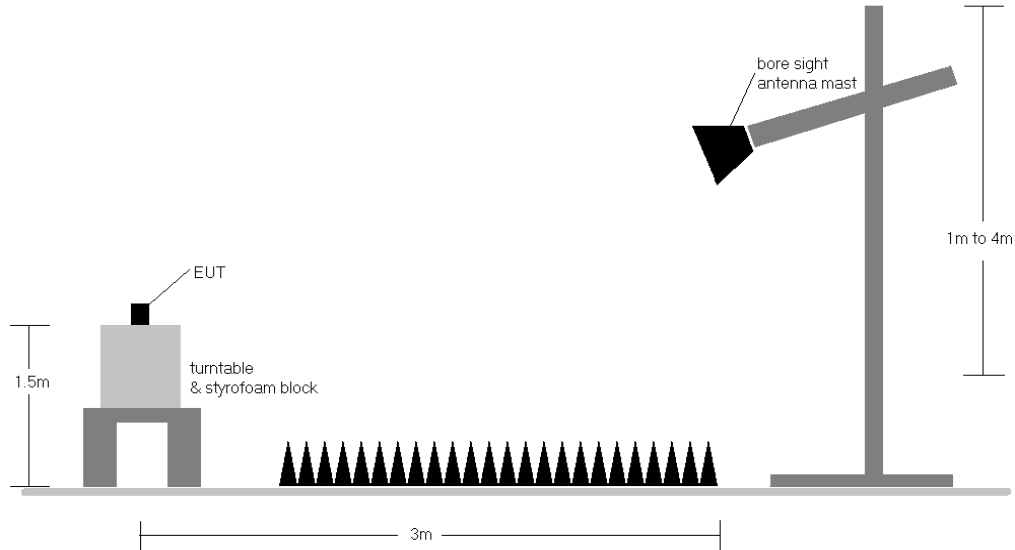


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v05r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-13.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. The unit was tested with all possible mode and power schemes and only the highest emission is reported.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 69 of 102

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.8 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 70 of 102


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]


Ant WF8

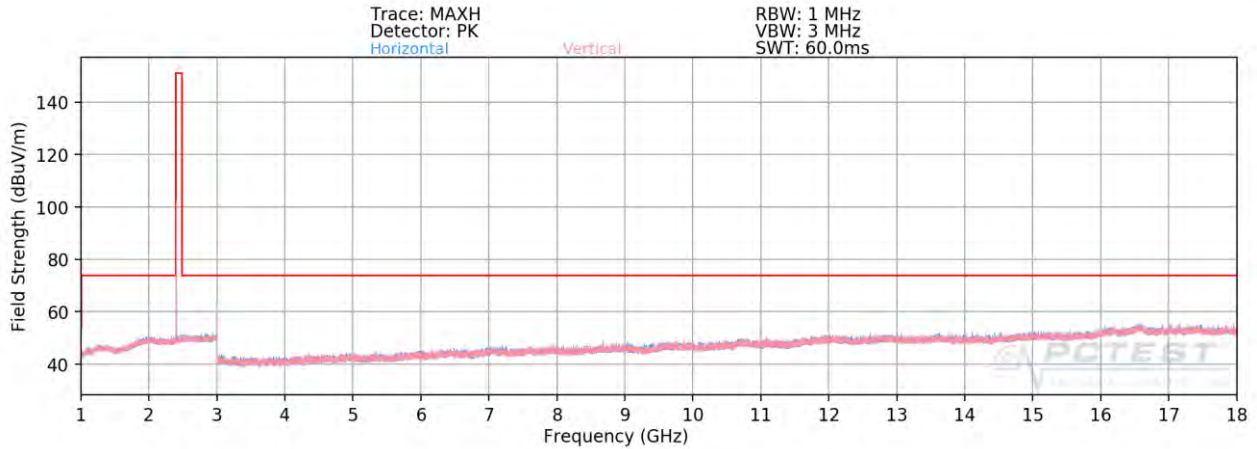

Plot 7-81. Radiated Spurious Plot Above 1GHz Ant WF8 (4Mbps, HDR4 ePA – Ch. 1, Ant. Pol. H & V)

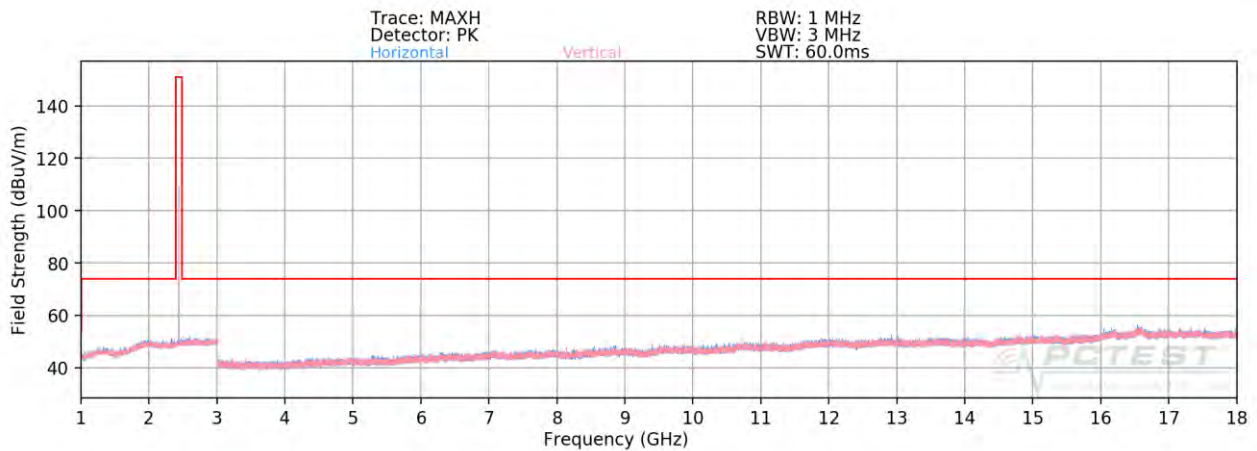

Plot 7-82. Radiated Spurious Plot Above 1GHz Ant WF8 (4Mbps, HDR4 ePA – Ch. 38, Ant. Pol. H & V)

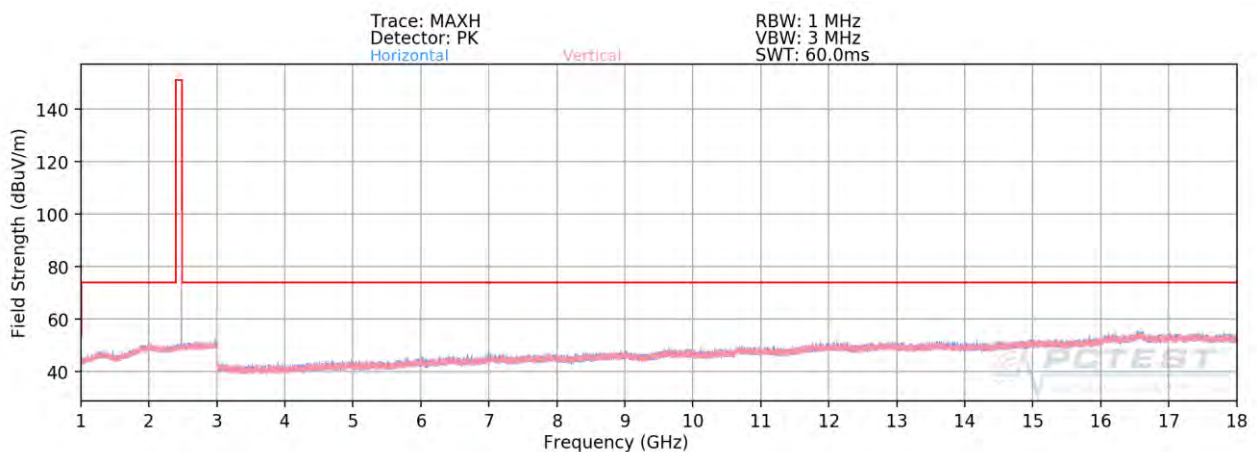


Plot 7-83. Radiated Spurious Plot Above 1GHz Ant WF8 (4Mbps, HDR4 ePA – Ch. 75, Ant. Pol. H & V)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 71 of 102


Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]


Ant WF7

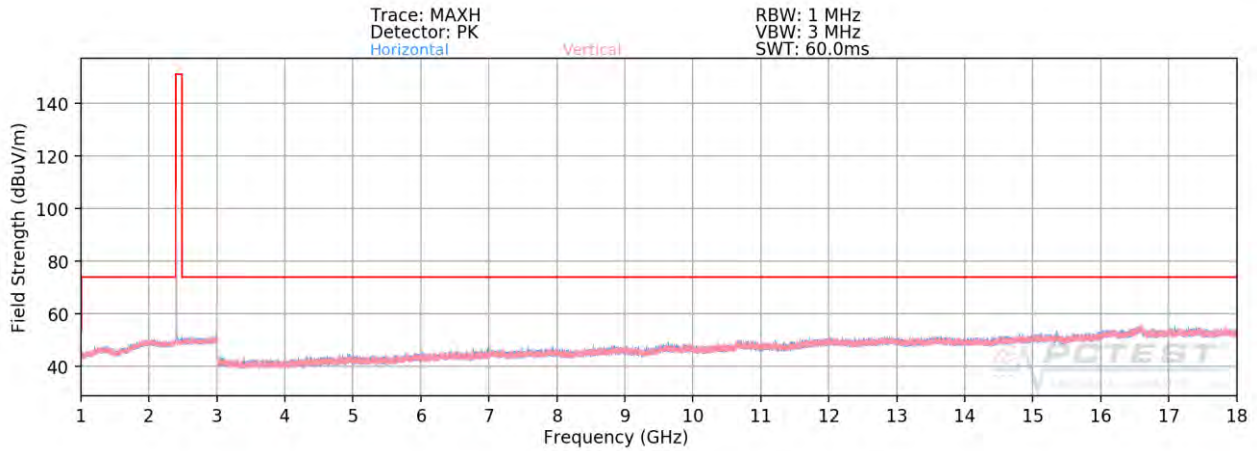

Plot 7-84. Radiated Spurious Plot Above 1GHz Ant WF7 (4Mbps, HDR4 ePA – Ch. 1, Ant. Pol. H & V)

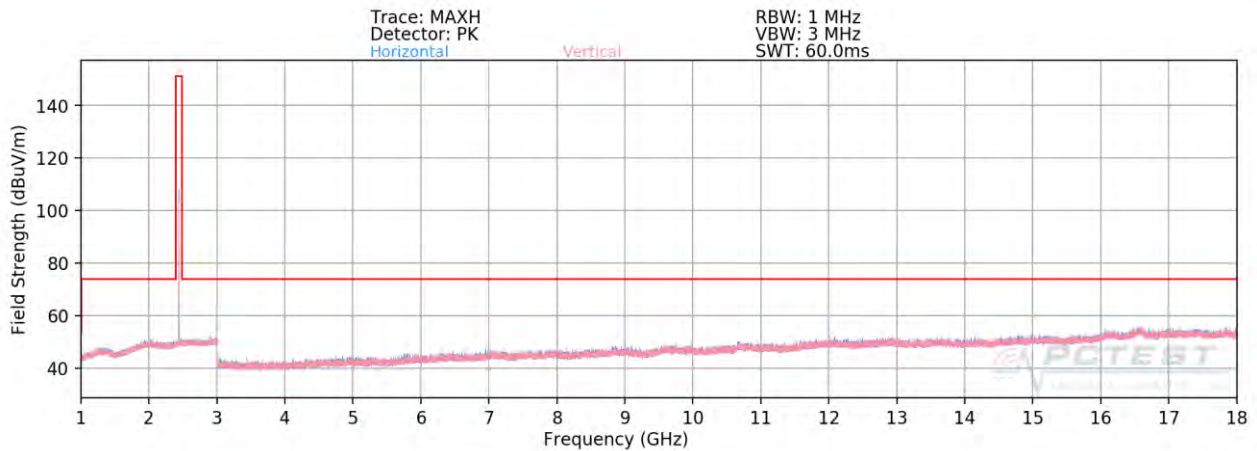

Plot 7-85. Radiated Spurious Plot Above 1GHz Ant WF7 (4Mbps, HDR4 ePA – Ch. 38, Ant. Pol. H & V)

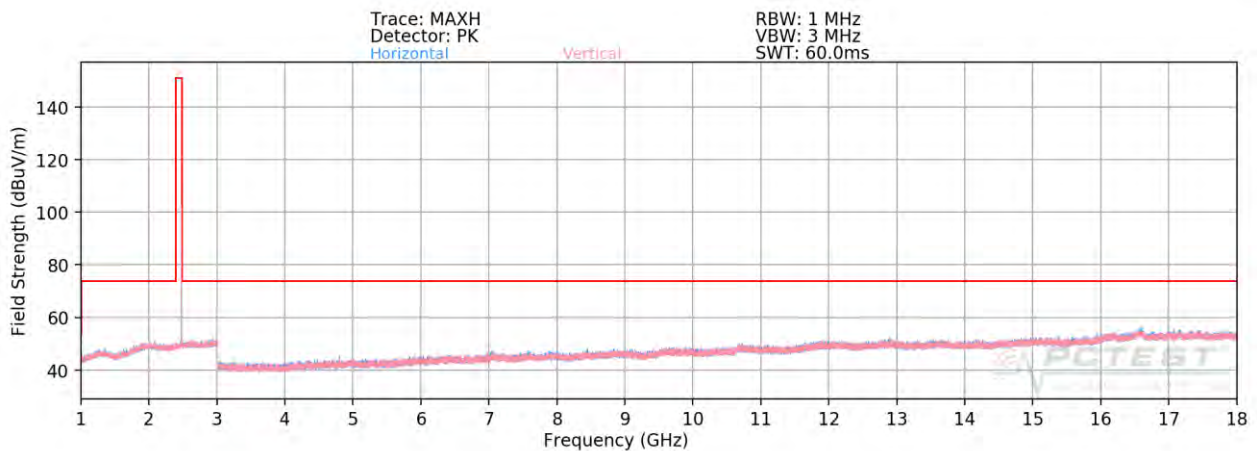


Plot 7-86. Radiated Spurious Plot Above 1GHz Ant WF7 (4Mbps, HDR4 ePA – Ch. 75, Ant. Pol. H & V)


FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 72 of 102

Radiated Spurious Emission Measurements
§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

TxBF

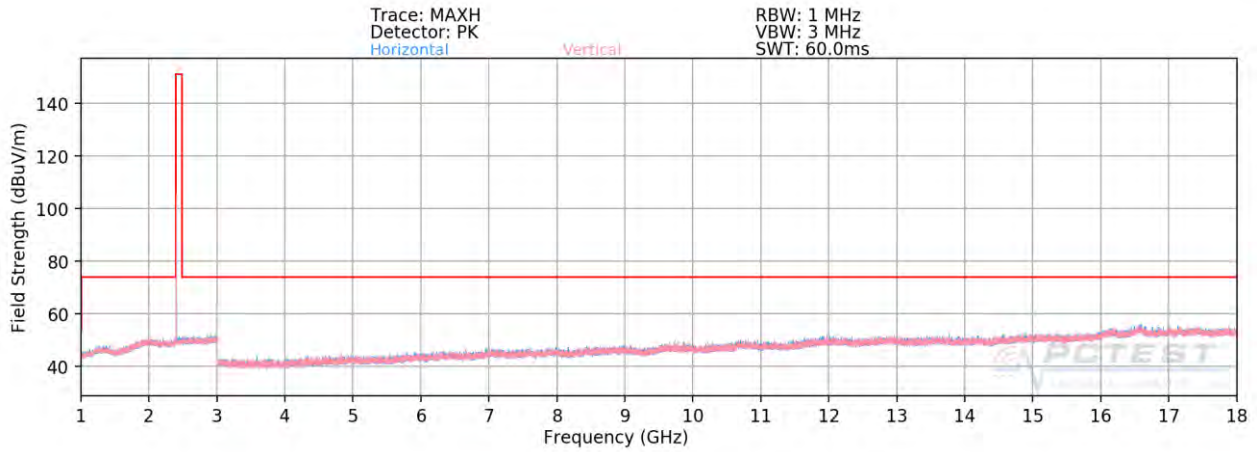


Plot 7-87. Radiated Spurious Plot Above 1GHz TXBF (4Mbps, HDR4 ePA – Ch. 1, Ant. Pol. H & V)

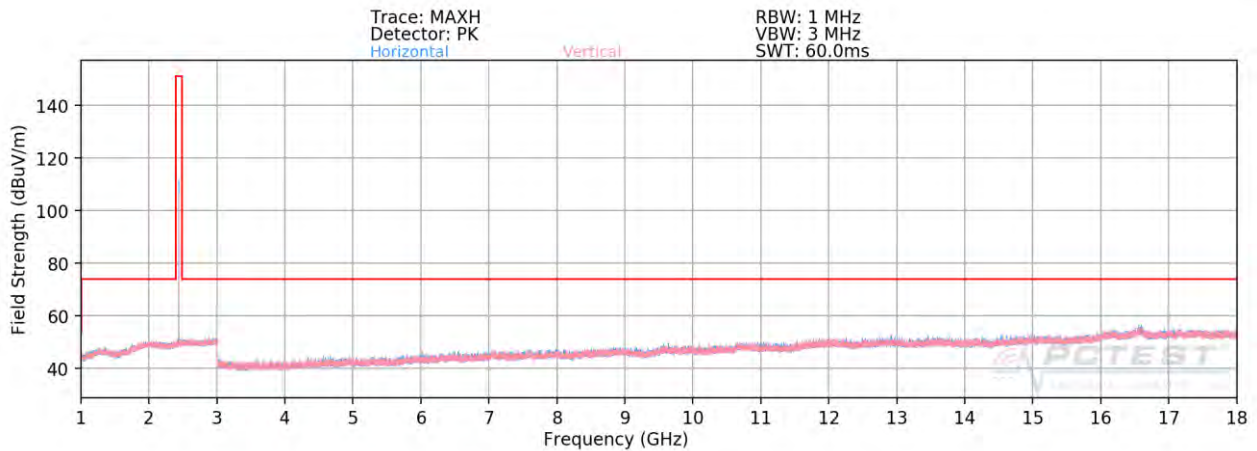

Plot 7-88. Radiated Spurious Plot Above 1GHz TXBF (4Mbps, HDR4 ePA – Ch. 38, Ant. Pol. H & V)


FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 73 of 102

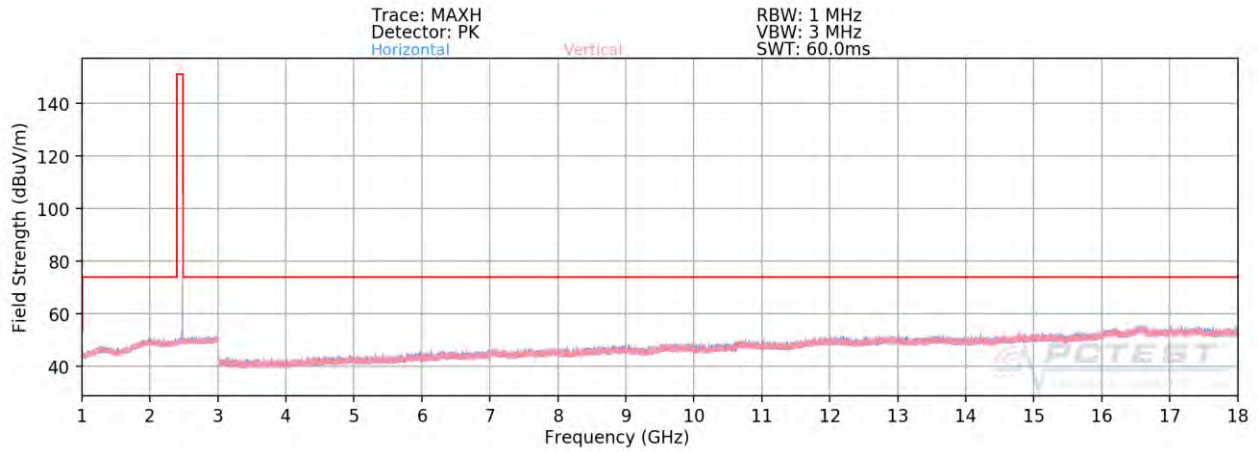


Plot 7-89. Radiated Spurious Plot Above 1GHz TXBF (4Mbps, HDR4 ePA – Ch. 75, Ant. Pol. H & V)

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 74 of 102

Radiated Spurious Emission Measurements (Above 18GHz)
§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

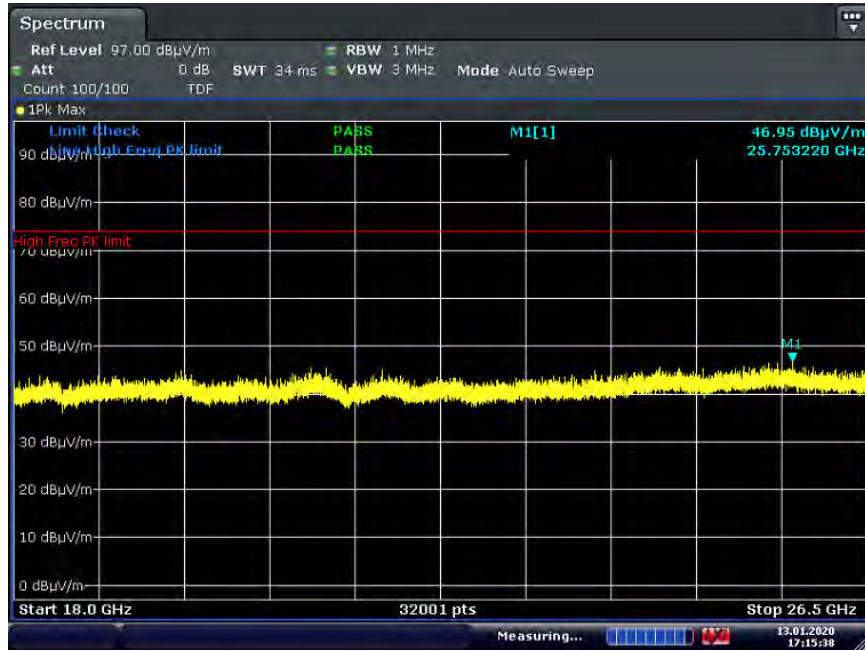

Plot 7-90. Radiated Spurious Plot Above 18GHz TxBF (4Mbps, HDR4 ePA, Ant. Pol. H)

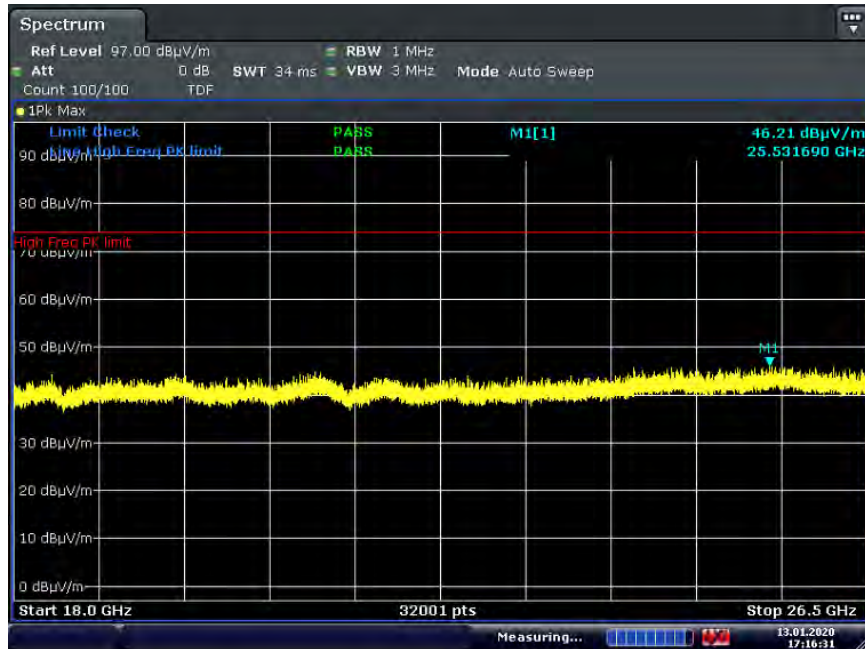

Plot 7-91. Radiated Spurious Plot Above 18GHz TxBF (4Mbps, HDR4 ePA, Ant. Pol. V)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 75 of 102



Radiated Spurious Emission Measurements
 §15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Ant WF8

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4808.00	Avg	H	-	-	-79.75	5.40	32.65	53.98	-21.33
4808.00	Peak	H	-	-	-68.33	5.40	44.07	73.98	-29.91
12020.00	Avg	H	-	-	-82.55	14.44	38.89	53.98	-15.09
12020.00	Peak	H	-	-	-71.46	14.44	49.98	73.98	-24.00

Table 7-14. Radiated Measurements

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	-	-	-80.02	5.46	32.44	53.98	-21.54
4882.00	Peak	H	-	-	-68.28	5.46	44.18	73.98	-29.80
7323.00	Avg	H	-	-	-81.13	9.00	34.87	53.98	-19.11
7323.00	Peak	H	-	-	-69.24	9.00	46.76	73.98	-27.22
12205.00	Avg	H	-	-	-82.46	14.88	39.42	53.98	-14.55
12205.00	Peak	H	-	-	-70.35	14.88	51.53	73.98	-22.44

Table 7-15. Radiated Measurements

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 76 of 102



Radiated Spurious Emission Measurements
§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: HDR4
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 75

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4956.00	Avg	H	-	-	-79.92	6.15	33.23	53.98	-20.75
4956.00	Peak	H	-	-	-68.06	6.15	45.09	73.98	-28.89
7434.00	Avg	H	-	-	-81.95	9.78	34.83	53.98	-19.15
7434.00	Peak	H	-	-	-70.48	9.78	46.30	73.98	-27.68
12390.00	Avg	H	-	-	-83.51	14.52	38.01	53.98	-15.97
12390.00	Peak	H	-	-	-71.96	14.52	49.56	73.98	-24.42

Table 7-16. Radiated Measurements

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 77 of 102



Radiated Spurious Emission Measurements
 §15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Ant WF7

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4808.00	Avg	H	-	-	-79.63	5.40	32.77	53.98	-21.21
4808.00	Peak	H	-	-	-68.19	5.40	44.21	73.98	-29.77
12020.00	Avg	H	-	-	-82.41	14.44	39.03	53.98	-14.95
12020.00	Peak	H	-	-	-70.74	14.44	50.70	73.98	-23.28

Table 7-17. Radiated Measurements

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	-	-	-79.96	5.46	32.50	53.98	-21.48
4882.00	Peak	H	-	-	-68.41	5.46	44.05	73.98	-29.93
7323.00	Avg	H	-	-	-81.13	9.00	34.87	53.98	-19.11
7323.00	Peak	H	-	-	-69.26	9.00	46.74	73.98	-27.24
12205.00	Avg	H	-	-	-82.04	14.88	39.84	53.98	-14.13
12205.00	Peak	H	-	-	-71.11	14.88	50.77	73.98	-23.20

Table 7-18. Radiated Measurements

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 78 of 102



Radiated Spurious Emission Measurements
§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: HDR4
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 75

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4956.00	Avg	H	-	-	-80.06	6.15	33.09	53.98	-20.89
4956.00	Peak	H	-	-	-68.14	6.15	45.01	73.98	-28.97
7434.00	Avg	H	-	-	-81.73	9.78	35.05	53.98	-18.93
7434.00	Peak	H	-	-	-70.24	9.78	46.54	73.98	-27.44
12390.00	Avg	H	-	-	-83.24	14.52	38.28	53.98	-15.70
12390.00	Peak	H	-	-	-71.15	14.52	50.37	73.98	-23.61

Table 7-19. Radiated Measurements

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 79 of 102



Radiated Spurious Emission Measurements
 §15.205 §15.209 §15.247(d); RSS-Gen [8.9]

TxBF

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4808.00	Avg	H	-	-	-78.39	5.40	34.01	53.98	-19.97
4808.00	Peak	H	-	-	-67.10	5.40	45.30	73.98	-28.68
12020.00	Avg	H	-	-	-80.38	14.44	41.06	53.98	-12.92
12020.00	Peak	H	-	-	-68.47	14.44	52.97	73.98	-21.01

Table 7-20. Radiated Measurements

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2441MHz
 Channel: 38

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	-	-	-79.80	5.46	32.66	53.98	-21.32
4882.00	Peak	H	-	-	-68.18	5.46	44.28	73.98	-29.70
7323.00	Avg	H	-	-	-81.16	9.00	34.84	53.98	-19.14
7323.00	Peak	H	-	-	-69.53	9.00	46.47	73.98	-27.51
12205.00	Avg	H	-	-	-82.22	14.88	39.66	53.98	-14.31
12205.00	Peak	H	-	-	-70.37	14.88	51.51	73.98	-22.46

Table 7-21. Radiated Measurements

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 80 of 102



Radiated Spurious Emission Measurements
§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Bluetooth Mode: HDR4
 Power Scheme ePA
 Distance of Measurements: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 75

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4956.00	Avg	H	-	-	-80.00	6.15	33.15	53.98	-20.83
4956.00	Peak	H	-	-	-67.74	6.15	45.41	73.98	-28.57
7434.00	Avg	H	-	-	-81.77	9.78	35.01	53.98	-18.97
7434.00	Peak	H	-	-	-69.89	9.78	46.89	73.98	-27.09
12390.00	Avg	H	-	-	-83.32	14.52	38.20	53.98	-15.78
12390.00	Peak	H	-	-	-71.19	14.52	50.33	73.98	-23.65

Table 7-22. Radiated Measurements

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 81 of 102

7.8 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode:	HDR4
Power Scheme:	ePA
Measurement Distance:	3 Meters
Operating Frequency:	2404MHz
Channel:	1

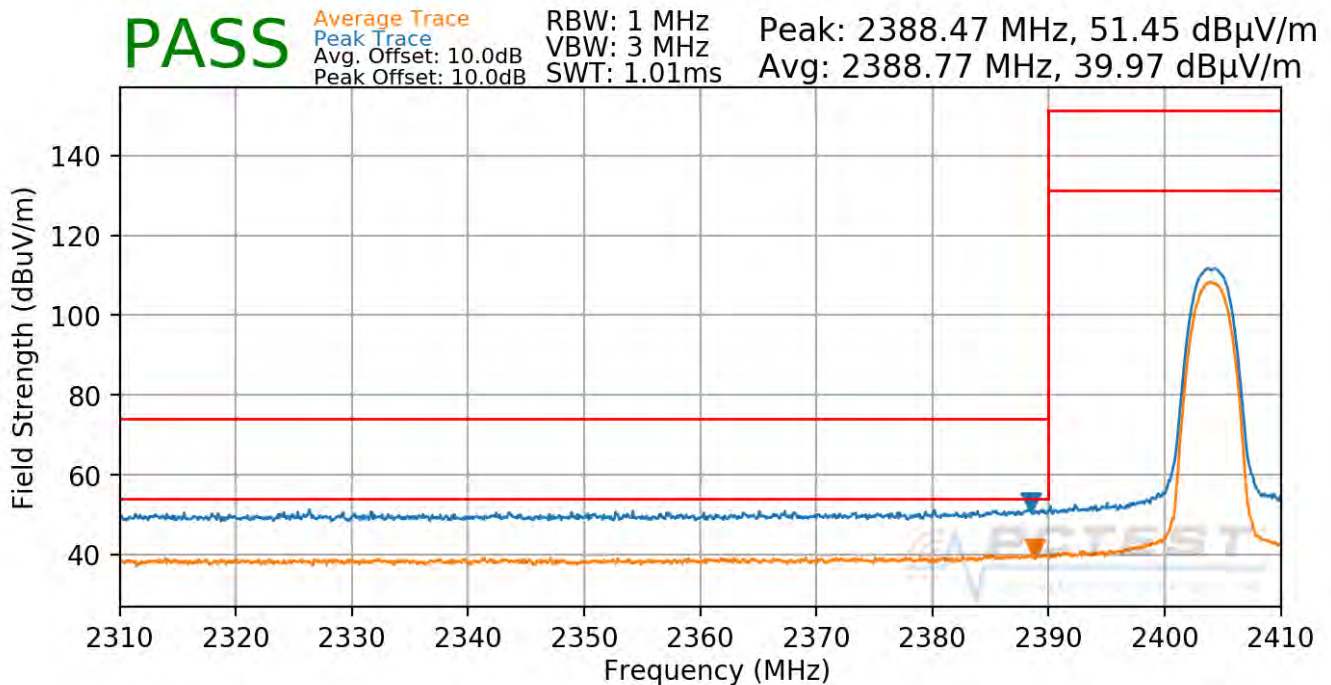

Plot 7-92. Radiated Restricted Lower Band Edge Measurement Ant WF8 (Average & Peak)

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 82 of 102

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Bluetooth Mode: HDR8

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2404MHz

Channel: 1

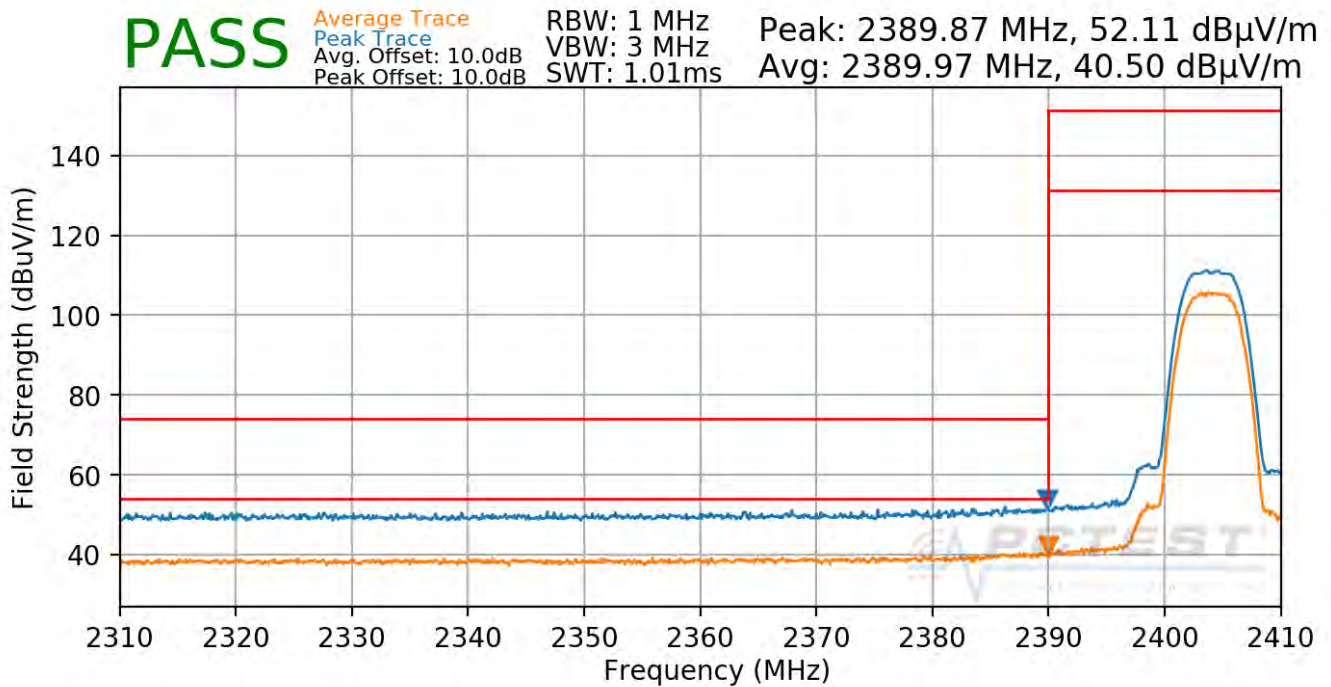

Plot 7-93. Radiated Restricted Lower Band Edge Measurement Ant WF8 (Average & Peak)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 83 of 102




Radiated Restricted Band Edge Measurements
§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 75

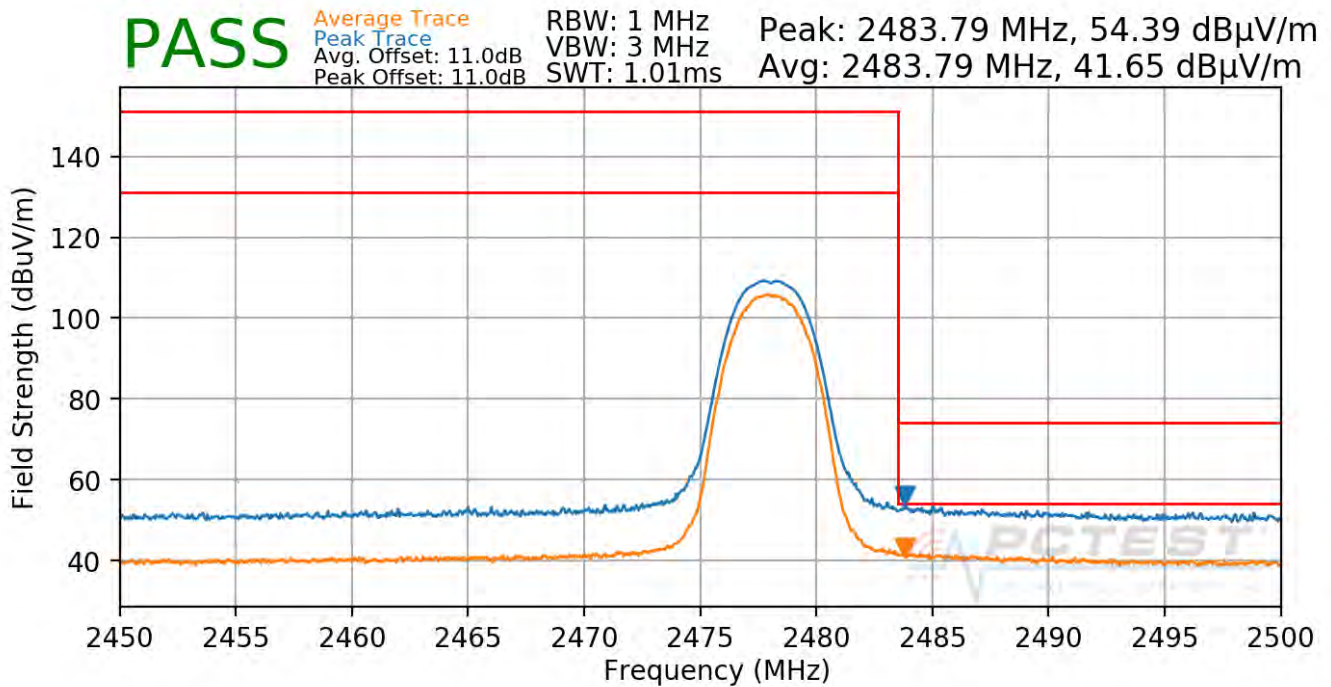

Plot 7-94. Radiated Restricted Upper Band Edge Measurement Ant WF8 (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 84 of 102




Radiated Restricted Band Edge Measurements
§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain

Bluetooth Mode: HDR8
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 75

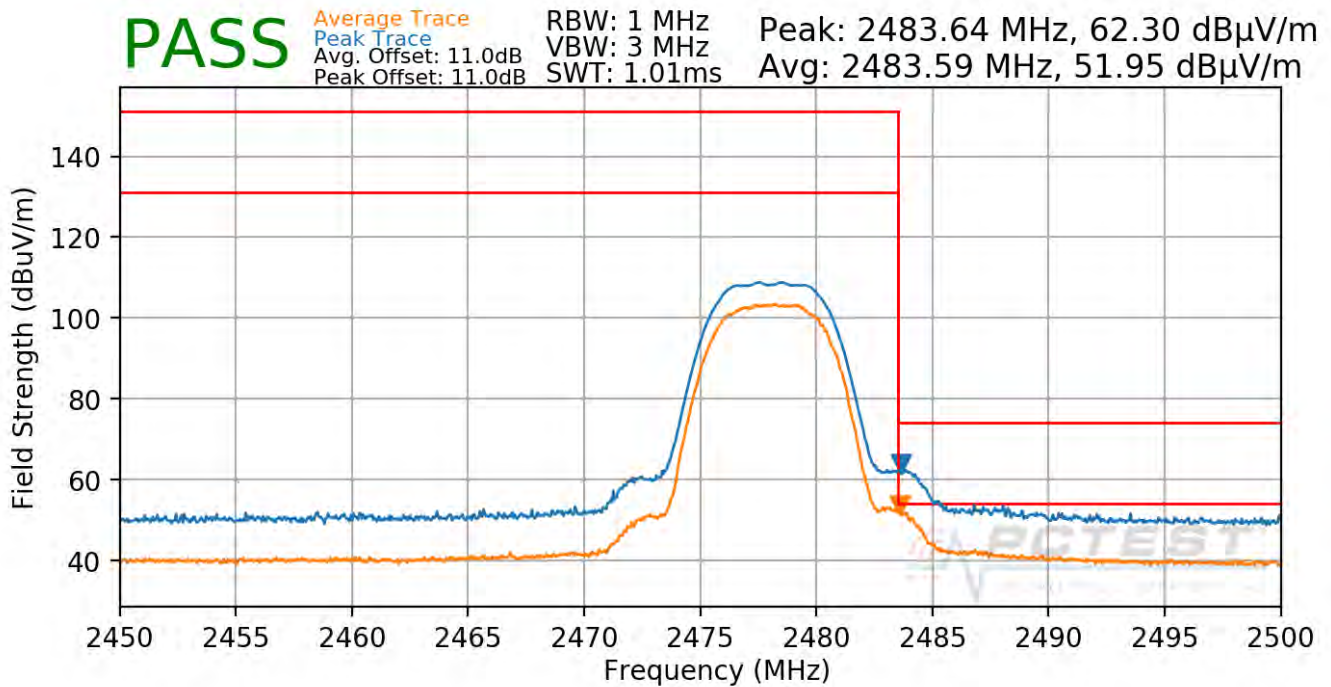

Plot 7-95. Radiated Restricted Upper Band Edge Measurement Ant WF8 (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 85 of 102



Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Bluetooth Mode: HDR4

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2404MHz

Channel: 1

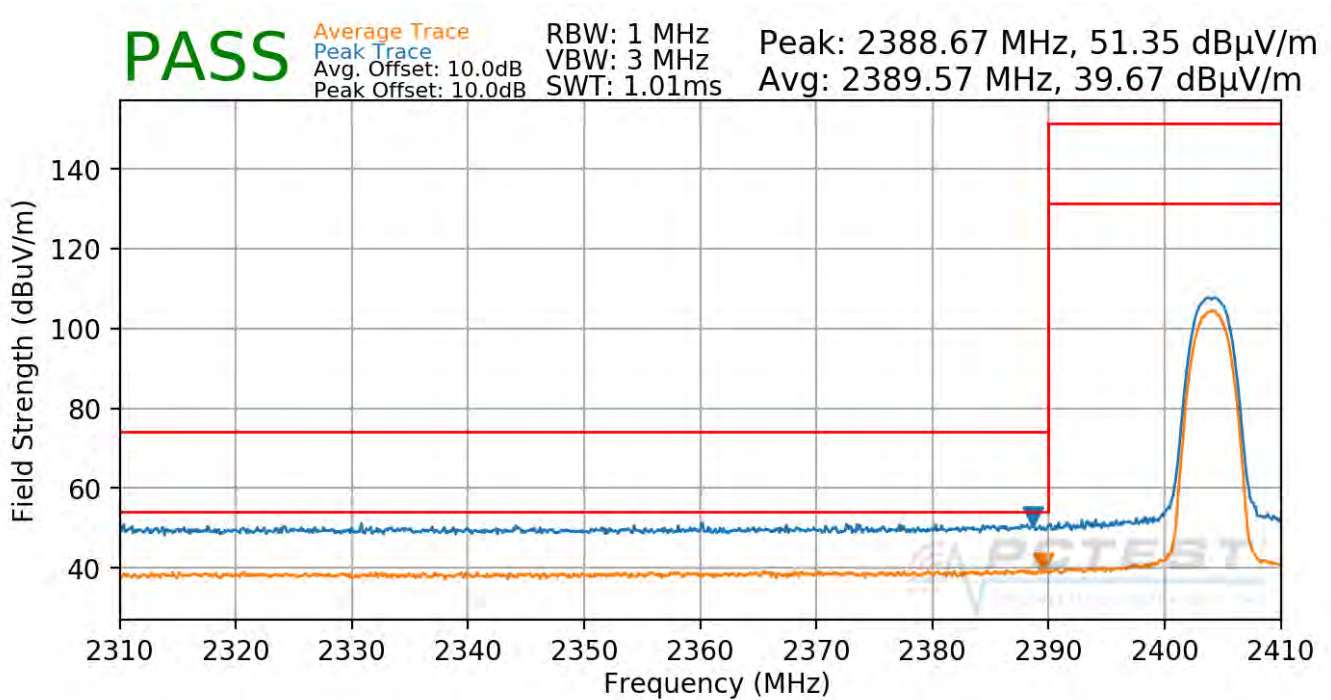

Plot 7-96. Radiated Restricted Lower Band Edge Measurement Ant WF7 (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 86 of 102




Radiated Restricted Band Edge Measurements
§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain

Bluetooth Mode: HDR8
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

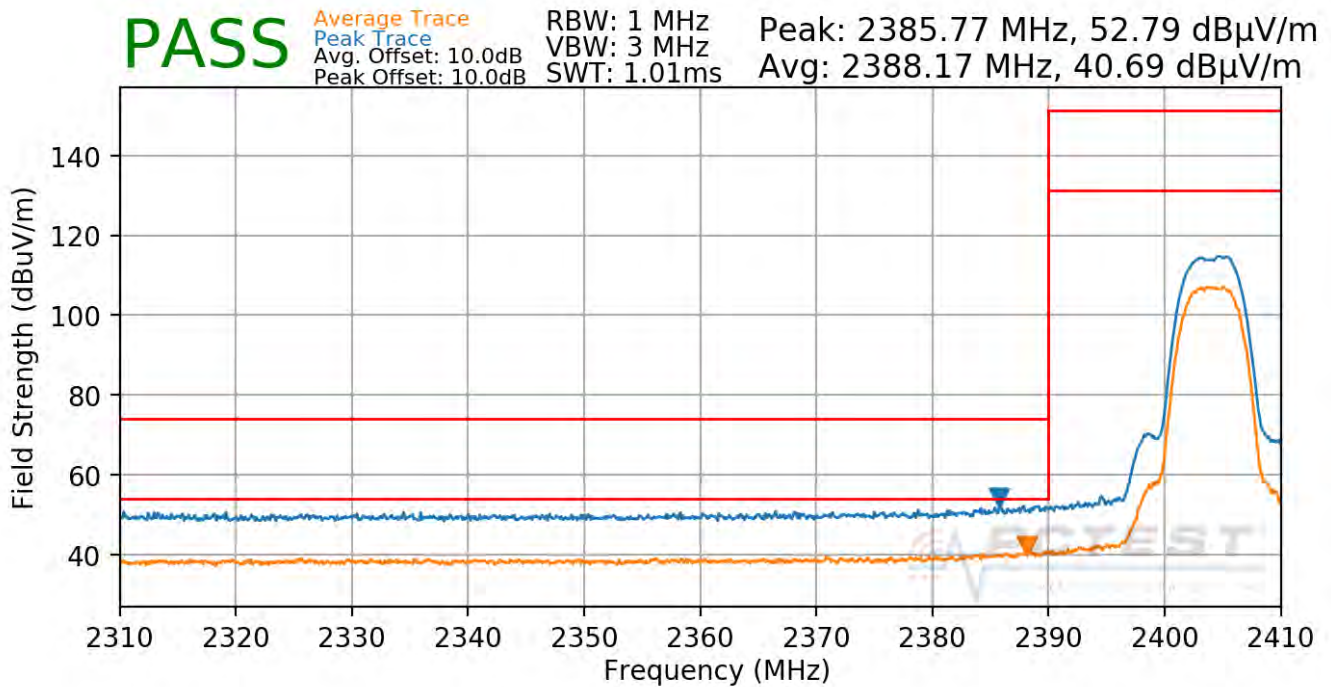

Plot 7-97. Radiated Restricted Lower Band Edge Measurement Ant WF7 (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 87 of 102

Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Bluetooth Mode: HDR4

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2478MHz

Channel: 75

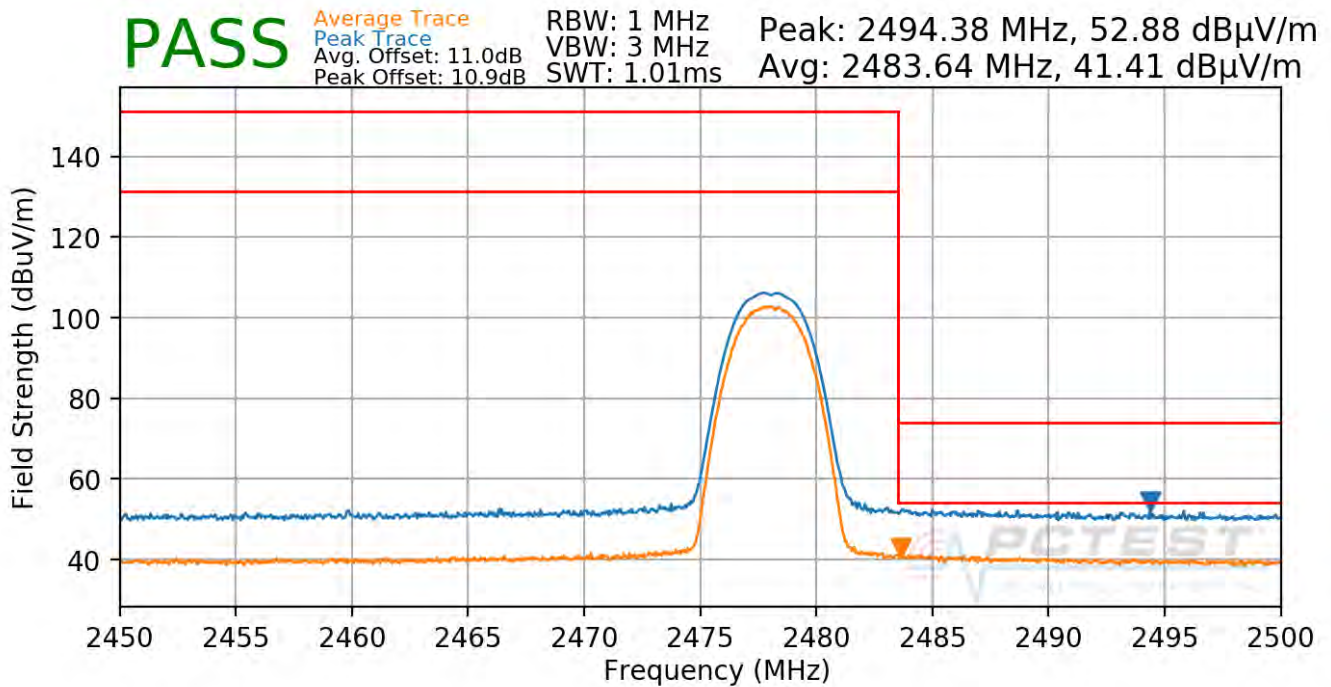

Plot 7-98. Radiated Restricted Upper Band Edge Measurement Ant WF7 (Average & Peak)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 88 of 102




Radiated Restricted Band Edge Measurements
§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: HDR8
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 75

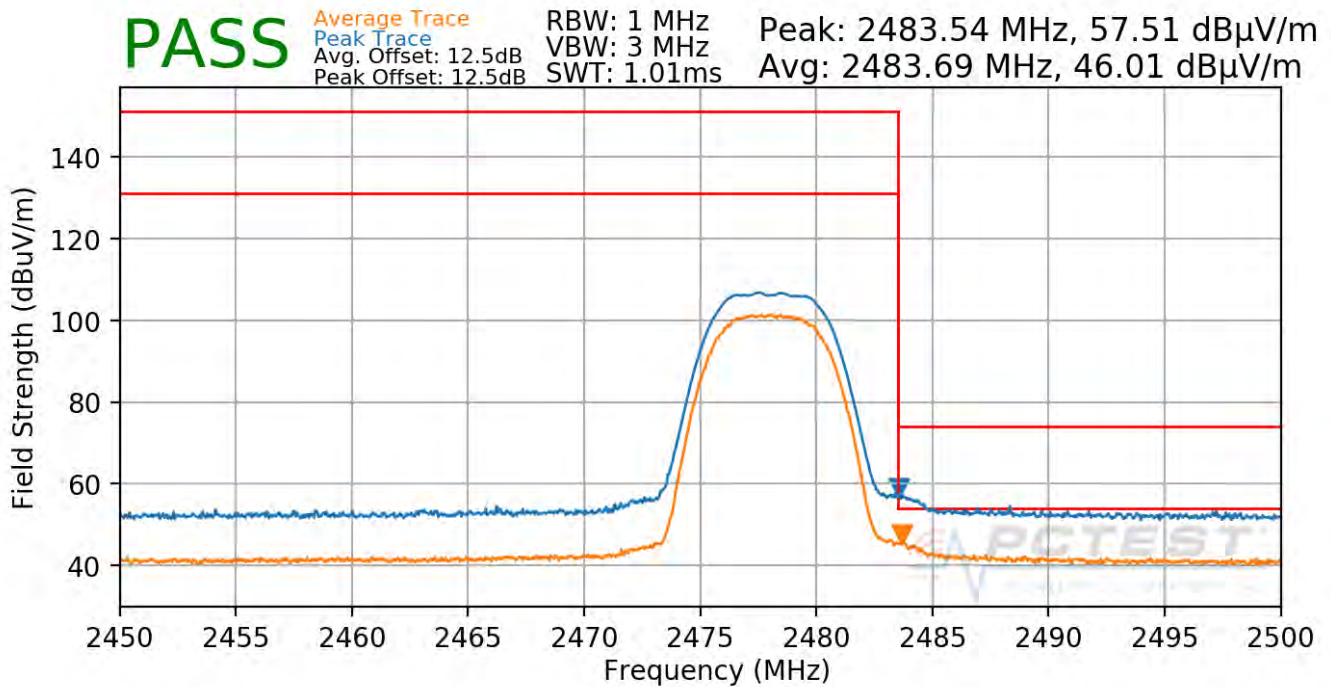

Plot 7-99. Radiated Restricted Upper Band Edge Measurement Ant WF7 (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 89 of 102




Radiated Restricted Band Edge Measurements
§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

Bluetooth Mode: HDR4
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2404MHz
 Channel: 1

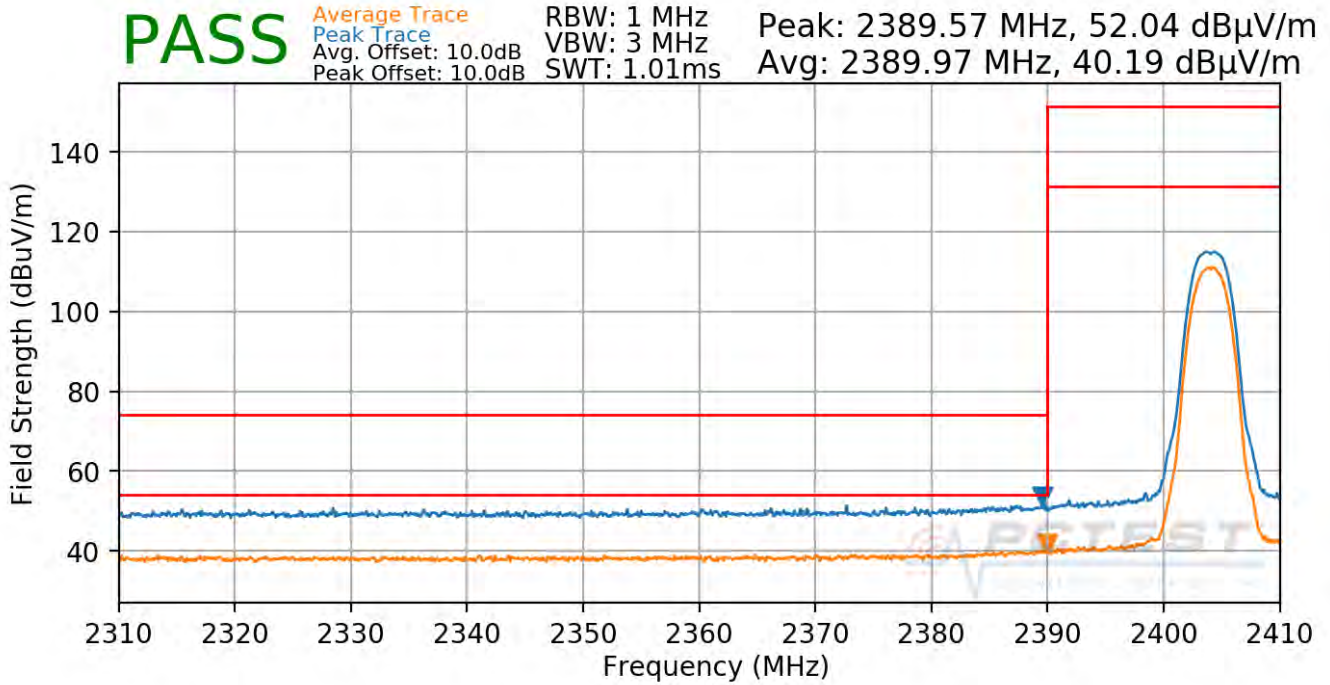

Plot 7-100. Radiated Restricted Lower Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 90 of 102



Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Bluetooth Mode: HDR8

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2404MHz

Channel: 1

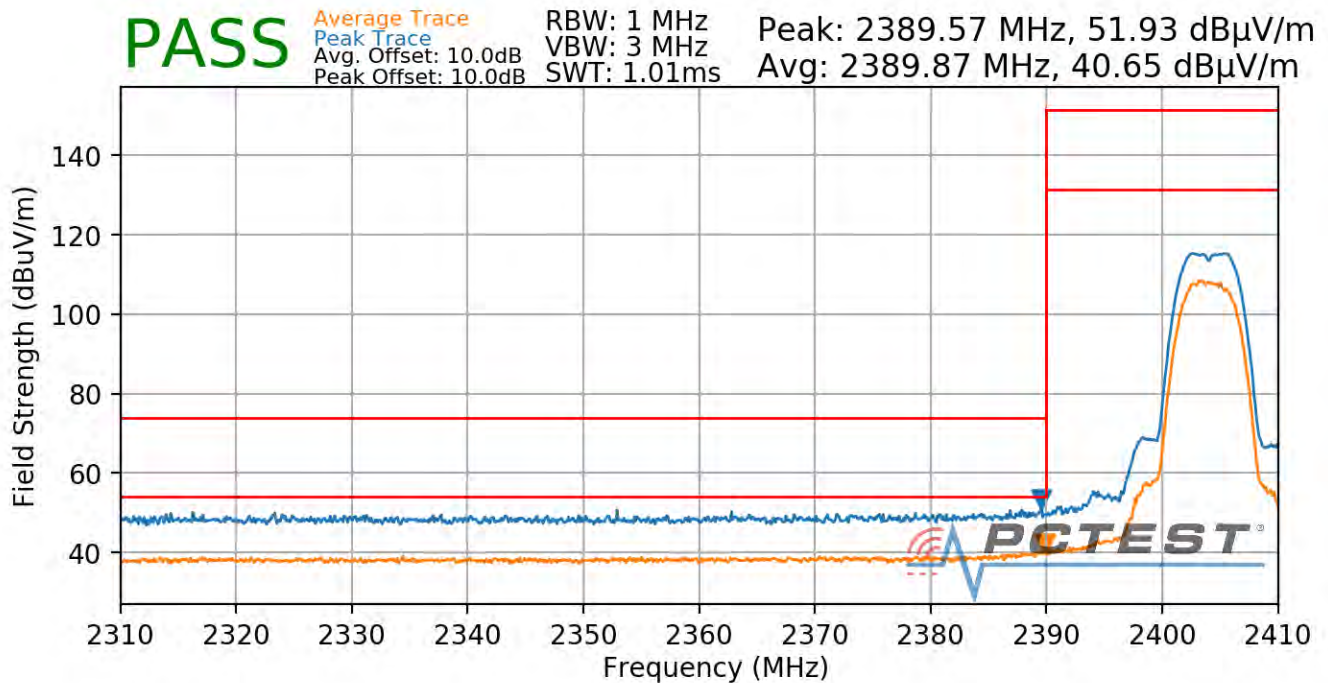

Plot 7-101. Radiated Restricted Lower Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 91 of 102



Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Bluetooth Mode: HDR4

Power Scheme: ePA

Measurement Distance: 3 Meters

Operating Frequency: 2478MHz

Channel: 75

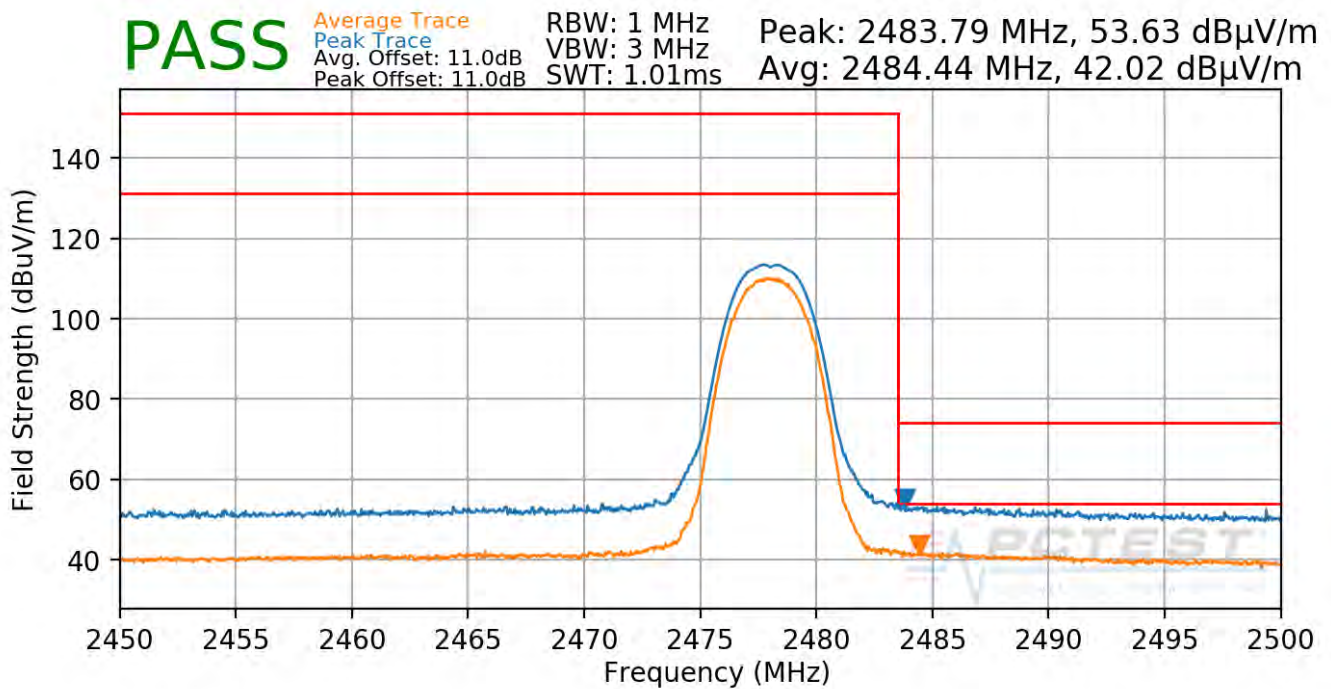

Plot 7-102. Radiated Restricted Upper Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 92 of 102




Radiated Restricted Band Edge Measurements
§15.205 §15.209; RSS-Gen [8.9]

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain

Bluetooth Mode: HDR8
 Power Scheme: ePA
 Measurement Distance: 3 Meters
 Operating Frequency: 2478MHz
 Channel: 75

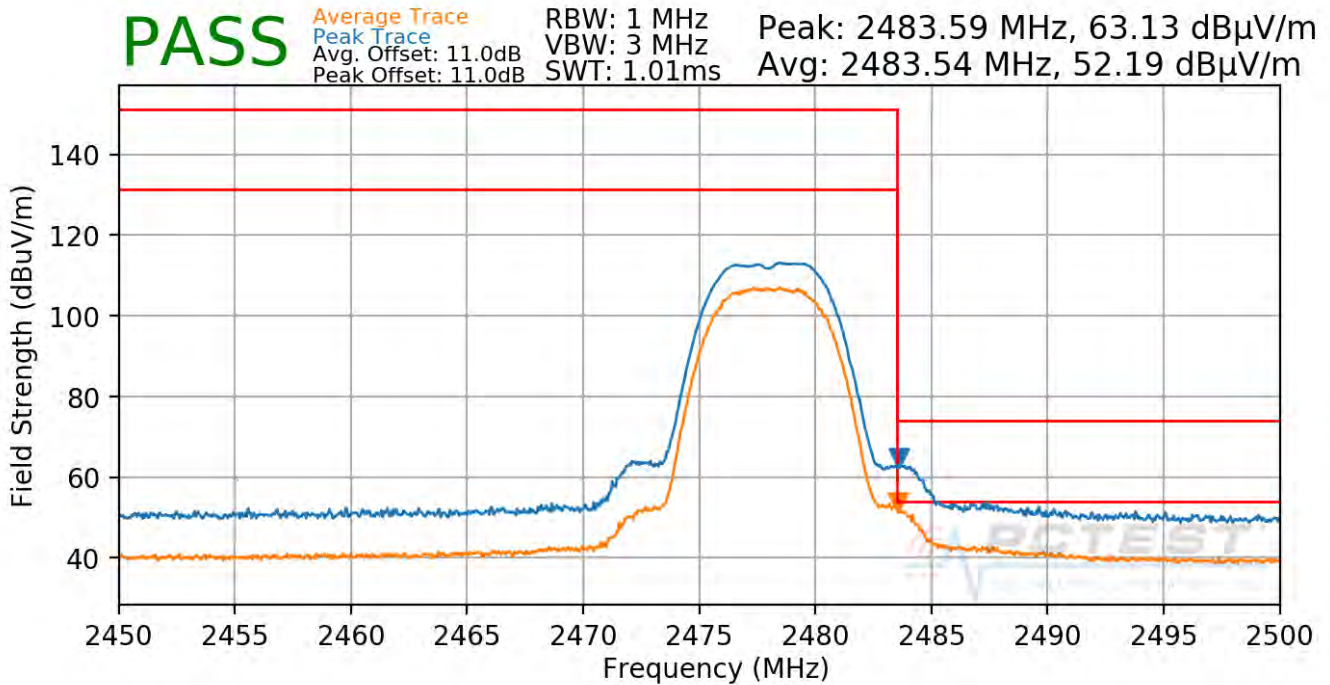

Plot 7-103. Radiated Restricted Upper Band Edge Measurement TXBF (Average & Peak)

FCC ID: BCGA2229	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 93 of 102

7.9 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-10 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-23. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

7. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
8. RBW = 120kHz (for emissions from 30MHz – 1GHz)
9. VBW = 300kHz
10. Detector = quasi-peak
11. Sweep time = auto couple
12. Trace mode = max hold
13. Trace was allowed to stabilize

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 94 of 102

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

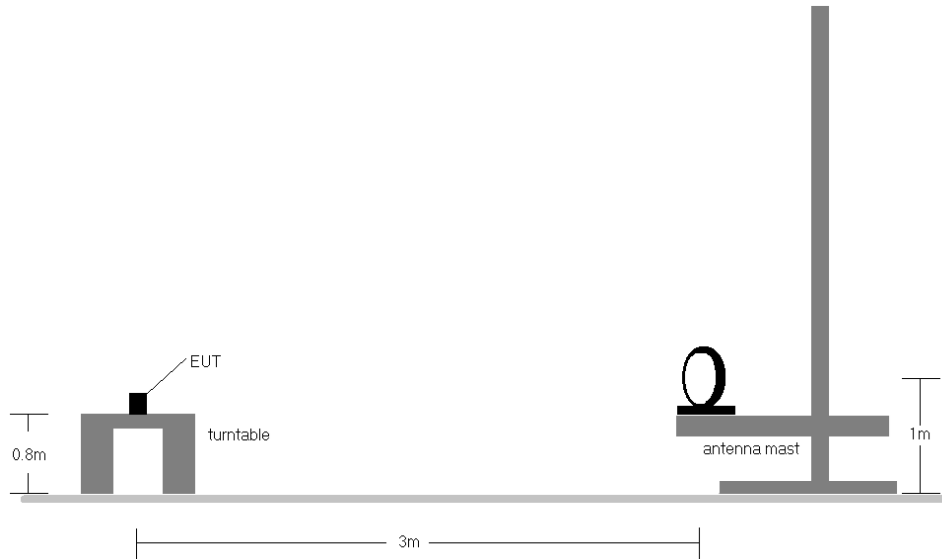


Figure 7-7. Radiated Test Setup < 30Mhz

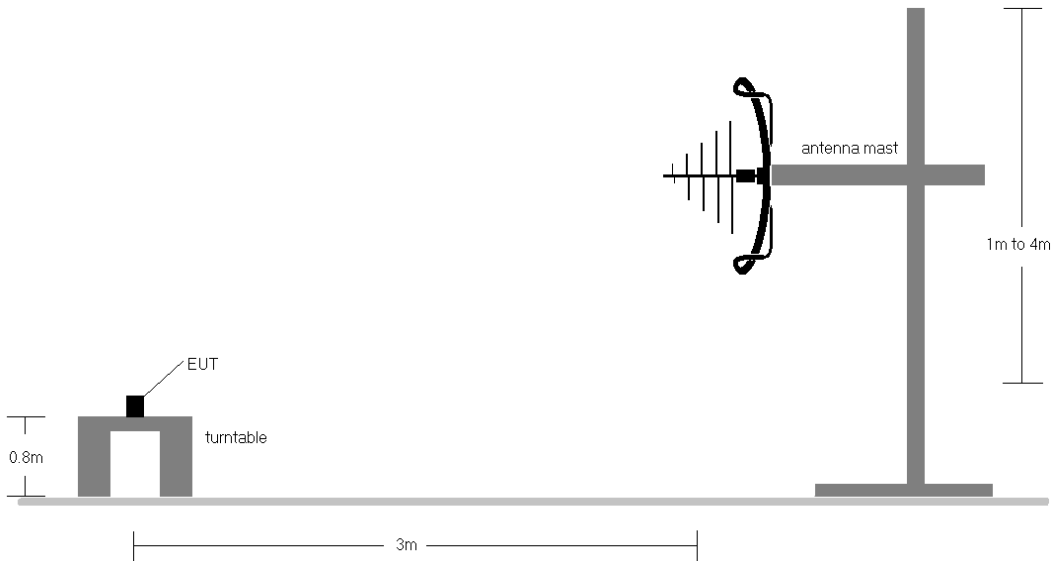


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 95 of 102




Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-23.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector on emissions within 6dB of the limit. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.
10. The unit was tested with all possible mode and power schemes and only the highest emission is reported.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 96 of 102

Radiated Spurious Emission Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

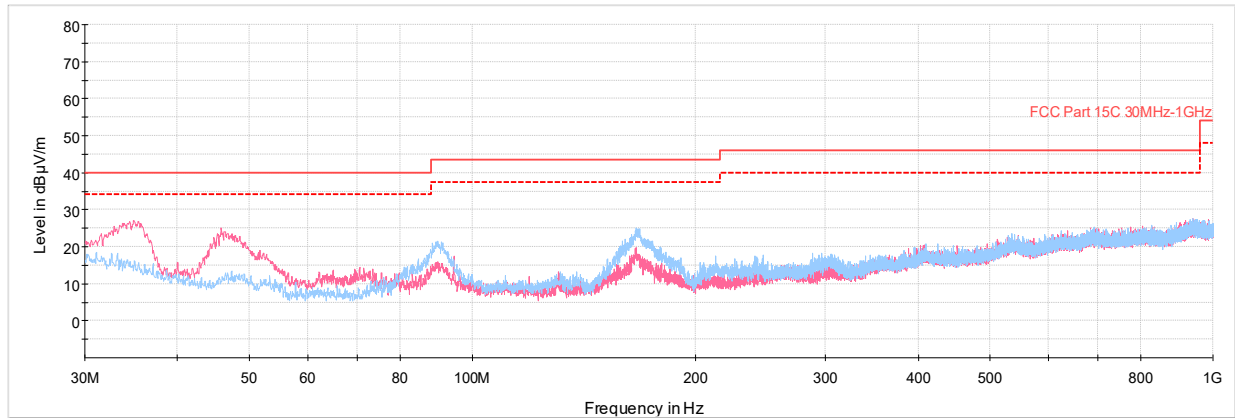

Plot 7-104. Radiated Spurious Plot below 1GHz (4Mbps, ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
34.95	Max Peak	V	100	317	-65.40	-14.59	27.01	40.00	-12.99
39.99	Max Peak	V	100	193	-73.86	-17.47	15.67	40.00	-24.33
45.81	Max Peak	V	100	285	-61.70	-20.32	24.98	40.00	-15.02
89.85	Max Peak	H	250	31	-64.64	-20.91	21.45	43.52	-22.07
166.48	Max Peak	H	100	95	-64.33	-17.75	24.92	43.52	-18.61
213.33	Max Peak	H	100	15	-73.28	-16.36	17.36	43.52	-26.17

Table 7-24. Radiated Spurious Emissions Below 1GHz (4Mbps, ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 97 of 102



7.10 AC Line-Conducted Test Data
§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-25. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

14. Analyzer center frequency was set to the frequency of the spurious emission of interest
15. RBW = 9kHz (for emissions from 150kHz – 30MHz)
16. Detector = quasi-peak
17. Sweep time = auto couple
18. Trace mode = max hold
19. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 98 of 102

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


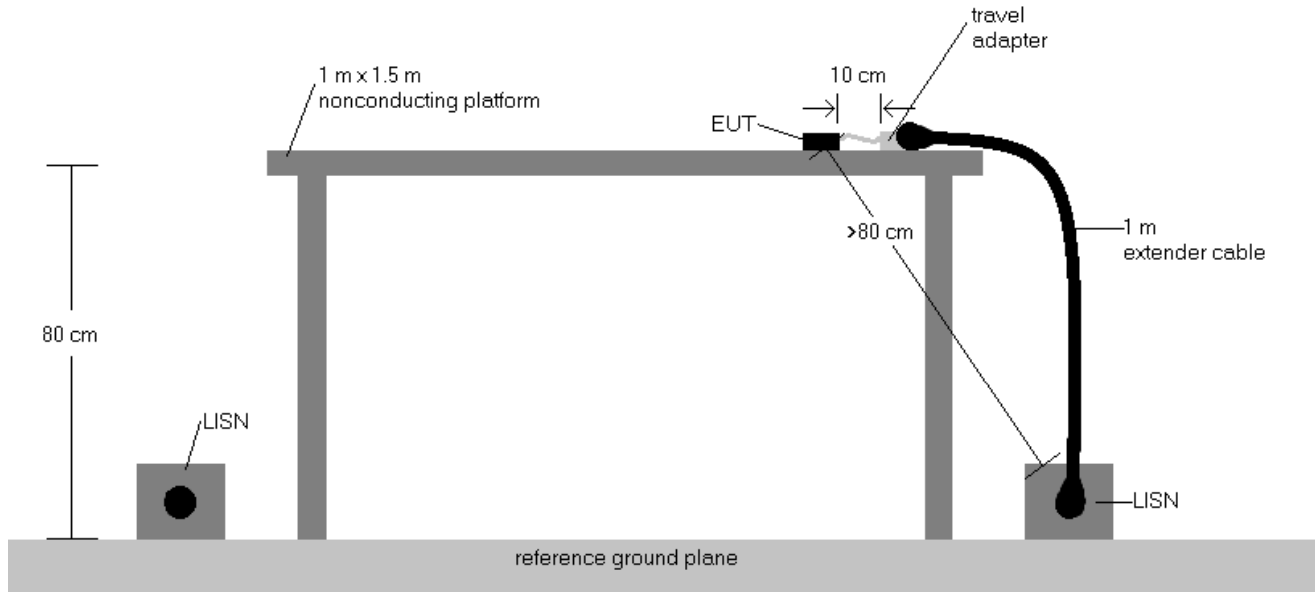


Figure 7-9. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using quasi-peak and average detectors.
7. Deviations to the Specifications: None.

FCC ID: BCGA2229		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 99 of 102

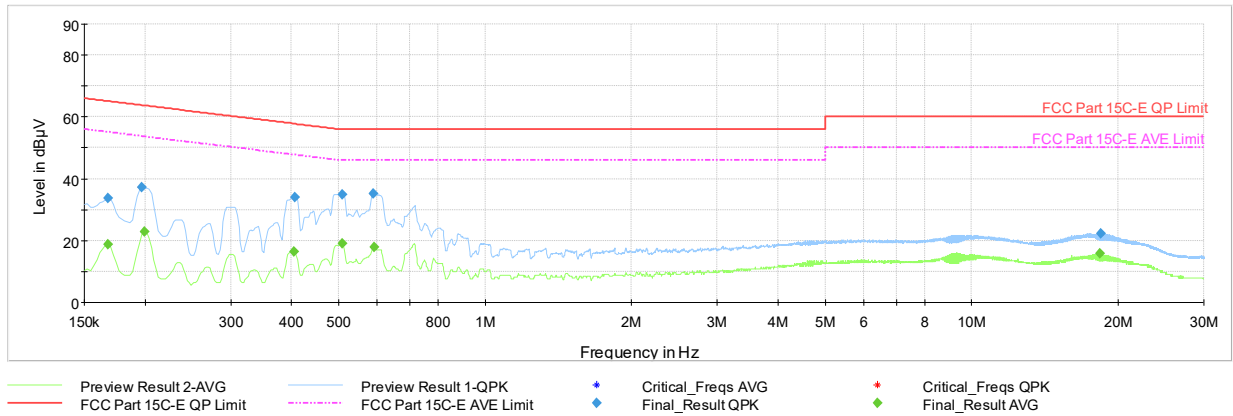


Plot 7-105. Line Conducted Plot with Bluetooth HDR (L1, 4Mbps ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	—	18.66	55.06	-36.40	L1	GND
0.168	FINAL	33.62	—	65.06	-31.44	L1	GND
0.197	FINAL	37.26	—	63.73	-26.46	L1	GND
0.200	FINAL	—	22.75	53.63	-30.88	L1	GND
0.404	FINAL	—	16.52	47.77	-31.24	L1	GND
0.407	FINAL	33.92	—	57.72	-23.80	L1	GND
0.508	FINAL	34.94	—	56.00	-21.06	L1	GND
0.508	FINAL	—	18.93	46.00	-27.07	L1	GND
0.589	FINAL	35.20	—	56.00	-20.80	L1	GND
0.591	FINAL	—	17.77	46.00	-28.23	L1	GND
18.328	FINAL	—	15.79	50.00	-34.21	L1	GND
18.429	FINAL	22.15	—	60.00	-37.85	L1	GND

Table 7-26. Line Conducted Data with Bluetooth HDR (L1, 4Mbps ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA2229			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 100 of 102

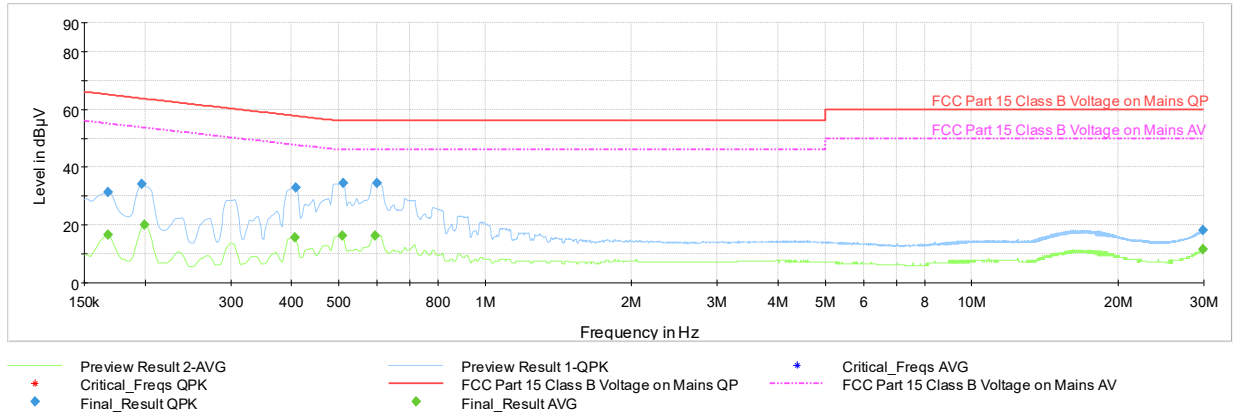

Plot 7-106. Line Conducted Plot with Bluetooth HDR (N, 4Mbps ePA – Ch.38 with AC/DC Adapter)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.168	FINAL	—	16.55	55.06	-38.51	N	GND
0.168	FINAL	31.31	—	65.06	-33.75	N	GND
0.197	FINAL	34.06	—	63.73	-29.67	N	GND
0.200	FINAL	—	20.19	53.63	-33.44	N	GND
0.407	FINAL	—	15.79	47.72	-31.93	N	GND
0.409	FINAL	32.97	—	57.67	-24.71	N	GND
0.508	FINAL	—	16.18	46.00	-29.82	N	GND
0.510	FINAL	34.34	—	56.00	-21.66	N	GND
0.593	FINAL	—	16.42	46.00	-29.58	N	GND
0.600	FINAL	34.37	—	56.00	-21.63	N	GND
29.848	FINAL	18.09	—	60.00	-41.91	N	GND
29.866	FINAL	—	11.67	50.00	-38.33	N	GND

Table 7-27. Line Conducted Data with Bluetooth HDR (N, 4Mbps ePA – Ch.38 with AC/DC Adapter)

FCC ID: BCGA2229			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device		Page 101 of 102

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2229** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2229	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C1912170053-04.BCG	Test Dates: 12/10/2019 - 02/12/2020	EUT Type: Tablet Device	Page 102 of 102