



PART 22 MEASUREMENT REPORT

Applicant Name:

Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014
 United States

Date of Testing:

05/30/2022 - 09/11/2022

Test Site/Location:

Element Washington DC LLC, Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090023-01-R1.BCG

FCC ID:

BCGA2757

Applicant Name:

Apple Inc.

Application Type:

Certification

Model:

A2757(A2777)

EUT Type:

Tablet Device

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part:

22

Test Procedure(s):

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2205090023-01-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
 Executive Vice President





FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 1 of 96

V2.1 11/9/2021


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Washington DC LLC Test Location	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Measurement Procedure.....	8
3.2	Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal	35
7.4	Band Edge Emissions at Antenna Terminal	55
7.5	Radiated Power (ERP/EIRP).....	71
7.6	Radiated Spurious Emissions	77
7.7	Frequency Stability / Temperature Variation	92
8.0	CONCLUSION.....	96

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 2 of 96



PART 22 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	ERP		EIRP		Emission Designator
					Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
WCDMA850	5 MHz	Spread Spectrum	826.4 - 846.6	4.164	0.171	22.32	0.280	24.47	4M16F9W
Band 5	1.4 MHz	QPSK	824.7 - 848.3	1.088	0.172	22.35	0.282	24.50	1M09G7W
		16QAM	824.7 - 848.3	1.095	0.150	21.75	0.245	23.90	1M10D7W
		64QAM	824.7 - 848.3	1.093	0.112	20.49	0.184	22.64	1M09D7W
		256QAM	824.7 - 848.3	1.097	0.057	17.57	0.094	19.72	1M10D7W
	3 MHz	QPSK	825.5 - 847.5	2.713	0.168	22.26	0.276	24.41	2M71G7W
		16QAM	825.5 - 847.5	2.708	0.146	21.65	0.240	23.80	2M71D7W
		64QAM	825.5 - 847.5	2.715	0.124	20.95	0.204	23.10	2M71D7W
		256QAM	825.5 - 847.5	2.714	0.062	17.94	0.102	20.09	2M71D7W
	5 MHz	QPSK	826.5 - 846.5	4.568	0.169	22.28	0.277	24.43	4M57G7W
		16QAM	826.5 - 846.5	4.525	0.143	21.56	0.235	23.71	4M52D7W
		64QAM	826.5 - 846.5	4.537	0.115	20.62	0.189	22.77	4M54D7W
		256QAM	826.5 - 846.5	4.523	0.060	17.80	0.099	19.95	4M52D7W
	10 MHz	QPSK	829.0 - 844.0	9.013	0.165	22.18	0.271	24.33	9M01G7W
		16QAM	829.0 - 844.0	9.000	0.142	21.52	0.233	23.67	9M00D7W
		64QAM	829.0 - 844.0	8.997	0.123	20.89	0.201	23.04	9M00D7W
		256QAM	829.0 - 844.0	9.004	0.061	17.83	0.100	19.98	9M00D7W
Band 26	1.4 MHz	QPSK	824.7 - 848.3	1.088	0.172	22.35	0.282	24.50	1M09G7W
		16QAM	824.7 - 848.3	1.095	0.136	21.35	0.224	23.50	1M10D7W
		64QAM	824.7 - 848.3	1.093	0.119	20.74	0.195	22.89	1M09D7W
		256QAM	824.7 - 848.3	1.097	0.070	18.47	0.115	20.62	1M10D7W
	3 MHz	QPSK	825.5 - 847.5	2.713	0.172	22.35	0.282	24.50	2M71G7W
		16QAM	825.5 - 847.5	2.708	0.148	21.71	0.243	23.86	2M71D7W
		64QAM	825.5 - 847.5	2.715	0.126	21.02	0.207	23.17	2M71D7W
		256QAM	825.5 - 847.5	2.714	0.070	18.44	0.115	20.59	2M71D7W
	5 MHz	QPSK	826.5 - 846.5	4.568	0.172	22.35	0.282	24.50	4M57G7W
		16QAM	826.5 - 846.5	4.525	0.144	21.57	0.236	23.72	4M52D7W
		64QAM	826.5 - 846.5	4.537	0.118	20.73	0.194	22.88	4M54D7W
		256QAM	826.5 - 846.5	4.523	0.069	18.38	0.113	20.53	4M52D7W
	10 MHz	QPSK	829.0 - 844.0	9.013	0.172	22.35	0.282	24.50	9M01G7W
		16QAM	829.0 - 844.0	9.000	0.145	21.61	0.238	23.76	9M00D7W
		64QAM	829.0 - 844.0	8.997	0.124	20.93	0.203	23.08	9M00D7W
		256QAM	829.0 - 844.0	9.004	0.061	17.85	0.100	20.00	9M00D7W
ULCA Band 5	10 + 10 MHz	QPSK	829.0 - 844.0	18.810	0.160	22.05	0.263	24.20	18M8G7W
		16QAM	829.0 - 844.0	18.858	0.081	19.09	0.133	21.24	18M9D7W
		64QAM	829.0 - 844.0	18.814	0.081	19.07	0.132	21.22	18M8D7W
		256QAM	829.0 - 844.0	18.890	0.051	17.11	0.084	19.26	18M9D7W
NR Band n5	5 MHz	π/2 BPSK	826.5 - 846.5	4.503	0.172	22.35	0.282	24.50	4M50G7W
		QPSK	826.5 - 846.5	4.525	0.165	22.17	0.271	24.32	4M52G7W
		16QAM	826.5 - 846.5	4.514	0.135	21.29	0.221	23.44	4M51D7W
		64QAM	826.5 - 846.5	4.520	0.100	19.98	0.163	22.13	4M52D7W
		256QAM	826.5 - 846.5	4.508	0.062	17.89	0.101	20.04	4M51D7W
	10 MHz	π/2 BPSK	829.0 - 844.0	8.995	0.172	22.35	0.282	24.50	8M99G7W
		QPSK	829.0 - 844.0	9.333	0.170	22.30	0.278	24.45	9M33G7W
		16QAM	829.0 - 844.0	9.351	0.135	21.31	0.222	23.46	9M35D7W
		64QAM	829.0 - 844.0	9.325	0.100	20.00	0.164	22.15	9M32D7W
		256QAM	829.0 - 844.0	9.315	0.060	17.78	0.098	19.93	9M31D7W
	15 MHz	π/2 BPSK	831.5 - 841.5	13.479	0.172	22.35	0.282	24.50	13M5G7W
		QPSK	831.5 - 841.5	14.206	0.170	22.30	0.279	24.45	14M2G7W
		16QAM	831.5 - 841.5	14.161	0.146	21.64	0.239	23.79	14M2D7W
		64QAM	831.5 - 841.5	14.211	0.103	20.13	0.169	22.28	14M2D7W
		256QAM	831.5 - 841.5	14.181	0.059	17.72	0.097	19.87	14M2D7W
	20 MHz	π/2 BPSK	834.0 - 839.0	17.921	0.172	22.35	0.282	24.50	17M9G7W
		QPSK	834.0 - 839.0	18.945	0.170	22.31	0.279	24.46	18M9G7W
		16QAM	834.0 - 839.0	19.070	0.142	21.51	0.232	23.66	19M1D7W
		64QAM	834.0 - 839.0	19.046	0.098	19.92	0.161	22.07	19M0D7W
		256QAM	834.0 - 839.0	18.987	0.059	17.67	0.096	19.82	19M0D7W

EUT Overview

FCC ID: BCGA2757		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device		Page 3 of 96

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 4 of 96

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2757**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

Test Device Serial No.: YG6YDYXRKQ, F32YWYM00Y, DLX216700E11KXN1M

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8)

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	WiFi 2.4GHz	Bluetooth	WiFi 5GHz	WCDMA / LTE / FR1 NR		
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.11 a/n/ac/ax	Mid Band	High Band	Ultra High Band
3a	Config 1	✗	✓	✓	✗	✗	✗
3a	Config 2	✓	✗	✗	✓	✗	✗
3a	Config 3	✓	✗	✗	✗	✓	✗
3a	Config 4	✗	✓	✓	✓	✗	✗
3a	Config 5	✗	✓	✓	✗	✓	✗
1b	Config 6	✗	✗	✓	✓	✗	✗
1b	Config 7	✗	✗	✓	✗	✓	✗
1a	Config 8	✓	✗	✗	✗	✗	✓
1a	Config 9	✗	✓	✗	✗	✗	✓


Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 3 and is reported in RF WLAN and RF Part 27b test reports.

Wi-Fi 2.4GHz and Bluetooth 2.4 GHz can transmit simultaneously on separate antennas. Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz) in connected mode and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4 GHz) in disconnected mode and Wi-Fi (2.4 GHz) – BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power.

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 5 of 96

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain (dBi)	
	Antenna 4	Antenna 3b
WCDMA850	-2.8	-0.7
LTE Band 5/26		
NR Band n5		


Table 2-2. Highest Antenna Gain

Note: Antenna Specifications have been attached in Appendix A

2.4 Test Support Equipment

1	Apple MacBook Pro	Model: A2141	S/N: C02DV7VKMD6T
	w/AC/DC Adapter	Model: A2166	S/N: N/A
2	Apple USB-C Cable	Model: Spartan	S/N: 000MKTR02U
3	USB-C Cable	Model: A246	S/N: N/A
	w/ AC Adapter	Model: A2305	S/N: N/A
4	DC Power Supply	Model: KPS3010D	S/N: N/A

Table 2-3. Test Support Equipment

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 6 of 96



2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz were tested with the highest transmitting power and the worst case channel.


The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 20A32640u installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 7 of 96

V2.1 11/9/2021

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$


And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.


Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 8 of 96

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 9 of 96

V2.1 11/9/2021

5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
Agilent Technologies	N9020A	MXA Signal Analyzer	4/26/2022	Annual	4/26/2023	MY56470202
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	1/19/2022	Annual	1/19/2023	T058701-02
ETS-Lindgren	3142E	Biconilog Antenna (26-6000MHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Horn Antenna (1-18GHz)	10/25/2021	Annual	10/25/2022	227597
ETS-Lindgren	SU-241	Table Top Temperature Chamber	10/6/2021	Annual	10/6/2022	92009574
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz-6GHz)	1/6/2022	Annual	1/6/2023	102328
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	FSVA3044	Signal Analyzer (up to 44 GHz)	5/12/2022	Annual	5/12/2023	101098
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546
Rohde & Schwarz	TC-TA18	Cross-Polarized Antenna 400MHz-18GHz	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz-18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz-40GHz)	4/18/2022	Annual	4/18/2023	100050

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 10 of 96

6.0 SAMPLE CALCULATIONS

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data)

$\pi/2$ BPSK / QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 W = Combination of Any

QAM Modulation


Emission Designator = 8M45D7W

BW = 8.45 MHz
 D = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCGA2757		PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 11 of 96

V2.1 11/9/2021

7.0 TEST RESULTS

7.1 Summary


Company Name: Apple Inc.
 FCC ID: BCGA2757
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): WCDMA/NR/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	< 7 Watts max. ERP	PASS	Section 7.5
	Frequency Stability	2.1055, 22.355	±2.5 ppm	PASS	Section 7.7
RADIATED	Radiated Spurious Emissions	2.1053, 22.917(a)	-13 dBm for all out-of-band emissions	PASS	Section 7.6

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.1.

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 12 of 96

V2.1 11/9/2021

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





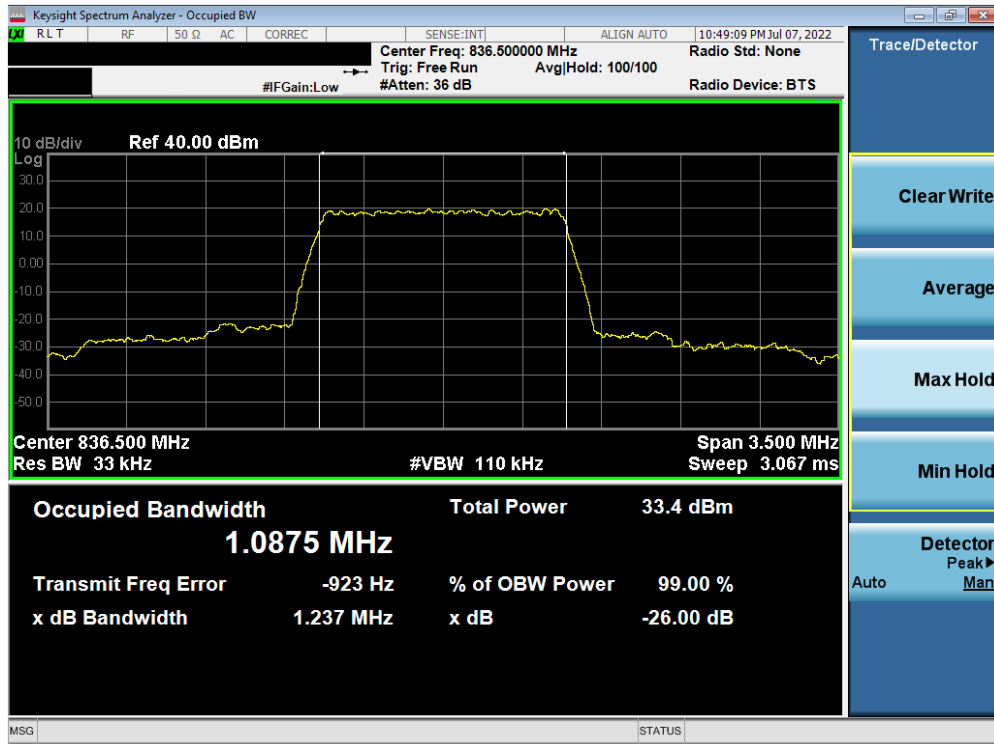
Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 13 of 96

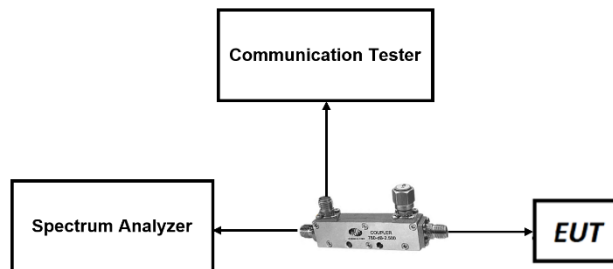V2.1 11/9/2021




Plot 7-1. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB Configuration)

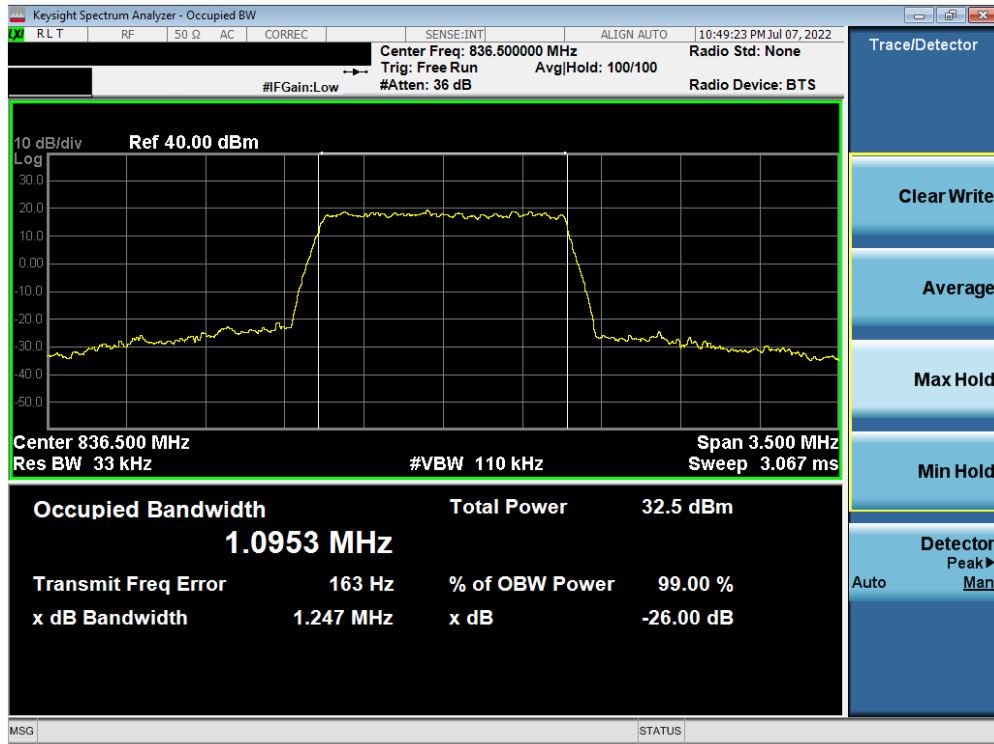


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 14 of 96

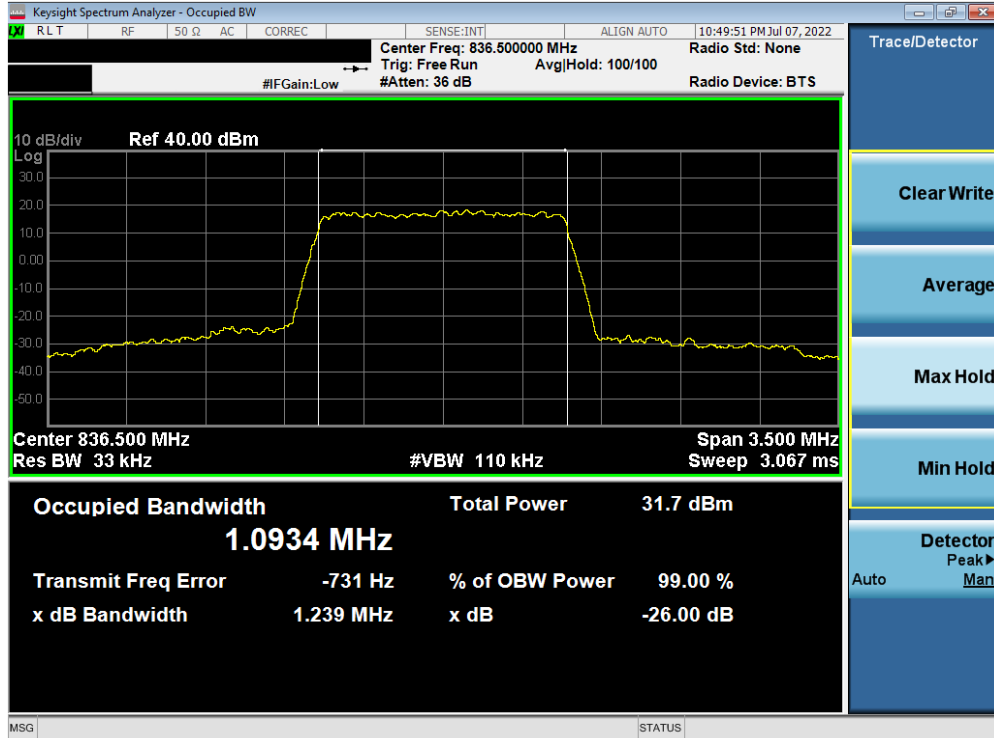


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 64-QAM - Full RB Configuration)

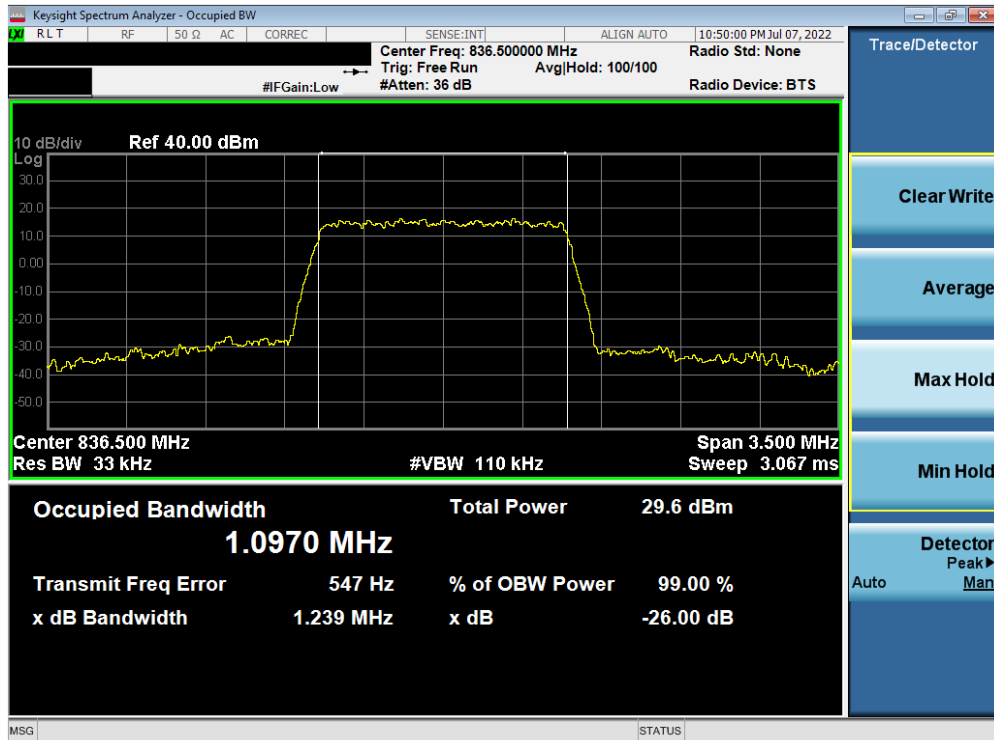


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 15 of 96

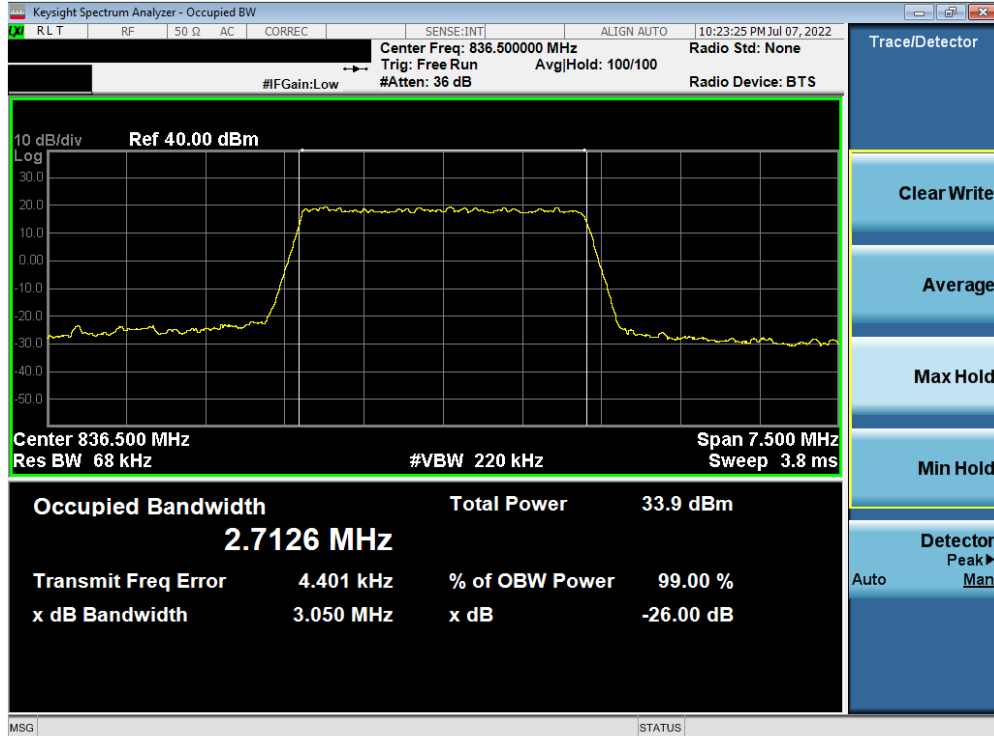


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB Configuration)

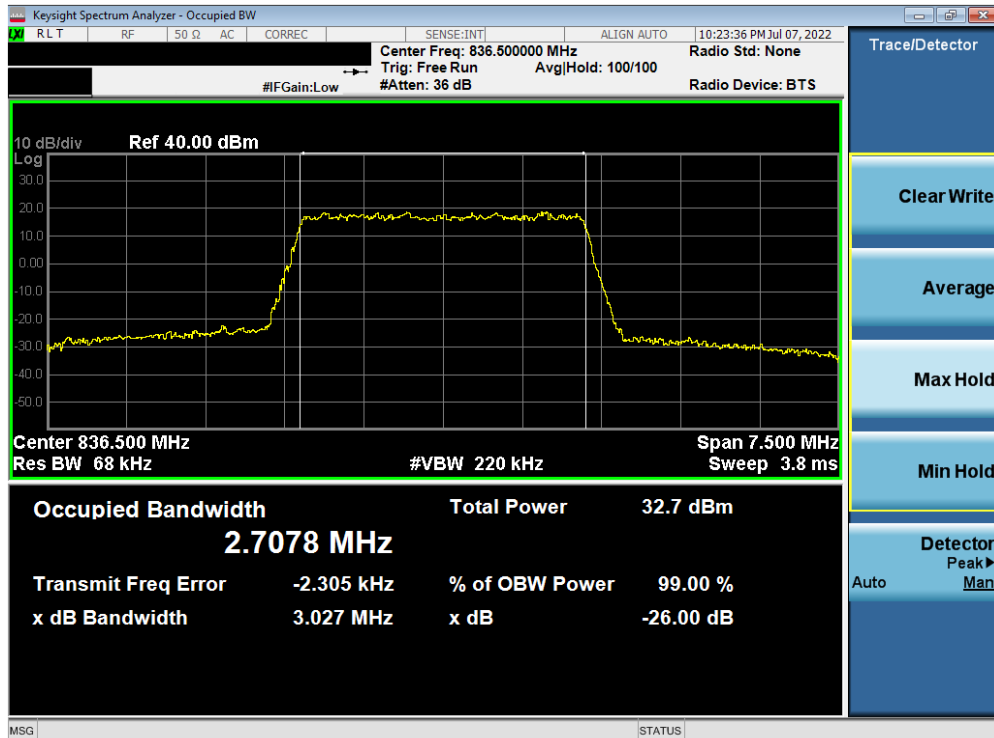


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 16 of 96

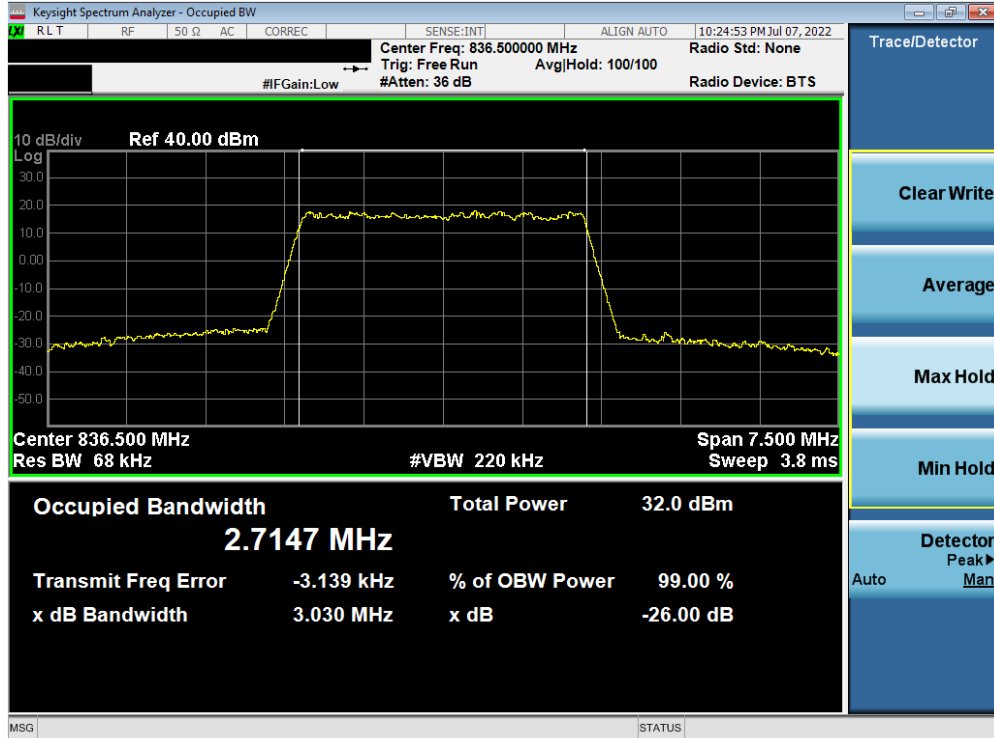


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 64-QAM - Full RB Configuration)

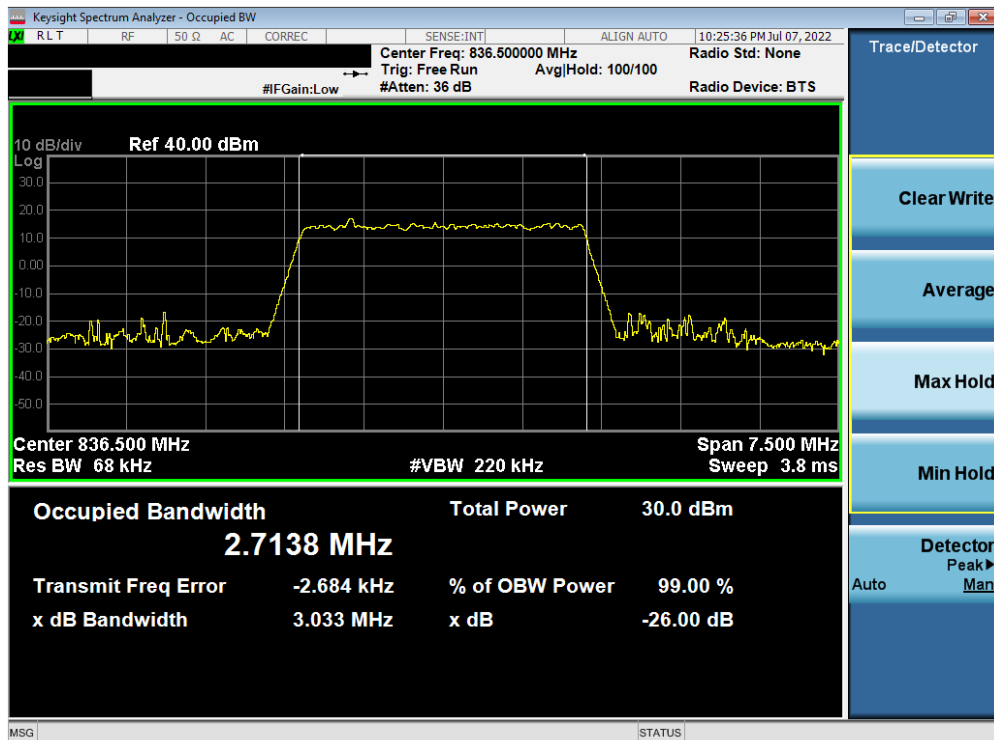


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 17 of 96

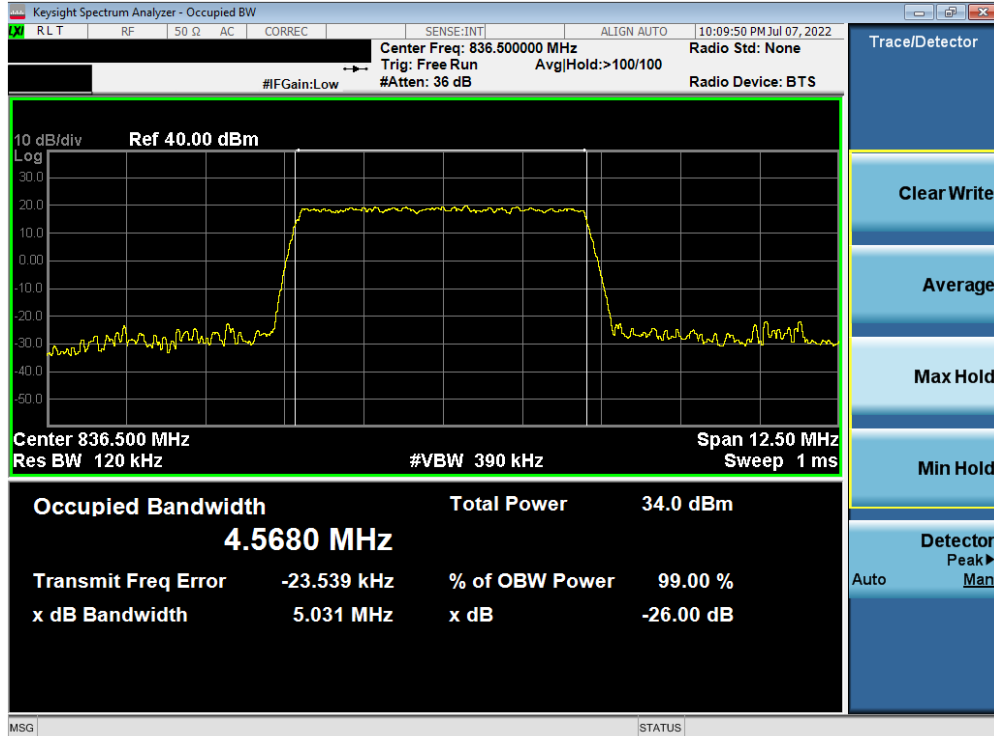


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB Configuration)

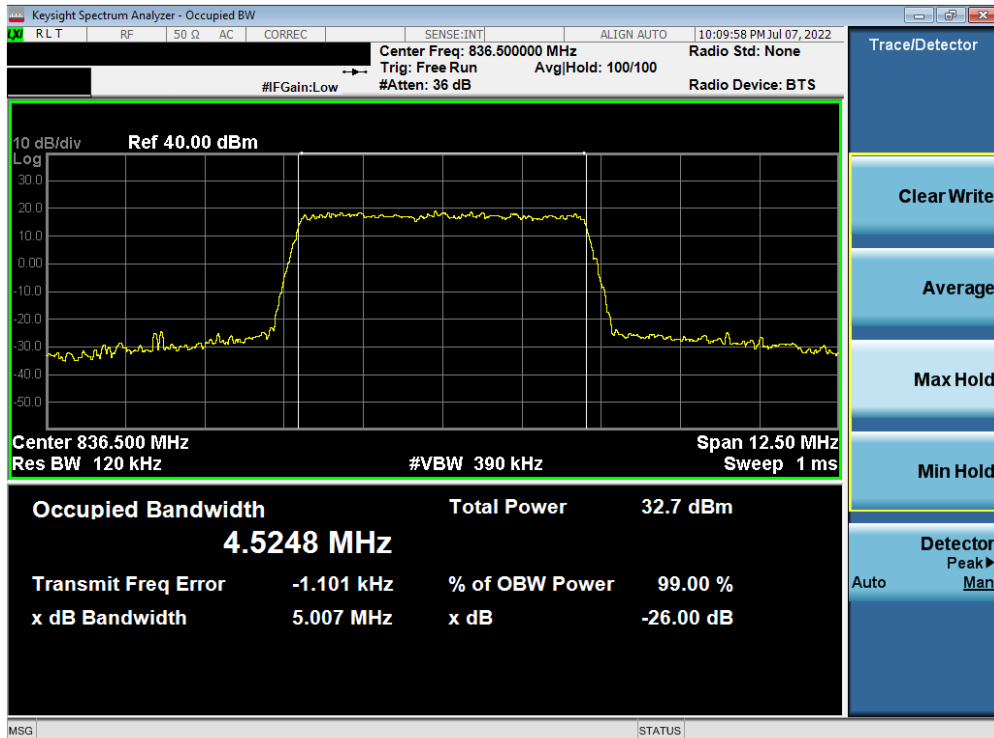


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 18 of 96

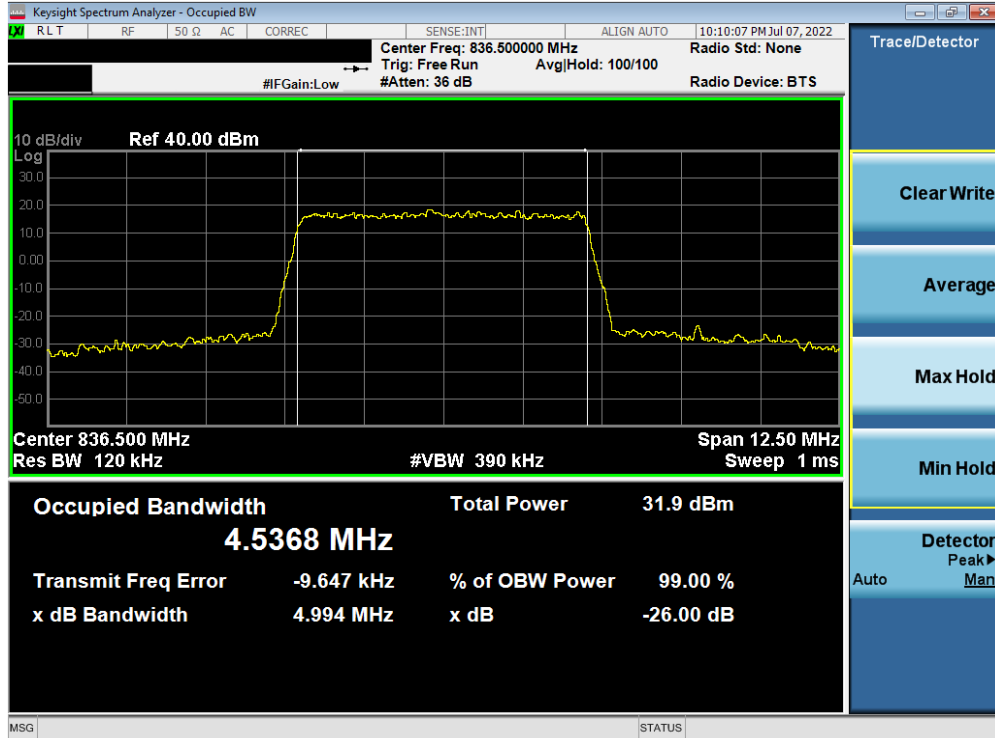


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 64-QAM - Full RB Configuration)

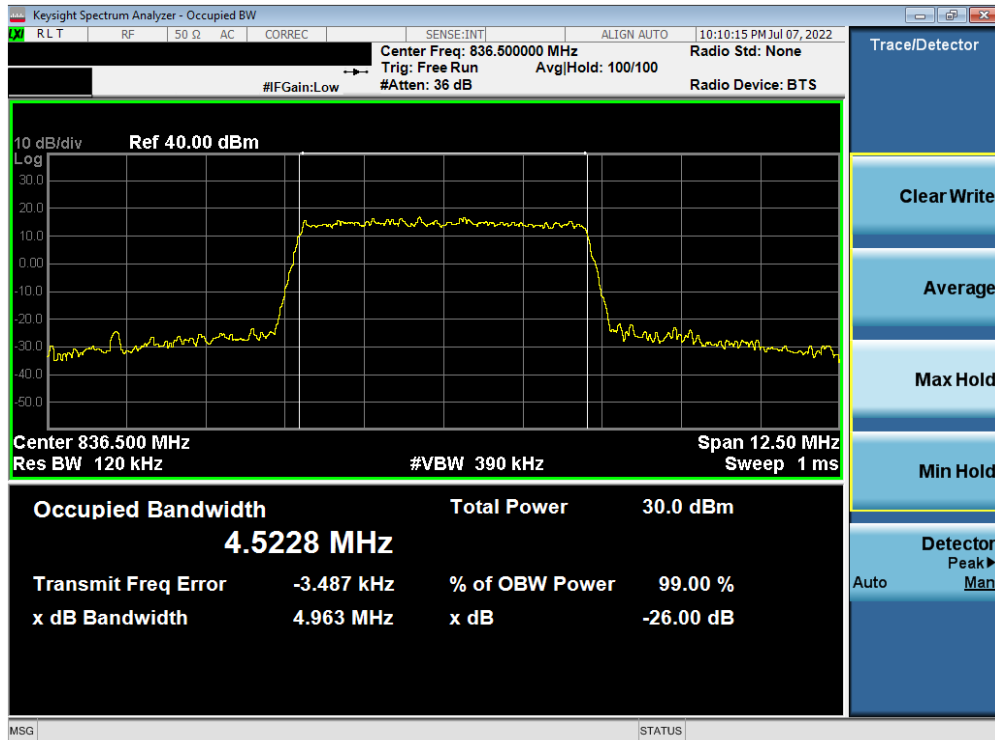


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 19 of 96

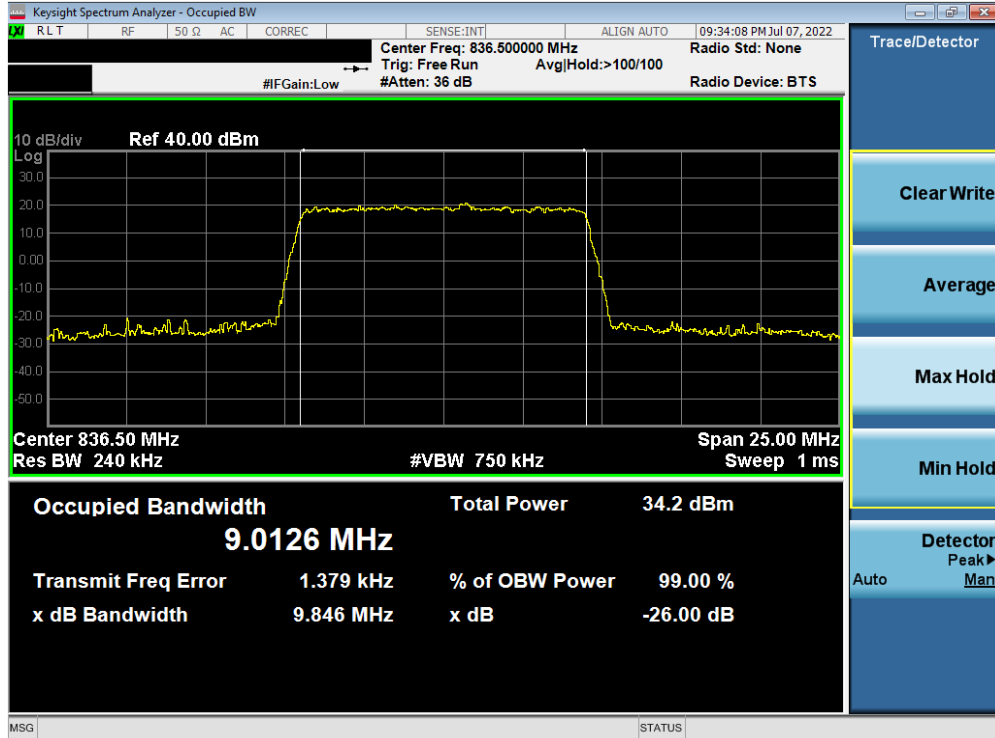


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB Configuration)

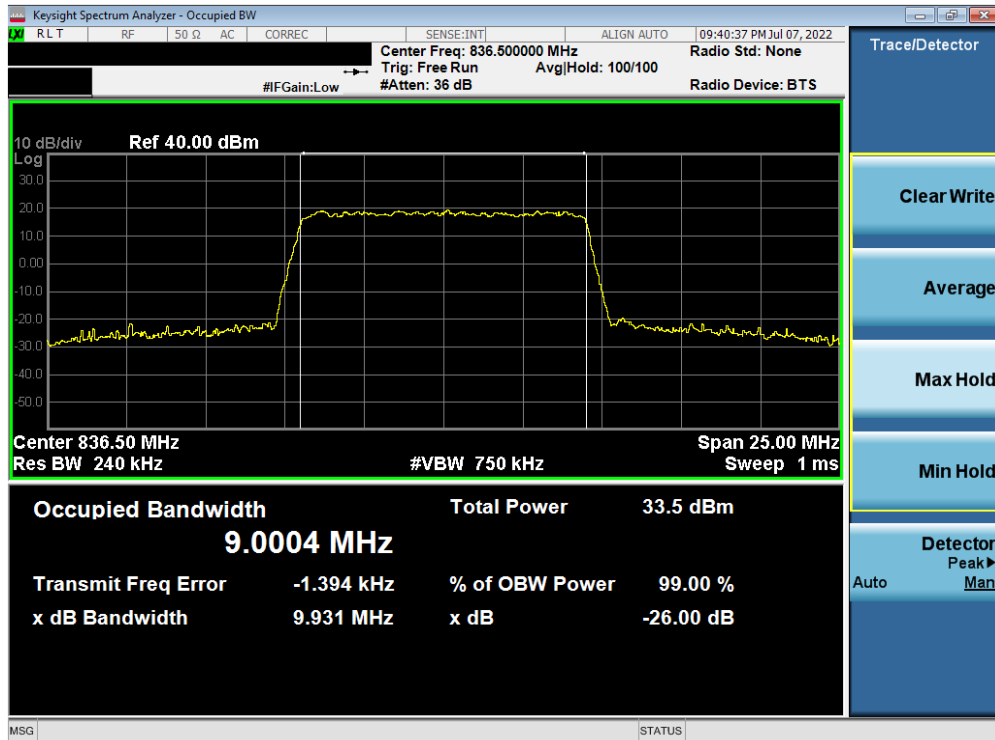

Plot 7-14. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 20 of 96

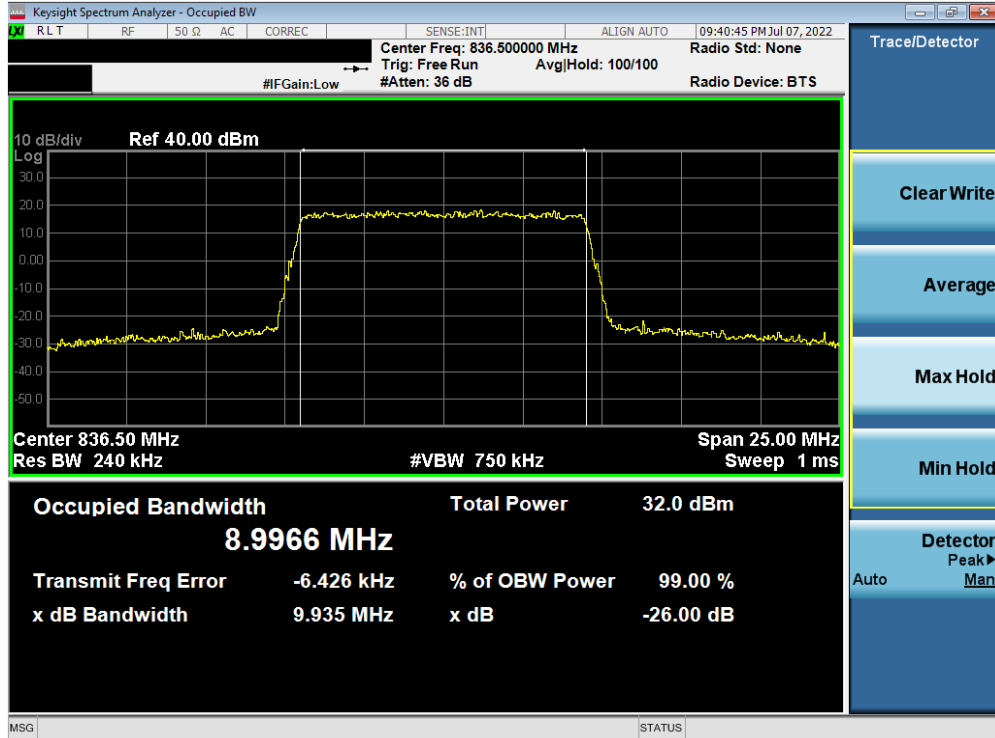


Plot 7-15. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 64-QAM - Full RB Configuration)




Plot 7-16. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 21 of 96

NR Band n5

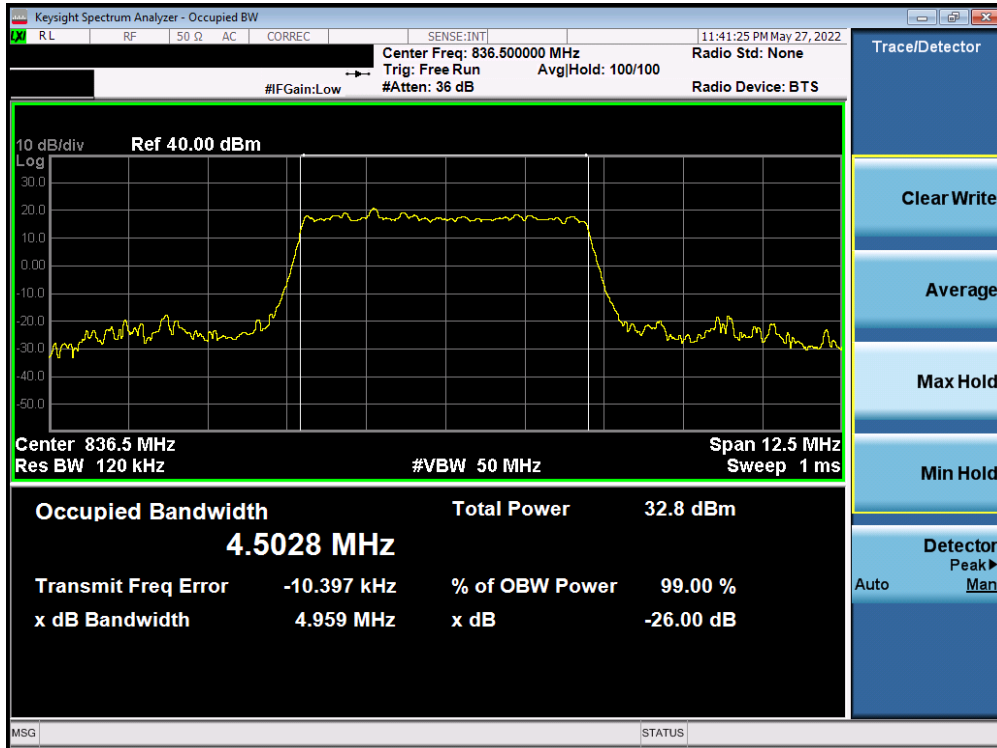


Plot 7-17. Occupied Bandwidth Plot (NR Band n5 - 5MHz $\pi/2$ BPSK - Full RB Configuration)

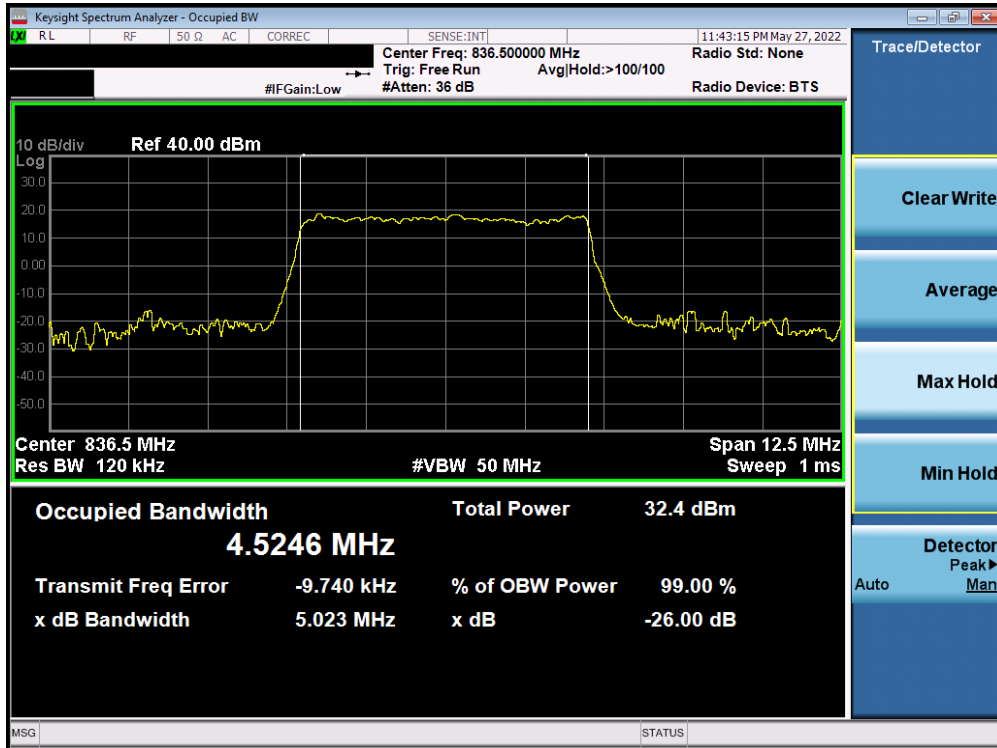


Plot 7-18. Occupied Bandwidth Plot (NR Band n5 - 5MHz QPSK - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 22 of 96

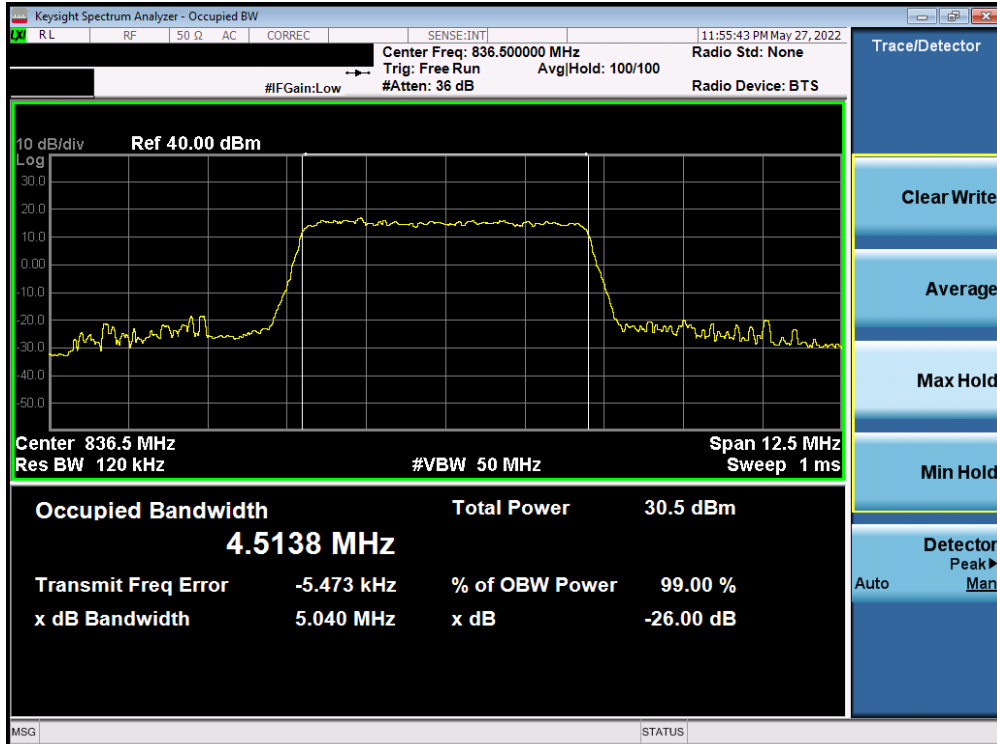


Plot 7-19. Occupied Bandwidth Plot (NR Band n5 - 5MHz 16-QAM - Full RB Configuration)

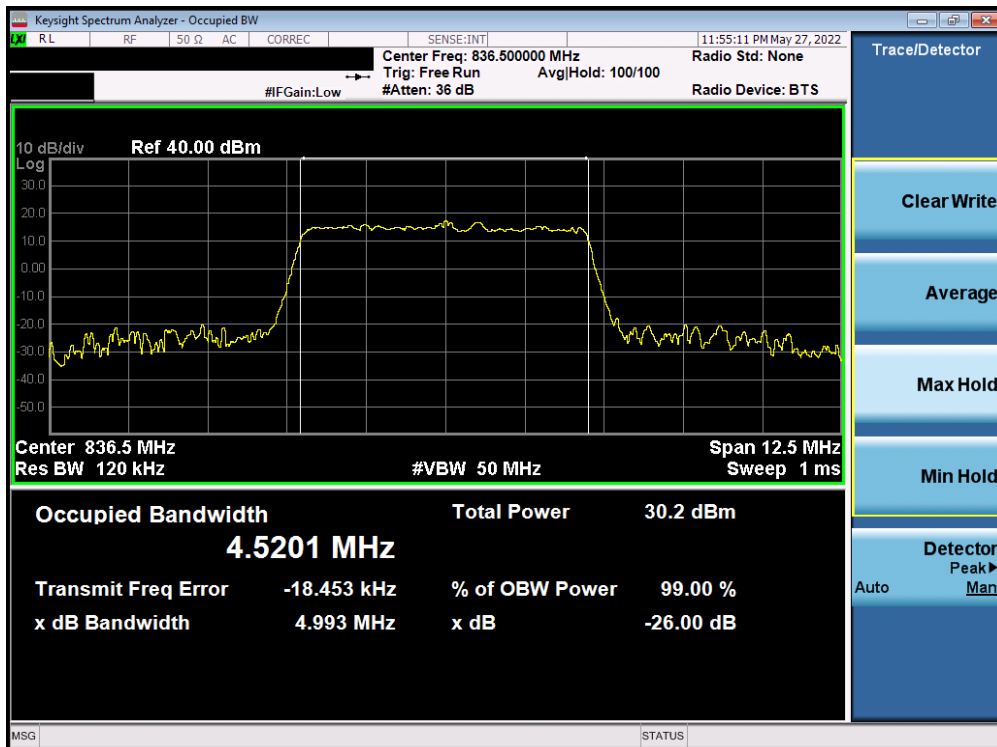


Plot 7-20. Occupied Bandwidth Plot (NR Band n5 - 5MHz 64-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 23 of 96

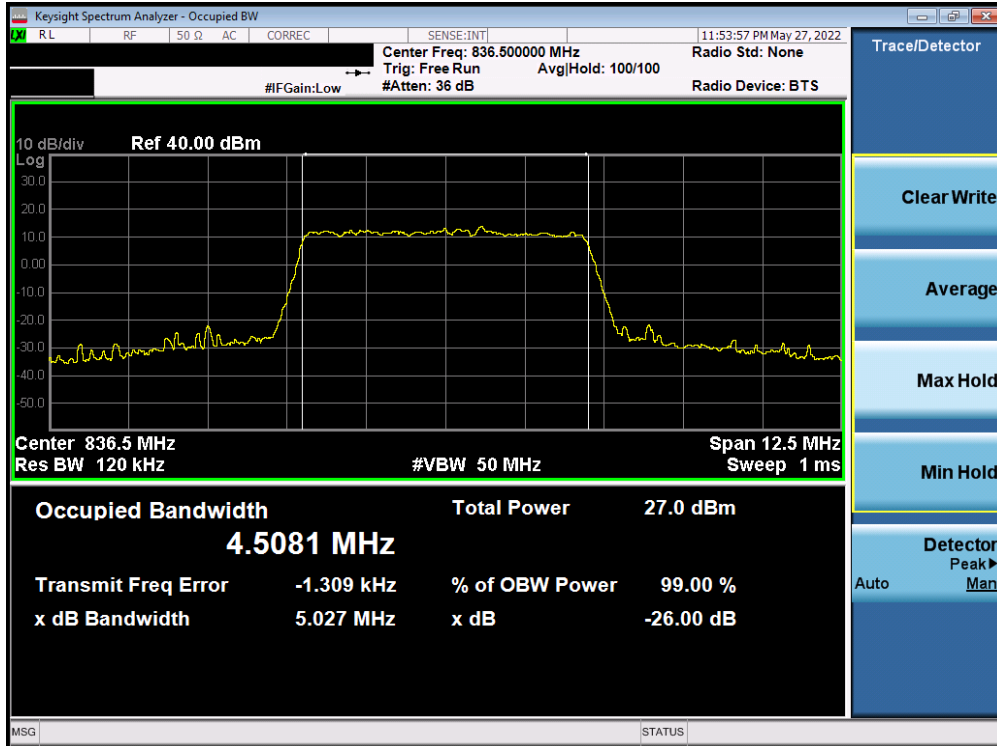


Plot 7-21. Occupied Bandwidth Plot (NR Band n5 - 5MHz 256-QAM - Full RB Configuration)

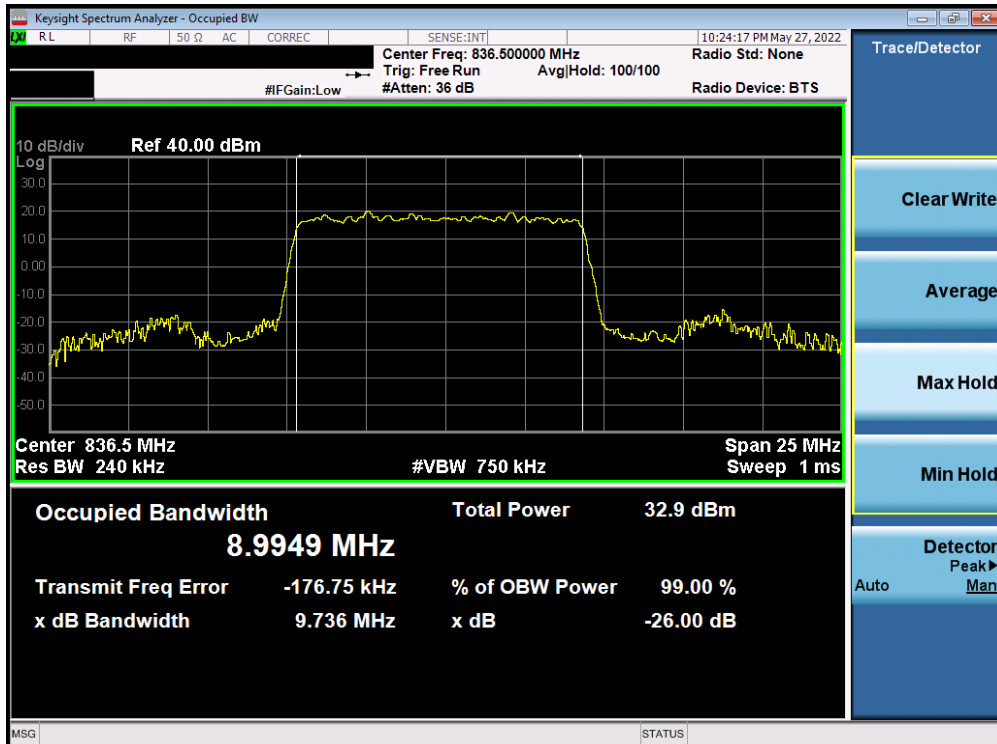


Plot 7-22. Occupied Bandwidth Plot (NR Band n5 - 10MHz $\pi/2$ BPSK - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 24 of 96

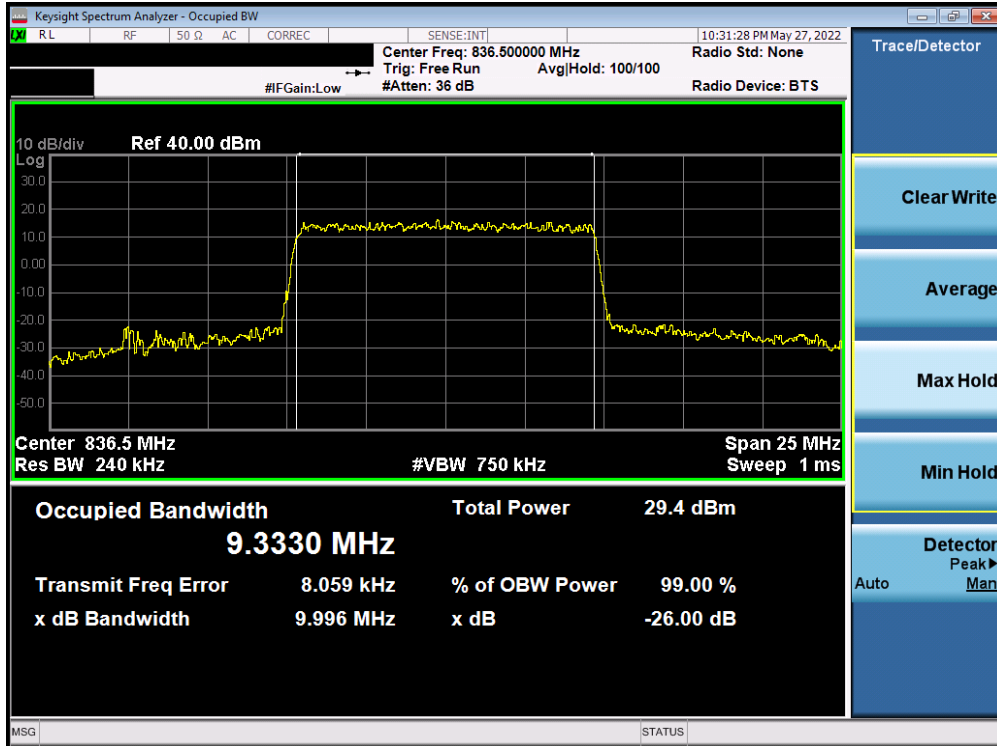


Plot 7-23. Occupied Bandwidth Plot (NR Band n5 - 10MHz QPSK - Full RB Configuration)

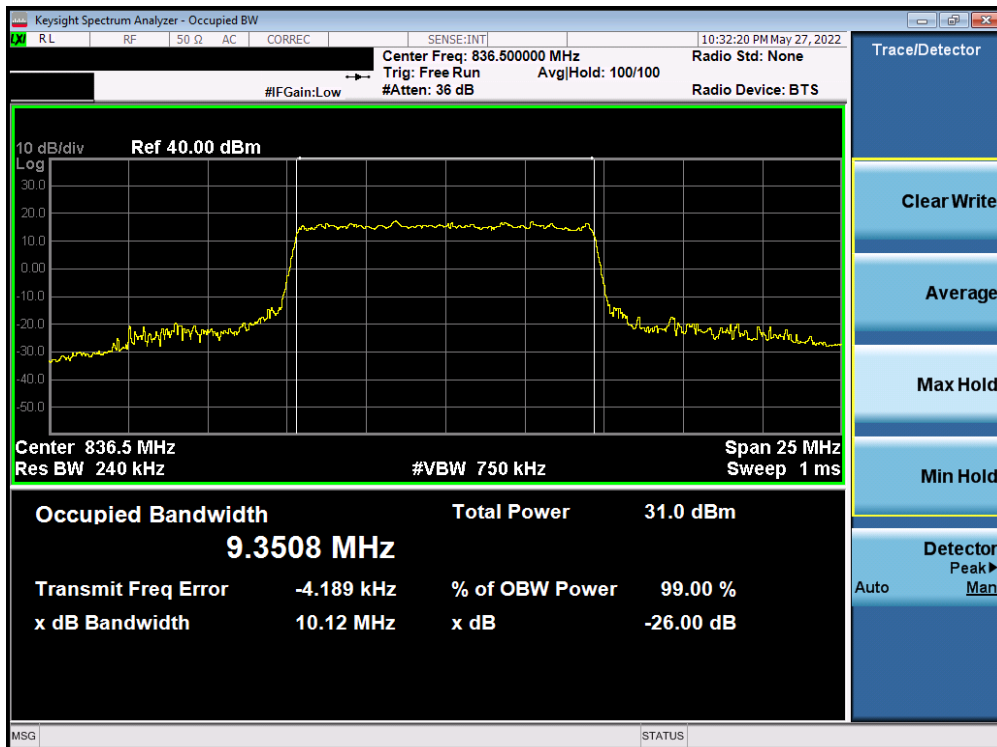


Plot 7-24. Occupied Bandwidth Plot (NR Band n5 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 25 of 96

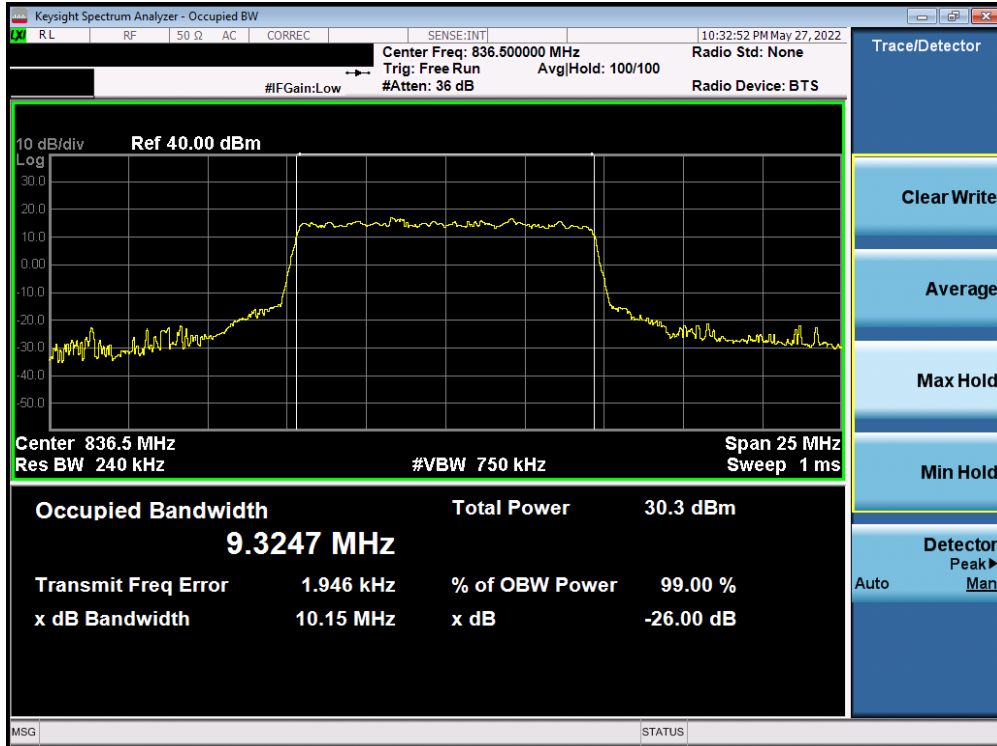


Plot 7-25. Occupied Bandwidth Plot (NR Band n5 - 10MHz 64-QAM - Full RB Configuration)

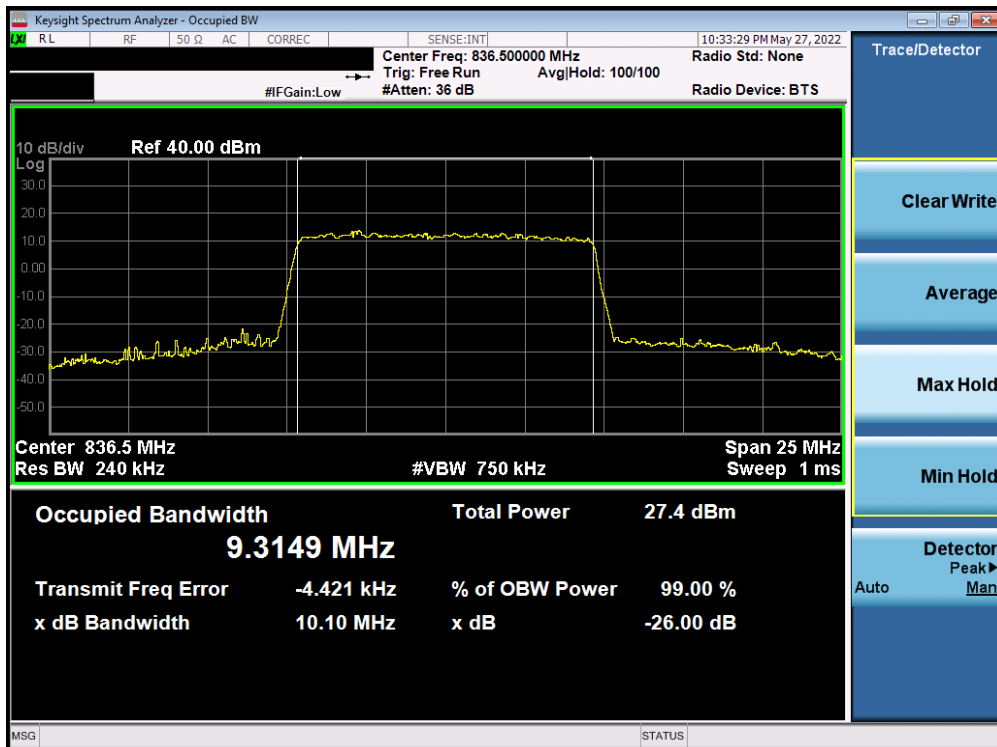


Plot 7-26. Occupied Bandwidth Plot (NR Band n5 - 10MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 26 of 96

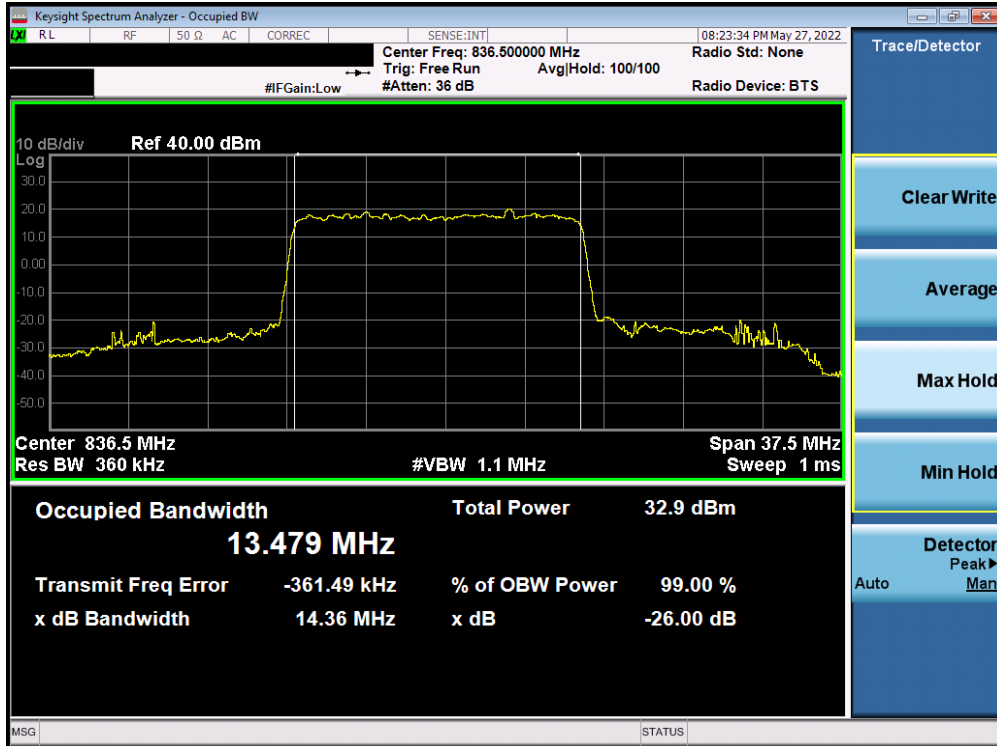


Plot 7-27. Occupied Bandwidth Plot (NR Band n5 - 15MHz $\pi/2$ BPSK - Full RB Configuration)

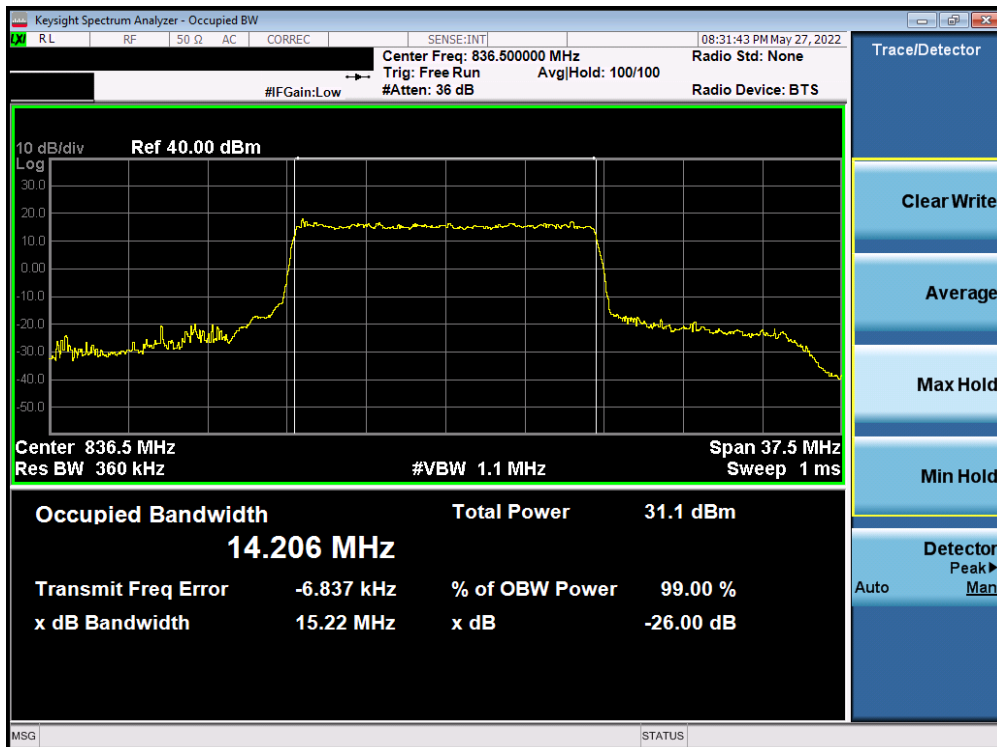


Plot 7-28. Occupied Bandwidth Plot (NR Band n5 - 15MHz QPSK - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 27 of 96

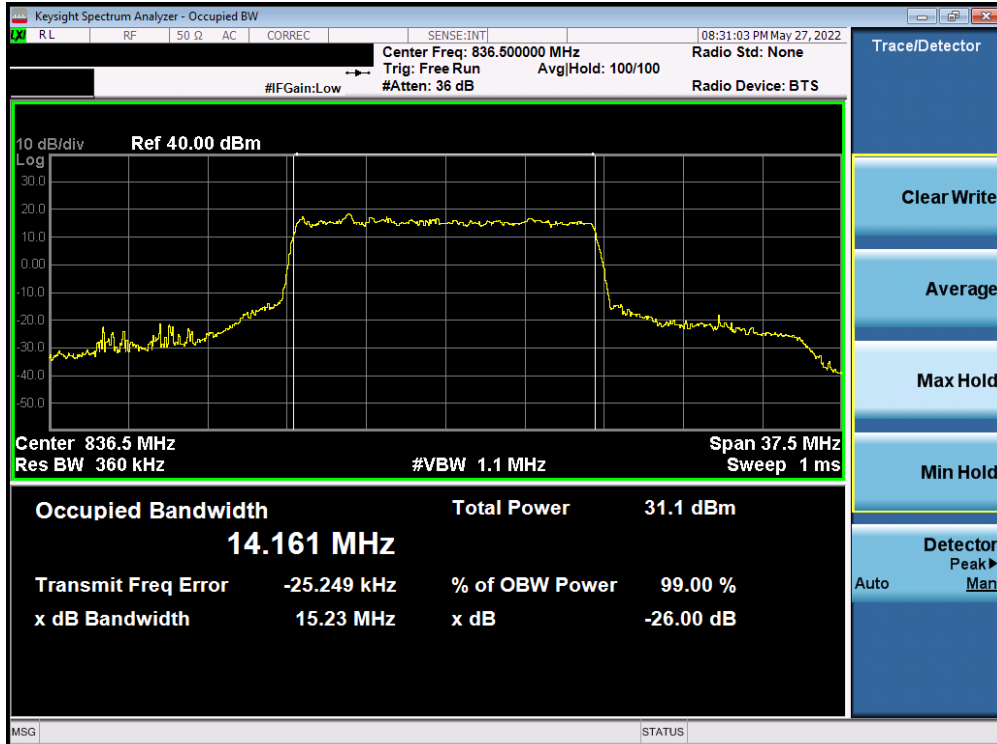


Plot 7-29. Occupied Bandwidth Plot (NR Band n5 - 15MHz 16-QAM - Full RB Configuration)

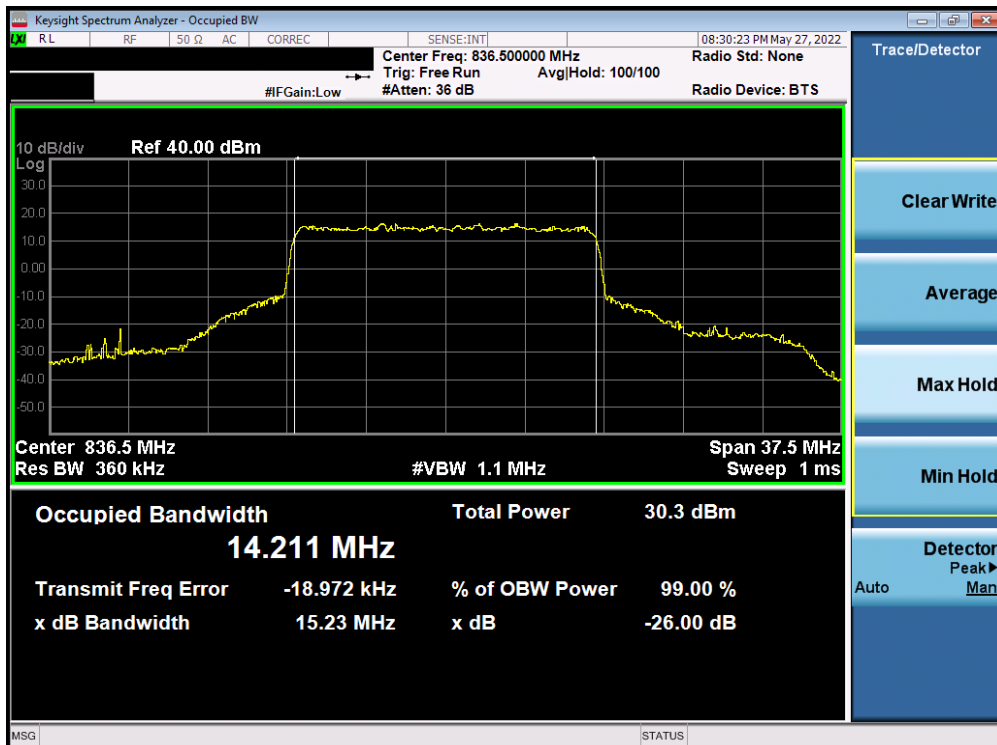


Plot 7-30. Occupied Bandwidth Plot (NR Band n5 - 15MHz 64-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 28 of 96

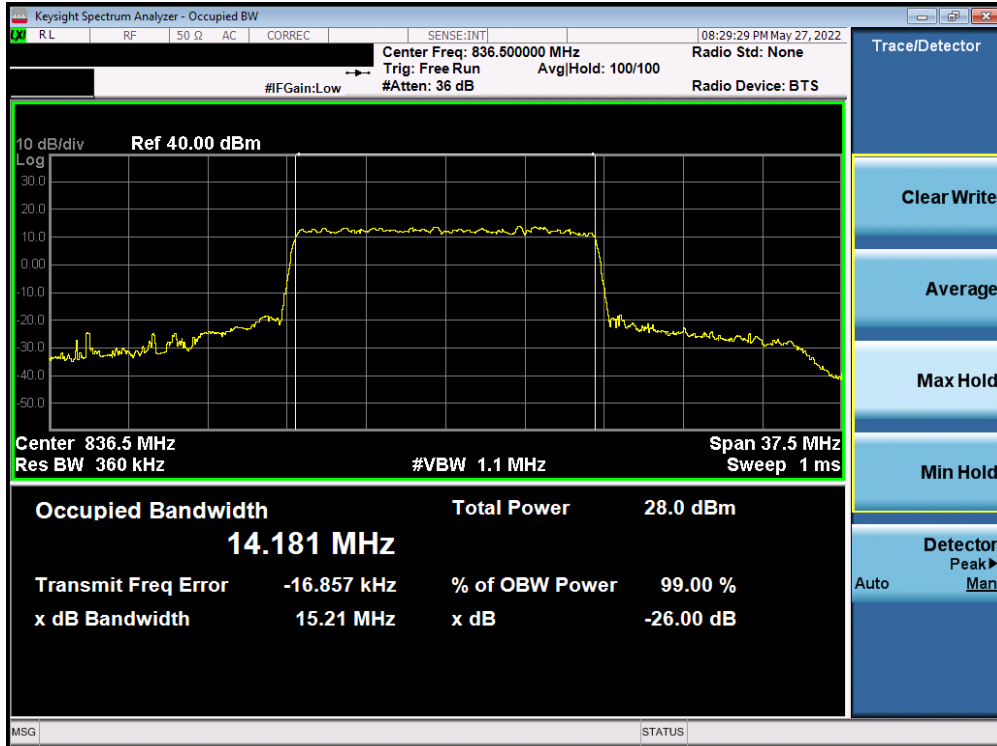


Plot 7-31. Occupied Bandwidth Plot (NR Band n5 - 15MHz 256-QAM - Full RB Configuration)

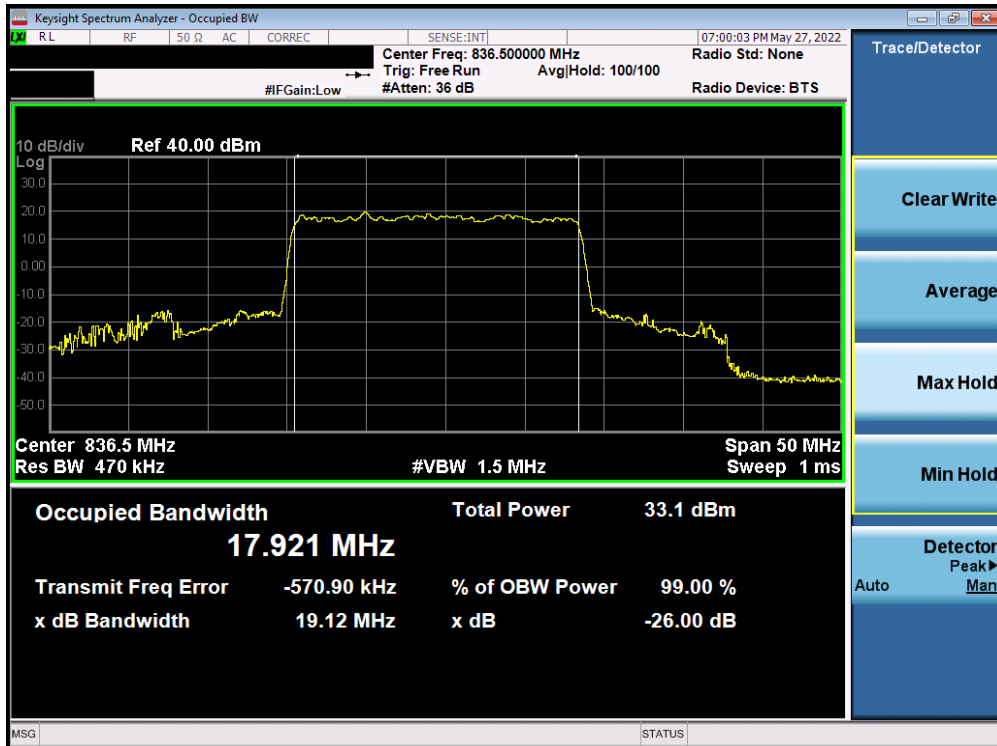

Plot 7-32. Occupied Bandwidth Plot (NR Band n5 - 20MHz $\pi/2$ BPSK - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 29 of 96

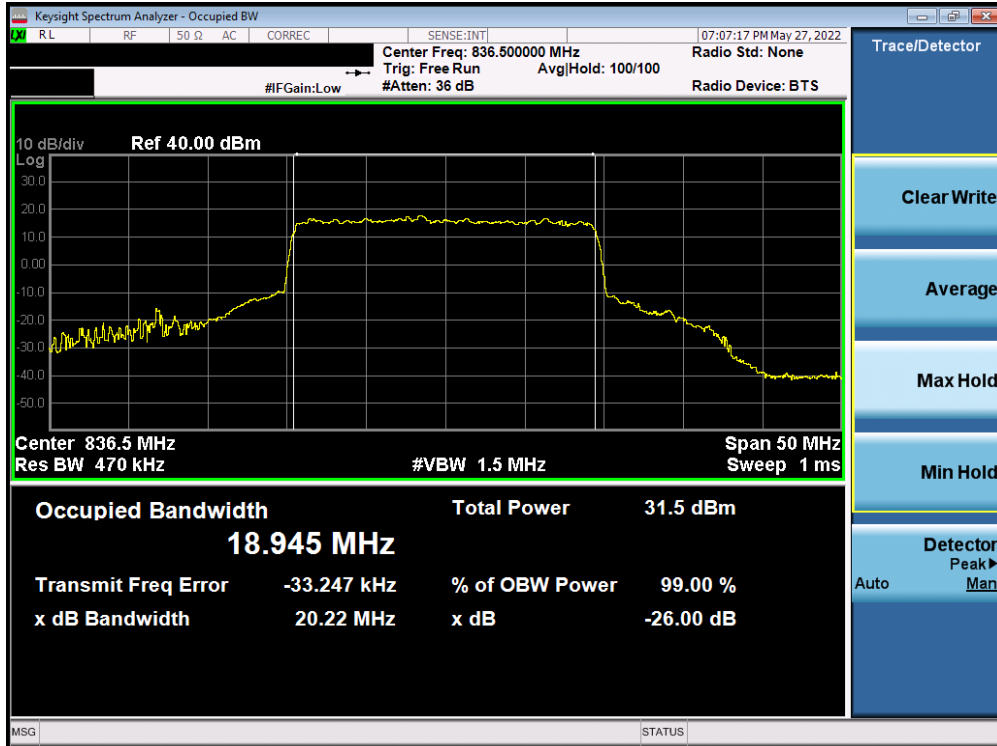


Plot 7-33. Occupied Bandwidth Plot (NR Band n5 - 20MHz QPSK - Full RB Configuration)




Plot 7-34. Occupied Bandwidth Plot (NR Band n5 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 30 of 96

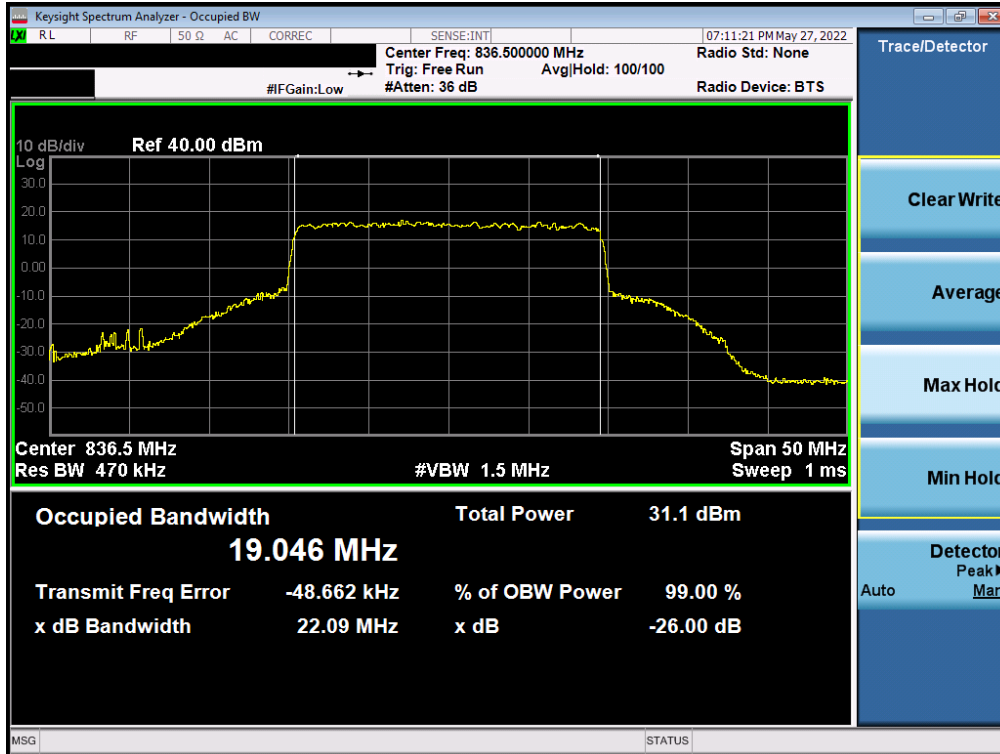


Plot 7-35. Occupied Bandwidth Plot (NR Band n5 - 20MHz 64-QAM - Full RB Configuration)

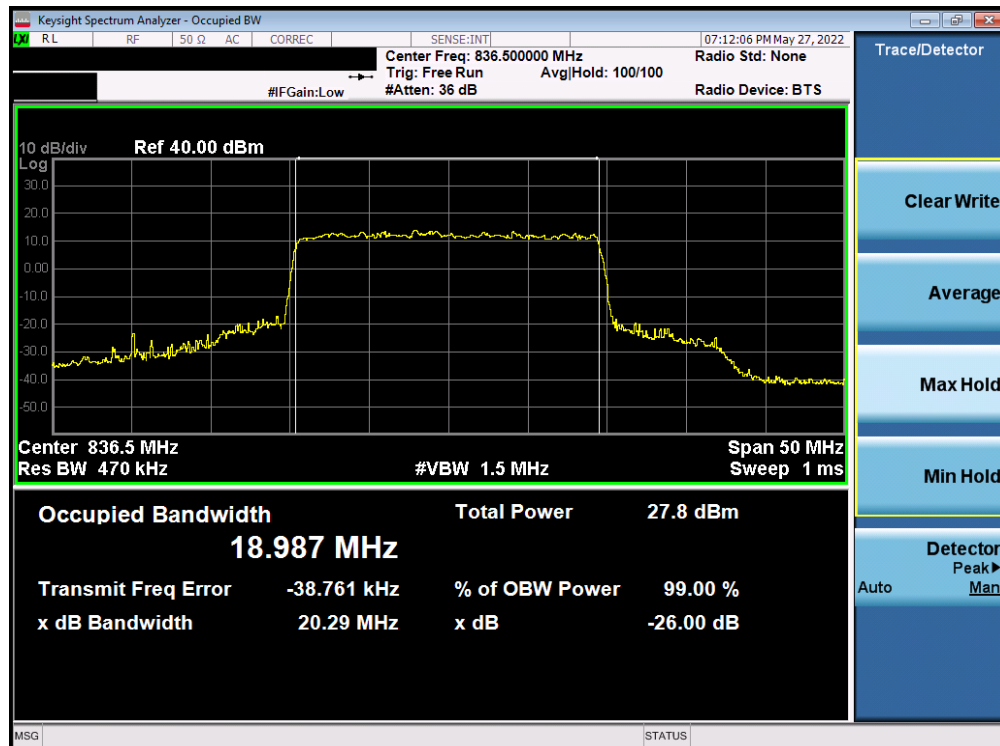


Plot 7-36. Occupied Bandwidth Plot (NR Band n5 - 20MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 31 of 96

ULCA – LTE Band 5

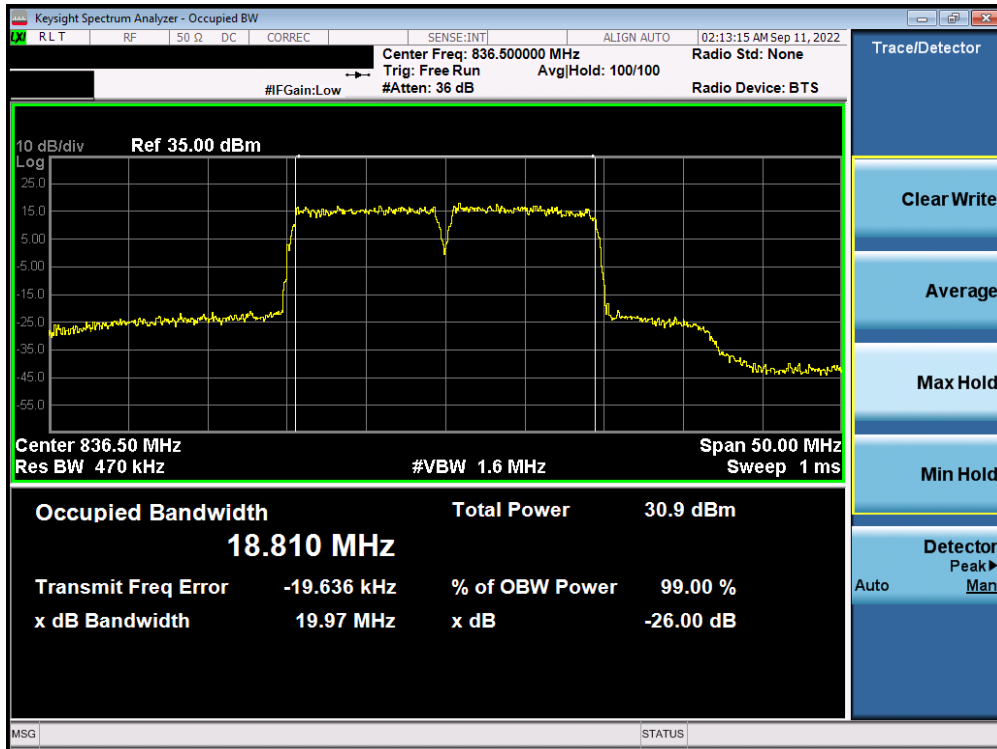


Plot 7-37. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK - Full RB Configuration)

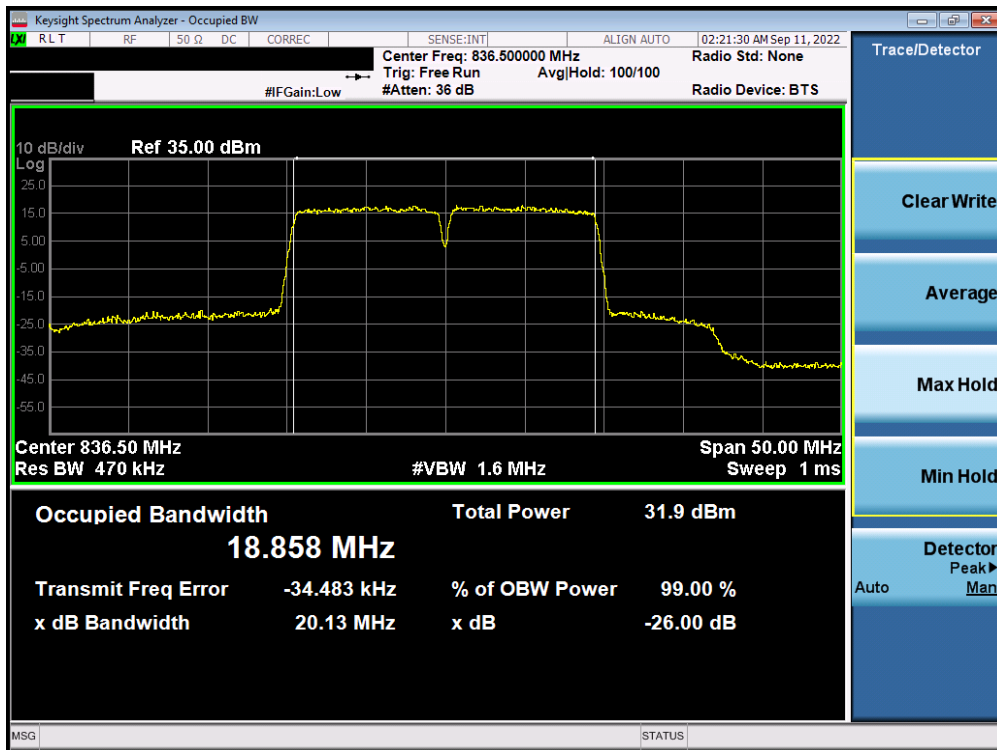

Plot 7-38. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz 16-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 32 of 96

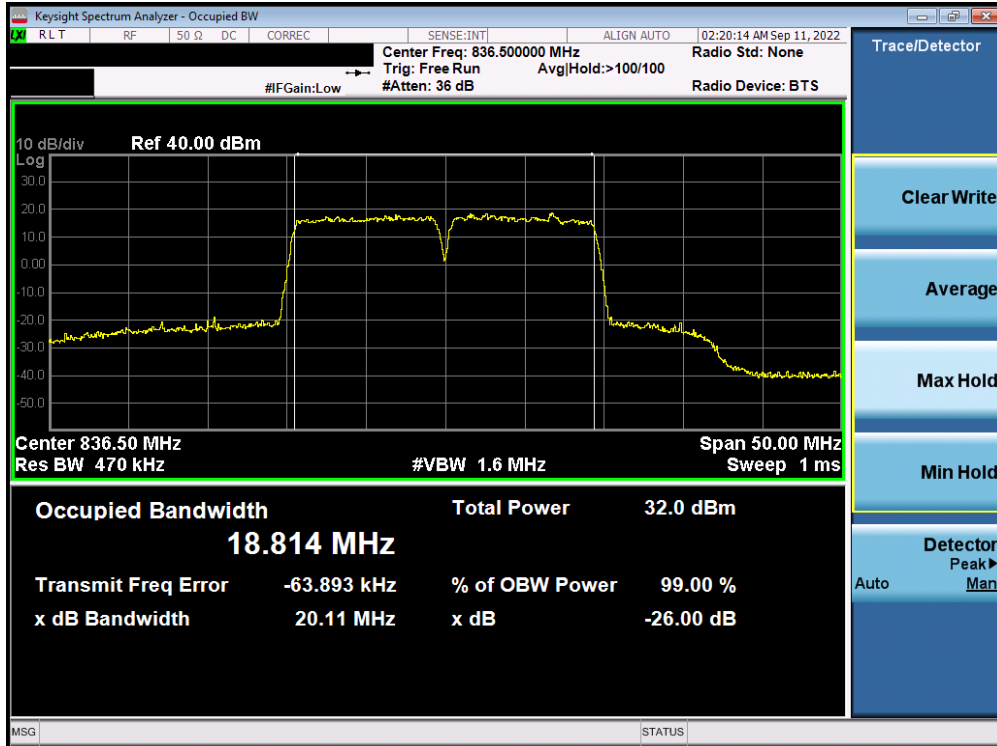


Plot 7-39. Conducted Spurious Plot (ULCA LTE Band – (10 + 10)MHz 64-QAM - Full RB Configuration)



Plot 7-40. Conducted Spurious Plot (ULCA LTE Band – (10 + 10)MHz 256-QAM - Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 33 of 96

WCDMA Cell

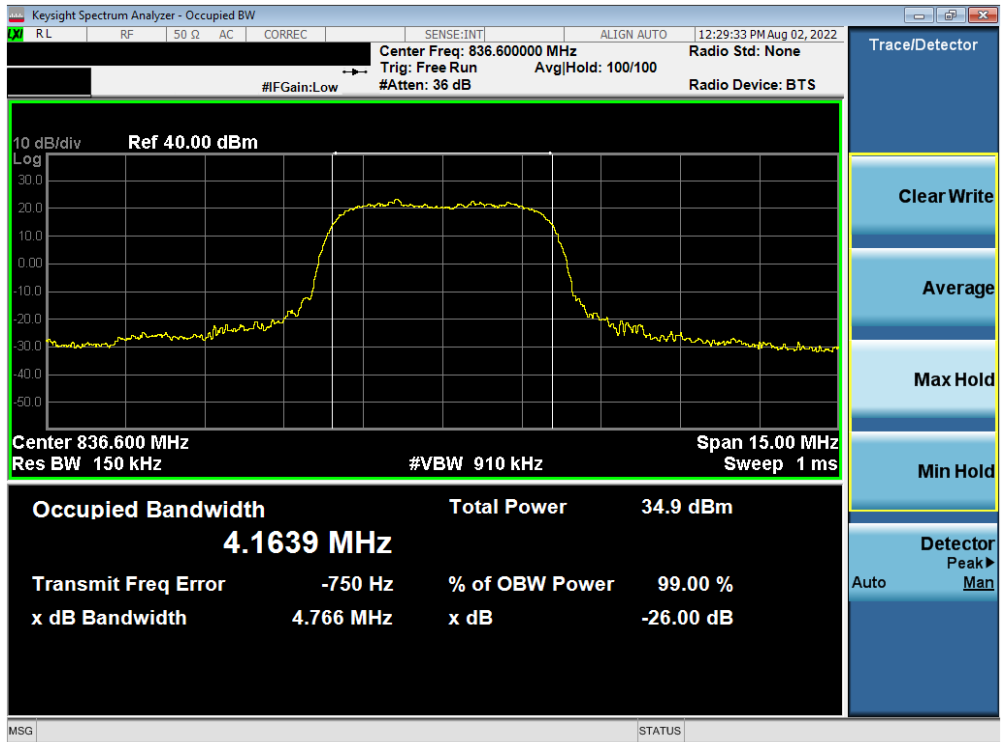

Plot 7-41. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 34 of 96

V2.1 11/9/2021

7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051, 22.917(a)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

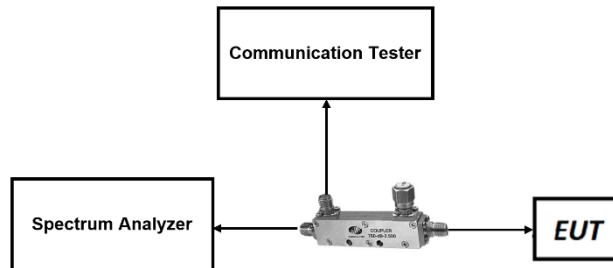




Figure 7-2. Test Instrument & Measurement Setup

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 35 of 96


V2.1 11/9/2021

Test Notes


1. Per Part 22, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
3. Uplink carrier aggregation conducted spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) powers were found while operating with QPSK modulation with both carriers set to transmit using 1RB.
4. Uplink carrier aggregation inter-band emission was investigated and found to not be the worst case

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 36 of 96

LTE Band 26/5

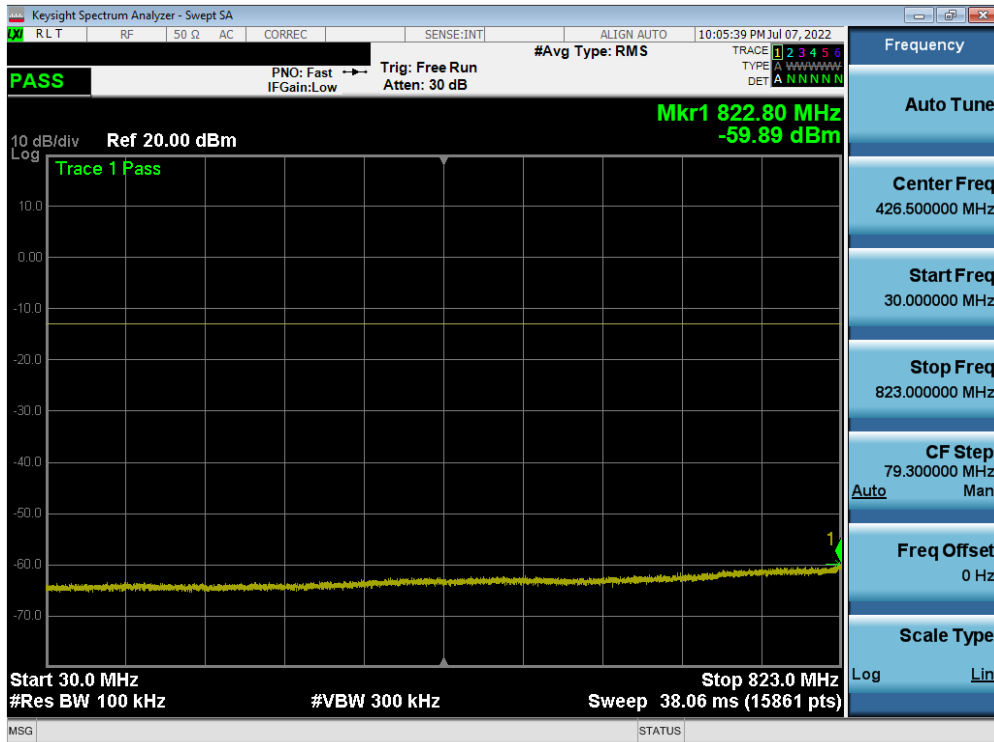


Plot 7-42. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

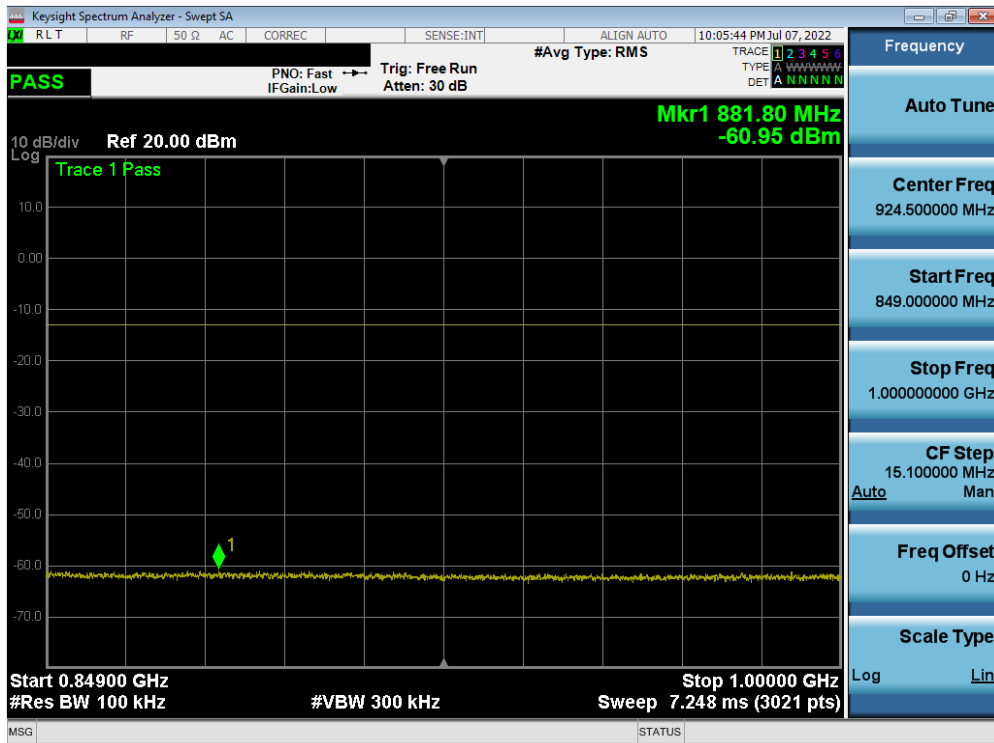


Plot 7-43. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 37 of 96

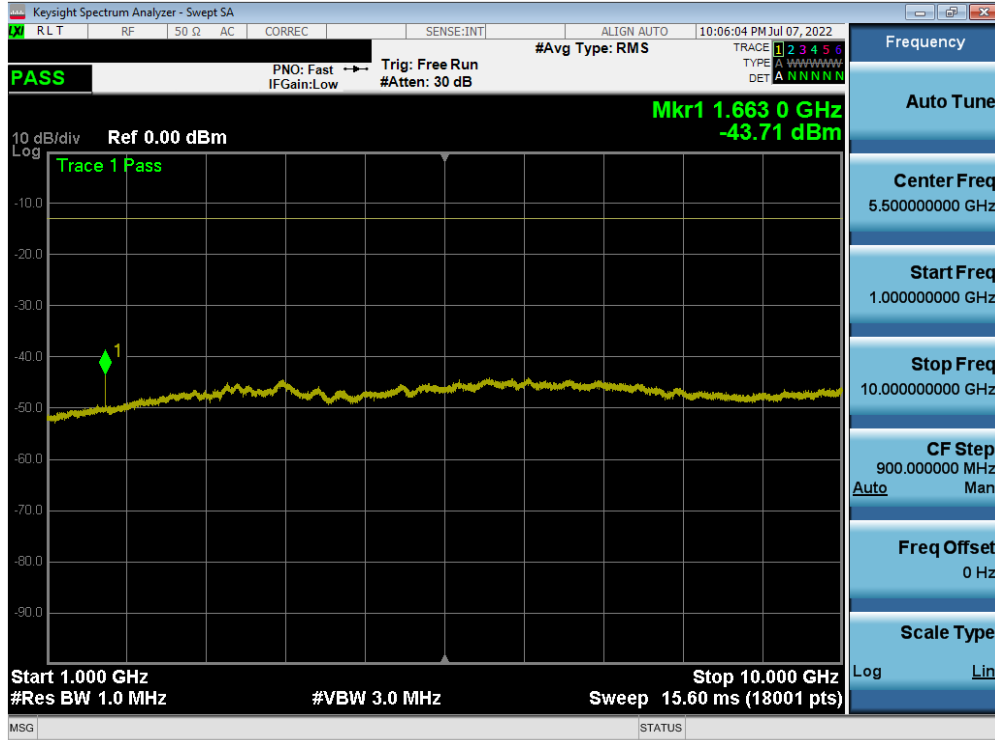


Plot 7-44. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

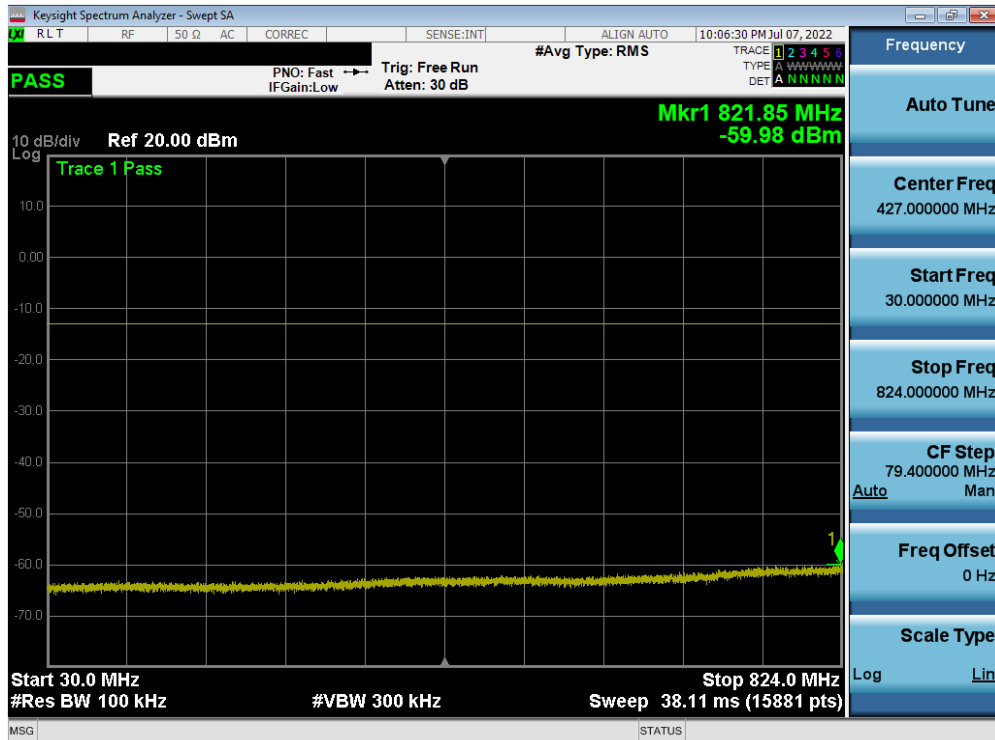


Plot 7-45. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 38 of 96

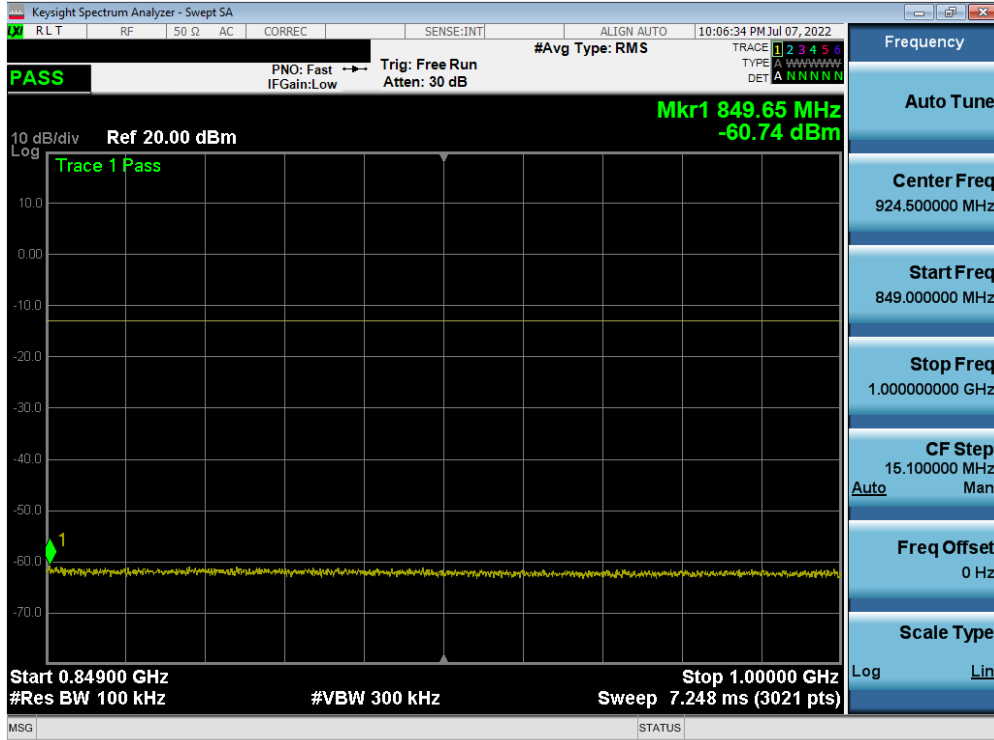


Plot 7-46. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

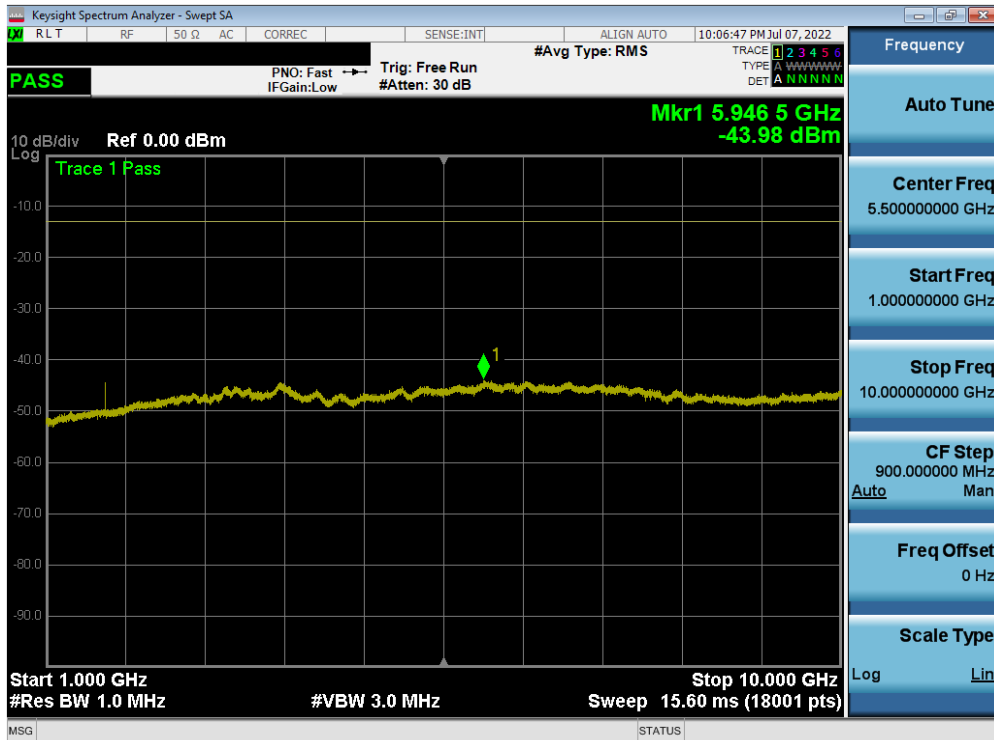


Plot 7-47. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 39 of 96

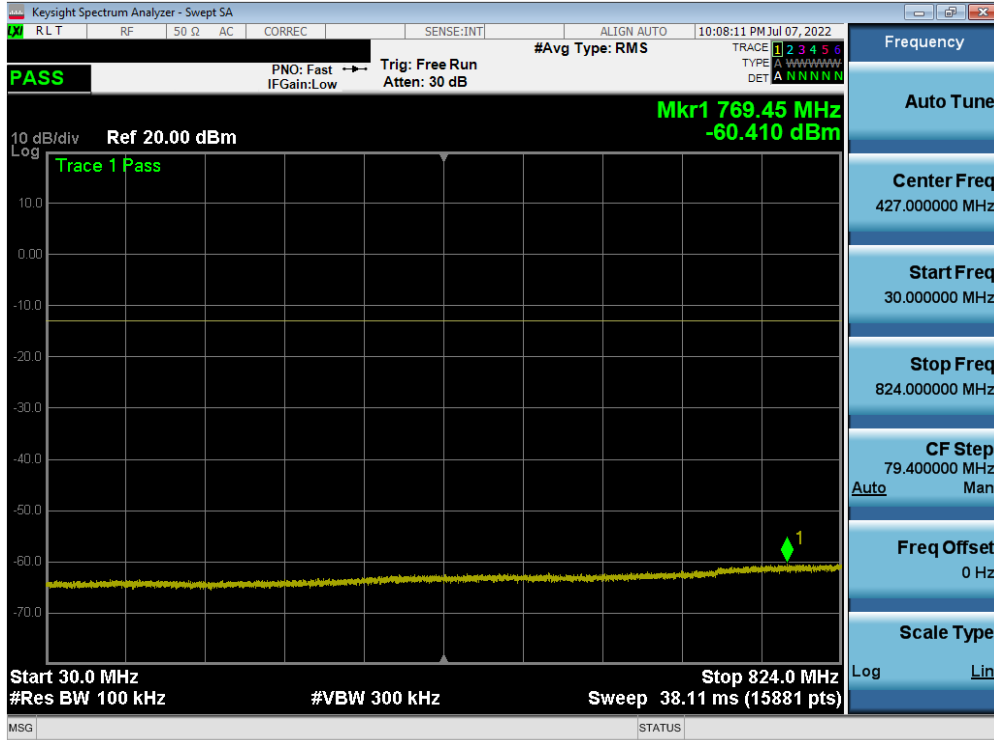


Plot 7-48. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

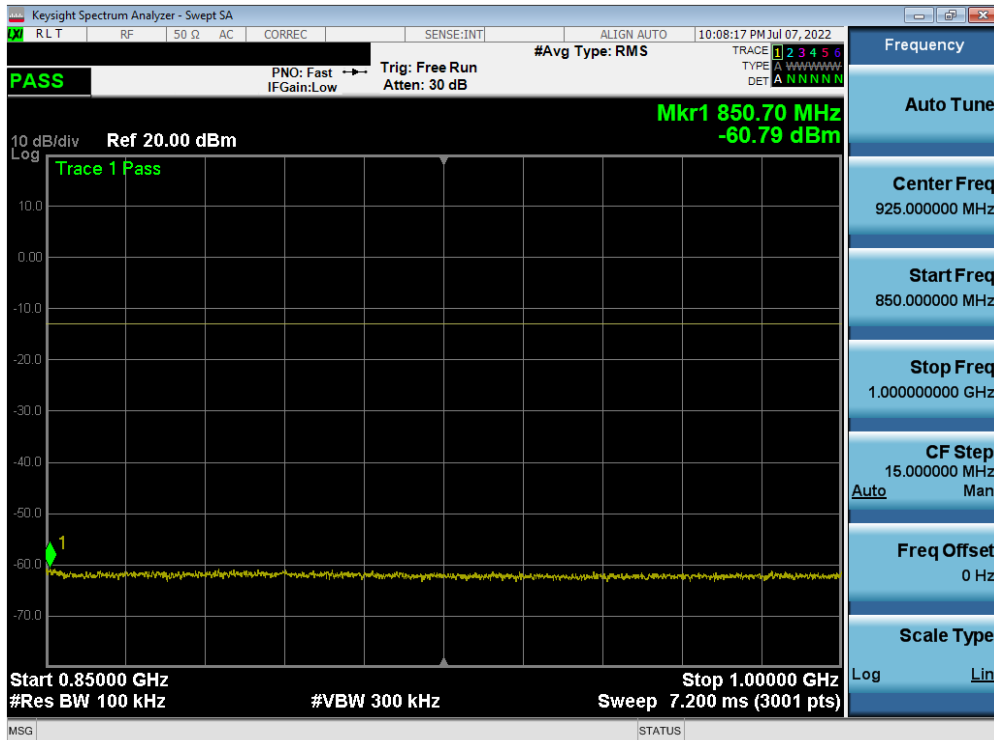

Plot 7-49. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 40 of 96

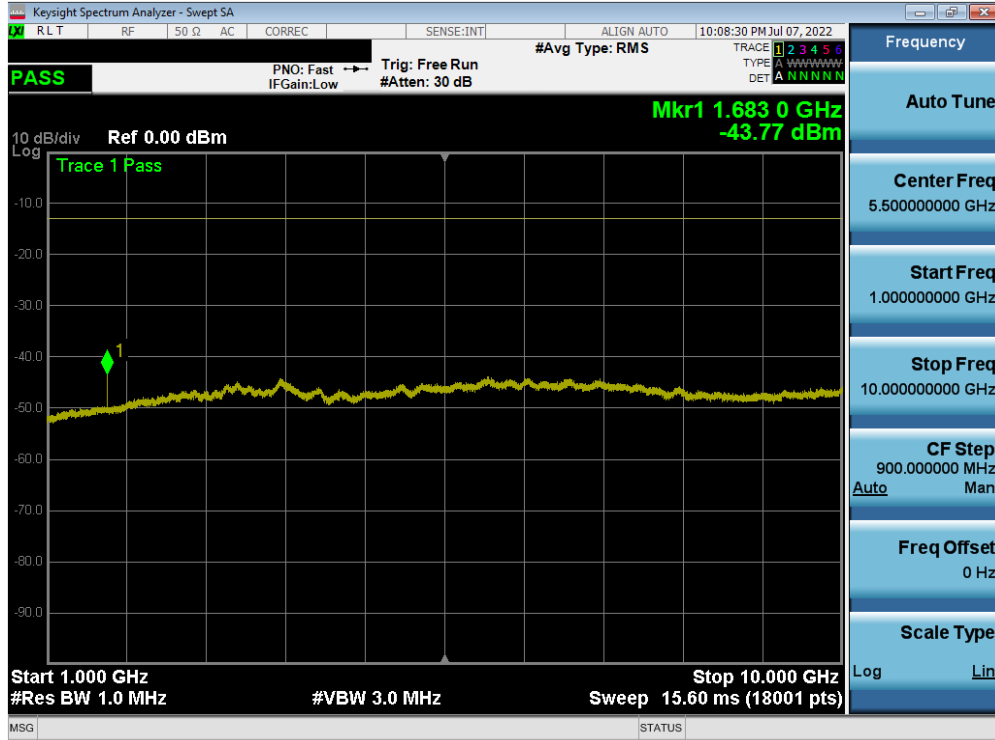


Plot 7-50. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 41 of 96

ULCA LTE Band 5

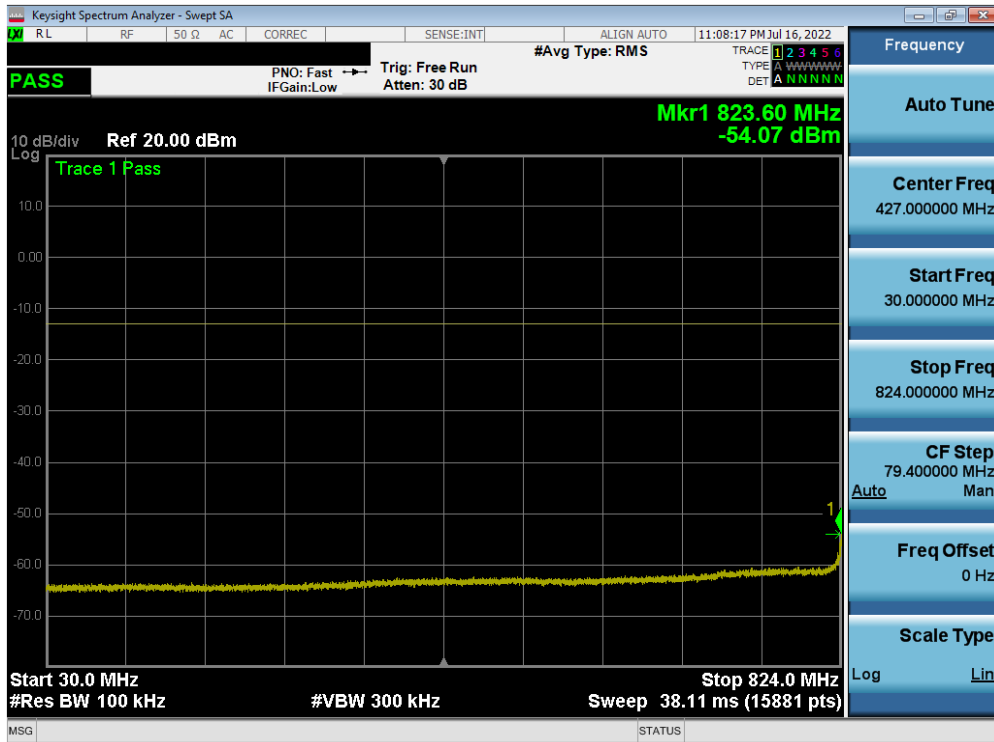


Plot 7-51. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/49 SCC 1/0 - Low Channel)

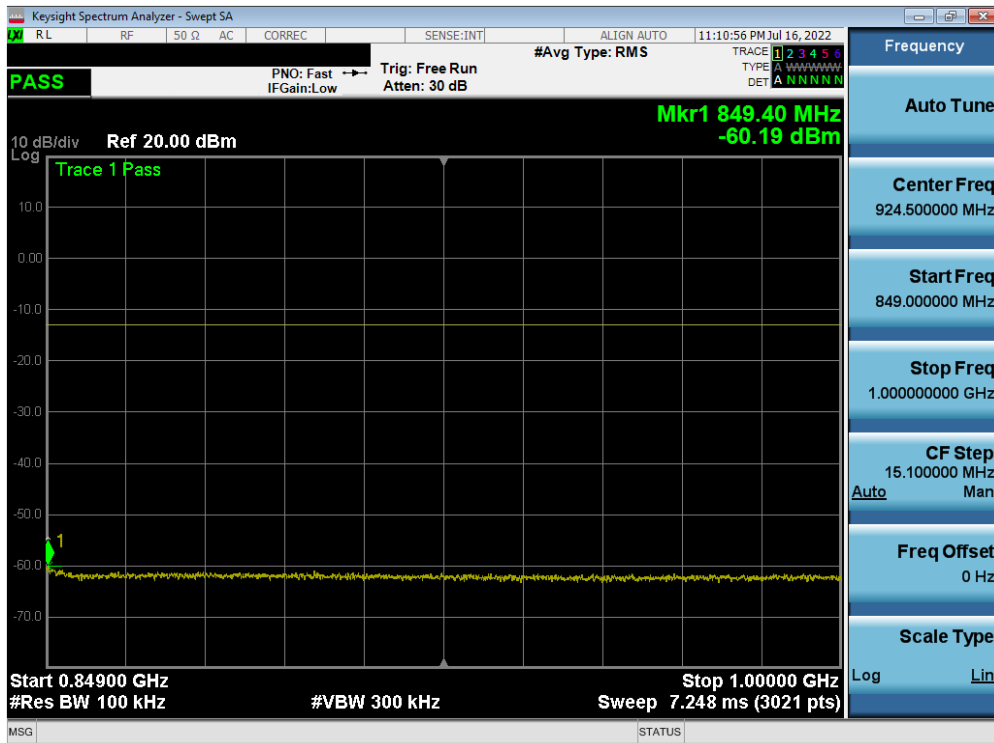


Plot 7-52. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/49 SCC 1/0 - Low Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 42 of 96

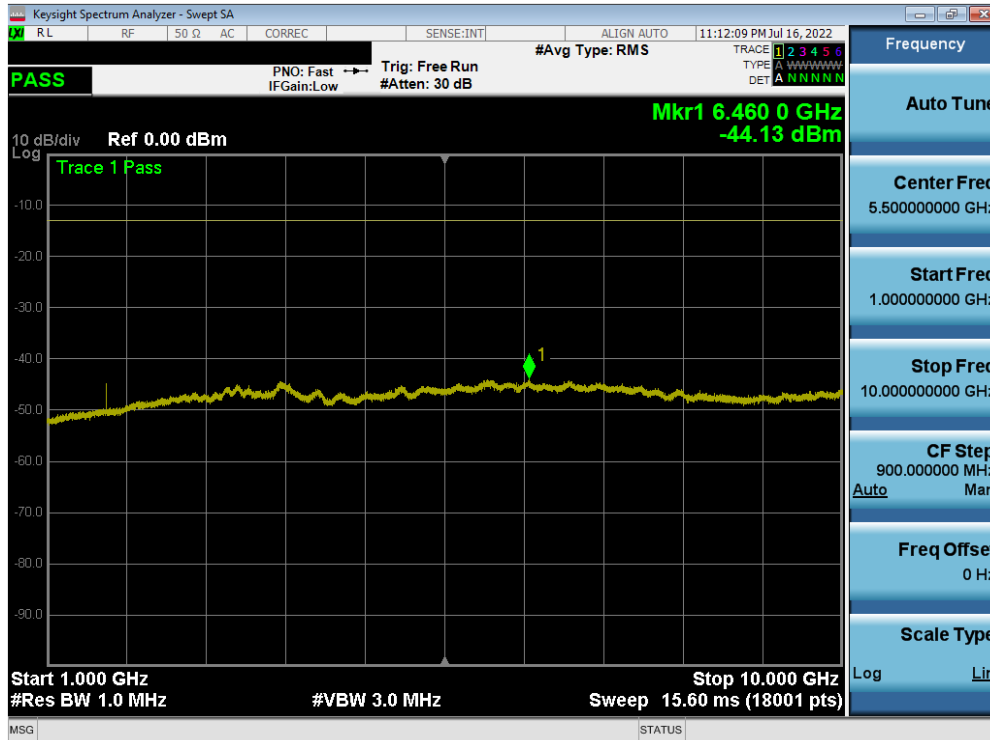


Plot 7-53. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/49 SCC 1/0 - Low Channel)

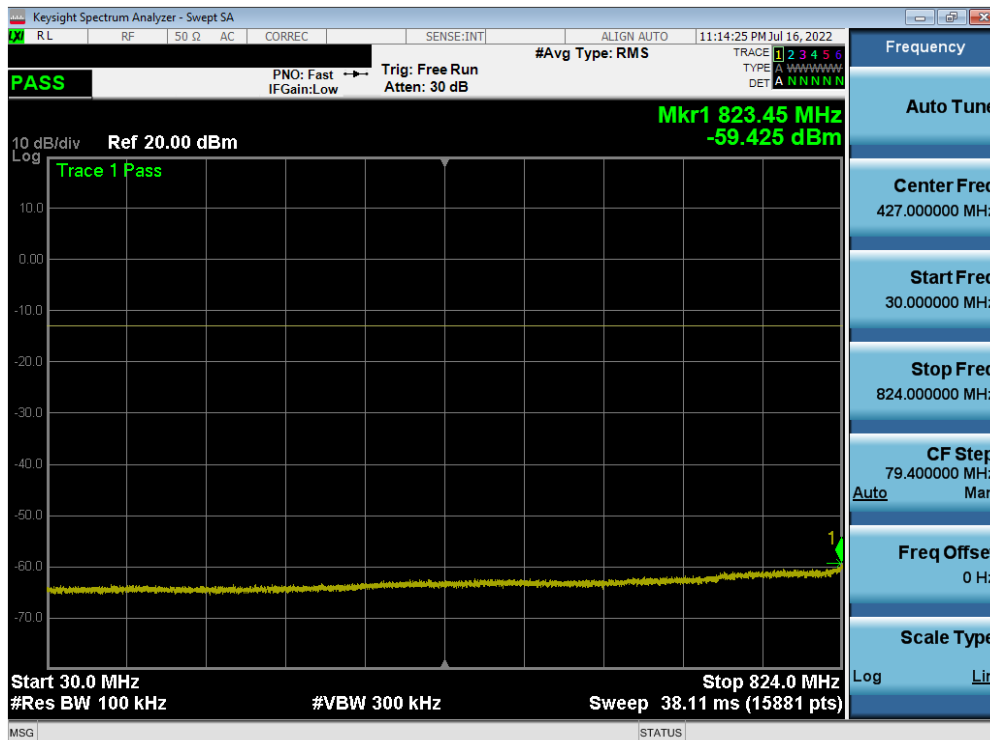


Plot 7-54. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/0 SCC 1/49 - High Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 43 of 96

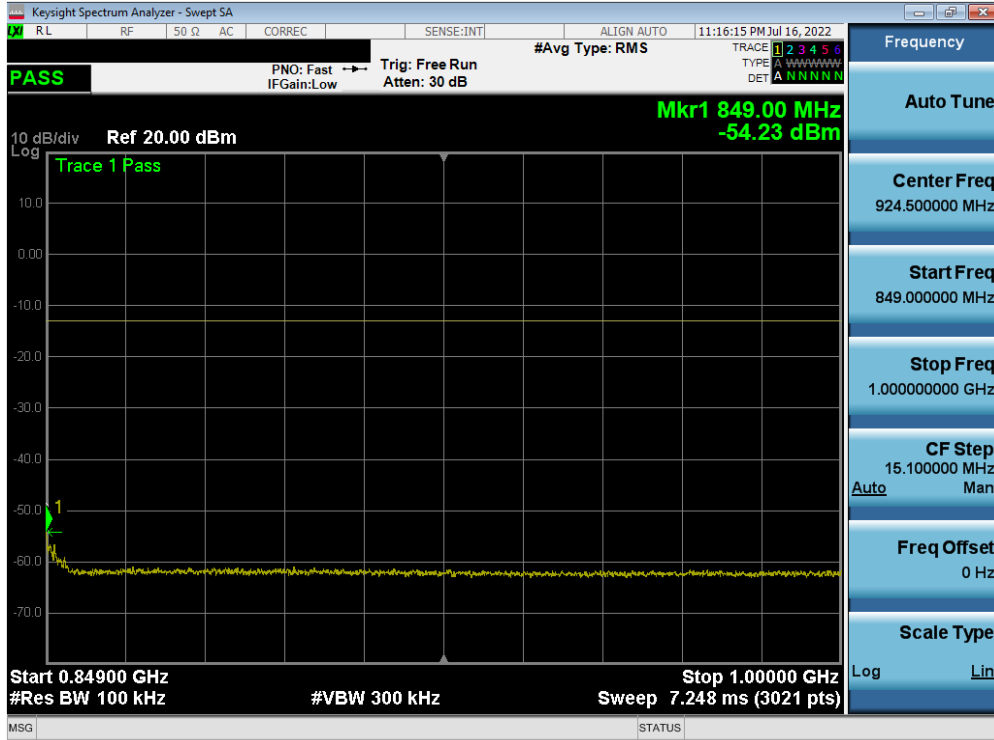


Plot 7-55. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/0 SCC 1/49 - High Channel)

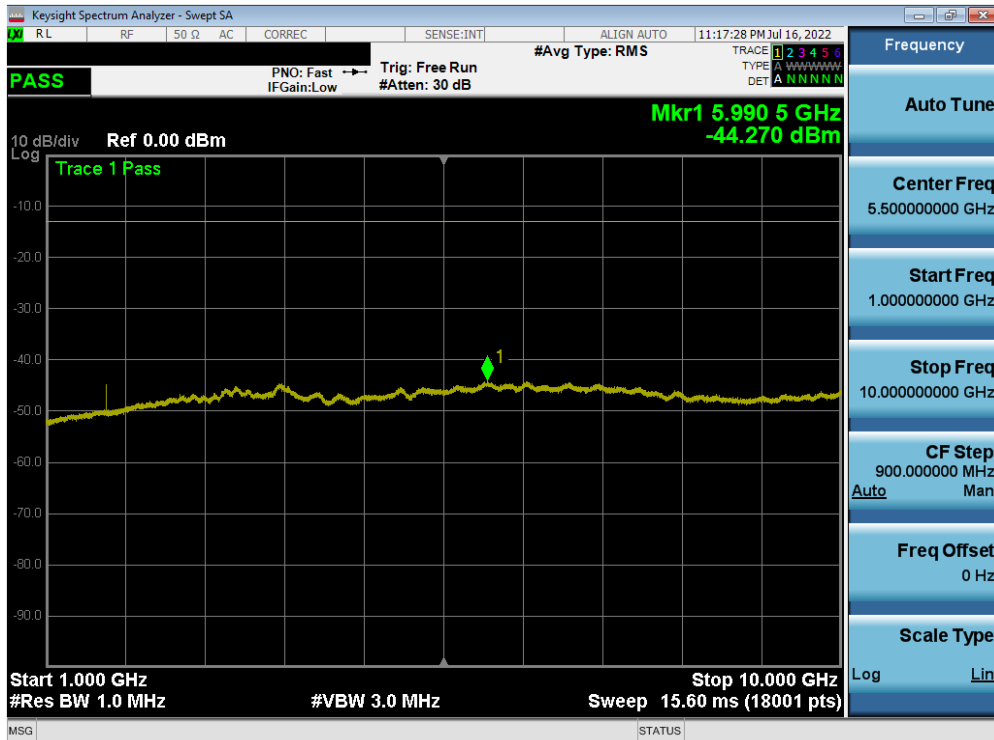


Plot 7-56. Conducted Spurious Plot (ULCA LTE Band 5 – (10 + 10)MHz QPSK – PCC 1/0 SCC 1/49 - High Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 44 of 96

NR Band n5

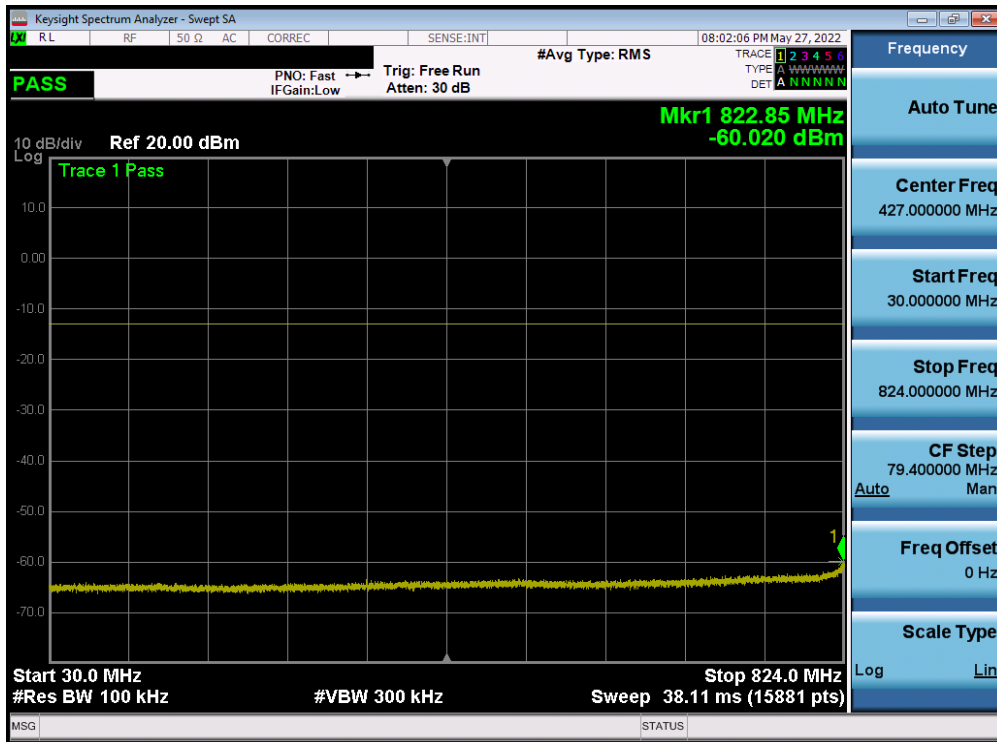

Plot 7-57. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

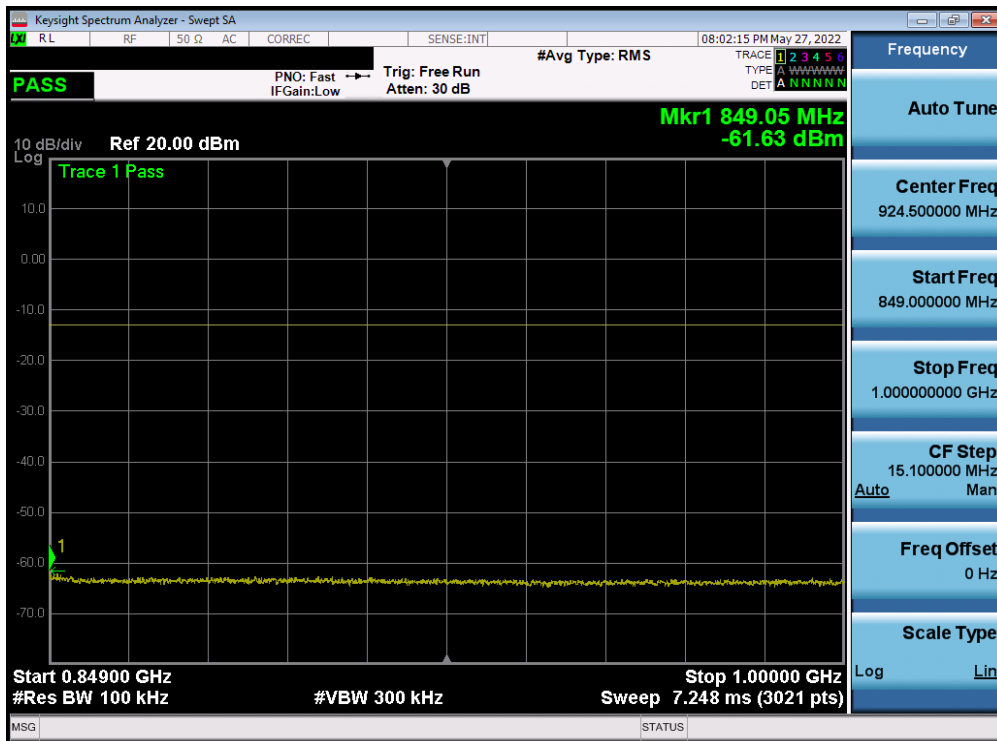


Plot 7-58. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 45 of 96




Plot 7-59. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Low Channel)

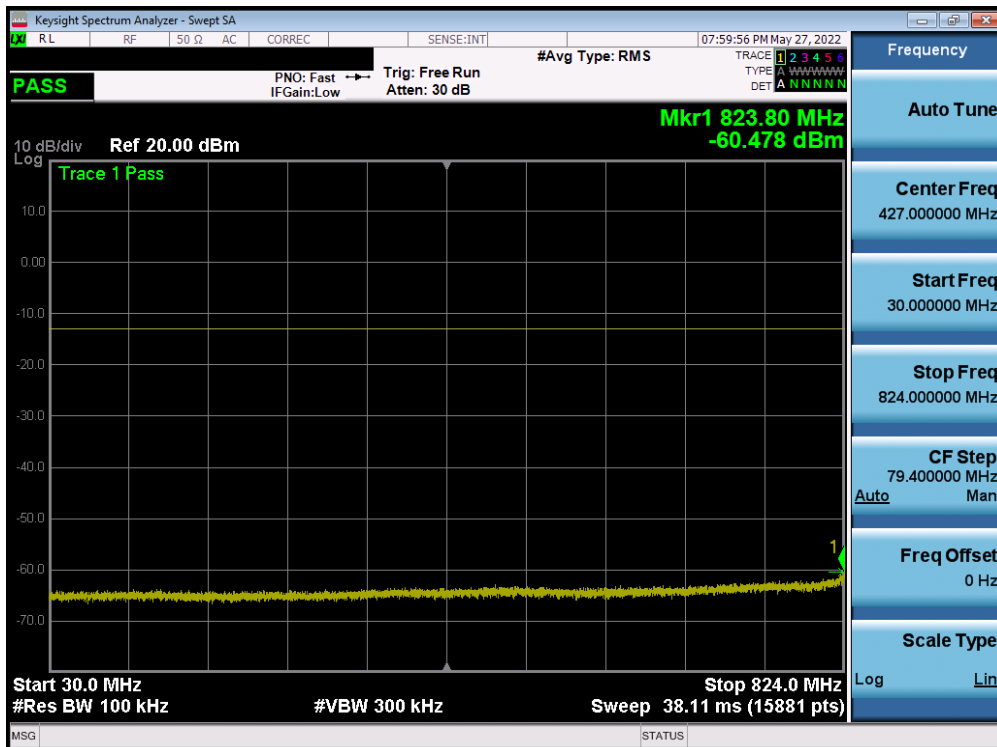


Plot 7-60. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 46 of 96

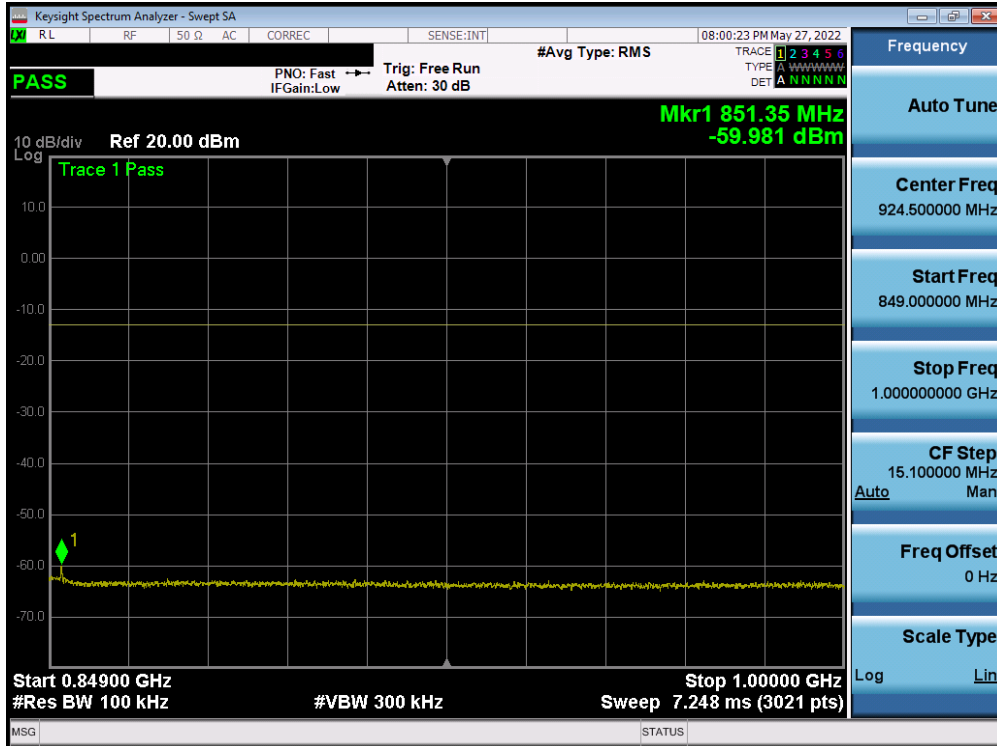


Plot 7-61. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

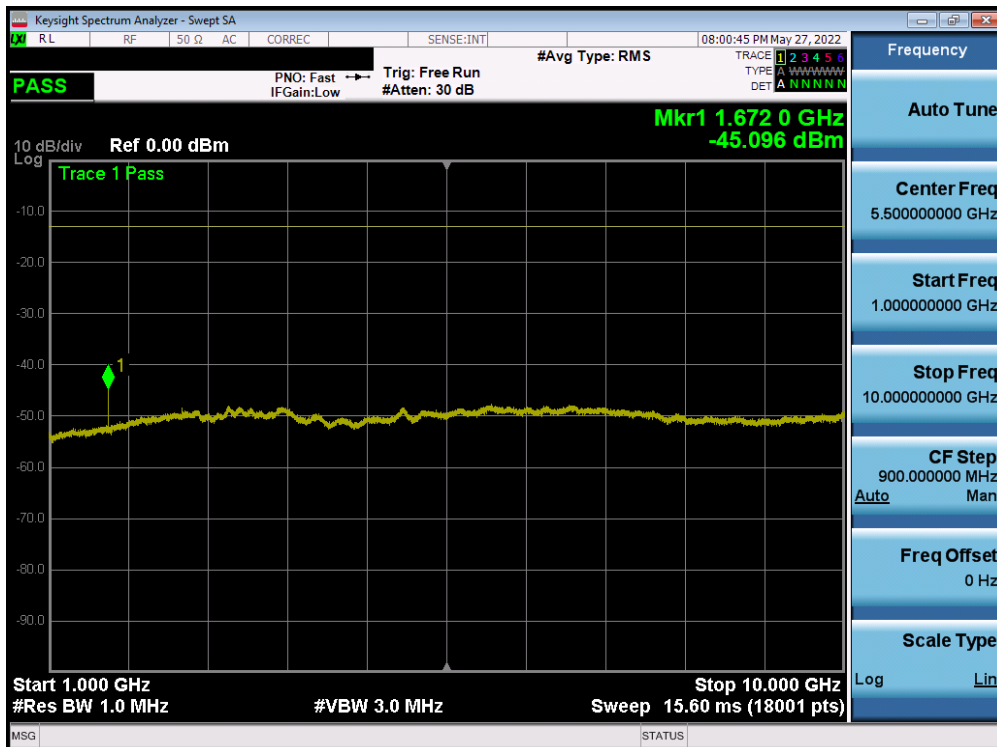


Plot 7-62. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 47 of 96

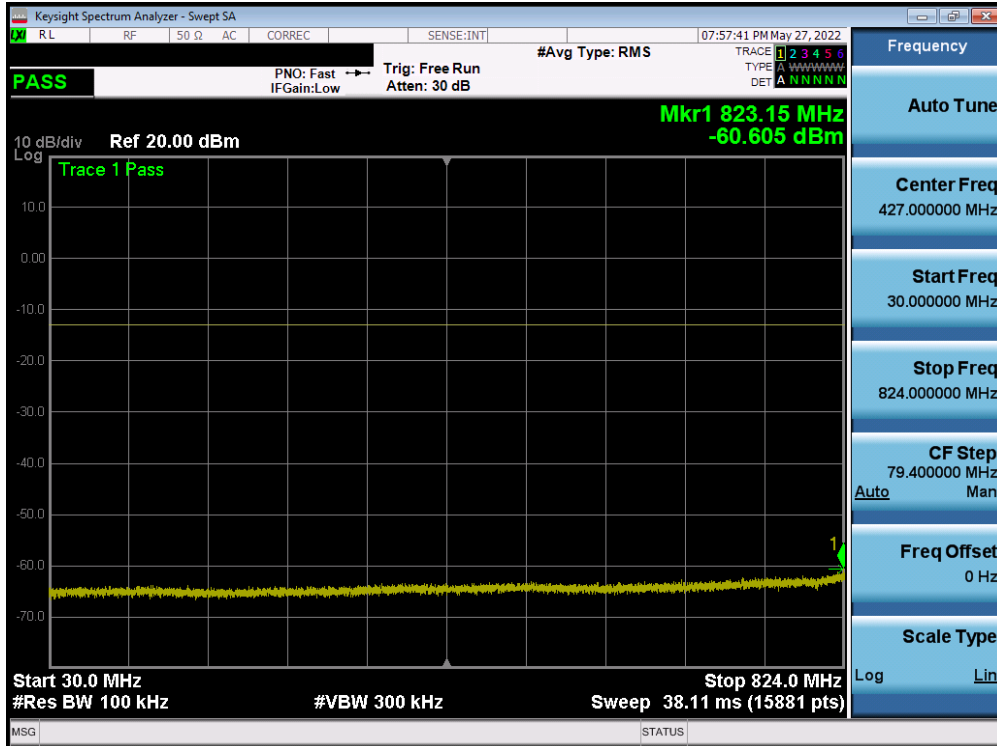


Plot 7-63. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

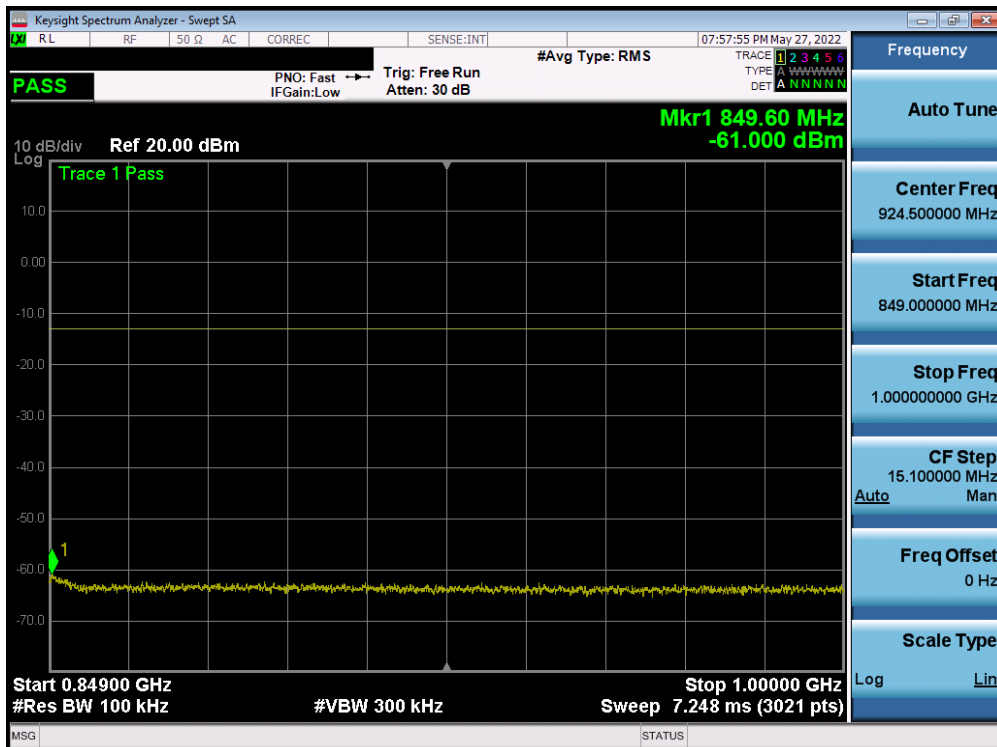


Plot 7-64. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 48 of 96

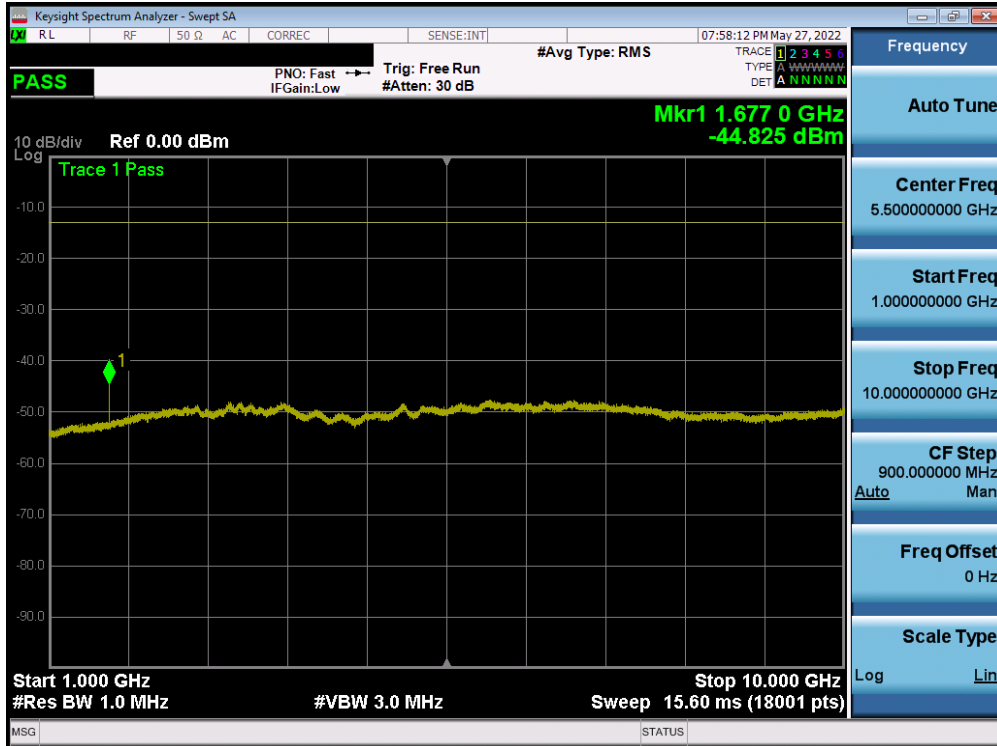


Plot 7-65. Conducted Spurious Plot (NR Band n5 - 20.0MHz DFT-s-OFDM QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 49 of 96

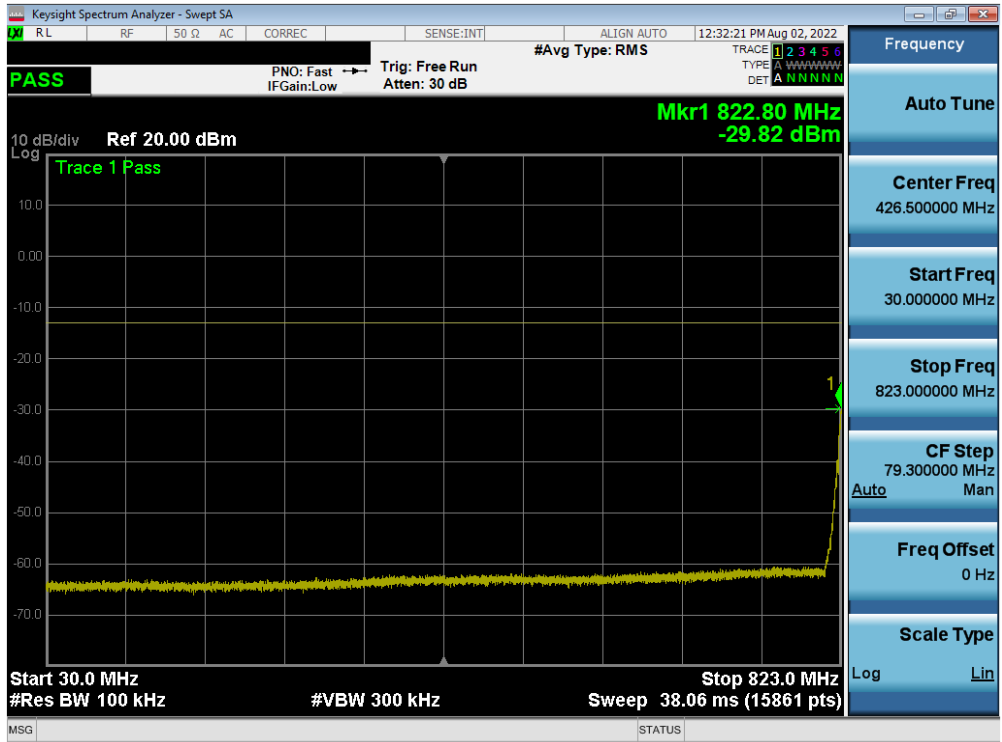


Plot 7-66. Conducted Spurious Plot (WCDMA Ch. 4132)

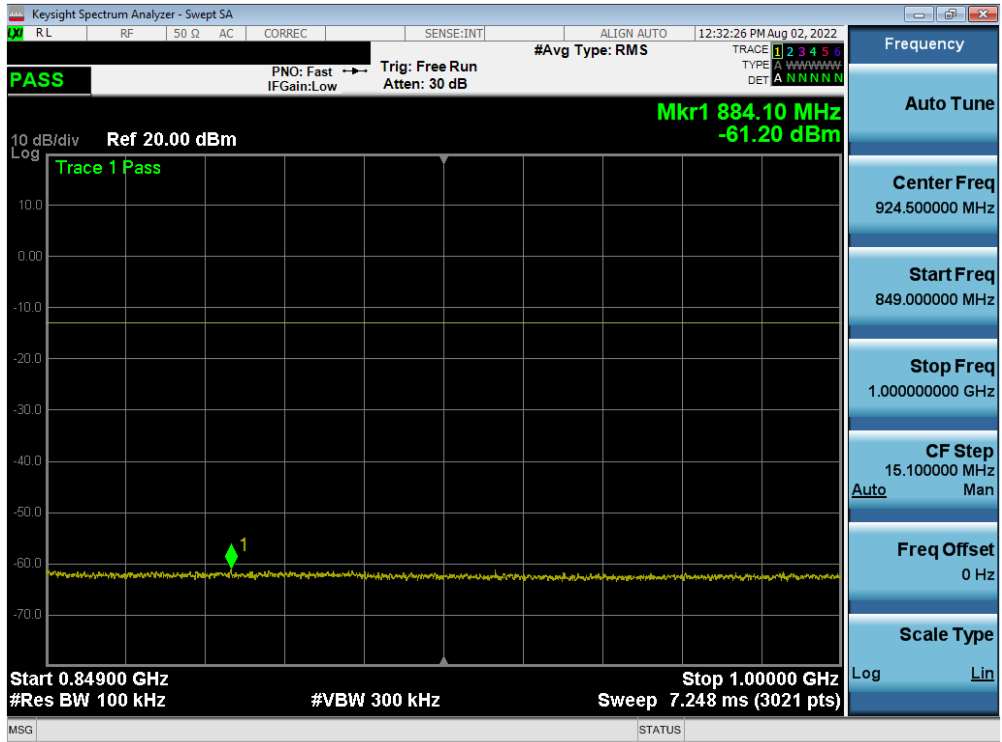


Plot 7-67. Conducted Spurious Plot (WCDMA Ch. 4132)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 50 of 96

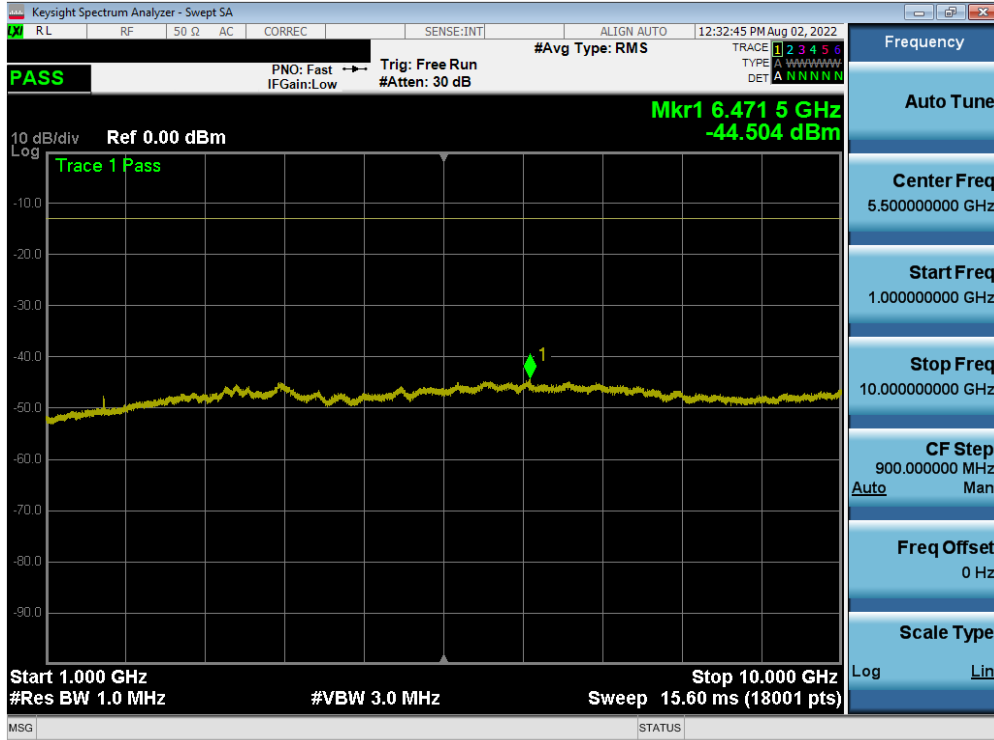


Plot 7-68. Conducted Spurious Plot (WCDMA Ch. 4132)

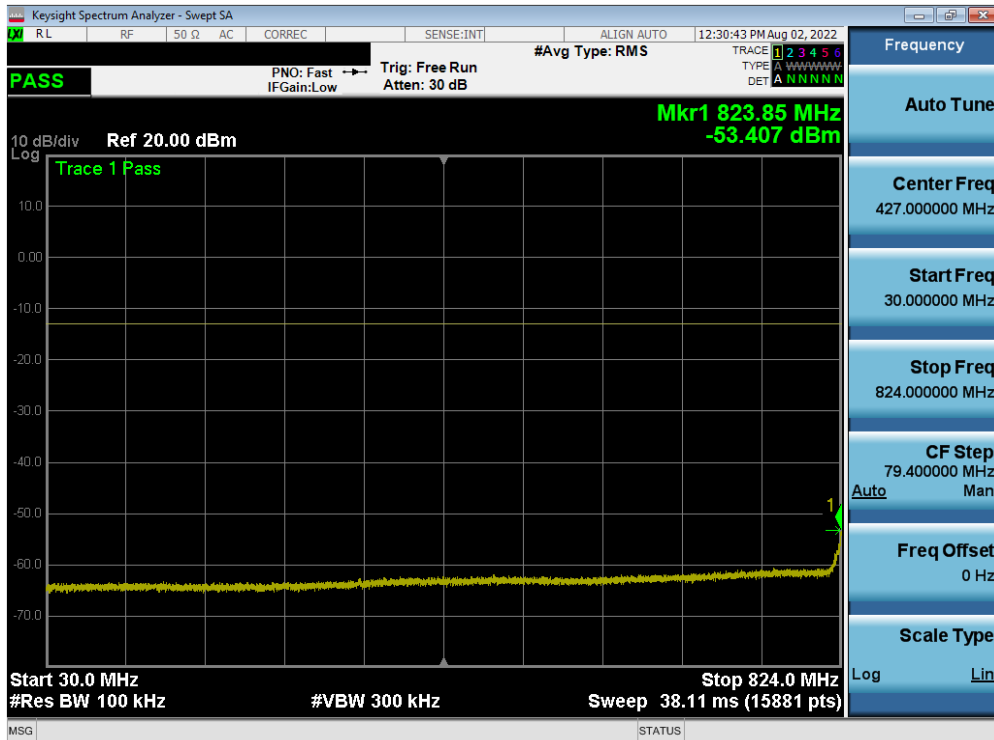


Plot 7-69. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 51 of 96

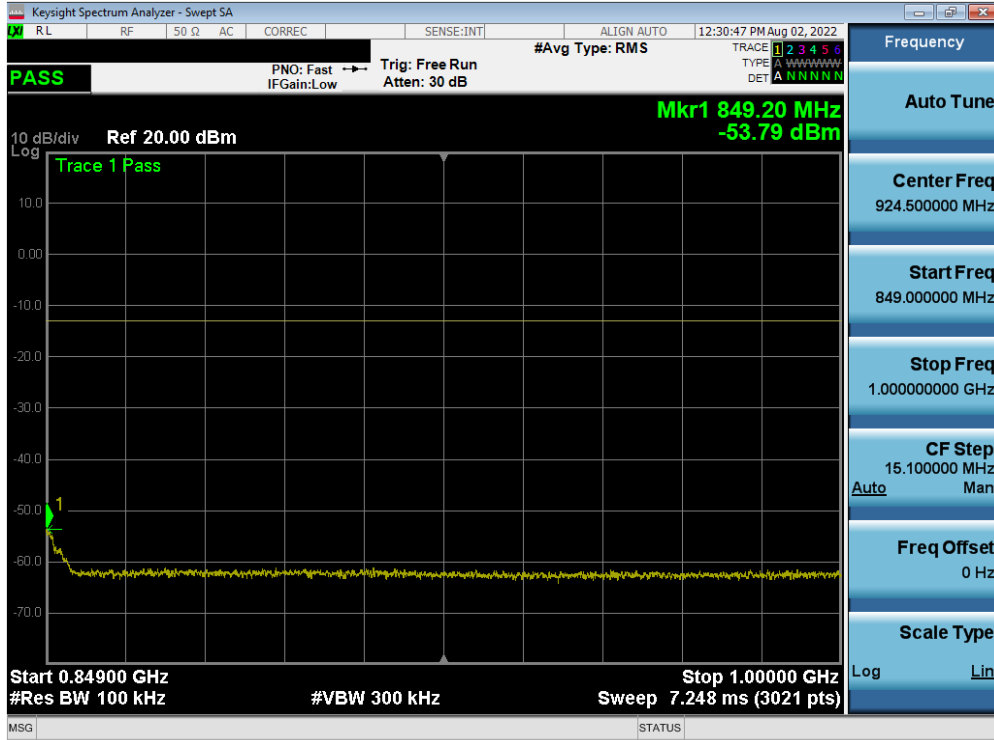


Plot 7-70. Conducted Spurious Plot (WCDMA Ch. 4183)

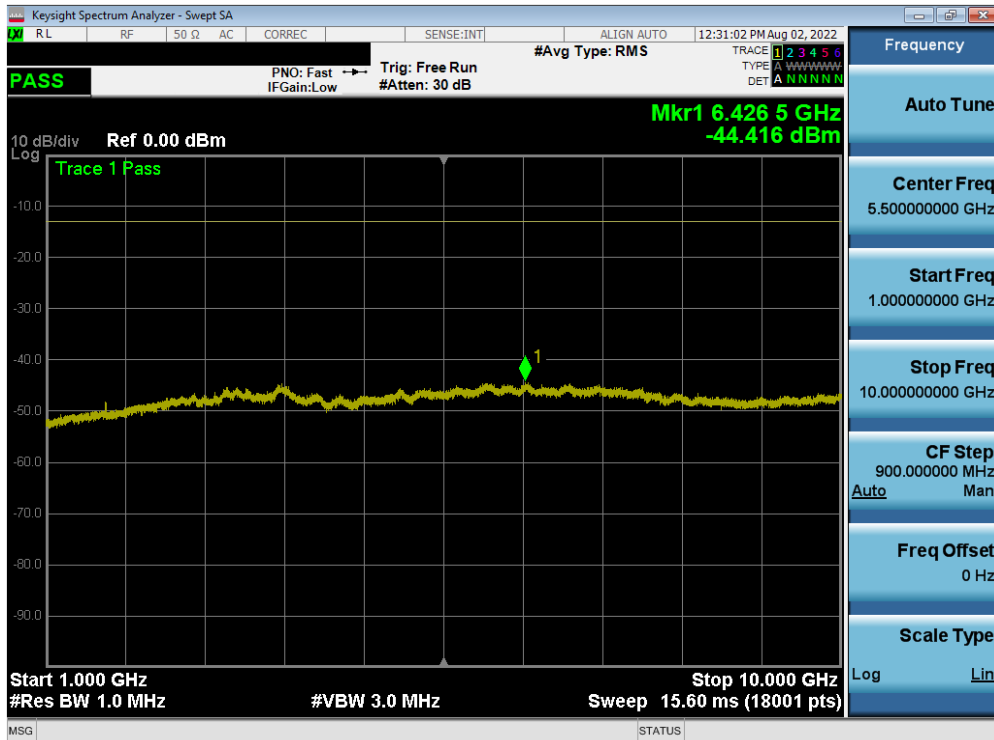


Plot 7-71. Conducted Spurious Plot (WCDMA Ch. 4183)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 52 of 96

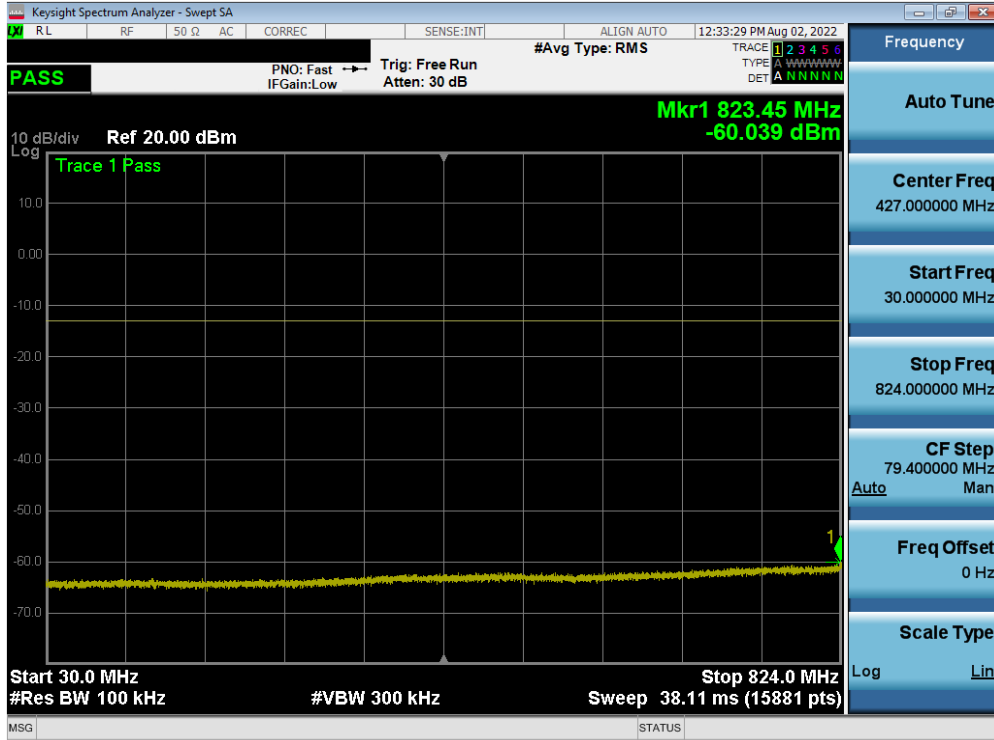


Plot 7-72. Conducted Spurious Plot (WCDMA Ch. 4233)

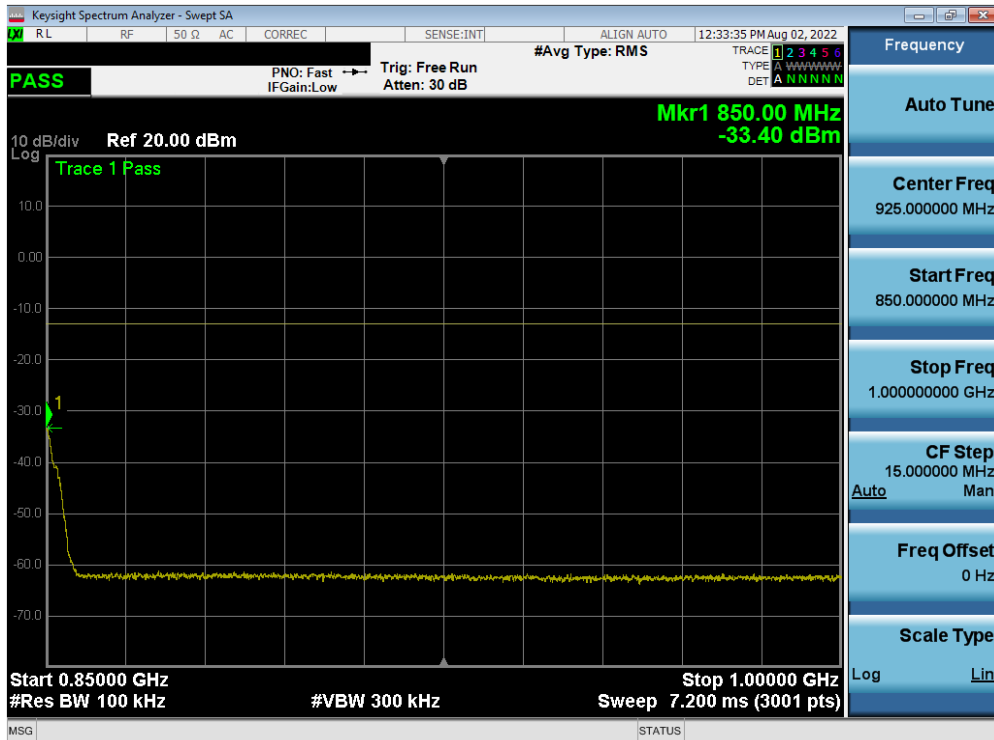

Plot 7-73. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 53 of 96

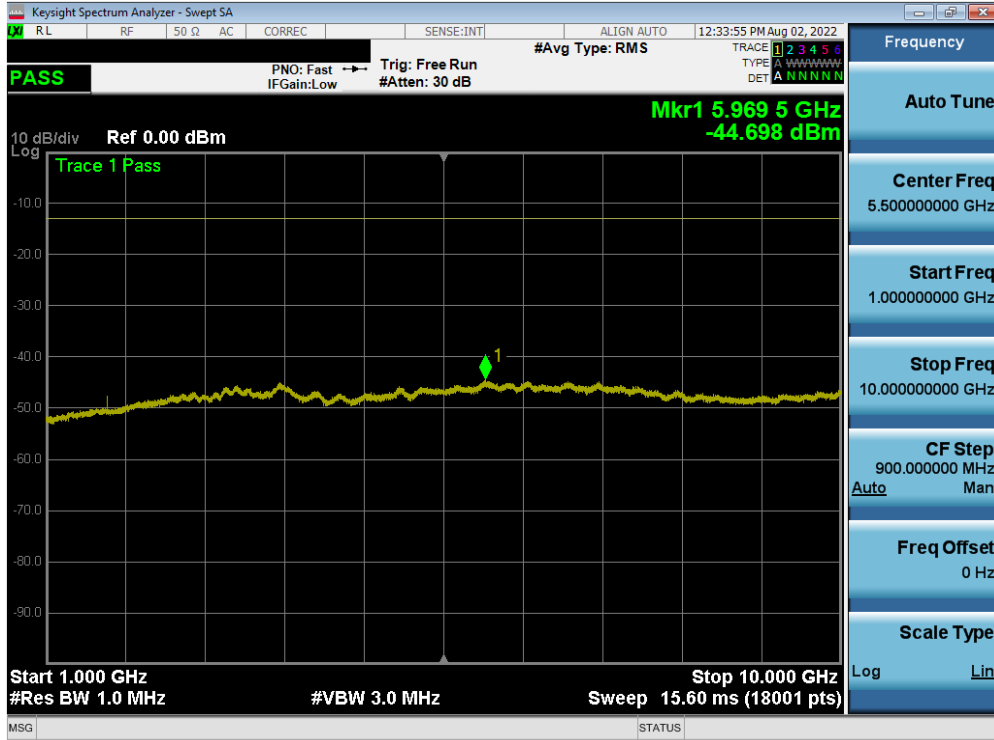

Plot 7-74. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 54 of 96

7.4 Band Edge Emissions at Antenna Terminal

§2.1051, 22.917(a)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data was reported.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

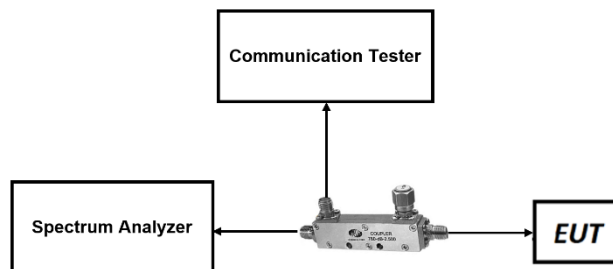




Figure 7-3. Test Instrument & Measurement Setup

FCC ID: BCGA2757	 PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 55 of 96


V2.1 11/9/2021

Test Notes


1. Per 22.917(b), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: BCGA2757		PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 56 of 96

LTE Band 26

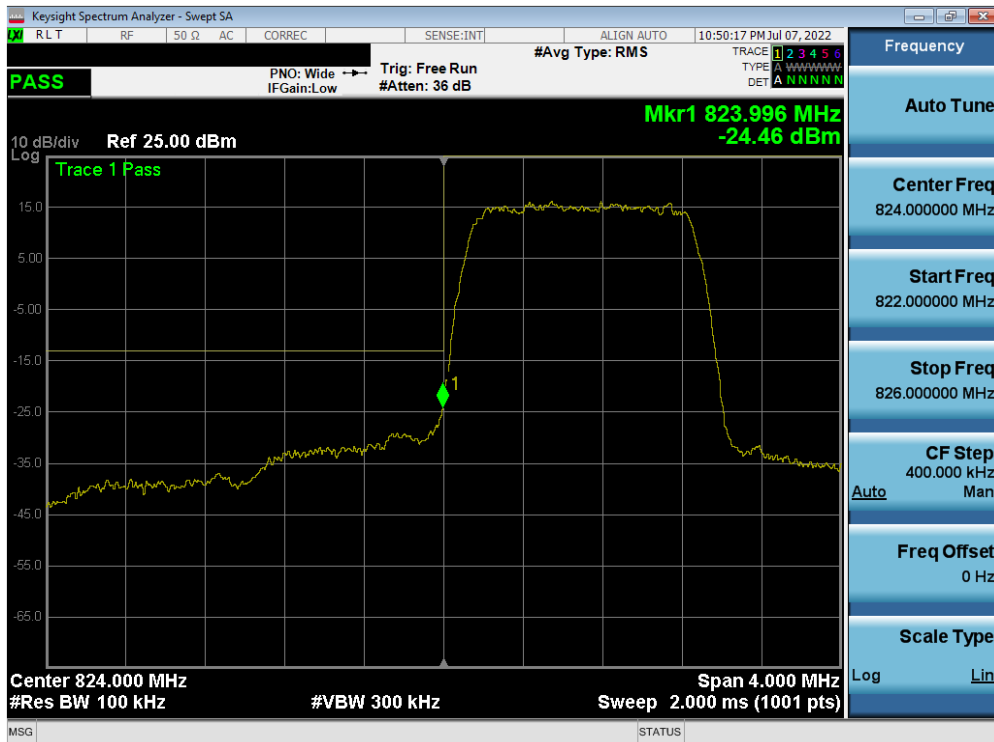


Plot 7-75. Lower BE Plot (LTE Band 26 – 1.4MHz QPSK – Full RB Configuration)

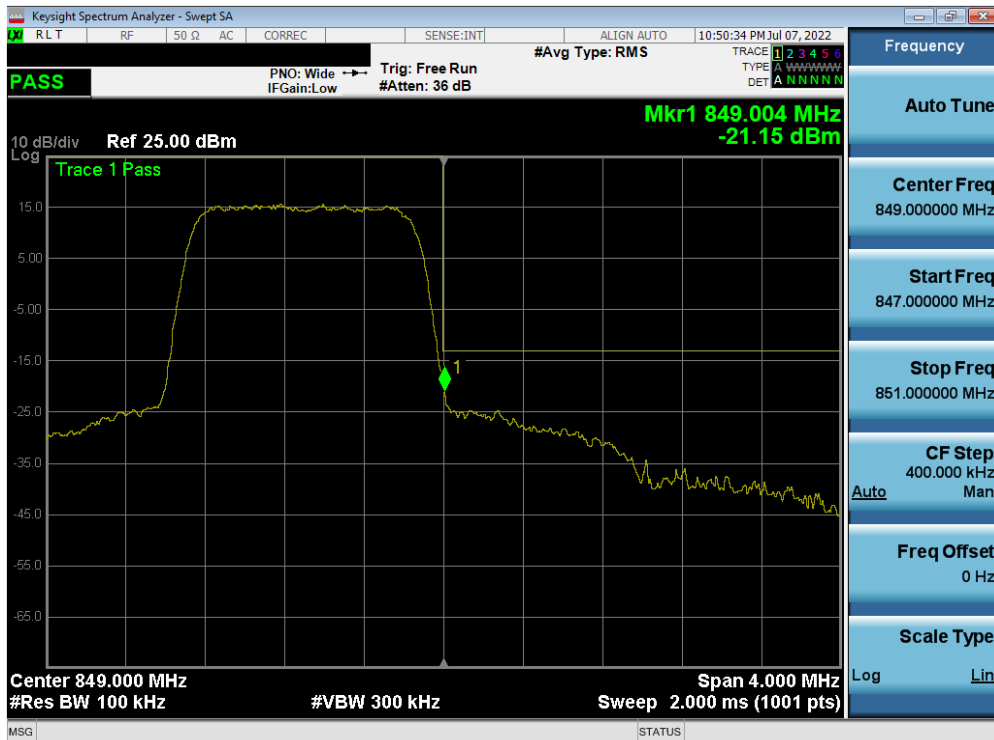

Plot 7-76. Upper BE Plot (LTE Band 26 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 57 of 96

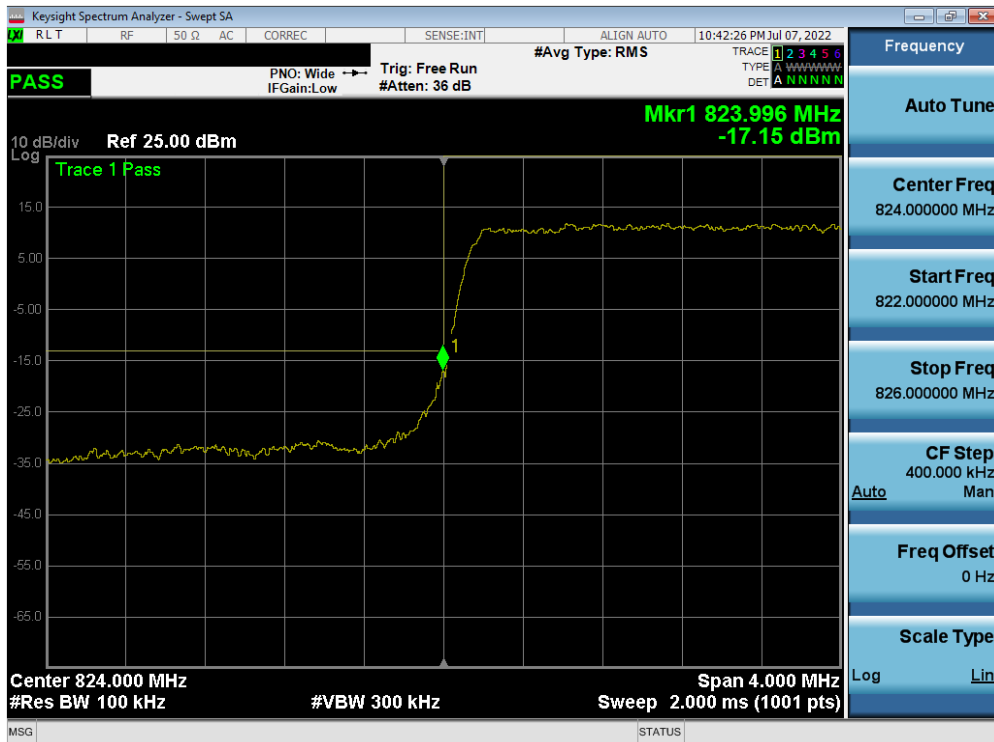


Plot 7-77. Lower BE Plot (LTE Band 26 - 3MHz QPSK – Full RB Configuration)




Plot 7-78. Upper BE Plot (LTE Band 26 - 3MHz QPSK – Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device
		Page 58 of 96

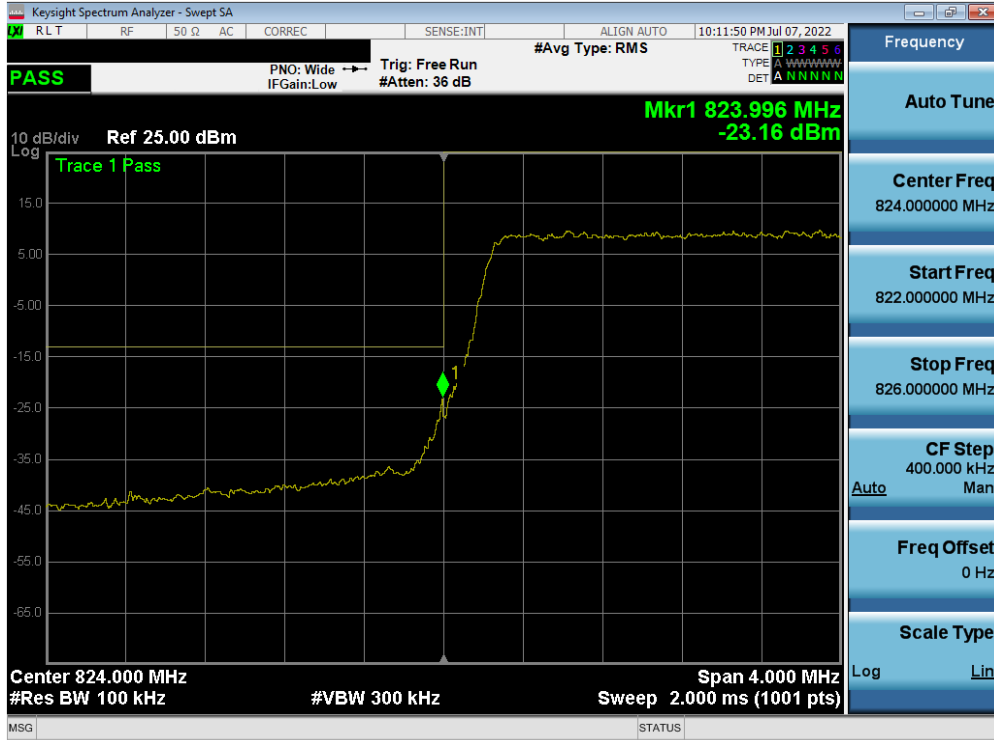

Plot 7-79. Lower BE Plot (LTE Band 26 - 5MHz QPSK – Full RB Configuration)

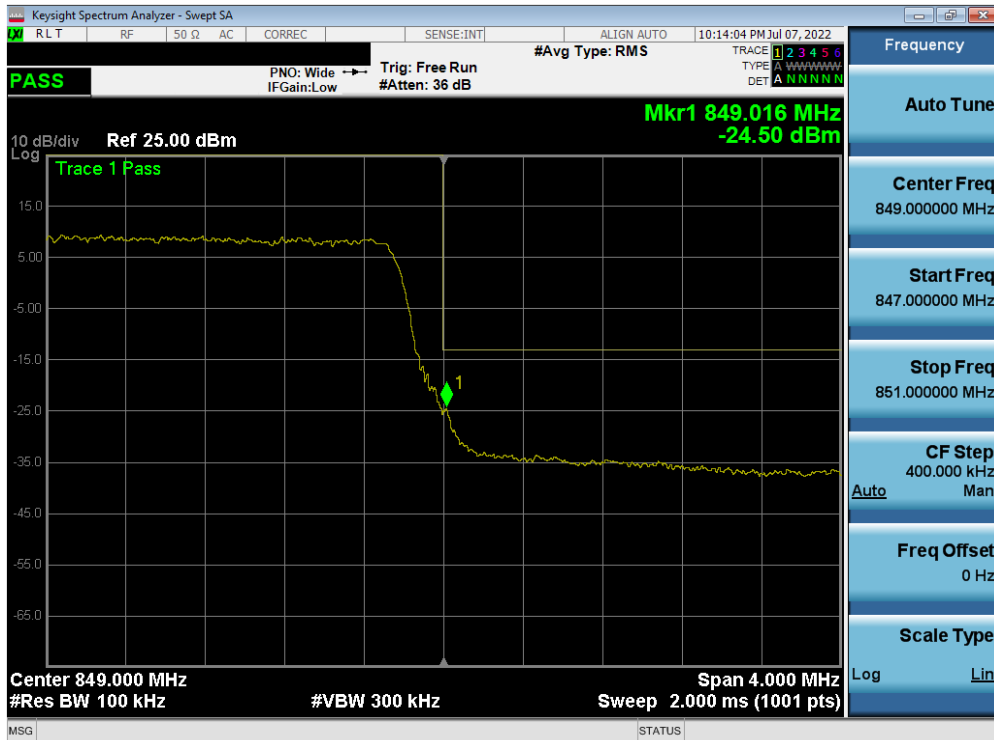

Plot 7-80. Upper BE Plot (LTE Band 26 - 5MHz QPSK – Full RB Configuration)

FCC ID: BCGA2757	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090023-01-R1.BCG	Test Dates: 05/30/2022 - 09/11/2022	EUT Type: Tablet Device	Page 59 of 96