



Element Materials Technology (formerly PCTEST)

18855 Adams Ct, Morgan Hill, CA 95037 USA
Tel. 408.538.5600
<http://www.element.com>



SAR EVALUATION REPORT

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014 USA

Date of Testing:

08/22/2022

Test Report Issue Date:

06/05/2023

Test Site/Location:

Element Morgan Hill, CA, USA

Document Serial No.:

1C2305090019-02.BCG (Rev1)

FCC ID:

BCGA2764

APPLICANT:

APPLE, INC.

DUT Type:

Tablet Device

Application Type:

Class II Permissive Change

FCC Rule Part(s):

CFR §2.1093

Permissive Change(s):

See FCC Change Document

Model(s):

A2764

Date of Original Certification:

10/18/2022

Equipment Class	Band & Mode	Tx Frequency	SAR
			1g Body (W/kg)
CBE	NR Band n48	3555.00 - 3694.98 MHz	0.99
Simultaneous SAR per KDB 690783 D01v01r03:			1.58

Note: This revised Test Report supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

Only operations relevant to this permissive change were evaluated for compliance. Please see the original compliance evaluation in RF Exposure Technical Report S/N 1C2205090028-26.BCG (Rev2) for complete evaluation of all other operating modes. The operational description includes a description of all changed items.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez

Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 1 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	10
3	INTRODUCTION	12
4	DOSIMETRIC ASSESSMENT	13
5	TEST CONFIGURATION POSITIONS.....	14
6	RF EXPOSURE LIMITS	15
7	FCC MEASUREMENT PROCEDURES.....	16
8	RF CONDUCTED POWERS.....	17
9	SYSTEM VERIFICATION.....	20
10	SAR DATA SUMMARY	22
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	25
12	SAR MEASUREMENT VARIABILITY	30
13	EQUIPMENT LIST.....	31
14	MEASUREMENT UNCERTAINTIES.....	32
15	CONCLUSION.....	33
16	REFERENCES	34
APPENDIX A:	SAR TEST PLOTS	
APPENDIX B:	SAR DIPOLE VERIFICATION PLOTS	
APPENDIX C:	SAR TISSUE SPECIFICATIONS	
APPENDIX D:	SAR SYSTEM VALIDATION	
APPENDIX E:	DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS	
APPENDIX F:	POWER REDUCTION VERIFICATION	
APPENDIX G:	NR LOWER BANDWIDTH RF CONDUCTED POWERS	
APPENDIX H:	PROBE AND DIPOLE CALIBRATION CERTIFICATES	

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 2 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Data	826.40 - 846.60 MHz
UMTS 1750	Data	1712.4 - 1752.6 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 14	Voice/Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 30	Voice/Data	2307.5 - 2312.5 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
LTE Band 48	Voice/Data	3552.5 - 3697.5 MHz
NR Band n71	Data	665.5 - 695.5 MHz
NR Band n12	Data	701.5 - 713.5 MHz
NR Band n14	Data	790.5 - 795.5 MHz
NR Band n26 (Cell)	Data	816.5 - 846.5 MHz
NR Band n5 (Cell)	Data	826.5 - 846.5 MHz
NR Band n70	Data	1697.5 - 1707.5 MHz
NR Band n66 (AWS)	Data	1712.5 - 1777.5 MHz
NR Band n25 (PCS)	Data	1852.5 - 1912.5 MHz
NR Band n2 (PCS)	Data	1852.5 - 1907.5 MHz
NR Band n30	Data	2307.5 - 2312.5 MHz
NR Band n7	Data	2502.5 - 2567.5 MHz
NR Band n41	Data	2506.02 - 2679.99 MHz
NR Band n48	Data	3555.00 - 3694.98 MHz
NR Band n77 DoD	Data	3455.01 - 3544.98 MHz
NR Band n77 C	Data	3705.00 - 3975.00 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
U-NII-5	Voice/Data	5955 - 6415 MHz
U-NII-6	Voice/Data	6435 - 6515 MHz
U-NII-7	Voice/Data	6535 - 6875 MHz
U-NII-8	Voice/Data	6895 - 7115 MHz
Bluetooth	Data	2402 - 2480 MHz
NB UNII-1	Data	5162 - 5245 MHz
NB UNII-3	Data	5733 - 5844 MHz
NR Band n258	Data	24250 - 24450 MHz 24750 - 25250 MHz
NR Band n260	Data	37000 - 40000 MHz
NR Band n261	Data	27500 - 28350 MHz

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 3 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.2 Time-Averaging Algorithm for RF Exposure Compliance

This device is enabled with the Qualcomm® Smart Transmit feature. This feature performs time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time. Refer to Compliance Summary document for detailed description of Qualcomm® Smart Transmit feature (report SN could be found in Section 1.10 – Bibliography).

Note that WLAN operations are not enabled with Smart Transmit.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR design_target, below the predefined time-averaged power limit (i.e., P_{limit} for sub-6 radio), for each characterized technology and band (see RF Exposure Part 0 Test Report, report SN could be found in Section 1.10 - Bibliography).

Only operations relevant to this permissive change were evaluated for compliance. No other target changes have been made. Targets for all other bands/exposure conditions can be found in the original filing.

Exposure Scenario:	Ant 1 Body	Ant 1 Maximum Tune-up Output Power*	Ant 2a/2b Body	Ant 2a/2b Maximum Tune-up Output Power*	Ant 3 Body	Ant 3 Maximum Tune-up Output Power*	Ant 4b Body	Ant 4b Maximum Tune-up Output Power*	Manufacturer's Smart Transmit Uncertainty (dB)	P _{limit} target and UHB P _{max} target Tolerance (dB)
Averaging Volume:	1g		1g		1g		1g			
Spacing:	0 mm		0 mm		0 mm		0 mm			
DSI:	1		1		1		1			
Technology/Band	P _{limit} corresponding to 0.8 W/kg	P _{max}	P _{limit} corresponding to 0.8 W/kg	P _{max}	P _{limit} corresponding to 0.8 W/kg	P _{max}	P _{limit} corresponding to 0.8 W/kg	P _{max}		
NR Band n48	11.20	19.60	11.40	20.00	11.80	18.70	10.90	21.00	+/- 1.0	+/- 1.0

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max} , when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit} . Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI). Note that the device uncertainty for sub-6GHz WWAN is +1.0/-1.0 dB for this EUT.

*Maximum tune up output power P_{max} is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power +0.7/-1.0 dB tolerance and +1.0/-1.0 dB tolerance for UHB.

*Note all P_{limit} EFS and maximum tune up output power P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., LTE TDD).

The maximum time-averaged output power (dBm) for any 5G WWAN technology, band, and DSI = minimum of "P_{limit} EFS" and "Maximum tune up output power P_{max} " +1.0/-1.0 dB device uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D01v06.

The purpose of this report (Part 1 test) is to demonstrate that the EUT meets FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

Measurement Condition: All conducted power and SAR measurements in this report (Part 1 test) were performed by setting Reserve_power_margin (Smart Transmit EFS entry) to 0 dB

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 4 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.3 Power Reduction for SAR

This device additionally utilizes a power reduction mechanism for Bluetooth and WLAN operations. When WLAN/Bluetooth is operating simultaneously with certain combinations of 5G and 5 GHz WLAN antennas, the output power of is permanently reduced. SAR evaluations were additionally performed at the maximum allowed output power for these scenarios to evaluate simultaneous transmission compliance.

Additionally, this device uses an independent mechanism that limits WIFI powers to a time-averaged output power. For the purposes of this test report, all SAR measurements were performed with the algorithm disabled at the maximum time-averaged output power level. See the original filing for all other operations that were not evaluated in this permissive change.

1.4 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.4.1 5G Output Power for Portable Use Conditions

Only operations relevant to this permissive change were evaluated for compliance. No other target changes have been made. Targets for all other bands/exposure conditions can be found in the original filing.

**Table 1-1
NR Bands**

Mode / Band		Modulated Average Output Power (in dBm)				
		Ant 1	Ant 2a	Ant 2b	Ant 3	Ant 4b
NR TDD Band n48 [Burst-Averaged]	Max allowed power	12.20	12.40		12.80	11.90
	Nominal	11.20	11.40		11.80	10.90

For NR TDD, the above powers listed are TDD burst average and framed average values.

1.4.2 Maximum WLAN Time-Averaged Output Power

Only operations relevant to this permissive change were evaluated for compliance. No other target changes have been made. Targets for all other bands/exposure conditions can be found in the original filing.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 5 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.5 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in Appendix E. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

See the original filing for all other operations that were not evaluated in this permissive change.

Table 1-2
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
NR Band n48 Antenna 1	Yes	No	No	Yes	No	Yes
NR Band n48 Antenna 2a	Yes	No	No	Yes	Yes	No
NR Band n48 Antenna 3	Yes	No	Yes	No	Yes	No
NR Band n48 Antenna 4b	Yes	No	Yes	No	No	No

Note: Per FCC KDB Publication 616217 D04v01r01, particular edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D01V06. Additional edges may have been evaluated for simultaneous transmission analysis.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 6 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-3
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	Cellular Band + 2.4 GHz WIFI	Yes
2	Cellular Band + 5/6 GHz WIFI	Yes
3	Cellular Band + 2.4 GHz Bluetooth	Yes
4	Cellular Band+ 2.4 GHz WIFI MIMO	Yes
5	Cellular Band+ 5/6 GHz WIFI MIMO	Yes
6	Cellular Band + 2.4 GHz Bluetooth + 5/6 GHz WIFI	Yes
7	Cellular Band + 2.4 GHz Bluetooth + 5/6 GHz WIFI MIMO	Yes
8	2.4 GHz Bluetooth + 5/6 GHz WIFI	Yes
9	2.4 GHz Bluetooth + 5/6 GHz WIFI MIMO	Yes
10	Cellular Band + 2.4 GHz Bluetooth(TXBF) + 5/6 GHz WIFI	Yes
11	Cellular Band + 2.4 GHz Bluetooth(TXBF) + 5/6 GHz WIFI MIMO	Yes
12	2.4 GHz Bluetooth(TXBF) + 5/6 GHz WIFI	Yes
13	2.4 GHz Bluetooth (TXBF) + 5/6 GHZ WIFI MIMO	Yes
14	Cellular Band + NB UNII	Yes
15	Cellular + NB UNII + 2.4 GHz WIFI	Yes
16	Cellular + NB UNII + 2.4 GHz WIFI MIMO	Yes
17	NB UNII + 2.4 GHz WIFI	Yes
18	NB UNII + 2.4 GHz WIFI MIMO	Yes
19	Cellular Band + NB UNII(TXBF) + 2.4 GHz WIFI	Yes
20	Cellular Band + NB UNII(TXBF) + 2.4 GHz WIFI MIMO	Yes
21	Cellular Band + NB UNII(TXBF)	Yes
22	Cellular Band + 2.4 GHz Bluetooth(TXBF)	Yes
23	Cellular Band + 2.4 GHz WLAN + 2.4 GHz Bluetooth	Yes
24	2.4 GHz WLAN + 2.4 GHz Bluetooth	Yes
25	NB UNII(TXBF) + 2.4 GHz WIFI	Yes
26	NB UNII(TXBF) + 2.4 GHz WIFI MIMO	Yes

Table 1-4
Simultaneous Transmission Scenarios of Inter-Band ULCA

No.	Capable Transmit Configuration	Body	Notes
1	Cellular Ant 1 LB + Cellular Ant 3 MB/HB	Yes	LTE Bands transmitting from Ant 1 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 3 MB/HB: LTE B2/4/7/30/66
2	Cellular Ant 1 LB + Cellular Ant 2b MB/HB	Yes	LTE Bands transmitting from Ant 1 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 2b MB/HB: LTE B2/4/7/30/66
3	Cellular Ant 1 LB + Cellular Ant 4b MB/HB	Yes	LTE Bands transmitting from Ant 1 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 4b MB/HB: LTE B2/4/7/30/66
4	Cellular Ant 3 LB + Cellular Ant 1 MB/HB	Yes	LTE Bands transmitting from Ant 3 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 1 MB/HB: LTE B2/4/7/30/66
5	Cellular Ant 3 LB + Cellular Ant 2b MB/HB	Yes	LTE Bands transmitting from Ant 3 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 2b MB/HB: LTE B2/4/7/30/66
6	Cellular Ant 3 LB + Cellular Ant 4b MB/HB	Yes	LTE Bands transmitting from Ant 3 LB: LTE B5/12/13/14 LTE Bands transmitting from Ant 4b MB/HB: LTE B2/4/7/30/66

Note: The technical description includes all the possible Inter-band ULCA combinations.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 7 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 1-5
Simultaneous Transmission Scenarios with Inter-Band ULCA Active

No.	Capable Transmit Configuration	Body
1	LTE Inter-Band ULCA + 2.4 GHz WI-FI	Yes
2	LTE Inter-Band ULCA + 5/6 GHz WI-FI	Yes
3	LTE Inter-Band ULCA + 2.4 GHz Bluetooth	Yes
4	LTE Inter-Band ULCA + 2.4 GHz WI-FI MIMO	Yes
5	LTE Inter-Band ULCA + 5/6 GHz WI-FI MIMO	Yes
6	LTE Inter-Band ULCA + 2.4 GHz Bluetooth + 2.4 GHz WI-FI	Yes
7	LTE Inter-Band ULCA + 2.4 GHz Bluetooth + 5/6 GHz WI-FI	Yes
8	LTE Inter-Band ULCA + 2.4 GHz Bluetooth + 5/6 GHz WI-FI MIMO	Yes
9	LTE Inter-Band ULCA + 2.4 GHz Bluetooth(TXBF) + 5/6 GHz WI-FI	Yes
10	LTE Inter-Band ULCA + 2.4 GHz Bluetooth(TXBF) + 5/6 GHz WI-FI MIMO	Yes
11	LTE Inter-Band ULCA + NB UNII	Yes
12	LTE Inter-Band ULCA + UNII NB + 2.4 GHz WI-FI	Yes
13	LTE Inter-Band ULCA + UNII NB + 2.4 GHz WI-FI MIMO	Yes
14	LTE Inter-Band ULCA + UNII NB(TXBF) + 2.4 GHz WI-FI	Yes
15	LTE Inter-Band ULCA + UNII NB(TXBF) + 2.4 GHz WI-FI MIMO	Yes
16	LTE Inter-Band ULCA + UNII NB(TXBF)	Yes
17	LTE Inter-Band ULCA + 2.4 GHz Bluetooth(TXBF)	Yes

Note: LTE inter-band ULCA can operate in any of the combinations in Table 1-9

1. There are no limitations in the above listed simultaneous transmission scenarios between cellular antennas and BT/WI-FI antennas.
2. 2.4 GHz WLAN, and 2.4 GHz Bluetooth can transmit simultaneously on separate antennas. 2.4 GHz WLAN Antenna 4a can only transmit simultaneously with 2.4 GHz Bluetooth Ant 2a. In this scenario, Wi-Fi max power will not exceed minimum of (13.5 dBm, SAR max cap, Reg max cap) power. Additionally, in disconnected mode, BT will be using iPA only
3. This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac/ax. 802.11a/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
4. EN-DC operation is supported with LTE + 5G NR FR1 scenarios. The LTE anchor bands are shown in the NR FR1 checklist.
5. This device supports VoWIFI.
6. This device supports VoLTE.
7. 5G NR FR2 n258, n260, and n261 cannot transmit simultaneously
8. LTE + 5G NR FR2 Scenarios are limited to EN-DC combinations with anchor bands as shown in the NR FR2 checklist

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 8 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

There were no changes made to the WIFI and BT operations within this device. Please see original filing for complete evaluation of these operating modes.

(B) Licensed Transmitter(s)

Only operations relevant to this permissive change were evaluated for compliance. Please see original filing for complete evaluation for all other operating modes. The operational description includes a description of all changed items.

NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.

This device supports LTE/NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE/NR Band falls completely within an LTE/NR band with a larger transmission frequency range, both LTE/NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE/NR bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.8 Guidance Applied

- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01r02 (Tablet)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

1.10 Bibliography

Report Type	Report Serial Number
RF Exposure Part 0 Test Report	1C2305090019-03.BCG
RF Exposure Part 1 Test Report (Original)	Original Filing

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 9 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

2 LTE INFORMATION

LTE Information					
Form Factor	Tablet Device				
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)				
	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 14 (790.5 - 795.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 30 (2307.5 - 2312.5 MHz)				
	LTE Band 7 (2502.5 - 2567.5 MHz)				
	LTE Band 41 (2498.5 - 2567.5 MHz)				
	LTE Band 48 (3552.5 - 3697.5 MHz)				
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 14: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 30: 5 MHz, 10 MHz				
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 48: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)	695.5 (133447)	
LTE Band 71: 10 MHz	668 (133172)		683 (133272)	698 (133422)	
LTE Band 71: 15 MHz	670.5 (133197)		685.5 (133297)	699.5 (133397)	
LTE Band 71: 20 MHz	673 (133222)		688 (133272)	698 (133372)	
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)	715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)	714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)	713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)	711 (23130)	
LTE Band 17: 5 MHz	706.5 (23755)		710 (23790)	713.5 (23825)	
LTE Band 17: 10 MHz	709 (23780)		710 (23790)	711 (23800)	
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)	784.5 (23255)	
LTE Band 13: 10 MHz	N/A		782 (23230)	N/A	
LTE Band 14: 5 MHz	790.5 (23305)		793 (23330)	795.5 (23355)	
LTE Band 14: 10 MHz	N/A		793 (23330)	N/A	
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)	848.3 (27033)	
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)	847.5 (27025)	
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)	846.5 (27015)	
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)	844 (26990)	
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)	848.3 (20643)	
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)	847.5 (20635)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)	846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)	844 (20600)	
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)	1779.3 (132665)	
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)	1778.5 (132657)	
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)	1777.5 (132647)	
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)	1775 (132622)	
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)	1772.5 (132597)	
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)	1770 (132572)	
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)	1754.3 (20393)	
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)	1753.5 (20385)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)	1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)	1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)	1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)	1745 (20300)	
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)	1914.3 (26683)	
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)	1913.5 (26675)	
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)	1912.5 (26665)	
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)	1910 (26640)	
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)	1907.5 (26615)	
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)	1905 (26590)	
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)	1908.3 (19143)	
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)	1908.5 (19155)	
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)	1907.5 (19175)	
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)	1905 (19150)	
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)	1902.5 (19125)	
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)	1900 (19100)	
LTE Band 30: 5 MHz	2307.5 (27585)		2310 (27710)	2312.5 (27735)	
LTE Band 30: 10 MHz	N/A		2310 (27710)	N/A	
LTE Band 7: 5 MHz	2502.5 (20775)		2535 (21100)	2567.5 (21425)	
LTE Band 7: 10 MHz	2505 (20800)		2535 (21100)	2565 (21400)	
LTE Band 7: 15 MHz	2507.5 (20825)		2535 (21100)	2562.5 (21375)	
LTE Band 7: 20 MHz	2510 (20850)		2535 (21100)	2560 (21350)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 48: 5 MHz	3552.5 (55265)	3600.8 (55745)	N/A	3649.2 (56232)	3697.5 (56715)
LTE Band 48: 10 MHz	3555 (55290)	3601.7 (55757)	N/A	3648.3 (56223)	3695 (56690)
LTE Band 48: 15 MHz	3557.5 (55315)	3602.5 (55765)	N/A	3647.5 (56215)	3692.5 (56665)
LTE Band 48: 20 MHz	3560 (55340)	3603.3 (55773)	N/A	3646.7 (56207)	3690 (56640)
UE Category	DL UE Cat 20 (QPSK, 16QAM, 64QAM, 256 QAM), UL UE Cat 18 (QPSK, 16QAM, 64QAM, 256QAM)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM, 256QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 15. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 15 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WiFi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 10 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

NR Information																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
Form Factor	Table																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Frequency Range of each NR transmission band	NR Band n1 (655.5 - 695.5 MHz) NR Band n12 (701.5 - 713.5 MHz) NR Band n14 (705.5 - 706.5 MHz) NR Band n5 (Cell) (816.5 - 846.5 MHz) NR Band n5 (Cell) (826.5 - 846.5 MHz) NR Band n70 (1697.5-1707.5 MHz) NR Band n66 (AWS) (1712.5 - 1777.5 MHz) NR Band n25 (PCS) (1852.5 - 1912.5 MHz) NR Band n2 (PCS) (1852.5 - 1907.5 MHz) NR Band n30 (2307.5 - 2312.5 MHz) NR Band n7 (2320.5 - 2367.5 MHz) NR Band n41 (2508.02 - 2679.99 MHz) NR Band n48 (2653.00 - 3094.98 MHz) NR Band n77 DoD (2455.00 - 3543.98 MHz) NR Band n77 C (3769.0 - 3979.0 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Channel Bandwidths	NR Band n1: 5 MHz, 10 MHz, 15 MHz, 20 MHz NR Band n12: 5 MHz, 10 MHz, 15 MHz NR Band n14: 5 MHz, 10 MHz NR Band n5 (Cell): 5 MHz, 10 MHz, 15 MHz, 20 MHz NR Band n5 (Cell): 5 MHz, 10 MHz, 15 MHz, 20 MHz NR Band n70: 5 MHz, 10 MHz, 15 MHz NR Band n66 (AWS): 5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz NR Band n25 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz NR Band n2 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz NR Band n30: 5 MHz, 10 MHz, 15 MHz, 20 MHz, 25 MHz, 30 MHz, 40 MHz NR Band n41: 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz NR Band n48: 10 MHz, 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz NR Band n77 DoD: 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz NR Band n77 C: 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Channel Numbers and Frequencies (MHz)	<table><tr><th>Low</th><th>Low-Mid</th><th>Mid</th><th>Mid-High</th><th>High</th></tr><tr><td>NR Band n1: 5 MHz</td><td>665.5 (133100)</td><td>680.5 (136100)</td><td>695.5 (139100)</td><td></td></tr><tr><td>NR Band n1: 10 MHz</td><td>668 (133600)</td><td>683.5 (137100)</td><td>698.5 (139600)</td><td></td></tr><tr><td>NR Band n1: 15 MHz</td><td>670.5 (134100)</td><td>686.5 (138100)</td><td>699.5 (139100)</td><td></td></tr><tr><td>NR Band n1: 20 MHz</td><td>673 (134600)</td><td>689.5 (138600)</td><td>698 (137600)</td><td></td></tr><tr><td>NR Band n12: 5 MHz</td><td>701.5 (140300)</td><td>707.5 (141800)</td><td>713.5 (142700)</td><td></td></tr><tr><td>NR Band n12: 10 MHz</td><td>704 (140800)</td><td>709.5 (142300)</td><td>711 (142000)</td><td></td></tr><tr><td>NR Band n12: 15 MHz</td><td>706.5 (141300)</td><td>707.5 (141500)</td><td>708.5 (141700)</td><td></td></tr><tr><td>NR Band n14: 5 MHz</td><td>706.5 (141300)</td><td>709 (159800)</td><td>706.5 (159100)</td><td></td></tr><tr><td>NR Band n14: 10 MHz</td><td>N/A</td><td>703 (159800)</td><td>N/A</td><td></td></tr><tr><td>NR Band n5 (Cell): 5 MHz</td><td>816.5 (163300)</td><td>831.5 (166300)</td><td>846.5 (169300)</td><td></td></tr><tr><td>NR Band n5 (Cell): 10 MHz</td><td>819 (163800)</td><td>831.5 (166300)</td><td>844 (169800)</td><td></td></tr><tr><td>NR Band n5 (Cell): 15 MHz</td><td>826.5 (166300)</td><td>836.5 (167300)</td><td>846.5 (169300)</td><td></td></tr><tr><td>NR Band n5 (Cell): 20 MHz</td><td>829 (166800)</td><td>836.5 (167300)</td><td>844 (165800)</td><td></td></tr><tr><td>NR Band n5 (Cell): 30 MHz</td><td>831.5 (166300)</td><td>836.5 (167300)</td><td>841.5 (166300)</td><td></td></tr><tr><td>NR Band n5 (Cell): 40 MHz</td><td>834 (166800)</td><td>836.5 (167300)</td><td>839 (167800)</td><td></td></tr><tr><td>NR Band n70: 5 MHz</td><td>1697.5 (339500)</td><td>1702.5 (340500)</td><td>1707.5 (341500)</td><td></td></tr><tr><td>NR Band n70: 10 MHz</td><td>1700 (340000)</td><td>1705 (340500)</td><td>1709 (341000)</td><td></td></tr><tr><td>NR Band n70: 15 MHz</td><td>N/A</td><td>1702.5 (340500)</td><td>N/A</td><td></td></tr><tr><td>NR Band n66 (AWS): 5 MHz</td><td>1712.5 (342500)</td><td>1745 (349000)</td><td>1777.5 (355500)</td><td></td></tr><tr><td>NR Band n66 (AWS): 10 MHz</td><td>1715 (343000)</td><td>1745 (349000)</td><td>1775 (355000)</td><td></td></tr><tr><td>NR Band n66 (AWS): 15 MHz</td><td>1717.5 (343500)</td><td>1745 (349000)</td><td>1772.5 (354500)</td><td></td></tr><tr><td>NR Band n66 (AWS): 20 MHz</td><td>1720 (344000)</td><td>1745 (349000)</td><td>1770 (354000)</td><td></td></tr><tr><td>NR Band n66 (AWS): 30 MHz</td><td>1725 (345000)</td><td>1745 (349000)</td><td>1765 (353000)</td><td></td></tr><tr><td>NR Band n66 (AWS): 40 MHz</td><td>1730 (346000)</td><td>1745 (349000)</td><td>1760 (352000)</td><td></td></tr><tr><td>NR Band n25 (PCS): 5 MHz</td><td>1852.5 (370500)</td><td>1882.5 (376500)</td><td>1912.5 (382500)</td><td></td></tr><tr><td>NR Band n25 (PCS): 10 MHz</td><td>1855 (371000)</td><td>1882.5 (376500)</td><td>1910 (382000)</td><td></td></tr><tr><td>NR Band n25 (PCS): 15 MHz</td><td>1857.5 (371500)</td><td>1882.5 (376500)</td><td>1907.5 (381500)</td><td></td></tr><tr><td>NR Band n25 (PCS): 20 MHz</td><td>1860 (372000)</td><td>1882.5 (376500)</td><td>1905 (381000)</td><td></td></tr><tr><td>NR Band n25 (PCS): 25 MHz</td><td>1862.5 (372500)</td><td>1882.5 (376500)</td><td>1902.5 (380500)</td><td></td></tr><tr><td>NR Band n25 (PCS): 30 MHz</td><td>1865 (373000)</td><td>1882.5 (376500)</td><td>1900 (380000)</td><td></td></tr><tr><td>NR Band n25 (PCS): 40 MHz</td><td>1870 (374000)</td><td>1882.5 (376500)</td><td>1895 (379500)</td><td></td></tr><tr><td>NR Band n2 (PCS): 5 MHz</td><td>1852.5 (370500)</td><td>1880 (376000)</td><td>1907.5 (381500)</td><td></td></tr><tr><td>NR Band n2 (PCS): 10 MHz</td><td>1855 (371000)</td><td>1880 (376000)</td><td>1905 (381000)</td><td></td></tr><tr><td>NR Band n2 (PCS): 15 MHz</td><td>1857.5 (371500)</td><td>1880 (376000)</td><td>1902.5 (380500)</td><td></td></tr><tr><td>NR Band n2 (PCS): 20 MHz</td><td>1860 (372000)</td><td>1880 (376000)</td><td>1900 (380000)</td><td></td></tr><tr><td>NR Band n30: 5 MHz</td><td>2307.5 (461500)</td><td>2310 (462000)</td><td>2312.5 (462500)</td><td></td></tr><tr><td>NR Band n30: 10 MHz</td><td>N/A</td><td>2310 (462000)</td><td>N/A</td><td></td></tr><tr><td>NR Band n7: 5 MHz</td><td>2502.5 (500500)</td><td>2535 (507000)</td><td>2567.5 (513500)</td><td></td></tr><tr><td>NR Band n7: 10 MHz</td><td>2505 (501000)</td><td>2535 (507000)</td><td>2565 (513000)</td><td></td></tr><tr><td>NR Band n7: 15 MHz</td><td>2507.5 (501500)</td><td>2535 (507000)</td><td>2562.5 (512500)</td><td></td></tr><tr><td>NR Band n7: 20 MHz</td><td>2510 (502000)</td><td>2535 (507000)</td><td>2560 (512000)</td><td></td></tr><tr><td>NR Band n7: 25 MHz</td><td>2512.5 (502500)</td><td>2535 (507000)</td><td>2557.5 (511500)</td><td></td></tr><tr><td>NR Band n7: 30 MHz</td><td>2515 (503000)</td><td>2535 (507000)</td><td>2555 (511000)</td><td></td></tr><tr><td>NR Band n7: 40 MHz</td><td>2520 (504000)</td><td>2535 (507000)</td><td>2550 (510000)</td><td></td></tr><tr><td>NR Band n41: 20 MHz</td><td>2508.02 (501204)</td><td>2548.49 (508988)</td><td>2636.49 (527298)</td><td>2679.99 (535998)</td></tr><tr><td>NR Band n41: 30 MHz</td><td>2511 (502200)</td><td>2552.01 (510402)</td><td>2634 (526800)</td><td>2674.98 (534998)</td></tr><tr><td>NR Band n41: 40 MHz</td><td>2516.01 (502602)</td><td>2557.34 (513498)</td><td>2618.67 (523734)</td><td>2670 (535000)</td></tr><tr><td>NR Band n41: 50 MHz</td><td>2521.02 (503004)</td><td>2562.99 (515898)</td><td>2614.99 (523598)</td><td></td></tr><tr><td>NR Band n41: 60 MHz</td><td>2526 (504000)</td><td>2562.99 (515898)</td><td>2609.98 (523198)</td><td></td></tr><tr><td>NR Band n41: 70 MHz</td><td>2531.01 (504600)</td><td>N/A</td><td>2605 (523100)</td><td></td></tr><tr><td>NR Band n41: 80 MHz</td><td>2536.02 (505204)</td><td>N/A</td><td>2649.99 (525998)</td><td></td></tr><tr><td>NR Band n41: 90 MHz</td><td>2541 (506000)</td><td>N/A</td><td>2644.98 (526998)</td><td></td></tr><tr><td>NR Band n41: 100 MHz</td><td>2546.01 (506602)</td><td>2592.99 (511698)</td><td>2640 (526500)</td><td></td></tr><tr><td>NR Band n48: 10 MHz</td><td>3055 (611000)</td><td>3061.68 (61112)</td><td>3048.33 (614322)</td><td></td></tr><tr><td>NR Band n48: 20 MHz</td><td>3060.01 (613734)</td><td>3063.33 (614022)</td><td>3045.68 (613122)</td><td>3040 (640000)</td></tr><tr><td>NR Band n48: 30 MHz</td><td>3065.02 (616468)</td><td>3065.01 (614034)</td><td>3045 (614000)</td><td></td></tr><tr><td>NR Band n48: 40 MHz</td><td>3070 (618000)</td><td>N/A</td><td>3045 (614000)</td><td></td></tr><tr><td>NR Band n77 DoD: 10 MHz</td><td>3455.01 (693334)</td><td>3500.01 (693334)</td><td>3544.98 (693332)</td><td></td></tr><tr><td>NR Band n77 DoD: 15 MHz</td><td>3457.5 (693500)</td><td>3500.01 (693334)</td><td>3542.49 (693166)</td><td></td></tr><tr><td>NR Band n77 DoD: 20 MHz</td><td>3460.02 (693666)</td><td>3500.01 (693334)</td><td>3540 (693000)</td><td></td></tr><tr><td>NR Band n77 DoD: 30 MHz</td><td>3465 (693000)</td><td>3500.01 (693334)</td><td>3534.99 (693566)</td><td></td></tr><tr><td>NR Band n77 DoD: 40 MHz</td><td>3470.01 (693134)</td><td>N/A</td><td>3529.98 (693332)</td><td></td></tr><tr><td>NR Band n77 DoD: 50 MHz</td><td>3475.02 (693166)</td><td>N/A</td><td>3525 (693000)</td><td></td></tr><tr><td>NR Band n77 DoD: 60 MHz</td><td>N/A</td><td>3500.01 (693334)</td><td>N/A</td><td></td></tr><tr><td>NR Band n77 DoD: 70 MHz</td><td>N/A</td><td>3500.01 (693334)</td><td>N/A</td><td></td></tr><tr><td>NR Band n77 DoD: 80 MHz</td><td>N/A</td><td>3500.01 (693334)</td><td>N/A</td><td></td></tr><tr><td>NR Band n77 DoD: 90 MHz</td><td>N/A</td><td>3500.01 (693334)</td><td>N/A</td><td></td></tr><tr><td>NR Band n77 DoD: 100 MHz</td><td>N/A</td><td>3500.01 (693334)</td><td>N/A</td><td></td></tr><tr><td>NR Band n77 C: 10 MHz</td><td>3765 (847000)</td><td>3769 (850000)</td><td>3813 (854000)</td><td>3817 (860000)</td></tr><tr><td>NR Band n77 C: 15 MHz</td><td>3767.5 (847166)</td><td>3769.5 (850200)</td><td>3813.51 (854234)</td><td>3817.48 (864832)</td></tr><tr><td>NR Band n77 C: 20 MHz</td><td>3770 (847334)</td><td>3769.5 (850200)</td><td>3813.99 (854400)</td><td>3819 (865000)</td></tr><tr><td>NR Band n77 C: 30 MHz</td><td>3775.02 (847668)</td><td>3769.5 (850200)</td><td>3813.99 (854400)</td><td>3819 (865000)</td></tr><tr><td>NR Band n77 C: 40 MHz</td><td>3780 (848000)</td><td>3815 (854400)</td><td>3864 (857000)</td><td>3820 (866000)</td></tr><tr><td>NR Band n77 C: 50 MHz</td><td>3785.01 (848334)</td><td>3864 (857000)</td><td>3872 (860000)</td><td>3820 (866000)</td></tr><tr><td>NR Band n77 C: 60 MHz</td><td>3790.02 (848668)</td><td>3840 (856000)</td><td>3871.51 (859834)</td><td>3824.98 (863666)</td></tr><tr><td>NR Band n77 C: 70 MHz</td><td>3795 (849000)</td><td>N/A</td><td>3876.66 (863666)</td><td>3824.98 (863666)</td></tr><tr><td>NR Band n77 C: 80 MHz</td><td>3740.01 (849334)</td><td>3840 (856000)</td><td>3875.01 (865834)</td><td>3845 (865000)</td></tr><tr><td>NR Band n77 C: 90 MHz</td><td>3745.02 (849668)</td><td>N/A</td><td>3840 (856000)</td><td>3839.99 (862666)</td></tr><tr><td>NR Band n77 C: 100 MHz</td><td>3750 (850000)</td><td>N/A</td><td>N/A</td><td>3838.98 (862666)</td></tr><tr><td>SCS for NR Band n71n12n14n20n25n30n30n7</td><td>15 kHz</td><td>N/A</td><td>N/A</td><td></td></tr><tr><td>SCS for NR Band n41n48n77 DoDn77 C</td><td>30 kHz</td><td>N/A</td><td>N/A</td><td></td></tr><tr><td>Modulations Supported in 5G</td><td colspan="4"> DFT-s-OFDM: m2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM </td></tr><tr><td>A-MPR (Additional MPRI) disabled for SAR Testing?</td><td colspan="4">YES</td></tr><tr><td>EN-DC Carrier Aggregation Possible Combinations</td><td colspan="4">The technical description includes all the possible carrier aggregation combinations</td></tr><tr><td>LTE Anchor Bands for NR Band n1</td><td colspan="4">LTE Band 66/27/48</td></tr><tr><td>LTE Anchor Bands for NR Band n12</td><td colspan="4">LTE Band 66/2/30/48</td></tr><tr><td>LTE Anchor Bands for NR Band n14</td><td colspan="4">LTE Band 66/2/30</td></tr><tr><td>LTE Anchor Bands for NR Band n5 (Cell)</td><td colspan="4">N/A</td></tr><tr><td>LTE Anchor Bands for NR Band n5 (Cell)</td><td colspan="4">LTE Band 66/2/30/7/48</td></tr><tr><td>LTE Anchor Bands for NR Band n70</td><td colspan="4">N/A</td></tr><tr><td>LTE Anchor Bands for NR Band n66 (AWS)</td><td colspan="4">LTE Band 71/12/13/14/9/20/7/48</td></tr><tr><td>LTE Anchor Bands for NR Band n25 (PCS)</td><td colspan="4">LTE Band 12/13/14/9/66</td></tr><tr><td>LTE Anchor Bands for NR Band n2 (PCS)</td><td colspan="4">LTE Band 12/14/9/66</td></tr><tr><td>LTE Anchor Bands for NR Band n30</td><td colspan="4">LTE Band 12/14/9/66</td></tr><tr><td>LTE Anchor Bands for NR Band n7</td><td colspan="4">LTE Band 12/5/66</td></tr><tr><td>LTE Anchor Bands for NR Band n41</td><td colspan="4">LTE Band 26/4/66/2/25</td></tr><tr><td>LTE Anchor Bands for NR Band n48</td><td colspan="4">LTE Band 2/13/5/66</td></tr><tr><td>LTE Anchor Bands for NR Band n77 DoD</td><td colspan="4">LTE Band 71/12/13/14/9/66/2/30/7/41</td></tr><tr><td>LTE Anchor Bands for NR Band n77 C</td><td colspan="4">LTE Band 71/12/13/14/9/66/2/30/7/41</td></tr></table>	Low	Low-Mid	Mid	Mid-High	High	NR Band n1: 5 MHz	665.5 (133100)	680.5 (136100)	695.5 (139100)		NR Band n1: 10 MHz	668 (133600)	683.5 (137100)	698.5 (139600)		NR Band n1: 15 MHz	670.5 (134100)	686.5 (138100)	699.5 (139100)		NR Band n1: 20 MHz	673 (134600)	689.5 (138600)	698 (137600)		NR Band n12: 5 MHz	701.5 (140300)	707.5 (141800)	713.5 (142700)		NR Band n12: 10 MHz	704 (140800)	709.5 (142300)	711 (142000)		NR Band n12: 15 MHz	706.5 (141300)	707.5 (141500)	708.5 (141700)		NR Band n14: 5 MHz	706.5 (141300)	709 (159800)	706.5 (159100)		NR Band n14: 10 MHz	N/A	703 (159800)	N/A		NR Band n5 (Cell): 5 MHz	816.5 (163300)	831.5 (166300)	846.5 (169300)		NR Band n5 (Cell): 10 MHz	819 (163800)	831.5 (166300)	844 (169800)		NR Band n5 (Cell): 15 MHz	826.5 (166300)	836.5 (167300)	846.5 (169300)		NR Band n5 (Cell): 20 MHz	829 (166800)	836.5 (167300)	844 (165800)		NR Band n5 (Cell): 30 MHz	831.5 (166300)	836.5 (167300)	841.5 (166300)		NR Band n5 (Cell): 40 MHz	834 (166800)	836.5 (167300)	839 (167800)		NR Band n70: 5 MHz	1697.5 (339500)	1702.5 (340500)	1707.5 (341500)		NR Band n70: 10 MHz	1700 (340000)	1705 (340500)	1709 (341000)		NR Band n70: 15 MHz	N/A	1702.5 (340500)	N/A		NR Band n66 (AWS): 5 MHz	1712.5 (342500)	1745 (349000)	1777.5 (355500)		NR Band n66 (AWS): 10 MHz	1715 (343000)	1745 (349000)	1775 (355000)		NR Band n66 (AWS): 15 MHz	1717.5 (343500)	1745 (349000)	1772.5 (354500)		NR Band n66 (AWS): 20 MHz	1720 (344000)	1745 (349000)	1770 (354000)		NR Band n66 (AWS): 30 MHz	1725 (345000)	1745 (349000)	1765 (353000)		NR Band n66 (AWS): 40 MHz	1730 (346000)	1745 (349000)	1760 (352000)		NR Band n25 (PCS): 5 MHz	1852.5 (370500)	1882.5 (376500)	1912.5 (382500)		NR Band n25 (PCS): 10 MHz	1855 (371000)	1882.5 (376500)	1910 (382000)		NR Band n25 (PCS): 15 MHz	1857.5 (371500)	1882.5 (376500)	1907.5 (381500)		NR Band n25 (PCS): 20 MHz	1860 (372000)	1882.5 (376500)	1905 (381000)		NR Band n25 (PCS): 25 MHz	1862.5 (372500)	1882.5 (376500)	1902.5 (380500)		NR Band n25 (PCS): 30 MHz	1865 (373000)	1882.5 (376500)	1900 (380000)		NR Band n25 (PCS): 40 MHz	1870 (374000)	1882.5 (376500)	1895 (379500)		NR Band n2 (PCS): 5 MHz	1852.5 (370500)	1880 (376000)	1907.5 (381500)		NR Band n2 (PCS): 10 MHz	1855 (371000)	1880 (376000)	1905 (381000)		NR Band n2 (PCS): 15 MHz	1857.5 (371500)	1880 (376000)	1902.5 (380500)		NR Band n2 (PCS): 20 MHz	1860 (372000)	1880 (376000)	1900 (380000)		NR Band n30: 5 MHz	2307.5 (461500)	2310 (462000)	2312.5 (462500)		NR Band n30: 10 MHz	N/A	2310 (462000)	N/A		NR Band n7: 5 MHz	2502.5 (500500)	2535 (507000)	2567.5 (513500)		NR Band n7: 10 MHz	2505 (501000)	2535 (507000)	2565 (513000)		NR Band n7: 15 MHz	2507.5 (501500)	2535 (507000)	2562.5 (512500)		NR Band n7: 20 MHz	2510 (502000)	2535 (507000)	2560 (512000)		NR Band n7: 25 MHz	2512.5 (502500)	2535 (507000)	2557.5 (511500)		NR Band n7: 30 MHz	2515 (503000)	2535 (507000)	2555 (511000)		NR Band n7: 40 MHz	2520 (504000)	2535 (507000)	2550 (510000)		NR Band n41: 20 MHz	2508.02 (501204)	2548.49 (508988)	2636.49 (527298)	2679.99 (535998)	NR Band n41: 30 MHz	2511 (502200)	2552.01 (510402)	2634 (526800)	2674.98 (534998)	NR Band n41: 40 MHz	2516.01 (502602)	2557.34 (513498)	2618.67 (523734)	2670 (535000)	NR Band n41: 50 MHz	2521.02 (503004)	2562.99 (515898)	2614.99 (523598)		NR Band n41: 60 MHz	2526 (504000)	2562.99 (515898)	2609.98 (523198)		NR Band n41: 70 MHz	2531.01 (504600)	N/A	2605 (523100)		NR Band n41: 80 MHz	2536.02 (505204)	N/A	2649.99 (525998)		NR Band n41: 90 MHz	2541 (506000)	N/A	2644.98 (526998)		NR Band n41: 100 MHz	2546.01 (506602)	2592.99 (511698)	2640 (526500)		NR Band n48: 10 MHz	3055 (611000)	3061.68 (61112)	3048.33 (614322)		NR Band n48: 20 MHz	3060.01 (613734)	3063.33 (614022)	3045.68 (613122)	3040 (640000)	NR Band n48: 30 MHz	3065.02 (616468)	3065.01 (614034)	3045 (614000)		NR Band n48: 40 MHz	3070 (618000)	N/A	3045 (614000)		NR Band n77 DoD: 10 MHz	3455.01 (693334)	3500.01 (693334)	3544.98 (693332)		NR Band n77 DoD: 15 MHz	3457.5 (693500)	3500.01 (693334)	3542.49 (693166)		NR Band n77 DoD: 20 MHz	3460.02 (693666)	3500.01 (693334)	3540 (693000)		NR Band n77 DoD: 30 MHz	3465 (693000)	3500.01 (693334)	3534.99 (693566)		NR Band n77 DoD: 40 MHz	3470.01 (693134)	N/A	3529.98 (693332)		NR Band n77 DoD: 50 MHz	3475.02 (693166)	N/A	3525 (693000)		NR Band n77 DoD: 60 MHz	N/A	3500.01 (693334)	N/A		NR Band n77 DoD: 70 MHz	N/A	3500.01 (693334)	N/A		NR Band n77 DoD: 80 MHz	N/A	3500.01 (693334)	N/A		NR Band n77 DoD: 90 MHz	N/A	3500.01 (693334)	N/A		NR Band n77 DoD: 100 MHz	N/A	3500.01 (693334)	N/A		NR Band n77 C: 10 MHz	3765 (847000)	3769 (850000)	3813 (854000)	3817 (860000)	NR Band n77 C: 15 MHz	3767.5 (847166)	3769.5 (850200)	3813.51 (854234)	3817.48 (864832)	NR Band n77 C: 20 MHz	3770 (847334)	3769.5 (850200)	3813.99 (854400)	3819 (865000)	NR Band n77 C: 30 MHz	3775.02 (847668)	3769.5 (850200)	3813.99 (854400)	3819 (865000)	NR Band n77 C: 40 MHz	3780 (848000)	3815 (854400)	3864 (857000)	3820 (866000)	NR Band n77 C: 50 MHz	3785.01 (848334)	3864 (857000)	3872 (860000)	3820 (866000)	NR Band n77 C: 60 MHz	3790.02 (848668)	3840 (856000)	3871.51 (859834)	3824.98 (863666)	NR Band n77 C: 70 MHz	3795 (849000)	N/A	3876.66 (863666)	3824.98 (863666)	NR Band n77 C: 80 MHz	3740.01 (849334)	3840 (856000)	3875.01 (865834)	3845 (865000)	NR Band n77 C: 90 MHz	3745.02 (849668)	N/A	3840 (856000)	3839.99 (862666)	NR Band n77 C: 100 MHz	3750 (850000)	N/A	N/A	3838.98 (862666)	SCS for NR Band n71n12n14n20n25n30n30n7	15 kHz	N/A	N/A		SCS for NR Band n41n48n77 DoDn77 C	30 kHz	N/A	N/A		Modulations Supported in 5G	DFT-s-OFDM: m2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM				A-MPR (Additional MPRI) disabled for SAR Testing?	YES				EN-DC Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				LTE Anchor Bands for NR Band n1	LTE Band 66/27/48				LTE Anchor Bands for NR Band n12	LTE Band 66/2/30/48				LTE Anchor Bands for NR Band n14	LTE Band 66/2/30				LTE Anchor Bands for NR Band n5 (Cell)	N/A				LTE Anchor Bands for NR Band n5 (Cell)	LTE Band 66/2/30/7/48				LTE Anchor Bands for NR Band n70	N/A				LTE Anchor Bands for NR Band n66 (AWS)	LTE Band 71/12/13/14/9/20/7/48				LTE Anchor Bands for NR Band n25 (PCS)	LTE Band 12/13/14/9/66				LTE Anchor Bands for NR Band n2 (PCS)	LTE Band 12/14/9/66				LTE Anchor Bands for NR Band n30	LTE Band 12/14/9/66				LTE Anchor Bands for NR Band n7	LTE Band 12/5/66				LTE Anchor Bands for NR Band n41	LTE Band 26/4/66/2/25				LTE Anchor Bands for NR Band n48	LTE Band 2/13/5/66				LTE Anchor Bands for NR Band n77 DoD	LTE Band 71/12/13/14/9/66/2/30/7/41				LTE Anchor Bands for NR Band n77 C	LTE Band 71/12/13/14/9/66/2/30/7/41			
Low	Low-Mid	Mid	Mid-High	High																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n1: 5 MHz	665.5 (133100)	680.5 (136100)	695.5 (139100)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n1: 10 MHz	668 (133600)	683.5 (137100)	698.5 (139600)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n1: 15 MHz	670.5 (134100)	686.5 (138100)	699.5 (139100)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n1: 20 MHz	673 (134600)	689.5 (138600)	698 (137600)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n12: 5 MHz	701.5 (140300)	707.5 (141800)	713.5 (142700)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n12: 10 MHz	704 (140800)	709.5 (142300)	711 (142000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n12: 15 MHz	706.5 (141300)	707.5 (141500)	708.5 (141700)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n14: 5 MHz	706.5 (141300)	709 (159800)	706.5 (159100)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n14: 10 MHz	N/A	703 (159800)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n5 (Cell): 5 MHz	816.5 (163300)	831.5 (166300)	846.5 (169300)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n5 (Cell): 10 MHz	819 (163800)	831.5 (166300)	844 (169800)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n5 (Cell): 15 MHz	826.5 (166300)	836.5 (167300)	846.5 (169300)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n5 (Cell): 20 MHz	829 (166800)	836.5 (167300)	844 (165800)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n5 (Cell): 30 MHz	831.5 (166300)	836.5 (167300)	841.5 (166300)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n5 (Cell): 40 MHz	834 (166800)	836.5 (167300)	839 (167800)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n70: 5 MHz	1697.5 (339500)	1702.5 (340500)	1707.5 (341500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n70: 10 MHz	1700 (340000)	1705 (340500)	1709 (341000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n70: 15 MHz	N/A	1702.5 (340500)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n66 (AWS): 5 MHz	1712.5 (342500)	1745 (349000)	1777.5 (355500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n66 (AWS): 10 MHz	1715 (343000)	1745 (349000)	1775 (355000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n66 (AWS): 15 MHz	1717.5 (343500)	1745 (349000)	1772.5 (354500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n66 (AWS): 20 MHz	1720 (344000)	1745 (349000)	1770 (354000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n66 (AWS): 30 MHz	1725 (345000)	1745 (349000)	1765 (353000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n66 (AWS): 40 MHz	1730 (346000)	1745 (349000)	1760 (352000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n25 (PCS): 5 MHz	1852.5 (370500)	1882.5 (376500)	1912.5 (382500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n25 (PCS): 10 MHz	1855 (371000)	1882.5 (376500)	1910 (382000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n25 (PCS): 15 MHz	1857.5 (371500)	1882.5 (376500)	1907.5 (381500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n25 (PCS): 20 MHz	1860 (372000)	1882.5 (376500)	1905 (381000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n25 (PCS): 25 MHz	1862.5 (372500)	1882.5 (376500)	1902.5 (380500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n25 (PCS): 30 MHz	1865 (373000)	1882.5 (376500)	1900 (380000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n25 (PCS): 40 MHz	1870 (374000)	1882.5 (376500)	1895 (379500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n2 (PCS): 5 MHz	1852.5 (370500)	1880 (376000)	1907.5 (381500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n2 (PCS): 10 MHz	1855 (371000)	1880 (376000)	1905 (381000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n2 (PCS): 15 MHz	1857.5 (371500)	1880 (376000)	1902.5 (380500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n2 (PCS): 20 MHz	1860 (372000)	1880 (376000)	1900 (380000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n30: 5 MHz	2307.5 (461500)	2310 (462000)	2312.5 (462500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n30: 10 MHz	N/A	2310 (462000)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n7: 5 MHz	2502.5 (500500)	2535 (507000)	2567.5 (513500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n7: 10 MHz	2505 (501000)	2535 (507000)	2565 (513000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n7: 15 MHz	2507.5 (501500)	2535 (507000)	2562.5 (512500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n7: 20 MHz	2510 (502000)	2535 (507000)	2560 (512000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n7: 25 MHz	2512.5 (502500)	2535 (507000)	2557.5 (511500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n7: 30 MHz	2515 (503000)	2535 (507000)	2555 (511000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n7: 40 MHz	2520 (504000)	2535 (507000)	2550 (510000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n41: 20 MHz	2508.02 (501204)	2548.49 (508988)	2636.49 (527298)	2679.99 (535998)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n41: 30 MHz	2511 (502200)	2552.01 (510402)	2634 (526800)	2674.98 (534998)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n41: 40 MHz	2516.01 (502602)	2557.34 (513498)	2618.67 (523734)	2670 (535000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n41: 50 MHz	2521.02 (503004)	2562.99 (515898)	2614.99 (523598)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n41: 60 MHz	2526 (504000)	2562.99 (515898)	2609.98 (523198)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n41: 70 MHz	2531.01 (504600)	N/A	2605 (523100)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n41: 80 MHz	2536.02 (505204)	N/A	2649.99 (525998)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n41: 90 MHz	2541 (506000)	N/A	2644.98 (526998)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n41: 100 MHz	2546.01 (506602)	2592.99 (511698)	2640 (526500)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n48: 10 MHz	3055 (611000)	3061.68 (61112)	3048.33 (614322)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n48: 20 MHz	3060.01 (613734)	3063.33 (614022)	3045.68 (613122)	3040 (640000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n48: 30 MHz	3065.02 (616468)	3065.01 (614034)	3045 (614000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n48: 40 MHz	3070 (618000)	N/A	3045 (614000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 10 MHz	3455.01 (693334)	3500.01 (693334)	3544.98 (693332)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 15 MHz	3457.5 (693500)	3500.01 (693334)	3542.49 (693166)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 20 MHz	3460.02 (693666)	3500.01 (693334)	3540 (693000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 30 MHz	3465 (693000)	3500.01 (693334)	3534.99 (693566)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 40 MHz	3470.01 (693134)	N/A	3529.98 (693332)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 50 MHz	3475.02 (693166)	N/A	3525 (693000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 60 MHz	N/A	3500.01 (693334)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 70 MHz	N/A	3500.01 (693334)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 80 MHz	N/A	3500.01 (693334)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 90 MHz	N/A	3500.01 (693334)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 DoD: 100 MHz	N/A	3500.01 (693334)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
NR Band n77 C: 10 MHz	3765 (847000)	3769 (850000)	3813 (854000)	3817 (860000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 15 MHz	3767.5 (847166)	3769.5 (850200)	3813.51 (854234)	3817.48 (864832)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 20 MHz	3770 (847334)	3769.5 (850200)	3813.99 (854400)	3819 (865000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 30 MHz	3775.02 (847668)	3769.5 (850200)	3813.99 (854400)	3819 (865000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 40 MHz	3780 (848000)	3815 (854400)	3864 (857000)	3820 (866000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 50 MHz	3785.01 (848334)	3864 (857000)	3872 (860000)	3820 (866000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 60 MHz	3790.02 (848668)	3840 (856000)	3871.51 (859834)	3824.98 (863666)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 70 MHz	3795 (849000)	N/A	3876.66 (863666)	3824.98 (863666)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 80 MHz	3740.01 (849334)	3840 (856000)	3875.01 (865834)	3845 (865000)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 90 MHz	3745.02 (849668)	N/A	3840 (856000)	3839.99 (862666)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
NR Band n77 C: 100 MHz	3750 (850000)	N/A	N/A	3838.98 (862666)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
SCS for NR Band n71n12n14n20n25n30n30n7	15 kHz	N/A	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
SCS for NR Band n41n48n77 DoDn77 C	30 kHz	N/A	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
Modulations Supported in 5G	DFT-s-OFDM: m2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
A-MPR (Additional MPRI) disabled for SAR Testing?	YES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
EN-DC Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n1	LTE Band 66/27/48																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n12	LTE Band 66/2/30/48																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n14	LTE Band 66/2/30																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n5 (Cell)	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n5 (Cell)	LTE Band 66/2/30/7/48																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n70	N/A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n66 (AWS)	LTE Band 71/12/13/14/9/20/7/48																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n25 (PCS)	LTE Band 12/13/14/9/66																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n2 (PCS)	LTE Band 12/14/9/66																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n30	LTE Band 12/14/9/66																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n7	LTE Band 12/5/66																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n41	LTE Band 26/4/66/2/25																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n48	LTE Band 2/13/5/66																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n77 DoD	LTE Band 71/12/13/14/9/66/2/30/7/41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
LTE Anchor Bands for NR Band n77 C	LTE Band 71/12/13/14/9/66/2/30/7/41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				

FCC ID: BCGA2764		SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device		
			Page 11 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 12 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 13 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

5.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 14 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 15 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 16 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8 RF CONDUCTED POWERS

All conducted power measurements for 5G Sub6 WWAN technologies and bands in this section were performed by setting Reserve power margin (Qualcomm® Smart Transmit EFS entry) to 0dB, so that the EUT transmits continuously at minimum (Plimit, maximum tune up output power Pmax).

8.1 NR Plimit Conducted Powers

Notes: Per October 2020 TCB Workshop Guidance, NR FR1 SAR evaluations are being generally based on adapting the existing LTE SAR procedures (FCC KDB Publication 941225 D05v02r05). Therefore, NR SAR for the lower bandwidths was not required for testing based on the measured output power and the reported NR SAR for the highest bandwidth. Lower bandwidth conducted powers for all NR bands can be found in NR Lower Bandwidth RF Conducted Powers Appendix.

Some bands do not support non-overlapping channels. Per FCC Guidance, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

8.1.1 NR Band n48

Table 8-1
NR Band n48 Measured P_{Limit} Antenna 1 - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM $\pi/2$ BPSK	1	1	11.62	11.32	11.35	0	0.0
	1	53	11.32	11.15	11.34		0.0
	1	104	11.39	11.23	11.27		0.0
	50	0	11.21	11.20	11.35	0-0.5	0.0
	50	28	11.21	11.10	11.29	0	0.0
	50	56	11.25	11.05	11.21	0-0.5	0.0
	100	0	11.23	11.12	11.27		0.0
DFT-s-OFDM QPSK	1	1	11.87	11.41	11.85	0	0.0
	1	53	11.29	11.15	11.57		0.0
	1	104	11.44	11.28	11.49		0.0
	50	0	11.74	11.57	11.66	0-1	0.0
	50	28	11.56	11.44	11.52	0	0.0
	50	56	11.58	11.48	11.46	0-1	0.0
	100	0	11.60	11.51	11.70		0.0
DFT-s-OFDM 16QAM	1	1	11.83	11.58	11.59	0-1	0.0
CP-OFDM QPSK	1	1	11.45	11.23	11.30	0-1.5	0.0

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 17 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-2
NR Band n48 Measured P_{Limit} Antenna 2a - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM $\pi/2$ BPSK	1	1	11.38	11.29	11.62	0	0.0
	1	53	11.24	11.24	11.54		0.0
	1	104	11.40	11.55	11.60		0.0
	50	0	11.19	11.31	11.66	0-0.5	0.0
	50	28	11.22	11.26	11.59	0	0.0
	50	56	11.16	11.22	11.52	0-0.5	0.0
	100	0	11.21	11.25	11.55		0.0
DFT-s-OFDM QPSK	1	1	11.25	11.32	11.61	0	0.0
	1	53	11.21	11.35	11.63		0.0
	1	104	11.55	11.55	11.68		0.0
	50	0	11.19	11.30	11.67	0-1	0.0
	50	28	11.22	11.25	11.57	0	0.0
	50	56	11.18	11.24	11.51	0-1	0.0
	100	0	11.19	11.28	11.56		0.0
DFT-s-OFDM 16QAM	1	1	11.51	11.53	11.88	0-1	0.0
CP-OFDM QPSK	1	1	11.11	11.22	11.33	0-1.5	0.0

Table 8-3
NR Band n48 Measured P_{Limit} Antenna 3 - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM $\pi/2$ BPSK	1	1	12.30	12.01	11.97	0	0.0
	1	53	11.96	11.75	11.93		0.0
	1	104	12.00	11.88	11.90		0.0
	50	0	11.85	11.81	11.95	0-0.5	0.0
	50	28	11.84	11.70	11.87	0	0.0
	50	56	11.87	11.72	11.78	0-0.5	0.0
	100	0	11.86	11.78	11.91		0.0
DFT-s-OFDM QPSK	1	1	12.27	11.99	11.95	0	0.0
	1	53	11.98	11.83	11.94		0.0
	1	104	11.99	11.92	11.90		0.0
	50	0	11.83	11.85	12.03	0-1	0.0
	50	28	11.84	11.76	11.90	0	0.0
	50	56	11.86	11.77	11.85	0-1	0.0
	100	0	11.83	11.81	11.97		0.0
DFT-s-OFDM 16QAM	1	1	12.45	12.22	12.25	0-1	0.0
CP-OFDM QPSK	1	1	12.12	11.85	11.92	0-1.5	0.0

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 18 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-4
NR Band n48 Measured P_{Limit} Antenna 4b - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM $\pi/2$ BPSK	1	1	11.51	11.49	11.72	0	0.0
	1	53	11.49	11.46	11.57		0.0
	1	104	11.54	11.61	11.67		0.0
	50	0	11.46	11.47	11.69	0-0.5	0.0
	50	28	11.45	11.42	11.61	0	0.0
	50	56	11.40	11.50	11.60	0-0.5	0.0
	100	0	11.47	11.41	11.61		0.0
DFT-s-OFDM QPSK	1	1	11.43	11.50	11.60	0	0.0
	1	53	11.46	11.34	11.58		0.0
	1	104	11.49	11.45	11.61		0.0
	50	0	11.43	11.36	11.55	0-1	0.0
	50	28	11.41	11.31	11.47	0	0.0
	50	56	11.39	11.35	11.42	0-1	0.0
	100	0	11.39	11.32	11.50		0.0
DFT-s-OFDM 16QAM	1	1	11.71	11.70	11.75	0-1	0.0
CP-OFDM QPSK	1	1	11.32	11.30	11.45	0-1.5	0.0




Figure 8-1
Power Measurement Setup

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 19 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
08/22/2022	3600 Head	21.7	3300	2.822	37.451	2.708	38.157	4.21%	-1.85%
			3350	2.861	37.392	2.759	38.100	3.70%	-1.86%
			3450	2.938	37.271	2.861	37.986	2.69%	-1.88%
			3500	2.976	37.182	2.913	37.929	2.16%	-1.97%
			3550	3.013	37.129	2.964	37.871	1.65%	-1.96%
			3560	3.020	37.104	2.974	37.860	1.55%	-2.00%
			3600	3.053	37.060	3.015	37.814	1.26%	-1.99%
			3650	3.092	36.987	3.066	37.757	0.85%	-2.04%
			3690	3.119	36.928	3.107	37.711	0.39%	-2.08%
			3700	3.129	36.909	3.117	37.700	0.38%	-2.10%
			3750	3.174	36.856	3.169	37.643	0.16%	-2.09%
			3900	3.301	36.669	3.323	37.471	-0.66%	-2.14%
			3930	3.332	36.628	3.353	37.437	-0.63%	-2.16%
			4100	3.478	36.435	3.528	37.243	-1.42%	-2.17%
			4150	3.523	36.384	3.579	37.186	-1.56%	-2.16%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Note: Per April 2019 TCB Workshop Notes, single head-tissue simulating liquid specified in IEC 62209-1 is permitted to use for all SAR tests.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 20 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in the System Validation Appendix.

Table 9-2
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	Measured SAR1g (W/kg)	1W Target SAR1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation1g (%)
AM1	3500	HEAD	08/22/2022	24.7	21.3	0.10	1126	7639	7.020	67.00	70.200	4.78%
AM1	3700	HEAD	08/22/2022	24.7	21.3	0.10	1002	7639	6.970	68.80	69.700	1.31%

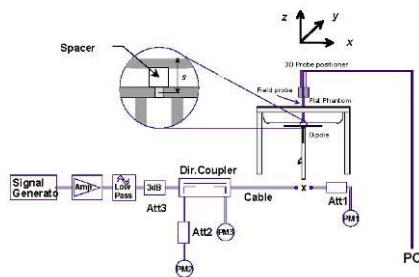


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 21 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10 SAR DATA SUMMARY

10.1 Standalone SAR Data

Table 10-1
NR Band n48 Antenna 1 Body SAR

MEASUREMENT RESULTS																							
FREQUENCY		Side	Spacing	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	SAR (10g) (W/kg)	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																						
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.87	0	0.08	1:1	0.562	1.079	0.606	0.145	0.156	A1
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.41	0	-0.04	1:1	0.809	1.199	0.970	0.259	0.311	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.85	0	0.02	1:1	0.912	1.084	0.989	0.290	0.314	
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	50	0	12.20	11.74	0	0.01	1:1	0.538	1.112	0.598	0.139	0.155	
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	50	0	12.20	11.57	0	-0.02	1:1	0.813	1.156	0.940	0.257	0.297	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	50	0	12.20	11.66	0	-0.08	1:1	0.877	1.132	0.993	0.280	0.317	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	100	0	12.20	11.70	0	-0.03	1:1	0.893	1.122	0.991	0.279	0.313	
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	CP-OFDM	QPSK	1	1	12.20	11.45	0	0.00	1:1	0.704	1.189	0.837	0.225	0.268	
3570.00	638000	Low	top	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.87	0	0.01	1:1	0.000	1.079	0.000	0.000	0.000	
3570.00	638000	Low	top	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	50	0	12.20	11.74	0	-0.13	1:1	0.000	1.112	0.000	0.000	0.000	
3570.00	638000	Low	bottom	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.87	0	0.09	1:1	0.458	1.079	0.494	0.128	0.138	
3570.00	638000	Low	bottom	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	50	0	12.20	11.74	0	-0.01	1:1	0.455	1.112	0.506	0.127	0.141	
3570.00	638000	Low	right	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.87	0	0.05	1:1	0.010	1.079	0.011	0.002	0.002	
3570.00	638000	Low	right	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	50	0	12.20	11.74	0	0.06	1:1	0.000	1.112	0.000	0.000	0.000	
3570.00	638000	Low	left	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.87	0	0.05	1:1	0.328	1.079	0.354	0.089	0.096	
3570.00	638000	Low	left	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	50	0	12.20	11.74	0	0.00	1:1	0.331	1.112	0.368	0.089	0.099	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 1	JYHWFYC62	40	DFT-S-OFDM	QPSK	1	1	12.20	11.85	0	0.00	1:1	0.879	1.084	0.953	0.280	0.304	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represents variability measurement.

Table 10-2
NR Band n48 Antenna 2a Body SAR

MEASUREMENT RESULTS																							
FREQUENCY		Side	Spacing	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)	(W/kg)			
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.55	0	-0.05	1:1	0.811	1.216	0.986	0.246	0.299	
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.55	0	-0.01	1:1	0.504	1.216	0.613	0.167	0.203	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.68	0	-0.07	1:1	0.674	1.180	0.795	0.199	0.235	
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	28	12.40	11.22	0	0.01	1:1	0.557	1.312	0.731	0.188	0.247	
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	0	12.40	11.30	0	0.01	1:1	0.756	1.288	0.974	0.228	0.294	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	0	12.40	11.67	0	-0.01	1:1	0.667	1.183	0.789	0.196	0.232	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	100	0	12.40	11.56	0	0.04	1:1	0.659	1.213	0.799	0.196	0.238	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	CP-OFDM	QPSK	1	1	12.40	11.33	0	-0.01	1:1	0.669	1.279	0.856	0.200	0.256	
3679.98	645332	High	top	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.68	0	0.05	1:1	0.006	1.180	0.007	0.000	0.000	
3679.98	645332	High	top	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	0	12.40	11.67	0	0.06	1:1	0.006	1.183	0.007	0.000	0.000	
3679.98	645332	High	bottom	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.68	0	-0.02	1:1	0.202	1.180	0.238	0.053	0.063	
3679.98	645332	High	bottom	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	0	12.40	11.67	0	-0.03	1:1	0.164	1.183	0.194	0.045	0.053	
3570.00	638000	Low	right	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.55	0	-0.02	1:1	0.488	1.216	0.593	0.156	0.190	
3624.99	641666	Mid	right	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.55	0	-0.16	1:1	0.540	1.216	0.657	0.164	0.199	
3679.98	645332	High	right	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.68	0	-0.01	1:1	0.679	1.180	0.801	0.189	0.223	
3570.00	638000	Low	right	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	28	12.40	11.22	0	-0.05	1:1	0.502	1.312	0.699	0.160	0.210	
3624.99	641666	Mid	right	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	0	12.40	11.30	0	-0.04	1:1	0.713	1.288	0.918	0.203	0.261	
3679.98	645332	High	right	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	0	12.40	11.67	0	0.00	1:1	0.859	1.183	0.780	0.185	0.219	
3679.98	645332	High	right	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	100	0	12.40	11.56	0	-0.17	1:1	0.706	1.213	0.856	0.200	0.243	
3679.98	645332	High	left	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	1	104	12.40	11.68	0	0.09	1:1	0.000	1.180	0.000	0.000	0.000	
3679.98	645332	High	left	0 mm	NR Band n48	Ant 2a	N4C42R071C	40	DFT-S-OFDM	QPSK	50	0	12.40	11.67	0	0.09	1:1	0.000	1.183	0.000	0.000	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak												Body 1.6 W/kg (mW/g) averaged over 1 gram											
Uncontrolled Exposure/General Population																							

FCC ID: BCGA2764	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device		Page 22 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-3
NR Band n48 Antenna 3 Body SAR

MEASUREMENT RESULTS																							
FREQUENCY		Side	Spacing	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	SAR (10g) (W/kg)	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																						
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	1	1	12.80	12.27	0	-0.17	1:1	0.686	1.130	0.775	0.184	0.208	
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	1	1	12.80	11.99	0	0.00	1:1	0.729	1.205	0.878	0.193	0.233	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	1	1	12.80	11.95	0	-0.01	1:1	0.745	1.216	0.906	0.194	0.236	
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	50	56	12.80	11.86	0	0.06	1:1	0.674	1.242	0.837	0.178	0.221	
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	50	0	12.80	11.85	0	0.09	1:1	0.699	1.245	0.870	0.185	0.230	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	50	0	12.80	12.03	0	0.01	1:1	0.710	1.194	0.848	0.185	0.221	
3679.98	645332	High	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	100	0	12.80	11.97	0	0.03	1:1	0.691	1.211	0.837	0.176	0.213	
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	CP-OFDM	QPSK	1	1	12.80	12.12	0	0.00	1:1	0.688	1.169	0.804	0.184	0.215	
3570.00	638000	Low	top	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	1	1	12.80	12.27	0	-0.01	1:1	0.336	1.130	0.380	0.095	0.107	
3679.98	645332	High	top	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	50	0	12.80	12.03	0	-0.09	1:1	0.250	1.194	0.299	0.068	0.081	
3570.00	638000	Low	bottom	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	1	1	12.80	12.27	0	0.04	1:1	0.002	1.130	0.002	0.000	0.000	
3679.98	645332	High	bottom	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	50	0	12.80	12.03	0	0.09	1:1	0.001	1.194	0.001	0.000	0.000	
3570.00	638000	Low	right	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	1	1	12.80	12.27	0	0.05	1:1	0.439	1.130	0.496	0.127	0.144	
3679.98	645332	High	right	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	50	0	12.80	12.03	0	0.07	1:1	0.486	1.194	0.580	0.139	0.166	
3570.00	638000	Low	left	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	1	1	12.80	12.27	0	0.07	1:1	0.006	1.130	0.007	0.000	0.000	
3679.98	645332	High	left	0 mm	NR Band n48	Ant 3	HQJWMMQYM	40	DFT-S-OFDM	QPSK	50	0	12.80	12.03	0	0.05	1:1	0.012	1.194	0.014	0.002	0.002	
ANSI / IEEE C63.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-4
NR Band n48 Antenna 4b Body SAR

MEASUREMENT RESULTS																						
FREQUENCY		Side	Spacing	Mode	Antenna Config	Serial Num ber	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	SAR (10g) (W/kg)	Reported SAR (10g) (W/kg)	Plot #
MHz	Ch.																					
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	104	11.90	11.49	0	0.11	1:1	0.643	1.099	0.707	0.183	0.201
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	1	11.90	11.50	0	0.03	1:1	0.662	1.096	0.726	0.189	0.207
3679.98	645332	High	back	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	104	11.90	11.61	0	0.06	1:1	0.666	1.069	0.712	0.190	0.203
3570.00	638000	Low	back	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.43	0	-0.14	1:1	0.618	1.114	0.688	0.180	0.201
3624.99	641666	Mid	back	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.36	0	-0.10	1:1	0.648	1.132	0.734	0.186	0.211
3679.98	645332	High	back	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.55	0	0.01	1:1	0.712	1.084	0.772	0.203	0.220
3679.98	645332	High	back	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	100	0	11.90	11.50	0	0.02	1:1	0.667	1.096	0.731	0.189	0.207
3570.00	638000	Low	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	104	11.90	11.49	0	0.07	1:1	0.808	1.099	0.888	0.231	0.254
3624.99	641666	Mid	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	1	11.90	11.50	0	-0.04	1:1	0.811	1.096	0.889	0.229	0.251
3679.98	645332	High	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	104	11.90	11.61	0	-0.11	1:1	0.836	1.069	0.894	0.239	0.255
3570.00	638000	Low	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.43	0	0.02	1:1	0.819	1.114	0.912	0.233	0.260
3624.99	641666	Mid	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.36	0	-0.09	1:1	0.770	1.132	0.872	0.216	0.245
3679.98	645332	High	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.55	0	-0.08	1:1	0.807	1.084	0.875	0.226	0.245
3679.98	645332	High	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	100	0	11.90	11.50	0	-0.05	1:1	0.817	1.096	0.895	0.228	0.250
3679.98	645332	High	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	CP-OFDM	QPSK	1	1	11.90	11.45	0	0.02	1:1	0.841	1.109	0.933	0.236	0.262
3679.98	645332	High	bottom	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	104	11.90	11.61	0	0.16	1:1	0.002	1.069	0.002	0.000	0.000
3679.98	645332	High	bottom	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.55	0	0.03	1:1	0.000	1.084	0.000	0.000	0.000
3679.98	645332	High	right	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	104	11.90	11.61	0	0.01	1:1	0.000	1.069	0.000	0.000	0.000
3679.98	645332	High	right	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.55	0	0.20	1:1	0.000	1.084	0.000	0.000	0.000
3679.98	645332	High	left	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	1	104	11.90	11.61	0	0.05	1:1	0.036	1.069	0.038	0.010	0.011
3679.98	645332	High	left	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.55	0	0.08	1:1	0.040	1.084	0.043	0.011	0.012
3570.00	638000	Low	top	0 mm	NR Band n48	Ant 4b	RMMWY2WCW	40	DFT-S-OFDM	QPSK	50	0	11.90	11.43	0	-0.08	1:1	0.776	1.114	0.864	0.216	0.243
ANSI / IEEE C63.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram												

Note: Blue entry represents variability measurement.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 23 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determine SAR test exclusion for adjacent edge configurations.
8. This device uses Smart Transmit for 5G operations to control and manage transmitting power in real time to ensure RF Exposure compliance. Per FCC Guidance, compliance for was assessed at the minimum of the time averaged power and the maximum output power for each band/mode/exposure condition (DSI).
9. The orange highlights throughout the report represent the highest scaled SAR per Equipment Class.
10. See the original filing for all other operations that were not evaluated in this permissive change.

NR Notes:

1. NR implementation supports SA and NSA modes. NR implementation in EN-DC mode operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.
2. Due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
3. This device additionally supports some EN-DC conditions where additional LTE carriers are added on the downlink only.
4. Per FCC Guidance, NR modulations and RB Sizes/Offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.
5. See the original filing for all other operations that were not evaluated in this permissive change.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 24 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

Note:

Please see the original filing for the standalone reported SAR for modes and bands that were not evaluated for this permissive change.

Only operations relevant to this permissive change were evaluated for compliance. No other simultaneous scenario transmission changes have been made. Please see the original filing for complete evaluation of simultaneous transmission analysis.

SAR Summations for some scenarios when the output power levels are reduced, SAR values at the maximum output power level were used as the most conservative evaluation for simultaneous transmission analysis.

For each position, the highest SAR value across all modes for the applicable cellular band antenna was considered for summation to determine simultaneous SAR test exclusion.

*The SAR distributions for at least one of the antennas are spatially separated from the other antennas per FCC KDB Publication 248227 Section 6.1 procedures. Therefore, the simultaneous transmission were treated independently for this configuration. See section 11.4 for more information about the Spatial Separation Analysis.

Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G (including scenarios with inter-band ULCA active) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR and during inter-band ULCA active conditions to not exceed FCC limit. Therefore, simultaneous transmission compliance between 4G+5G operations (including scenarios with inter-band ULCA active) is demonstrated in the Part 2 Report during algorithm validation. See the original filing for all other operations that were not evaluated in this permissive change.

In some cases where simultaneous transmission scenarios overlap with the same power level (for example, cellular band + 2.4 GHz WIFI SISO and cellular band + 2.4 GHz WIFI MIMO), the most conservative SAR summation scenario was evaluated.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 25 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

11.3 Body SAR Simultaneous Transmission Analysis

Table 11-1
Cellular Band Ant 2a Simultaneous Transmission Scenario with 2.4 GHz WLAN MIMO

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	2.4 GHz WLAN Ant 2a Reduced at 10dBm SAR (W/kg)	2.4 GHz WLAN Ant 4a SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.986	0.470	0.895	1.456*
	Top	0.015	0.012	0.320	0.347
	Bottom	0.314	0.189	0.009	0.512
	Right	0.951	0.466	0.000	1.417
	Left	0.028	0.000	0.961	0.989

Table 11-2
Cellular Band Ant 2a Simultaneous Transmission Scenario with Bluetooth TxBF

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	Bluetooth Ant 2a at 10 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.986	0.342	1.157	1.328*
	Top	0.015	0.011	0.528	0.554
	Bottom	0.314	0.172	0.019	0.505
	Right	0.951	0.340	0.000	1.291
	Left	0.028	0.000	1.046	1.074

Table 11-3
Cellular Band Ant 2a Simultaneous Transmission Scenario with 5 GHz WI-FI MIMO

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	5 GHz WLAN Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5b Reduced at 13 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.986	1.105	0.067	1.105*
	Top	0.015	0.120	0.000	0.135
	Bottom	0.314	0.000	0.014	0.328
	Right	0.951	0.000	0.386	1.337
	Left	0.028	1.179	0.025	1.232

Table 11-4
Cellular Band Ant 2a Simultaneous Transmission Scenario with NB UNII TxBF

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	NB UNII Ant 5b Reduced at 14 dBm SAR (W/kg)	NB UNII Ant 4a SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.986	0.052	1.157	1.157*
	Top	0.015	0.000	0.215	0.230
	Bottom	0.314	0.007	0.000	0.321
	Right	0.951	0.268	0.000	1.219
	Left	0.028	0.009	1.157	1.194

Table 11-5
Cellular Band Ant 2a Simultaneous Transmission Scenario with 6 GHz WI-FI MIMO

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	WIFI 6E Ant 4a SAR (W/kg)	WIFI 6E Ant 5b Reduced at 13 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.986	1.189	0.094	1.189*
	Top	0.015	0.115	0.000	0.130
	Bottom	0.314	0.003	0.007	0.324
	Right	0.951	0.005	0.345	1.301
	Left	0.028	0.135	0.000	0.163

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 26 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 11-6
Cellular Band Ant 2a Simultaneous Transmission Scenario with Bluetooth and 2.4 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	2.4 GHz WLAN Ant 4a SAR (W/kg)	Bluetooth Ant 2a at 10 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.986	0.895	0.342	1.328*
	Top	0.015	0.320	0.011	0.346
	Bottom	0.314	0.009	0.172	0.495
	Right	0.951	0.000	0.340	1.291
	Left	0.028	0.961	0.000	0.989

Table 11-7
Cellular Band Ant 2a Simultaneous Transmission Scenario with Bluetooth TxBF and 5 GHz WI-FI MIMO

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	Bluetooth Ant 2a at 7 dBm SAR (W/kg)	Bluetooth Ant 4a at 9.5 dBm SAR (W/kg)	5 GHz WLAN Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5b Reduced at 13 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Body SAR	Back	0.986	0.162	0.307	1.105	0.067	1.412*
	Top	0.015	0.011	0.159	0.120	0.000	0.305
	Bottom	0.314	0.093	0.019	0.000	0.014	0.440
	Right	0.951	0.160	0.000	0.000	0.386	1.497
	Left	0.028	0.000	0.246	1.179	0.025	1.478

Table 11-8
Cellular Band Ant 2a Simultaneous Transmission Scenario with 2.4 GHz WI-FI MIMO and NB UNII TxBF

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	2.4 GHz WLAN Ant 2a Reduced at 10dBm SAR (W/kg)	2.4 GHz WLAN Ant 4a SAR (W/kg)	NB UNII Ant 4a Reduced at 6 dBm SAR (W/kg)	NB UNII Ant 5b Reduced at 11 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Body SAR	Back	0.986	0.470	0.895	0.287	0.020	1.476*
	Top	0.015	0.012	0.320	0.062	0.000	0.409
	Bottom	0.314	0.189	0.009	0.000	0.007	0.519
	Right	0.951	0.466	0.000	0.000	0.120	1.537
	Left	0.028	0.000	0.961	0.316	0.009	1.314

Table 11-9
Cellular Band Ant 2a Simultaneous Transmission Scenario with Bluetooth TxBF and 6 GHz WI-FI MIMO

Simult Tx	Configuration	Cellular Band Ant 2a SAR (W/kg)	Bluetooth Ant 2a at 7 dBm SAR (W/kg)	Bluetooth Ant 4a at 9.5 dBm SAR (W/kg)	WIFI 6E Ant 4a SAR (W/kg)	WIFI 6E Ant 5b Reduced at 13 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Body SAR	Back	0.986	0.162	0.307	1.189	0.094	1.496*
	Top	0.015	0.011	0.159	0.115	0.000	0.300
	Bottom	0.314	0.093	0.019	0.003	0.007	0.436
	Right	0.951	0.160	0.000	0.005	0.345	1.461
	Left	0.028	0.000	0.246	0.135	0.000	0.409

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 27 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

11.4 Spatial Separation Analysis

Per FCC KDB Publication 248227, antennas may be considered spatially separated when the aggregate SAR from multiple antennas at any location in the combined SAR distribution is either ≤ 1.2 W/kg where at least 90% of the SAR is attributed to a single SAR distribution or ≤ 0.4 W/kg where no more than one SAR distribution is contributing > 0.1 W/kg.

Spatial separation was determined by inspection of the area scan SAR distributions to confirm that at all locations, SAR was < 1.2 W/kg, where at least 90% of the SAR is attributed to a single SAR distribution. See below for illustrations of the spatial separated antennas considered.

11.4.1 Back Side Spatial Separation Analysis

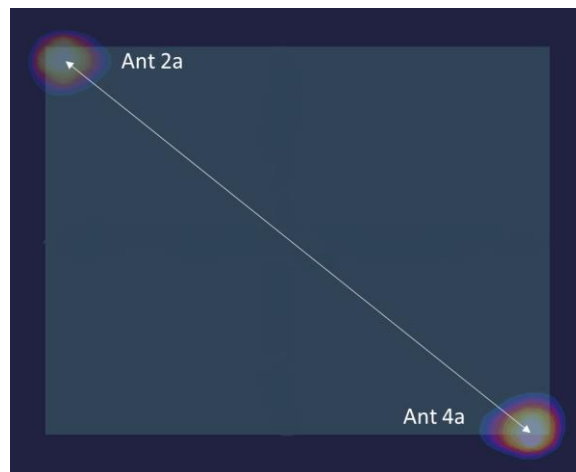


Figure 11-1
Back Side Spatial Separation for Antenna 2a and Antenna 4a

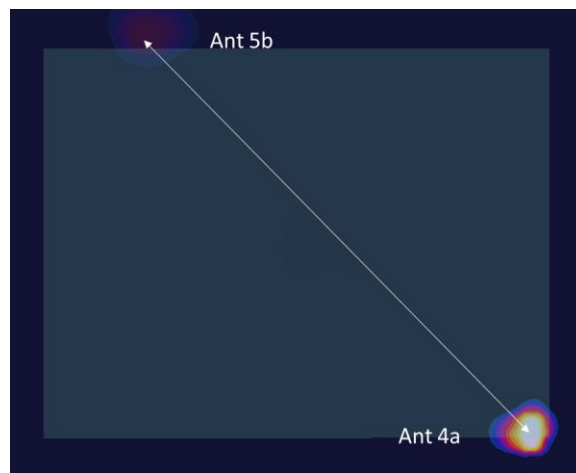


Figure 11-2
Back Side Spatial Separation for Antenna 4a and Antenna 5b

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 28 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 29 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS															
Band	FREQUENCY		Mode	Waveform	Service	Ant	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)		(W/kg)	
3500	3570.00	638000	NR Band n48, 40 MHz Bandwidth	DFT-S-OFDM	QPSK, 50 RB, 0 RB Offset	4b	top	0 mm	0.819	0.776	1.06	N/A	N/A	N/A	N/A
3700	3679.98	645332	NR Band n48, 40 MHz Bandwidth	DFT-S-OFDM	QPSK, 1 RB, 1 RB Offset	1	back	0 mm	0.912	0.879	1.04	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram						

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 30 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4404B	Spectrum Analyzer	N/A	N/A	N/A	MY45113242
Agilent	E4438C	ESG Vector Signal Generator	5/10/2022	Annual	5/10/2023	MY42082659
Agilent	E4438C	ESG Vector Signal Generator	2/14/2022	Annual	2/14/2023	MY42082385
Agilent	N5182A	MXG Vector Signal Generator	7/20/2022	Annual	7/20/2023	MY47420800
Agilent	N5182A	MXG Vector Signal Generator	6/21/2022	Annual	6/21/2023	MY47420651
Agilent	8753ES	S-Parameter Vector Network Analyzer	2/11/2022	Annual	2/11/2023	MY40003841
Agilent	8753ES	S-Parameter Vector Network Analyzer	12/17/2021	Annual	12/17/2022	MY40000670
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433974
Anritsu	MA24106A	USB Power Sensor	8/12/2022	Annual	8/12/2023	1349513
Anritsu	MA24106A	USB Power Sensor	8/5/2022	Annual	8/5/2023	1344555
Control Company	4352	Long Stem Thermometer	9/10/2021	Biennial	9/10/2023	210774678
Control Company	4352	Long Stem Thermometer	9/10/2021	Biennial	9/10/2023	210774685
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	200670623
Control Company	4040	Therm./ Clock/ Humidity Monitor	1/21/2022	Annual	1/21/2023	160574418
Mitutoyo	500-196-30	CD-6"ASX 6Inch Digital Caliper	2/16/2022	Triennial	2/16/2025	A20238413
Keysight Technologies	N6705B	DC Power Analyzer	5/5/2021	Triennial	5/5/2024	MY53004059
Keysight Technologies	N9020A	MXA Signal Analyzer	4/14/2022	Annual	4/14/2023	MY48010233
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	ZJDC10-83-S+	Directional Coupler	CBT	N/A	CBT	2050
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Huber + Suhner	74Z-0-0-21	Torque Wrench	4/6/2022	Biennial	6/4/2024	83881
SPEAG	DAK-3.5	Dielectric Assessment Kit	1/6/2022	Annual	1/6/2023	1278
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1379
SPEAG	D3500V2	3500 MHz SAR Dipole	6/9/2021	Biennial	6/9/2023	1126
SPEAG	D3700V2	3700 MHz SAR Dipole	10/17/2019	Triennial	10/17/2022	1002
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/21/2021	Annual	11/21/2022	1646
SPEAG	EX3DV4	SAR Probe	11/16/2021	Annual	11/16/2022	7639

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

Note: All equipment was used solely within its respective calibration period

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 31 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

14 MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E.2.4	0.25	R	1.73	1	1	0.1	0.1	∞
Modulation Response	E.2.5	4.8	R	1.73	1	1	2.8	2.8	∞
Readout Electronics	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	3	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	3	R	1.73	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E.6.3	6.7	R	1.73	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E.4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E.2.9	5	R	1.73	1	1	2.9	2.9	∞
SAR Scaling	E.6.5	0	R	1.73	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E.3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E.3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E.3.4	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E.3.4	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)							RSS	12.2	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.4	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCGA2764	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device		Page 32 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 33 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 34 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCGA2764	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1C2305090019-02.BCG (Rev1)	DUT Type: Tablet Device	Page 35 of 35

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.