

MEASUREMENT REPORT

FCC PART 15.407 / ISED RSS-248 UNII 802.11a/ax OFDM WIFI 6E

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

11/28/2023 - 04/04/2024

Test Report Issue Date:

4/4/2024

Test Site/Location:

Element Materials Technology, CA, USA

Test Report Serial No.:

1C2311270068-24-R2.BCG

FCC ID:	BCGA2837
IC:	579C-A2837
APPLICANT:	Apple Inc.

Application Type:

Certification

Model/HVIN:

A2837, A3006

EUT Type:

Tablet Device

Frequency Range:

5955 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-248 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01
KDB 662911 D01 v02r01, KDB 987594 D02 v02r01
KDB 987594 D04 v02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2311270068-24-R2.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President

Prepared by: WKR0000010551

Reviewed by: WKR0000005805




FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 1 of 510


TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Materials Technology Test Location	5
1.3	Test Facility / Accreditations	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities	6
2.3	Antenna Description	10
2.4	Test Support Equipment	10
2.5	Test Configuration	11
2.6	Software and Firmware	11
2.7	EMI Suppression Device(s)/Modifications	11
3.0	DESCRIPTION OF TESTS	12
3.1	Evaluation Procedure	12
3.2	AC Line Conducted Emissions	12
3.3	Radiated Emissions	13
3.4	Environmental Conditions	13
4.0	ANTENNA REQUIREMENTS	14
5.0	MEASUREMENT UNCERTAINTY	15
6.0	TEST EQUIPMENT CALIBRATION DATA	16
7.0	TEST RESULTS	17
7.1	Summary	17
7.2	26dB & 99% Bandwidth Measurement – 802.11a/ax(SU)	19
7.3	Conducted Output Power and Max EIRP Measurement – 802.11a/ax(SU)	65
7.4	Maximum Power Spectral Density – 802.11a/ax(SU)	105
7.5	In-Band Emissions – 802.11a/ax(SU)	231
7.6	Contention Based Protocol – 802.11a/ax(SU)	329
7.7	Radiated Spurious Emissions – Above 1GHz	351
7.8	Radiated Spurious Emissions – Below 1GHz	499
7.9	AC Line-Conducted Emissions Measurement	504
8.0	CONCLUSION	510

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 2 of 510



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF5B		Antenna 4a		Antenna 2a		Summed		Summed	
				Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	7.463	8.73	8.035	9.05	3.741	5.73	8.675	9.38	6.514	8.14
6		802.11a/ax	6435 - 6515	6.998	8.45	6.998	8.45	4.121	6.15	7.015	8.46	5.521	7.42
7		802.11a/ax	6535 - 6875	6.998	8.45	6.095	7.85	4.732	6.75	6.871	8.37	5.747	7.59
8		802.11a/ax	6895 - 7115	6.761	8.30	4.760	6.78	3.162	5.00	6.878	8.37	4.734	6.75
5	40	802.11ax	5965 - 6405	14.332	11.56	16.032	12.05	7.480	8.74	17.032	12.31	13.027	11.15
6		802.11ax	6445 - 6525	13.964	11.45	13.549	11.32	8.222	9.15	13.868	11.42	10.966	10.40
7		802.11ax	6565 - 6845	13.964	11.45	12.162	10.85	9.425	9.74	13.553	11.32	11.362	10.55
8		802.11ax	6885 - 7085	13.490	11.30	9.517	9.79	6.172	7.90	13.410	11.27	9.295	9.68
5	80	802.11ax	5985 - 6385	29.208	14.66	30.500	14.84	15.177	11.81	33.749	15.28	25.517	14.07
6		802.11ax	6465	26.669	14.26	27.121	14.33	16.406	12.15	27.606	14.41	21.580	13.34
7		802.11ax	6545 - 6865	27.638	14.42	23.201	13.66	18.836	12.75	27.167	14.34	22.053	13.43
8		802.11ax	6945 - 7025	26.915	14.30	18.850	12.75	11.907	10.76	27.067	14.32	18.504	12.67
5	160	802.11ax	6025 - 6345	52.918	17.24	56.885	17.55	27.227	14.35	61.272	17.87	46.327	16.66
6		802.11ax	6505	42.034	16.24	41.947	16.23	24.894	13.96	46.666	16.69	37.072	15.69
7		802.11ax	6665 - 6825	49.386	16.94	43.152	16.35	32.011	15.05	48.757	16.88	39.762	15.99
8		802.11ax	6985	47.402	16.76	32.659	15.14	22.387	13.50	47.802	16.79	33.133	15.20

EUT Overview Low Power Indoor (Low Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF5B		Antenna 4a		Antenna 2a		Summed		Summed	
				Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	7.499	8.75	8.035	9.05	3.846	5.85	8.536	9.31	6.439	8.09
6		802.11a/ax	6435 - 6515	6.998	8.45	6.998	8.45	4.121	6.15	6.950	8.42	5.521	7.42
7		802.11a/ax	6535 - 6875	6.998	8.45	6.095	7.85	4.732	6.75	6.919	8.40	5.708	7.56
8		802.11a/ax	6895 - 7115	6.761	8.30	4.786	6.80	3.153	4.99	6.830	8.34	4.702	6.72
5	40	802.11ax	5965 - 6405	14.458	11.60	15.470	11.90	7.415	8.70	17.150	12.34	13.117	11.18
6		802.11ax	6445 - 6525	13.964	11.45	13.964	11.45	8.222	9.15	13.614	11.34	10.941	10.39
7		802.11ax	6565 - 6845	13.769	11.39	12.162	10.85	9.441	9.75	13.805	11.40	11.441	10.58
8		802.11ax	6885 - 7085	13.490	11.30	9.550	9.80	6.143	7.88	13.410	11.27	9.295	9.68
5	80	802.11ax	5985 - 6385	29.854	14.75	31.608	15.00	14.997	11.76	34.376	15.36	26.353	14.21
6		802.11ax	6465	26.254	14.19	27.861	14.45	15.392	11.87	27.416	14.38	22.185	13.46
7		802.11ax	6545 - 6865	27.861	14.45	23.922	13.79	18.565	12.69	26.918	14.30	22.360	13.49
8		802.11ax	6945 - 7025	26.915	14.30	19.055	12.80	12.589	11.00	26.696	14.26	18.632	12.70
5	160	802.11ax	6025 - 6345	51.713	17.14	56.885	17.55	27.227	14.35	59.465	17.74	45.272	16.56
6		802.11ax	6505	43.491	16.38	44.157	16.45	26.002	14.15	45.709	16.60	37.244	15.71
7		802.11ax	6665 - 6825	49.545	16.95	40.964	16.12	32.315	15.09	47.867	16.80	40.689	16.09
8		802.11ax	6985	45.804	16.61	33.366	15.23	22.387	13.50	47.692	16.78	33.133	15.20

EUT Overview Low Power Indoor (Mid Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 3 of 510

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF5B		Antenna 4a		Antenna 2a		Summed		Summed	
				Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	7.221	8.59	8.035	9.05	3.791	5.79	8.655	9.37	6.681	8.25
6		802.11a/ax	6435 - 6515	6.912	8.40	6.998	8.45	4.121	6.15	6.998	8.45	5.573	7.46
7		802.11a/ax	6535 - 6875	6.998	8.45	5.902	7.71	4.732	6.75	6.903	8.39	5.669	7.53
8		802.11a/ax	6895 - 7115	6.693	8.26	4.659	6.68	3.141	4.97	6.830	8.34	4.734	6.75
5	40	802.11ax	5965 - 6405	14.355	11.57	15.893	12.01	7.497	8.75	16.993	12.30	12.818	11.08
6		802.11ax	6445 - 6525	13.964	11.45	13.964	11.45	8.222	9.15	13.900	11.43	11.119	10.46
7		802.11ax	6565 - 6845	13.964	11.45	12.162	10.85	9.441	9.75	13.647	11.35	11.258	10.51
8		802.11ax	6885 - 7085	13.490	11.30	9.493	9.77	6.310	8.00	13.380	11.26	9.189	9.63
5	80	802.11ax	5985 - 6385	28.834	14.60	31.989	15.05	15.028	11.77	34.535	15.38	26.597	14.25
6		802.11ax	6465	27.720	14.43	27.657	14.42	15.827	11.99	27.353	14.37	21.830	13.39
7		802.11ax	6545 - 6865	27.810	14.44	23.610	13.73	18.374	12.64	27.672	14.42	22.776	13.57
8		802.11ax	6945 - 7025	26.915	14.30	19.055	12.80	12.589	11.00	27.067	14.32	18.546	12.68
5	160	802.11ax	6025 - 6345	53.088	17.25	54.238	17.34	26.897	14.30	59.602	17.75	46.327	16.66
6		802.11ax	6505	44.157	16.45	43.331	16.37	26.002	14.15	46.238	16.65	36.312	15.60
7		802.11ax	6665 - 6825	47.523	16.77	42.570	16.29	33.497	15.25	47.102	16.73	39.946	16.01
8		802.11ax	6985	47.863	16.80	32.825	15.16	21.842	13.39	46.929	16.71	32.008	15.05

EUT Overview Low Power Indoor (High Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF5B		Antenna 4a		Antenna 2a		Summed		Summed	
				Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	83.734	19.23	99.954	20.00	47.588	16.78	189.234	22.77	201.372	23.04
7		802.11a/ax	6535 - 6875	88.777	19.48	95.609	19.81	66.911	18.26	204.644	23.11	186.638	22.71
5	40	802.11ax	5965 - 6405	81.227	19.10	100.832	20.04	46.881	16.71	187.068	22.72	198.609	22.98
7		802.11ax	6565 - 6845	94.016	19.73	98.107	19.92	72.127	18.58	207.970	23.18	189.671	22.78
5	80	802.11ax	5985 - 6385	82.205	19.15	106.243	20.26	46.968	16.72	188.365	22.75	199.067	22.99
7		802.11ax	6545 - 6865	100.115	20.01	95.521	19.80	69.375	18.41	201.837	23.05	183.231	22.63
5	160	802.11ax	6025 - 6345	77.696	18.90	100.023	20.00	44.055	16.44	188.799	22.76	197.242	22.95
7		802.11ax	6665 - 6825	92.066	19.64	97.972	19.91	66.604	18.24	204.644	23.11	184.927	22.67

EUT Overview Standard Power (Low Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF5B		Antenna 4a		Antenna 2a		Summed		Summed	
				Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	84.314	19.26	104.136	20.18	49.295	16.93	190.546	22.80	201.837	23.05
7		802.11a/ax	6535 - 6875	90.991	19.59	100.369	20.02	67.827	18.31	202.302	23.06	184.927	22.67
5	40	802.11ax	5965 - 6405	80.002	19.03	100.763	20.03	46.795	16.70	185.353	22.68	198.153	22.97
7		802.11ax	6565 - 6845	92.003	19.64	99.931	20.00	70.958	18.51	207.970	23.18	188.799	22.76
5	80	802.11ax	5985 - 6385	82.794	19.18	104.232	20.18	47.885	16.80	188.365	22.75	199.526	23.00
7		802.11ax	6545 - 6865	102.400	20.10	95.653	19.81	69.024	18.39	199.526	23.00	180.717	22.57
5	160	802.11ax	6025 - 6345	75.718	18.79	100.531	20.02	42.973	16.33	184.077	22.65	194.536	22.89
7		802.11ax	6665 - 6825	90.824	19.58	94.995	19.78	65.811	18.18	207.491	23.17	188.799	22.76

EUT Overview Standard Power (Mid Rate)

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD/SDM Primary		CDD/SDM Diversity	
				Antenna WF5B		Antenna 4a		Antenna 2a		Summed		Summed	
				Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)	Max. e.i.r.p. (dBm)
5	20	802.11a/ax	5955 - 6415	80.353	19.05	97.611	19.90	47.632	16.78	182.390	22.61	194.536	22.89
7		802.11a/ax	6535 - 6875	88.064	19.45	94.820	19.77	65.705	18.18	200.447	23.02	183.231	22.63
5	40	802.11ax	5965 - 6405	78.091	18.93	96.427	19.84	45.113	16.54	179.473	22.54	189.671	22.78
7		802.11ax	6565 - 6845	89.084	19.50	96.294	19.84	68.124	18.33	199.067	22.99	181.552	22.59
5	80	802.11ax	5985 - 6385	77.804	18.91	98.107	19.92	44.906	16.52	182.810	22.62	194.536	22.89
7		802.11ax	6545 - 6865	93.068	19.69	89.536	19.52	65.464	18.16	195.434	22.91	176.198	22.46
5	160	802.11ax	6025 - 6345	72.078	18.58	93.648	19.72	41.002	16.13	171.791	22.35	182.810	22.62
7		802.11ax	6665 - 6825	85.625	19.33	91.411	19.61	61.958	17.92	193.197	22.86	174.582	22.42

EUT Overview Standard Power (High Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device		Page 4 of 510

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Agreements (MRAs)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 5 of 510

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2837** and **IC: 579C-A2837**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: P9164KGFH6, Q1VQ22L4XG, N4LP6X9FG4, DLXGY600024000063A, GJ6WJ67WFX

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), WPT, NB UNII (1x, HDR4, HDR8), 802.15.4

This device supports BT Beamforming.

Standard Power (SP) mode is supported for U-NII Bands 5 and 7. Lower Power Indoor (LPI) mode is supported for U-NII Bands 5, 6, 7, 8. Throughout the report, data of Standard Power mode is denoted as SP while data of Lower Power Indoor mode is denoted as LPI.

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	5955	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a / 802.11ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 6 of 510

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
:	:			:	:		
47	6185			175	6825		
:	:						
79	6345						

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode / Band		Duty Cycle [%]				
		Antenna WF5B	Antenna 4a	Antenna 2a	CDD/SDM Primary	CDD/SDM Diversity 1
6GHz	11a (20MHz) (Low Rate)	97.72	97.95	97.27	-	-
	11a (20MHz) (Mid Rate)	95.94	95.94	95.50	-	-
	11a (20MHz) (High Rate)	91.62	91.62	91.41	-	-
	11ax(SU) (20MHz) (Low Rate)	96.16	95.94	96.16	96.16	95.94
	11ax(SU) (20MHz) (Mid Rate)	93.11	93.11	93.11	93.33	93.11
	11ax(SU) (20MHz) (High Rate)	86.90	87.50	87.50	86.50	87.50
	11ax(SU) (40MHz) (Low Rate)	95.94	95.50	95.94	95.72	95.94
	11ax(SU) (40MHz) (Mid Rate)	92.68	92.90	92.68	92.68	92.90
	11ax(SU) (40MHz) (High Rate)	86.70	85.90	85.90	86.30	86.70
	11ax(SU) (80MHz) (Low Rate)	95.28	95.50	95.50	95.28	95.72
	11ax(SU) (80MHz) (Mid Rate)	92.26	92.47	92.04	92.68	92.68
	11ax(SU) (80MHz) (High Rate)	86.10	85.90	86.10	86.70	86.50
	11ax(SU) (160MHz) (Low Rate)	94.19	94.19	93.97	93.54	93.97
	11ax(SU) (160MHz) (Mid Rate)	90.16	90.57	90.36	90.57	89.74
11ax(SU) (160MHz) (High Rate)	83.75	83.37	83.37	83.75	83.75	

Table 2-5. Measured Duty Cycles

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 7 of 510

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO			CDD			SDM			STBC		
		Antenna WF5B	Antenna 4a	Antenna 2a	Antenna WF5B	Antenna 4a	Antenna 2a	Antenna WF5B	Antenna 4a	Antenna 2a	Antenna WF5B	Antenna 4a	Antenna 2a
5GHz	11a	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	
	11ax(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	11ax(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	11ax(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	11ax(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	

Table 2-6. WIFI Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

STBC = Space-Time Block Coding – 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)

8/8.6, 16/17.2, 24/25.8, 33/34.4, 49/51.6, 65/68.8, 73/77.4, 81/86.0, 98/103.2, 108/114.7, 122/129.0, 135/143.4Mbps (ax – 20MHz)
 16/17.2, 33/34.4, 49/51.6, 65/68.8, 98/103.2, 130/137.6, 146/154.9, 163/172.1, 195/206.5, 217/229.4, 244/258.1, 271/286.8Mbps (ax – 40MHz BW)
 34/36.0, 68/72.1, 102/108.1, 136/144.1, 204/216.2, 272/288.2, 306/324.4, 340/360.3, 408/432.4, 453/480.4, 510/540.4, 567/600.5Mbps (ax – 80MHz BW)
 68.1/72.1, 136.1/144.1, 204.2/216.2, 272.2/288.2, 408.3/432.4, 544.4/576.5, 612.5/648.5, 680.6/720.6, 816.7/864.7, 907.4/960.8, 1020.8/1080.9, 1134.3/1201Mbps (ax – 160Mhz BW)
 16.3/17.2, 32.5/34.4, 48.8/51.6, 65/68.8, 97.5/103.2, 130/137.6, 146.3/154.9, 162.5/172.1, 195/206.5, 216.7/229.4, 243.8/258.1, 270.8/286.8Mbps (MIMO ax – 20MHz)
 32.5/34.4, 65/68.8, 97.5/103.2, 130/137.6, 195/206.5, 260/275.3, 292.5/309.7, 325/344.1, 390/412.9, 433.3/458.8, 487.5/516.2, 541.7/573.5 Mbps (MIMO ax – 40MHz BW)
 68.1/72.1, 136.1/144.1, 204.2/216.2, 272.2/288.2, 408.3/432.4, 544.4/576.5, 612.5/648.5, 680.6/720.6, 816.7/864.7, 907.4/960.8, 1020.8/1080.9, 1134.3/1201Mbps (MIMO ax – 80MHz BW)
 136.1/144.1, 272.2/288.2, 408.3/432.4, 544.4/576.5, 816.7/864.7, 1088.9/1152.9, 1225/1297.1, 1361.1/1441.2, 1633.3/1729.4, 1814.8/1921.6, 2041.7/2161.8, 2268.5/2402Mbps (MIMO ax – 160MHz BW)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 8 of 510

3. This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Wifi 2GHz	Bluetooth	Thread	Wifi 5GHz	Wifi 6GHz	NB UNII	LTE/FR1 NR	
		802.11 b/g/n/ax	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 a/n/ac/ax	802.11 a/ax	BDR, HDR4/8	MB/HB	UHB
2a	Config 1	X	✓	X	✓	X	X	X	X
2a	Config 2	X	✓	X	X	✓	X	X	X
2a	Config 3	✓	X	X	X	X	✓	X	X
2a	Config 4	X	X	✓	✓	X	X	X	X
2a	Config 5	X	X	✓	X	✓	X	X	X
4a	Config 6	X	✓	X	✓	X	X	X	X
4a	Config 7	X	✓	X	X	✓	X	X	X
4a	Config 8	✓	X	X	X	X	✓	X	X
4a	Config 9	X	X	✓	✓	X	X	X	X
4a	Config 10	X	X	✓	X	✓	X	X	X

Table 2-7. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

4. All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in Bluetooth and UNII OFDM RF test reports.
5. Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz) in connected mode and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. For BT (2.4GHz) in disconnected mode and Wi-Fi (2.4GHz) - BT will be using iPA only and Wi-Fi max power will not exceed minimum of (SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 9 of 510

2.3 Antenna Description

Following antenna gains were provided by the manufacturer.

UNII Band	Highest Antenna Gain			Lowest Antenna Gain		
	Antenna WF5B	Antenna 4a	Antenna 2a	Antenna WF5B	Antenna 4a	Antenna 2a
5	2.0	2.3	-0.9	0.5	0.9	-1.9
6	2.2	2.2	-0.1	2.2	2.2	-0.1
7	2.7	2.1	1	2.3	1.1	0.1
8	3.3	1.8	0.0	2.6	0.9	-2.2

Table 2-8. Antenna Gains

2.4 Test Support Equipment

1	Apple MacBook Pro	Model: A2141	S/N: C02H604EQ05D
	w/AC/DC Adapter	Model: A2166	S/N: C4H042705ZNP0WA6
2	Apple USB-C Cable	Model: Spartan	S/N: GXK1336018XKTR024
3	USB-C Cable	Model: A246C	S/N: DWH80115BK826GV19
	w/ AC Adapter	Model: A2305	S/N: C4H95160004PF4F4V
4	Apple Pencil	Model: A2538	S/N: KJ26TCFXJW
5	DC Power Supply	Model: KPS3010D	S/N: N/A
6	Netgear	Model: RAXE500	S/N: 6JX215GA10A5
7	Broadcam AP	Model: N/A	S/N: N/A

Table 2-9. Test Support Equipment List

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 10 of 510

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013, KDB 789033 D02 v02r01 and KDB 987594 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by host PC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11ax HE20/40/80 2TX SDM mode test data provided in this report covers 802.11ax HE20/40/80 2TX STBC mode.

For 802.11ax-RU test results, see separate UNII 6E OFDMA report, 1C2311270068-25.BCG.

The data rates have been classified into three different groups; low data rate, middle data rate, and high data rate. All three groups of data rate have been investigated and only the worst case data rate per group is reported. The worst case data rate for each group per mode are as follows:

- 802.11a:
 - Low Data Rate: 12Mbps
 - Mid Data Rate: 24Mbps
 - High Data Rate: 54Mbps
- 802.11ax(SU) HE20/HE40/HE80/HE160
 - Low Data Rate: MCS2
 - Mid Data Rate: MCS4
 - High Data Rate: MCS11

2.6 Software and Firmware

The test was conducted with firmware version 21E8197 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 11 of 510

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG			Test Dates: 11/28/2023 - 04/04/2024

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG		Test Dates: 11/28/2023 - 04/04/2024

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 14 of 510

V 10.50.40 12/15/2021

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 15 of 510

V 10.50.40 12/15/2021

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/21/2023	Annual	6/21/2024	MY49430244
Anritsu	ML2496A	Power Meter	4/4/2023	Annual	4/4/2024	1840005
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	4/5/2023	Annual	4/5/2024	1726261
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	3/30/2023	Annual	3/30/2024	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/10/2023	Annual	3/10/2024	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/31/2023	Annual	8/31/2024	100052
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/11/2023	Annual	5/11/2024	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	6/6/2023	Annual	6/6/2024	101668
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	6/22/2023	Annual	6/22/2024	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/2/2023	Annual	6/2/2024	100050
Rohde & Schwarz	HFH2-Z2	Loop Antenna	5/1/2023	Annual	5/1/2024	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	6/8/2023	Annual	6/8/2024	192052
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/17/2023	Annual	4/17/2024	00304

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 16 of 510

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2837
 IC: 579C-A2837
 FCC Classification: 15E 6GHz Dual Client (6CD)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(11)	RSS Gen [6.7], RSS-248 [4.4]	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(7) 15.407(a)(8)	RSS-248 [4.5.5] RSS-248 [4.5.3]	Maximum Power Spectral Density	< 17dBm/MHz e.i.r.p for Standard Power < -1dBm/MHz e.i.r.p.for Low Power Indoor		PASS	Section 7.4
15.407(a)(7) 15.407(a)(8)	RSS-248 [4.5.5] RSS-248 [4.5.3]	Maximum Radiated Output Power	< 30dBm over the frequency band of operation for Standard Power < 24dBm over the frequency band of operation for Low Power Indoor		PASS	Section 7.3
15.407(b)(7)	RSS-248 [4.6.2]	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7) and RSS-248 [4.6.2]b)		PASS	Section 7.5
15.407(d)(6)	RSS-248 [4.7]	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(a)(7)	RSS-248 [4.5.5]	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	EUT maintains its power level at least 6 dB lower than that of the standard-power access point		PASS	See UNII 6E OFDMA Test Report (1C232227 0068-25.BCG)
987594 D02 v02r01	N/A	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	EUT maximum power level shall not exceed 30dBm EIRP when connected to Standard Power AP, and 24dBm EIRP when connected to Low Power Indoor AP		PASS	
15.407(b)(6)	RSS-248 [4.6.2]	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	RSS-248 [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7, 7.8
15.207(b)(8)	RSS-248 [8.8]	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 & RSS-Gen [8.8] limits	LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 17 of 510

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.2.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.0.0.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA2837 IC: 579C-A2837	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG		Test Dates: 11/28/2023 - 04/04/2024

7.2 26dB & 99% Bandwidth Measurement – 802.11a/ax(SU)

§2.1049; §15.407; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. The data rates have been classified into three different groups; Low Data Rate, Middle rate, and High Data Rate. All three data rate groups of data rate have been investigated and only the worst case data rate per group is reported.
3. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel bandwidth plots have been reported.

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 19 of 510

V 10.50.40 12/15/2021

7.2.1 Antenna WF5B 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12	16.74	20.83	320	Pass
	6175	45	a	12	16.69	20.81	320	Pass
	6415	93	a	12	16.72	20.85	320	Pass
	5955	1	ax (20MHz)	24/25.8 (MCS2)	19.03	21.33	320	Pass
	6175	45	ax (20MHz)	24/25.8 (MCS2)	19.02	21.28	320	Pass
	6415	93	ax (20MHz)	24/25.8 (MCS2)	19.06	21.36	320	Pass
	5695	3	ax (40MHz)	49/51.6 (MCS2)	38.02	41.49	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.91	41.51	320	Pass
	6405	91	ax (40MHz)	49/51.6 (MCS2)	37.96	41.22	320	Pass
	5985	7	ax (80MHz)	102/108.1 (MCS2)	77.18	81.93	320	Pass
	6145	39	ax (80MHz)	102/108.1 (MCS2)	77.17	81.72	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.27	81.68	320	Pass
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	156.23	164.81	320	Pass
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	156.11	164.82	320	Pass
6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.29	165.47	320	Pass	
Band 6	6435	97	a	12	16.72	20.86	320	Pass
	6475	105	a	12	16.72	20.83	320	Pass
	6515	113	a	12	16.72	20.86	320	Pass
	6345	97	ax (20MHz)	24/25.8 (MCS2)	19.04	21.23	320	Pass
	6475	105	ax (20MHz)	24/25.8 (MCS2)	19.04	21.29	320	Pass
	6515	113	ax (20MHz)	24/25.8 (MCS2)	19.06	21.26	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.96	41.53	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.93	41.38	320	Pass
	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.95	41.60	320	Pass
	6465	103	ax (80MHz)	102/108.1 (MCS2)	77.20	81.75	320	Pass
6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.32	164.87	320	Pass	
Band 7	6535	117	a	12	16.68	20.79	320	Pass
	6695	149	a	12	16.71	20.86	320	Pass
	6875	185	a	12	16.73	20.96	320	Pass
	6535	117	ax (20MHz)	24/25.8 (MCS2)	19.02	21.21	320	Pass
	6695	149	ax (20MHz)	24/25.8 (MCS2)	19.04	20.98	320	Pass
	6875	185	ax (20MHz)	24/25.8 (MCS2)	19.04	21.26	320	Pass
	6565	123	ax (40MHz)	49/51.6 (MCS2)	37.95	41.74	320	Pass
	6725	155	ax (40MHz)	49/51.6 (MCS2)	37.96	41.65	320	Pass
	6885	179	ax (40MHz)	49/51.6 (MCS2)	38.00	41.42	320	Pass
	6545	119	ax (80MHz)	102/108.1 (MCS2)	77.18	82.32	320	Pass
	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.18	81.62	320	Pass
	6865	183	ax (80MHz)	102/108.1 (MCS2)	77.21	81.85	320	Pass
	6665	143	ax (160MHz)	183.8/216.2 (MCS2)	156.27	164.77	320	Pass
	6825	175	ax (160MHz)	183.8/216.2 (MCS2)	156.50	164.93	320	Pass
Band 8	6895	189	a	12	16.71	20.94	320	Pass
	6995	209	a	12	16.76	21.01	320	Pass
	7115	233	a	12	16.79	21.22	320	Pass
	6895	189	ax (20MHz)	24/25.8 (MCS2)	19.06	21.29	320	Pass
	6995	209	ax (20MHz)	24/25.8 (MCS2)	19.04	21.26	320	Pass
	7115	233	ax (20MHz)	24/25.8 (MCS2)	19.10	21.23	320	Pass
	6925	187	ax (40MHz)	49/51.6 (MCS2)	37.94	41.42	320	Pass
	7005	211	ax (40MHz)	49/51.6 (MCS2)	38.00	41.70	320	Pass
	7085	227	ax (40MHz)	49/51.6 (MCS2)	38.03	42.37	320	Pass
	6945	199	ax (80MHz)	102/108.1 (MCS2)	77.26	81.94	320	Pass
	7025	215	ax (80MHz)	102/108.1 (MCS2)	77.34	82.35	320	Pass
	6985	207	ax (160MHz)	183.8/216.2 (MCS2)	156.38	165.81	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna WF5B (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 20 of 510

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	24	16.69	20.86	320	Pass
	6175	45	a	24	16.68	20.84	320	Pass
	6415	93	a	24	16.69	20.88	320	Pass
	5955	1	ax (20MHz)	49/51.6 (MCS4)	19.04	21.16	320	Pass
	6175	45	ax (20MHz)	49/51.6 (MCS4)	19.02	21.38	320	Pass
	6415	93	ax (20MHz)	49/51.6 (MCS4)	19.04	21.39	320	Pass
	5965	3	ax (40MHz)	98/103.2 (MCS4)	37.93	41.26	320	Pass
	6165	43	ax (40MHz)	98/103.2 (MCS4)	37.94	41.38	320	Pass
	6405	91	ax (40MHz)	98/103.2 (MCS4)	37.95	41.25	320	Pass
	5985	7	ax (80MHz)	204/216.2 (MCS4)	77.31	81.96	320	Pass
	6145	39	ax (80MHz)	204/216.2 (MCS4)	77.18	81.65	320	Pass
	6385	87	ax (80MHz)	204/216.2 (MCS4)	77.35	81.75	320	Pass
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.14	165.01	320	Pass
	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	156.32	165.60	320	Pass
6345	79	ax (160MHz)	367.5/432.4 (MCS4)	156.27	165.12	320	Pass	
Band 6	6435	97	a	24	16.67	20.80	320	Pass
	6475	105	a	24	16.67	20.82	320	Pass
	6515	113	a	24	16.68	20.87	320	Pass
	6435	97	ax (20MHz)	49/51.6 (MCS4)	19.02	21.29	320	Pass
	6475	105	ax (20MHz)	49/51.6 (MCS4)	19.00	21.30	320	Pass
	6515	113	ax (20MHz)	49/51.6 (MCS4)	19.03	21.23	320	Pass
	6445	99	ax (40MHz)	98/103.2 (MCS4)	37.94	41.33	320	Pass
	6485	107	ax (40MHz)	98/103.2 (MCS4)	37.92	41.49	320	Pass
	6525	115	ax (40MHz)	98/103.2 (MCS4)	38.00	41.32	320	Pass
	6465	103	ax (80MHz)	204/216.2 (MCS4)	77.19	81.60	320	Pass
Band 7	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	156.59	164.90	320	Pass
	6535	117	a	24	16.68	20.88	320	Pass
	6695	149	a	24	16.69	20.87	320	Pass
	6875	185	a	24	16.71	20.84	320	Pass
	6535	117	ax (20MHz)	49/51.6 (MCS4)	19.01	21.29	320	Pass
	6695	149	ax (20MHz)	49/51.6 (MCS4)	19.06	20.94	320	Pass
	6875	185	ax (20MHz)	49/51.6 (MCS4)	19.04	21.34	320	Pass
	6565	123	ax (40MHz)	98/103.2 (MCS4)	37.94	41.39	320	Pass
	6725	155	ax (40MHz)	98/103.2 (MCS4)	37.96	41.51	320	Pass
	6885	179	ax (40MHz)	98/103.2 (MCS4)	38.00	41.60	320	Pass
	6545	119	ax (80MHz)	204/216.2 (MCS4)	77.25	82.29	320	Pass
	6705	151	ax (80MHz)	204/216.2 (MCS4)	77.28	81.66	320	Pass
	6865	183	ax (80MHz)	204/216.2 (MCS4)	77.35	82.06	320	Pass
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	156.08	164.64	320	Pass
6825	175	ax (160MHz)	367.5/432.4 (MCS4)	156.23	164.56	320	Pass	
Band 8	6895	189	a	24	16.71	20.86	320	Pass
	6995	209	a	24	16.73	21.11	320	Pass
	7115	233	a	24	16.75	21.29	320	Pass
	6895	189	ax (20MHz)	49/51.6 (MCS4)	19.05	21.26	320	Pass
	6995	209	ax (20MHz)	49/51.6 (MCS4)	19.06	21.39	320	Pass
	7115	233	ax (20MHz)	49/51.6 (MCS4)	19.06	21.19	320	Pass
	6885	187	ax (40MHz)	98/103.2 (MCS4)	38.01	41.44	320	Pass
	7005	211	ax (40MHz)	98/103.2 (MCS4)	38.03	43.62	320	Pass
	7085	227	ax (40MHz)	98/103.2 (MCS4)	38.12	44.53	320	Pass
	6945	199	ax (80MHz)	204/216.2 (MCS4)	77.39	82.41	320	Pass
	7025	215	ax (80MHz)	204/216.2 (MCS4)	77.44	82.57	320	Pass
6985	207	ax (160MHz)	367.5/432.4 (MCS4)	157.06	237.37	320	Pass	

Table 7-3. Conducted Bandwidth Measurements Antenna WF5B (Mid Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 21 of 510

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.66	20.70	320	Pass
	6175	45	a	54	16.66	20.68	320	Pass
	6415	93	a	54	16.66	20.74	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	19.04	21.29	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.08	21.29	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.05	21.20	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.89	41.37	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.92	41.29	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.94	41.34	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.19	81.58	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.06	81.48	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.28	81.84	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.42	165.68	320	Pass
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.42	165.92	320	Pass
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.43	165.00	320	Pass	
Band 6	6435	97	a	54	16.66	20.73	320	Pass
	6475	105	a	54	16.66	20.73	320	Pass
	6515	113	a	54	16.67	20.73	320	Pass
	6435	97	ax (20MHz)	135/143.4 (MCS11)	19.03	21.27	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.05	21.43	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.05	21.17	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.94	41.37	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.97	41.43	320	Pass
	6525	115	ax (40MHz)	271/286.8 (MCS11)	38.00	41.29	320	Pass
	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.28	81.69	320	Pass
Band 7	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.57	166.62	320	Pass
	6535	117	a	54	16.66	20.72	320	Pass
	6695	149	a	54	16.66	20.75	320	Pass
	6875	185	a	54	16.69	20.86	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.11	21.21	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.07	21.09	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.05	21.30	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.91	41.20	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.95	41.47	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.95	41.74	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	77.21	81.37	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.29	81.82	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	77.31	81.93	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.74	166.06	320	Pass
6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.92	166.37	320	Pass	
Band 8	6895	189	a	54	16.68	20.86	320	Pass
	6995	209	a	54	16.71	20.96	320	Pass
	7115	233	a	54	16.73	20.99	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	19.06	21.22	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.15	24.48	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	19.12	27.73	320	Pass
	6885	187	ax (40MHz)	271/286.8 (MCS11)	37.96	41.62	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	38.12	42.91	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	38.09	60.33	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.34	82.30	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.43	83.94	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	157.79	298.60	320	Pass


Table 7-4. Conducted Bandwidth Measurements Antenna WF5B (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 22 of 510


Low Data Rate




Plot 7-1. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 5) – Ch. 45, 12Mbps)

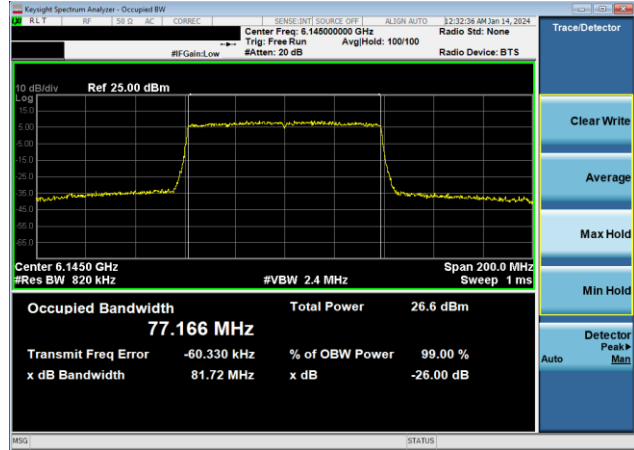


Plot 7-4. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)

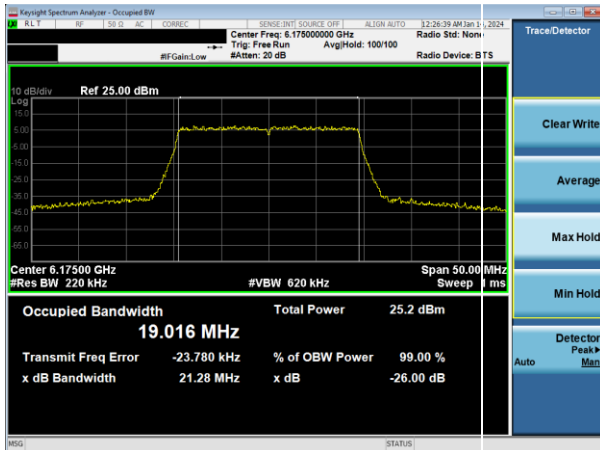


Plot 7-2. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)

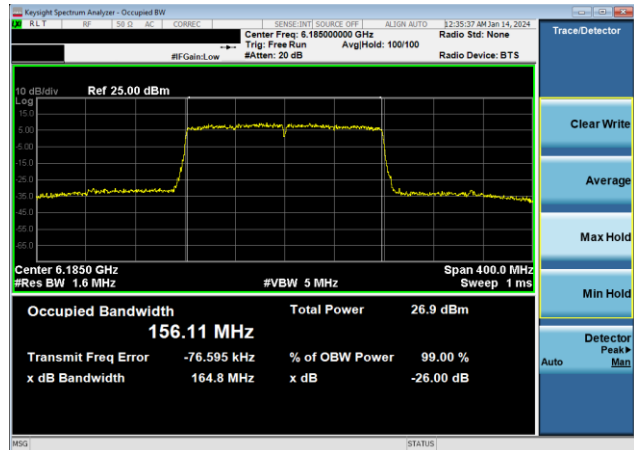

Plot 7-5. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)

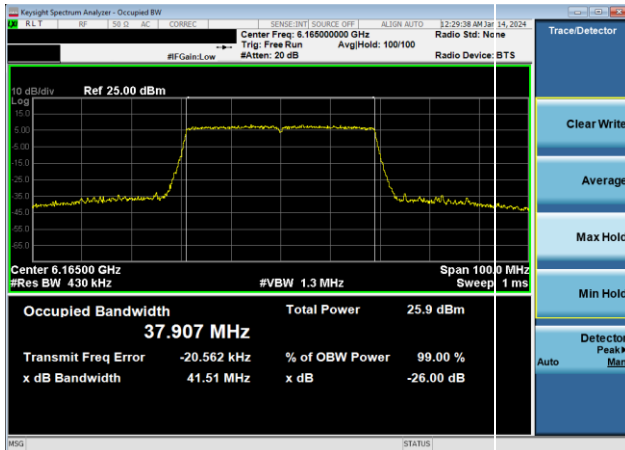


Plot 7-3. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)

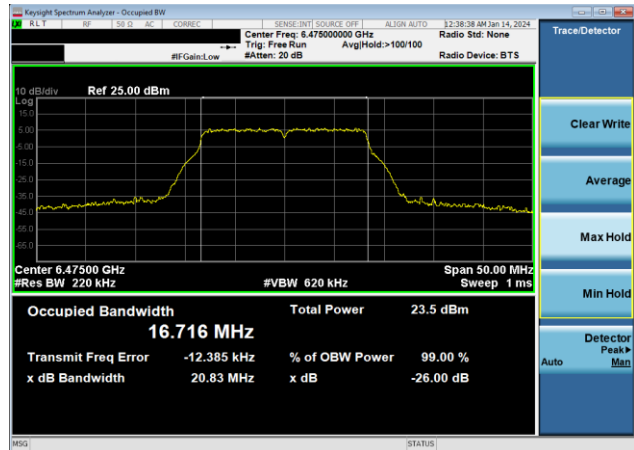


Plot 7-6. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 6) – Ch. 105, 12Mbps)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 23 of 510

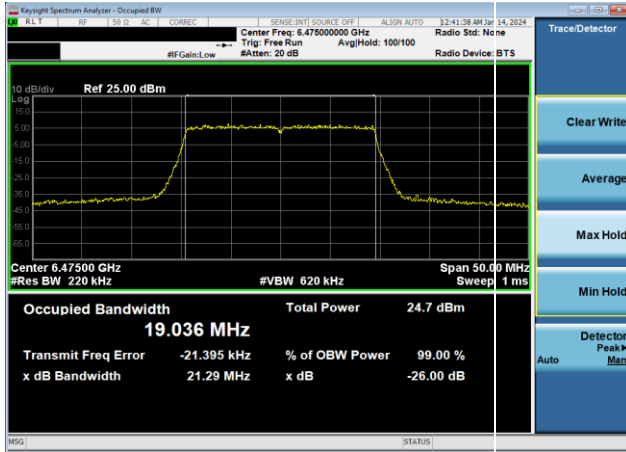


Plot 7-7. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS2)

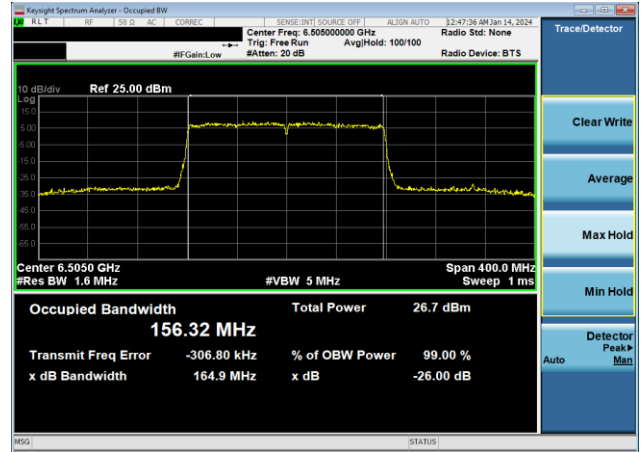


Plot 7-10. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS2)




Plot 7-8. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS2)

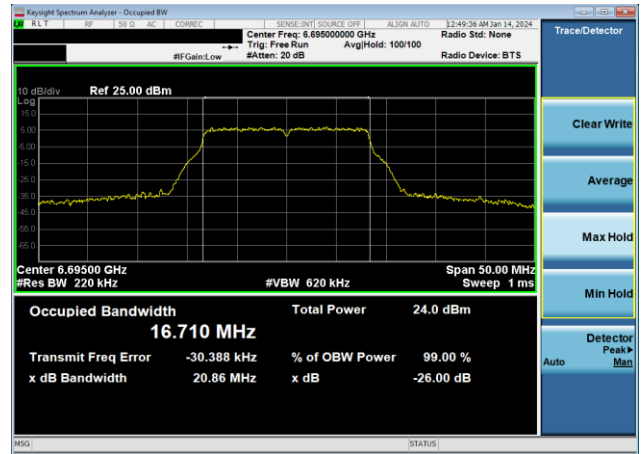

Plot 7-11. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 7) – Ch. 149, 12Mbps)

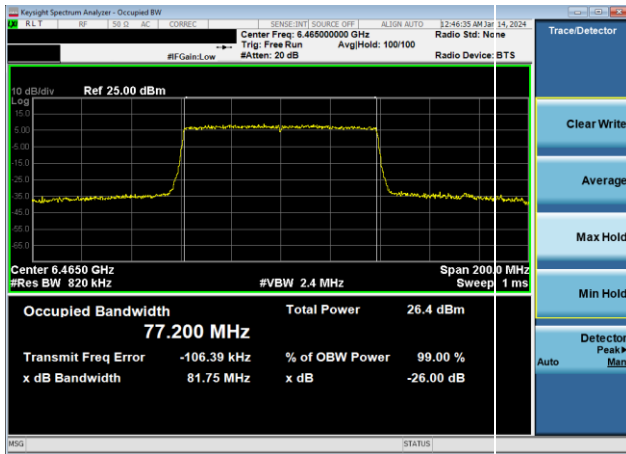


Plot 7-9. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS2)

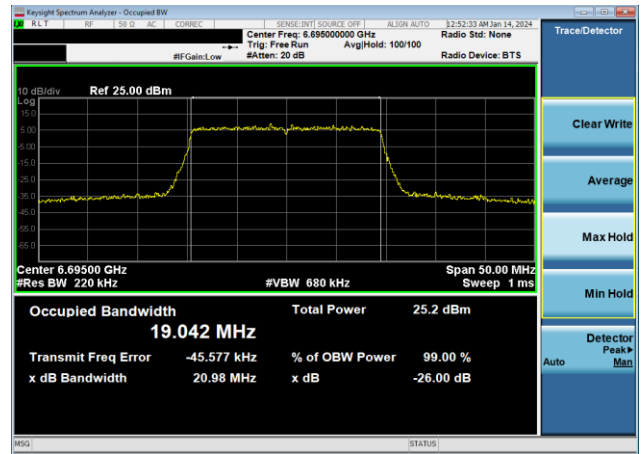


Plot 7-12. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS2)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 24 of 510

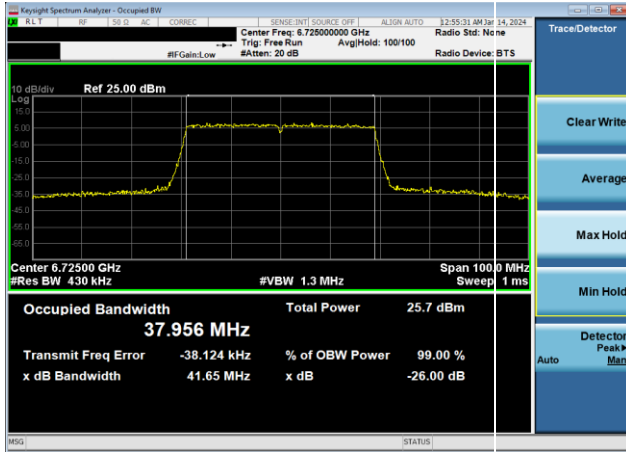


Plot 7-13. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS2)

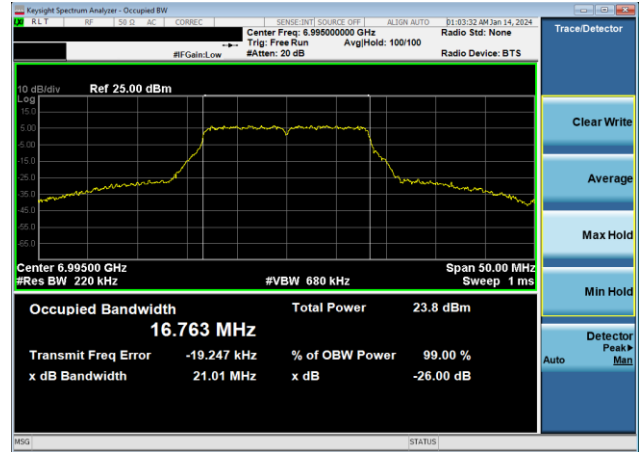


Plot 7-16. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 8) – Ch. 209, 12Mbps)

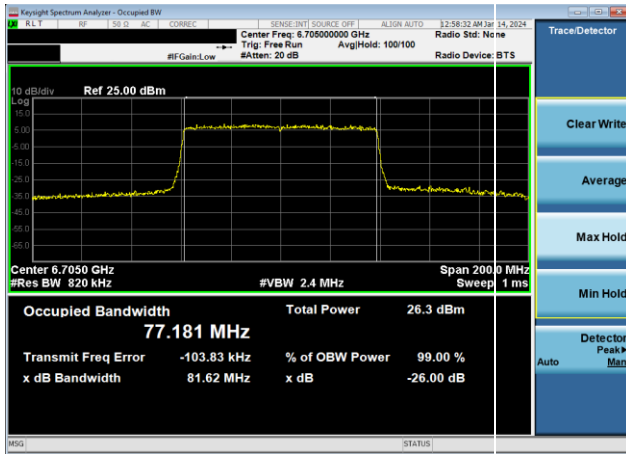


Plot 7-14. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS2)

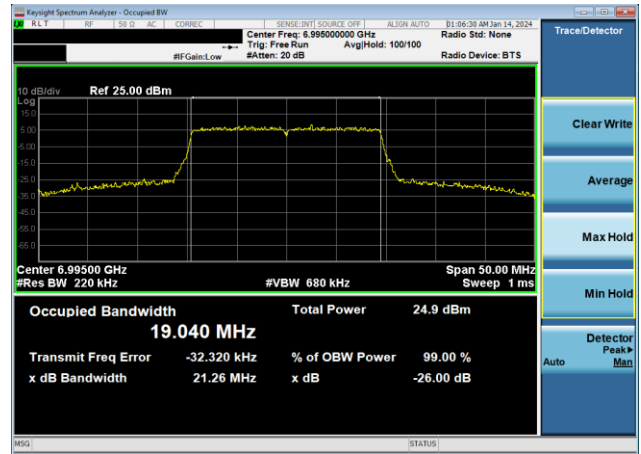

Plot 7-17. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS2)

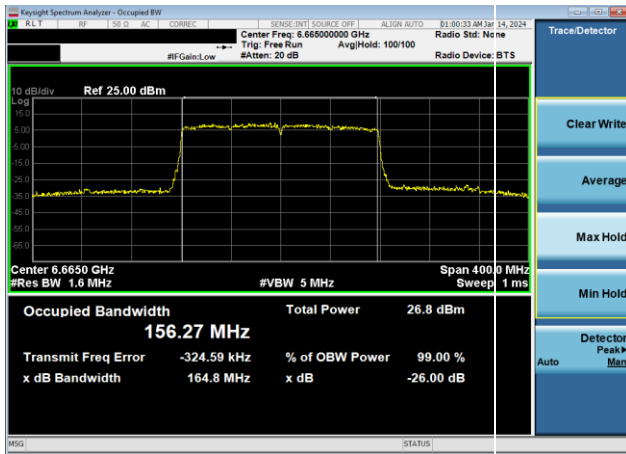


Plot 7-15. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS2)

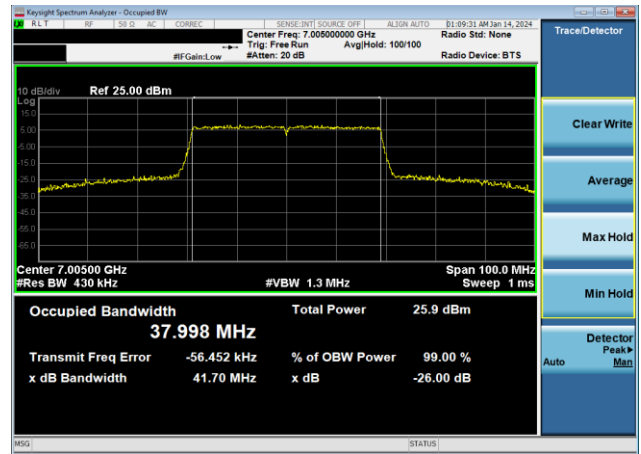


Plot 7-18. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS2)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 25 of 510

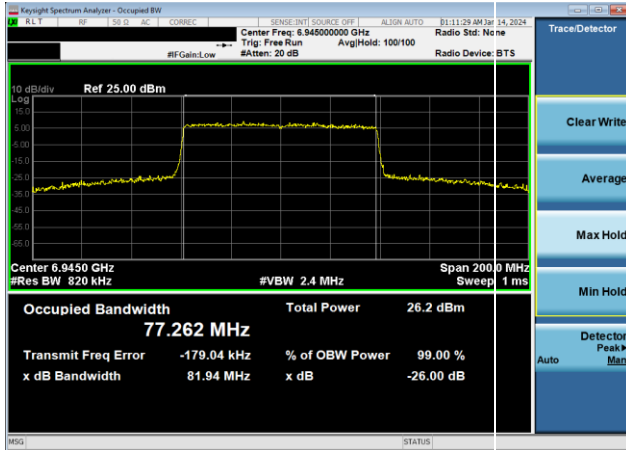


Plot 7-19. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz) 802.11ax (UNII Band 8) – Ch. 199, MCS2)

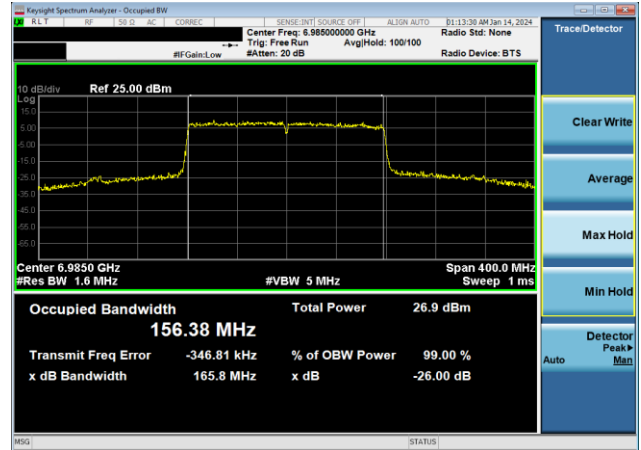


Plot 7-20. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz) 802.11ax (UNII Band 8) – Ch. 207, MCS2)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 26 of 510


Mid Data Rate

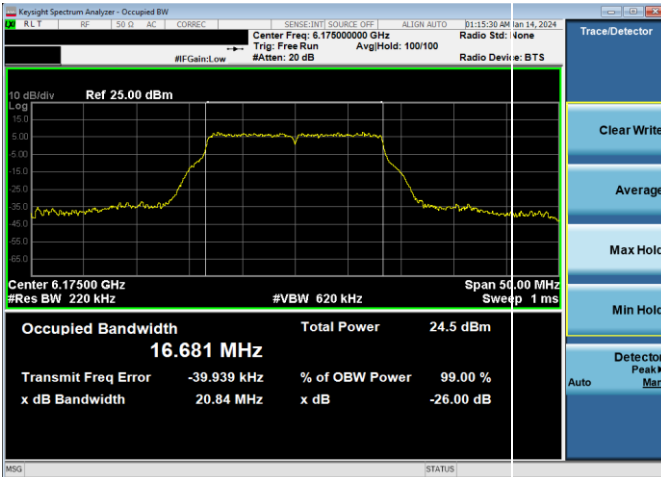


Plot 7-21. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 5) – Ch. 45, 24Mbps)

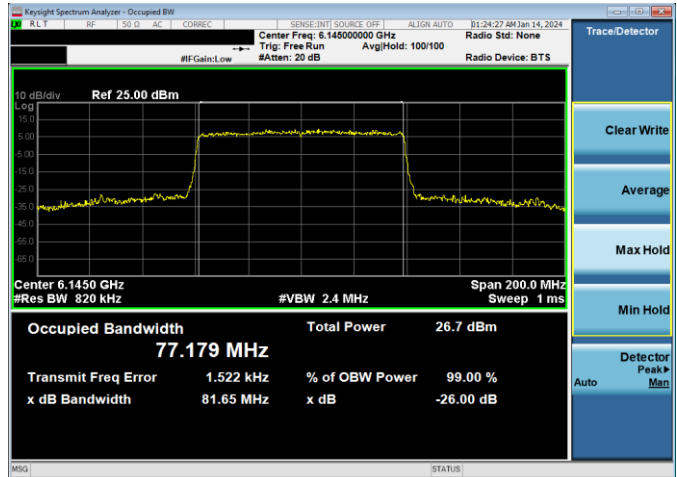


Plot 7-24. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS4)

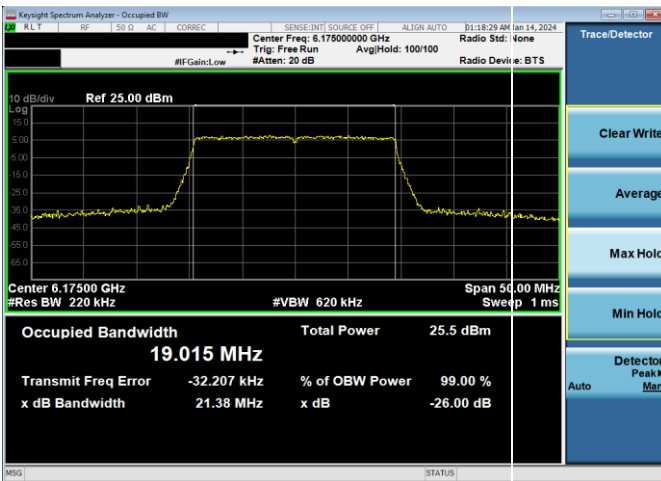


Plot 7-22. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS4)

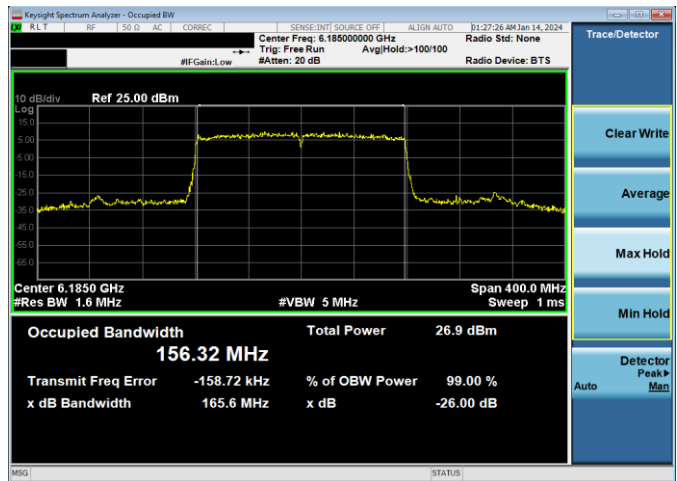

Plot 7-25. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS4)

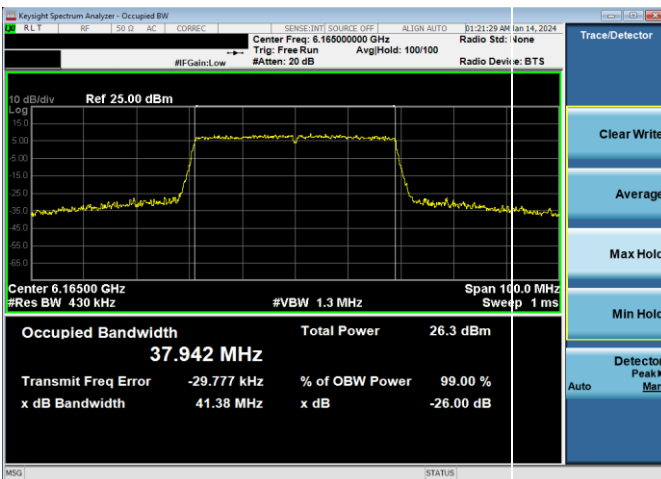


Plot 7-23. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS4)

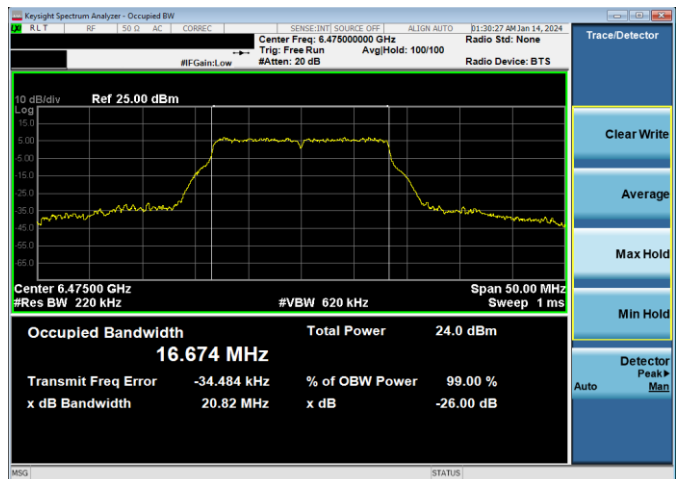


Plot 7-26. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 6) – Ch. 105, 24Mbps)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 27 of 510

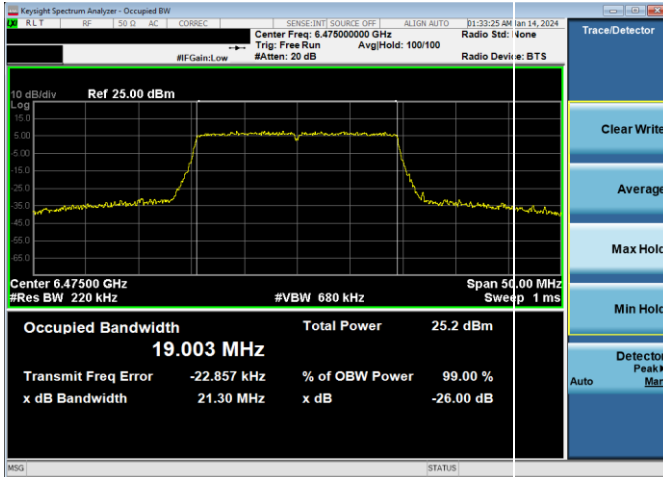


Plot 7-27. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS4)

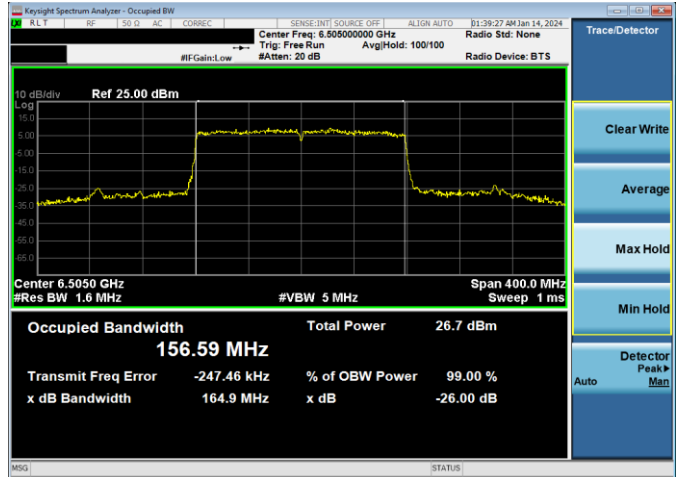


Plot 7-30. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS4)

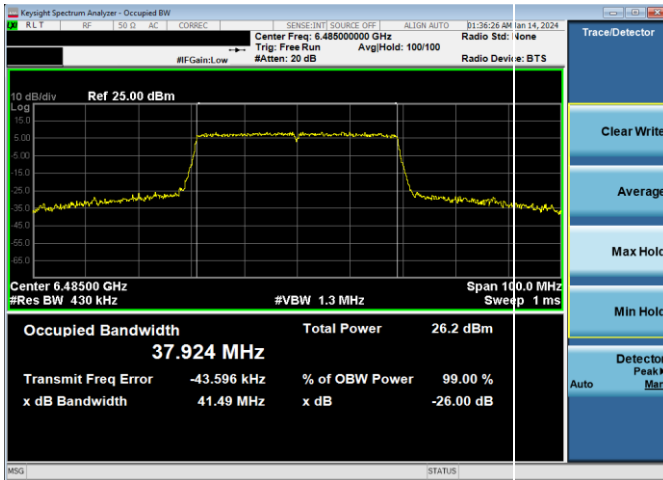


Plot 7-28. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS4)

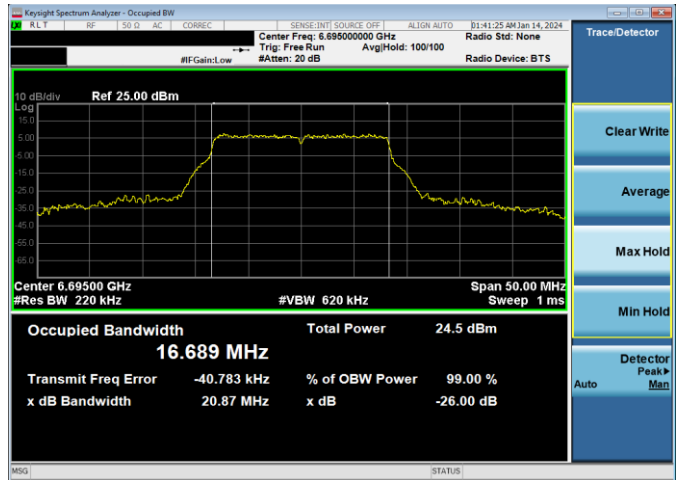

Plot 7-31. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 7) – Ch. 149, 24Mbps)

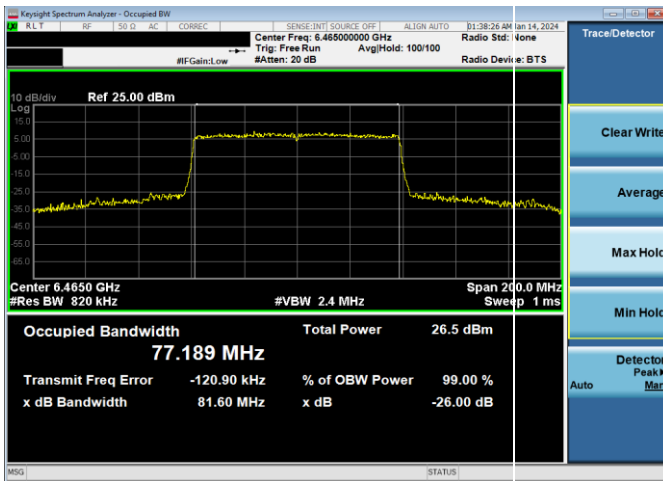


Plot 7-29. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS4)

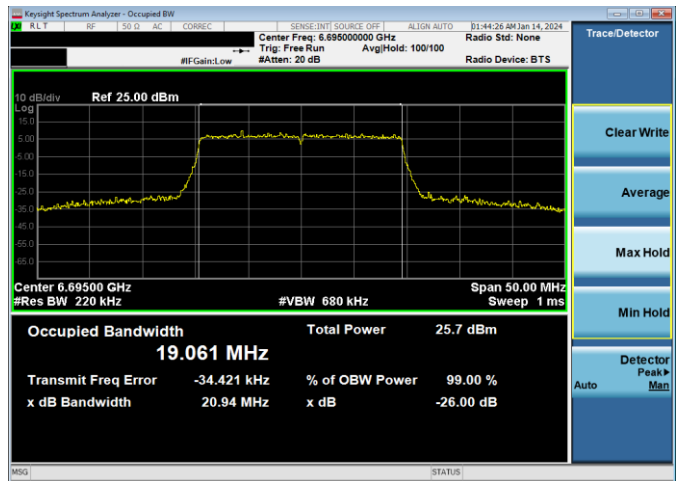


Plot 7-32. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS4)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 28 of 510

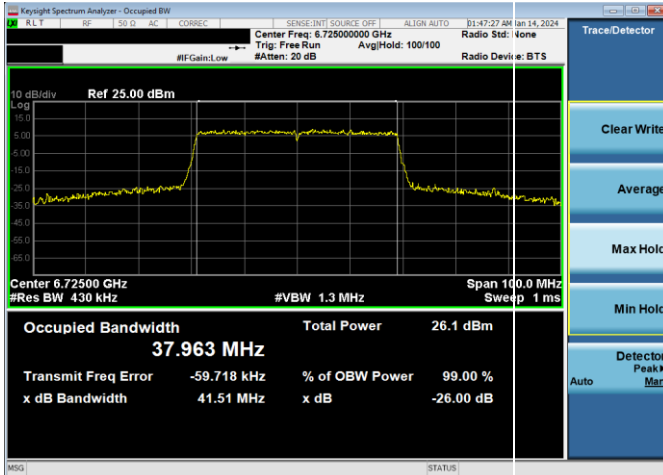


Plot 7-33. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS4)

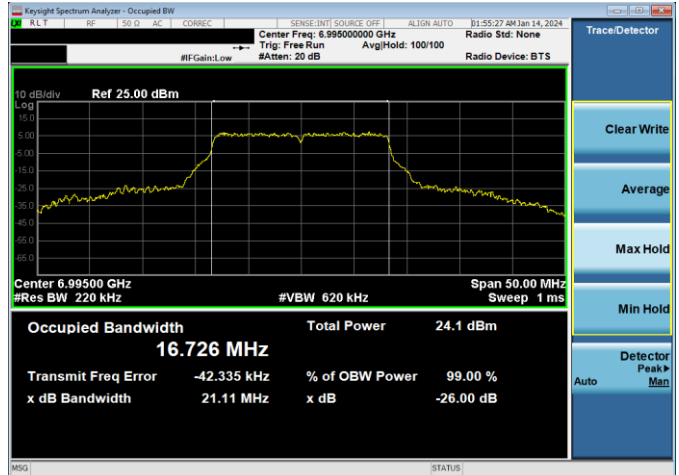


Plot 7-36. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 8) – Ch. 209, 24Mbps)

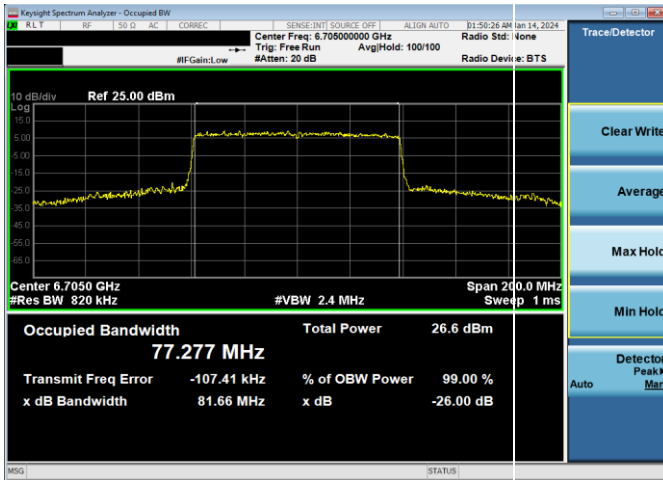


Plot 7-34. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS4)

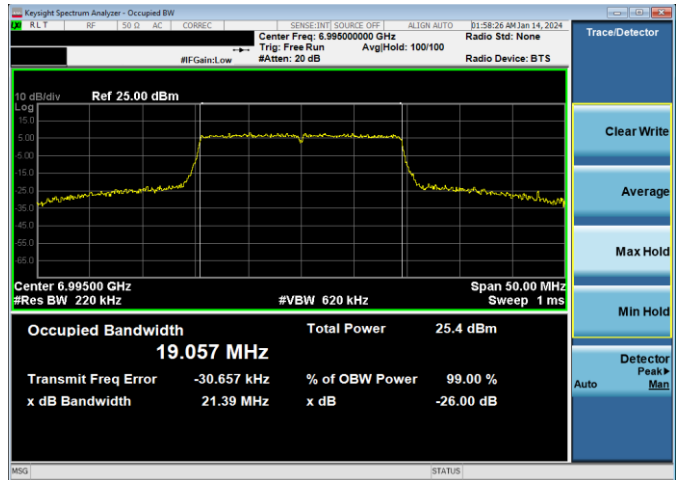

Plot 7-37. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS4)

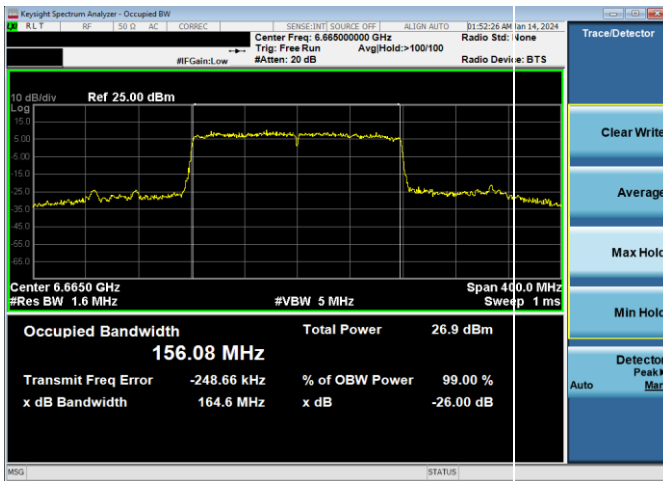


Plot 7-35. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS4)

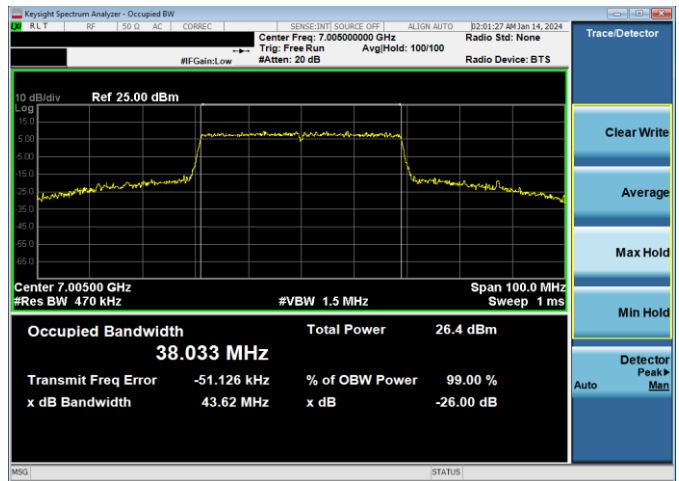

Plot 7-38. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS4)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 29 of 510

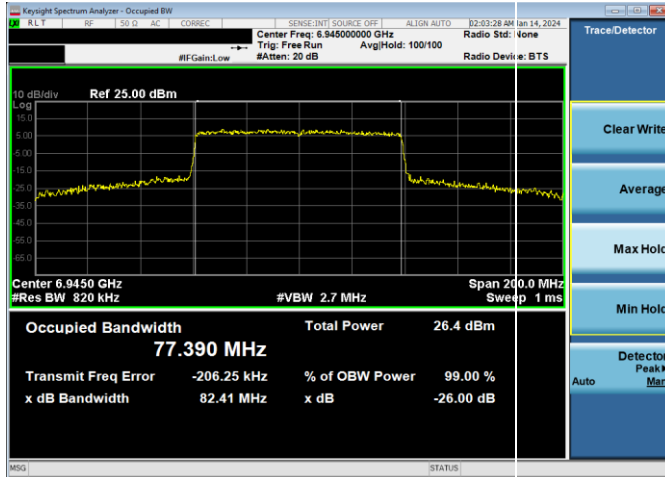


Plot 7-39. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz)
 802.11ax (UNII Band 8) – Ch. 199, MCS4)




Plot 7-40. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz)
 802.11ax (UNII Band 8) – Ch. 207, MCS4)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 30 of 510


High Data Rate

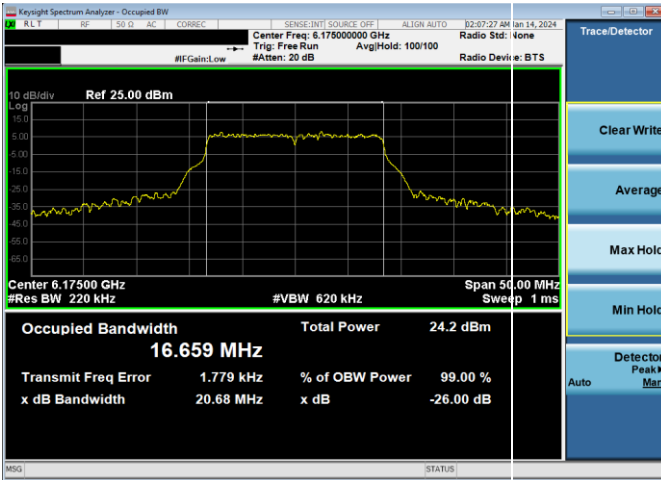


Plot 7-41. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

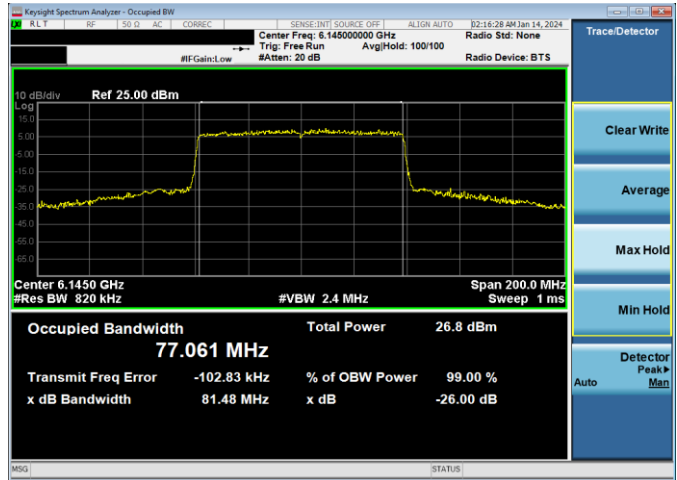


Plot 7-44. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)

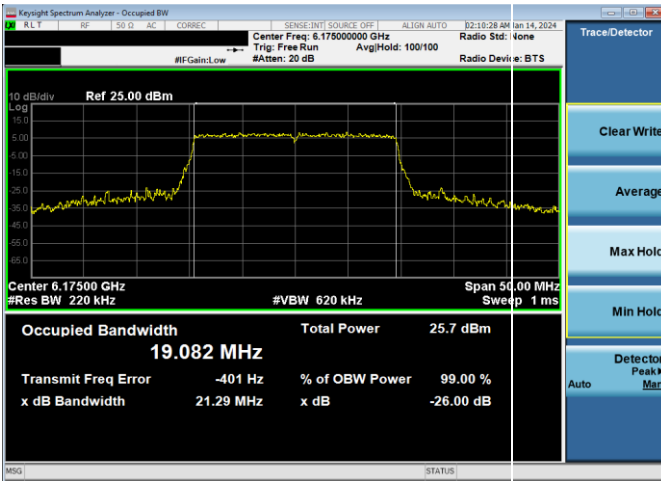

Plot 7-42. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)

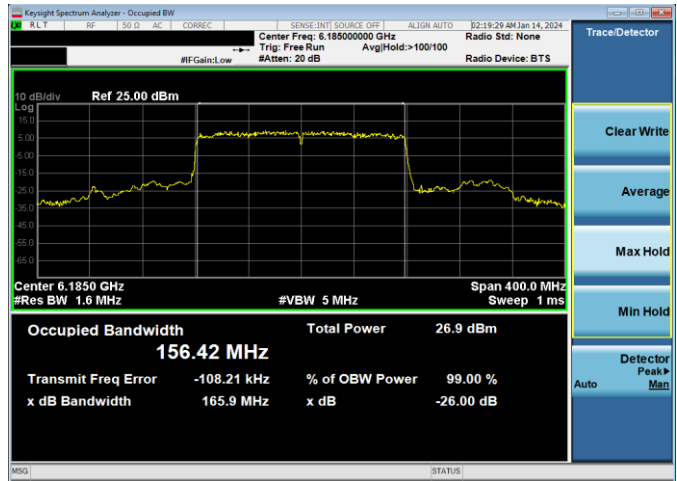

Plot 7-45. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)

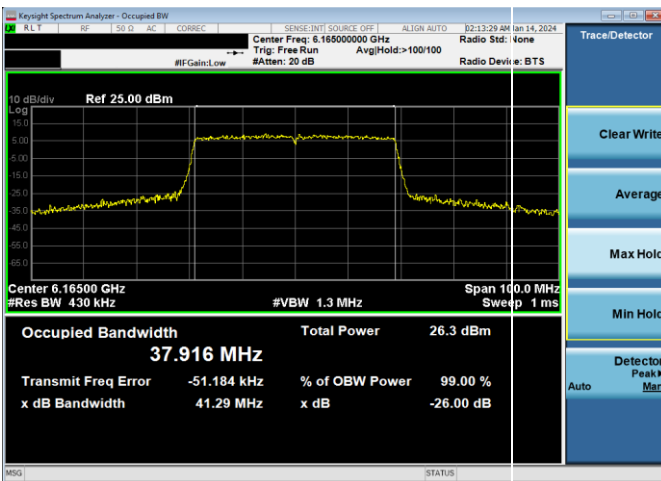


Plot 7-43. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)



Plot 7-46. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 6) – Ch. 105, 54Mbps)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 31 of 510

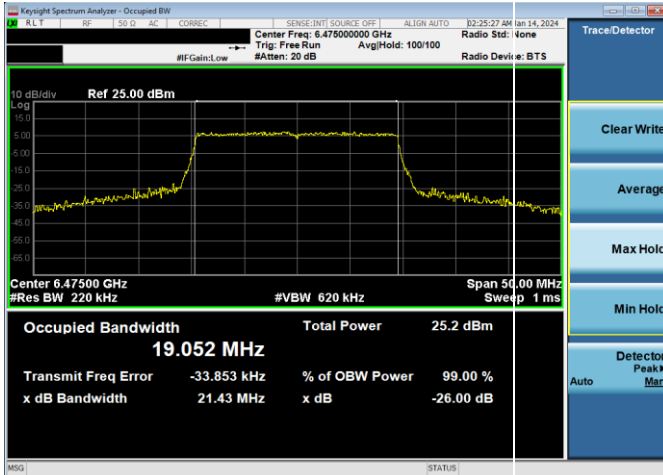


Plot 7-47. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS11)




Plot 7-50. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS11)

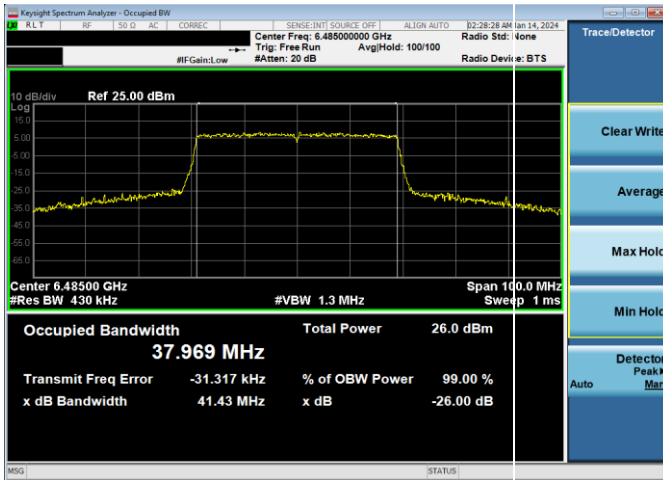


Plot 7-48. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS11)

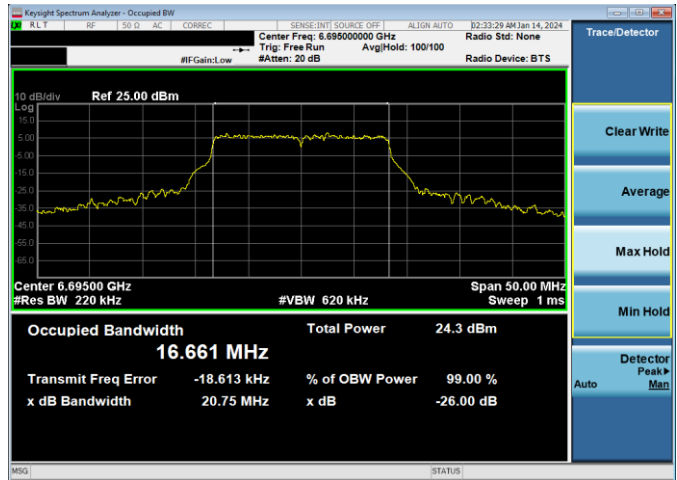

Plot 7-51. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 7) – Ch. 149, 54Mbps)

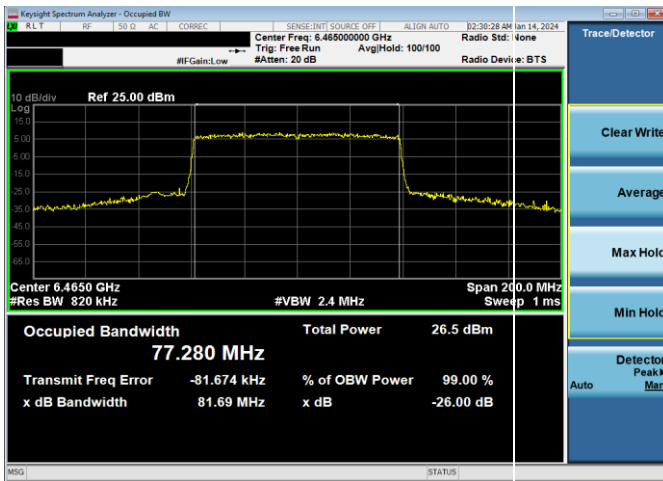


Plot 7-49. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS11)

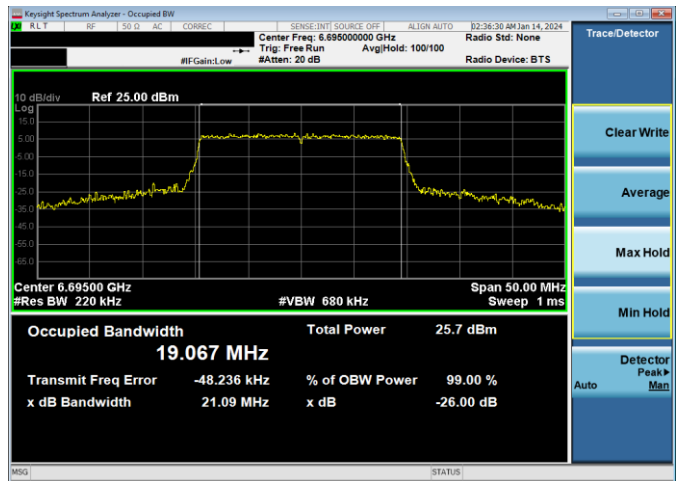


Plot 7-52. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 32 of 510

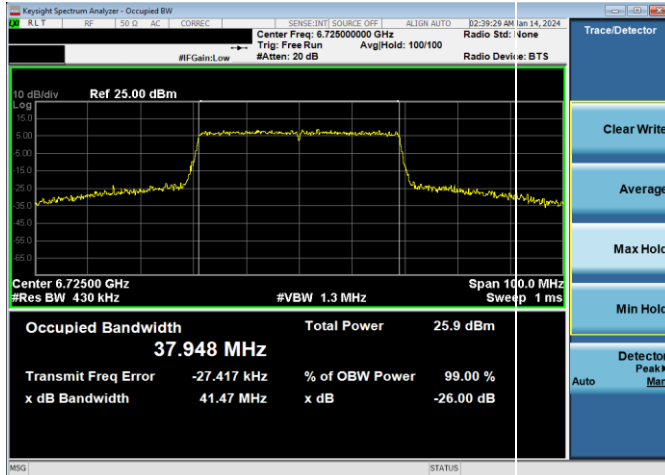


Plot 7-53. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

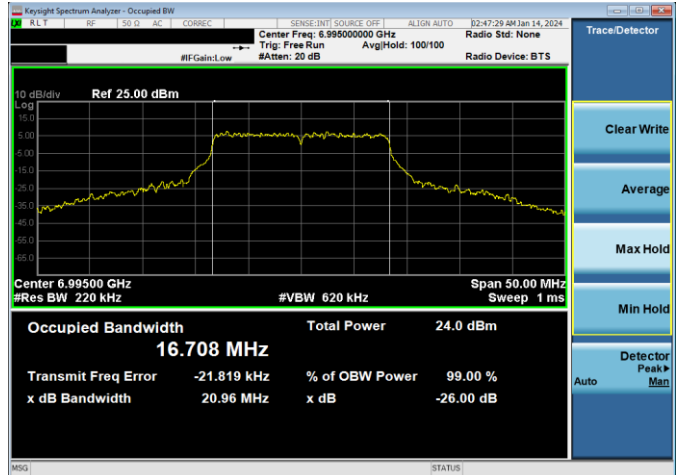


Plot 7-56. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11a (UNII Band 8) – Ch. 209, 54Mbps)

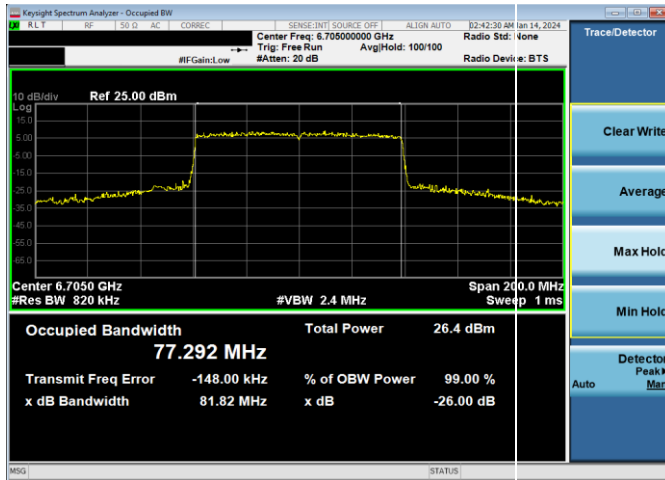

Plot 7-54. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)

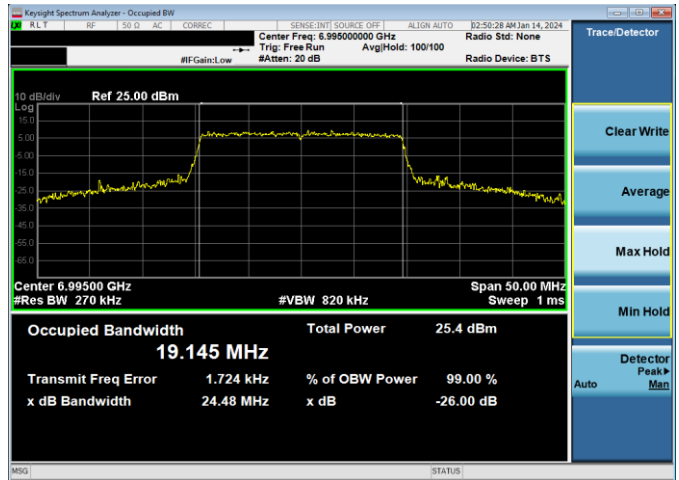

Plot 7-57. 26dB & 99% Bandwidth Plot Antenna WF5B (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS11)

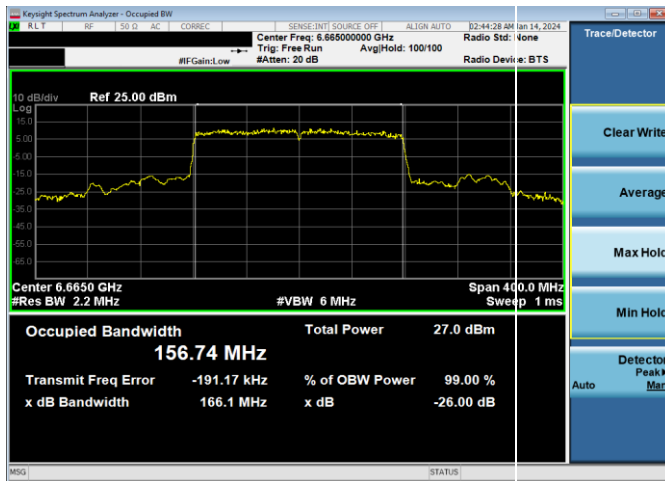


Plot 7-55. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)




Plot 7-58. 26dB & 99% Bandwidth Plot Antenna WF5B (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS11)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 33 of 510

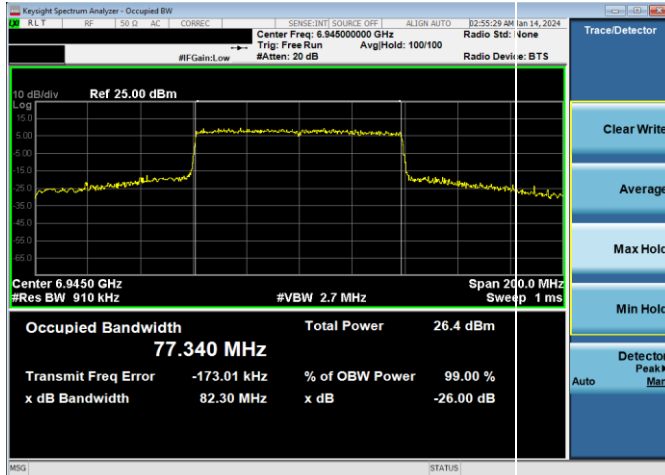

Plot 7-59. 26dB & 99% Bandwidth Plot Antenna WF5B (80MHz)
 802.11ax (UNII Band 8) – Ch. 199, MCS11)

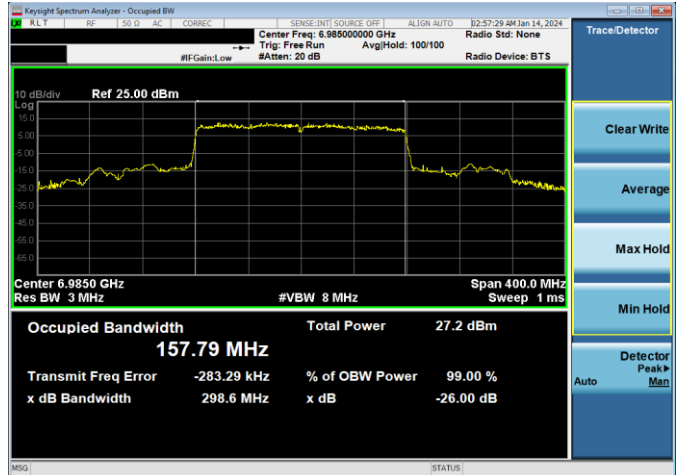

Plot 7-60. 26dB & 99% Bandwidth Plot Antenna WF5B (160MHz)
 802.11ax (UNII Band 8) – Ch. 207, MCS11)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 34 of 510

7.2.2 Antenna 4a 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	12	16.72	20.85	320	Pass
	6175	45	a	12	16.70	20.86	320	Pass
	6415	93	a	12	16.72	20.84	320	Pass
	5955	1	ax (20MHz)	24/25.8 (MCS2)	19.02	21.31	320	Pass
	6175	45	ax (20MHz)	24/25.8 (MCS2)	19.03	21.25	320	Pass
	6415	93	ax (20MHz)	24/25.8 (MCS2)	19.03	21.23	320	Pass
	5695	3	ax (40MHz)	49/51.6 (MCS2)	37.93	41.51	320	Pass
	6165	43	ax (40MHz)	49/51.6 (MCS2)	37.94	41.52	320	Pass
	6405	91	ax (40MHz)	49/51.6 (MCS2)	37.98	41.53	320	Pass
	5985	7	ax (80MHz)	102/108.1 (MCS2)	77.14	81.87	320	Pass
	6145	39	ax (80MHz)	102/108.1 (MCS2)	77.14	82.00	320	Pass
	6385	87	ax (80MHz)	102/108.1 (MCS2)	77.22	82.03	320	Pass
	6025	15	ax (160MHz)	183.8/216.2 (MCS2)	156.13	164.47	320	Pass
	6185	47	ax (160MHz)	183.8/216.2 (MCS2)	156.44	165.21	320	Pass
6345	79	ax (160MHz)	183.8/216.2 (MCS2)	156.38	165.51	320	Pass	
Band 6	6435	97	a	12	16.73	20.81	320	Pass
	6475	105	a	12	16.72	20.81	320	Pass
	6515	113	a	12	16.72	20.86	320	Pass
	6345	97	ax (20MHz)	24/25.8 (MCS2)	19.04	21.32	320	Pass
	6475	105	ax (20MHz)	24/25.8 (MCS2)	19.05	21.34	320	Pass
	6515	113	ax (20MHz)	24/25.8 (MCS2)	19.03	21.20	320	Pass
	6445	99	ax (40MHz)	49/51.6 (MCS2)	37.98	41.45	320	Pass
	6485	107	ax (40MHz)	49/51.6 (MCS2)	37.93	41.68	320	Pass
	6525	115	ax (40MHz)	49/51.6 (MCS2)	37.96	41.52	320	Pass
	6465	103	ax (80MHz)	102/108.1 (MCS2)	77.25	82.14	320	Pass
	6505	111	ax (160MHz)	183.8/216.2 (MCS2)	156.17	165.01	320	Pass
Band 7	6535	117	a	12	16.68	20.89	320	Pass
	6695	149	a	12	16.70	20.83	320	Pass
	6875	185	a	12	16.71	20.93	320	Pass
	6535	117	ax (20MHz)	24/25.8 (MCS2)	19.04	21.23	320	Pass
	6695	149	ax (20MHz)	24/25.8 (MCS2)	19.01	21.20	320	Pass
	6875	185	ax (20MHz)	24/25.8 (MCS2)	19.03	21.36	320	Pass
	6565	123	ax (40MHz)	49/51.6 (MCS2)	37.94	41.54	320	Pass
	6725	155	ax (40MHz)	49/51.6 (MCS2)	37.94	41.61	320	Pass
	6885	179	ax (40MHz)	49/51.6 (MCS2)	37.96	41.48	320	Pass
	6545	119	ax (80MHz)	102/108.1 (MCS2)	77.17	81.63	320	Pass
	6705	151	ax (80MHz)	102/108.1 (MCS2)	77.18	81.79	320	Pass
	6865	183	ax (80MHz)	102/108.1 (MCS2)	77.16	82.03	320	Pass
	6665	143	ax (160MHz)	183.8/216.2 (MCS2)	156.32	165.40	320	Pass
6825	175	ax (160MHz)	183.8/216.2 (MCS2)	156.44	165.93	320	Pass	
Band 8	6895	189	a	12	16.73	20.91	320	Pass
	6995	209	a	12	16.72	20.87	320	Pass
	7115	233	a	12	16.74	20.80	320	Pass
	6895	189	ax (20MHz)	24/25.8 (MCS2)	19.05	21.22	320	Pass
	6995	209	ax (20MHz)	24/25.8 (MCS2)	19.00	21.29	320	Pass
	7115	233	ax (20MHz)	24/25.8 (MCS2)	19.00	21.18	320	Pass
	6925	187	ax (40MHz)	49/51.6 (MCS2)	37.92	41.73	320	Pass
	7005	211	ax (40MHz)	49/51.6 (MCS2)	37.93	41.58	320	Pass
	7085	227	ax (40MHz)	49/51.6 (MCS2)	37.96	41.44	320	Pass
	6945	199	ax (80MHz)	102/108.1 (MCS2)	77.23	81.72	320	Pass
	7025	215	ax (80MHz)	102/108.1 (MCS2)	77.27	81.89	320	Pass
6985	207	ax (160MHz)	183.8/216.2 (MCS2)	156.24	164.80	320	Pass	

Table 7-5. Conducted Bandwidth Measurements Antenna 4a (Low Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 35 of 510

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	24	16.68	20.82	320	Pass
	6175	45	a	24	16.68	20.87	320	Pass
	6415	93	a	24	16.66	20.85	320	Pass
	5955	1	ax (20MHz)	49/51.6 (MCS4)	19.04	21.01	320	Pass
	6175	45	ax (20MHz)	49/51.6 (MCS4)	19.02	21.38	320	Pass
	6415	93	ax (20MHz)	49/51.6 (MCS4)	19.02	21.22	320	Pass
	5965	3	ax (40MHz)	98/103.2 (MCS4)	37.96	41.34	320	Pass
	6165	43	ax (40MHz)	98/103.2 (MCS4)	37.92	41.32	320	Pass
	6405	91	ax (40MHz)	98/103.2 (MCS4)	37.93	41.68	320	Pass
	5985	7	ax (80MHz)	204/216.2 (MCS4)	77.14	81.76	320	Pass
	6145	39	ax (80MHz)	204/216.2 (MCS4)	77.08	81.72	320	Pass
	6385	87	ax (80MHz)	204/216.2 (MCS4)	77.21	81.91	320	Pass
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	156.10	164.65	320	Pass
	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	156.11	165.05	320	Pass
6345	79	ax (160MHz)	367.5/432.4 (MCS4)	156.25	165.07	320	Pass	
Band 6	6435	97	a	24	16.68	20.83	320	Pass
	6475	105	a	24	16.68	20.88	320	Pass
	6515	113	a	24	16.66	20.82	320	Pass
	6435	97	ax (20MHz)	49/51.6 (MCS4)	19.02	21.36	320	Pass
	6475	105	ax (20MHz)	49/51.6 (MCS4)	19.02	21.26	320	Pass
	6515	113	ax (20MHz)	49/51.6 (MCS4)	19.02	21.15	320	Pass
	6445	99	ax (40MHz)	98/103.2 (MCS4)	37.92	41.23	320	Pass
	6485	107	ax (40MHz)	98/103.2 (MCS4)	37.92	41.32	320	Pass
	6525	115	ax (40MHz)	98/103.2 (MCS4)	37.92	41.45	320	Pass
	6465	103	ax (80MHz)	204/216.2 (MCS4)	77.29	81.83	320	Pass
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	156.14	165.41	320	Pass
Band 7	6535	117	a	24	16.67	20.87	320	Pass
	6695	149	a	24	16.68	20.87	320	Pass
	6875	185	a	24	16.67	20.82	320	Pass
	6535	117	ax (20MHz)	49/51.6 (MCS4)	19.00	21.10	320	Pass
	6695	149	ax (20MHz)	49/51.6 (MCS4)	19.01	21.00	320	Pass
	6875	185	ax (20MHz)	49/51.6 (MCS4)	19.06	21.13	320	Pass
	6565	123	ax (40MHz)	98/103.2 (MCS4)	37.91	41.23	320	Pass
	6725	155	ax (40MHz)	98/103.2 (MCS4)	37.91	41.37	320	Pass
	6885	179	ax (40MHz)	98/103.2 (MCS4)	37.92	41.16	320	Pass
	6545	119	ax (80MHz)	204/216.2 (MCS4)	77.15	81.80	320	Pass
	6705	151	ax (80MHz)	204/216.2 (MCS4)	77.20	81.54	320	Pass
	6865	183	ax (80MHz)	204/216.2 (MCS4)	77.21	82.05	320	Pass
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	156.17	164.63	320	Pass
	6825	175	ax (160MHz)	367.5/432.4 (MCS4)	156.33	165.00	320	Pass
Band 8	6895	189	a	24	16.67	20.82	320	Pass
	6995	209	a	24	16.67	20.76	320	Pass
	7115	233	a	24	16.68	20.74	320	Pass
	6895	189	ax (20MHz)	49/51.6 (MCS4)	19.02	21.27	320	Pass
	6995	209	ax (20MHz)	49/51.6 (MCS4)	19.03	21.19	320	Pass
	7115	233	ax (20MHz)	49/51.6 (MCS4)	19.03	21.27	320	Pass
	6885	187	ax (40MHz)	98/103.2 (MCS4)	37.92	41.23	320	Pass
	7005	211	ax (40MHz)	98/103.2 (MCS4)	37.93	41.31	320	Pass
	7085	227	ax (40MHz)	98/103.2 (MCS4)	37.92	41.36	320	Pass
	6945	199	ax (80MHz)	204/216.2 (MCS4)	77.25	81.82	320	Pass
	7025	215	ax (80MHz)	204/216.2 (MCS4)	77.28	81.54	320	Pass
6985	207	ax (160MHz)	367.5/432.4 (MCS4)	156.33	165.36	320	Pass	

Table 7-6. Conducted Bandwidth Measurements Antenna 4a (Mid Data Rate)


FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 36 of 510

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.63	20.73	320	Pass
	6175	45	a	54	16.64	20.63	320	Pass
	6415	93	a	54	16.65	20.66	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	19.04	21.24	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.04	21.30	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.02	21.28	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.87	41.54	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.87	41.22	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.92	41.35	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.15	81.55	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.20	81.85	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.23	81.58	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.18	165.58	320	Pass
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.47	165.19	320	Pass
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.15	165.94	320	Pass	
Band 6	6435	97	a	54	16.66	20.69	320	Pass
	6475	105	a	54	16.66	20.64	320	Pass
	6515	113	a	54	16.65	20.68	320	Pass
	6435	97	ax (20MHz)	135/143.4 (MCS11)	19.04	21.13	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.04	21.19	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.02	21.35	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.95	41.36	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.85	41.20	320	Pass
	6525	115	ax (40MHz)	271/286.8 (MCS11)	37.91	41.09	320	Pass
	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.31	81.25	320	Pass
6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.36	165.09	320	Pass	
Band 7	6535	117	a	54	16.64	20.59	320	Pass
	6695	149	a	54	16.66	20.70	320	Pass
	6875	185	a	54	16.66	20.70	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.08	21.22	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.06	21.11	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.05	21.32	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.88	41.19	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.92	41.58	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.91	41.32	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	77.18	81.78	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.10	81.78	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	77.24	81.68	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.03	165.10	320	Pass
	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.46	165.35	320	Pass
Band 8	6895	189	a	54	16.66	20.71	320	Pass
	6995	209	a	54	16.66	20.75	320	Pass
	7115	233	a	54	16.68	20.77	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	19.07	21.26	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.03	21.27	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	19.03	21.25	320	Pass
	6885	187	ax (40MHz)	271/286.8 (MCS11)	37.94	41.35	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	37.92	41.22	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	37.89	41.27	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.21	81.60	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.18	81.34	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.32	164.97	320	Pass


Table 7-7. Conducted Bandwidth Measurements Antenna 4a (High Data Rate)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 37 of 510

Low Data Rate

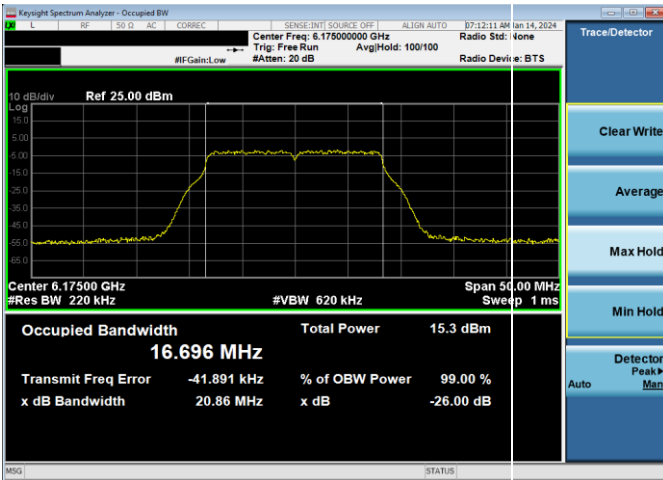


Plot 7-61. 26dB & 99% Bandwidth Plot Antenna 4a (20MHz 802.11a (UNII Band 5) – Ch. 45, 12Mbps)

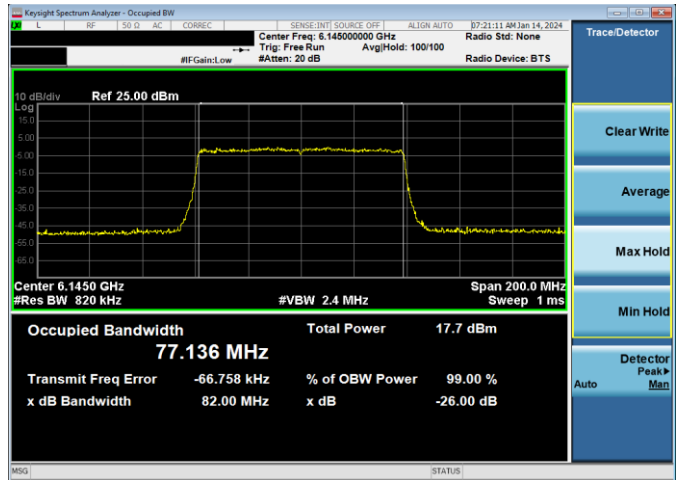


Plot 7-64. 26dB & 99% Bandwidth Plot Antenna 4a (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS2)




Plot 7-62. 26dB & 99% Bandwidth Plot Antenna 4a (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS2)

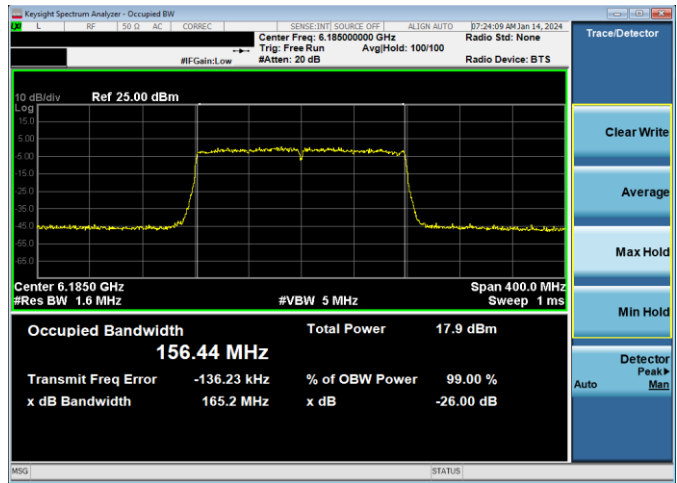

Plot 7-65. 26dB & 99% Bandwidth Plot Antenna 4a (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS2)

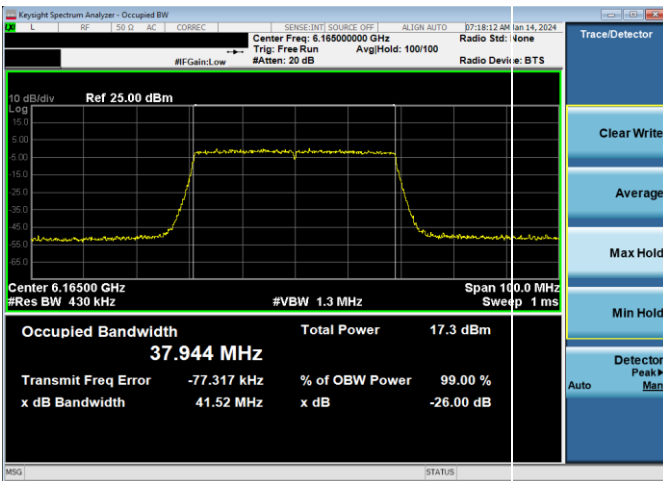

Plot 7-63. 26dB & 99% Bandwidth Plot Antenna 4a (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS2)

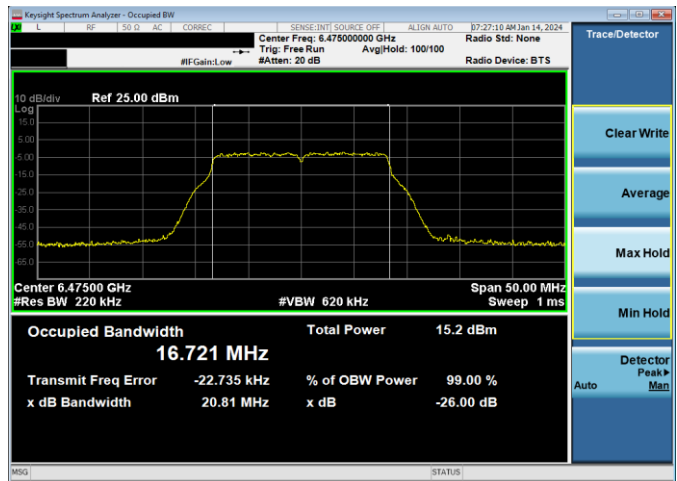

Plot 7-66. 26dB & 99% Bandwidth Plot Antenna 4a (20MHz 802.11a (UNII Band 6) – Ch. 105, 12Mbps)

FCC ID: BCGA2837 IC: 579C-A2837		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2311270068-24-R2.BCG	Test Dates: 11/28/2023 - 04/04/2024	EUT Type: Tablet Device	Page 38 of 510