

# FCC and ISED Test Report

Apple Inc  
Model: A2901

In accordance with FCC 47 CFR Part 15C, ISED  
RSS-247 and ISED RSS-GEN  
(2.4 GHz WLAN)

Prepared for: Apple Inc  
One Apple Park Way  
Cupertino  
California  
95014,  
USA



Add value.  
Inspire trust.

FCC ID: BCGA2901

IC: 579C-A2901

## COMMERCIAL-IN-CONFIDENCE

Document 75958006-08 Issue 01

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Simon Bennett	Head Of New Service Development	Authorised Signatory	28 April 2023

Signatures in this approval box have checked this document in line with the requirements of TUV SUD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Lauren Walters	28 April 2023	

FCC Accreditation

90987 Octagon House, Fareham Test Laboratory

ISED Accreditation

12669A Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2021, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3.



#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2023 TÜV SÜD. This report relates only to the actual item/items tested.

#### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuvsud.com/en](http://www.tuvsud.com/en)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Product Information .....	4
1.5	Deviations from the Standard.....	5
1.6	EUT Modification Record .....	5
1.7	Test Location .....	6
<b>2</b>	<b>Test Details .....</b>	<b>7</b>
2.1	Restricted Band Edges.....	7
2.2	Emission Bandwidth .....	39
2.3	Maximum Conducted Output Power .....	53
2.4	Authorised Band Edges .....	67
2.5	Spurious Radiated Emissions .....	77
2.6	Power Spectral Density.....	105
<b>3</b>	<b>Measurement Uncertainty .....</b>	<b>113</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	28 April 2023

**Table 1**

## 1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2901
Serial Number(s)	CMWNHDHDYJ, QXM2RLKFW6 and PXC62W93WY
Hardware Version(s)	REV 1.0
Software Version(s)	22E61680r, 22E62160j and 22E61680r
Number of Samples Tested	3
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2021 ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021)
Start of Test	31-January-2023
Finish of Test	04-April-2023
Name of Engineer(s)	Ioan-Alexandru Bogatu, Akhil Rajendran Bhaskaran Nair, Thilanka Savirunath Liyanage, Nicolae Mihailiuc, Morsalin Hossain, Faisal Malyar, Mustufa Murad, Elliot Callender, James Woods and Michael Evans
Related Document(s)	ANSI C63.10 (2020) ANSI C63.10 (2013) KDB 662911 D01 v02r01 ANSI C63.4 (2014)



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: 2.4 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205, 3.3	3.3	8.10	Restricted Band Edges	Pass	
2.2	15.247 (a)(2)	5.2	6.7	Emission Bandwidth	Pass	
2.3	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	
2.5	15.209 and 15.247 (d)	3.3 and 5.5	6.13 and 8.9	Spurious Radiated Emissions	Pass	
2.6	15.247 (e)	5.2	6.12	Power Spectral Density	Pass	

**Table 2**



## 1.4 Product Information

### 1.4.1 Technical Description

The equipment under test (EUT) was an Apple desktop computer with Bluetooth®, Bluetooth® Low Energy, Thread and IEEE 802.11 a/b/g/n/ac/ax Wi-Fi capabilities in the 2.4 GHz, 5 GHz and 6 GHz bands.

### 1.4.2 Test Modes

The EUT's 2.4 GHz 802.11 radio supports SISO (Single Input/Single Output) and 2x2 MIMO (Multiple Input/Multiple Output). It supports 802.11b and g for SISO and 802.11n and ax at 20 MHz channel bandwidths for SISO and MIMO. 802.11ax supports RU 26/52/106/242.

The EUT uses different output powers per core dependent on how many cores are used. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differs.

After preliminary investigations were performed, the EUT was therefore tested in the following worst-case modes:

SISO Modes (Core 0):

- 802.11b 1 Mbps
- 802.11g 12 Mbps
- 802.11n HT20 MCS2
- 802.11ax HE20 MCS2x1 SU, RU26/52/106\*

2x2 MIMO Modes (Core 0 + Core 1):

- 802.11n HT20 MCS2 – CDD
- 802.11ax HE20 MCS2x1 CDD SU, RU26/52/106\*

\*Note: The RU offset for bottom and middle channels were placed in the lowest position and on the top channel, the offset was placed in the upper most position.

### 1.4.3 Test Set-up

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables was known and compensated for in any conducted measurements.

For all tests, the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

All testing was performed with the EUT powered via a 120 V AC, 60 Hz source.

### 1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	2400 to 2480	3.11	0.71
Core 1	2400 to 2480	0.93	0.71

Table 3



**1.5 Deviations from the Standard**

No deviations from the applicable test standard were made during testing.

**1.6 EUT Modification Record**

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2901, Serial Number: CMWNHDHDYJ			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2901, Serial Number: QXM2RLKFW6			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2901, Serial Number: PXC62W93WY			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 4**



## 1.7 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz WLAN		
Restricted Band Edges	Ioan-Alexandru Bogatu, Akhil Rajendran Bhaskaran Nair, Thilanka Savirunath Liyanage, Nicolae Mihailiuc, Morsalin Hossain and Faisal Malyar	UKAS
Emission Bandwidth	Mustufa Murad	UKAS
Maximum Conducted Output Power	Mustufa Murad	UKAS
Authorised Band Edges	Ioan-Alexandru Bogatu, Akhil Rajendran Bhaskaran Nair, Thilanka Savirunath Liyanage, Nicolae Mihailiuc, Morsalin Hossain and Faisal Malyar	UKAS
Spurious Radiated Emissions	Elliot Callender, James Woods and Michael Evans	UKAS
Power Spectral Density	Mustufa Murad	UKAS

**Table 5**

Office Address:

TÜV SÜD  
Concorde Park  
Concorde Way  
Fareham  
Hampshire  
PO15 5FG  
United Kingdom



## 2 Test Details

### 2.1 Restricted Band Edges

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205  
ISED RSS-247, Clause 3.3  
ISED RSS-GEN, Clause 8.10

#### 2.1.2 Equipment Under Test and Modification State

A2901, S/N: CMWNHDHDYJ - Modification State 0

#### 2.1.3 Date of Test

31-January-2023 to 06-February-2023

#### 2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 6.10.5 and 11.12.1.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 11.12.2.5.2.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

#### 2.1.5 Environmental Conditions

Ambient Temperature	21.9 - 24.2 °C
Relative Humidity	33.6 - 44.8 %





**2.1.6 Test Results**

2.4 GHz WLAN

20 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBuV/m)
802.11b	1 Mbps	-	-	2412	2390	58.78	51.11
802.11g	24 Mbps	-	-	2412	2390	66.07	51.47
802.11n HT20	MCS7	-	-	2412	2390	68.94	50.22
802.11ax HE20	MCS2x1	SU	-	2412	2390	65.38	51.45
802.11ax HE20	MCS9x1	106	53	2412	2390	69.02	45.70
802.11b	1 Mbps	-	-	2462	2483.5	55.12	44.70
802.11b	1 Mbps	-	-	2467	2483.5	59.44	51.11
802.11b	1 Mbps	-	-	2472	2483.5	56.15	51.16
802.11g	12 Mbps	-	-	2462	2483.5	66.37	51.42
802.11g	54 Mbps	-	-	2467	2483.5	69.47	50.24
802.11g	54 Mbps	-	-	2472	2483.5	64.61	51.29
802.11n HT20	MCS4	-	-	2462	2483.5	67.81	51.30
802.11n HT20	MCS4	-	-	2467	2483.5	65.41	51.47
802.11n HT20	MCS2	-	-	2472	2483.5	63.81	50.96
802.11ax HE20	MCS9x1	SU	-	2462	2483.5	68.24	50.95
802.11ax HE20	MCS9x1	106	54	2462	2483.5	68.03	47.74
802.11ax HE20	MCS4x1	SU	-	2467	2483.5	65.50	51.47
802.11ax HE20	MCS9x1	106	53	2467	2483.5	68.68	49.60
802.11ax HE20	MCS2x1	SU	-	2472	2483.5	65.30	51.48
802.11ax HE20	MCS9x1	52	37	2472	2483.5	69.24	50.76

**Table 6 - SISO Restricted Band Edge Results**

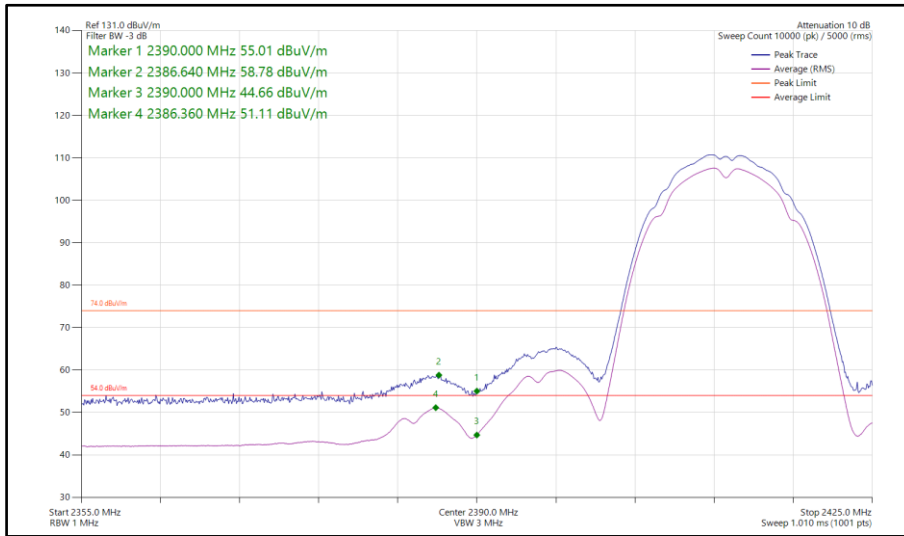


Figure 1 - 802.11b, SISO, Core 0 - 2412 MHz,  
Band Edge Frequency 2390 MHz



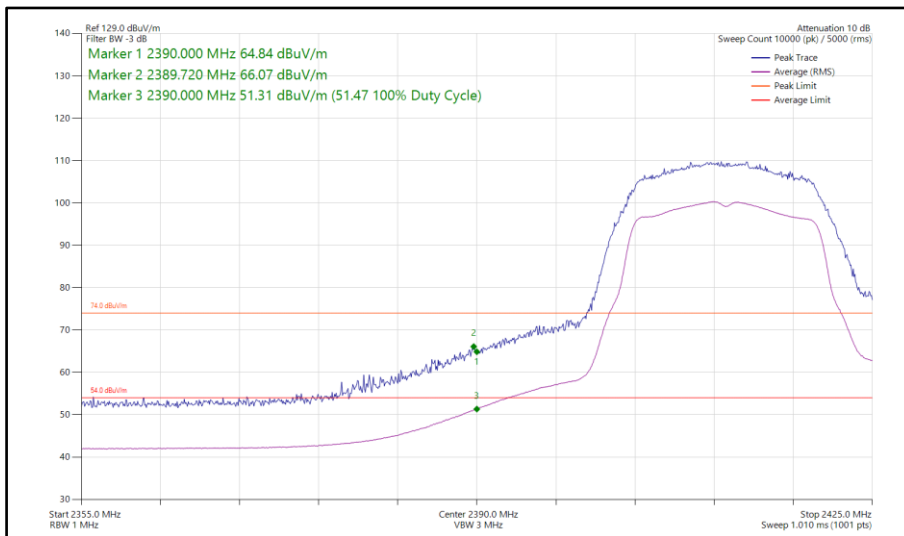



Figure 2 - 802.11g, SISO, Core 0 - 2412 MHz,  
Band Edge Frequency 2390 MHz

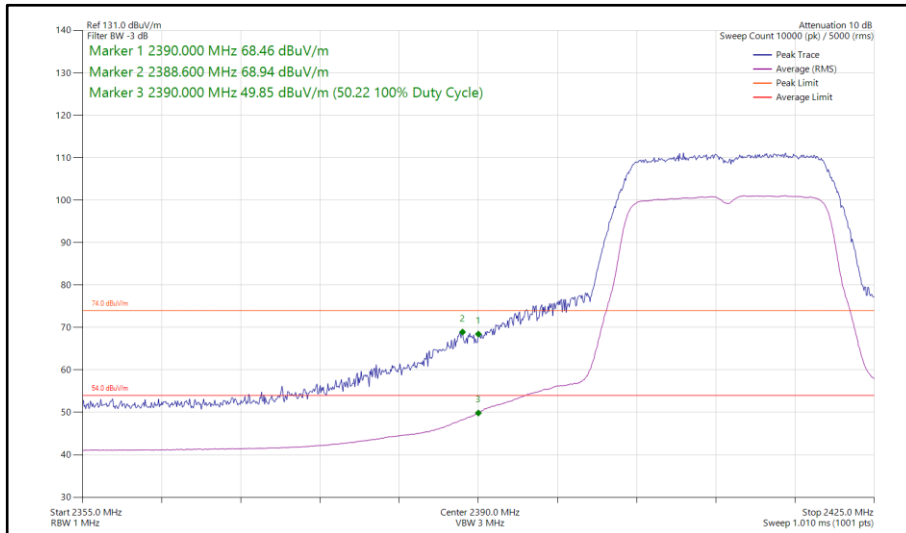


**Figure 3 - 802.11n, HT20, SISO, Core 0 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

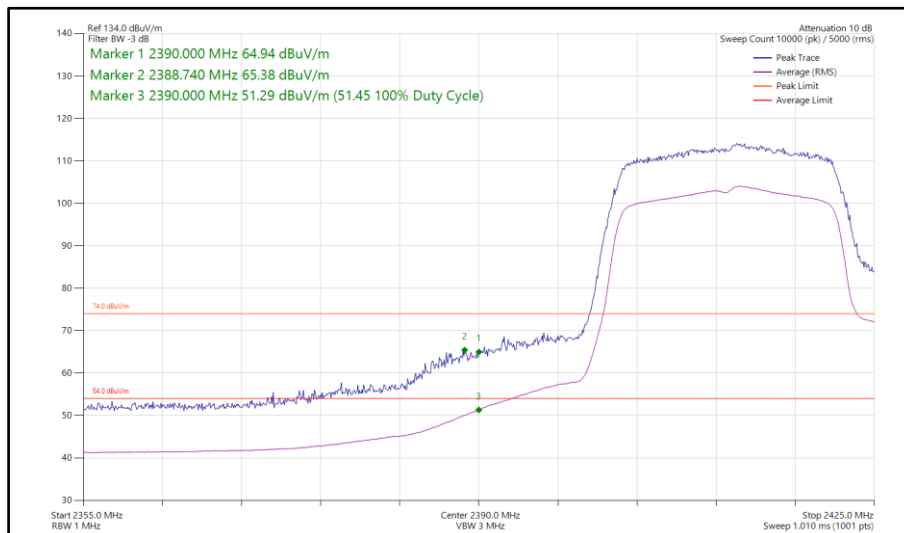


**Figure 4 - 802.11ax, HE20, SU, SISO, Core 0 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

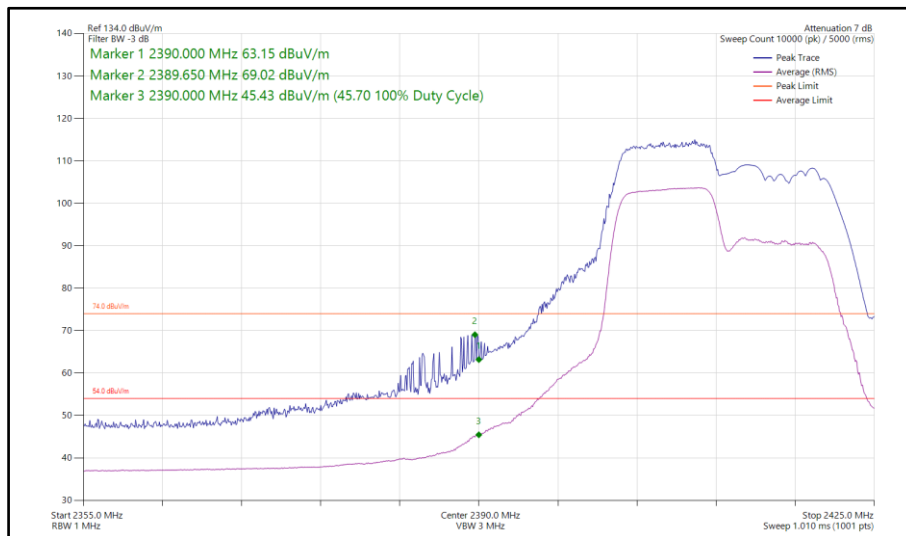


**Figure 5 - 802.11ax, HE20, RU 106-53, SISO, Core 0 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

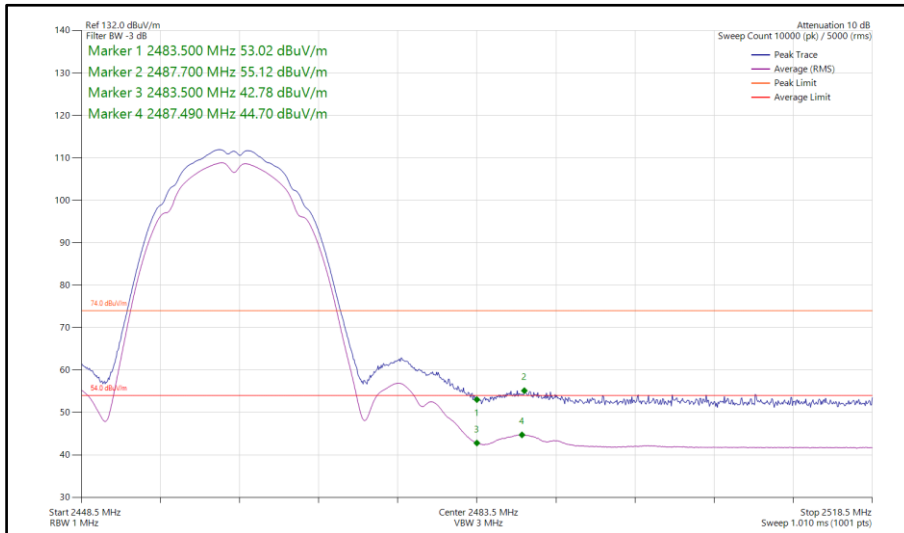


**Figure 6 - 802.11b, SISO, Core 0 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

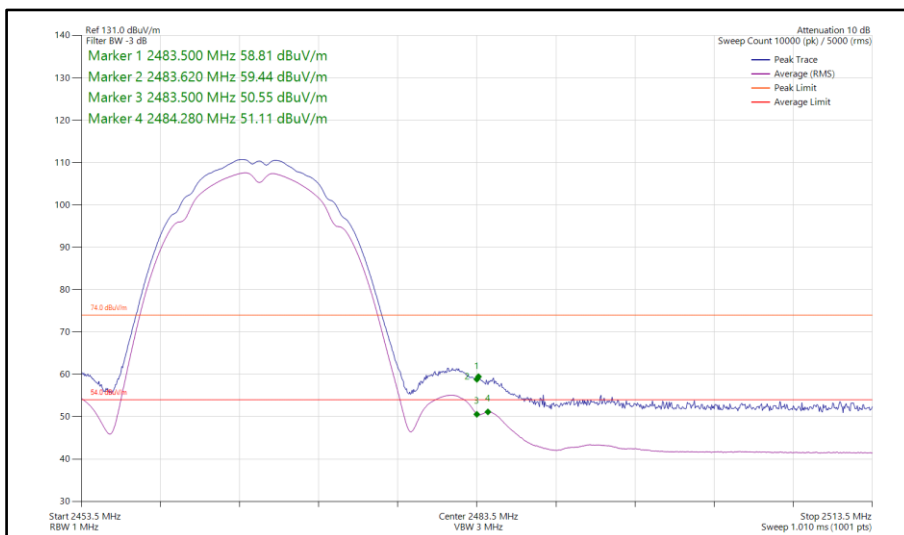


**Figure 7 - 802.11b, SISO, Core 0 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

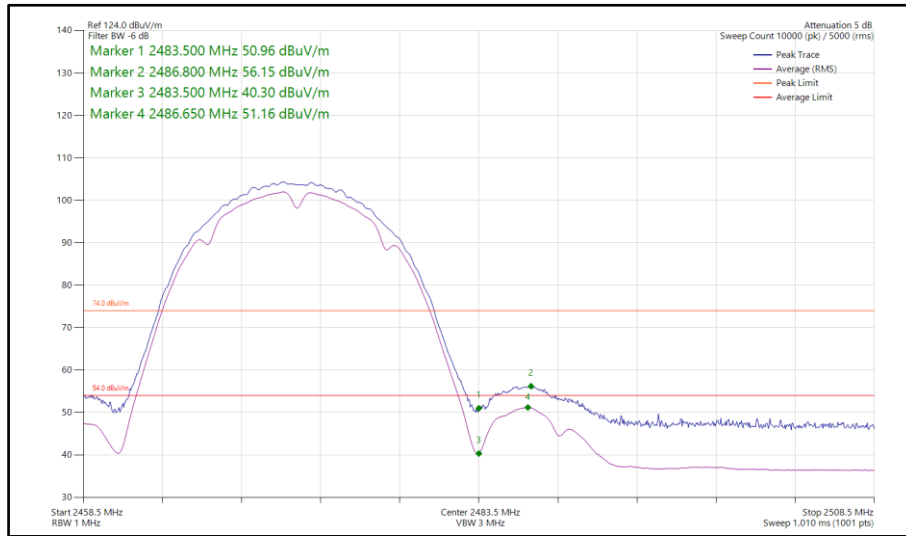


**Figure 8 - 802.11b, SISO, Core 0 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

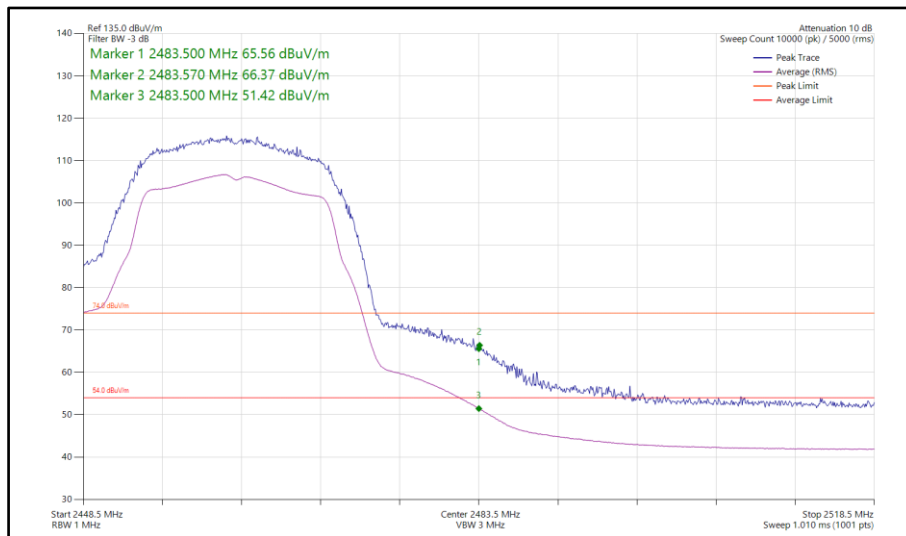

**Figure 9 - 802.11g, SISO, Core 0 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

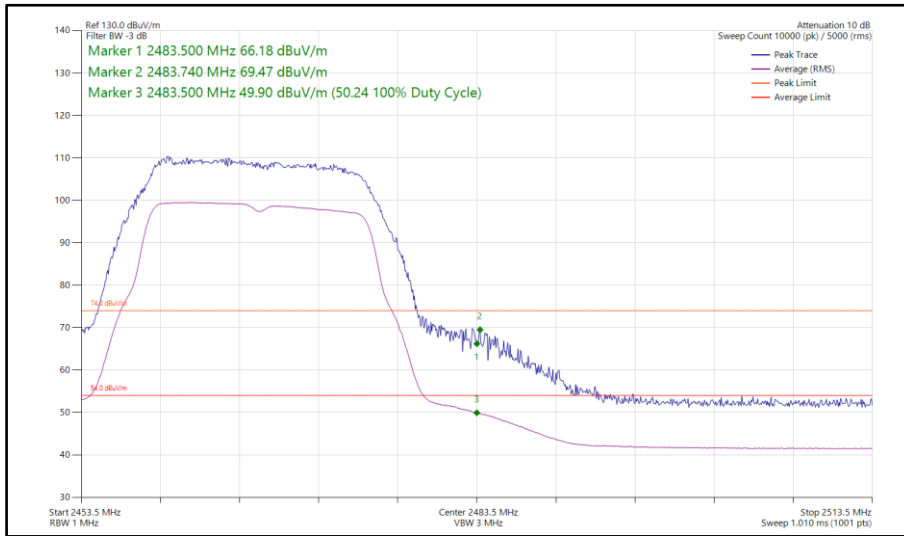

**Figure 10 - 802.11g, SISO, Core 0 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

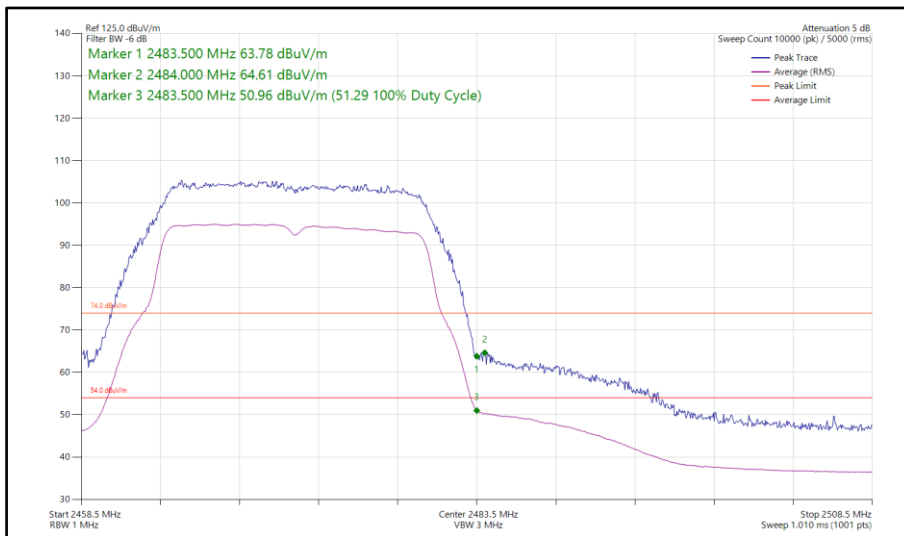

**Figure 11 - 802.11g, SISO, Core 0 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

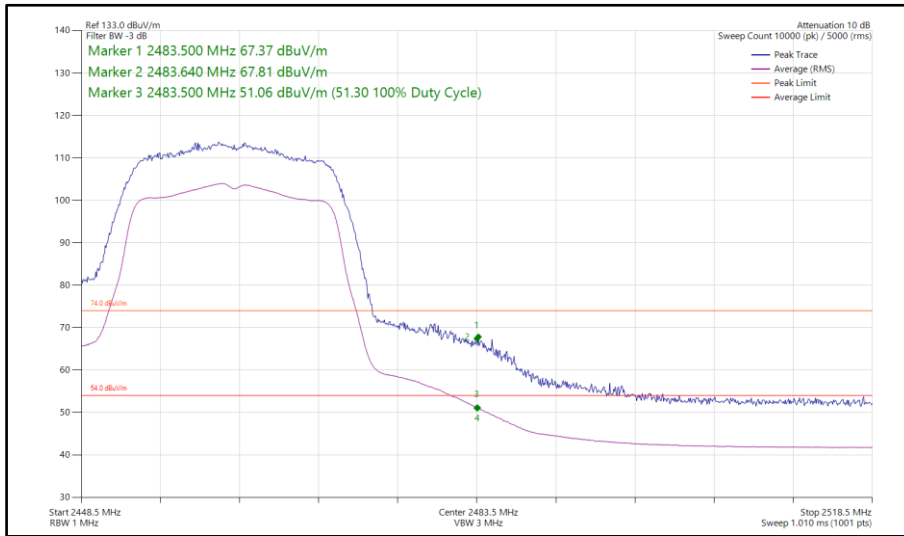


Figure 12 - 802.11n, HT20, SISO, Core 0 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz



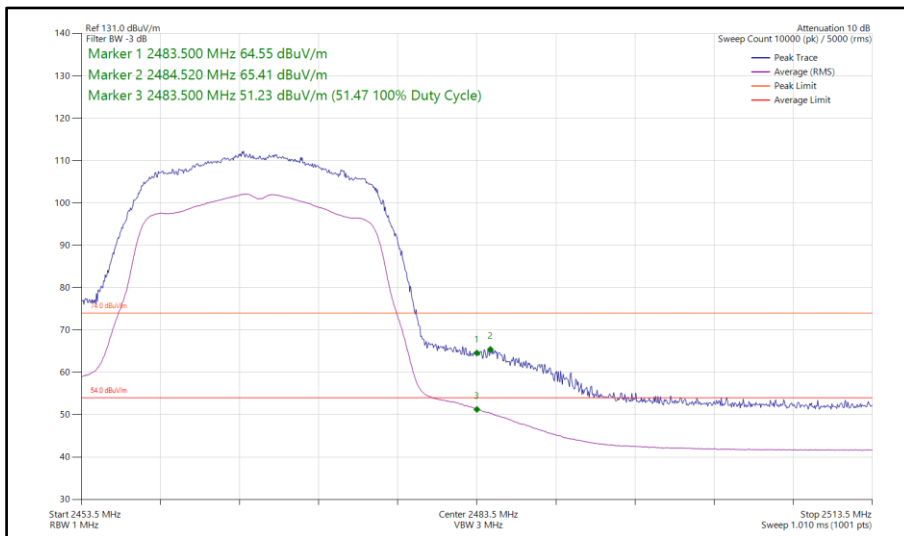


Figure 13 - 802.11n, HT20, SISO, Core 0 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz




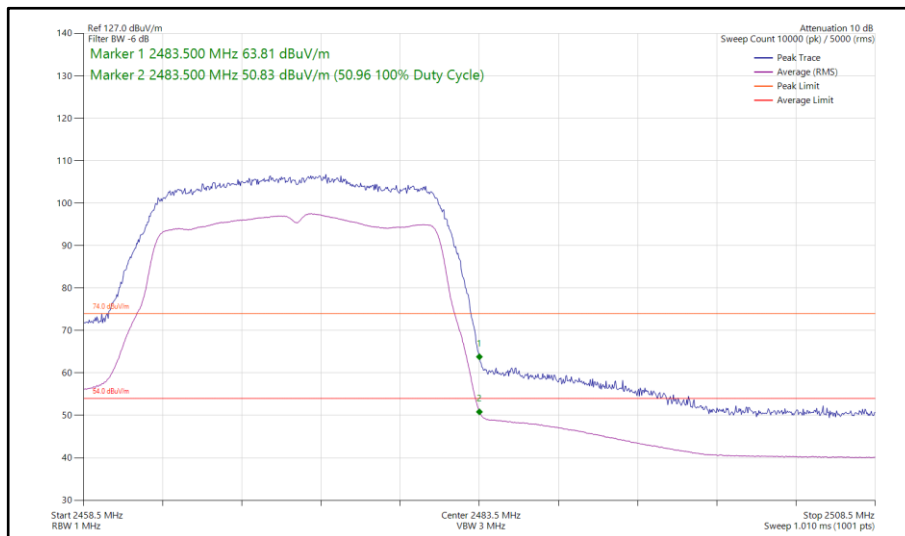


**Figure 14 - 802.11n, HT20, SISO, Core 0 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

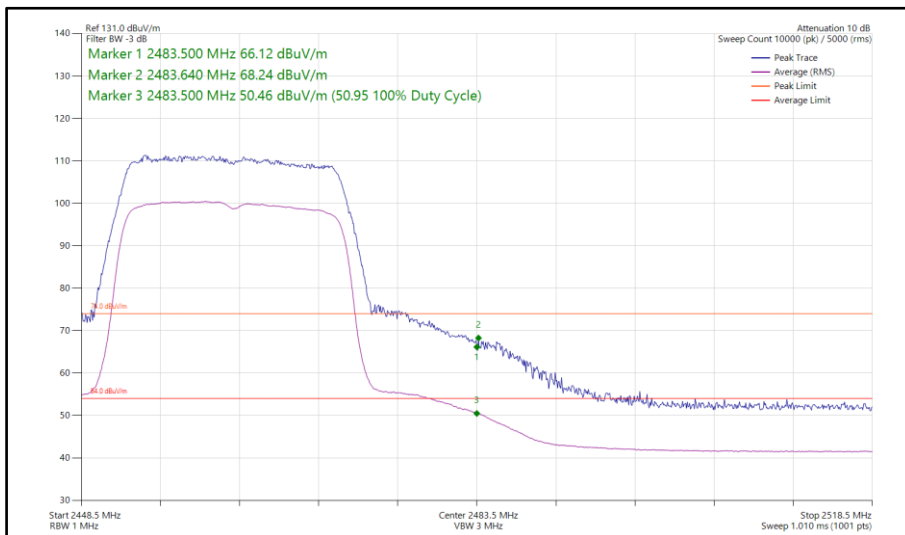


**Figure 15 - 802.11ax, HE20, SU, SISO, Core 0 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

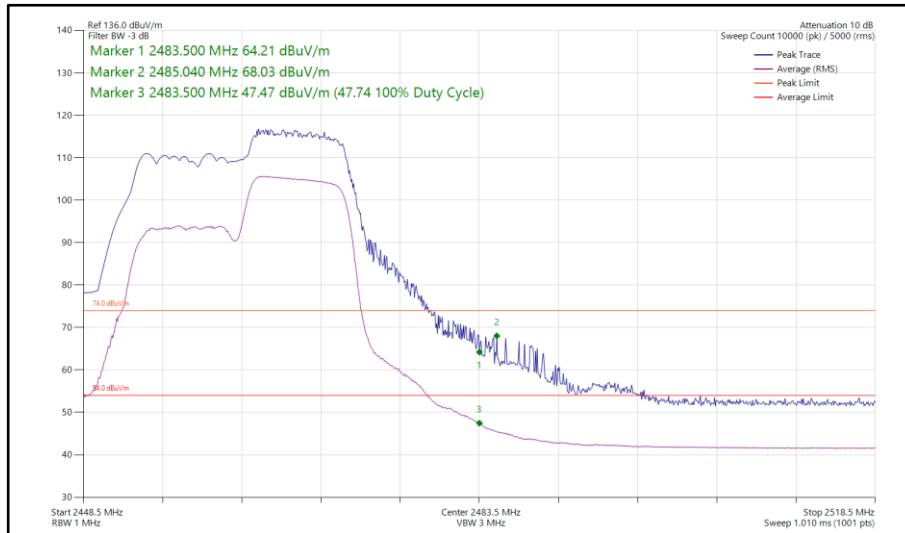


**Figure 16 - 802.11ax, HE20, RU 106-54, SISO, Core 0 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

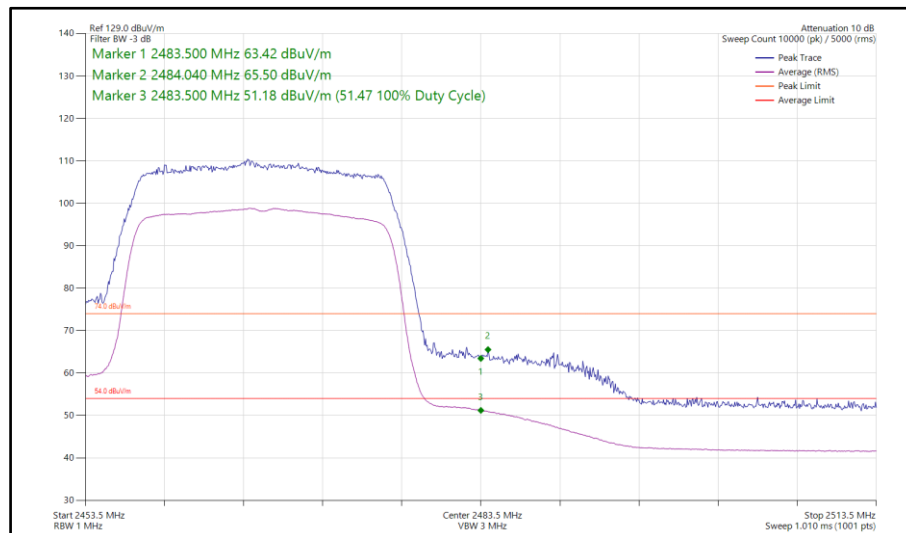


**Figure 17 - 802.11ax, HE20, SU, SISO, Core 0 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

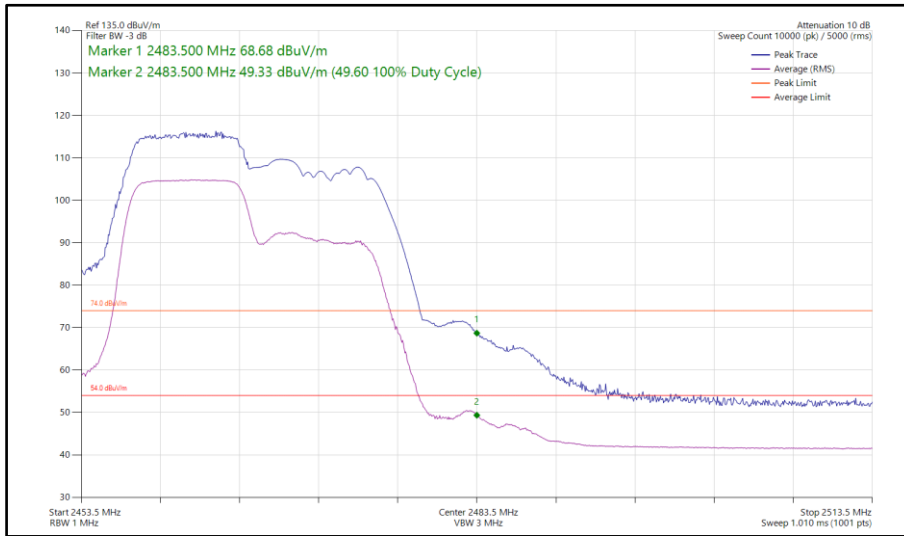

**Figure 18 - 802.11ax, HE20, RU 106-53, SISO, Core 0 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

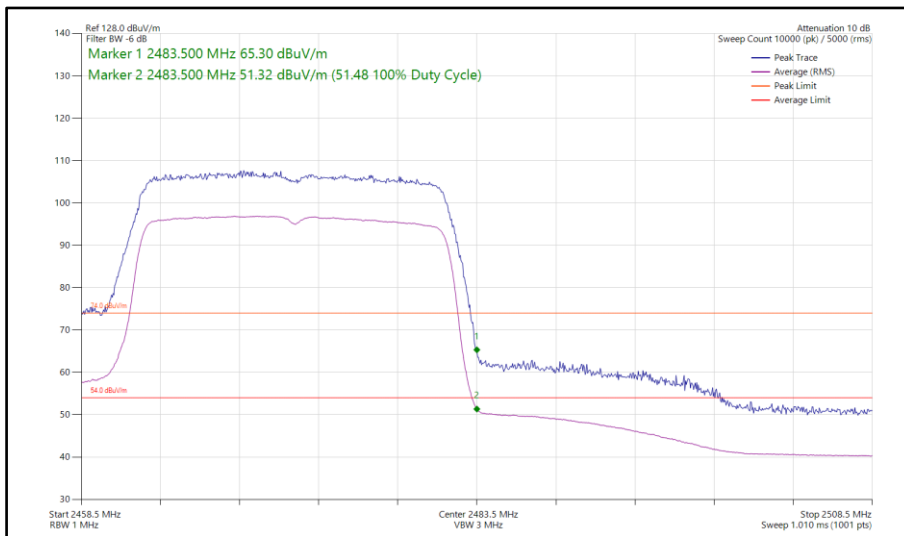

**Figure 19 - 802.11ax, HE20, SU, SISO, Core 0 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

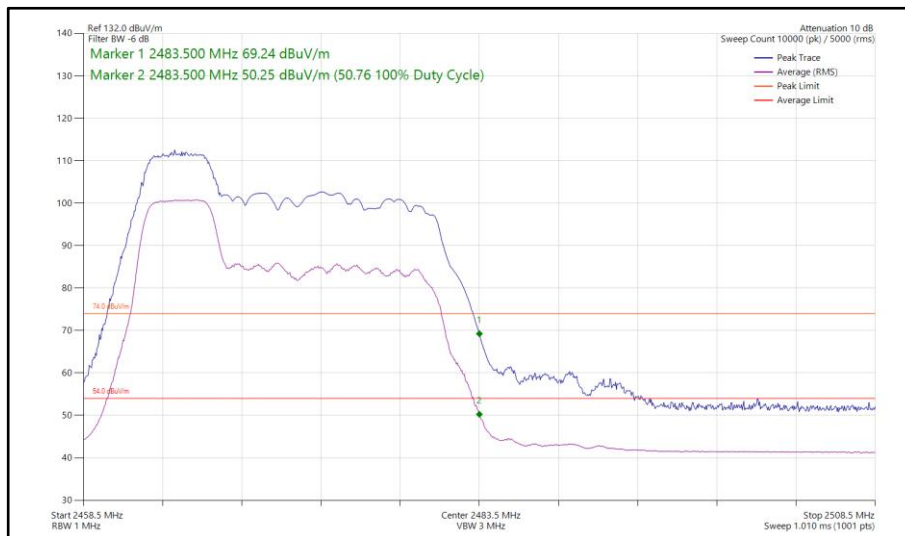


**Figure 20 - 802.11ax, HE20, RU 52-37, SISO, Core 0 - 2472 MHz, Band Edge Frequency 2483.5 MHz**




20 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11b	1 Mbps	-	-	2412	2390	58.87	50.52
802.11g	24 Mbps	-	-	2412	2390	66.94	51.45
802.11n HT20	MCS4	-	-	2412	2390	68.26	51.49
802.11ax HE20	MCS9x1	SU	-	2412	2390	65.99	50.65
802.11ax HE20	MCS9x1	106	53	2412	2390	69.46	47.39
802.11b	1 Mbps	-	-	2462	2483.5	55.75	45.42
802.11b	1 Mbps	-	-	2467	2483.5	59.31	51.07
802.11b	1 Mbps	-	-	2472	2483.5	57.66	51.06
802.11g	12 Mbps	-	-	2462	2483.5	65.59	51.38
802.11g	54 Mbps	-	-	2467	2483.5	68.94	51.47
802.11g	24 Mbps	-	-	2472	2483.5	63.55	51.47
802.11n HT20	MCS7	-	-	2462	2483.5	68.00	50.31
802.11n HT20	MCS4	-	-	2467	2483.5	64.04	51.39
802.11n HT20	MCS7	-	-	2472	2483.5	63.50	51.46
802.11ax HE20	MCS9x1	SU	-	2462	2483.5	68.76	51.36
802.11ax HE20	MCS9x1	106	54	2462	2483.5	69.23	48.38
802.11ax HE20	MCS4x1	SU	-	2467	2483.5	63.68	51.46
802.11ax HE20	MCS9x1	106	53	2467	2483.5	69.28	50.05
802.11ax HE20	MCS2x1	SU	-	2472	2483.5	64.32	51.49
802.11ax HE20	MCS9x1	52	37	2472	2483.5	69.45	50.02


**Table 7 - SISO Restricted Band Edge Results**

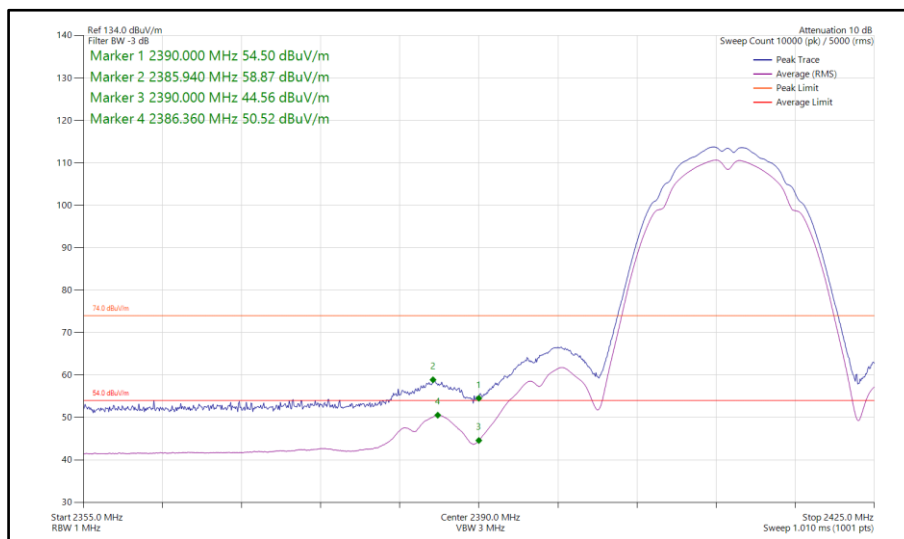


**Figure 21 - 802.11b, SISO, Core 1 - 2412 MHz,  
 Band Edge Frequency 2390 MHz**

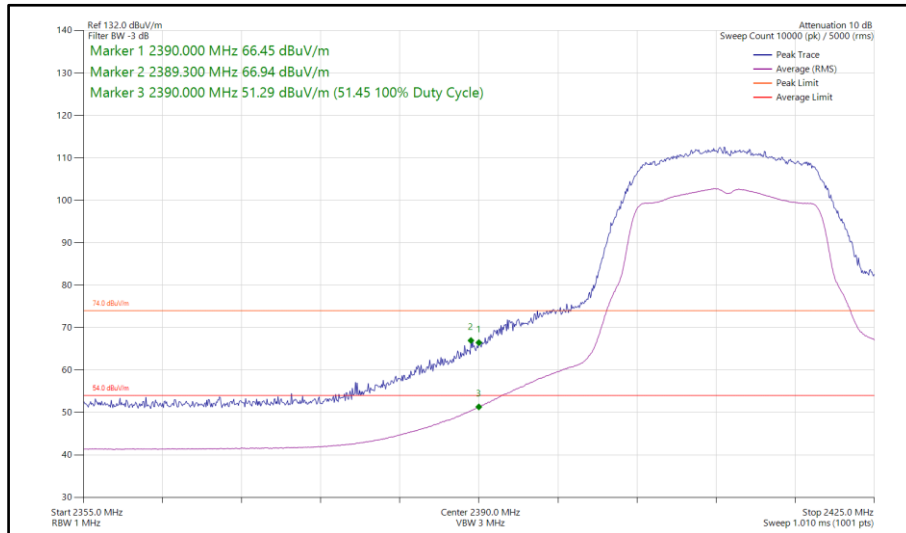


**Figure 22 - 802.11g, SISO, Core 1 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

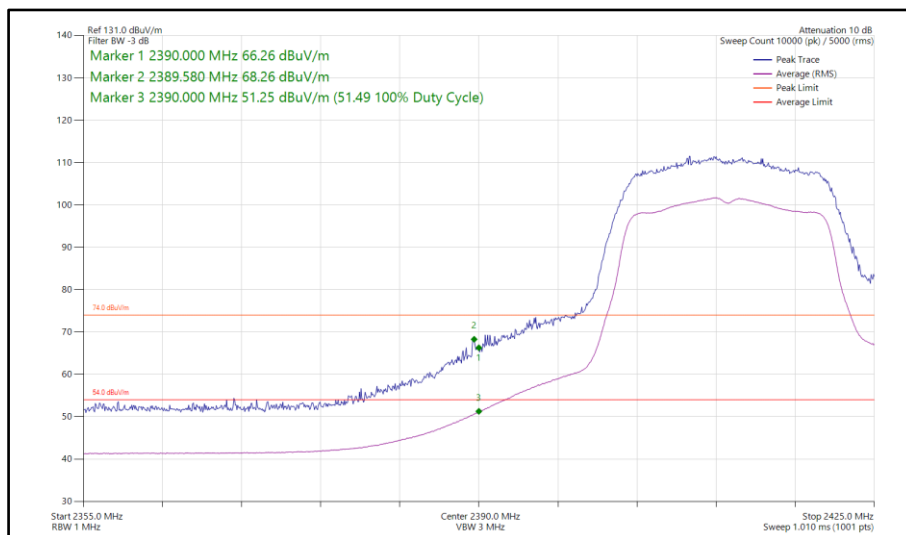


**Figure 23 - 802.11n, HT20, SISO, Core 1 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

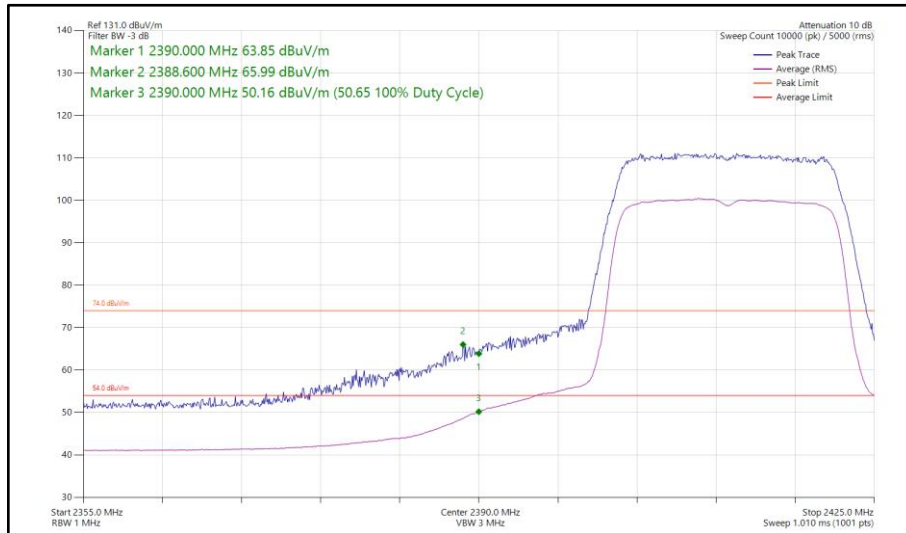


**Figure 24 - 802.11ax, HE20, SU, SISO, Core 1 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

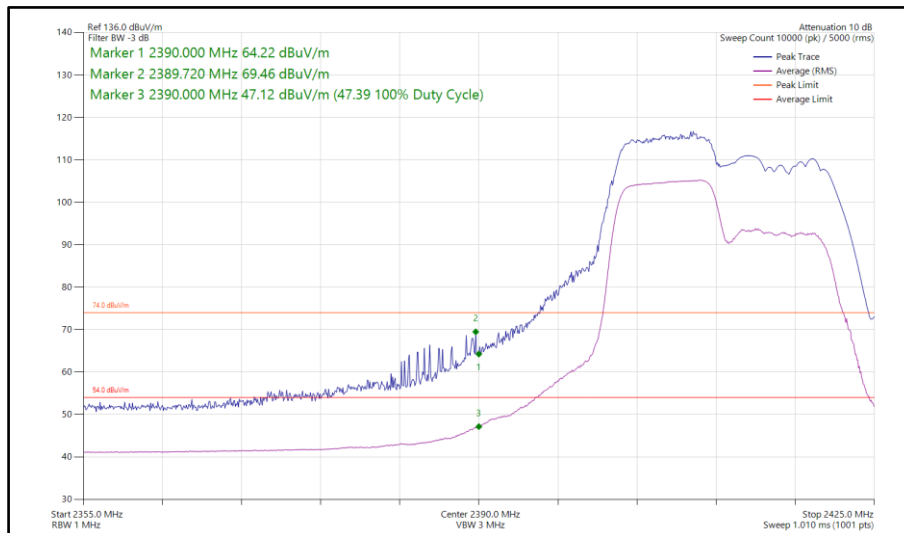

**Figure 25 - 802.11ax, HE20, RU 106-53, SISO, Core 1 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

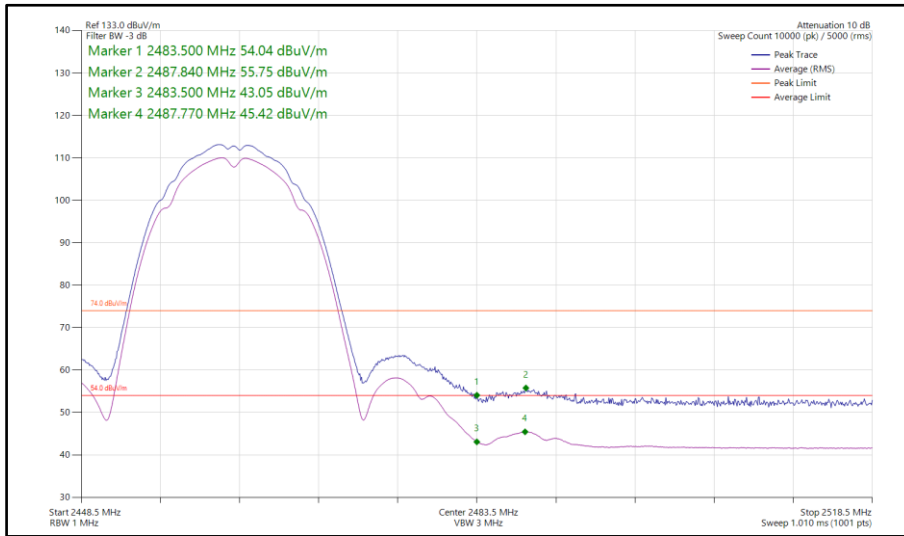


**Figure 26 - 802.11b, SISO, Core 1 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

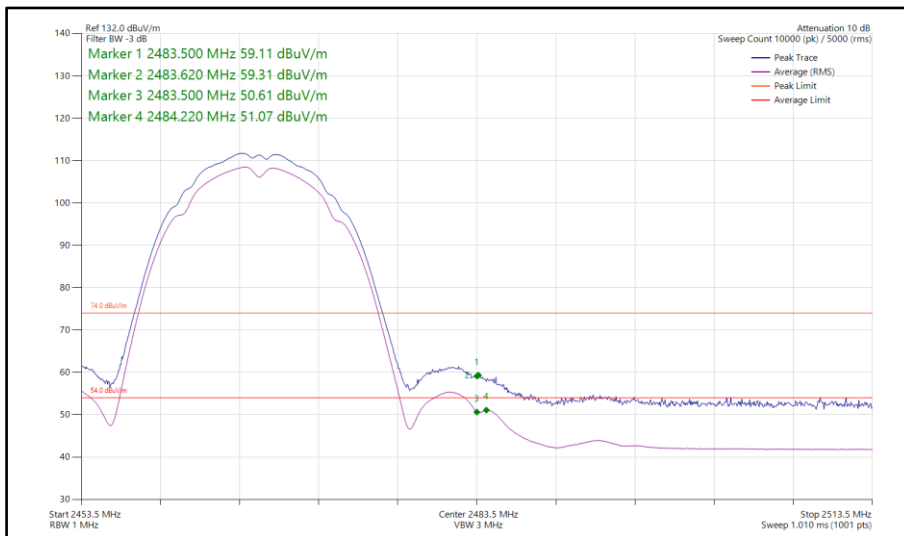


**Figure 27 - 802.11b, SISO, Core 1 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**




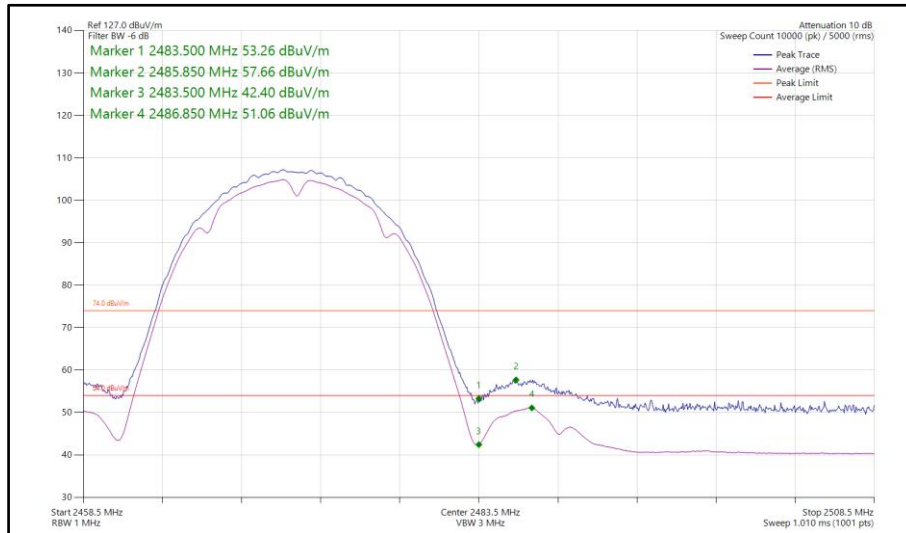


**Figure 28 - 802.11b, SISO, Core 1 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

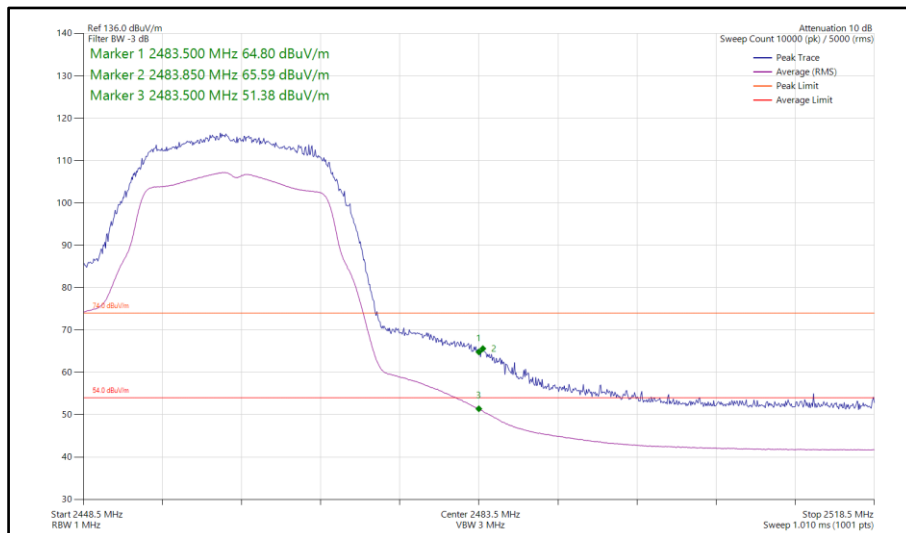


**Figure 29 - 802.11g, SISO, Core 1 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

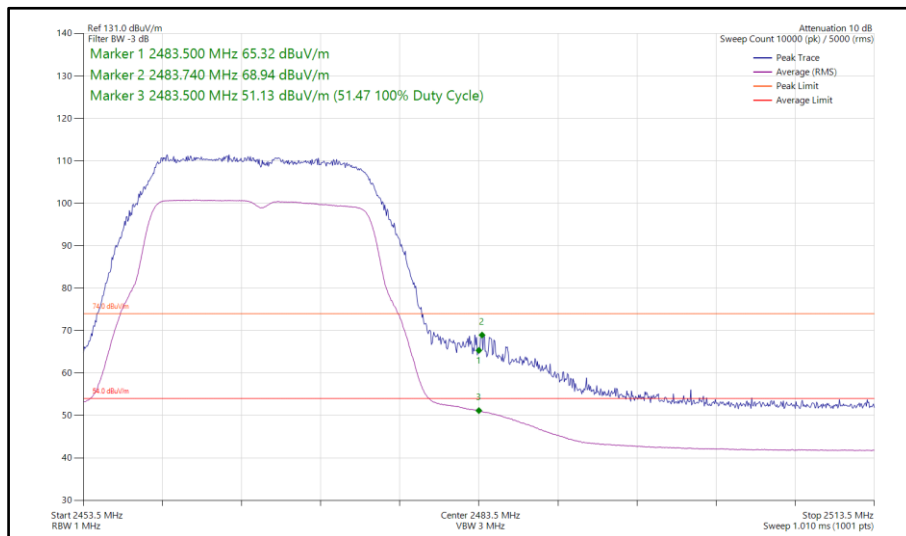


**Figure 30 - 802.11g, SISO, Core 1 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

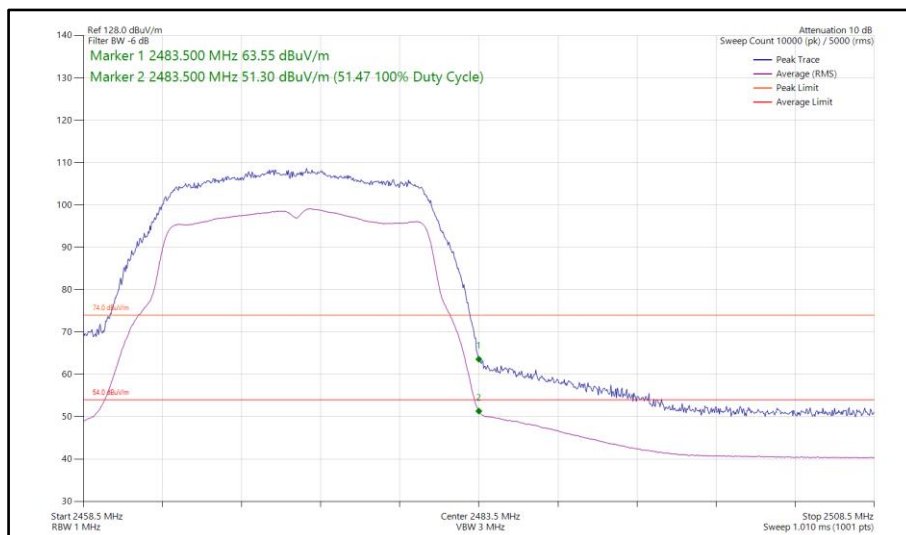


**Figure 31 - 802.11g, SISO, Core 1 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

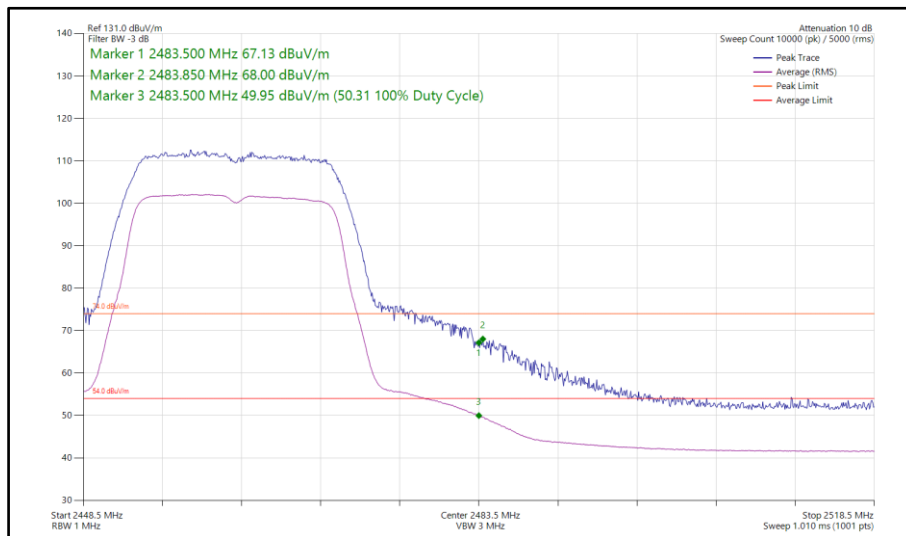


**Figure 32 - 802.11n, HT20, SISO, Core 1 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

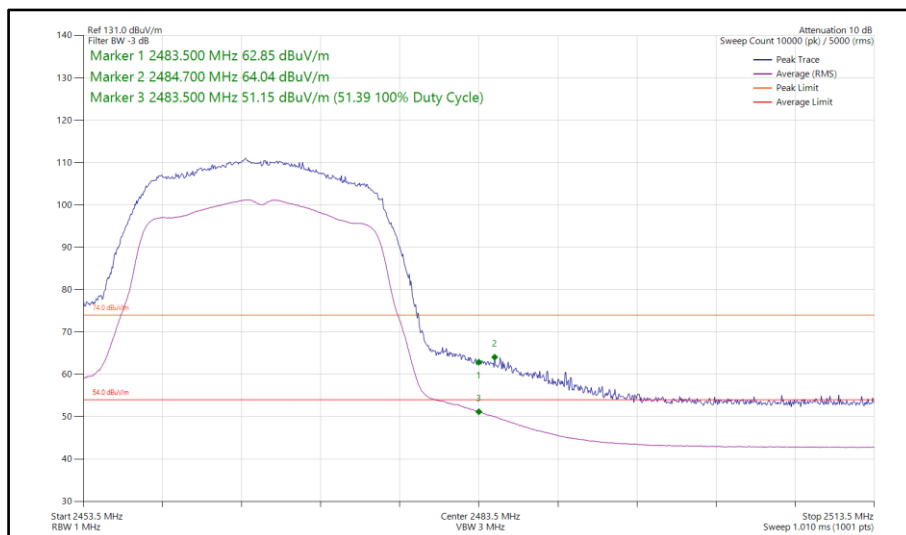


**Figure 33 - 802.11n, HT20, SISO, Core 1 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

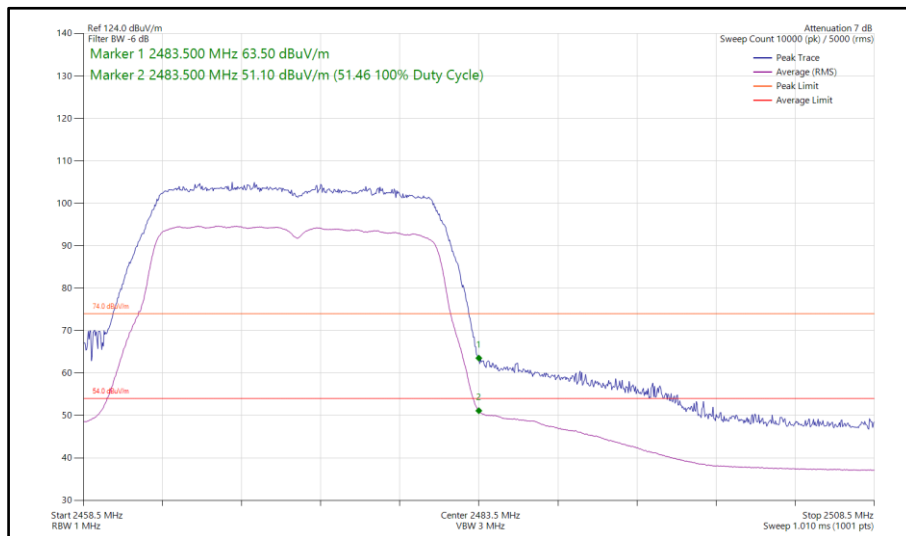


**Figure 34 - 802.11n, HT20, SISO, Core 1 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

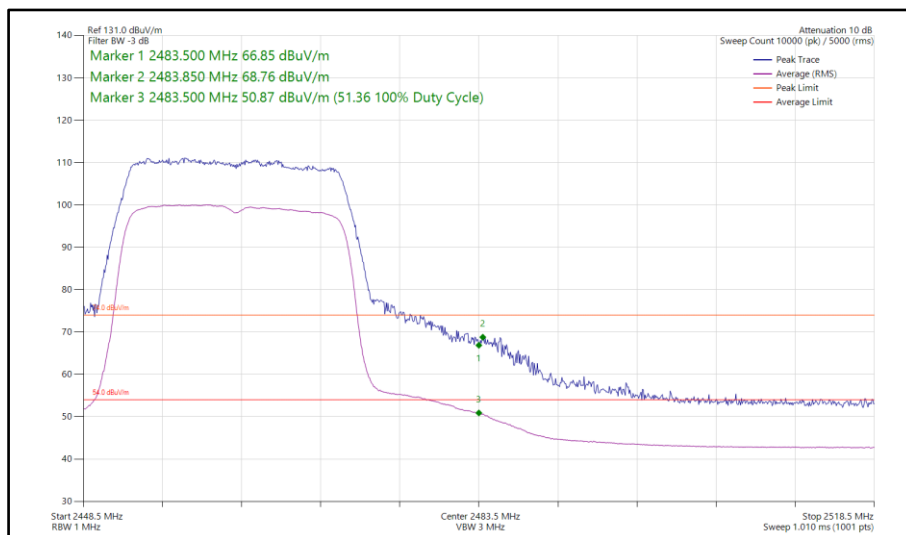


**Figure 35 - 802.11ax, HE20, SU, SISO, Core 1 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

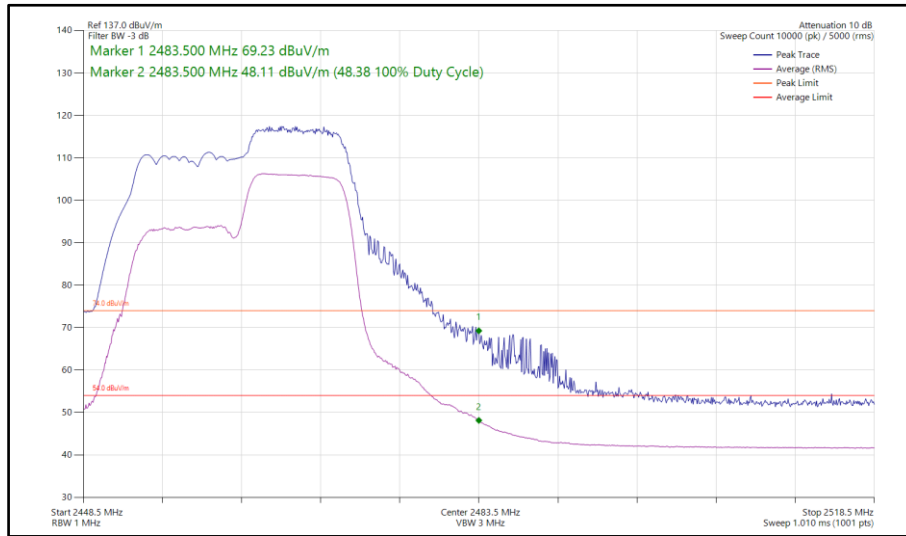


**Figure 36 - 802.11ax, HE20, RU 106-54, SISO, Core 1 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

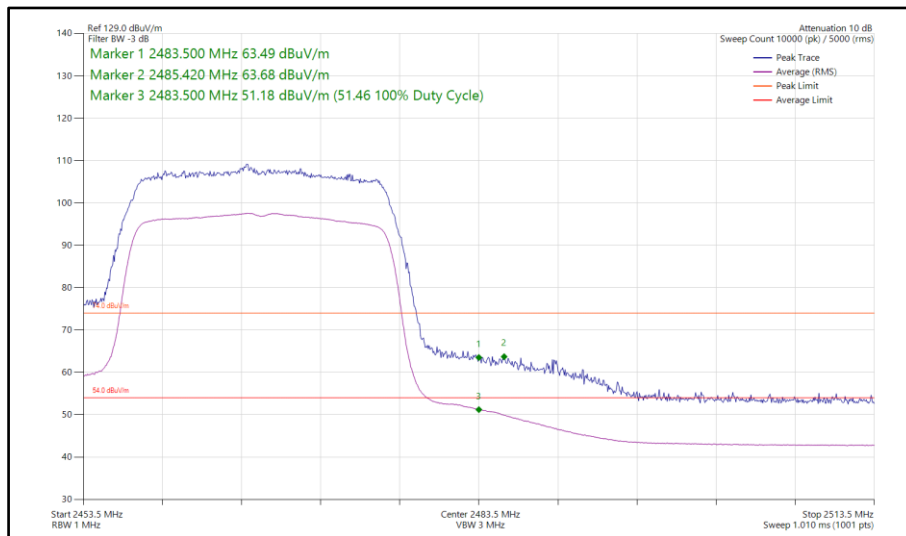


**Figure 37 - 802.11ax, HE20, SU, SISO, Core 1 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

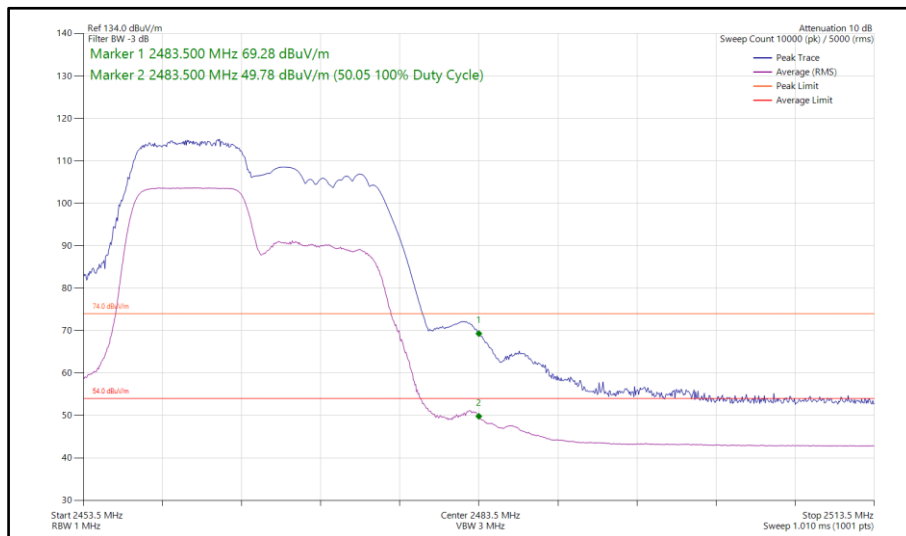

**Figure 38 - 802.11ax, HE20, RU 106-53, SISO, Core 1 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

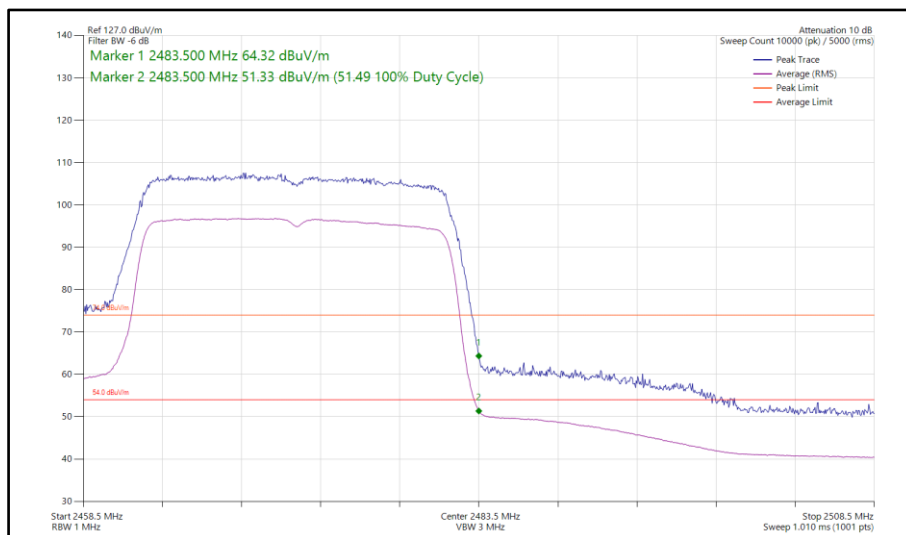

**Figure 39 - 802.11ax, HE20, SU, SISO, Core 1 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

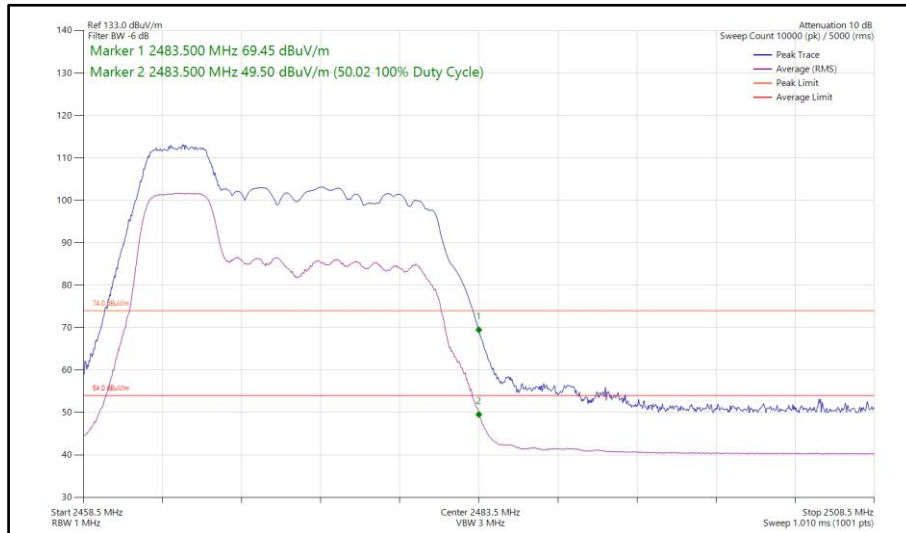

**Figure 40 - 802.11ax, HE20, RU 52-37, SISO, Core 1 - 2472 MHz, Band Edge Frequency 2483.5 MHz**



20 MHz Bandwidth - Core 0-1 (CDD)

Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT20	MCS7	-	-	2412	2390	68.80	51.48
802.11ax HE20	MCS9x1	SU	-	2412	2390	68.45	51.44
802.11ax HE20	MCS9x1	106	54	2412	2390	68.38	46.74
802.11n HT20	MCS4	-	-	2462	2483.5	67.51	51.28
802.11n HT20	MCS2	-	-	2467	2483.5	64.17	51.41
802.11n HT20	MCS7	-	-	2472	2483.5	65.40	51.26
802.11ax HE20	MCS2x1	SU	-	2462	2483.5	65.34	51.27
802.11ax HE20	MCS9x1	106	54	2462	2483.5	69.34	49.35
802.11ax HE20	MCS4x1	SU	-	2467	2483.5	65.33	51.40
802.11ax HE20	MCS9x1	106	54	2467	2483.5	69.49	50.77
802.11ax HE20	MCS9x1	SU	-	2472	2483.5	65.41	51.49
802.11ax HE20	MCS9x1	106	53	2472	2483.5	69.42	48.58

Table 8 - CDD Restricted Band Edge Results



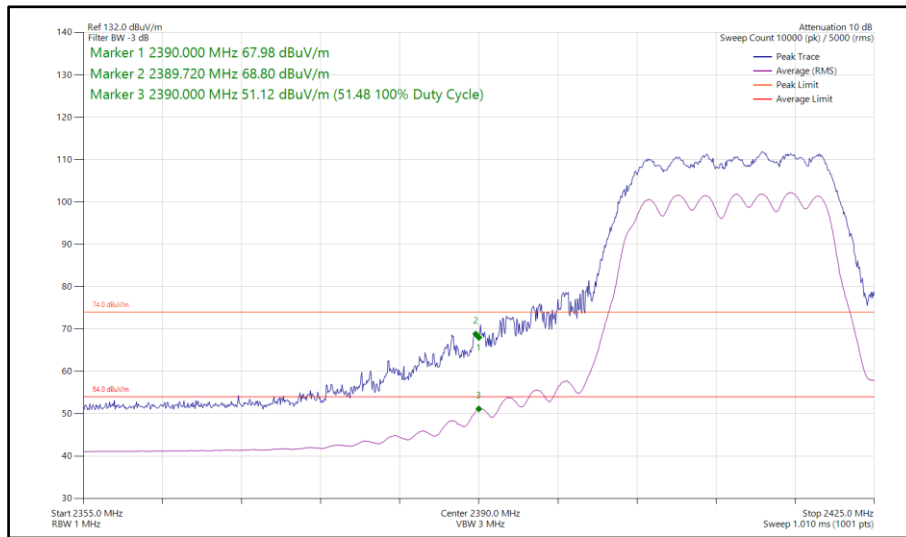


Figure 41 - 802.11n, HT20, CDD, Core 0-1 - 2412 MHz, Band Edge Frequency 2390 MHz




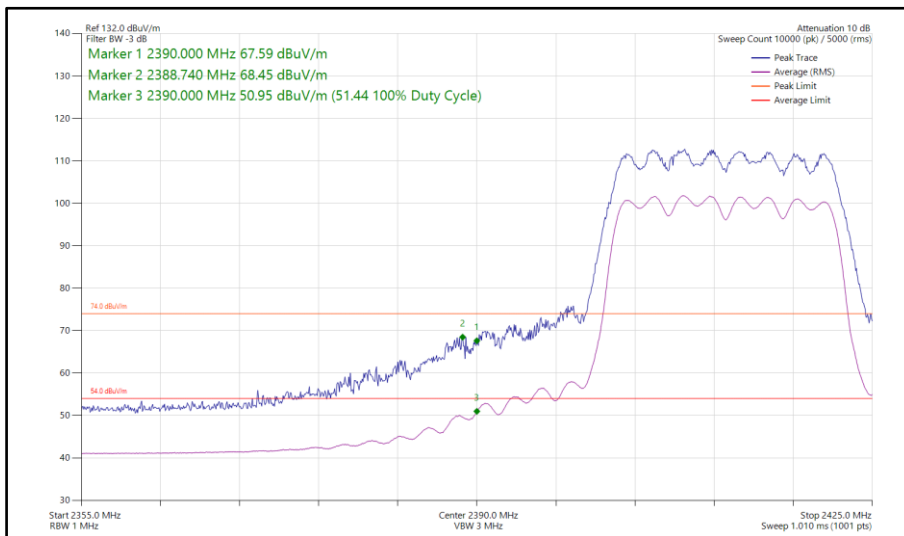


**Figure 42 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

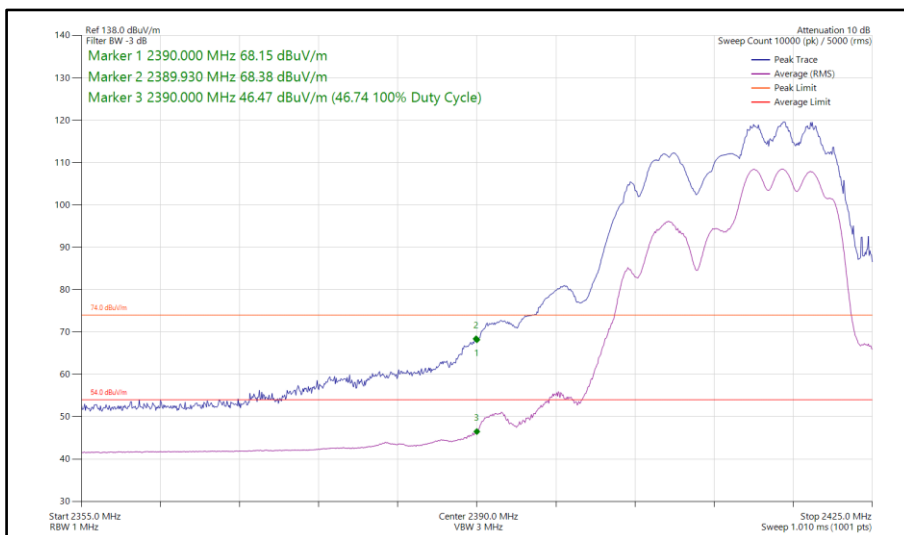


**Figure 43 - 802.11ax, HE20, RU 106-54, CDD, Core 0-1 - 2412 MHz,  
Band Edge Frequency 2390 MHz**

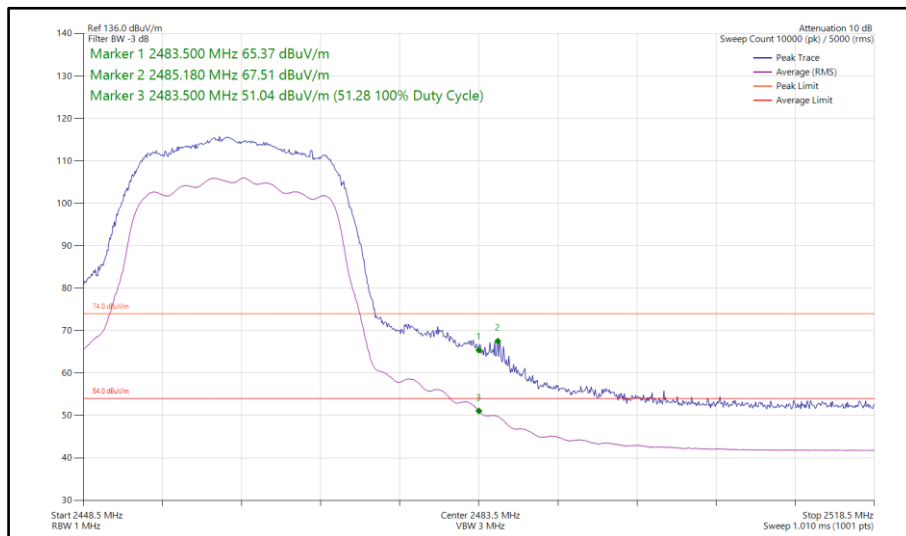


**Figure 44 - 802.11n, HT20, CDD, Core 0-1 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

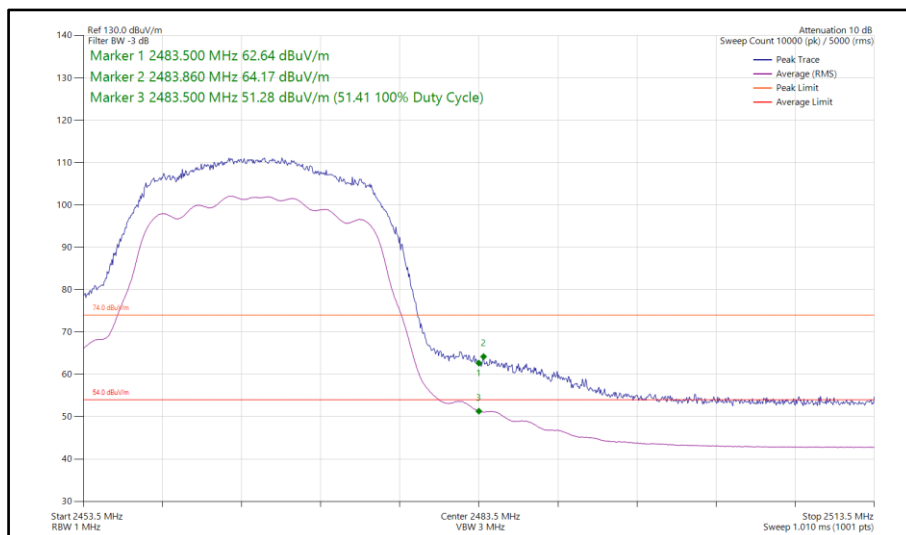


**Figure 45 - 802.11n, HT20, CDD, Core 0-1 - 2467 MHz,  
Band Edge Frequency 2483.5 MHz**

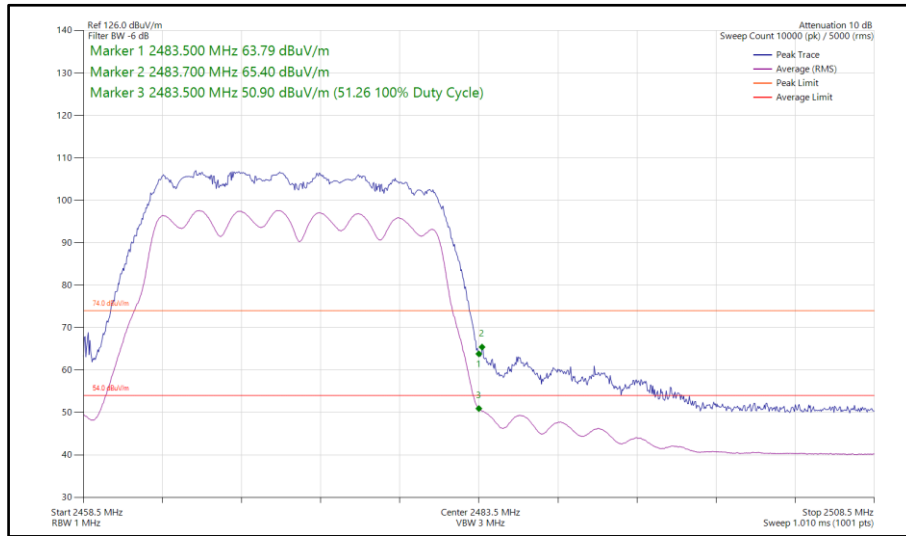


**Figure 46 - 802.11n, HT20, CDD, Core 0-1 - 2472 MHz,  
Band Edge Frequency 2483.5 MHz**

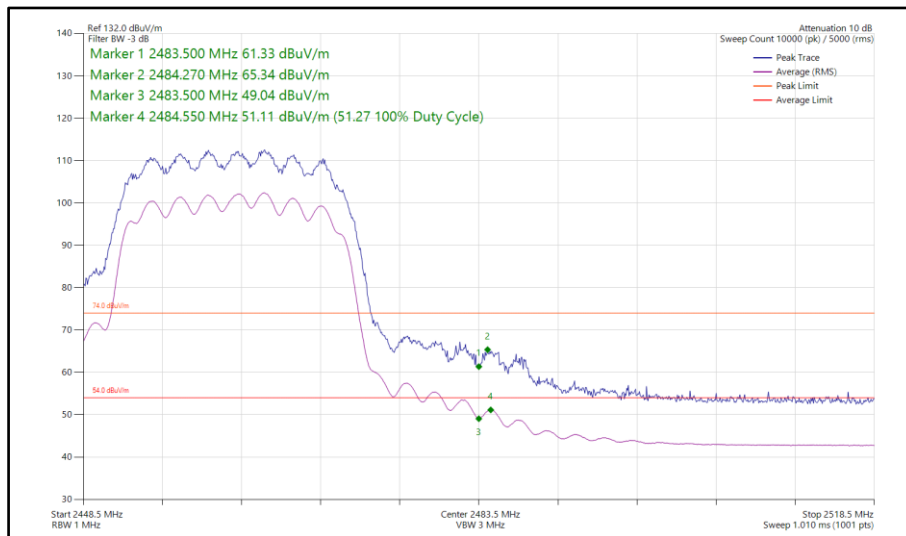


**Figure 47 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2462 MHz,  
Band Edge Frequency 2483.5 MHz**

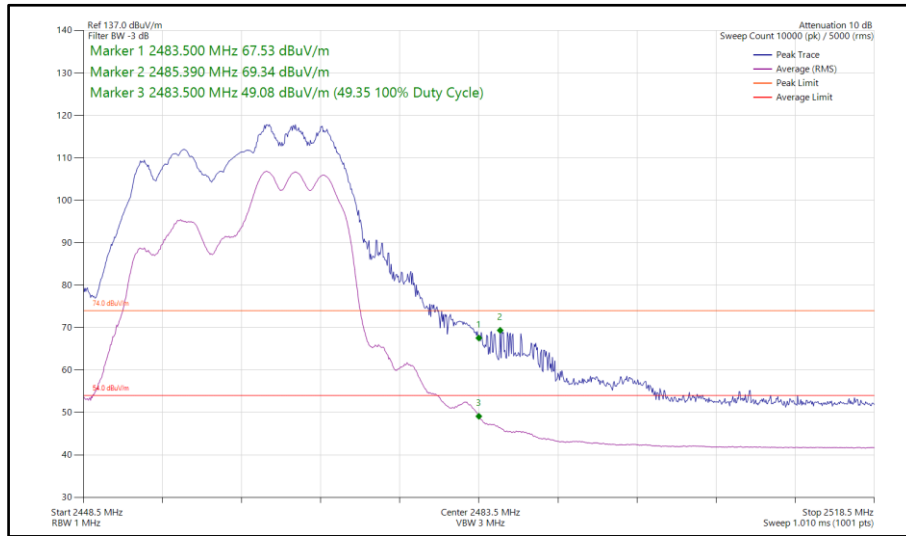


**Figure 48 - 802.11ax, HE20, RU 106-54, CDD, Core 0-1 - 2462 MHz, Band Edge Frequency 2483.5 MHz**

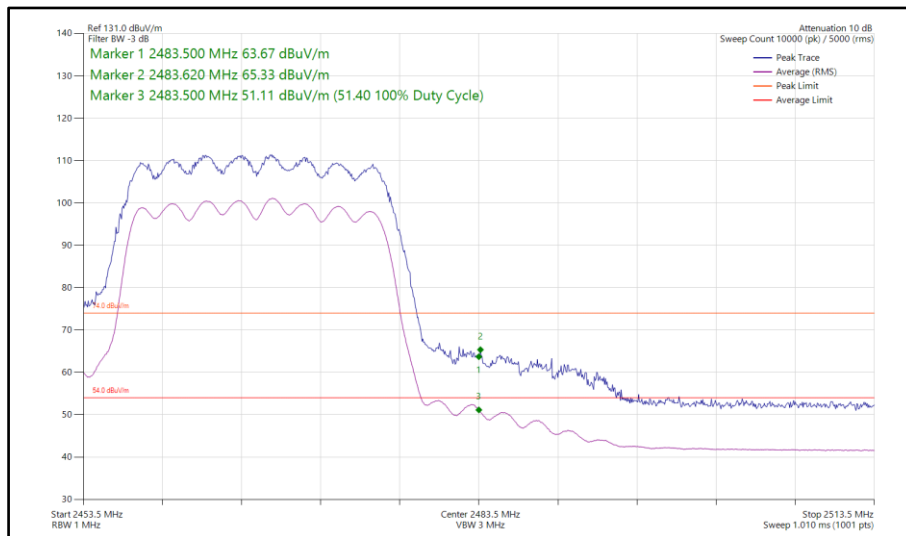


**Figure 49 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2467 MHz, Band Edge Frequency 2483.5 MHz**

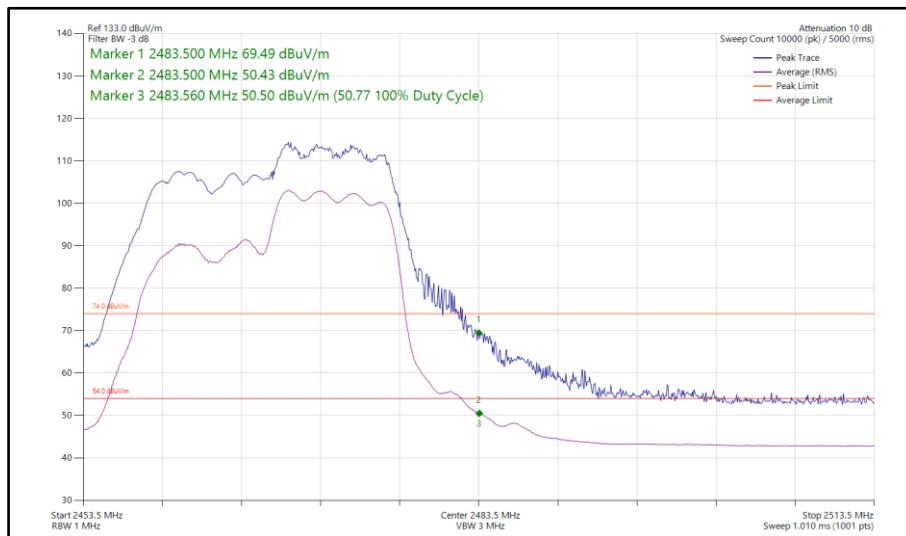

**Figure 50 - 802.11ax, HE20, RU 106-54, CDD, Core 0-1 - 2467 MHz, Band Edge Frequency 2483.5 MHz**

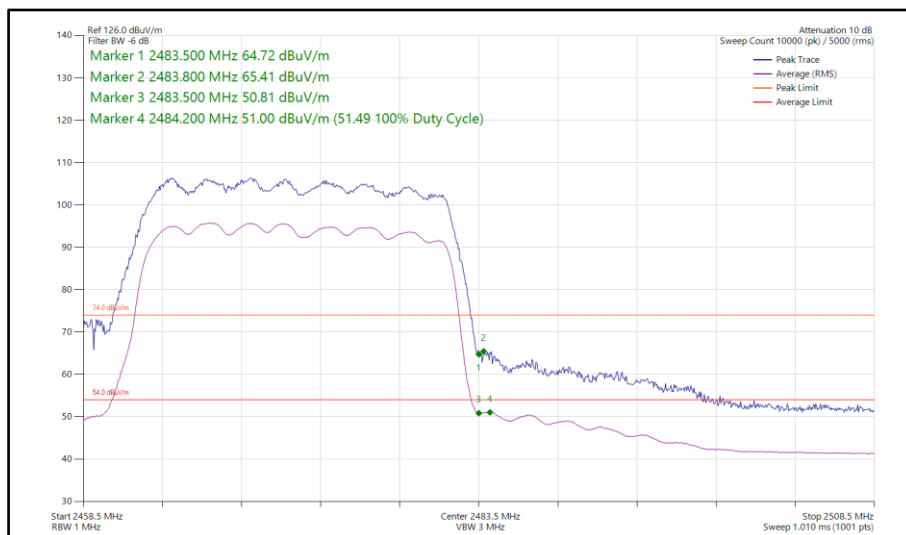

**Figure 51 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2472 MHz, Band Edge Frequency 2483.5 MHz**

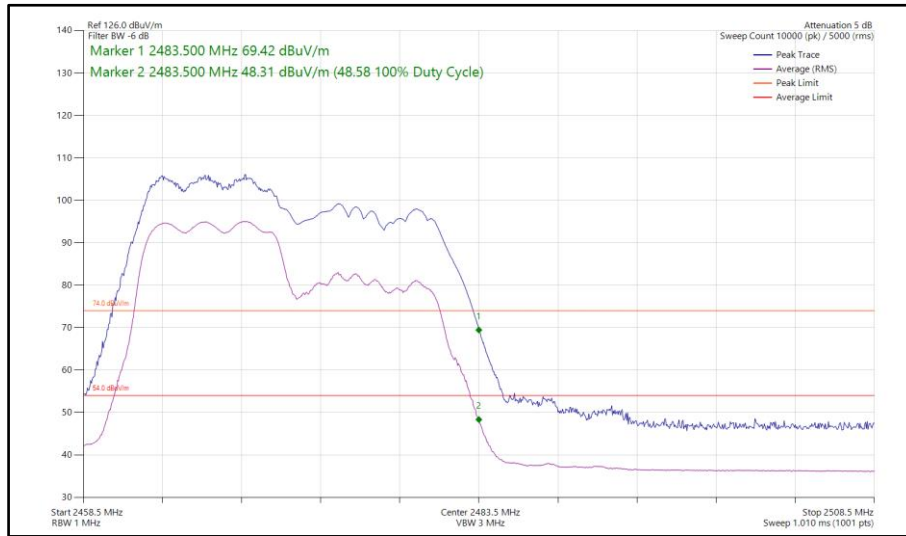

**Figure 52 - 802.11ax, HE20, RU 106-53, CDD, Core 0-1 - 2472 MHz, Band Edge Frequency 2483.5 MHz**

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 9**

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

**Table 10**

\*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



**2.1.7 Test Location and Test Equipment Used**

This test was carried out in RF Chamber 16.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.1.10	5125	-	Software
Cable (18GHz)	Junkosha	MWX221-04000NMSNMS/B	5262	12	04-Aug-2023
Cable (18 GHz)	Junkosha	MWX221-04000NMSNMS/B	5263	12	28-Feb-2023
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
3m Semi-Anechoic Chamber	Schaffner	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6018	12	06-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	26-Jun-2023
Digital Multimeter	Fluke	115	6146	12	16-Jun-2023
Humidity & Temperature meter	R.S Components	1364	6148	12	17-Jun-2023
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	16-Dec-2023
EMI Test Receiver	Rohde & Schwarz	ESW44	6294	12	03-Nov-2023

**Table 11**

TU - Traceability Unscheduled  
 O/P Mon - Output Monitored using calibrated equipment



## **2.2 Emission Bandwidth**

### **2.2.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(2),  
ISED RSS-247, Clause 5.2  
ISED RSS-GEN, Clause 6.7

### **2.2.2 Equipment Under Test and Modification State**

A2901, S/N: PXC62W93WY - Modification State 0

### **2.2.3 Date of Test**

01-April-2023

### **2.2.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 11.8.1 for 6 dB BW and 6.9.3 for 99% occupied bandwidth measurements.

### **2.2.5 Environmental Conditions**

Ambient Temperature	22.3 °C
Relative Humidity	41.1 %





## 2.2.6 Test Results

### 2.4 GHz WLAN

Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11b	8.160	9.120
802.11g	15.240	16.140
802.11n HT20	15.240	17.700
802.11ax HE20 SU	18.360	19.080

Table 12 - 6 dB Bandwidth Summary Results - SISO



Figure 53 - 802.11b Minimum 6 dB EBW

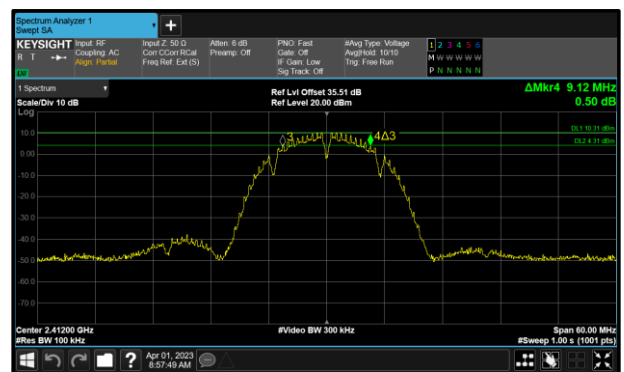


Figure 54 - 802.11b Maximum 6 dB EBW

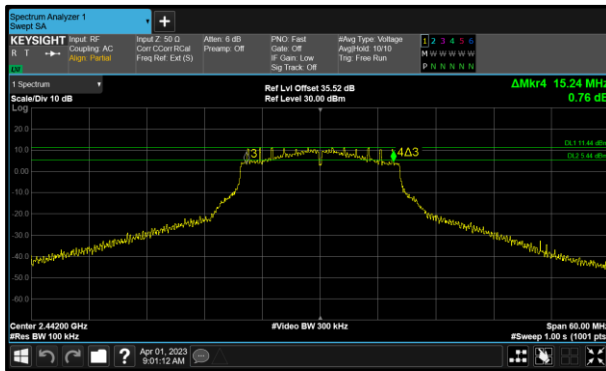


Figure 55 - 802.11g Minimum 6 dB EBW

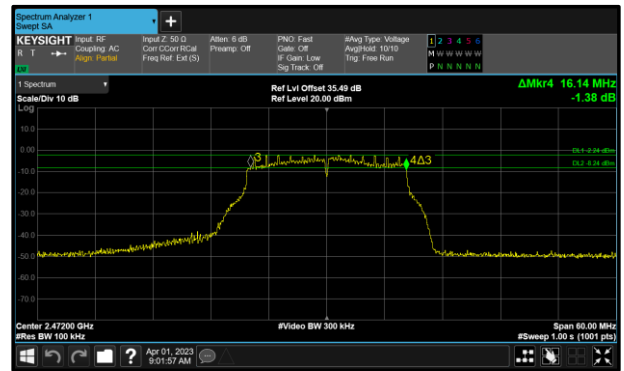


Figure 56 - 802.11g Maximum 6 dB EBW

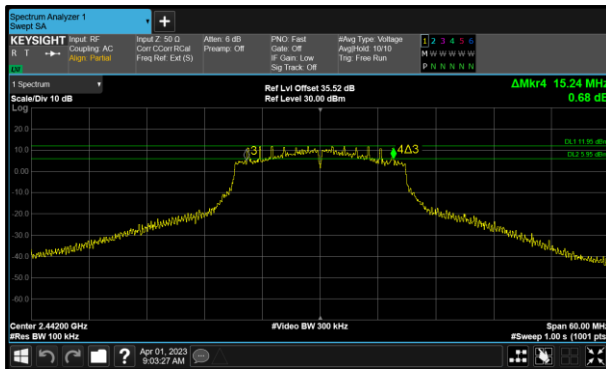


Figure 57 - 802.11n HT20 Minimum 6 dB EBW

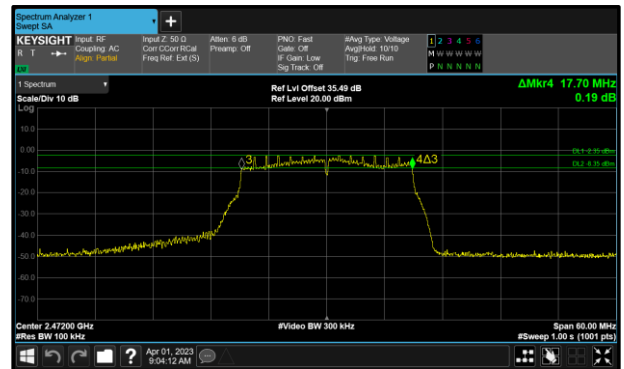


Figure 58 - 802.11n HT20 Maximum 6 dB EBW

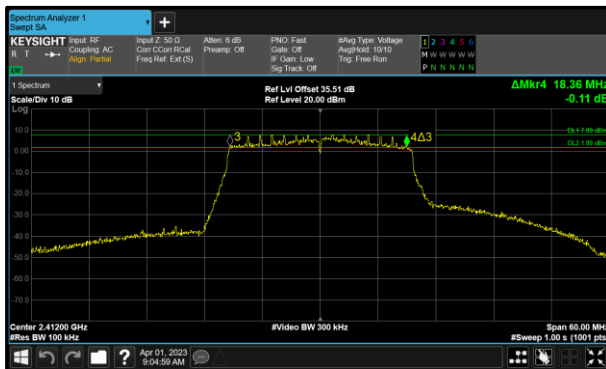


Figure 59 - 802.11ax HE20 SU Minimum 6 dB EBW


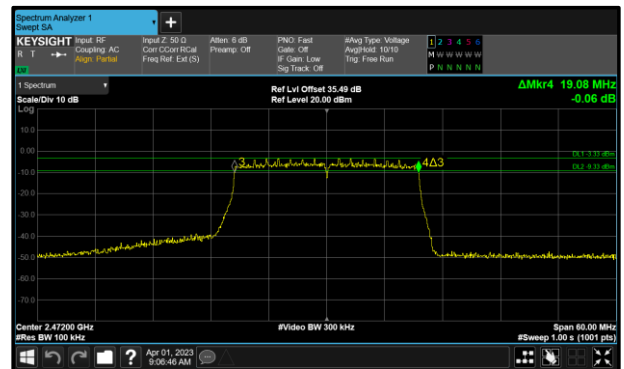


Figure 60 - 802.11ax HE20 SU Maximum 6 dB EBW




Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	15.240	17.760
802.11ax HE20 SU	18.300	19.140


**Table 13 - 6 dB Bandwidth Summary Results - MIMO CDD**

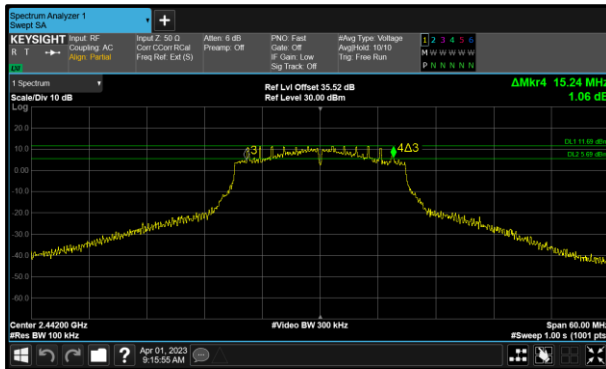


**Figure 61 - 802.11n HT20 Minimum 6 dB EBW**

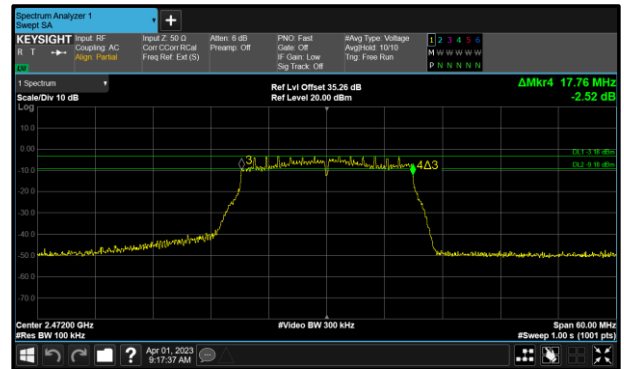

**Figure 62 - 802.11n HT20 Maximum 6 dB EBW**

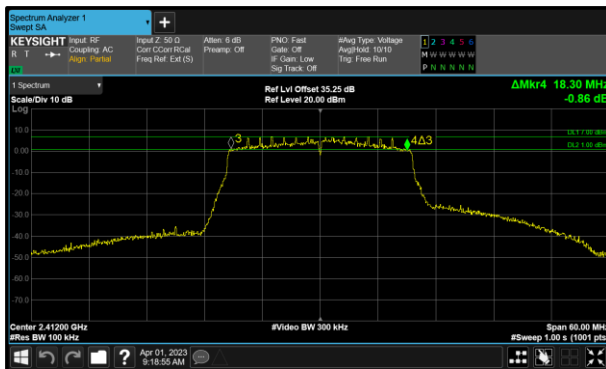

**Figure 63 - 802.11ax HE20 SU Minimum 6 dB EBW**

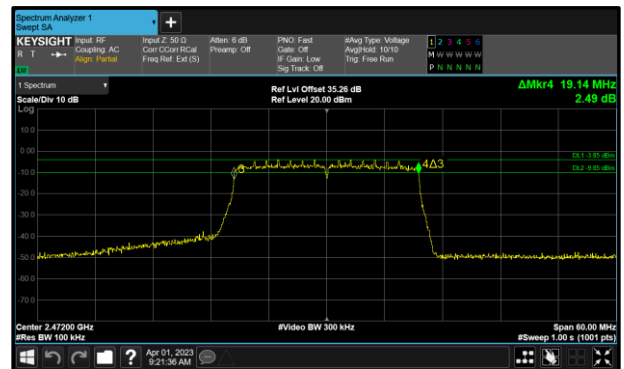

**Figure 64 - 802.11ax HE20 SU Maximum 6 dB EBW**



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11b	12.960	12.960
802.11g	16.440	16.620
802.11n HT20	17.640	17.700
802.11ax HE20 SU	18.900	19.020

Table 14 - 99% Bandwidth Summary Results - SISO

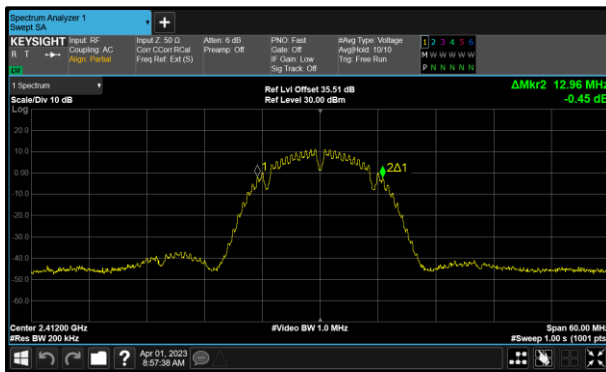


Figure 65 - 802.11b Minimum 99% OBW

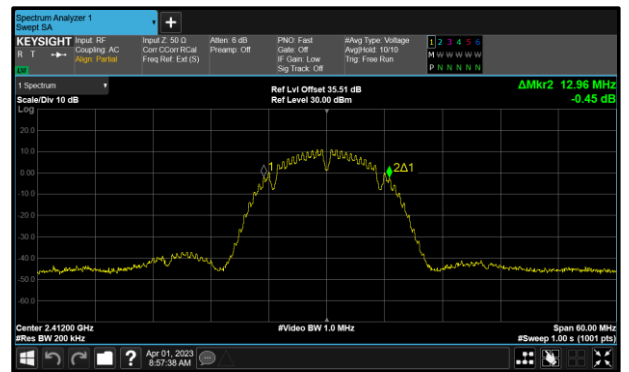


Figure 66 - 802.11b Maximum 99% OBW

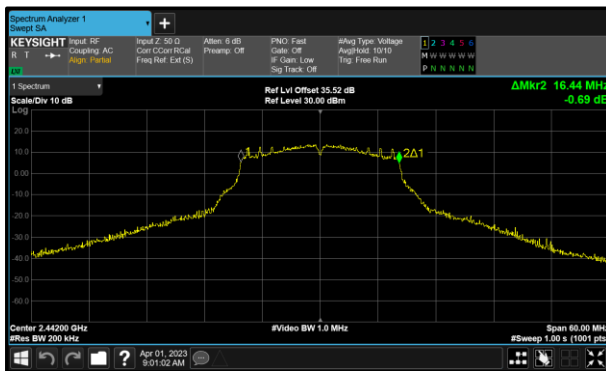


Figure 67 - 802.11g Minimum 99% OBW

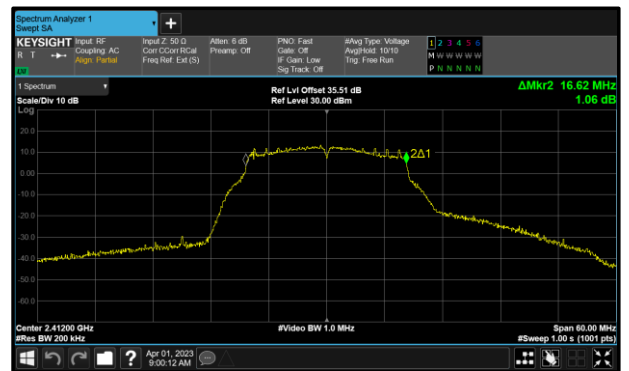


Figure 68 - 802.11g Maximum 99% OBW

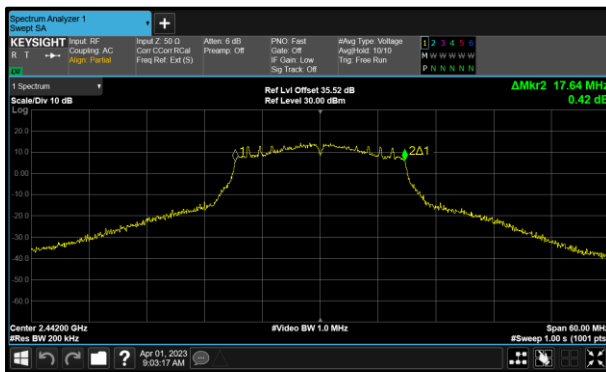


Figure 69 - 802.11n HT20 Minimum 99% OBW

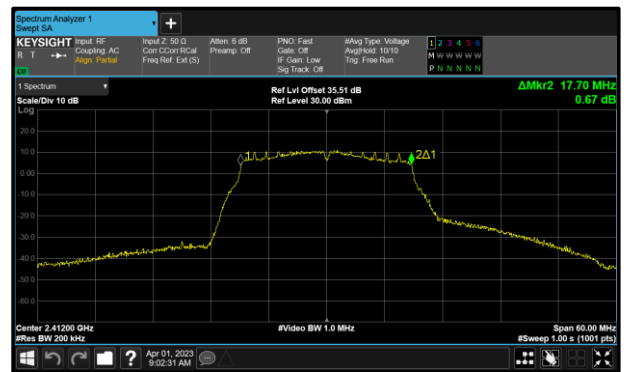


Figure 70 - 802.11n HT20 Maximum 99% OBW

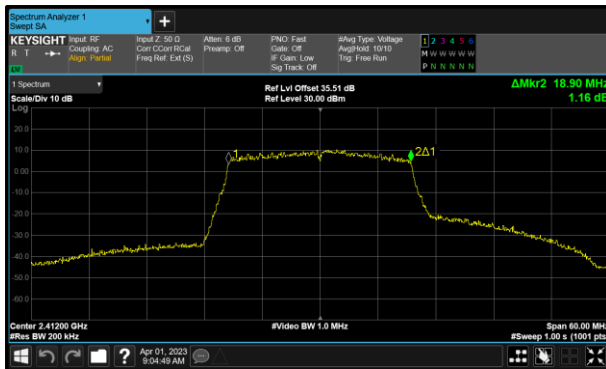


Figure 71 - 802.11ax HE20 SU Minimum  
99% OBW


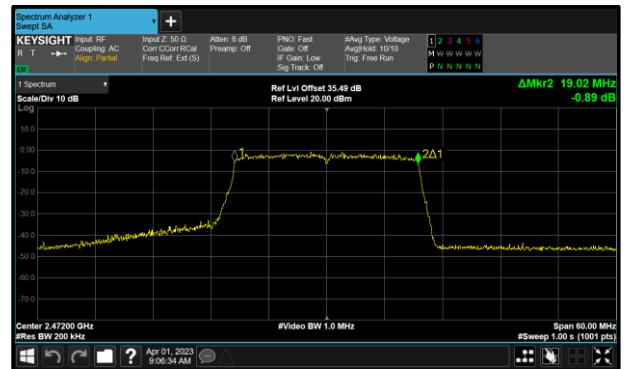


Figure 72 - 802.11ax HE20 SU Maximum  
99% OBW




Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.580	17.700
802.11ax HE20 SU	18.960	19.020


**Table 15 - 99% Bandwidth Summary Results - MIMO CDD**

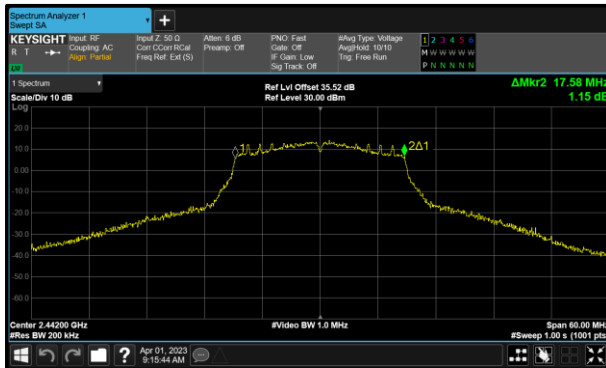


**Figure 73 - 802.11n HT20 Minimum 99% OBW**

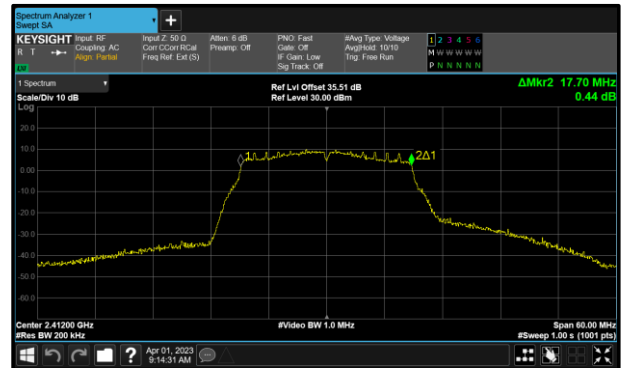

**Figure 74 - 802.11n HT20 Maximum 99% OBW**

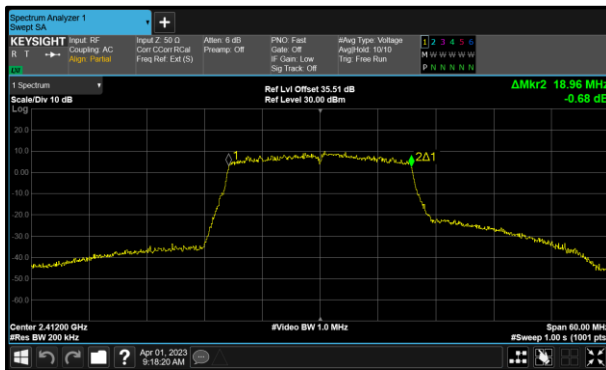

**Figure 75 - 802.11ax HE20 SU Minimum 99% OBW**

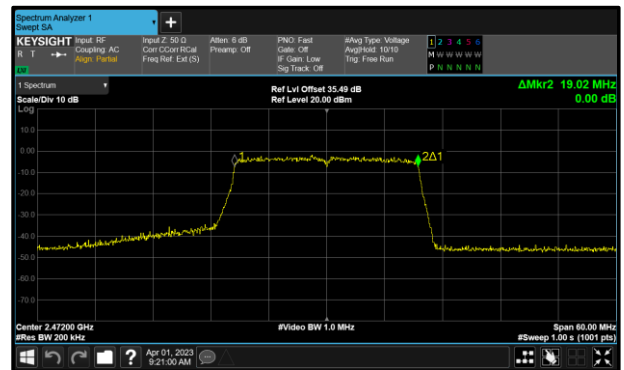

**Figure 76 - 802.11ax HE20 SU Maximum 99% OBW**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11b	Duty Cycle (%):	-
Data Rate:	1 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	9.120	-	-	-	≥500.0
2442	8.160	-	-	-	≥500.0
2472	9.120	-	-	-	≥500.0

**Table 16 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	12.960	-	-	-	-
2442	12.960	-	-	-	-
2472	12.960	-	-	-	-

**Table 17 - 99% Bandwidth Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11g	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	15.780	-	-	-	≥500.0
2442	15.240	-	-	-	≥500.0
2472	16.140	-	-	-	≥500.0

**Table 18 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	16.620	-	-	-	-
2442	16.440	-	-	-	-
2472	16.560	-	-	-	-

**Table 19 - 99% Bandwidth Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	17.040	-	-	-	≥500.0
2442	15.240	-	-	-	≥500.0
2472	17.700	-	-	-	≥500.0

**Table 20 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	17.700	-	-	-	-
2442	17.640	-	-	-	-
2472	17.700	-	-	-	-

**Table 21 - 99% Bandwidth Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	18.360	-	-	-	≥500.0
2442	18.840	-	-	-	≥500.0
2472	19.080	-	-	-	≥500.0

**Table 22 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	18.900	-	-	-	-
2442	18.960	-	-	-	-
2472	19.020	-	-	-	-

**Table 23 - 99% Bandwidth Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	16.440	15.900	-	-	≥500.0
2442	15.240	15.240	-	-	≥500.0
2472	17.520	17.760	-	-	≥500.0

**Table 24 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	17.700	17.700	-	-	-
2442	17.580	17.580	-	-	-
2472	17.700	17.700	-	-	-

**Table 25 - 99% Bandwidth Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	18.720	18.300	-	-	≥500.0
2442	18.960	18.780	-	-	≥500.0
2472	19.020	19.140	-	-	≥500.0

**Table 26 - 6 dB Bandwidth Results**

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2412	18.960	18.960	-	-	-
2442	18.960	18.960	-	-	-
2472	19.020	18.960	-	-	-

**Table 27 - 99% Bandwidth Results**

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISED RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



### 2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	21-Sep-2023
Multi-GNSS Simulator (GPS)	Spirent	GSS6700	4596	12	22-Aug-2023
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5919	24	13-Mar-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	5932	12	10-May-2023
Digital Multimeter	Fluke	115	6145	12	17-Jun-2023

**Table 28**

O/P Mon - Output Monitored using calibrated equipment



## **2.3 Maximum Conducted Output Power**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (b)  
ISED RSS-247, Clause 5.4  
ISED RSS-GEN, Clause 6.12

### **2.3.2 Equipment Under Test and Modification State**

A2901, S/N: PXC62W93WY - Modification State 0

### **2.3.3 Date of Test**

01-April-2023

### **2.3.4 Test Method**

The test was performed in accordance with ANSI C63.10 clause 11.9.2.3.2 Method AVGPM-G.

MIMO output port summing was performed in accordance with KDB 662911 D01. For the CDD results, the Directional Gain was calculated in accordance with clause F)2)f)(ii) using the calculations from F)2)f)(i) with worst-case individual gain and an array gain of zero.

### **2.3.5 Environmental Conditions**

Ambient Temperature	22.3 °C
Relative Humidity	41.1 %



**2.3.6 Test Results**

2.4 GHz WLAN

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11b	Duty Cycle (%):	99.4
Data Rate:	1 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	18.73	-	-	-	-	30.00	-11.27
2442	18.86	-	-	-	-	30.00	-11.14
2472	16.67	-	-	-	-	30.00	-13.33

**Table 29 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	18.73	-	-	-	-	30.00	-11.27	21.84	36.00	-14.16
2442	18.86	-	-	-	-	30.00	-11.14	21.97	36.00	-14.03
2472	16.67	-	-	-	-	30.00	-13.33	19.78	36.00	-16.22

**Table 30 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11g	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	21.93	-	-	-	-	30.00	-8.07
2442	22.25	-	-	-	-	30.00	-7.75
2472	9.22	-	-	-	-	30.00	-20.78

**Table 31 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	21.93	-	-	-	-	30.00	-8.07	25.04	36.00	-10.96
2442	22.25	-	-	-	-	30.00	-7.75	25.36	36.00	-10.64
2472	9.22	-	-	-	-	30.00	-20.78	12.33	36.00	-23.67

**Table 32 - ISED Maximum Conducted (average) Output Power Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	19.75	-	-	-	-	30.00	-10.25
2442	22.50	-	-	-	-	30.00	-7.50
2472	9.19	-	-	-	-	30.00	-20.81

**Table 33 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	19.75	-	-	-	-	30.00	-10.25	22.86	36.00	-13.14
2442	22.50	-	-	-	-	30.00	-7.50	25.61	36.00	-10.39
2472	9.19	-	-	-	-	30.00	-20.81	12.30	36.00	-23.70

**Table 34 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	18.45	-	-	-	-	30.00	-11.55
2442	22.44	-	-	-	-	30.00	-7.56
2472	8.23	-	-	-	-	30.00	-21.77

**Table 35 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	18.45	-	-	-	-	30.00	-11.55	21.56	36.00	-14.44
2442	22.44	-	-	-	-	30.00	-7.56	25.55	36.00	-10.45
2472	8.23	-	-	-	-	30.00	-21.77	11.34	36.00	-24.66

**Table 36 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	14.39	-	-	-	-	30.00	-15.61
2442	14.46	-	-	-	-	30.00	-15.54
2472	1.09	-	-	-	-	30.00	-28.91

**Table 37 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	14.39	-	-	-	-	30.00	-15.61	17.50	36.00	-18.50
2442	14.46	-	-	-	-	30.00	-15.54	17.57	36.00	-18.43
2472	1.09	-	-	-	-	30.00	-28.91	4.20	36.00	-31.80

**Table 38 - ISD Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	17.15	-	-	-	-	30.00	-12.85
2442	17.23	-	-	-	-	30.00	-12.77
2472	3.89	-	-	-	-	30.00	-26.11

**Table 39 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	17.15	-	-	-	-	30.00	-12.85	20.26	36.00	-15.74
2442	17.23	-	-	-	-	30.00	-12.77	20.34	36.00	-15.66
2472	3.89	-	-	-	-	30.00	-26.11	7.00	36.00	-29.00

**Table 40 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	19.37	-	-	-	-	30.00	-10.63
2442	20.39	-	-	-	-	30.00	-9.61
2472	4.21	-	-	-	-	30.00	-25.79

**Table 41 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	19.37	-	-	-	-	30.00	-10.63	22.48	36.00	-13.52
2442	20.39	-	-	-	-	30.00	-9.61	23.50	36.00	-12.50
2472	4.21	-	-	-	-	30.00	-25.79	7.32	36.00	-28.68

**Table 42 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	18.71	18.75	-	-	21.73	30.00	-8.27
2442	22.34	22.33	-	-	25.34	30.00	-4.66
2472	7.85	8.11	-	-	10.99	30.00	-19.01

**Table 43 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	18.71	18.75	-	-	21.73	30.00	-8.27	24.84	36.00	-11.16
2442	22.34	22.33	-	-	25.34	30.00	-4.66	28.45	36.00	-7.55
2472	7.85	8.11	-	-	10.99	30.00	-19.01	14.10	36.00	-21.90

**Table 44 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	17.60	17.89	-	-	20.75	30.00	-9.25
2442	22.38	22.47	-	-	25.43	30.00	-4.57
2472	7.35	7.43	-	-	10.39	30.00	-19.61

**Table 45 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	17.60	17.89	-	-	20.75	30.00	-9.25	23.86	36.00	-12.14
2442	22.38	22.47	-	-	25.43	30.00	-4.57	28.54	36.00	-7.46
2472	7.35	7.43	-	-	10.39	30.00	-19.61	13.50	36.00	-22.50

**Table 46 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	13.85	14.33	-	-	17.10	30.00	-12.90
2442	14.07	14.24	-	-	17.17	30.00	-12.83
2472	-0.12	-0.48	-	-	2.72	30.00	-27.28

**Table 47 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	13.85	14.33	-	-	17.10	30.00	-12.90	20.21	36.00	-15.79
2442	14.07	14.24	-	-	17.17	30.00	-12.83	20.28	36.00	-15.72
2472	-0.12	-0.48	-	-	2.72	30.00	-27.28	5.83	36.00	-30.17

**Table 48 - ISED Maximum Conducted (average) Output Power Results**





Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	13.99	14.47	-	-	17.24	30.00	-12.76
2442	17.14	17.42	-	-	20.26	30.00	-9.74
2472	1.95	2.23	-	-	5.09	30.00	-24.91

**Table 49 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	13.99	14.47	-	-	17.24	30.00	-12.76	20.35	36.00	-15.65
2442	17.14	17.42	-	-	20.26	30.00	-9.74	23.37	36.00	-12.63
2472	1.95	2.23	-	-	5.09	30.00	-24.91	8.20	36.00	-27.80

**Table 50 - ISED Maximum Conducted (average) Output Power Results**



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (b)(3) RSS-247 5.4 d)	Test Method(s):	C63.10 11.9.2.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	3.11
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
2412	16.59	16.86	-	-	19.73	30.00	-10.27
2442	20.03	20.29	-	-	23.14	30.00	-6.86
2472	3.01	3.25	-	-	6.14	30.00	-23.86

**Table 51 - FCC Maximum Conducted (average) Output Power Results**

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ					
2412	16.59	16.86	-	-	19.73	30.00	-10.27	22.84	36.00	-13.16
2442	20.03	20.29	-	-	23.14	30.00	-6.86	26.25	36.00	-9.75
2472	3.01	3.25	-	-	6.14	30.00	-23.86	9.25	36.00	-26.75

**Table 52 - ISED Maximum Conducted (average) Output Power Results**

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.



### 2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	21-Sep-2023
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5921	12	05-Jul-2023
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5922	12	05-Jul-2023
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	5932	12	10-May-2023
Digital Multimeter	Fluke	115	6145	12	17-Jun-2023

**Table 53**

O/P Mon - Output Monitored using calibrated equipment



## **2.4 Authorised Band Edges**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d)  
ISED RSS-247, Clause 5.5

### **2.4.2 Equipment Under Test and Modification State**

A2901, S/N: CMWNHDHDYJ - Modification State 0

### **2.4.3 Date of Test**

31-January-2023 to 06-February-2023

### **2.4.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

### **2.4.5 Environmental Conditions**

Ambient Temperature	21.9 - 24.2 °C
Relative Humidity	33.6 - 44.8 %




**2.4.6 Test Results**

2.4 GHz WLAN


20 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
802.11b	1 Mbps	-	-	2412	2400	-47.04
802.11g	54 Mbps	-	-	2412	2400	-34.50
802.11n HT20	MCS4	-	-	2412	2400	-34.51
802.11ax HE20	MCS9x1	SU	-	2412	2400	-34.54
802.11ax HE20	MCS9x1	106	53	2412	2400	-36.35


**Table 54 - SISO Authorised Band Edge Results**

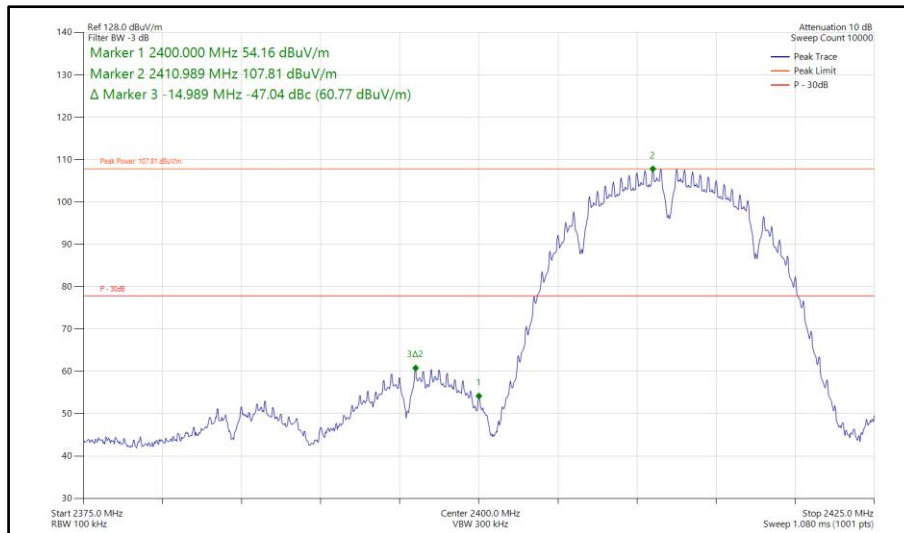

**Figure 77 - 802.11b, SISO, Core 0 - 2412 MHz, Band Edge Frequency 2400 MHz**

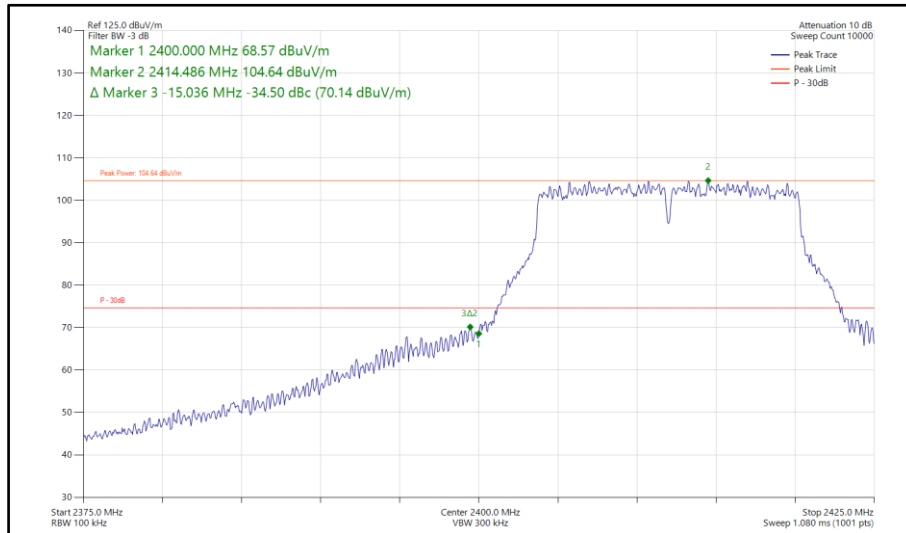

**Figure 78 - 802.11g, SISO, Core 0 - 2412 MHz,  
Band Edge Frequency 2400 MHz**

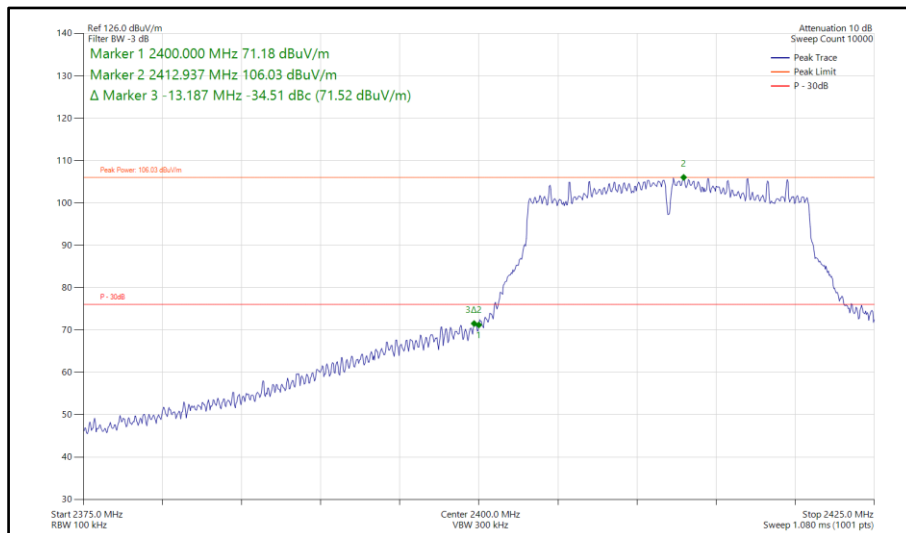

**Figure 79 - 802.11n, HT20, SISO, Core 0 - 2412 MHz,  
Band Edge Frequency 2400 MHz**