

MEASUREMENT REPORT

FCC PART 15.407 UNII 802.11a/ax OFDM WIFI 6E

Applicant Name:
 Apple Inc.
 One Apple Park Way
 Cupertino, CA 95014
 United States

Date of Testing:
 5/20/2024 - 10/1/2024
Test Report Issue Date:
 10/2/2024
Test Site/Location:
 Element Materials Technology, Morgan Hill, CA, USA
Test Report Serial No.:
 1C2405200018-24-R2.BCG


FCC ID:	BCGA2995
APPLICANT:	Apple Inc.

Application Type: Certification
Model: A2995, A2996
EUT Type: Tablet Device
Frequency Range: 5955 – 7115MHz
Modulation Type: OFDM
FCC Classification: 15E 6GHz Low Power Dual Client (6CD)
 15E 6 GHZ Very Low Power Device
FCC Rule Part(s): Part 15 Subpart E (15.407)
Test Procedure(s): ANSI C63.10-2020, KDB 789033 D02 v02r01
 KDB 662911 D01 v02r01, KDB 987594 D02 v02r01
 KDB 987594 D04 v02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N:1C2405200018-24-R2.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



 RJ Ortanez
 Executive Vice President

Prepared by: WKR0000007111
Reviewed by: WKR0000007200




FCC ID: BCGA2995	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device
		Page 1 of 317


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Materials Technology Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Antenna Description	9
2.4	Test Support Equipment	9
2.5	Test Configuration	10
2.6	Software and Firmware	10
2.7	EMI Suppression Device(s)/Modifications	10
3.0	DESCRIPTION OF TESTS	11
3.1	Evaluation Procedure	11
3.2	AC Line Conducted Emissions	11
3.3	Radiated Emissions	12
3.4	Environmental Conditions	12
4.0	ANTENNA REQUIREMENTS	13
5.0	MEASUREMENT UNCERTAINTY	14
6.0	TEST EQUIPMENT CALIBRATION DATA	15
7.0	TEST RESULTS	16
7.1	Summary	16
7.2	26dB & 99% Bandwidth Measurement	18
7.3	Conducted Output Power and Max EIRP Measurement	44
7.4	Maximum Power Spectral Density	74
7.5	In-Band Emissions	129
7.6	Contention Based Protocol	174
7.7	Transmit Power Control (TPC)	200
7.8	Radiated Spurious Emissions – Above 1GHz	204
7.9	Radiated Spurious Emissions – Below 1GHz	306
7.10	AC Line-Conducted Emissions Measurement	311
8.0	CONCLUSION	317

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 2 of 317



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	7.870	8.96	3.908	5.92	4.217	6.25	7.161	8.55	7.586	8.80
6		802.11a/ax	6435 - 6515	6.546	8.16	3.199	5.05	4.721	6.74	5.808	7.64	6.730	8.28
7		802.11a/ax	6535 - 6875	6.934	8.41	3.589	5.55	3.459	5.39	6.607	8.20	6.607	8.20
8		802.11a/ax	6895 - 7115	6.745	8.29	3.784	5.78	2.793	4.46	6.501	8.13	5.875	7.69
5	40	802.11ax	5965 - 6405	16.444	12.16	7.762	8.90	8.318	9.20	14.791	11.70	14.825	11.71
6		802.11ax	6445 - 6525	13.305	11.24	6.761	8.30	9.226	9.65	12.589	11.00	13.183	11.20
7		802.11ax	6565 - 6845	13.183	11.20	7.228	8.59	6.918	8.40	13.397	11.27	13.152	11.19
8		802.11ax	6885 - 7085	12.706	11.04	7.244	8.60	5.702	7.56	13.122	11.18	12.050	10.81
5	80	802.11ax	5985 - 6385	31.333	14.96	15.668	11.95	16.032	12.05	29.580	14.71	30.200	14.80
6		802.11ax	6465	26.242	14.19	12.023	10.80	17.418	12.41	22.909	13.60	26.363	14.21
7		802.11ax	6545 - 6865	27.669	14.42	13.804	11.40	13.932	11.44	26.546	14.24	26.062	14.16
8		802.11ax	6945 - 7025	26.424	14.22	15.346	11.86	10.864	10.36	25.586	14.08	23.550	13.72
5	160	802.11ax	6025 - 6345	55.976	17.48	28.184	14.50	28.445	14.54	52.360	17.19	52.845	17.23
6		802.11ax	6505	44.157	16.45	20.893	13.20	29.512	14.70	40.551	16.08	46.666	16.69
7		802.11ax	6665 - 6825	47.643	16.78	25.177	14.01	24.547	13.90	45.604	16.59	45.290	16.56
8		802.11ax	6985	45.499	16.58	25.704	14.10	20.091	13.03	45.186	16.55	40.272	16.05

EUT Overview Low Power Indoor

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						CDD Primary		CDD Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	5955 - 6415	143.219	21.56	70.146	18.46	74.989	18.75	281.838	24.50	286.418	24.57
7		802.11a/ax	6535 - 6855	138.038	21.40	71.945	18.57	70.469	18.48	271.644	24.34	268.534	24.29
5	40	802.11ax	5965 - 6405	142.889	21.55	71.779	18.56	73.282	18.65	287.740	24.59	290.402	24.63
7		802.11ax	6565 - 6845	133.968	21.27	69.502	18.42	68.234	18.34	275.423	24.40	274.157	24.38
5	80	802.11ax	5985 - 6385	144.877	21.61	69.663	18.43	75.509	18.78	289.734	24.62	286.418	24.57
7		802.11ax	6625 - 6785	130.317	21.15	71.779	18.56	70.307	18.47	274.157	24.38	274.157	24.38
5	160	802.11ax	6025 - 6345	147.231	21.68	69.984	18.45	72.111	18.58	289.734	24.62	289.068	24.61
7		802.11ax	6665	139.316	21.44	70.307	18.47	67.608	18.30	277.971	24.44	279.254	24.46

EUT Overview Standard Power

UNII Band	Channel Bandwidth (MHz)	Mode	Tx Frequency (MHz)	SISO						SDM Primary		SDM Diversity	
				Antenna 5T		Antenna 3b		Antenna 1b		Summed		Summed	
				Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
5	20	802.11a/ax	6115 - 6415	3.206	5.06	1.614	2.08	1.622	2.10	2.911	4.64	2.958	4.71
7		802.11a/ax	6535 - 6855	2.793	4.46	1.419	1.52	1.361	1.34	2.612	4.17	2.588	4.13
5	40	802.11ax	6125 - 6405	6.124	7.87	3.199	5.05	3.206	5.06	6.053	7.82	6.124	7.87
7		802.11ax	6565 - 6845	5.559	7.45	2.858	4.56	2.661	4.25	5.188	7.15	5.140	7.11
5	80	802.11ax	6145 - 6385	12.474	10.96	6.252	7.96	6.412	8.07	11.561	10.63	12.134	10.84
7		802.11ax	6625 - 6785	11.117	10.46	5.662	7.53	5.546	7.44	10.233	10.10	10.304	10.13
5	160	802.11ax	6185 - 6345	23.335	13.68	10.965	10.40	11.885	10.75	20.797	13.18	21.330	13.29
7		802.11ax	6665	18.281	12.62	10.046	10.02	9.162	9.62	17.865	12.52	17.783	12.50

EUT Overview Very Low Power

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device		Page 3 of 317

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Agreements (MRAs)

FCC ID: BCGA2995	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 4 of 317

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2995**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band.

Test Device Serial No.: Y4D3WW1C9V, GW373NWX36, GXD3JTXYXM, W64VVD6Q0H, J2DT9VW3FP, WH6226Y7R5, H9HH4U0007A0000R51, H9HH4Z000940000CFX

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming.

Standard Power (SP) mode and Very Low Power (VLP) are supported for U-NII Bands 5 and 7. Lower Power Indoor (LPI) mode is supported for U-NII Bands 5, 6, 7, 8. Throughout the report, data of Standard Power mode is denoted as SP, and data of Very Low Power mode is denoted as VLP, while data of Lower Power Indoor mode is denoted as LPI. VLP channels below 6105 MHz in the UNII-5 band are disabled in the US and its territories.

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	5955	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a / 802.11ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device		Page 5 of 317

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
:	:			:	:		
47	6185			175	6825		
:	:						
79	6345						

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) KDB 789033 D02 v02r01 and ANSI C63.10-2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode / Band		Duty Cycle [%]				
		Antenna 5T	Antenna 3b	Antenna 1b	CDD/SDM Primary	CDD/SDM Diversity
6GHz	11a (20MHz)	91.56	91.82	91.87	N/A	N/A
	11ax(SU) (20MHz)	87.47	87.46	87.52	87.35	87.46
	11ax(SU) (40MHz)	85.24	85.67	85.64	86.56	86.85
	11ax(SU) (80MHz)	85.75	85.89	85.81	86.65	86.46
	11ax(SU) (160MHz)	83.61	83.63	83.43	83.66	83.76

Table 2-5. Measured Duty Cycles

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 6 of 317

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO			CDD			SDM			STBC		
		Antenna 5T	Antenna 3b	Antenna 1b	Antenna 5T	Antenna 3b	Antenna 1b	Antenna 5T	Antenna 3b	Antenna 1b	Antenna 5T	Antenna 3b	Antenna 1b
6GHz	11a (20MHz)	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗
	11ax(SU) (20MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (40MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (80MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	11ax(SU) (160MHz)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table 2-6. WIFI Configurations

- ✓ = Support ; ✗ = NOT Support
- SISO** = Single Input Single Output
- SDM** = Spatial Diversity Multiplexing – MIMO function
- CDD** = Cyclic Delay Diversity - 2Tx Function
- STBC** = Space-Time Block Coding – 2Tx Function

The device supports the following data rates (shown in Mbps):

802.11a	MCS Index			Spatial Stream	OFDM (802.11n/802.11ac)				OFDM (802.11ac)				OFDM (802.11ax)											
					20MHz		40MHz		80MHz		160MHz		20MHz		40MHz		80MHz		160MHz					
	HT	VHT	HE		0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI	0.8µs GI	0.4µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
6	0	0	0	1	6.5	7.2	13.5	15	29.3	32.5	58.5	65	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
9	1	1	1	1	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
12	2	2	2	1	19.5	21.7	40.5	45	87.8	97.5	175.5	195	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8
18	3	3	3	1	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
24	4	4	4	1	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
36	5	5	5	1	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
48	6	6	6	1	58.5	65	121.5	135	263.3	292.5	526.5	585	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
54	7	7	7	1	65	72.2	135	150	292.5	325	585	650	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5
-	-	8	8	1	-	-	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
-	-	9	9	1	-	-	180	200	390	433.3	780	866.7	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7
-	-	-	10	1	-	-	-	-	-	-	-	-	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8
-	-	-	11	1	-	-	-	-	-	-	-	-	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8
6	8	0	0	2	13	14.4	27	30	58.5	65	117	130	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
9	9	1	1	2	26	28.9	54	60	117	130	234	260	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
12	10	2	2	2	39	43.3	81	90	175.5	195	351	390	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
18	11	3	3	2	52	57.8	108	120	234	260	468	520	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
24	12	4	4	2	78	86.7	162	180	351	390	702	780	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
36	13	5	5	2	104	115.6	216	240	468	520	936	1040	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
48	14	6	6	2	117	130	243	270	526.5	585	1053	1170	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
54	15	7	7	2	130	144.4	270	300	585	650	1170	1300	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
-	-	8	8	2	156	173.3	324	360	702	780	1404	1560	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470
-	-	9	9	2	-	-	360	400	780	866.7	1560	1733.3	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3
-	-	-	10	2	-	-	-	-	-	-	-	-	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
-	-	-	11	2	-	-	-	-	-	-	-	-	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7

Table 2-7. Supported Data Rates

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device		Page 7 of 317

3. This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	Thread	NB UNII	WLAN	WIFI 5GHz	WIFI 6GHz	LTE / FR1 NR		
		BDR, EDR, HDR4/8, LE1/2M	802.15.4	BDR, HDR4/8	802.11 b/g/n/ax	802.11 a/n/ac/ax	802.11 a/ax	LB	MB/HB	Ultra High Band
1a	Config 1	✓	✗	✗	✗	✗	✗	✗	✗	✓
1a	Config 2	✗	✗	✗	✓	✗	✗	✗	✗	✓
1a	Config 3	✗	✓	✗	✗	✗	✗	✗	✗	✓
1b	Config 4	✗	✗	✓	✗	✗	✗	✗	✓	✗
1b	Config 5	✗	✗	✗	✗	✓	✗	✗	✓	✗
1b	Config 6	✗	✗	✗	✗	✗	✓	✗	✓	✗
3a	Config 7	✗	✗	✗	✓	✗	✗	✗	✗	✓
3a	Config 8	✓	✗	✗	✗	✗	✗	✗	✗	✓
3a	Config 9	✗	✓	✗	✗	✗	✗	✗	✗	✓
3b	Config 10	✗	✗	✓	✗	✗	✗	✗	✓	✗
3b	Config 11	✗	✗	✗	✗	✓	✗	✗	✓	✗
3b	Config 12	✗	✗	✗	✗	✗	✓	✗	✓	✗
4	Config 13	✓	✗	✗	✗	✗	✗	✓	✗	✗
4	Config 14	✓	✗	✗	✗	✗	✗	✗	✓	✗
4	Config 15	✓	✗	✗	✗	✗	✗	✗	✗	✓
4	Config 16	✗	✓	✗	✗	✗	✗	✓	✗	✗
4	Config 17	✗	✓	✗	✗	✗	✗	✗	✓	✗
4	Config 18	✗	✓	✗	✗	✗	✗	✗	✗	✓

Table 2-8. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note: All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 14 and reported in Bluetooth and Part 27b RF test reports.

4. Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz), in both connected and disconnected modes, and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device		Page 8 of 317

2.3 Antenna Description

Following antenna gains were provided by the manufacturer were used for testing.

UNII Band	Tx Frequency (MHz)	Highest Antenna Gain			Lowest Antenna Gain		
		Antenna 5T	Antenna 3b	Antenna 1b	Antenna 5T	Antenna 3b	Antenna 1b
5	5955-6415	3.7	0.6	0.8	2.8	-0.5	-0.4
6	6435-6515	3.1	-0.2	1.5	3.1	-0.2	1.5
7	6535-6855	3.5	0.6	0.5	2.8	-0.9	-0.9
8	6895-7115	3.3	0.9	-0.4	1.8	0.0	-1.1

Table 2-9. Antenna Gains

2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: Model:	A2141 A2166	S/N: S/N:	C02H604EQ05D C4H042705ZNP0WA6
2	Apple USB-C Cable	Model:	Spartan	S/N:	GXK1336018XKTR024
3	USB-C Cable w/ AC Adapter	Model: Model:	A246C A2305	S/N: S/N:	DWH80115BK826GV19 C4H95160004PF4F4V
4	Apple Pencil	Model:	A2538	S/N:	KJ26TCFXJW
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Netgear	Model:	RAXE500	S/N:	6JX215GA10A5
7	Broadcom AP	Model:	N/A	S/N:	N/A
8	Table Device	Model:	A2993	S/N:	MWLYPRGQG5

Table 2-10. Test Support Equipment List

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 9 of 317

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2020, KDB 789033 D02 v02r01 and KDB 987594 D02 v02r01. ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.3 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 0, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and the worst cases were reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11ax HE20/40/80/160 2TX SDM mode test data provided in this report covers 802.11ax HE20/40/80/160 2TX STBC mode.

For 802.11ax-RU test results, see separate UNII 6E OFDMA report, 1C2405200018-25.BCG.

All data rate has been investigated and only the worst case data rate per group is reported. The worst case data rate per mode are as follows:

- o 802.11a:
 - Data Rate: 54Mbps
- o 802.11ax(SU) HE20/HE40/HE80/HE160
 - Data Rate: MCS11

2.6 Software and Firmware

The test was conducted with firmware version 22A312 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 10 of 317

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA2995	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 11 of 317

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 12 of 317

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2995	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 13 of 317

V 10.50.40 12/15/2021

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 14 of 317

V 10.50.40 12/15/2021

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-26.5GHz PXA Signal Analyzer	10/18/2023	Annual	10/18/2024	MY55330128
Anritsu	ML2495A	Power Meter	7/8/2024	Annual	7/8/2025	1039008
Anritsu	MA2411B	Pulse Power Sensor	7/1/2024	Annual	7/1/2025	1911105
Anritsu	MA2411B	Pulse Power Sensor	11/8/2023	Annual	11/8/2024	1027293
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MYS7212015
Fairview Microwave	M2CP1122-10	30MHz-40GHz Conducted Coupler *	6/10/2024	Annual	6/10/2025	1946
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz Conducted Cable/Attenuator *	6/10/2024	Annual	6/10/2025	-
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/15/2023	Annual	8/15/2024	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	7/12/2024	Annual	7/12/2025	101363
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 6-1. Test Equipment List

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 15 of 317

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2995
 FCC Classification: 15E 6GHz Dual Client (6CD), 15E 6 GHz Very Low Power Device

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049, 15.407(a)(11)	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands < 320MHz (5.925 - 7.125GHz)	CONDUCTED	PASS	Section 7.2
15.407(a)(7) 15.407(a)(8) 15.407(a)(9)	Maximum Power Spectral Density	< 17dBm/MHz e.i.r.p for Standard Power < -1dBm/MHz e.i.r.p.for Low Power Indoor < -5dBm/MHz e.i.r.p.for Very Low Power		PASS	Section 7.4
15.407(a)(7) 15.407(a)(8) 15.407(a)(9)	Maximum EIRP	< 30dBm over the frequency band of operation for Standard Power < 24dBm over the frequency band of operation for Low Power Indoor < 14dBm over the frequency band of operation for Very Low Power		PASS	Section 0
15.407(b)(7)	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7)		PASS	Section 7.5
15.407(d)(6)	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty		PASS	Section 7.6
15.407(a)(7)	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	EUT maintains its power level at least 6 dB lower than that of the standard-power access point		PASS	See UNII 6E OFDMA Report (1C240520 0018-25.BCG)
987594 D02 v02r01	Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	EUT maximum power level shall not exceed 30dBm EIRP hen connected to Standard Power AP, and 24dBm EIRP when connected to Low Power Indoor AP		PASS	
15.407(b)(6)	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band	RADIATED	PASS	Section 7.7
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7, 7.9
15.407(b)(8)	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207	LINE CONDUCTED	PASS	Section 7.10

Table 7-1. Summary of Test Results

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 16 of 317

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Conducted Automation Software," Version 1.1.0.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.0.0.
- 6) All radiated measurements were tested at the highest supported power setting per band.

FCC ID: BCGA2995	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 17 of 317

7.2 26dB & 99% Bandwidth Measurement

\$2.1049; \$15.407

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2020 – Section 12.5
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. All data rates have been investigated and only the worst case data rate per group is reported.
3. Low, mid, and high channels were tested and tabular data has been reported. Only mid channel bandwidth plots have been reported.

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 18 of 317

V 10.50.40 12/15/2021

7.2.1 Antenna 5T 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5935	1	a	54	16.63	20.60	320	Pass
	6175	45	a	54	16.66	20.67	320	Pass
	6415	93	a	54	16.63	20.72	320	Pass
	5935	1	ax (20MHz)	135/143.4 (MCS11)	19.05	21.32	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.03	21.17	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.10	21.20	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.90	41.26	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.93	41.28	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.93	41.27	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.18	81.42	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.12	81.85	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.20	81.50	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	157.55	197.59	320	Pass
	6181	47	ax (160MHz)	1020.8/1201 (MCS11)	157.15	167.43	320	Pass
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	157.03	166.51	320	Pass	
Band 7	6535	117	a	54	16.64	20.72	320	Pass
	6695	149	a	54	16.66	20.70	320	Pass
	6875	181	a	54	16.67	20.75	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.04	21.35	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.02	21.27	320	Pass
	6875	181	ax (20MHz)	135/143.4 (MCS11)	19.08	21.28	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.92	41.38	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.92	41.61	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.94	41.59	320	Pass
	6545	135	ax (80MHz)	567/600.5 (MCS11)	77.21	81.71	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.21	81.71	320	Pass
	6865	167	ax (80MHz)	567/600.5 (MCS11)	77.38	81.82	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	157.53	166.95	320	Pass

Table 7-2. Conducted Bandwidth Measurements Antenna 5T SP

FCC ID: BCGA2995	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 19 of 317

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.55	20.70	320	Pass
	6175	45	a	54	16.67	20.66	320	Pass
	6415	93	a	54	16.59	20.55	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	19.01	21.06	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	18.99	20.88	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.01	21.15	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.87	40.99	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.86	41.23	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.96	41.26	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.12	81.32	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	76.93	80.85	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.06	81.00	320	Pass
6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.81	165.30	320	Pass	
6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.72	166.86	320	Pass	
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.85	165.83	320	Pass	
Band 6	6435	97	a	54	16.58	20.38	320	Pass
	6475	105	a	54	16.69	20.70	320	Pass
	6515	113	a	54	16.65	20.90	320	Pass
	6435	97	ax (20MHz)	135/143.4 (MCS11)	18.99	20.79	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.07	21.14	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	19.01	20.85	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.84	41.06	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.82	41.16	320	Pass
	6525	115	ax (40MHz)	271/286.8 (MCS11)	37.95	40.97	320	Pass
	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.07	81.05	320	Pass
6505	111	ax (160MHz)	1020.8/1201 (MCS11)	157.01	166.24	320	Pass	
Band 7	6535	117	a	54	16.58	20.57	320	Pass
	6695	149	a	54	16.69	20.75	320	Pass
	6875	185	a	54	16.62	20.71	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.01	21.21	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.09	21.36	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.01	20.93	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.93	41.16	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.85	41.01	320	Pass
	6845	179	ax (40MHz)	271/286.8 (MCS11)	37.86	40.91	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	77.06	81.21	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.08	80.77	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	77.17	81.10	320	Pass
6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.62	165.56	320	Pass	
6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.81	165.40	320	Pass	
Band 8	6895	189	a	54	16.61	20.57	320	Pass
	6995	209	a	54	16.69	20.76	320	Pass
	7115	233	a	54	16.57	20.43	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	18.95	20.91	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	18.98	20.86	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	19.00	20.93	320	Pass
	6885	187	ax (40MHz)	271/286.8 (MCS11)	37.86	41.43	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	37.83	41.20	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	37.92	41.01	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.03	80.98	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.05	81.06	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.93	165.64	320	Pass


Table 7-3. Conducted Bandwidth Measurements Antenna 5T LPI

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 20 of 317


	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	6115	33	a	54	16.61	20.70	320	Pass
	6255	61	a	54	16.67	20.71	320	Pass
	6415	93	a	54	16.65	20.69	320	Pass
	6115	33	ax (20MHz)	135/143.4 (MCS11)	19.02	21.17	320	Pass
	6255	61	ax (20MHz)	135/143.4 (MCS11)	19.04	21.27	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.06	21.20	320	Pass
	6125	35	ax (40MHz)	271/286.8 (MCS11)	37.91	41.34	320	Pass
	6245	59	ax (40MHz)	271/286.8 (MCS11)	37.95	41.32	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.93	41.21	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.14	81.86	320	Pass
	6225	55	ax (80MHz)	567/600.5 (MCS11)	77.18	81.72	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.20	81.51	320	Pass
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.63	166.22	320	Pass
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.76	166.03	320	Pass	
Band 7	6535	117	a	54	16.62	20.67	320	Pass
	6695	149	a	54	16.64	20.74	320	Pass
	6855	181	a	54	16.66	20.72	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.03	21.23	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.04	21.29	320	Pass
	6855	181	ax (20MHz)	135/143.4 (MCS11)	19.03	21.28	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.93	41.26	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.92	41.12	320	Pass
	6845	179	ax (40MHz)	271/286.8 (MCS11)	37.91	41.49	320	Pass
	6625	135	ax (80MHz)	567/600.5 (MCS11)	77.06	81.52	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.13	81.91	320	Pass
	6785	167	ax (80MHz)	567/600.5 (MCS11)	77.15	81.82	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.88	166.16	320	Pass

Table 7-4. Conducted Bandwidth Measurements Antenna 5T VLP


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 21 of 317

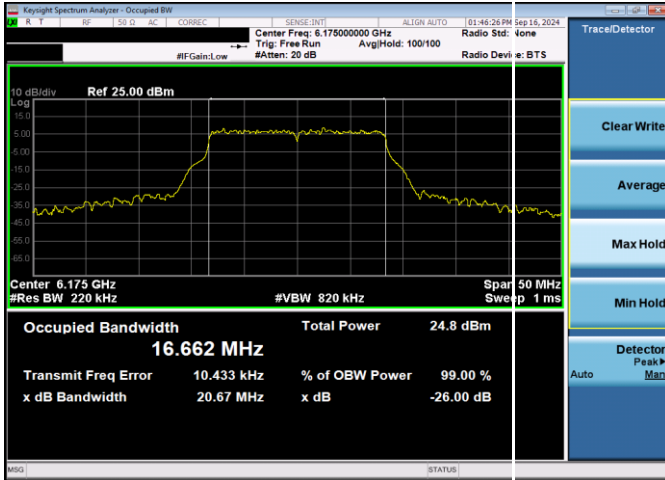


Plot 7-1. 26dB & 99% Bandwidth Plot Antenna 5T SP (20MHz 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

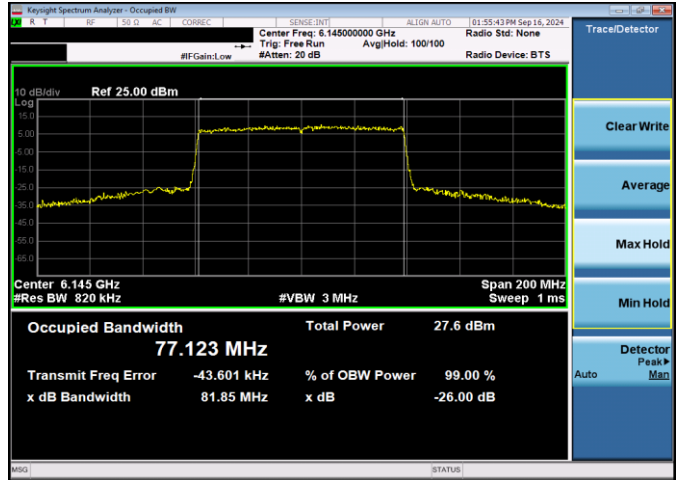


Plot 7-4. 26dB & 99% Bandwidth Plot Antenna 5T SP (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)

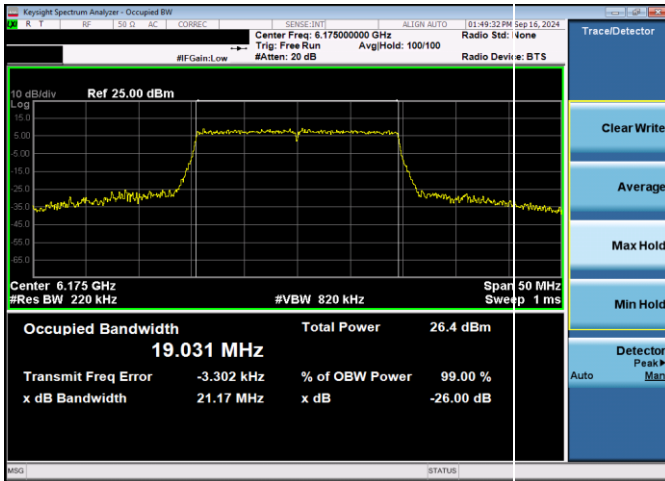


Plot 7-2. 26dB & 99% Bandwidth Plot Antenna 5T SP (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)

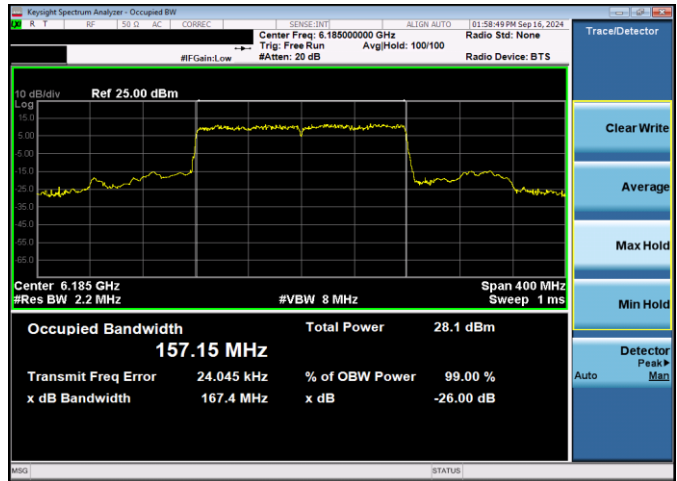

Plot 7-5. 26dB & 99% Bandwidth Plot Antenna 5T SP (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)

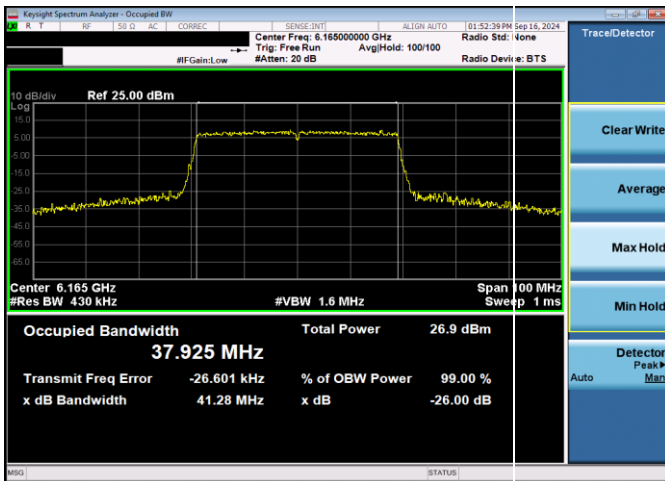


Plot 7-3. 26dB & 99% Bandwidth Plot Antenna 5T SP (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)

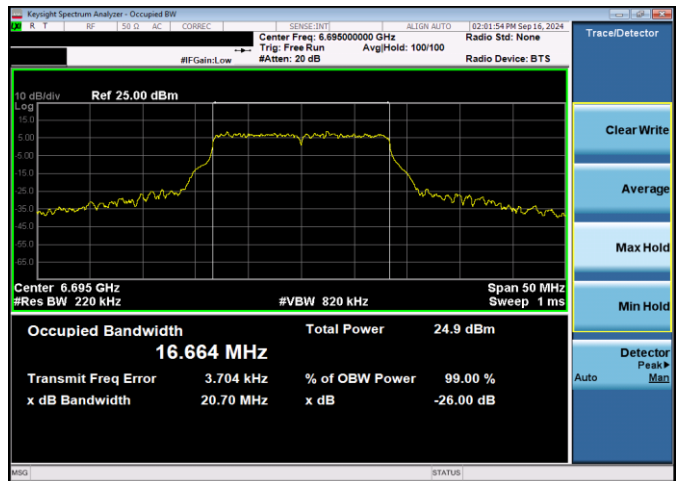


Plot 7-6. 26dB & 99% Bandwidth Plot Antenna 5T SP (20MHz 802.11a (UNII Band 7) – Ch. 149, 54Mbps)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 22 of 317

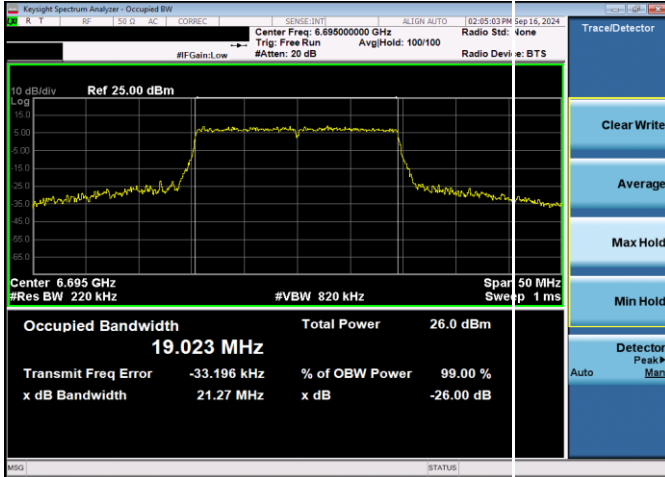


Plot 7-7. 26dB & 99% Bandwidth Plot Antenna 5T SP (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11)

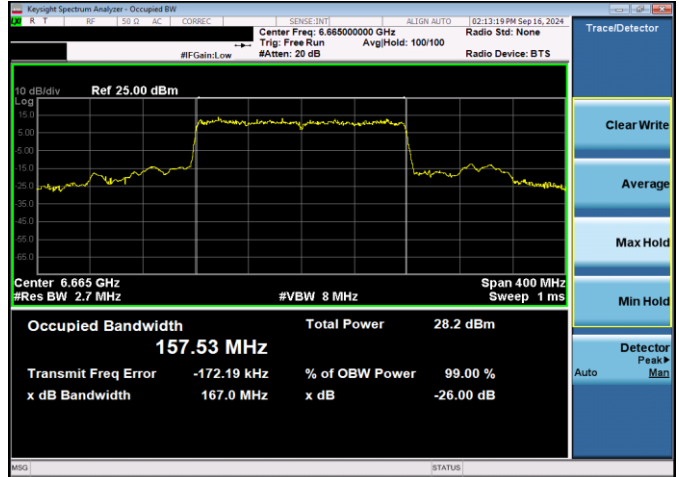

Plot 7-10. 26dB & 99% Bandwidth Plot Antenna 5T SP (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)

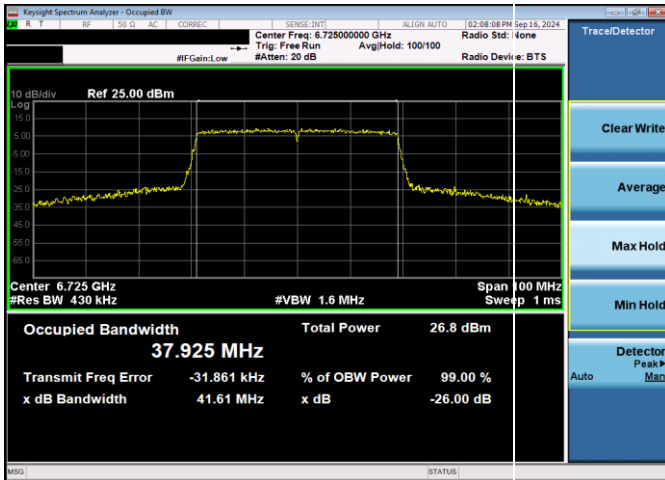


Plot 7-8. 26dB & 99% Bandwidth Plot Antenna 5T SP (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

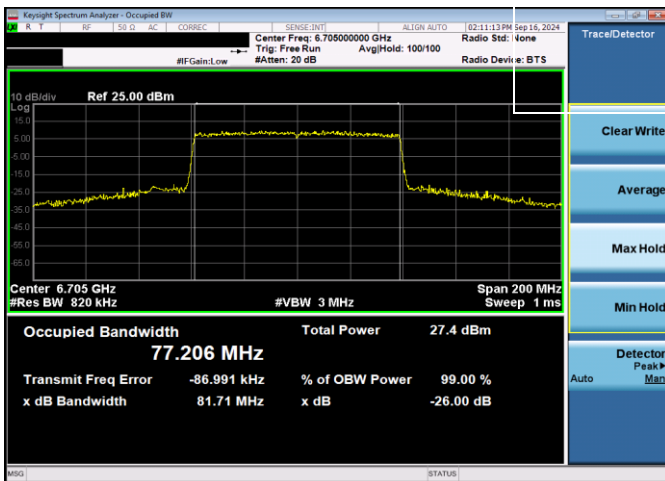


Plot 7-9. 26dB & 99% Bandwidth Plot Antenna 5T SP (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 23 of 317

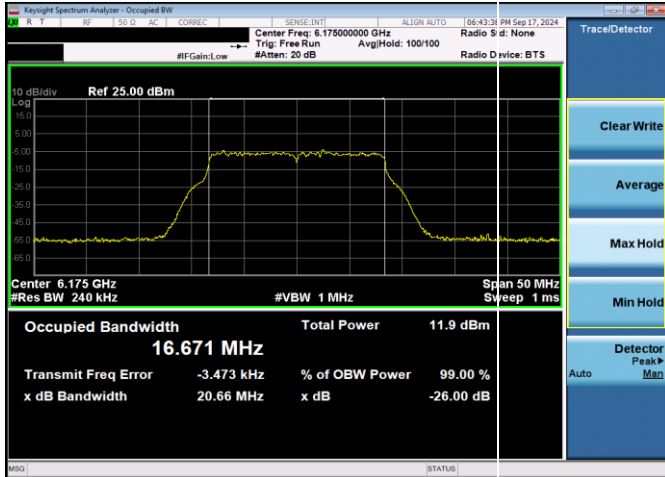


Plot 7-11. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

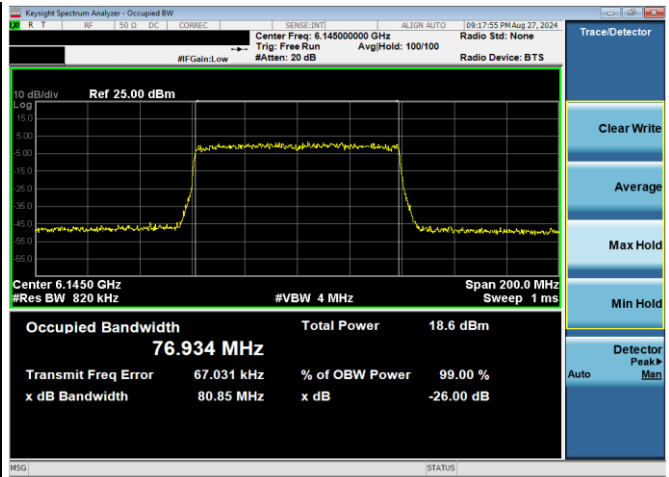

Plot 7-14. 26dB & 99% Bandwidth Plot Antenna 5T LPI (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)

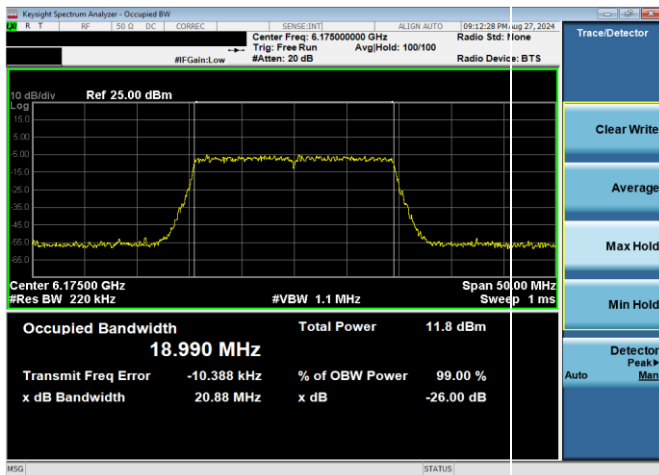


Plot 7-12. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)

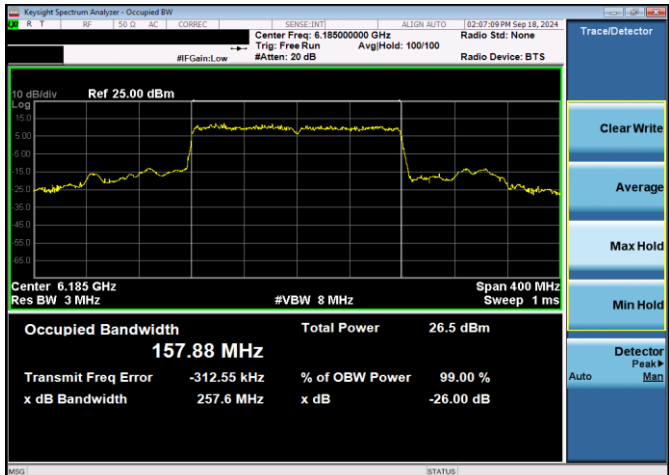

Plot 7-15. 26dB & 99% Bandwidth Plot Antenna 5T LPI (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)




Plot 7-13. 26dB & 99% Bandwidth Plot Antenna 5T LPI (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)

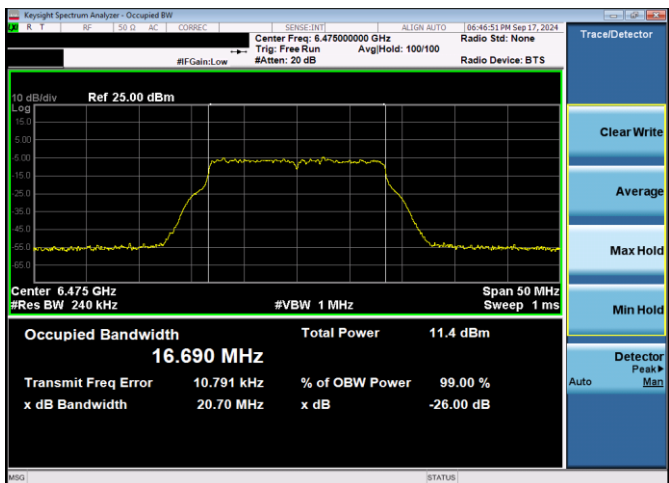


Plot 7-16. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11a (UNII Band 6) – Ch. 105, 54Mbps)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 24 of 317

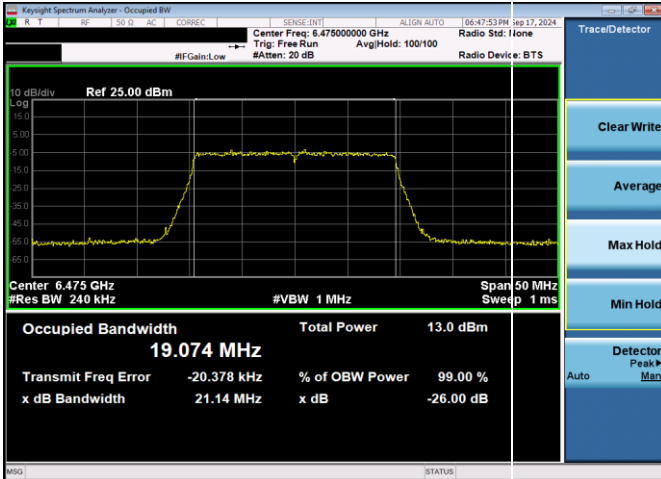


Plot 7-17. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11ax (UNII Band 6) – Ch. 105, MCS11)

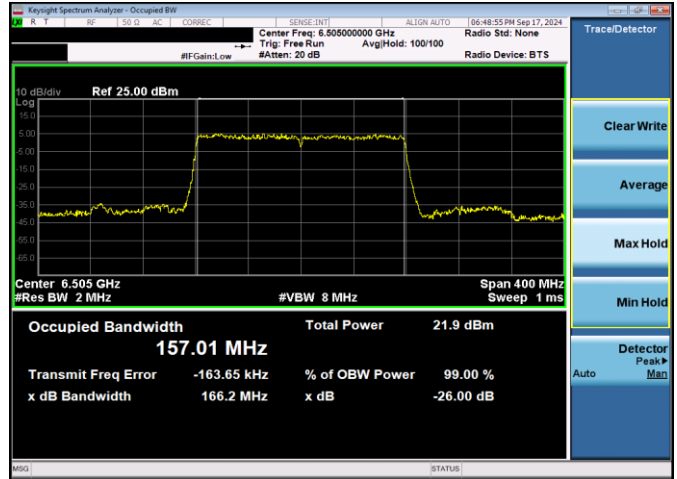


Plot 7-20. 26dB & 99% Bandwidth Plot Antenna 5T LPI (160MHz 802.11ax (UNII Band 6) – Ch. 111, MCS11)

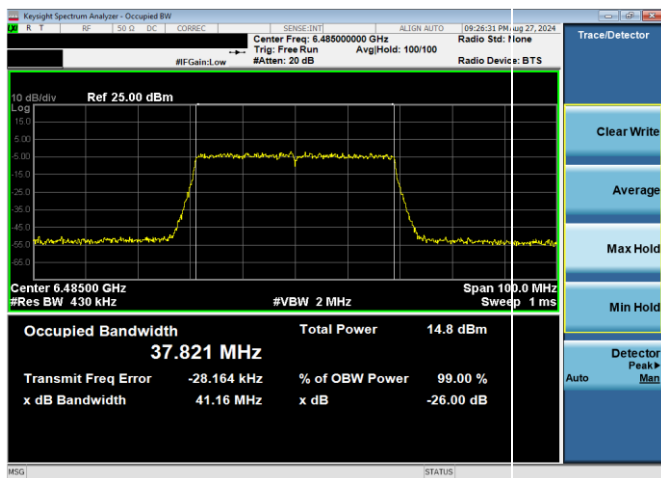


Plot 7-18. 26dB & 99% Bandwidth Plot Antenna 5T LPI (40MHz 802.11ax (UNII Band 6) – Ch. 107, MCS11)

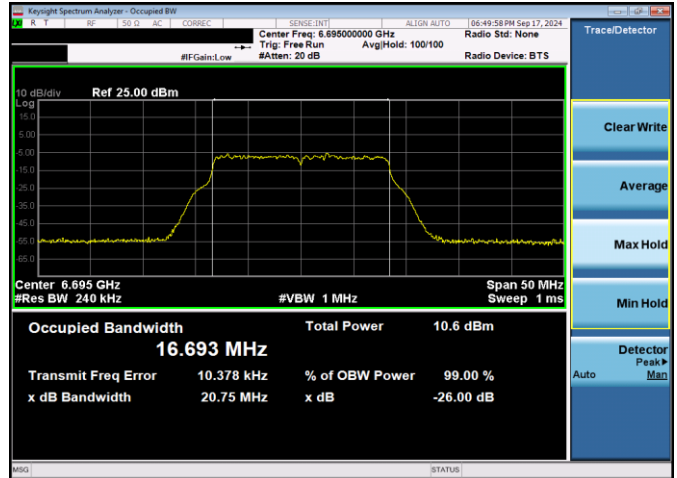

Plot 7-21. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11a (UNII Band 7) – Ch. 149, 54Mbps)

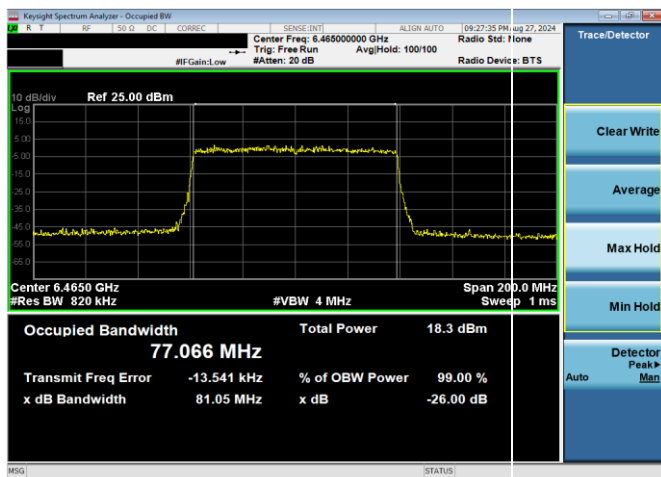


Plot 7-19. 26dB & 99% Bandwidth Plot Antenna 5T LPI (80MHz 802.11ax (UNII Band 6) – Ch. 103, MCS11)

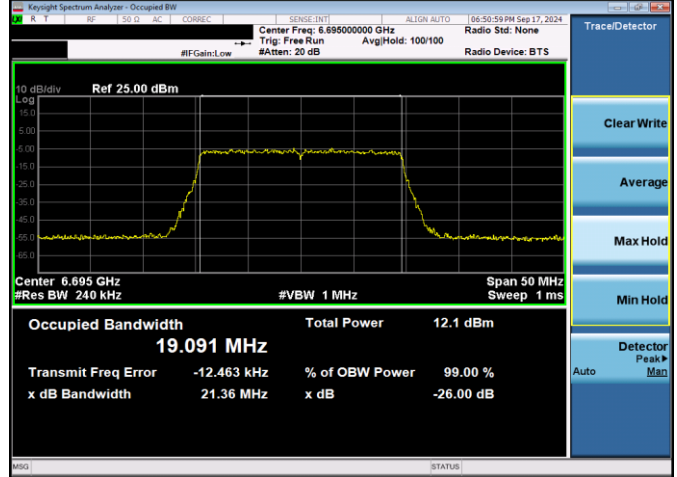


Plot 7-22. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 25 of 317

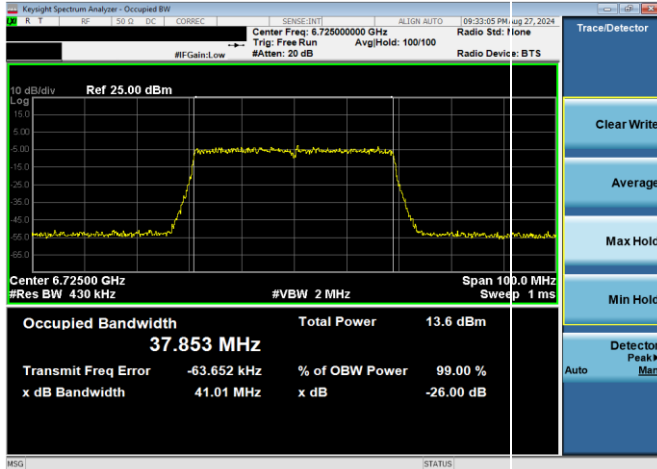


Plot 7-23. 26dB & 99% Bandwidth Plot Antenna 5T LPI (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

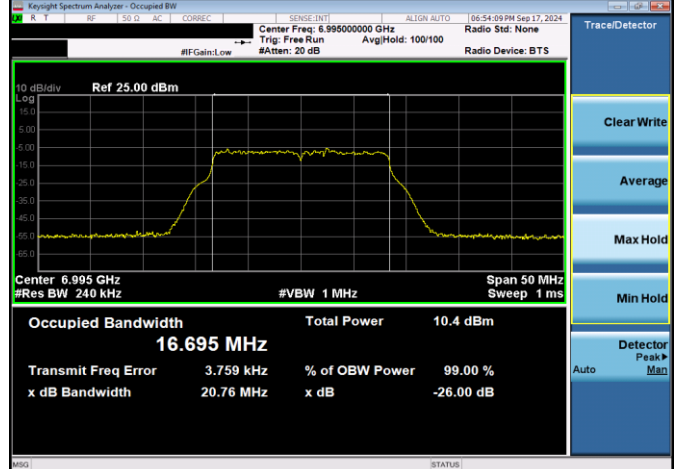


Plot 7-26. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11a (UNII Band 8) – Ch. 209, 54Mbps)

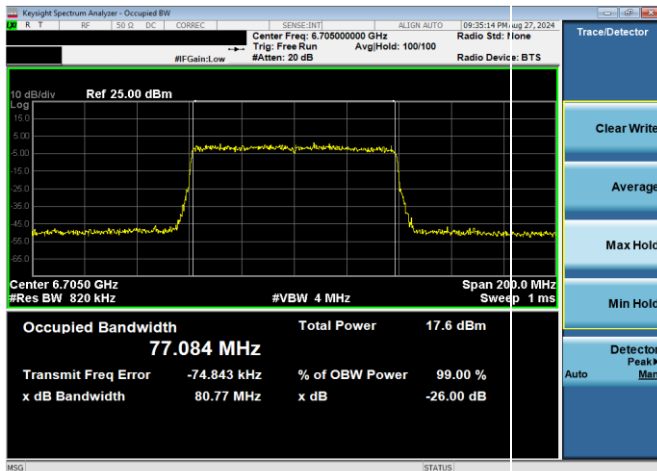


Plot 7-24. 26dB & 99% Bandwidth Plot Antenna 5T LPI (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)

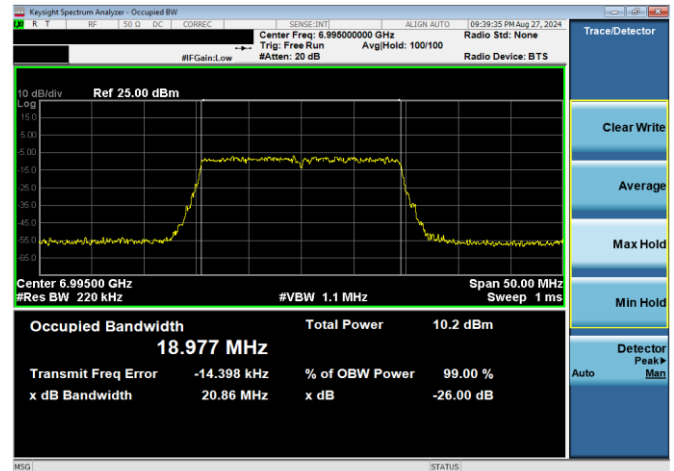

Plot 7-27. 26dB & 99% Bandwidth Plot Antenna 5T LPI (20MHz 802.11ax (UNII Band 8) – Ch. 209, MCS11)

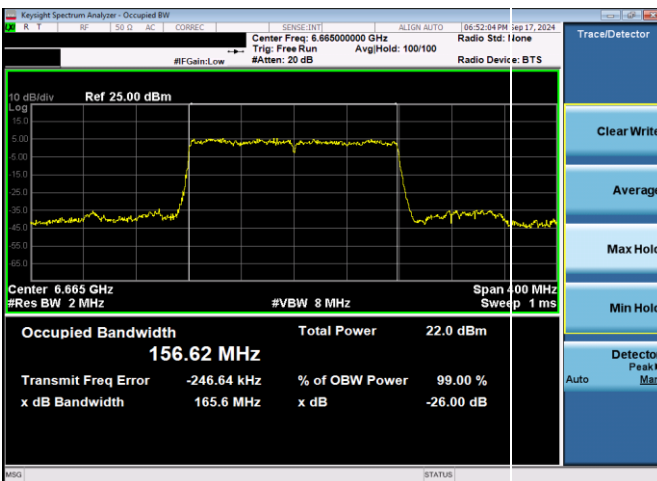


Plot 7-25. 26dB & 99% Bandwidth Plot Antenna 5T LPI (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)

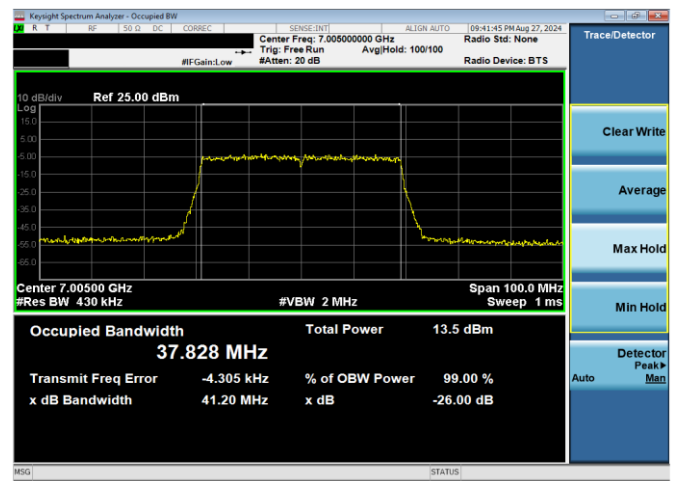


Plot 7-28. 26dB & 99% Bandwidth Plot Antenna 5T LPI (40MHz 802.11ax (UNII Band 8) – Ch. 211, MCS11)

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 26 of 317

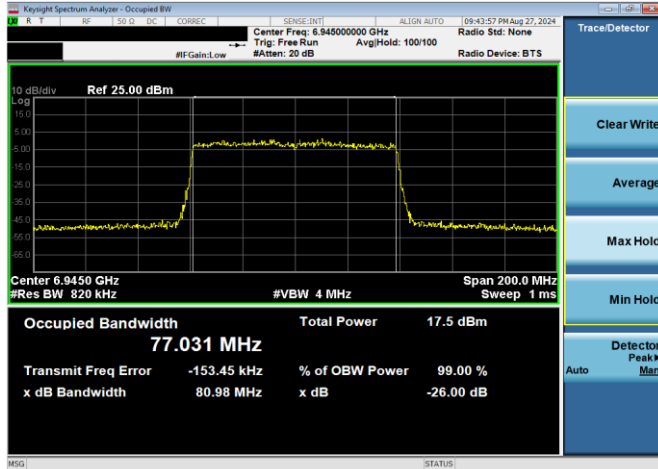


Plot 7-29. 26dB & 99% Bandwidth Plot Antenna 5T LPI (80MHz 802.11ax (UNII Band 8) – Ch. 199, MCS11)

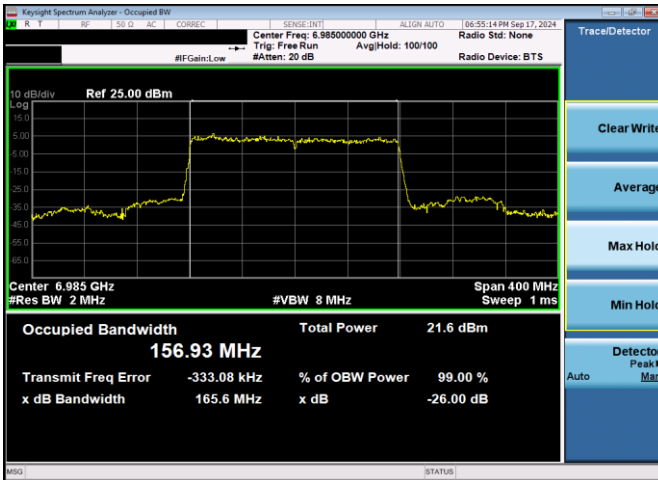


Plot 7-30. 26dB & 99% Bandwidth Plot Antenna 5T LPI (160MHz 802.11ax (UNII Band 8) – Ch. 207, MCS11)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 27 of 317

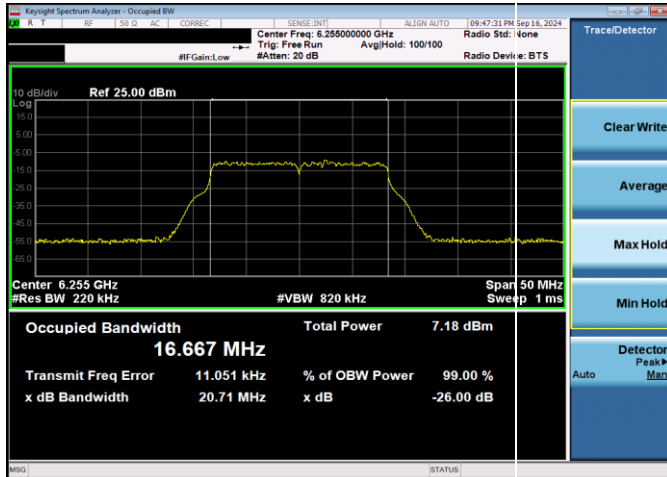


Plot 7-31. 26dB & 99% Bandwidth Plot Antenna 5T VLP (20MHz 802.11a (UNII Band 5) – Ch. 61, 54Mbps)

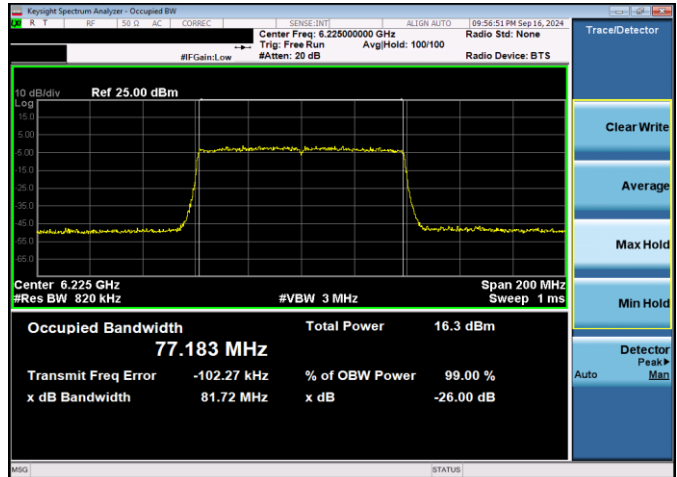


Plot 7-34. 26dB & 99% Bandwidth Plot Antenna 5T VLP (80MHz 802.11ax (UNII Band 5) – Ch. 55, MCS11)

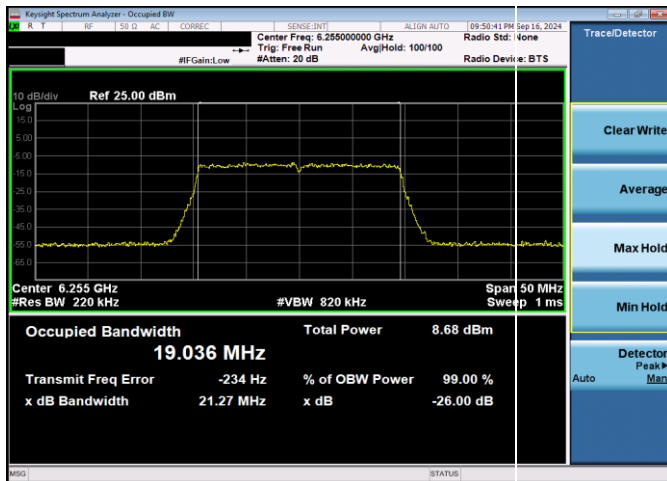


Plot 7-32. 26dB & 99% Bandwidth Plot Antenna 5T VLP (20MHz 802.11ax (UNII Band 5) – Ch. 61, MCS11)

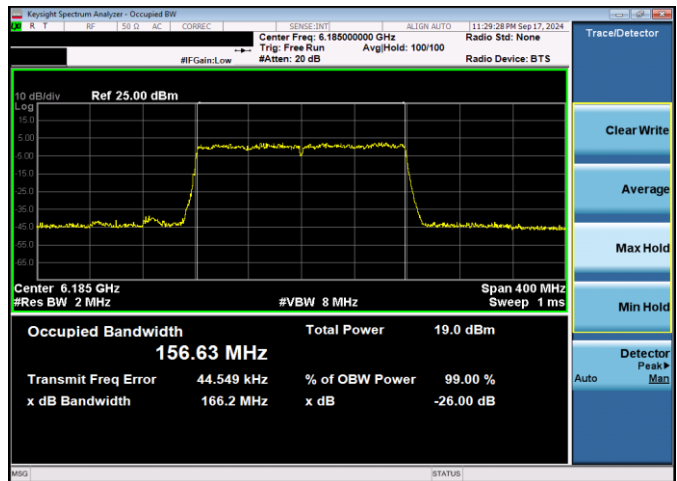

Plot 7-35. 26dB & 99% Bandwidth Plot Antenna 5T VLP (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)

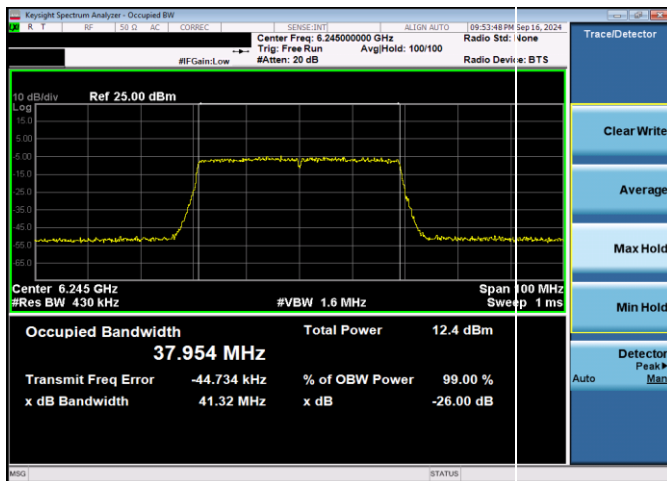


Plot 7-33. 26dB & 99% Bandwidth Plot Antenna 5T VLP (40MHz 802.11ax (UNII Band 5) – Ch. 59, MCS11)

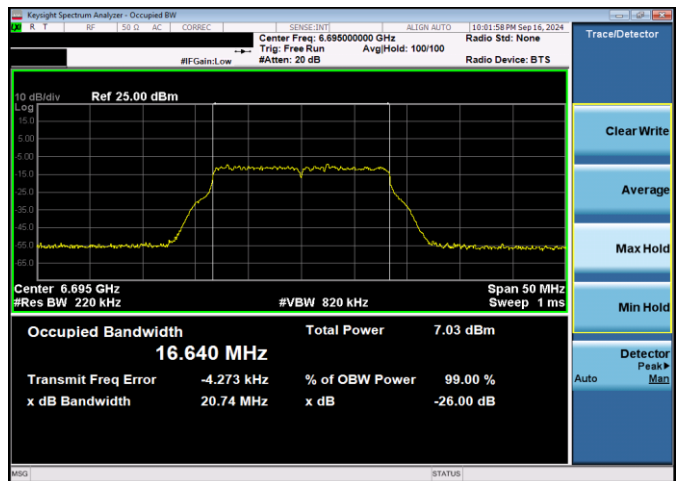


Plot 7-36. 26dB & 99% Bandwidth Plot Antenna 5T VLP (20MHz 802.11a (UNII Band 7) – Ch. 149, 54Mbps)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 28 of 317

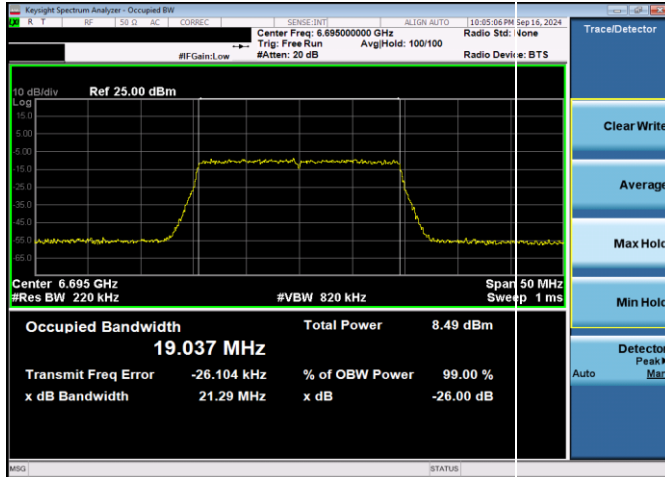


Plot 7-37. 26dB & 99% Bandwidth Plot Antenna 5T VLP (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11

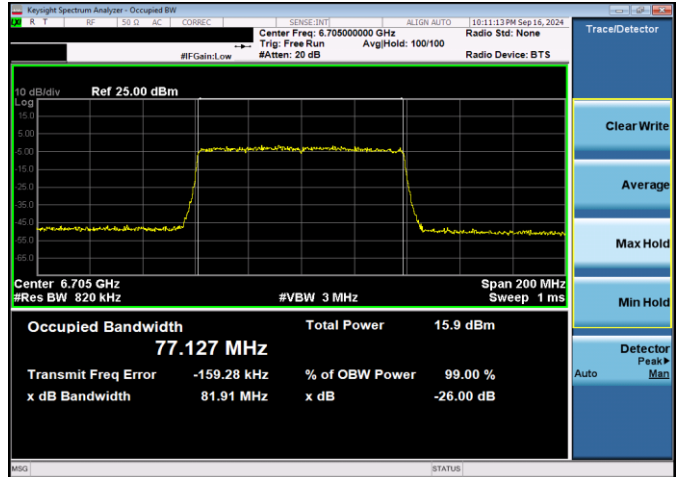

Plot 7-39. 26dB & 99% Bandwidth Plot Antenna 5T VLP (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)

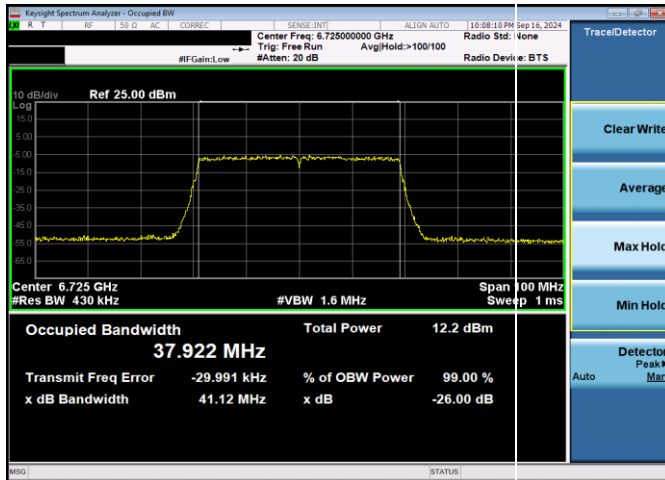

Plot 7-38. 26dB & 99% Bandwidth Plot Antenna 5T VLP (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

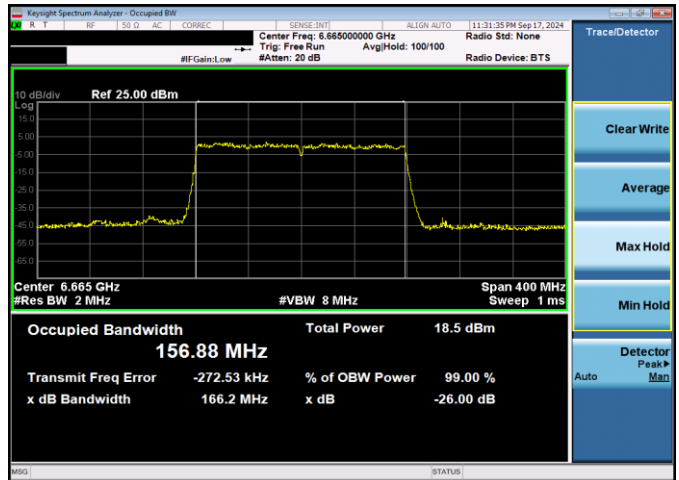

Plot 7-40. 26dB & 99% Bandwidth Plot Antenna 5T VLP (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 29 of 317

7.2.2 Antenna 3b 26dB & 99% Bandwidth Measurements

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5935	1	a	54	16.69	20.81	320	Pass
	6175	45	a	54	16.67	20.74	320	Pass
	6415	93	a	54	16.66	20.76	320	Pass
	5935	1	ax (20MHz)	135/143.4 (MCS11)	19.10	22.51	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.08	21.34	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.05	21.19	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.96	41.44	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.93	41.48	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.94	41.30	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.26	85.12	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.27	81.46	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.21	82.00	320	Pass
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	158.03	263.73	320	Pass
	6181	47	ax (160MHz)	1020.8/1201 (MCS11)	157.90	258.87	320	Pass
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	157.56	257.15	320	Pass	
Band 7	6535	117	a	54	16.66	20.71	320	Pass
	6695	149	a	54	16.68	20.85	320	Pass
	6875	181	a	54	16.69	20.90	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.05	21.06	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.05	21.36	320	Pass
	6875	181	ax (20MHz)	135/143.4 (MCS11)	19.06	21.45	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.93	41.38	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.94	41.26	320	Pass
	6885	179	ax (40MHz)	271/286.8 (MCS11)	37.96	41.54	320	Pass
	6545	135	ax (80MHz)	567/600.5 (MCS11)	77.23	81.78	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.24	81.60	320	Pass
	6865	167	ax (80MHz)	567/600.5 (MCS11)	77.25	81.77	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	157.48	255.82	320	Pass

Table 7-5. Conducted Bandwidth Measurements Antenna 3b SP

FCC ID: BCGA2995	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 30 of 317

	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	5955	1	a	54	16.59	20.45	320	Pass
	6175	45	a	54	16.63	20.65	320	Pass
	6415	93	a	54	16.61	20.62	320	Pass
	5955	1	ax (20MHz)	135/143.4 (MCS11)	18.99	20.94	320	Pass
	6175	45	ax (20MHz)	135/143.4 (MCS11)	19.01	21.11	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	18.97	20.97	320	Pass
	5965	3	ax (40MHz)	271/286.8 (MCS11)	37.84	41.41	320	Pass
	6165	43	ax (40MHz)	271/286.8 (MCS11)	37.89	41.00	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.87	40.92	320	Pass
	5985	7	ax (80MHz)	567/600.5 (MCS11)	77.01	81.17	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	76.97	81.14	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.18	81.28	320	Pass
6025	15	ax (160MHz)	1020.8/1201 (MCS11)	156.63	165.52	320	Pass	
6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.79	165.94	320	Pass	
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.69	165.38	320	Pass	
Band 6	6435	97	a	54	16.63	20.83	320	Pass
	6475	105	a	54	16.62	20.37	320	Pass
	6515	113	a	54	16.58	20.47	320	Pass
	6435	97	ax (20MHz)	135/143.4 (MCS11)	19.00	20.91	320	Pass
	6475	105	ax (20MHz)	135/143.4 (MCS11)	19.01	20.95	320	Pass
	6515	113	ax (20MHz)	135/143.4 (MCS11)	18.98	21.07	320	Pass
	6445	99	ax (40MHz)	271/286.8 (MCS11)	37.87	40.83	320	Pass
	6485	107	ax (40MHz)	271/286.8 (MCS11)	37.93	41.26	320	Pass
	6525	115	ax (40MHz)	271/286.8 (MCS11)	37.85	41.30	320	Pass
	6465	103	ax (80MHz)	567/600.5 (MCS11)	77.21	81.20	320	Pass
6505	111	ax (160MHz)	1020.8/1201 (MCS11)	156.98	166.62	320	Pass	
Band 7	6535	117	a	54	16.60	20.49	320	Pass
	6695	149	a	54	16.69	20.76	320	Pass
	6875	185	a	54	16.61	20.55	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	18.94	20.91	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.00	21.13	320	Pass
	6875	185	ax (20MHz)	135/143.4 (MCS11)	19.03	21.26	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.96	41.01	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.89	41.43	320	Pass
	6845	179	ax (40MHz)	271/286.8 (MCS11)	37.87	40.93	320	Pass
	6545	119	ax (80MHz)	567/600.5 (MCS11)	77.19	80.87	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.10	81.71	320	Pass
	6865	183	ax (80MHz)	567/600.5 (MCS11)	76.97	80.94	320	Pass
6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.92	166.33	320	Pass	
6825	175	ax (160MHz)	1020.8/1201 (MCS11)	156.77	165.82	320	Pass	
Band 8	6895	189	a	54	16.63	20.75	320	Pass
	6995	209	a	54	16.57	20.71	320	Pass
	7115	233	a	54	16.60	20.36	320	Pass
	6895	189	ax (20MHz)	135/143.4 (MCS11)	18.97	21.03	320	Pass
	6995	209	ax (20MHz)	135/143.4 (MCS11)	19.01	21.08	320	Pass
	7115	233	ax (20MHz)	135/143.4 (MCS11)	18.97	20.99	320	Pass
	6885	187	ax (40MHz)	271/286.8 (MCS11)	37.85	40.83	320	Pass
	7005	211	ax (40MHz)	271/286.8 (MCS11)	37.84	41.22	320	Pass
	7085	227	ax (40MHz)	271/286.8 (MCS11)	37.91	41.07	320	Pass
	6945	199	ax (80MHz)	567/600.5 (MCS11)	77.08	81.78	320	Pass
	7025	215	ax (80MHz)	567/600.5 (MCS11)	77.14	81.54	320	Pass
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	156.76	165.30	320	Pass


Table 7-6. Conducted Bandwidth Measurements Antenna 3b LPI

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 31 of 317


	Frequency [MHz]	Channel	802.11 MODE	Data Rate [MHz]	Measured 99% Occupied Bandwidth [MHz]	Measured 26dB Bandwidth [MHz]	Maximum Bandwidth Limit [MHz]	Pass / Fail
Band 5	6115	33	a	54	16.65	20.56	320	Pass
	6255	61	a	54	16.67	20.69	320	Pass
	6415	93	a	54	16.65	20.67	320	Pass
	6115	33	ax (20MHz)	135/143.4 (MCS11)	19.02	21.11	320	Pass
	6255	61	ax (20MHz)	135/143.4 (MCS11)	19.02	21.23	320	Pass
	6415	93	ax (20MHz)	135/143.4 (MCS11)	19.08	21.21	320	Pass
	6125	35	ax (40MHz)	271/286.8 (MCS11)	37.94	41.49	320	Pass
	6245	59	ax (40MHz)	271/286.8 (MCS11)	37.99	41.50	320	Pass
	6405	91	ax (40MHz)	271/286.8 (MCS11)	37.93	41.20	320	Pass
	6145	39	ax (80MHz)	567/600.5 (MCS11)	77.13	81.53	320	Pass
	6225	55	ax (80MHz)	567/600.5 (MCS11)	77.12	81.63	320	Pass
	6385	87	ax (80MHz)	567/600.5 (MCS11)	77.24	81.85	320	Pass
	6185	47	ax (160MHz)	1020.8/1201 (MCS11)	156.71	166.43	320	Pass
6345	79	ax (160MHz)	1020.8/1201 (MCS11)	156.90	165.78	320	Pass	
Band 7	6535	117	a	54	16.64	20.71	320	Pass
	6695	149	a	54	16.63	20.71	320	Pass
	6855	181	a	54	16.63	20.67	320	Pass
	6535	117	ax (20MHz)	135/143.4 (MCS11)	19.04	21.27	320	Pass
	6695	149	ax (20MHz)	135/143.4 (MCS11)	19.03	21.31	320	Pass
	6855	181	ax (20MHz)	135/143.4 (MCS11)	19.03	21.22	320	Pass
	6565	123	ax (40MHz)	271/286.8 (MCS11)	37.88	41.17	320	Pass
	6725	155	ax (40MHz)	271/286.8 (MCS11)	37.90	41.45	320	Pass
	6845	179	ax (40MHz)	271/286.8 (MCS11)	37.89	41.45	320	Pass
	6625	135	ax (80MHz)	567/600.5 (MCS11)	77.08	81.91	320	Pass
	6705	151	ax (80MHz)	567/600.5 (MCS11)	77.23	81.50	320	Pass
	6785	167	ax (80MHz)	567/600.5 (MCS11)	77.18	81.53	320	Pass
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	156.60	165.52	320	Pass

Table 7-7. Conducted Bandwidth Measurements Antenna 3b VLP


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 32 of 317

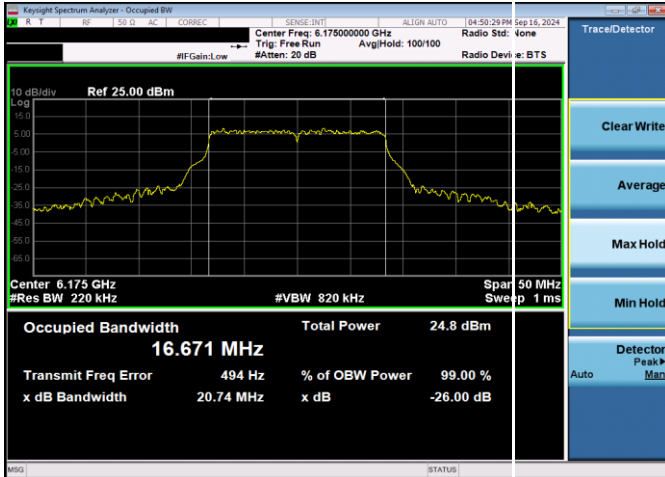


Plot 7-41. 26dB & 99% Bandwidth Plot Antenna 3b SP (20MHz 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

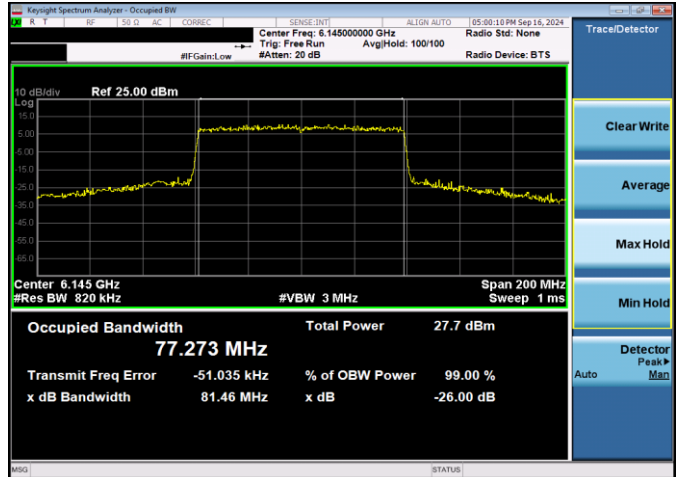


Plot 7-44. 26dB & 99% Bandwidth Plot Antenna 3b SP (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)

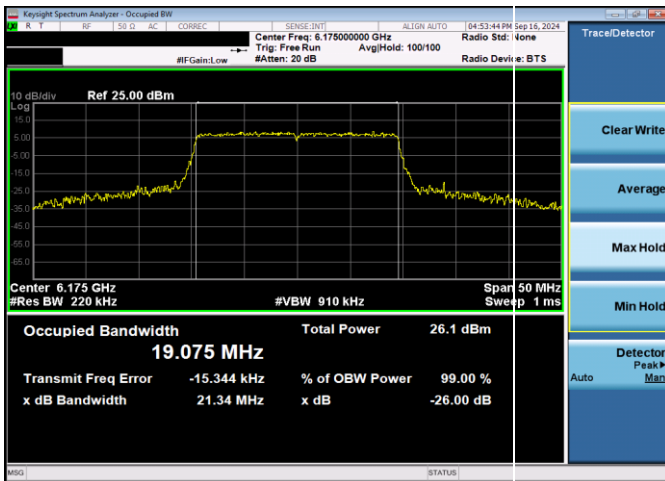


Plot 7-42. 26dB & 99% Bandwidth Plot Antenna 3b SP (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)

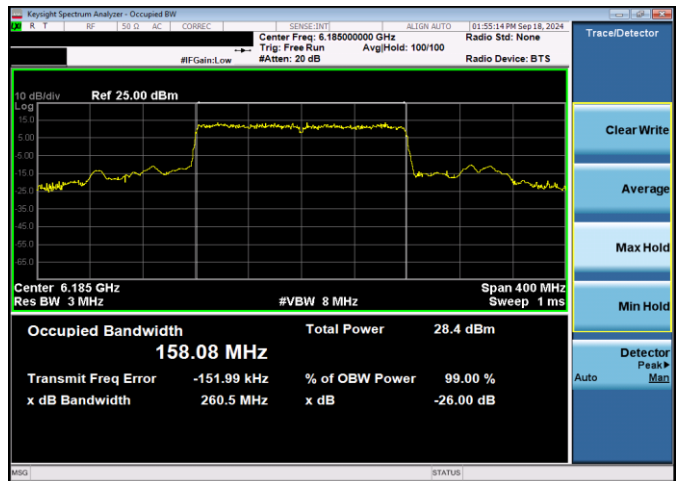

Plot 7-45. 26dB & 99% Bandwidth Plot Antenna 3b SP (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)

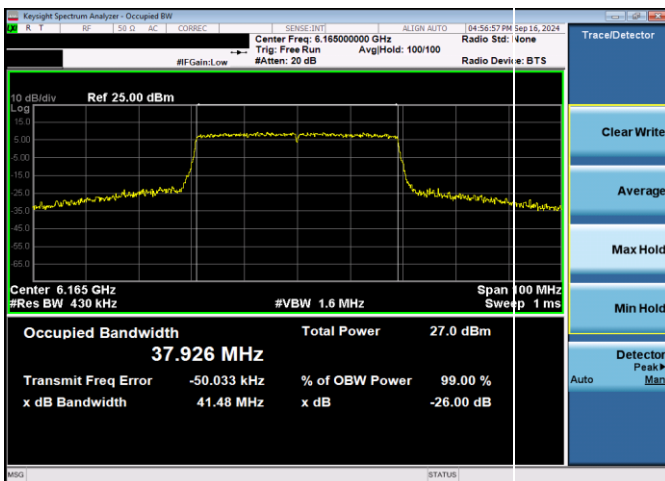


Plot 7-43. 26dB & 99% Bandwidth Plot Antenna 3b SP (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)

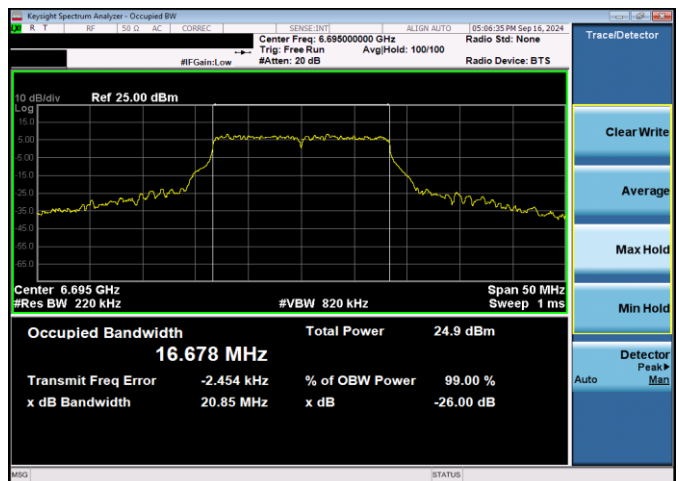


Plot 7-46. 26dB & 99% Bandwidth Plot Antenna 3b SP (20MHz 802.11a (UNII Band 7) – Ch. 149, 54Mbps)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 33 of 317

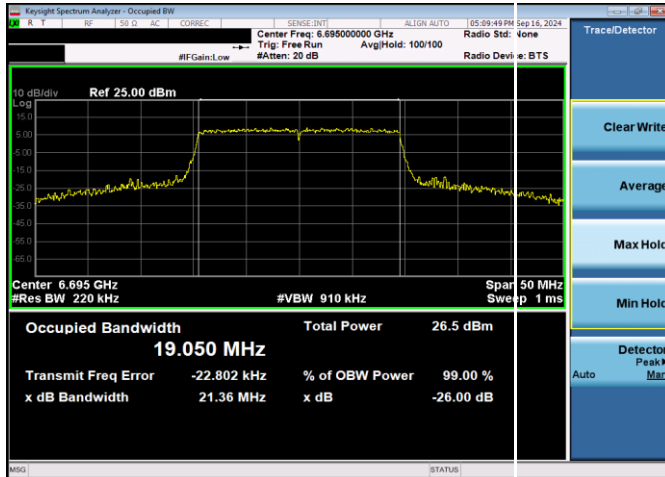


Plot 7-47. 26dB & 99% Bandwidth Plot Antenna 3b SP (20MHz 802.11ax (UNII Band 7) – Ch. 149, MCS11

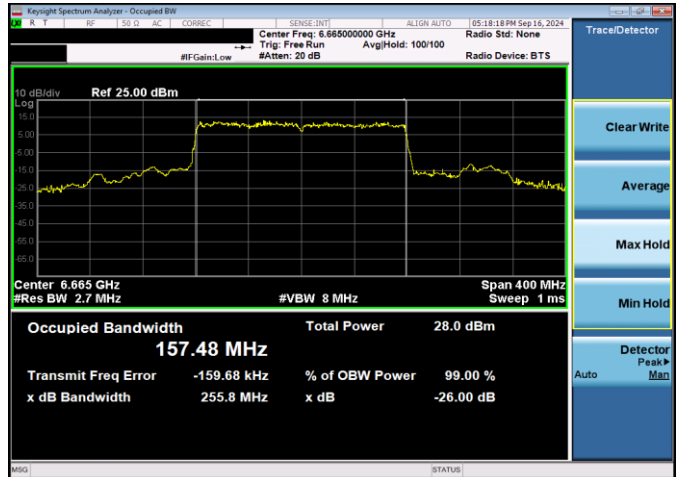

Plot 7-50. 26dB & 99% Bandwidth Plot Antenna 3b SP (160MHz 802.11ax (UNII Band 7) – Ch. 143, MCS11)

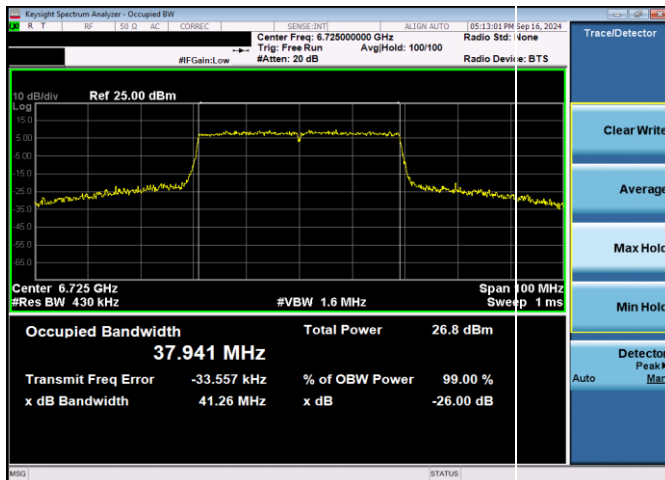


Plot 7-48. 26dB & 99% Bandwidth Plot Antenna 3b SP (40MHz 802.11ax (UNII Band 7) – Ch. 155, MCS11)

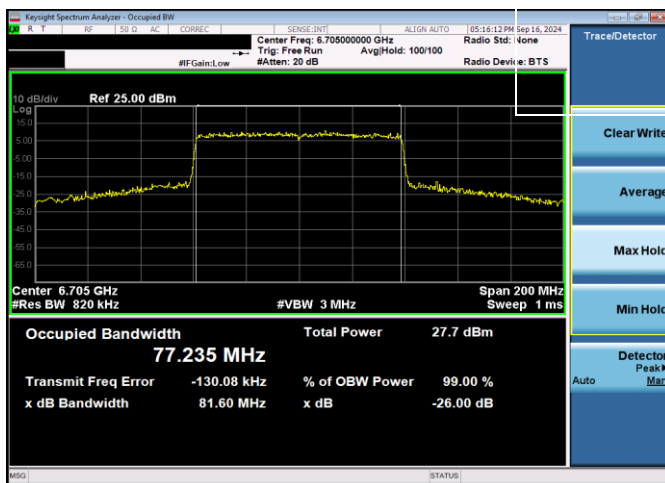


Plot 7-49. 26dB & 99% Bandwidth Plot Antenna 3b SP (80MHz 802.11ax (UNII Band 7) – Ch. 151, MCS11)


FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 34 of 317

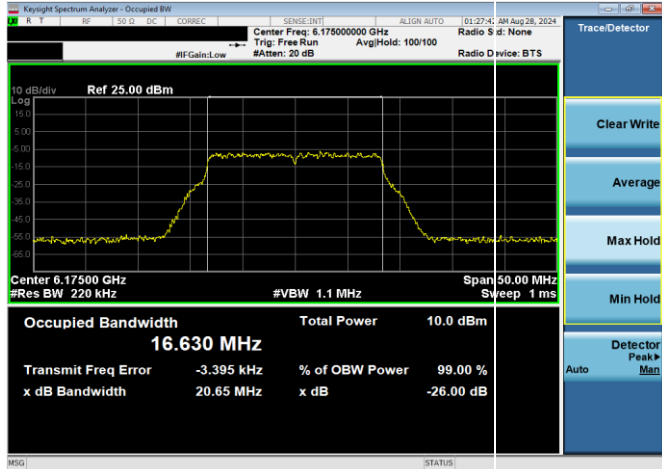


Plot 7-51. 26dB & 99% Bandwidth Plot Antenna 3b LPI (20MHz 802.11a (UNII Band 5) – Ch. 45, 54Mbps)

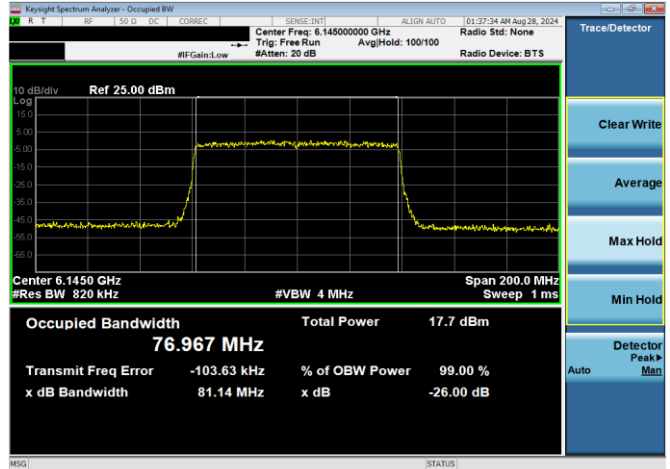


Plot 7-54. 26dB & 99% Bandwidth Plot Antenna 3b LPI (80MHz 802.11ax (UNII Band 5) – Ch. 39, MCS11)

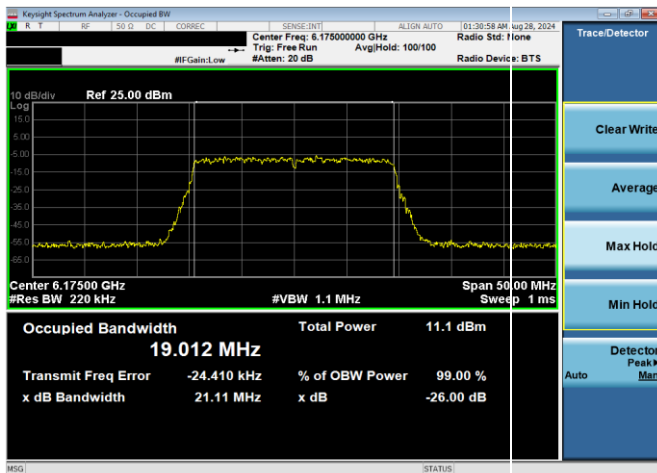


Plot 7-52. 26dB & 99% Bandwidth Plot Antenna 3b LPI (20MHz 802.11ax (UNII Band 5) – Ch. 45, MCS11)

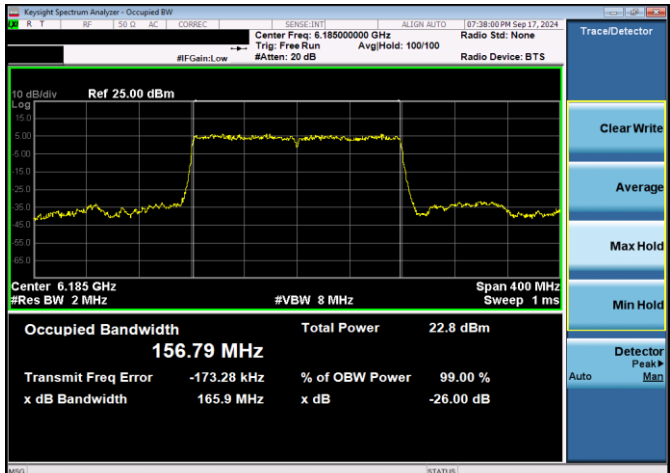

Plot 7-55. 26dB & 99% Bandwidth Plot Antenna 3b LPI (160MHz 802.11ax (UNII Band 5) – Ch. 47, MCS11)

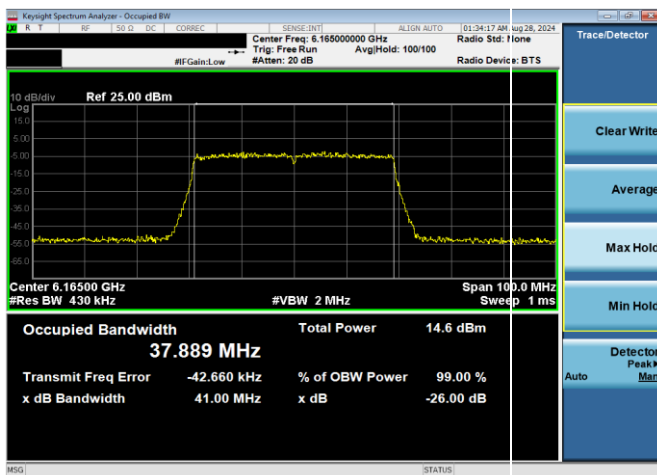

Plot 7-53. 26dB & 99% Bandwidth Plot Antenna 3b LPI (40MHz 802.11ax (UNII Band 5) – Ch. 43, MCS11)

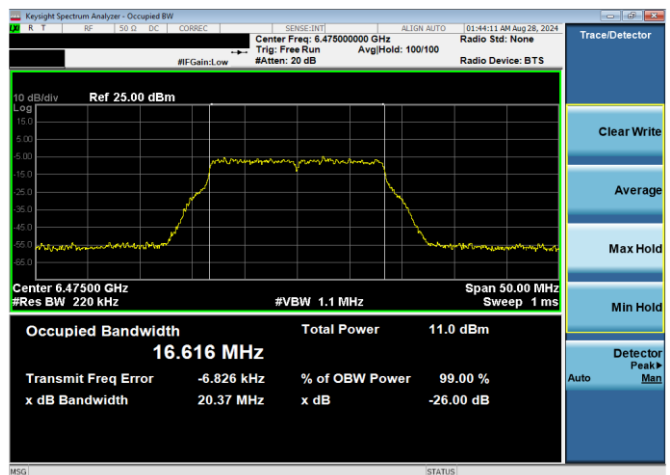

Plot 7-56. 26dB & 99% Bandwidth Plot Antenna 3b LPI (20MHz 802.11a (UNII Band 6) – Ch. 105, 54Mbps)

FCC ID: BCGA2995		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2405200018-24-R2.BCG	Test Dates: 5/20/2024 - 10/1/2024	EUT Type: Tablet Device	Page 35 of 317