

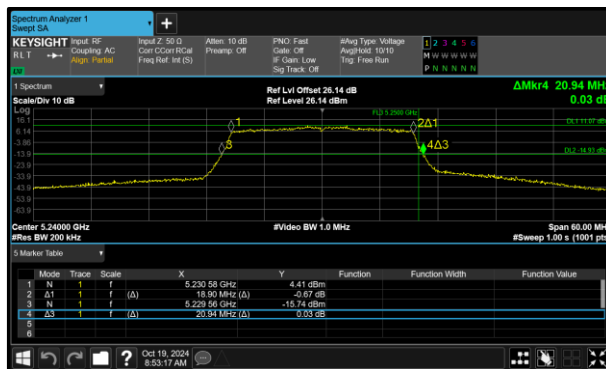


Figure 252 - 802.11ax HE20 SU Minimum 26 dB
EBW

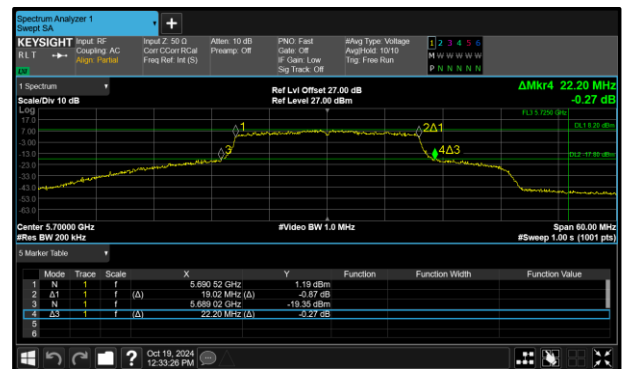


Figure 253 - 802.11ax HE20 SU Maximum 26 dB
EBW

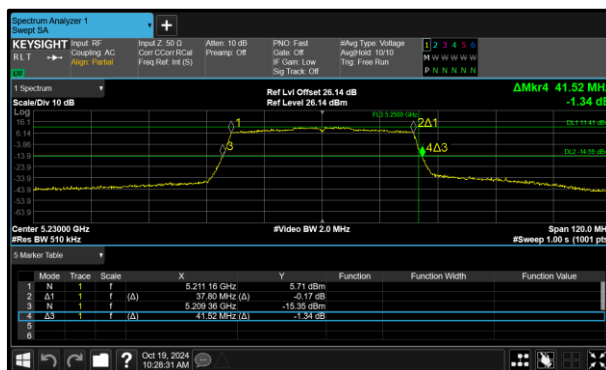


Figure 254 - 802.11ax HE40 SU Minimum 26 dB
EBW

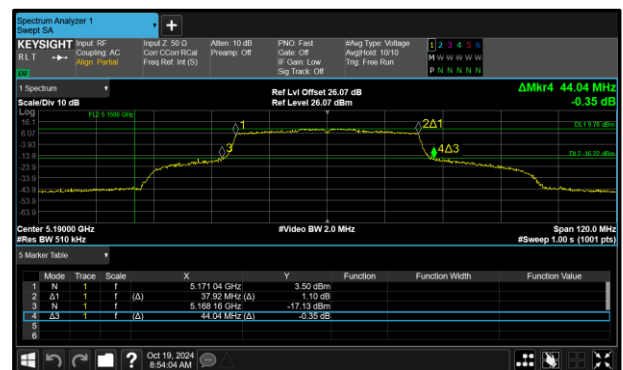


Figure 255 - 802.11ax HE40 SU Maximum 26 dB
EBW

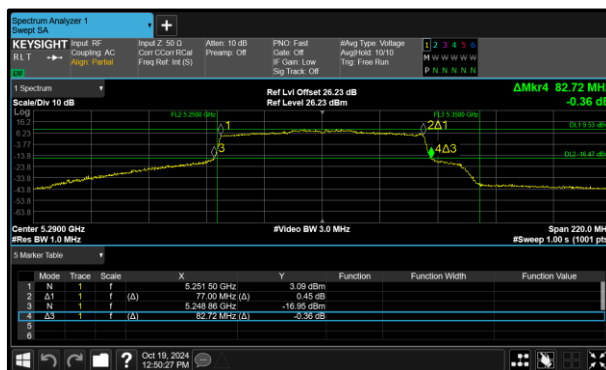


Figure 256 - 802.11ax HE80 SU Minimum 26 dB
EBW

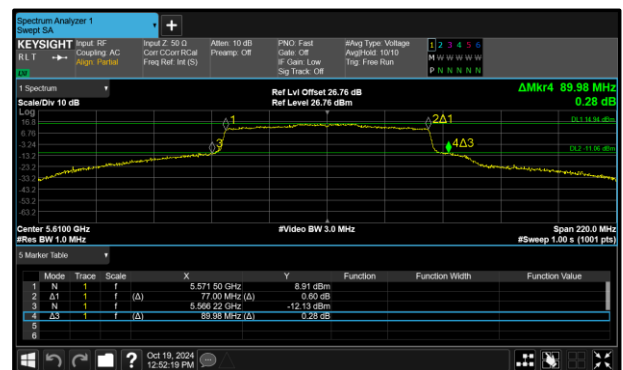


Figure 257 - 802.11ax HE80 SU Maximum 26 dB
EBW

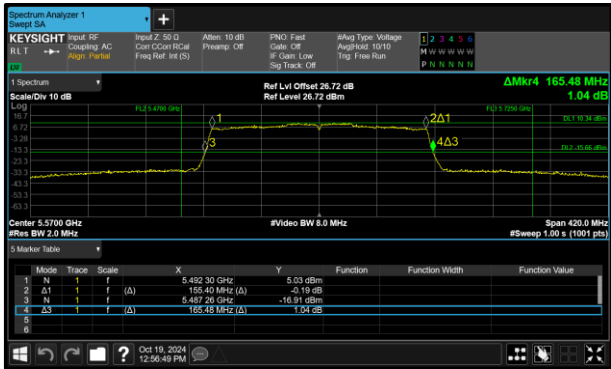


Figure 258 - 802.11ax HE160 SU Minimum 26 dB
EBW

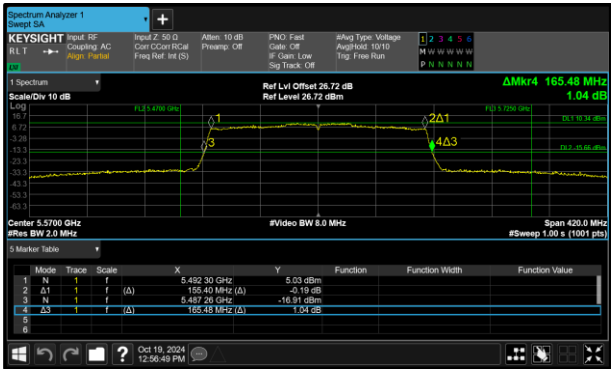


Figure 259 - 802.11ax HE160 SU Maximum 26 dB
EBW



Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11a	16.140	16.440
802.11n HT20	17.280	17.640
802.11n HT40	35.400	36.120
802.11ac VHT80	75.680	75.680
802.11ax HE20 SU	18.960	19.080
802.11ax HE40 SU	38.160	38.160
802.11ax HE80 SU	77.220	77.220

Table 29 - 6 dB Bandwidth Summary Results - SISO

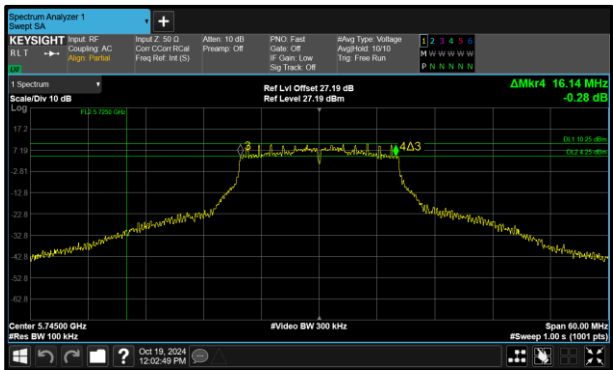


Figure 260 - 802.11a Minimum 6 dB EBW

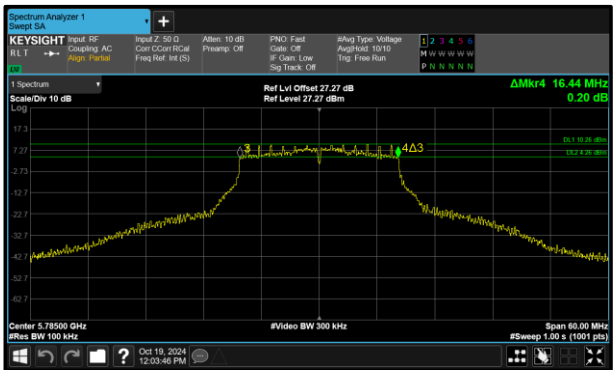


Figure 261 - 802.11a Maximum 6 dB EBW

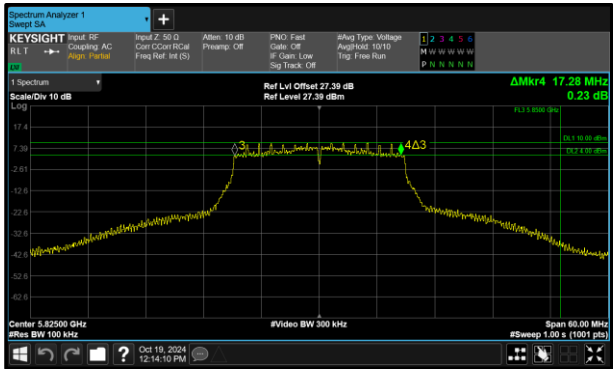


Figure 262 - 802.11n HT20 Minimum 6 dB EBW

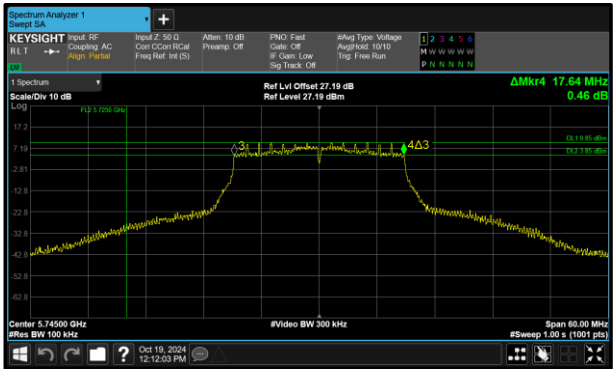


Figure 263 - 802.11n HT20 Maximum 6 dB EBW

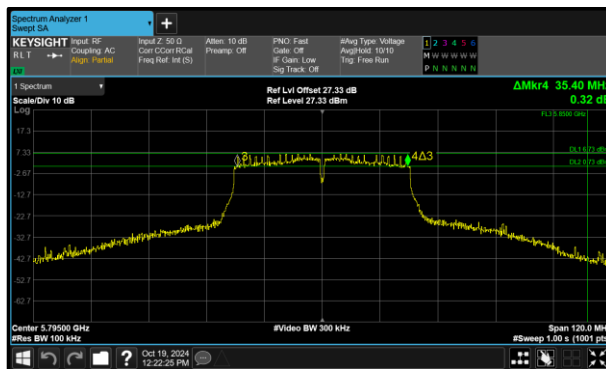


Figure 264 - 802.11n HT40 Minimum 6 dB EBW

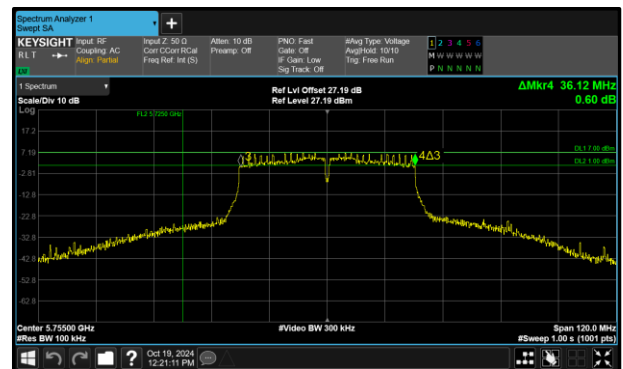


Figure 265 - 802.11n HT40 Maximum 6 dB EBW

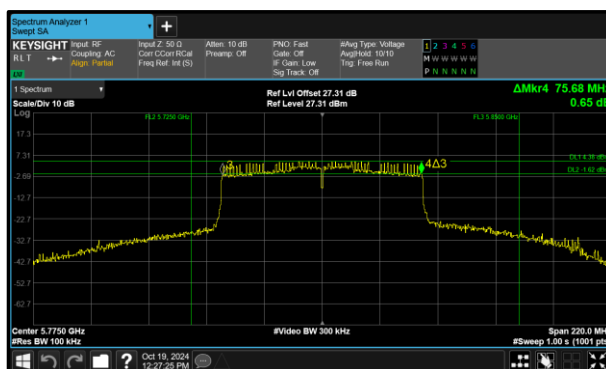


Figure 266 - 802.11ac VHT80 Minimum 6 dB EBW

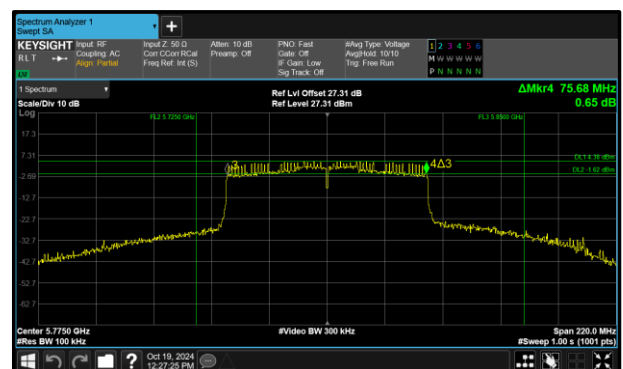


Figure 267 - 802.11ac VHT80 Maximum 6 dB EBW

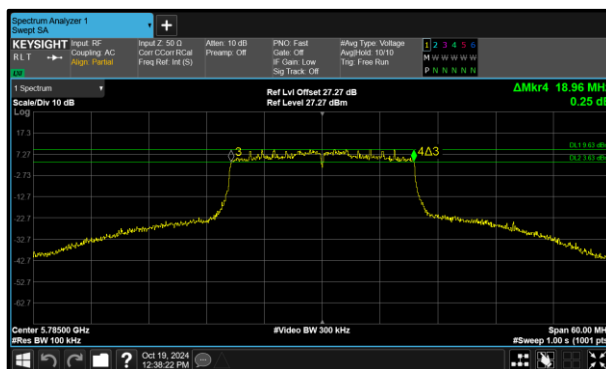


Figure 268 - 802.11ax HE20 SU Minimum 6 dB EBW

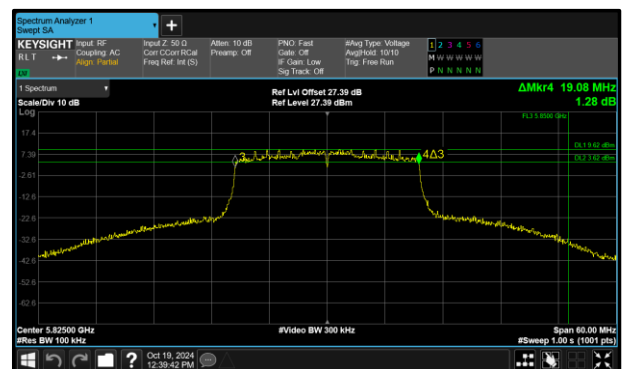


Figure 269 - 802.11ax HE20 SU Maximum 6 dB EBW

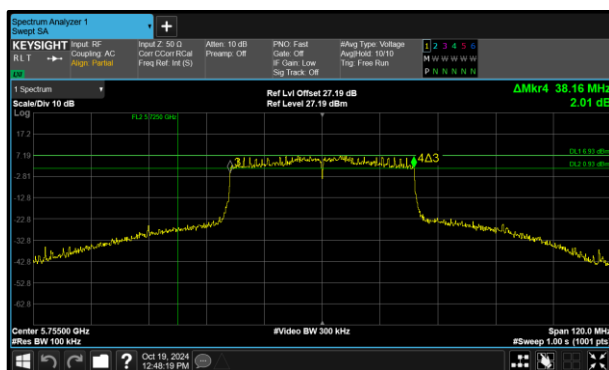


Figure 270 - 802.11ax HE40 SU Minimum 6 dB EBW

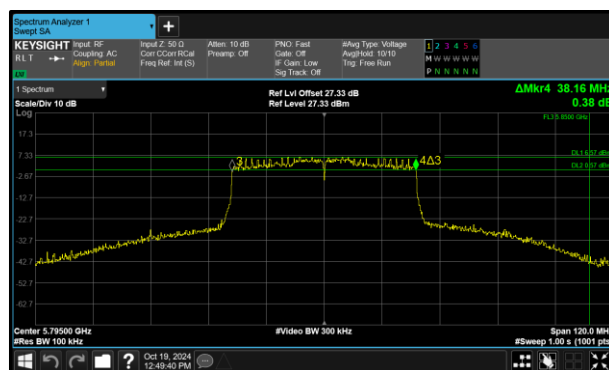


Figure 271 - 802.11ax HE40 SU Maximum 6 dB EBW

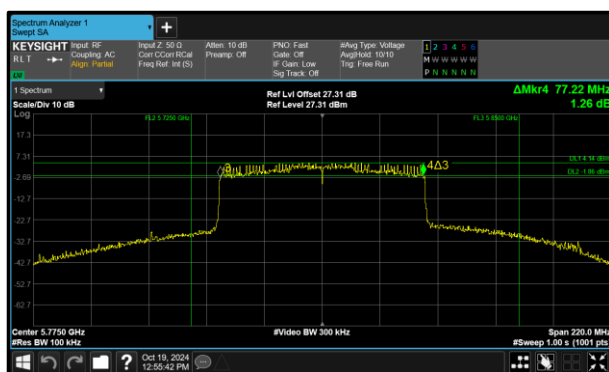


Figure 272 - 802.11ax HE80 SU Minimum 6 dB EBW

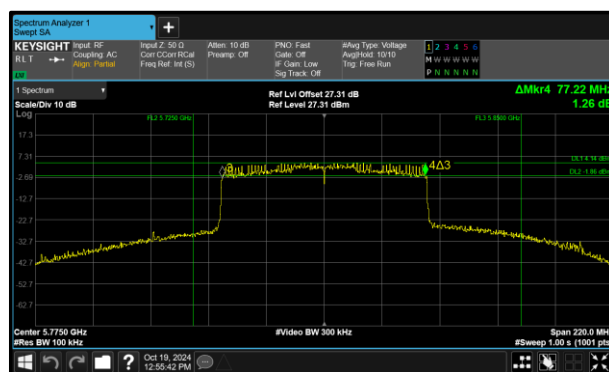


Figure 273 - 802.11ax HE80 SU Maximum 6 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11a	16.500	16.620
802.11n HT20	17.700	17.820
802.11n HT40	36.360	36.600
802.11ac VHT80	75.680	75.900
802.11ac VHT160	154.560	154.560
802.11ax HE20 SU	18.900	19.020
802.11ax HE40 SU	37.800	37.920
802.11ax HE80 SU	76.780	77.000
802.11ax HE160 SU	155.400	155.400

Table 30 - 99% Bandwidth Summary Results - SISO

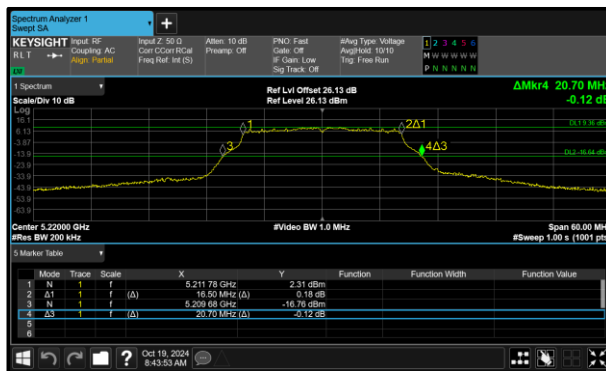


Figure 274 - 802.11a Minimum 99% OBW

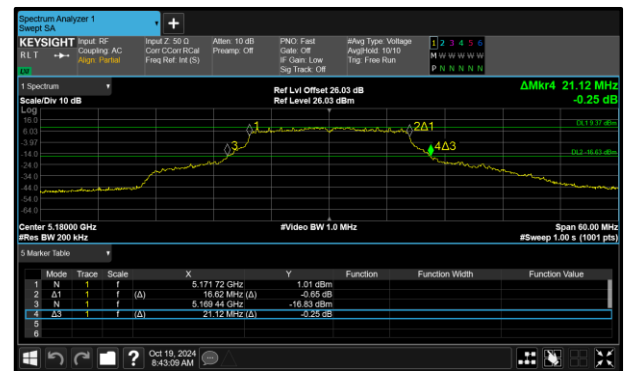


Figure 275 - 802.11a Maximum 99% OBW



Figure 276 - 802.11n HT20 Minimum 99% OBW



Figure 277 - 802.11n HT20 Maximum 99% OBW

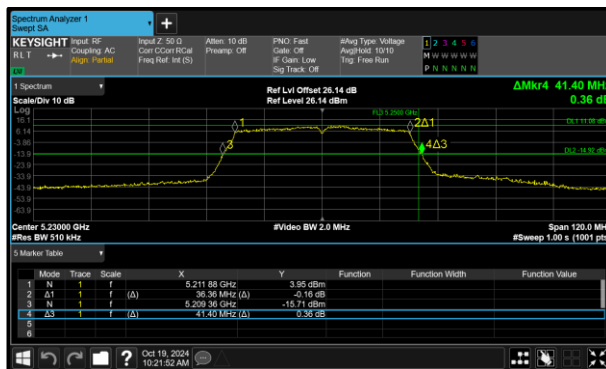


Figure 278 - 802.11n HT40 Minimum 99% OBW

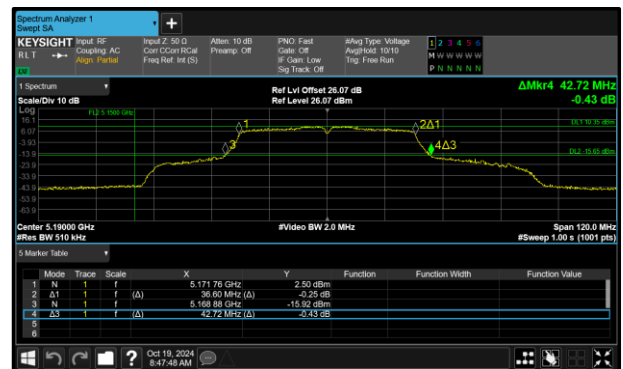


Figure 279 - 802.11n HT40 Maximum 99% OBW

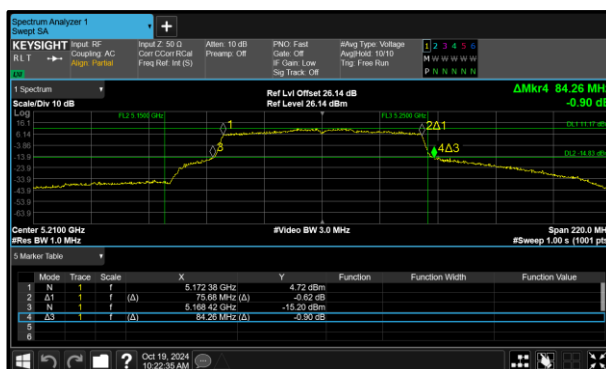


Figure 280 - 802.11ac VHT80 Minimum 99% OBW

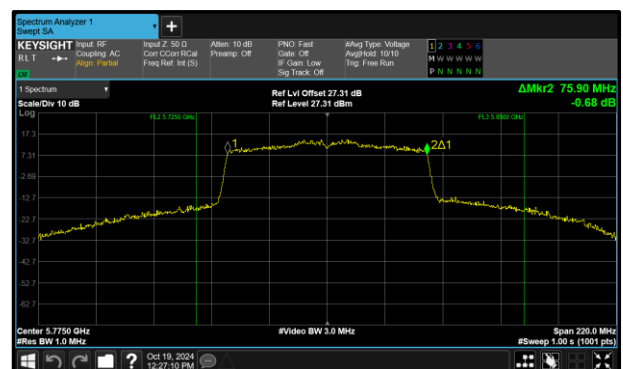


Figure 281 - 802.11ac VHT80 Maximum 99% OBW

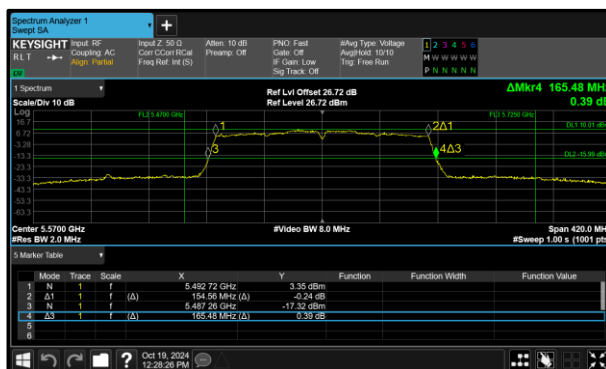


Figure 282 - 802.11ac VHT160 Minimum 99% OBW

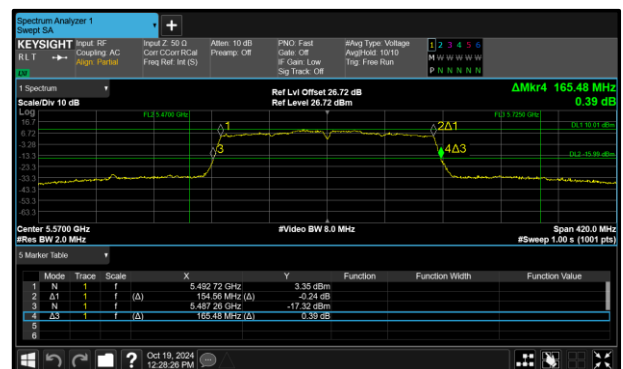


Figure 283 - 802.11ac VHT160 Maximum 99% OBW

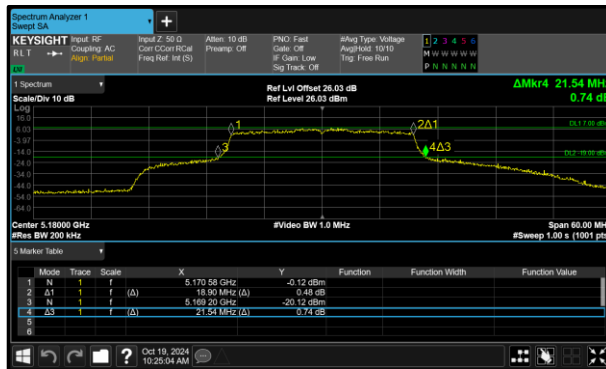


Figure 284 - 802.11ax HE20 SU Minimum 99% OBW

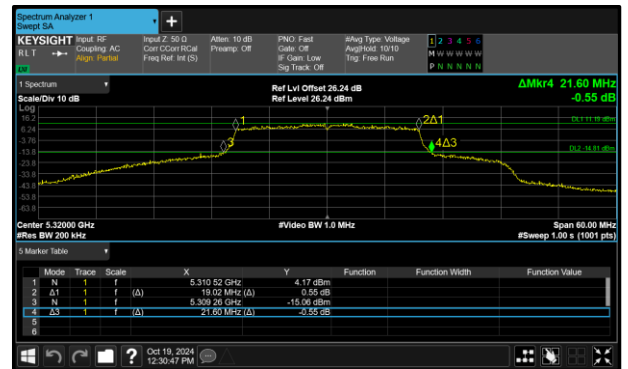


Figure 285 - 802.11ax HE20 SU Maximum 99% OBW

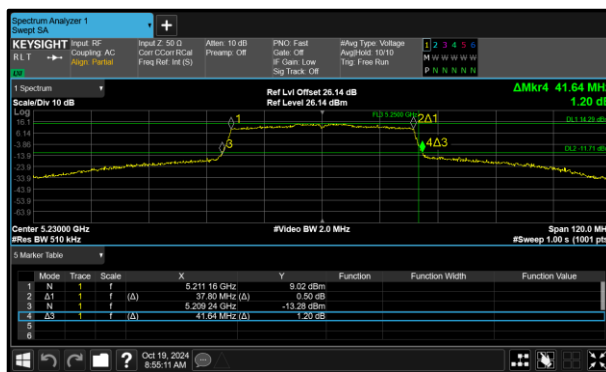


Figure 286 - 802.11ax HE40 SU Minimum 99% OBW



Figure 287 - 802.11ax HE40 SU Maximum 99% OBW

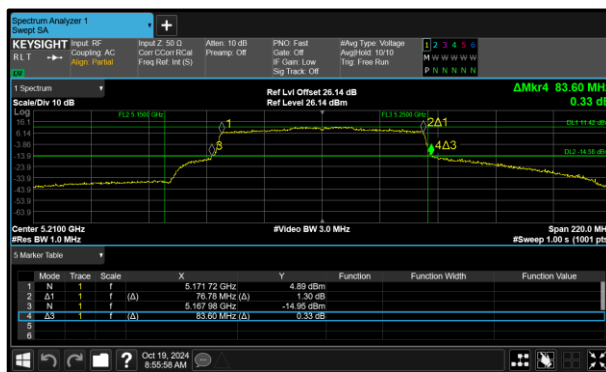


Figure 288 - 802.11ax HE80 SU Minimum 99% OBW



Figure 289 - 802.11ax HE80 SU Maximum 99% OBW

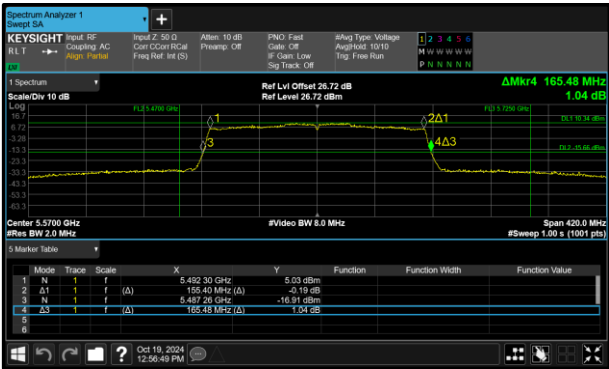


Figure 290 - 802.11ax HE160 SU Minimum 99% OBW

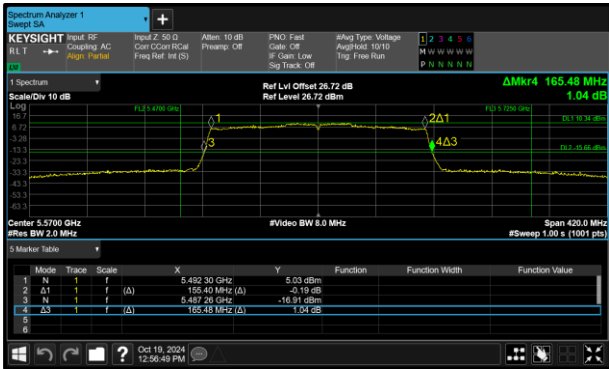


Figure 291 - 802.11ax HE160 SU Maximum 99% OBW



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.120	-	-	-
5220	-	20.700	-	-	-
5240	-	20.760	-	-	-

Table 31 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	16.620	-	-	-
5220	-	16.500	-	-	-
5240	-	16.500	-	-	-

Table 32 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.600	-	-	-
5220	-	21.000	-	-	-
5240	-	20.880	-	-	-

Table 33 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	17.820	-	-	-
5220	-	17.700	-	-	-
5240	-	17.700	-	-	-

Table 34 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	42.720	-	-	-
5230	-	41.880	-	-	-

Table 35 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	36.600	-	-	-
5230	-	36.360	-	-	-

Table 36 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	83.600	-	-	-

Table 37 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	75.680	-	-	-

Table 38 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	82.320	-	-	-

Table 39 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	76.860	-	-	-

Table 40 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.720	-	-	-
5220	-	21.060	-	-	-
5240	-	20.940	-	-	-

Table 41 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	18.900	-	-	-
5220	-	18.900	-	-	-
5240	-	18.900	-	-	-

Table 42 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	44.040	-	-	-
5230	-	41.640	-	-	-

Table 43 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	37.920	-	-	-
5230	-	37.800	-	-	-

Table 44 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	83.600	-	-	-

Table 45 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	76.780	-	-	-

Table 46 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	82.740	-	-	-

Table 47 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.700	-	-	-

Table 48 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	20.700	-	-	-
5300	-	20.760	-	-	-
5320	-	21.120	-	-	-

Table 49 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	16.500	-	-	-
5300	-	16.500	-	-	-
5320	-	16.620	-	-	-

Table 50 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	21.060	-	-	-
5300	-	20.880	-	-	-
5320	-	22.560	-	-	-

Table 51 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	17.700	-	-	-
5300	-	17.700	-	-	-
5320	-	17.820	-	-	-

Table 52 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	41.760	-	-	-
5310	-	42.600	-	-	-

Table 53 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	36.480	-	-	-
5310	-	36.600	-	-	-

Table 54 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	84.920	-	-	-

Table 55 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	75.680	-	-	-

Table 56 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	83.580	-	-	-

Table 57 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.280	-	-	-

Table 58 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	21.120	-	-	-
5300	-	21.180	-	-	-
5320	-	21.600	-	-	-

Table 59 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	18.900	-	-	-
5300	-	18.900	-	-	-
5320	-	19.020	-	-	-

Table 60 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	41.760	-	-	-
5310	-	43.920	-	-	-

Table 61 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	37.800	-	-	-
5310	-	37.920	-	-	-

Table 62 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	82.720	-	-	-

Table 63 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	77.000	-	-	-

Table 64 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	83.160	-	-	-

Table 65 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.700	-	-	-

Table 66 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	21.120	-	-	-
5580	-	20.700	-	-	-
5700	-	21.180	-	-	-
5720	-	15.320	-	-	-

Table 67 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	16.620	-	-	-
5580	-	16.500	-	-	-
5700	-	16.620	-	-	-
5720	-	13.100	-	-	-

Table 68 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	21.960	-	-	-
5580	-	20.820	-	-	-
5700	-	21.960	-	-	-
5720	-	15.500	-	-	-

Table 69 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	17.820	-	-	-
5580	-	17.700	-	-	-
5700	-	17.820	-	-	-
5720	-	13.700	-	-	-

Table 70 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	42.720	-	-	-
5550	-	41.640	-	-	-
5670	-	43.320	-	-	-
5710	-	35.880	-	-	-

Table 71 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	36.600	-	-	-
5550	-	36.360	-	-	-
5670	-	36.600	-	-	-
5710	-	32.880	-	-	-

Table 72 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	84.920	-	-	-
5610	-	93.060	-	-	-
5690	-	75.920	-	-	-

Table 73 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	75.680	-	-	-
5610	-	75.900	-	-	-
5690	-	72.180	-	-	-

Table 74 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	165.480	-	-	-

Table 75 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	154.560	-	-	-

Table 76 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	22.140	-	-	-
5580	-	21.060	-	-	-
5700	-	22.200	-	-	-
5720	-	15.500	-	-	-

Table 77 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	19.020	-	-	-
5580	-	18.900	-	-	-
5700	-	19.020	-	-	-
5720	-	14.300	-	-	-

Table 78 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	42.840	-	-	-
5550	-	41.520	-	-	-
5670	-	42.240	-	-	-
5710	-	35.760	-	-	-

Table 79 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	37.920	-	-	-
5550	-	37.800	-	-	-
5670	-	37.920	-	-	-
5710	-	33.600	-	-	-

Table 80 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	82.940	-	-	-
5610	-	89.980	-	-	-
5690	-	75.920	-	-	-

Table 81 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	77.000	-	-	-
5610	-	77.000	-	-	-
5690	-	72.840	-	-	-

Table 82 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	165.480	-	-	-

Table 83 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	155.400	-	-	-

Table 84 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.220	-	-	≥500.0
5745	-	16.140	-	-	≥500.0
5785	-	16.440	-	-	≥500.0
5825	-	16.440	-	-	≥500.0

Table 85 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.880	-	-	-
5745	-	16.620	-	-	-
5785	-	16.620	-	-	-
5825	-	16.620	-	-	-

Table 86 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.880	-	-	≥500.0
5745	-	17.640	-	-	≥500.0
5785	-	17.640	-	-	≥500.0
5825	-	17.280	-	-	≥500.0

Table 87 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.240	-	-	-
5745	-	17.760	-	-	-
5785	-	17.700	-	-	-
5825	-	17.820	-	-	-

Table 88 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	3.120	-	-	≥500.0
5755	-	36.120	-	-	≥500.0
5795	-	35.400	-	-	≥500.0

Table 89 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	6.240	-	-	-
5755	-	36.480	-	-	-
5795	-	36.360	-	-	-

Table 90 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	3.060	-	-	≥500.0
5775	-	75.680	-	-	≥500.0

Table 91 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	33.200	-	-	-
5775	-	75.900	-	-	-

Table 92 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.600	-	-	≥500.0
5745	-	19.020	-	-	≥500.0
5785	-	18.960	-	-	≥500.0
5825	-	19.080	-	-	≥500.0

Table 93 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.660	-	-	-
5745	-	18.960	-	-	-
5785	-	18.900	-	-	-
5825	-	18.900	-	-	-

Table 94 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	4.200	-	-	≥500.0
5755	-	38.160	-	-	≥500.0
5795	-	38.160	-	-	≥500.0

Table 95 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	5.040	-	-	-
5755	-	37.920	-	-	-
5795	-	37.800	-	-	-

Table 96 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	4.160	-	-	≥500.0
5775	-	77.220	-	-	≥500.0

Table 97 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	25.720	-	-	-
5775	-	77.000	-	-	-

Table 98 - 99% Bandwidth Results

MIMO CDD

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	20.880	22.740
802.11n HT40	41.160	46.200
802.11ac VHT80	84.040	91.960
802.11ac VHT160	165.480	166.320
802.11ax HE20 SU	20.940	24.300
802.11ax HE40 SU	41.280	43.800
802.11ax HE80 SU	82.720	85.800
802.11ax HE160 SU	165.480	165.900

Table 99 - 26 dB Bandwidth Summary Results - MIMO CDD

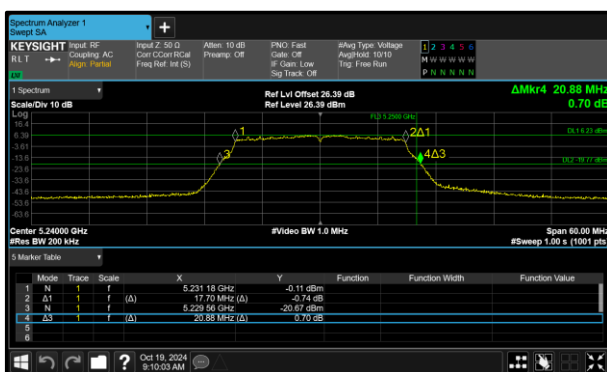


Figure 292 - 802.11n HT20 Minimum 26 dB EBW

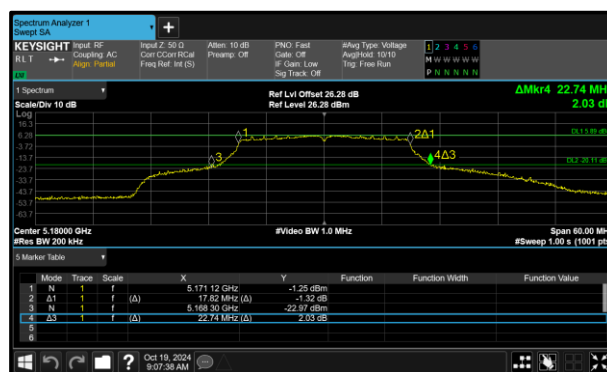


Figure 293 - 802.11n HT20 Maximum 26 dB EBW

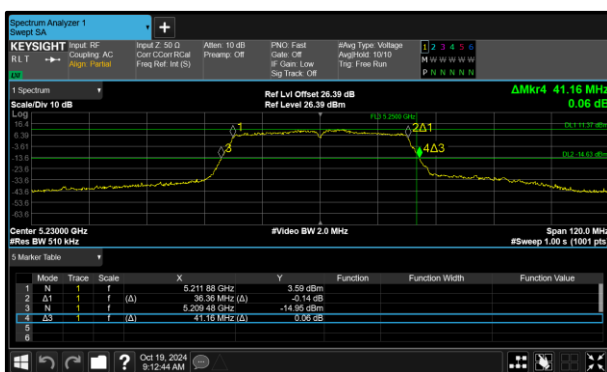


Figure 294 - 802.11n HT40 Minimum 26 dB EBW

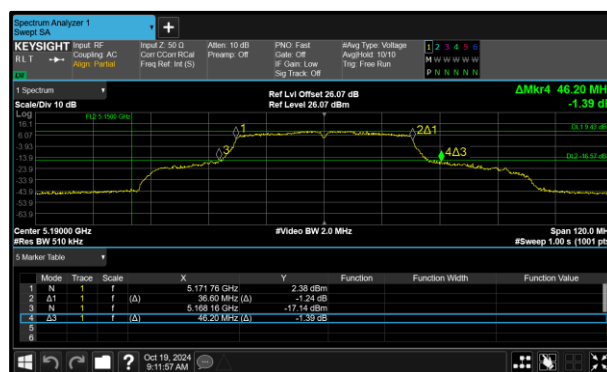


Figure 295 - 802.11n HT40 Maximum 26 dB EBW

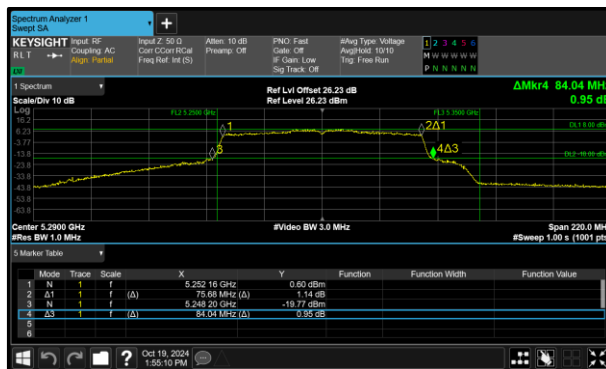


Figure 296 - 802.11ac VHT80 Minimum 26 dB
EBW

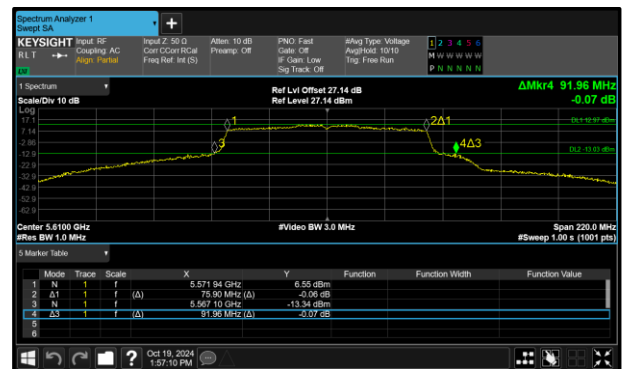


Figure 297 - 802.11ac VHT80 Maximum 26 dB
EBW

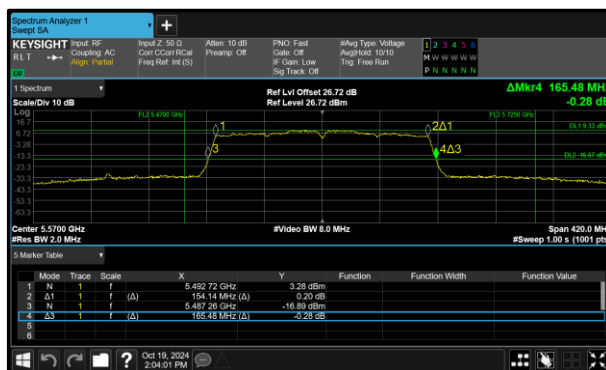


Figure 298 - 802.11ac VHT160 Minimum 26 dB
EBW

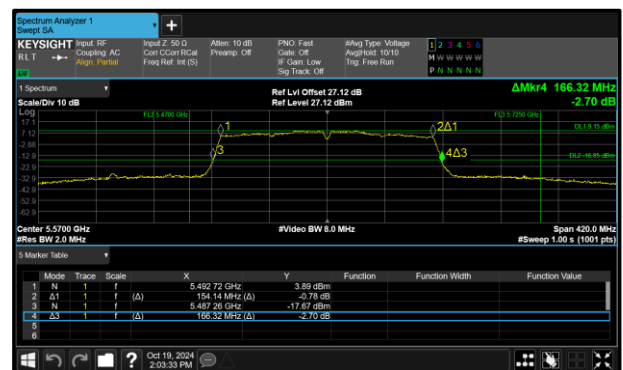


Figure 299 - 802.11ac VHT160 Maximum 26 dB
EBW

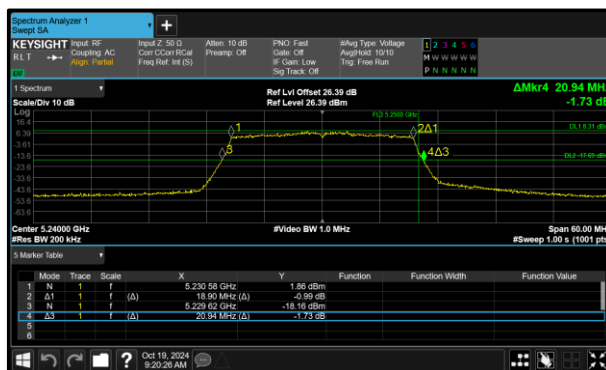


Figure 300 - 802.11ax HE20 SU Minimum 26 dB
EBW

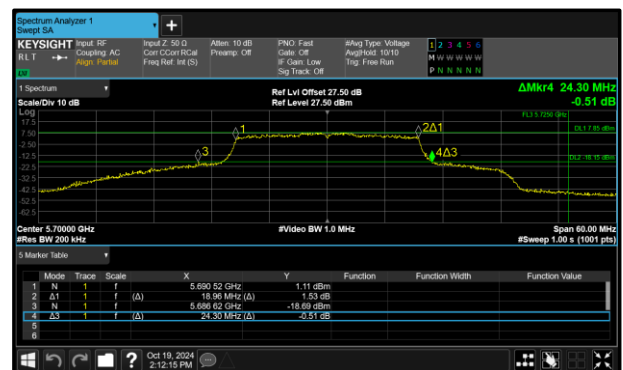


Figure 301 - 802.11ax HE20 SU Maximum 26 dB
EBW

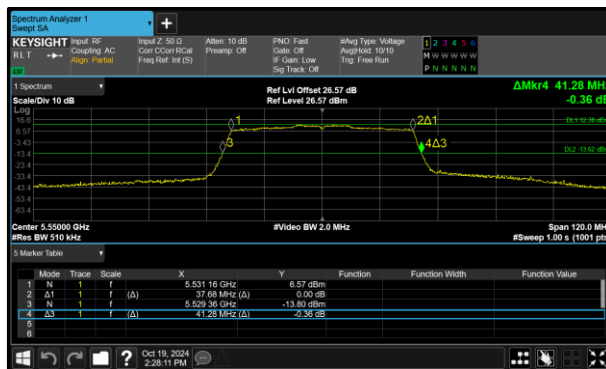


Figure 302 - 802.11ax HE40 SU Minimum 26 dB
EBW



Figure 303 - 802.11ax HE40 SU Maximum 26 dB
EBW

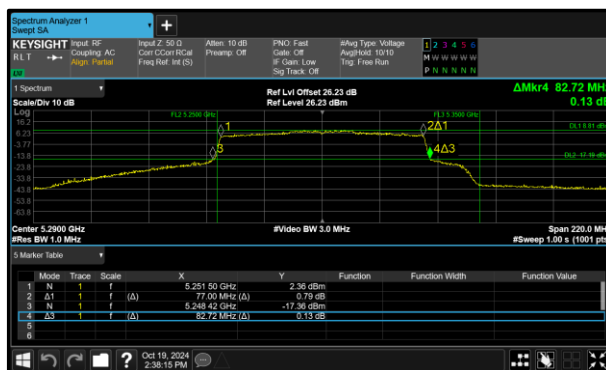


Figure 304 - 802.11ax HE80 SU Minimum 26 dB
EBW

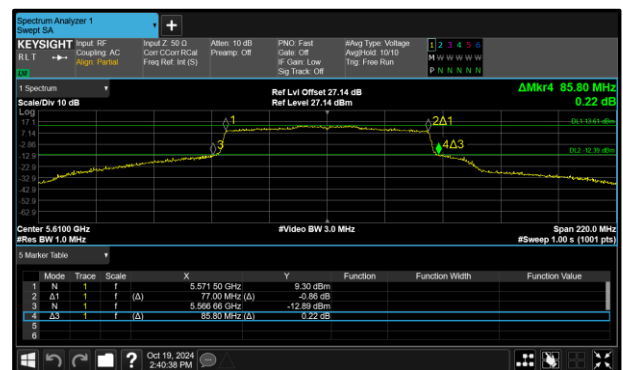


Figure 305 - 802.11ax HE80 SU Maximum 26 dB
EBW

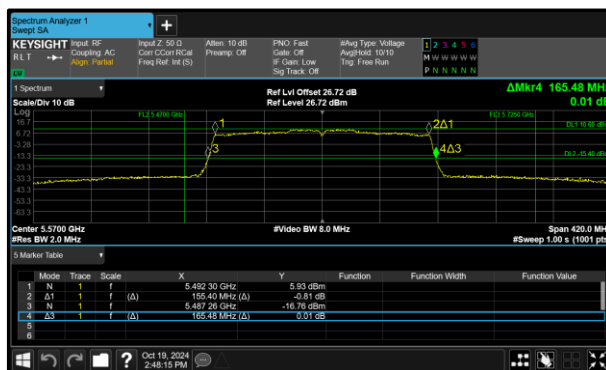


Figure 306 - 802.11ax HE160 SU Minimum 26 dB
EBW

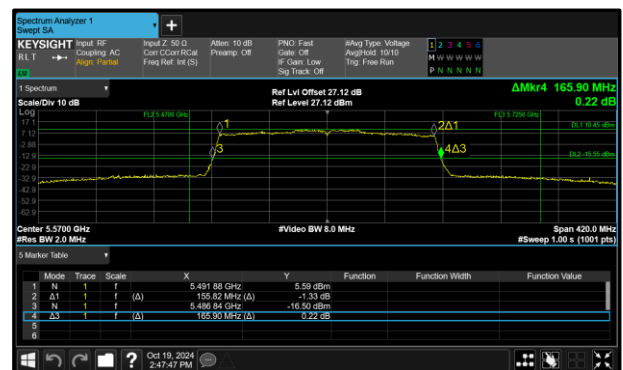


Figure 307 - 802.11ax HE160 SU Maximum 26 dB
EBW



Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	16.740	17.100
802.11n HT40	35.280	35.760
802.11ac VHT80	75.680	75.680
802.11ax HE20 SU	18.780	19.080
802.11ax HE40 SU	37.800	37.920
802.11ax HE80 SU	76.120	76.780

Table 100 - 6 dB Bandwidth Summary Results - MIMO CDD

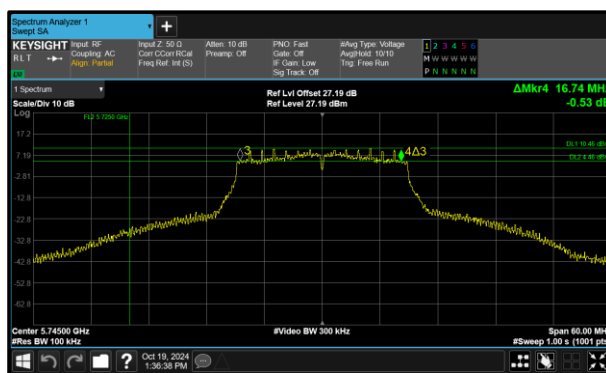


Figure 308 - 802.11n HT20 Minimum 6 dB EBW

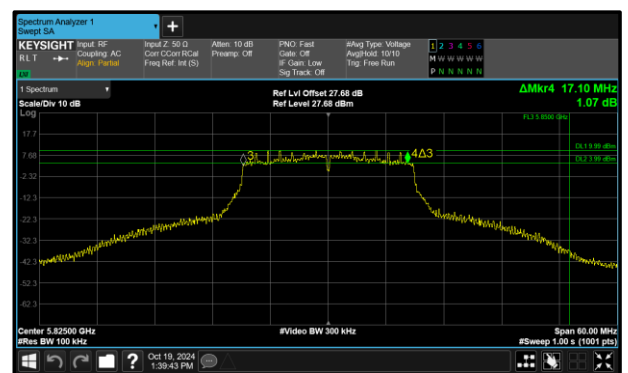


Figure 309 - 802.11n HT20 Maximum 6 dB EBW

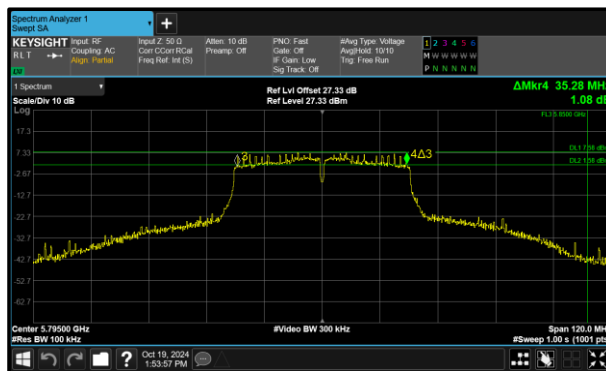


Figure 310 - 802.11n HT40 Minimum 6 dB EBW

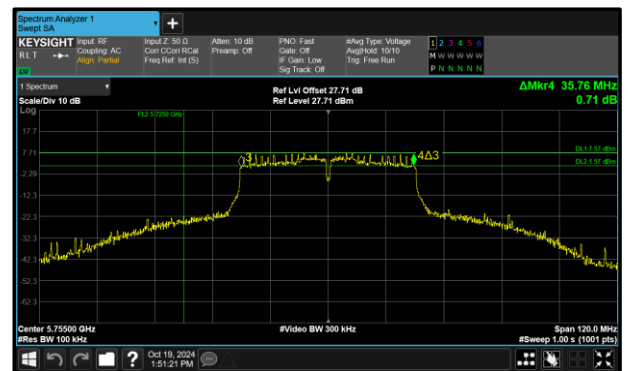


Figure 311 - 802.11n HT40 Maximum 6 dB EBW

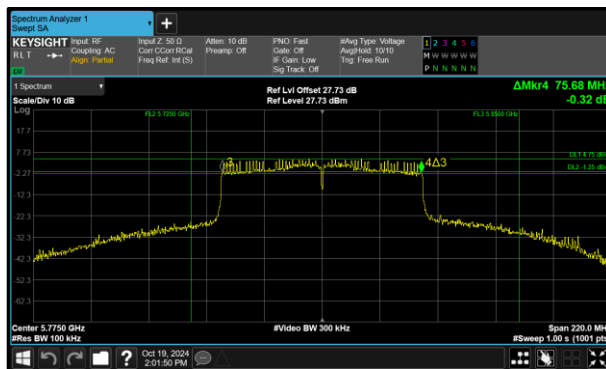


Figure 312 - 802.11ac VHT80 Minimum 6 dB
EBW

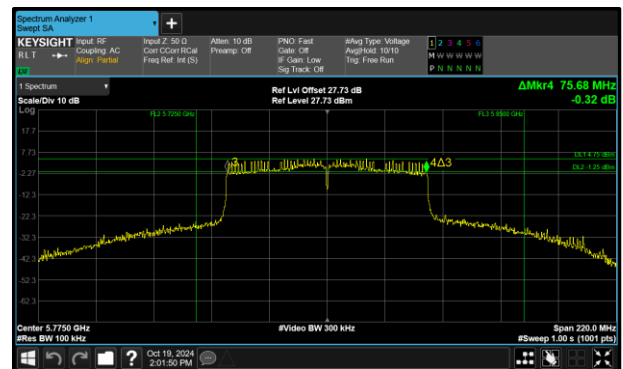


Figure 313 - 802.11ac VHT80 Maximum 6 dB
EBW

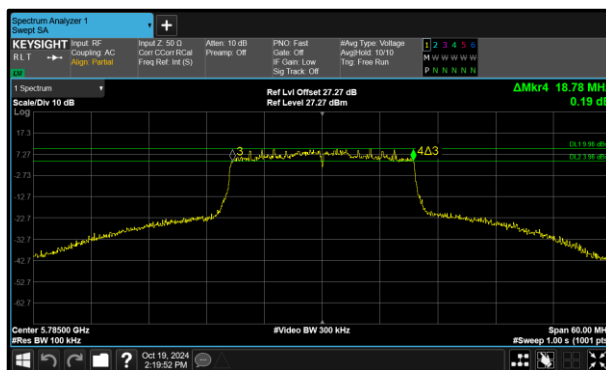


Figure 314 - 802.11ax HE20 SU Minimum 6 dB
EBW

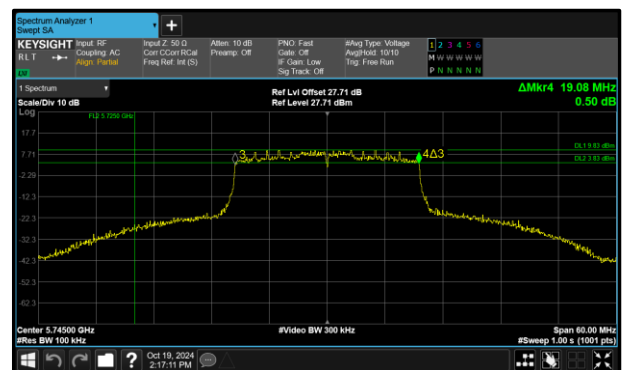


Figure 315 - 802.11ax HE20 SU Maximum 6 dB
EBW

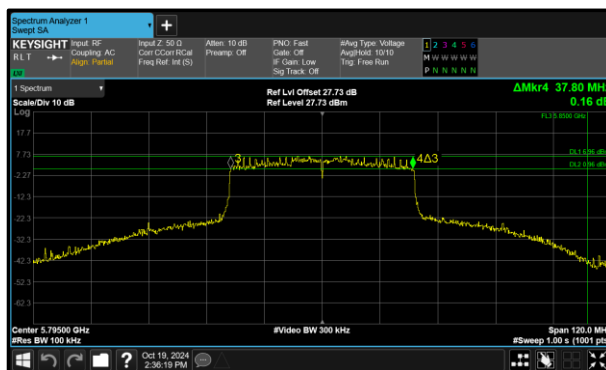


Figure 316 - 802.11ax HE40 SU Minimum 6 dB
EBW

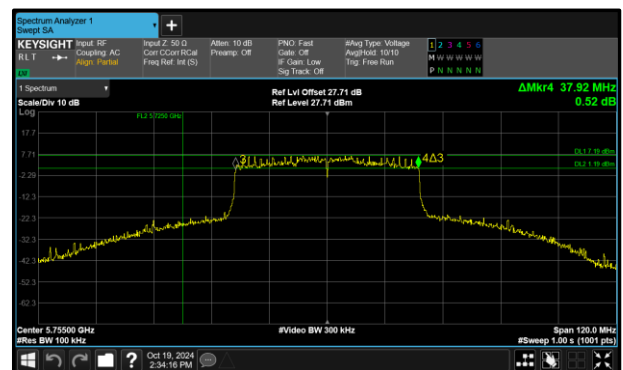


Figure 317 - 802.11ax HE40 SU Maximum 6 dB
EBW

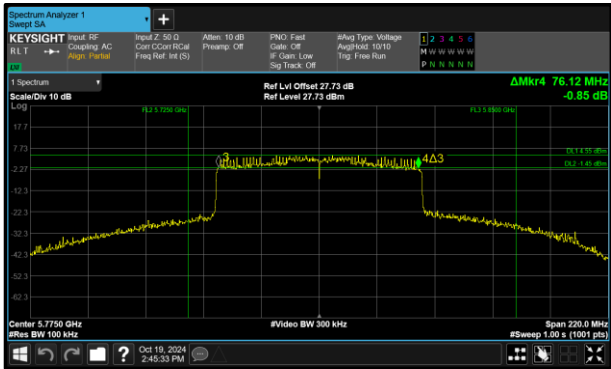


Figure 318 - 802.11ax HE80 SU Minimum 6 dB
EBW

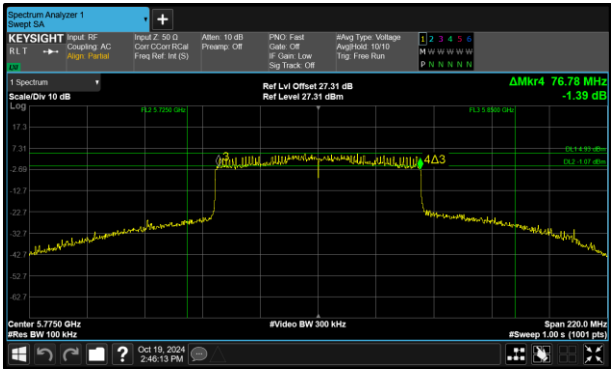


Figure 319 - 802.11ax HE80 SU Maximum 6 dB
EBW

Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.700	17.880
802.11n HT40	36.240	36.720
802.11ac VHT80	75.680	75.900
802.11ac VHT160	154.140	154.140
802.11ax HE20 SU	18.900	19.020
802.11ax HE40 SU	37.680	37.920
802.11ax HE80 SU	76.780	77.000
802.11ax HE160 SU	155.400	155.820

Table 101 - 99% Bandwidth Summary Results - MIMO CDD

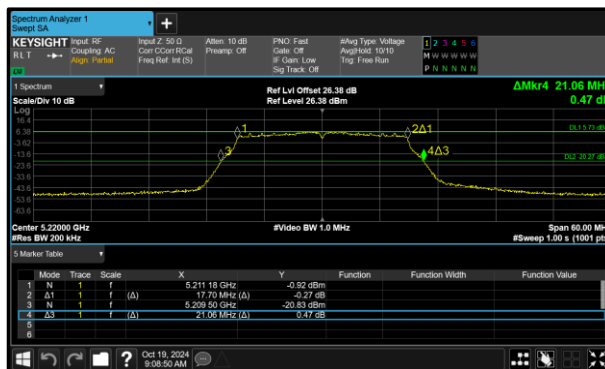


Figure 320 - 802.11n HT20 Minimum 99% OBW



Figure 321 - 802.11n HT20 Maximum 99% OBW

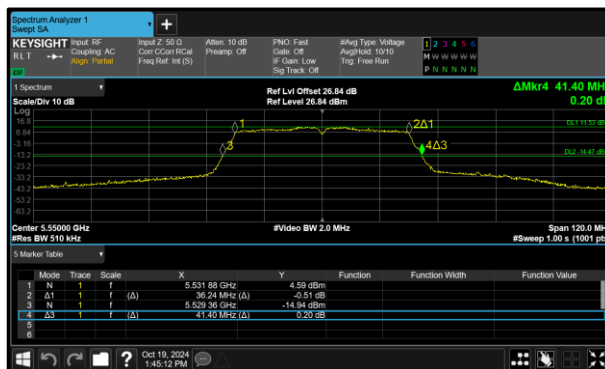


Figure 322 - 802.11n HT40 Minimum 99% OBW

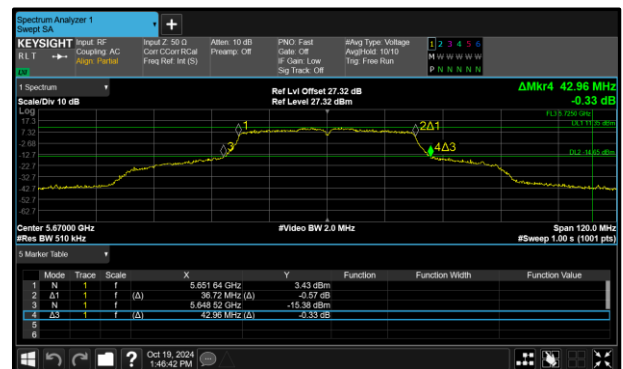


Figure 323 - 802.11n HT40 Maximum 99% OBW

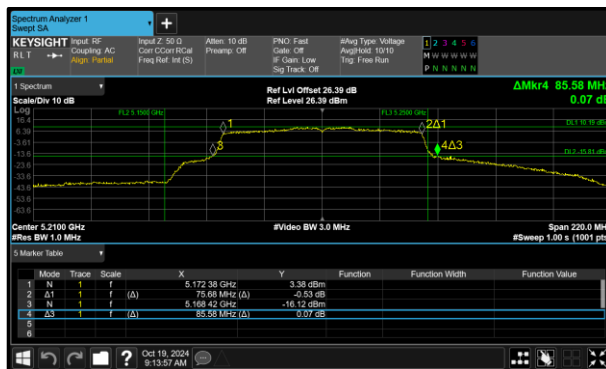


Figure 324 - 802.11ac VHT80 Minimum 99% OBW

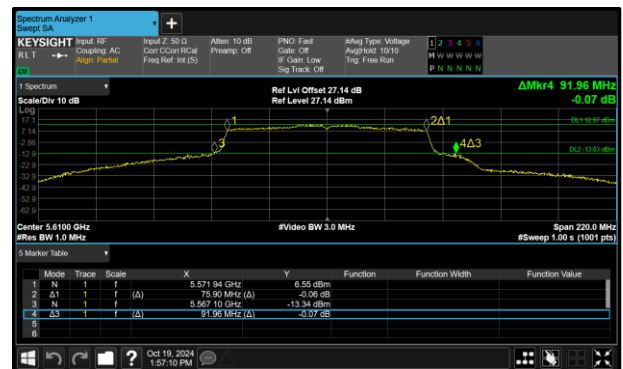


Figure 325 - 802.11ac VHT80 Maximum 99% OBW

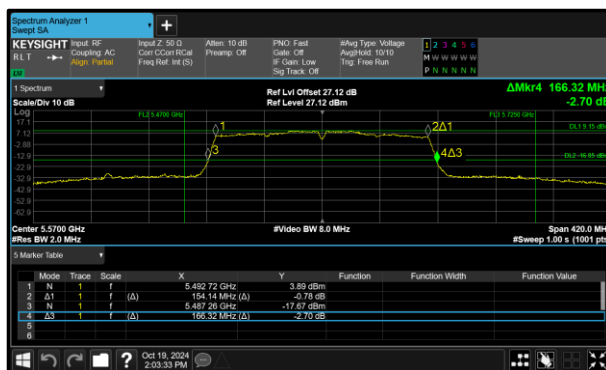


Figure 326 - 802.11ac VHT160 Minimum 99% OBW

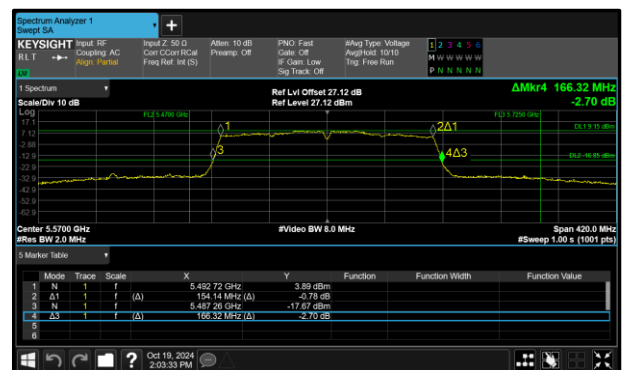


Figure 327 - 802.11ac VHT160 Maximum 99% OBW

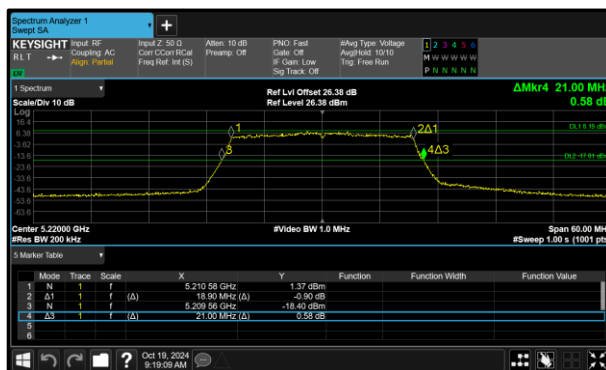


Figure 328 - 802.11ax HE20 SU Minimum 99% OBW

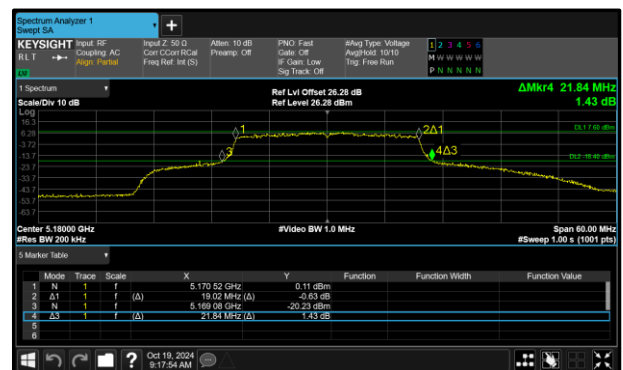


Figure 329 - 802.11ax HE20 SU Maximum 99% OBW

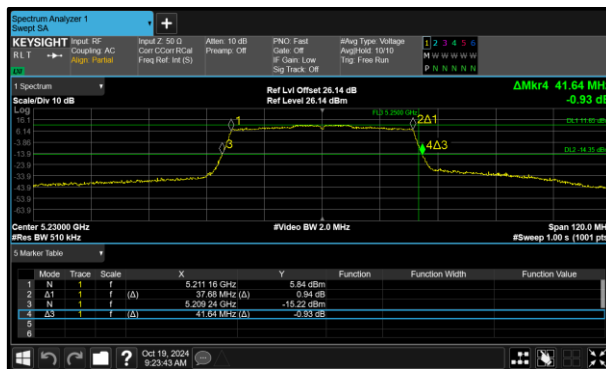


Figure 330 - 802.11ax HE40 SU Minimum 99% OBW

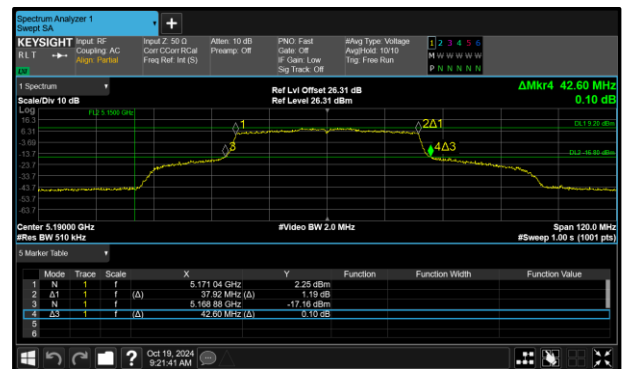


Figure 331 - 802.11ax HE40 SU Maximum 99% OBW

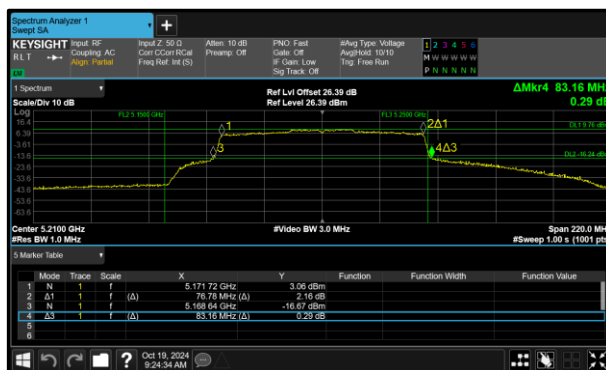


Figure 332 - 802.11ax HE80 SU Minimum 99% OBW



Figure 333 - 802.11ax HE80 SU Maximum 99% OBW

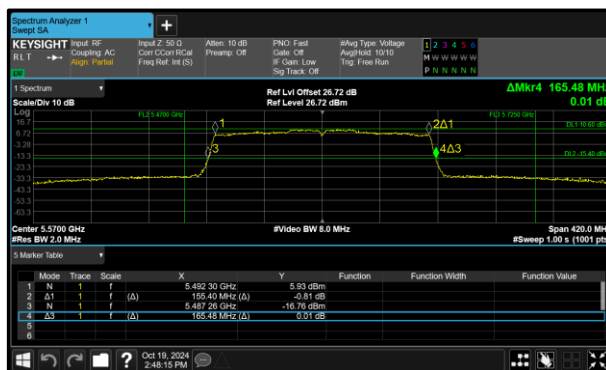


Figure 334 - 802.11ax HE160 SU Minimum 99% OBW

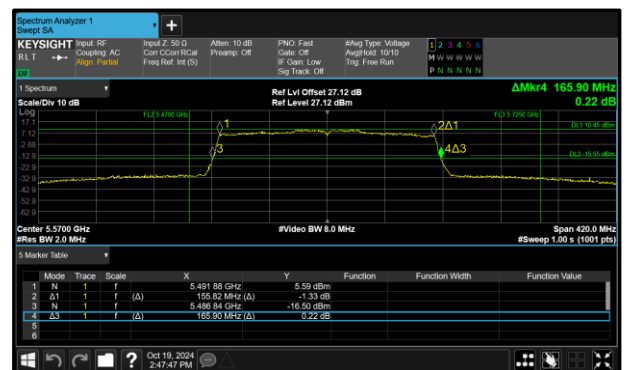


Figure 335 - 802.11ax HE160 SU Maximum 99% OBW



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	22.740	21.960	-	-	-
5220	21.060	21.060	-	-	-
5240	20.880	21.060	-	-	-

Table 102 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	17.820	17.820	-	-	-
5220	17.700	17.700	-	-	-
5240	17.700	17.700	-	-	-

Table 103 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	42.720	46.200	-	-	-
5230	41.160	41.400	-	-	-

Table 104 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	36.600	36.600	-	-	-
5230	36.360	36.300	-	-	-

Table 105 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	85.580	84.260	-	-	-

Table 106 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	75.680	75.680	-	-	-

Table 107 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	82.740	82.740	-	-	-

Table 108 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	76.860	76.860	-	-	-

Table 109 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	21.840	22.020	-	-	-
5220	21.000	21.120	-	-	-
5240	20.940	21.000	-	-	-

Table 110 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	18.960	19.020	-	-	-
5220	18.900	18.900	-	-	-
5240	18.900	18.900	-	-	-

Table 111 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	42.600	43.800	-	-	-
5230	41.520	41.640	-	-	-

Table 112 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	37.920	37.920	-	-	-
5230	37.800	37.680	-	-	-

Table 113 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	83.160	84.040	-	-	-

Table 114 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	76.780	76.780	-	-	-

Table 115 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	82.320	82.740	-	-	-

Table 116 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	77.700	77.700	-	-	-

Table 117 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	21.060	21.060	-	-	-
5300	20.940	21.120	-	-	-
5320	22.080	21.480	-	-	-

Table 118 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	17.700	17.700	-	-	-
5300	17.700	17.700	-	-	-
5320	17.820	17.820	-	-	-

Table 119 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	41.760	41.280	-	-	-
5310	43.080	42.360	-	-	-

Table 120 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	36.360	36.360	-	-	-
5310	36.480	36.600	-	-	-

Table 121 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	84.260	84.040	-	-	-

Table 122 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	75.680	75.680	-	-	-

Table 123 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	83.580	82.740	-	-	-

Table 124 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	77.280	77.280	-	-	-

Table 125 - 99% Bandwidth Results