



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	2.74	3.22	-	-	6.00	7.82	13.82	17.00	-3.18
6175 (RU52.37)	3.64	4.40	-	-	7.05	7.08	14.14	17.00	-2.86
6415 (RU52.40)	3.92	4.56	-	-	7.27	6.72	13.98	17.00	-3.02
6435 (RU52.37)	4.02	4.94	-	-	7.51	6.92	14.44	17.00	-2.56
6475 (RU52.37)	3.80	4.32	-	-	7.08	6.92	14.01	17.00	-2.99
6515 (RU52.40)	4.39	4.77	-	-	7.60	6.92	14.52	17.00	-2.48
6535 (RU52.37)	4.38	4.61	-	-	7.50	7.21	14.72	17.00	-2.28
6695 (RU52.37)	4.18	4.38	-	-	7.29	7.21	14.50	17.00	-2.50
6855 (RU52.40)	4.04	4.45	-	-	7.26	7.21	14.47	17.00	-2.53

Table 203 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	2.99	3.55	-	-	6.29	7.82	14.10	17.00	-2.90
6175 (RU106.53)	4.44	4.31	-	-	7.39	7.08	14.47	17.00	-2.53
6415 (RU106.54)	4.32	4.94	-	-	7.65	6.72	14.37	17.00	-2.63
6435 (RU106.53)	4.27	4.91	-	-	7.61	6.92	14.54	17.00	-2.46
6475 (RU106.53)	4.42	4.84	-	-	7.64	6.92	14.57	17.00	-2.43
6515 (RU106.54)	4.73	4.69	-	-	7.72	6.92	14.65	17.00	-2.35
6535 (RU106.53)	4.52	4.83	-	-	7.69	7.21	14.90	17.00	-2.10
6695 (RU106.53)	4.52	4.49	-	-	7.51	7.21	14.73	17.00	-2.27
6855 (RU106.54)	4.24	4.50	-	-	7.38	7.21	14.59	17.00	-2.41

Table 204 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz	Band:	U-NII-5
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	88.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.72
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6285	-17.10	-17.10	-	-	-14.09	6.72	-7.38	-5.00	-2.38
6325	-17.58	-17.25	-	-	-14.41	6.72	-7.69	-5.00	-2.69
6405	-17.50	-17.42	-	-	-14.45	6.72	-7.74	-5.00	-2.74

Table 205 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	92.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.32
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6145	-18.36	-17.66	-	-	-14.99	7.08	-7.90	-5.00	-2.90
6305	-18.03	-16.73	-	-	-14.32	6.72	-7.61	-5.00	-2.61
6385	-18.01	-17.05	-	-	-14.49	6.72	-7.78	-5.00	-2.78
6625	-17.76	-17.81	-	-	-14.78	7.21	-7.56	-5.00	-2.56
6705	-17.69	-18.10	-	-	-14.88	7.21	-7.67	-5.00	-2.67
6785	-17.35	-17.79	-	-	-14.55	7.21	-7.34	-5.00	-2.34

Table 206 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a)(9)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	91.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.41
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.21
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6185	-17.87	-16.76	-	-	-14.27	7.08	-7.18	-5.00	-2.18
6345	-17.27	-16.67	-	-	-13.95	6.72	-7.23	-5.00	-2.23
6665	-17.57	-16.57	-	-	-14.03	7.21	-6.82	-5.00	-1.82

Table 207 - Maximum Power Spectral Density Results



MIMO SDM

Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU LPI	Duty Cycle (%):	93.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.29
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	-11.36	-10.57	-	-	-7.94	4.81	-3.13	-1.00	-2.13
6175	-11.11	-10.79	-	-	-7.93	4.10	-3.84	-1.00	-2.84
6415	-11.20	-10.77	-	-	-7.97	3.86	-4.11	-1.00	-3.11
6435	-10.41	-10.83	-	-	-7.60	3.93	-3.67	-1.00	-2.67
6475	-10.72	-10.80	-	-	-7.75	3.93	-3.82	-1.00	-2.82
6515	-10.39	-10.35	-	-	-7.36	3.93	-3.43	-1.00	-2.43
6535	-10.34	-10.26	-	-	-7.29	4.25	-3.04	-1.00	-2.04
6695	-10.77	-11.09	-	-	-7.92	4.25	-3.66	-1.00	-2.66
6855	-10.51	-11.03	-	-	-7.75	4.25	-3.50	-1.00	-2.50
6875	-10.76	-10.98	-	-	-7.86	4.25	-3.61	-1.00	-2.61
6895	-8.38	-8.77	-	-	-5.56	2.40	-3.16	-1.00	-2.16
6995	-8.26	-8.58	-	-	-5.41	2.40	-3.01	-1.00	-2.01
7095	-8.90	-8.85	-	-	-5.86	2.40	-3.46	-1.00	-2.46

Table 208 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.30
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	-12.02	-11.67	-	-	-8.83	4.81	-4.02	-1.00	-3.02
6165	-10.78	-10.47	-	-	-7.61	4.10	-3.51	-1.00	-2.51
6405	-11.02	-10.74	-	-	-7.87	3.86	-4.01	-1.00	-3.01
6445	-10.64	-10.29	-	-	-7.45	3.93	-3.52	-1.00	-2.52
6485	-9.93	-10.17	-	-	-7.04	3.93	-3.11	-1.00	-2.11
6525	-10.77	-10.53	-	-	-7.64	4.25	-3.39	-1.00	-2.39
6565	-10.90	-11.01	-	-	-7.94	4.25	-3.69	-1.00	-2.69
6685	-10.39	-10.48	-	-	-7.43	4.25	-3.17	-1.00	-2.17
6845	-10.86	-10.76	-	-	-7.80	4.25	-3.55	-1.00	-2.55
6885	-10.68	-10.36	-	-	-7.50	4.25	-3.25	-1.00	-2.25
6925	-8.95	-9.11	-	-	-6.02	2.40	-3.62	-1.00	-2.62
7005	-9.09	-8.93	-	-	-6.00	2.40	-3.60	-1.00	-2.60
7085	-9.08	-9.08	-	-	-6.07	2.40	-3.67	-1.00	-2.67

Table 209 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	93.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.31
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	-11.45	-11.48	-	-	-8.45	4.81	-3.64	-1.00	-2.64
6145	-11.05	-10.41	-	-	-7.71	4.10	-3.61	-1.00	-2.61
6385	-10.53	-10.05	-	-	-7.27	3.86	-3.42	-1.00	-2.42
6465	-10.29	-10.17	-	-	-7.22	3.93	-3.29	-1.00	-2.29
6545	-10.25	-10.90	-	-	-7.56	4.25	-3.31	-1.00	-2.31
6625	-10.54	-10.77	-	-	-7.64	4.25	-3.39	-1.00	-2.39
6705	-10.25	-10.71	-	-	-7.46	4.25	-3.21	-1.00	-2.21
6785	-10.43	-10.44	-	-	-7.42	4.25	-3.17	-1.00	-2.17
6865	-10.32	-9.79	-	-	-7.04	4.25	-2.78	-1.00	-1.78
6945	-8.52	-8.67	-	-	-5.58	2.40	-3.18	-1.00	-2.18
7025	-8.53	-8.73	-	-	-5.62	2.40	-3.22	-1.00	-2.22

Table 210 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU LPI	Duty Cycle (%):	89.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.48
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-11.12	-11.12	-	-	-8.11	4.81	-3.30	-1.00	-2.30
6185	-10.41	-10.23	-	-	-7.31	4.10	-3.21	-1.00	-2.21
6345	-9.95	-9.69	-	-	-6.81	3.86	-2.95	-1.00	-1.95
6505	-9.95	-10.20	-	-	-7.06	4.25	-2.81	-1.00	-1.81
6665	-10.50	-10.63	-	-	-7.55	4.25	-3.30	-1.00	-2.30
6825	-11.05	-10.17	-	-	-7.58	4.25	-3.33	-1.00	-2.33
6985	-8.51	-8.60	-	-	-5.54	2.40	-3.14	-1.00	-2.14

Table 211 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 LPI	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	-11.24	-10.98	-	-	-8.10	4.81	-3.29	-1.00	-2.29
6175 (RU26.0)	-11.65	-10.75	-	-	-8.17	4.10	-4.07	-1.00	-3.07
6415 (RU26.8)	-10.12	-10.34	-	-	-7.22	3.86	-3.36	-1.00	-2.36
6435 (RU26.0)	-9.84	-9.98	-	-	-6.90	3.93	-2.97	-1.00	-1.97
6475 (RU26.0)	-10.05	-9.84	-	-	-6.93	3.93	-3.00	-1.00	-2.00
6515 (RU26.8)	-9.88	-9.66	-	-	-6.76	3.93	-2.83	-1.00	-1.83
6535 (RU26.0)	-10.37	-10.06	-	-	-7.20	4.25	-2.95	-1.00	-1.95
6695 (RU26.0)	-10.90	-10.49	-	-	-7.68	4.25	-3.43	-1.00	-2.43
6855 (RU26.8)	-10.43	-11.33	-	-	-7.85	4.25	-3.59	-1.00	-2.59
6875 (RU26.3)	-10.33	-11.13	-	-	-7.70	4.25	-3.45	-1.00	-2.45
6875 (RU26.5)	-11.68	-12.01	-	-	-8.83	2.40	-6.43	-1.00	-5.43
6895 (RU26.0)	-8.81	-8.78	-	-	-5.79	2.40	-3.39	-1.00	-2.39
6995 (RU26.0)	-8.98	-9.10	-	-	-6.03	2.40	-3.63	-1.00	-2.63
7095 (RU26.8)	-9.08	-9.13	-	-	-6.09	2.40	-3.69	-1.00	-2.69

Table 212 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 LPI	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	-10.77	-11.01	-	-	-7.88	4.81	-3.07	-1.00	-2.07
6175 (RU52.37)	-11.13	-10.11	-	-	-7.58	4.10	-3.48	-1.00	-2.48
6415 (RU52.40)	-10.85	-10.52	-	-	-7.67	3.86	-3.81	-1.00	-2.81
6435 (RU52.37)	-10.38	-10.26	-	-	-7.31	3.93	-3.38	-1.00	-2.38
6475 (RU52.37)	-10.14	-10.24	-	-	-7.18	3.93	-3.25	-1.00	-2.25
6515 (RU52.40)	-10.53	-10.20	-	-	-7.35	3.93	-3.42	-1.00	-2.42
6535 (RU52.37)	-11.03	-10.37	-	-	-7.68	4.25	-3.42	-1.00	-2.42
6695 (RU52.37)	-10.51	-10.50	-	-	-7.50	4.25	-3.24	-1.00	-2.24
6855 (RU52.40)	-10.21	-10.52	-	-	-7.35	4.25	-3.10	-1.00	-2.10
6875 (RU52.38)	-10.16	-10.95	-	-	-7.53	4.25	-3.27	-1.00	-2.27
6875 (RU52.39)	-10.08	-10.89	-	-	-7.46	2.40	-5.06	-1.00	-4.06
6895 (RU52.37)	-8.54	-8.88	-	-	-5.70	2.40	-3.30	-1.00	-2.30
6995 (RU52.37)	-8.43	-9.08	-	-	-5.73	2.40	-3.33	-1.00	-2.33
7095 (RU52.40)	-8.81	-9.37	-	-	-6.07	2.40	-3.67	-1.00	-2.67

Table 213 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 LPI	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	-11.24	-11.20	-	-	-8.21	4.81	-3.40	-1.00	-2.40
6175 (RU106.53)	-10.81	-9.98	-	-	-7.36	4.10	-3.27	-1.00	-2.27
6415 (RU106.54)	-10.63	-10.10	-	-	-7.35	3.86	-3.49	-1.00	-2.49
6435 (RU106.53)	-9.87	-9.89	-	-	-6.87	3.93	-2.94	-1.00	-1.94
6475 (RU106.53)	-10.07	-10.22	-	-	-7.14	3.93	-3.21	-1.00	-2.21
6515 (RU106.54)	-9.80	-9.79	-	-	-6.79	3.93	-2.86	-1.00	-1.86
6535 (RU106.53)	-10.17	-10.27	-	-	-7.21	4.25	-2.95	-1.00	-1.95
6695 (RU106.53)	-10.44	-10.78	-	-	-7.59	4.25	-3.34	-1.00	-2.34
6855 (RU106.54)	-10.10	-11.32	-	-	-7.66	4.25	-3.40	-1.00	-2.40
6875 (RU106.53)	-10.56	-10.93	-	-	-7.73	4.25	-3.48	-1.00	-2.48
6875 (RU106.54)	-10.05	-10.82	-	-	-7.41	2.40	-5.01	-1.00	-4.01
6895 (RU106.53)	-8.09	-8.88	-	-	-5.46	2.40	-3.06	-1.00	-2.06
6995 (RU106.53)	-8.11	-9.30	-	-	-5.65	2.40	-3.25	-1.00	-2.25
7095 (RU106.54)	-8.48	-9.35	-	-	-5.88	2.40	-3.48	-1.00	-2.48

Table 214 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.28
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	5.86	6.08	-	-	8.98	4.81	13.79	17.00	-3.21
6175	7.03	7.27	-	-	10.16	4.10	14.26	17.00	-2.74
6415	6.72	7.06	-	-	9.91	3.86	13.76	17.00	-3.24
6435	6.79	7.42	-	-	10.13	3.93	14.06	17.00	-2.94
6475	6.68	7.06	-	-	9.88	3.93	13.81	17.00	-3.19
6515	7.32	7.28	-	-	10.31	3.93	14.24	17.00	-2.76
6535	7.03	7.06	-	-	10.06	4.25	14.31	17.00	-2.69
6695	7.55	6.99	-	-	10.29	4.25	14.54	17.00	-2.46
6855	7.20	7.16	-	-	10.19	4.25	14.44	17.00	-2.56

Table 215 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.29
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	4.94	4.90	-	-	7.93	4.81	12.74	17.00	-4.26
6165	6.69	6.62	-	-	9.66	4.10	13.76	17.00	-3.24
6405	6.33	6.45	-	-	9.40	3.86	13.26	17.00	-3.74
6445	6.11	6.37	-	-	9.25	3.93	13.18	17.00	-3.82
6485	6.33	6.34	-	-	9.35	3.93	13.27	17.00	-3.73
6525	6.45	6.41	-	-	9.44	4.25	13.69	17.00	-3.31
6565	6.36	6.24	-	-	9.31	4.25	13.56	17.00	-3.44
6685	6.37	6.42	-	-	9.41	4.25	13.66	17.00	-3.34
6845	7.06	6.93	-	-	10.00	4.25	14.26	17.00	-2.74

Table 216 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.30
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	1.76	2.01	-	-	4.90	4.81	9.71	17.00	-7.29
6145	3.40	3.87	-	-	6.65	4.10	10.75	17.00	-6.25
6385	3.63	4.06	-	-	6.86	3.86	10.72	17.00	-6.28
6465	3.46	3.50	-	-	6.49	3.93	10.42	17.00	-6.58
6545	3.55	3.47	-	-	6.52	4.25	10.77	17.00	-6.23
6625	3.64	3.68	-	-	6.67	4.25	10.92	17.00	-6.08
6705	3.73	3.53	-	-	6.64	4.25	10.89	17.00	-6.11
6785	4.10	4.09	-	-	7.11	4.25	11.36	17.00	-5.64

Table 217 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU SP	Duty Cycle (%):	89.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.46
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6025	-1.98	-2.09	-	-	0.98	4.81	5.79	17.00	-11.21
6185	-1.16	-0.95	-	-	1.96	4.10	6.06	17.00	-10.94
6345	-1.05	-0.67	-	-	2.16	3.86	6.01	17.00	-10.99
6505	-1.54	-1.61	-	-	1.43	4.25	5.68	17.00	-11.32
6665	-1.21	-1.34	-	-	1.73	4.25	5.99	17.00	-11.01

Table 218 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26 SP	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU26.0)	5.68	5.66	-	-	8.68	4.81	13.49	17.00	-3.51
6175 (RU26.0)	6.75	7.20	-	-	9.99	4.10	14.09	17.00	-2.91
6415 (RU26.8)	6.53	6.95	-	-	9.75	3.86	13.61	17.00	-3.39
6435 (RU26.0)	6.56	7.19	-	-	9.90	3.93	13.83	17.00	-3.17
6475 (RU26.0)	6.49	6.82	-	-	9.67	3.93	13.60	17.00	-3.40
6515 (RU26.8)	6.95	7.61	-	-	10.30	3.93	14.23	17.00	-2.77
6535 (RU26.0)	6.66	6.98	-	-	9.83	4.25	14.09	17.00	-2.91
6695 (RU26.0)	7.05	7.15	-	-	10.11	4.25	14.36	17.00	-2.64
6855 (RU26.8)	7.05	7.20	-	-	10.14	4.25	14.39	17.00	-2.61

Table 219 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52 SP	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU52.37)	5.92	6.29	-	-	9.12	4.81	13.93	17.00	-3.07
6175 (RU52.37)	6.91	7.15	-	-	10.04	4.10	14.14	17.00	-2.86
6415 (RU52.40)	7.04	7.50	-	-	10.29	3.86	14.14	17.00	-2.86
6435 (RU52.37)	6.60	7.39	-	-	10.03	3.93	13.95	17.00	-3.05
6475 (RU52.37)	6.50	6.90	-	-	9.72	3.93	13.64	17.00	-3.36
6515 (RU52.40)	7.38	7.94	-	-	10.68	3.93	14.60	17.00	-2.40
6535 (RU52.37)	7.62	7.97	-	-	10.81	4.25	15.06	17.00	-1.94
6695 (RU52.37)	7.01	7.41	-	-	10.22	4.25	14.47	17.00	-2.53
6855 (RU52.40)	6.95	7.38	-	-	10.18	4.25	14.43	17.00	-2.57

Table 220 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248 4.5.5	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106 SP	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.81
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955 (RU106.53)	6.45	6.56	-	-	9.52	4.81	14.33	17.00	-2.67
6175 (RU106.53)	7.28	7.35	-	-	10.32	4.10	14.42	17.00	-2.58
6415 (RU106.54)	7.50	7.72	-	-	10.62	3.86	14.48	17.00	-2.52
6435 (RU106.53)	7.53	7.88	-	-	10.72	3.93	14.65	17.00	-2.35
6475 (RU106.53)	7.23	7.62	-	-	10.44	3.93	14.37	17.00	-2.63
6515 (RU106.54)	7.50	7.65	-	-	10.58	3.93	14.51	17.00	-2.49
6535 (RU106.53)	7.72	7.58	-	-	10.66	4.25	14.92	17.00	-2.08
6695 (RU106.53)	7.67	7.55	-	-	10.62	4.25	14.87	17.00	-2.13
6855 (RU106.54)	7.32	7.41	-	-	10.37	4.25	14.63	17.00	-2.37

Table 221 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a)(9) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU VLP	Duty Cycle (%):	87.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.56
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.25
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6115	-15.46	-14.49	-	-	-11.94	4.10	-7.84	-5.00	-2.84
6275	-14.44	-13.87	-	-	-11.13	3.86	-7.28	-5.00	-2.28
6415	-14.03	-14.04	-	-	-11.03	3.86	-7.17	-5.00	-2.17
6535	-14.91	-14.25	-	-	-11.56	4.25	-7.30	-5.00	-2.30
6695	-14.63	-14.76	-	-	-11.69	4.25	-7.43	-5.00	-2.43
6855	-14.72	-15.56	-	-	-12.11	4.25	-7.85	-5.00	-2.85

Table 222 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a)(9) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU VLP	Duty Cycle (%):	82.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.86
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.25
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6125	-15.27	-14.66	-	-	-11.94	4.10	-7.84	-5.00	-2.84
6285	-14.32	-14.15	-	-	-11.22	3.86	-7.37	-5.00	-2.37
6405	-14.29	-13.86	-	-	-11.06	3.86	-7.20	-5.00	-2.20
6565	-14.90	-14.46	-	-	-11.67	4.25	-7.41	-5.00	-2.41
6685	-14.69	-14.44	-	-	-11.56	4.25	-7.30	-5.00	-2.30
6805	-14.96	-14.28	-	-	-11.60	4.25	-7.34	-5.00	-2.34

Table 223 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a)(9) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU VLP	Duty Cycle (%):	91.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.41
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.25
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6145	-15.28	-14.38	-	-	-11.80	4.10	-7.70	-5.00	-2.70
6305	-13.83	-13.97	-	-	-10.89	3.86	-7.03	-5.00	-2.03
6385	-14.66	-13.73	-	-	-11.16	3.86	-7.31	-5.00	-2.31
6625	-14.99	-14.34	-	-	-11.64	4.25	-7.39	-5.00	-2.39
6705	-14.63	-14.10	-	-	-11.35	4.25	-7.09	-5.00	-2.09
6785	-14.91	-14.28	-	-	-11.57	4.25	-7.32	-5.00	-2.32

Table 224 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-7
Limit Clause(s):	15.407(a)(9) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU VLP	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.51
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.25
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6185	-15.57	-14.06	-	-	-11.74	4.10	-7.64	-5.00	-2.64
6345	-14.76	-14.38	-	-	-11.56	3.86	-7.70	-5.00	-2.70
6665	-15.29	-14.26	-	-	-11.73	4.25	-7.48	-5.00	-2.48

Table 225 - Maximum Power Spectral Density Results



TxBF

Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU LPI	Duty Cycle (%):	88.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.56
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	6.92
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
6285	-13.66	-13.97	-	-	-10.80	6.72	-4.08	-1.00	-3.08
6365	-12.89	-14.09	-	-	-10.44	6.72	-3.72	-1.00	-2.72
6405	-13.15	-13.78	-	-	-10.43	6.72	-3.71	-1.00	-2.71
6445	-14.20	-13.79	-	-	-10.98	6.92	-4.05	-1.00	-3.05
6485	-13.69	-14.44	-	-	-11.04	6.92	-4.11	-1.00	-3.11
6925	-12.42	-12.21	-	-	-9.30	5.34	-3.97	-1.00	-2.97
7005	-12.30	-12.21	-	-	-9.25	5.34	-3.91	-1.00	-2.91
7085	-12.28	-12.27	-	-	-9.27	5.34	-3.93	-1.00	-2.93

Table 226 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz 6.875-7.125 GHz	Band:	U-NII-5 U-NII-6 U-NII-7 U-NII-8
Limit Clause(s):	15.407(a)(8) RSS-248 4.5.3	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU LPI	Duty Cycle (%):	88.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	-14.53	-14.60	-	-	-11.55	7.82	-3.74	-1.00	-2.74
6145	-13.75	-13.87	-	-	-10.80	7.08	-3.71	-1.00	-2.71
6385	-13.36	-12.93	-	-	-10.13	6.72	-3.41	-1.00	-2.41
6465	-13.75	-13.31	-	-	-10.52	6.92	-3.59	-1.00	-2.59
6545	-14.06	-13.39	-	-	-10.70	7.30	-3.40	-1.00	-2.40
6625	-14.23	-13.57	-	-	-10.88	7.21	-3.66	-1.00	-2.66
6705	-13.98	-13.82	-	-	-10.89	7.21	-3.68	-1.00	-2.68
6785	-14.20	-13.10	-	-	-10.61	7.21	-3.40	-1.00	-2.40
6865	-13.72	-13.78	-	-	-10.74	7.21	-3.53	-1.00	-2.53
6945	-12.48	-11.62	-	-	-9.02	5.34	-3.68	-1.00	-2.68
7025	-11.96	-11.78	-	-	-8.86	5.34	-3.52	-1.00	-2.52

Table 227 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU SP	Duty Cycle (%):	89.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.47
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5955	3.33	3.48	-	-	6.42	7.82	14.23	17.00	-2.77
6175	3.87	4.14	-	-	7.02	7.08	14.10	17.00	-2.90
6415	4.56	4.66	-	-	7.62	6.72	14.34	17.00	-2.66
6435	3.87	3.86	-	-	6.88	6.92	13.80	17.00	-3.20
6475	3.75	4.26	-	-	7.02	6.92	13.95	17.00	-3.05
6515	3.93	4.24	-	-	7.10	6.92	14.02	17.00	-2.98
6535	3.76	4.16	-	-	6.97	7.21	14.19	17.00	-2.81
6695	4.06	4.30	-	-	7.19	7.21	14.41	17.00	-2.59
6855	3.96	4.33	-	-	7.16	7.21	14.37	17.00	-2.63

Table 228 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU SP	Duty Cycle (%):	88.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.52
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5965	2.44	2.91	-	-	5.69	7.82	13.50	17.00	-3.50
6165	3.33	3.73	-	-	6.55	7.08	13.63	17.00	-3.37
6405	4.20	4.36	-	-	7.29	6.72	14.00	17.00	-3.00
6445	3.50	4.24	-	-	6.90	6.92	13.82	17.00	-3.18
6485	3.24	4.04	-	-	6.67	6.92	13.60	17.00	-3.40
6525	3.17	3.57	-	-	6.39	6.92	13.31	17.00	-3.69
6565	3.68	4.21	-	-	6.97	7.21	14.18	17.00	-2.82
6685	3.42	3.63	-	-	6.54	7.21	13.75	17.00	-3.25
6845	3.74	3.71	-	-	6.74	7.21	13.95	17.00	-3.05

Table 229 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.925-6.425 GHz 6.425-6.525 GHz 6.525-6.875 GHz	Band:	U-NII-5 U-NII-6 U-NII-7
Limit Clause(s):	15.407(a)(7) RSS-248	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU SP	Duty Cycle (%):	88.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	7.82
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5985	-0.07	0.47	-	-	3.22	7.82	11.04	17.00	-5.96
6145	0.98	0.81	-	-	3.90	7.08	10.99	17.00	-6.01
6385	1.22	1.45	-	-	4.35	6.72	11.07	17.00	-5.93
6465	0.77	1.07	-	-	3.93	6.92	10.86	17.00	-6.14
6545	0.39	0.73	-	-	3.57	7.30	10.87	17.00	-6.13
6625	-0.01	0.49	-	-	3.26	7.21	10.47	17.00	-6.53
6705	0.38	0.78	-	-	3.59	7.21	10.81	17.00	-6.19
6785	0.66	0.80	-	-	3.74	7.21	10.96	17.00	-6.04

Table 230 - Maximum Power Spectral Density Results

FCC 47 CFR Part 15E, Limit Clause 15.407(a)(7)

For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

FCC 47 CFR Part 15E, Limit Clause 15.407(a)(8)

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.



2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
Attenuator 5W 30dB DC-18GHz	Aaren	AT40A-4041-D18-30	5505	12	22-Feb-2025
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Dec-2024
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	02-Jan-2025
USB Power Sensor	Boonton	RTP5008	5820	12	07-Feb-2025
USB Power Sensor	Boonton	RTP5008	5821	12	07-Feb-2025
1500VA AC Power Supply	iTech	IT7324	5907	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5919	24	18-Mar-2026
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5921	12	05-Feb-2025
USB Power Sensors, 50MHz to 8GHz	Boonton	RTP5008	5922	12	05-Feb-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221/B	6305	12	20-May-2025
Cable (SMA to SMA 3m)	Junkosha	MWX221-03000AMSAMS/A	6317	12	23-May-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	26-Feb-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	07-Feb-2025
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6447	-	O/P Mon
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6448	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	16-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6519	12	08-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6520	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6521	12	09-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	16-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6587	12	13-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6588	12	13-Feb-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	6694	-	TU
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	06-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	06-Feb-2025

Table 231

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.6 Authorised Band Edges

2.6.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (b)

2.6.2 Equipment Under Test and Modification State

A3185, S/N: LD12H296C1 - Modification State 0
A3185, S/N: FWGHH4D25Q - Modification State 0
A3185, S/N: KXCL61LP9Q - Modification State 0
A3185, S/N: GX224MWRCX - Modification State 0
A3185, S/N: GK2D1WP7N4 - Modification State 0

2.6.3 Date of Test

30-July-2024 to 11-October-2024

2.6.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.6.

For U-NII-5-8 channels, the limit line on the following plots equated to -27 dBm/MHz. EIRP and was converted to field strength at 3 m using the following formula:

Field Strength (dB μ V/m at 3 m) = EIRP (dBm) + 95.2 dB

As per KDB 987594, In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Authorised band edge measurements were performed, with the device operating in SISO and MIMO configurations, across the various modes supported by the device.

The measurements displayed within this report, have been limited to those modes which have been shown to be worst case.

Further measurements are held on file by TÜV SÜD and are available if required.

2.6.5 Environmental Conditions

Ambient Temperature	21.3 - 23.9 °C
Relative Humidity	40.2 - 63.9 %




2.6.6 Test Results

6 GHz WLAN


20 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11a	54 Mbps	-	-	5955	5925	74.54	59.42
802.11a	54 Mbps	-	-	5975	5925	61.62	47.96
802.11ax HE20	MCS 2x1	SU	-	5955	5925	74.83	60.10
802.11ax HE20	MCS 11x1	106	53	5955	5925	69.05	48.68
802.11ax HE20	MCS 11x1	SU	-	5975	5925	64.87	48.46
802.11ax HE20	MCS 11x1	106	53	5975	5925	57.46	45.50
802.11a	54 Mbps	-	-	7095	7125	72.39	58.88
802.11a	12 Mbps	-	-	7115	7125	83.65	65.38
802.11ax HE20	MCS 2x1	SU	-	7095	7125	74.16	60.00
802.11ax HE20	MCS 11x1	106	54	7095	7125	69.44	48.99
802.11ax HE20	MCS 11x1	SU	-	7115	7125	77.56	65.65
802.11ax HE20	MCS 11x1	52	40	7115	7125	75.59	65.54


Table 232 - SISO Authorised Band Edge Results

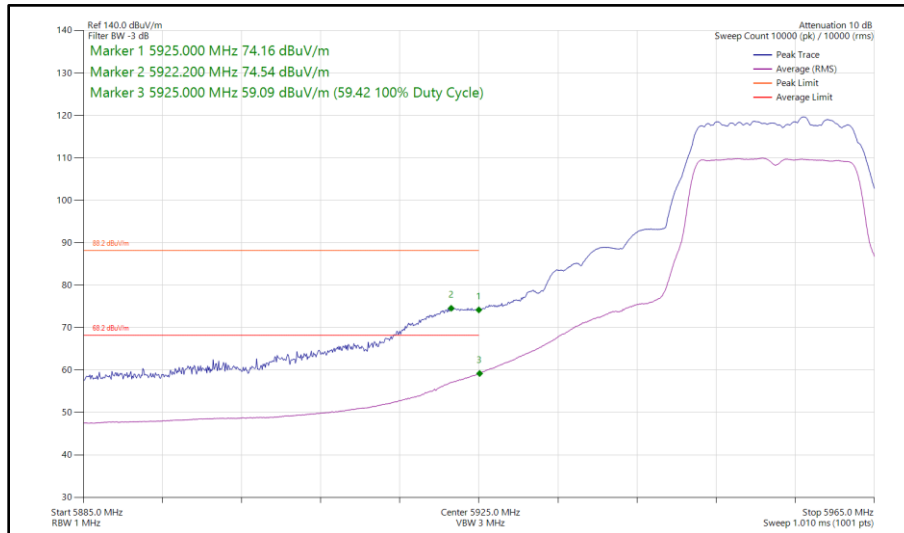


**Figure 176 - 802.11a, SISO, Core 0 - 5955 MHz
 Band Edge Frequency 5925 MHz**

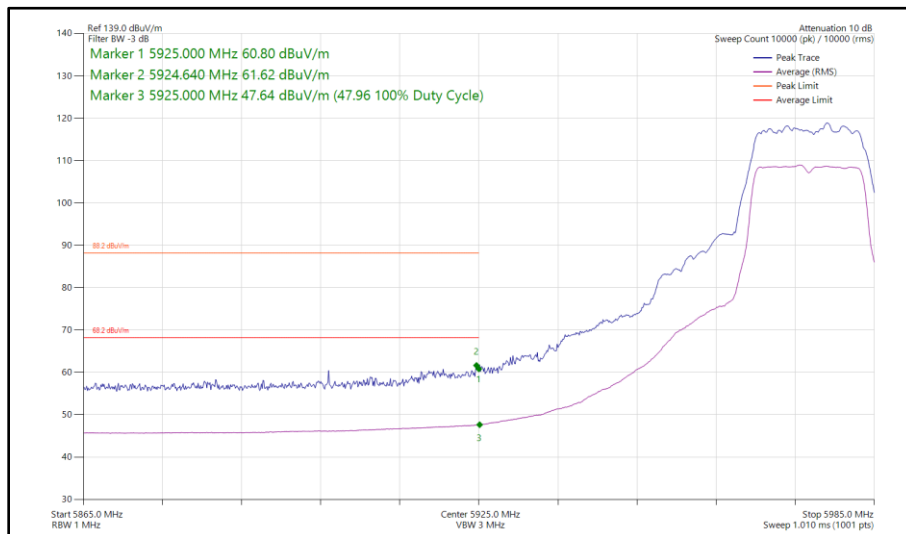


**Figure 177 - 802.11a, SISO, Core 0 - 5975 MHz
Band Edge Frequency 5925 MHz**

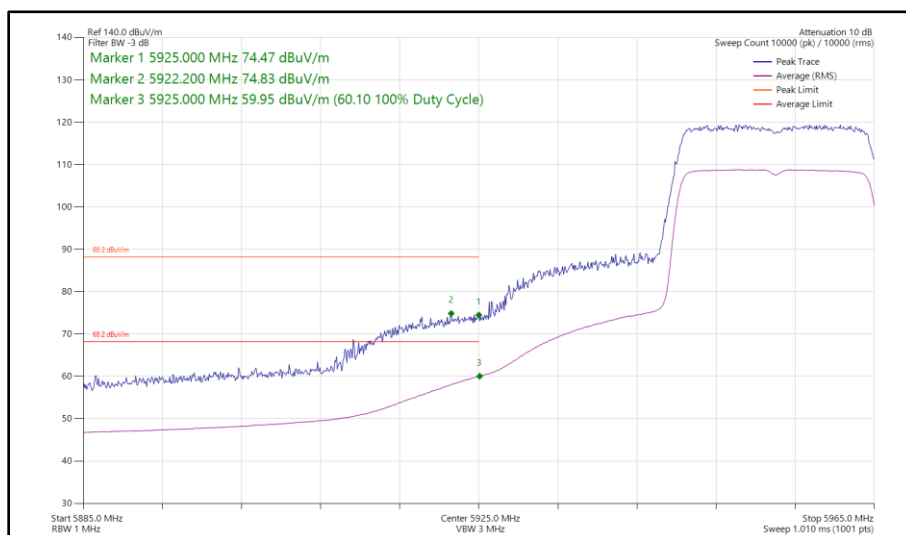


**Figure 178 - 802.11ax HE20, SU, SISO, Core 0 - 5955 MHz
Band Edge Frequency 5925 MHz**

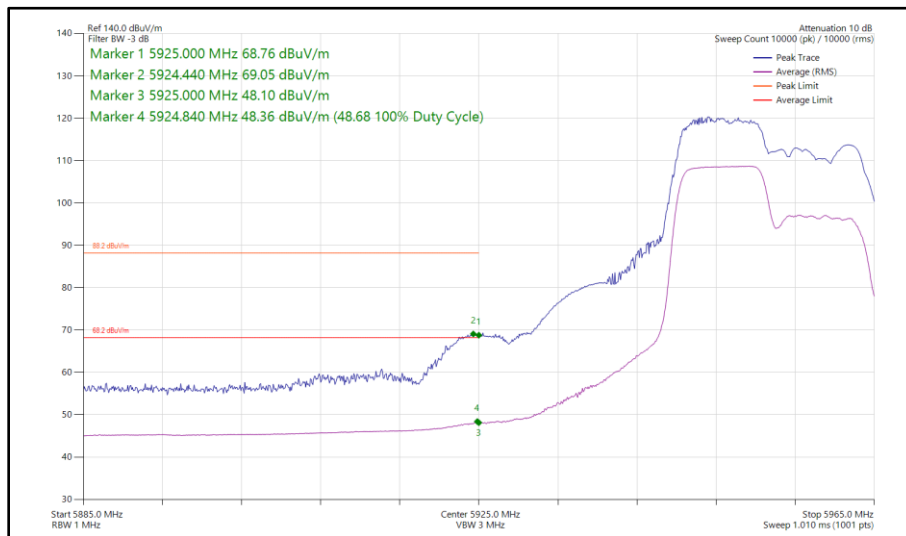


**Figure 179 - 802.11ax HE20, RU 106-53, SISO, Core 0 - 5955 MHz
Band Edge Frequency 5925 MHz**

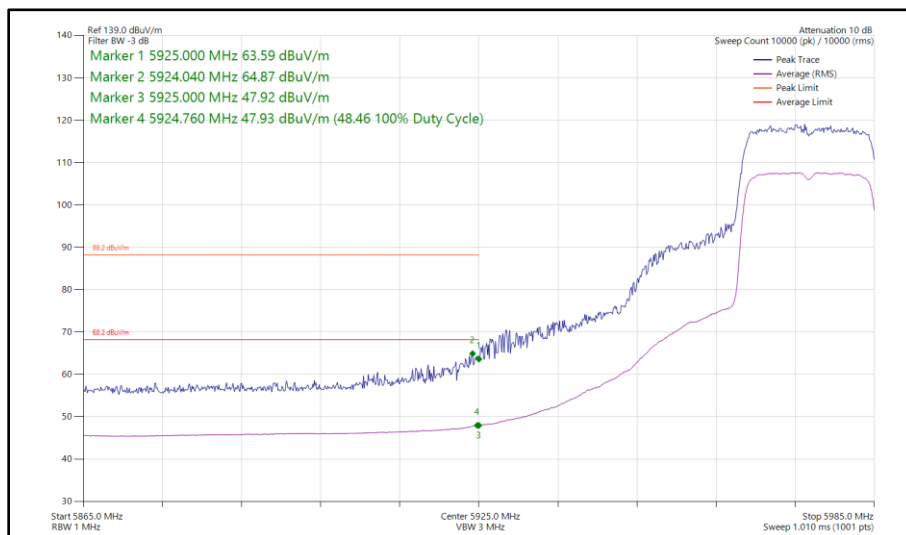


**Figure 180 - 802.11ax HE20, SU, SISO, Core 0 - 5975 MHz
Band Edge Frequency 5925 MHz**

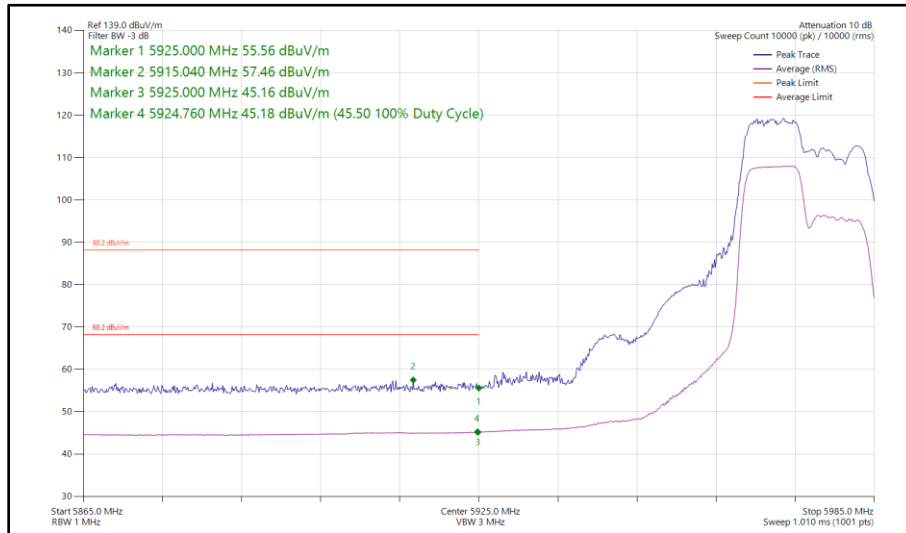


**Figure 181 - 802.11ax HE20, RU 106-53, SISO, Core 0 - 5975 MHz
Band Edge Frequency 5925 MHz**

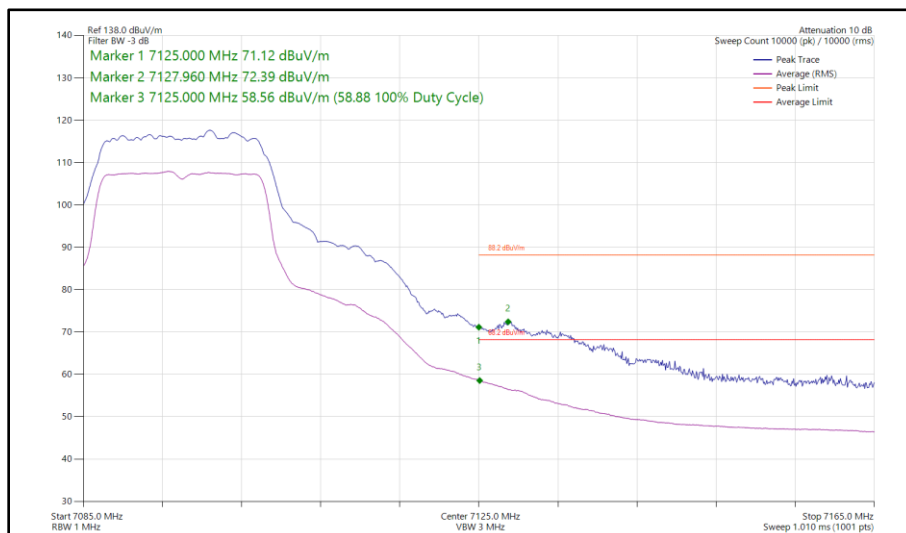


**Figure 182 - 802.11a, SISO, Core 0 - 7095 MHz
Band Edge Frequency 7125 MHz**

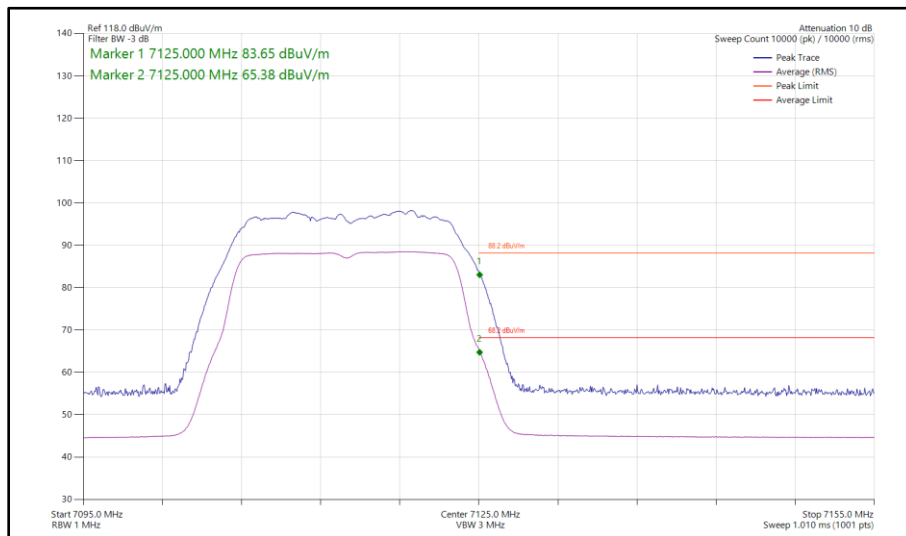


**Figure 183 - 802.11a, SISO, Core 0 - 7115 MHz
Band Edge Frequency 7125 MHz**

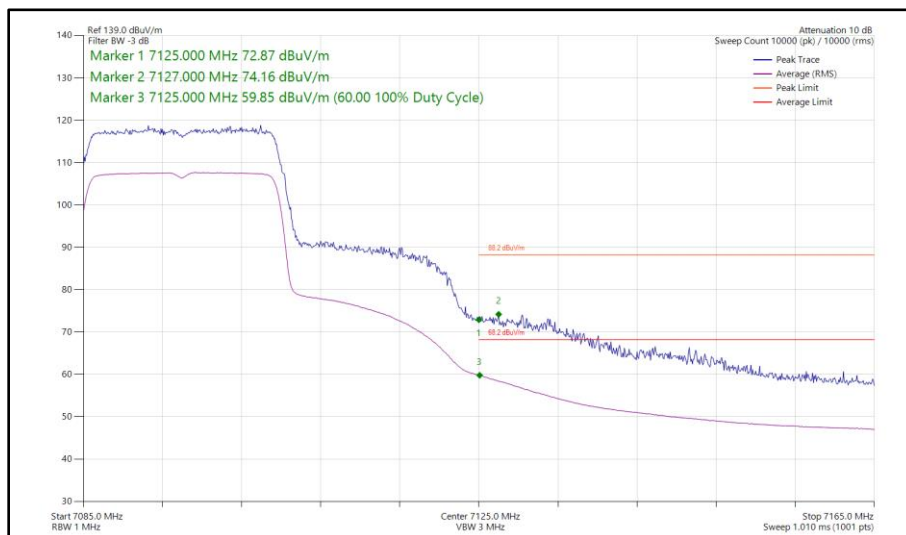


**Figure 184 - 802.11ax HE20, SU, SISO, Core 0 - 7095 MHz
Band Edge Frequency 7125 MHz**

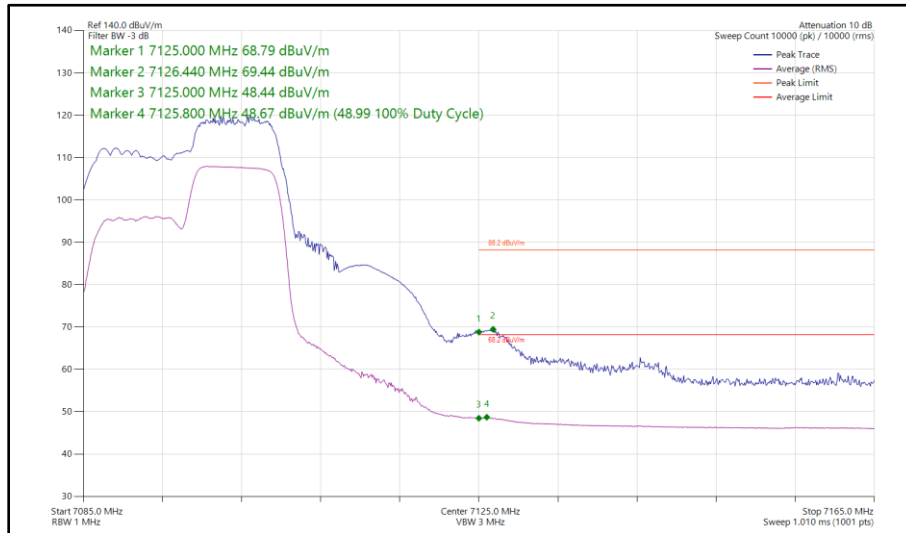

**Figure 185 - 802.11ax HE20, RU 106-54, SISO, Core 0 - 7095 MHz
Band Edge Frequency 7125 MHz**

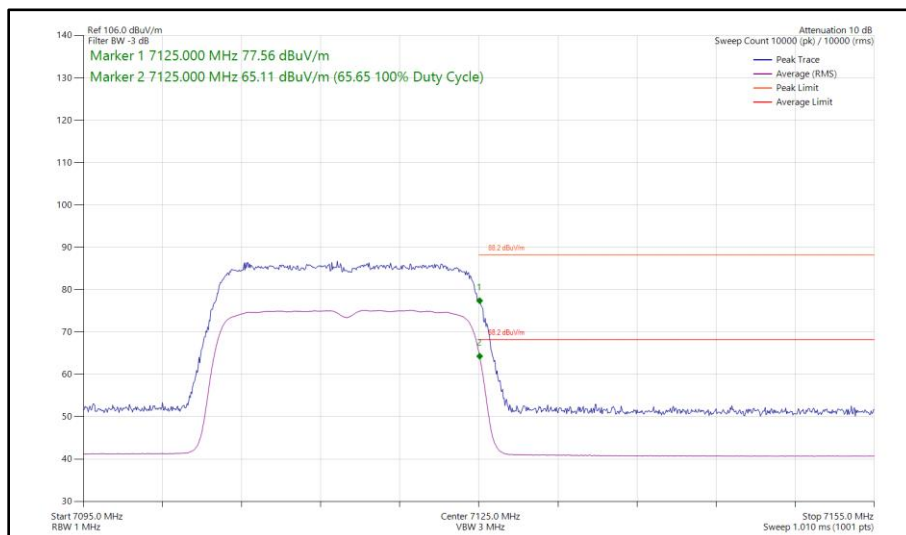

**Figure 186 - 802.11ax HE20, SU, SISO, Core 0 - 7115 MHz
Band Edge Frequency 7125 MHz**

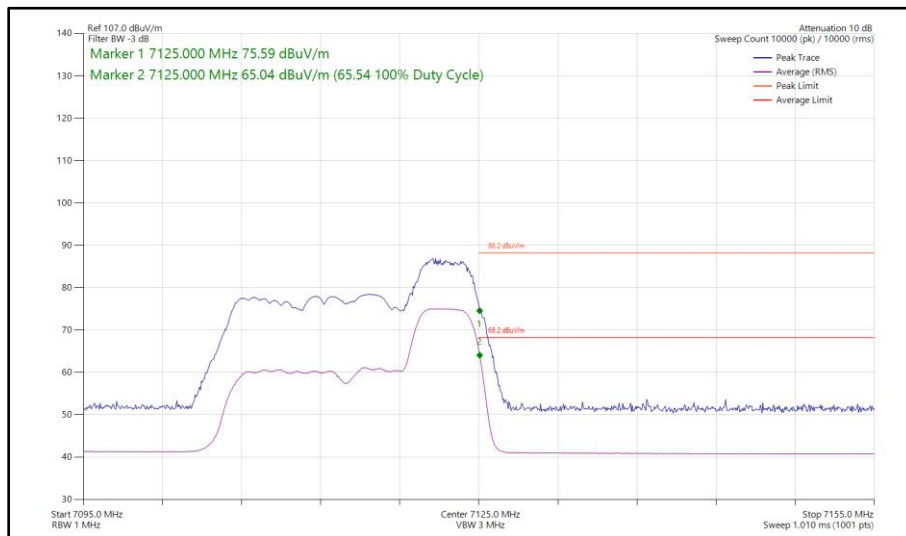


**Figure 187 - 802.11ax HE20, RU 52-40, SISO, Core 0 - 7115 MHz
Band Edge Frequency 7125 MHz**




20 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11a	24 Mbps	-	-	5955	5925	74.04	58.16
802.11a	54 Mbps	-	-	5975	5925	61.97	48.21
802.11ax HE20	MCS 11x1	SU	-	5955	5925	74.34	57.61
802.11ax HE20	MCS 11x1	106	54	5955	5925	68.56	47.76
802.11ax HE20	MCS 11x1	SU	-	5975	5925	67.37	48.59
802.11ax HE20	MCS 11x1	106	54	5975	5925	57.46	45.18
802.11a	54 Mbps	-	-	7095	7125	73.23	59.97
802.11a	12 Mbps	-	-	7115	7125	83.57	65.70
802.11ax HE20	MCS 2x1	SU	-	7095	7125	72.68	59.81
802.11ax HE20	MCS 11x1	106	54	7095	7125	68.93	49.10
802.11ax HE20	MCS 2x1	SU	-	7115	7125	75.82	65.34
802.11ax HE20	MCS 11x1	106	54	7115	7125	75.73	65.15


Table 233 - SISO Authorised Band Edge Results

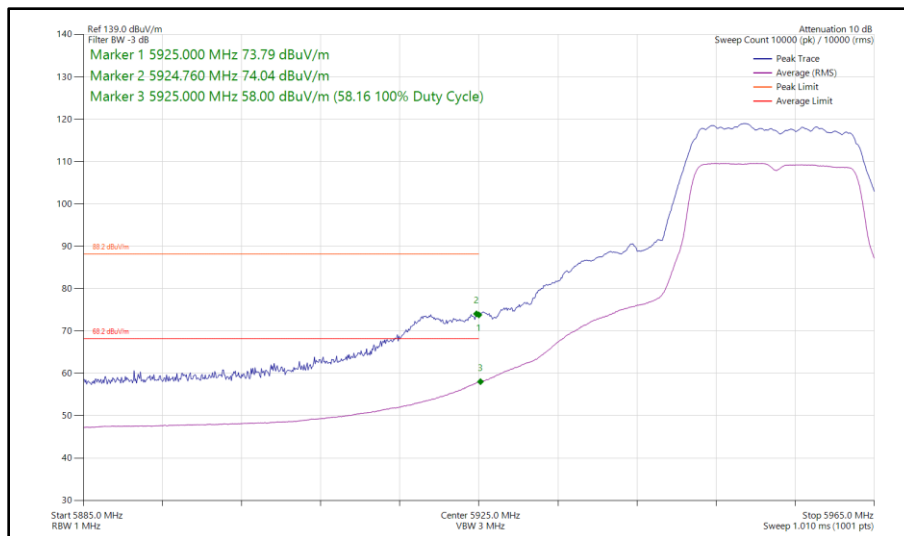


**Figure 188 - 802.11a, SISO, Core 1 - 5955 MHz
 Band Edge Frequency 5925 MHz**

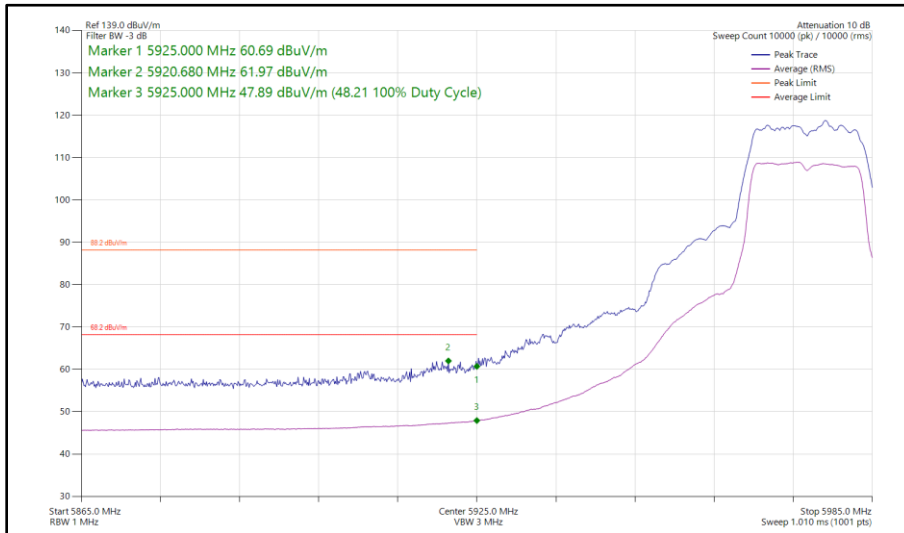


**Figure 189 - 802.11a, SISO, Core 1 - 5975 MHz
Band Edge Frequency 5925 MHz**

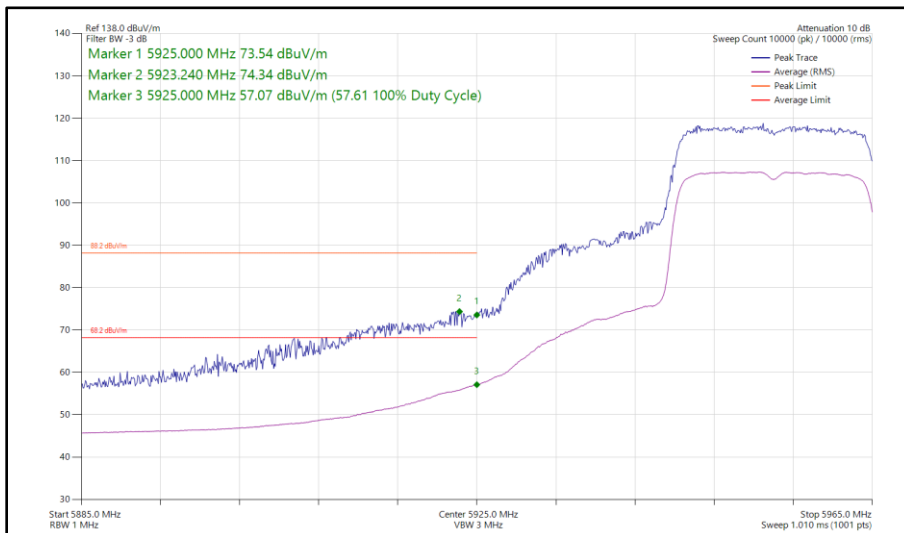


**Figure 190 - 802.11ax HE20, SU, SISO, Core 1 - 5955 MHz
Band Edge Frequency 5925 MHz**

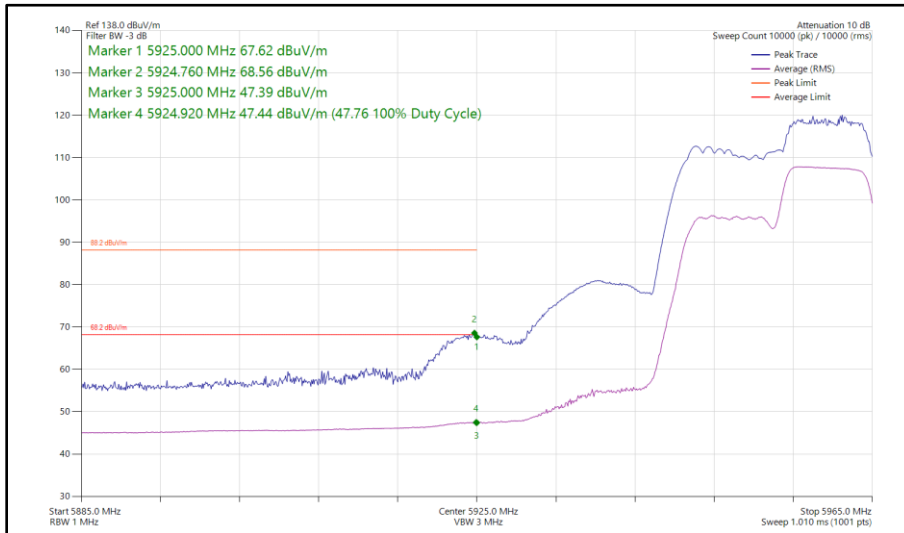


**Figure 191 - 802.11ax HE20, RU 106-54, SISO, Core 1 - 5955 MHz
Band Edge Frequency 5925 MHz**

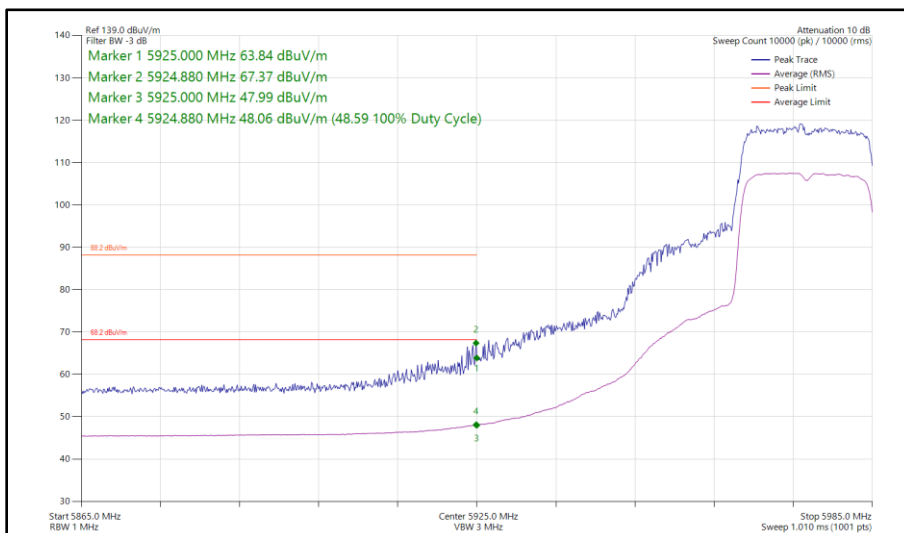


**Figure 192 - 802.11ax HE20, SU, SISO, Core 1 - 5975 MHz
Band Edge Frequency 5925 MHz**

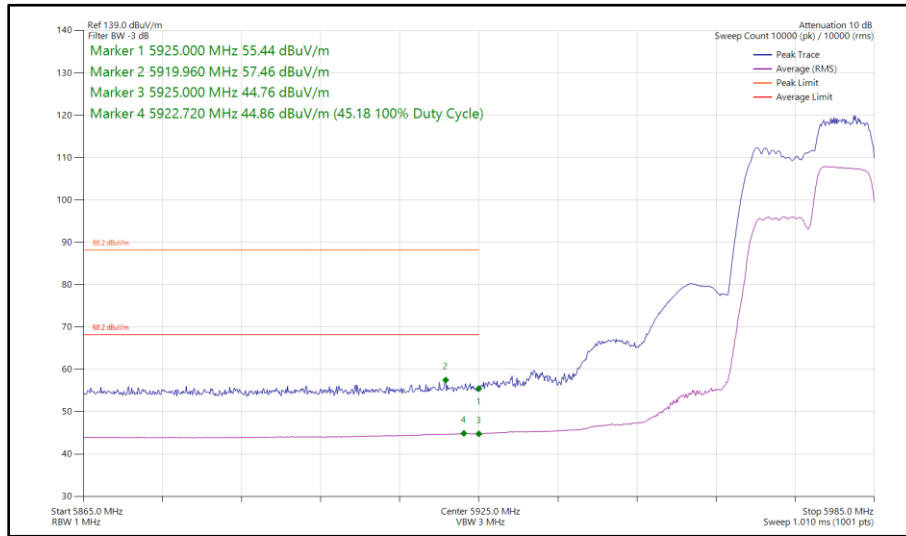


**Figure 193 - 802.11ax HE20, RU 106-54, SISO, Core 1 - 5975 MHz
Band Edge Frequency 5925 MHz**

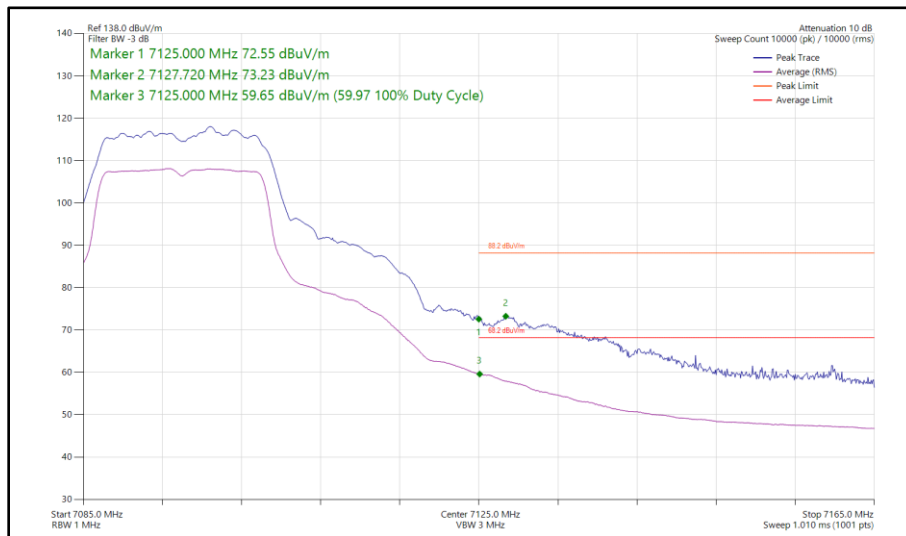


**Figure 194 - 802.11a, SISO, Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**

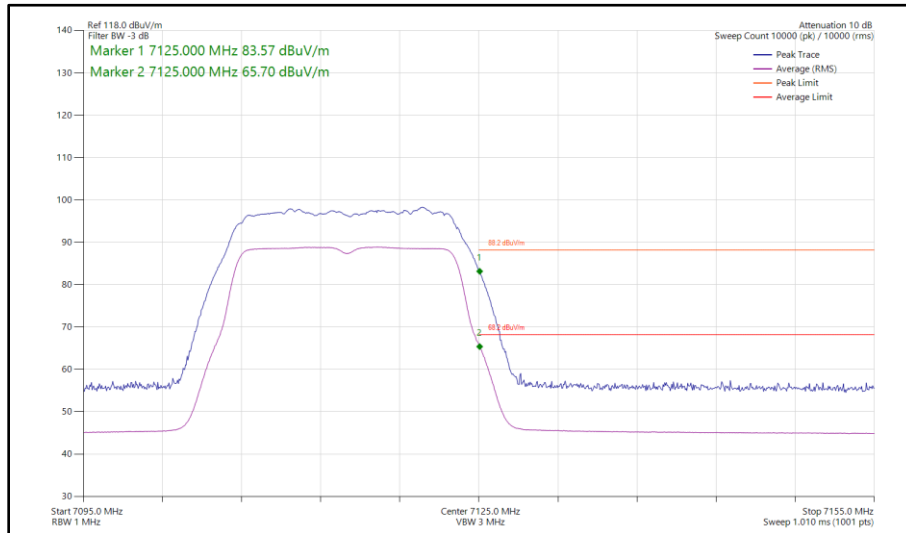


**Figure 195 - 802.11a, SISO, Core 1 - 7115 MHz
Band Edge Frequency 7125 MHz**

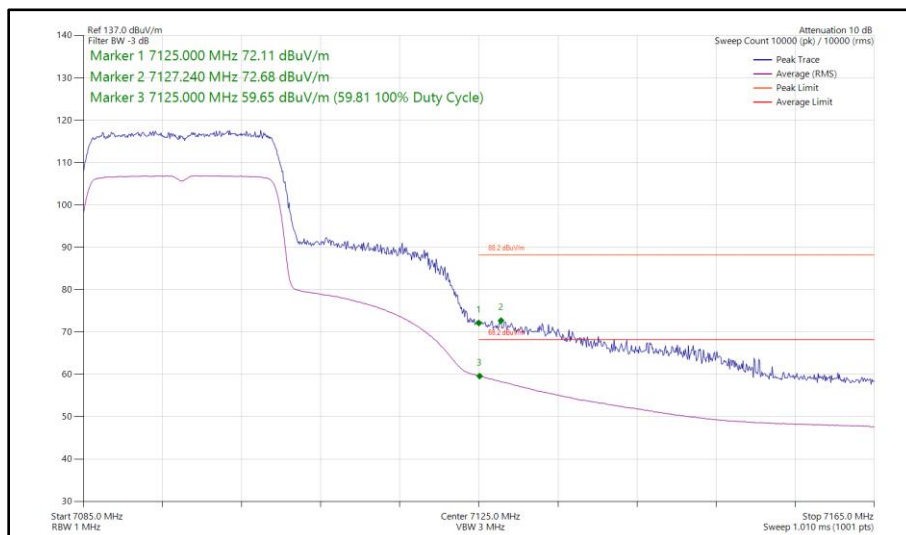


**Figure 196 - 802.11ax HE20, SU, SISO, Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**

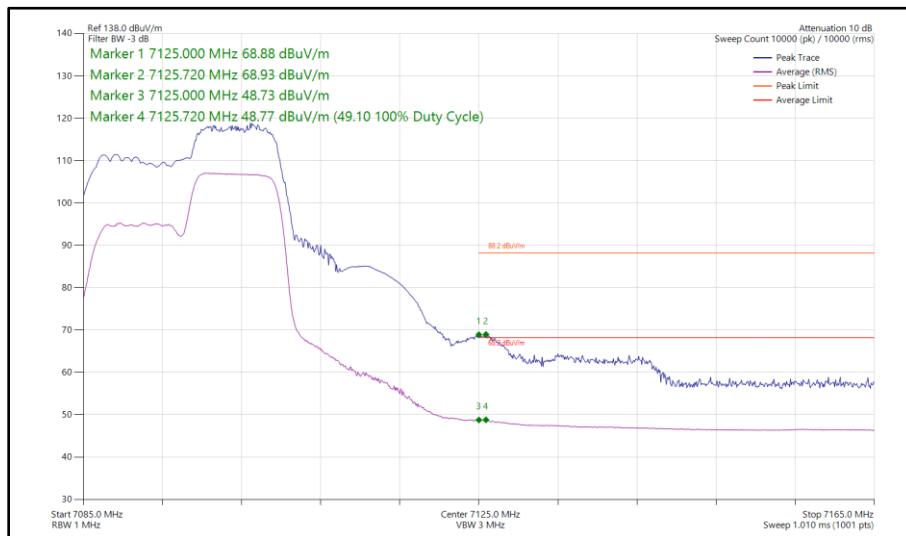

**Figure 197 - 802.11ax HE20, RU 106-54, SISO, Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**

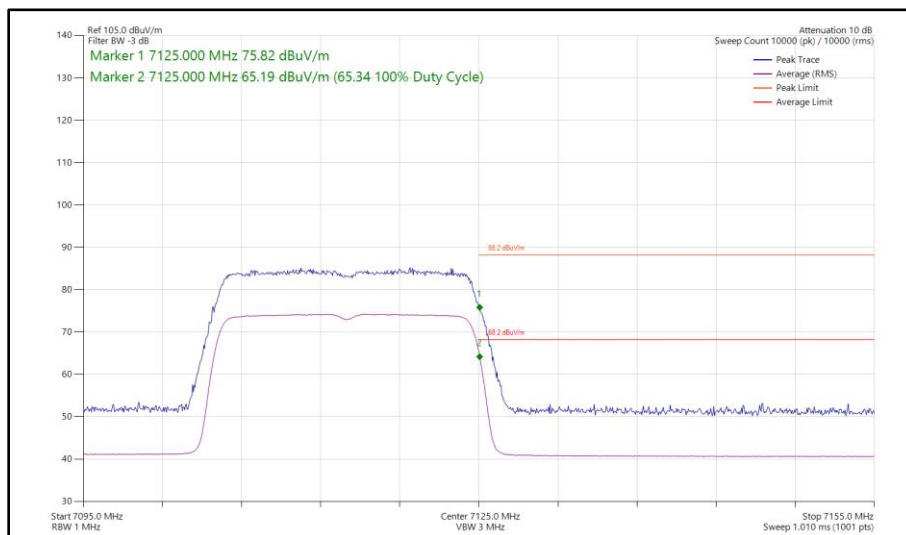

**Figure 198 - 802.11ax HE20, SU, SISO, Core 1 - 7115 MHz
Band Edge Frequency 7125 MHz**

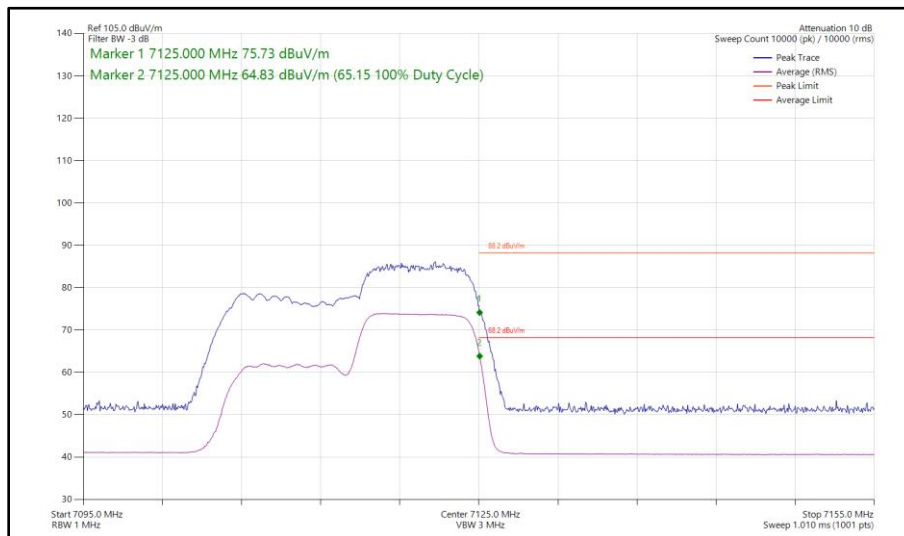

**Figure 199 - 802.11ax HE20, RU 106-54, SISO, Core 1 - 7115 MHz
Band Edge Frequency 7125 MHz**



20 MHz Bandwidth - Core 0 - Core 1 (CDD)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ax HE20	MCS 4x1	SU	-	5955	5925	82.35	65.26
802.11ax HE20	MCS 11x1	106	53	5955	5925	75.02	51.94
802.11ax HE20	MCS 11x1	SU	-	5975	5925	70.62	51.88
802.11ax HE20	MCS 11x1	106	53	5975	5925	61.41	47.50
802.11ax HE20	MCS 11x1	SU	-	7095	7125	78.43	61.70
802.11ax HE20	MCS 11x1	106	53	7095	7125	72.31	49.90

Table 234 - CDD Authorised Band Edge Results



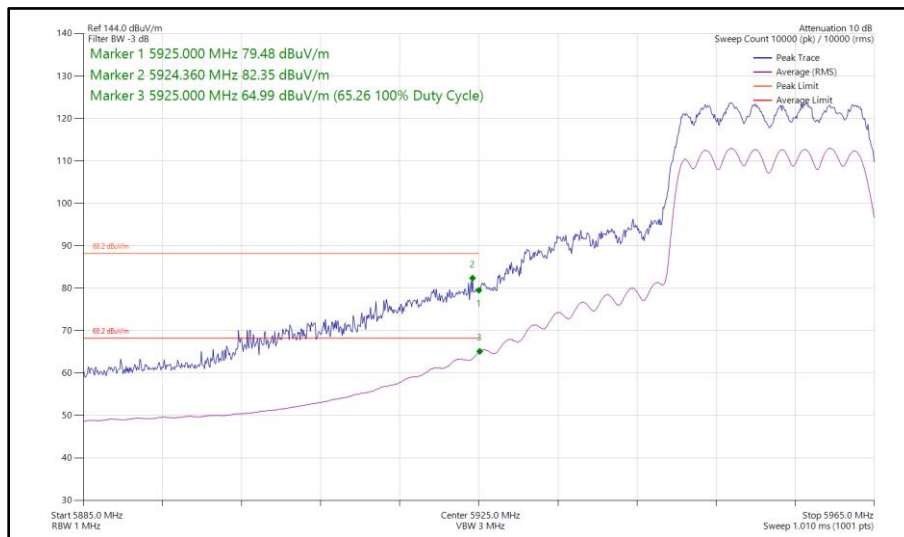



Figure 200 - 802.11ax HE20, SU, CDD, Core 0 - Core 1 - 5955 MHz Band Edge Frequency 5925 MHz

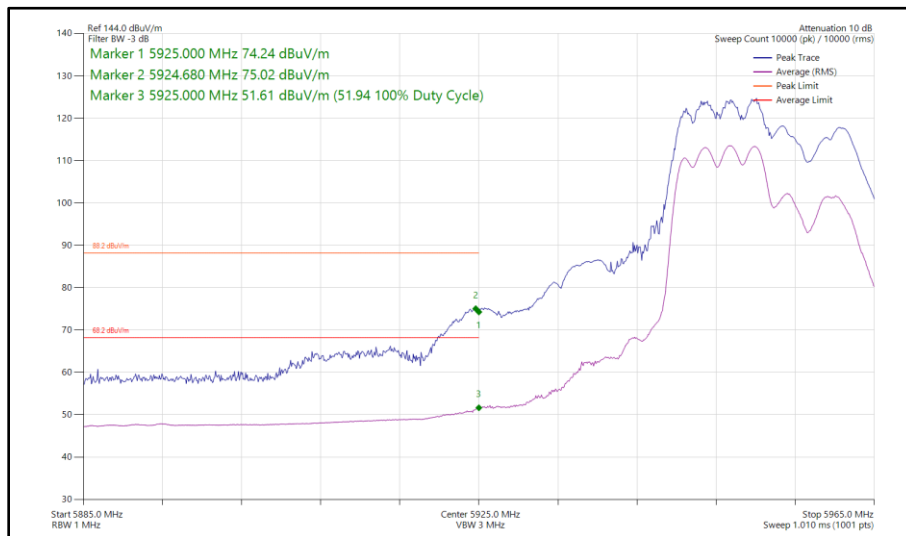


**Figure 201 - 802.11ax HE20, RU 106-53, CDD, Core 0 - Core 1 - 5955 MHz
Band Edge Frequency 5925 MHz**

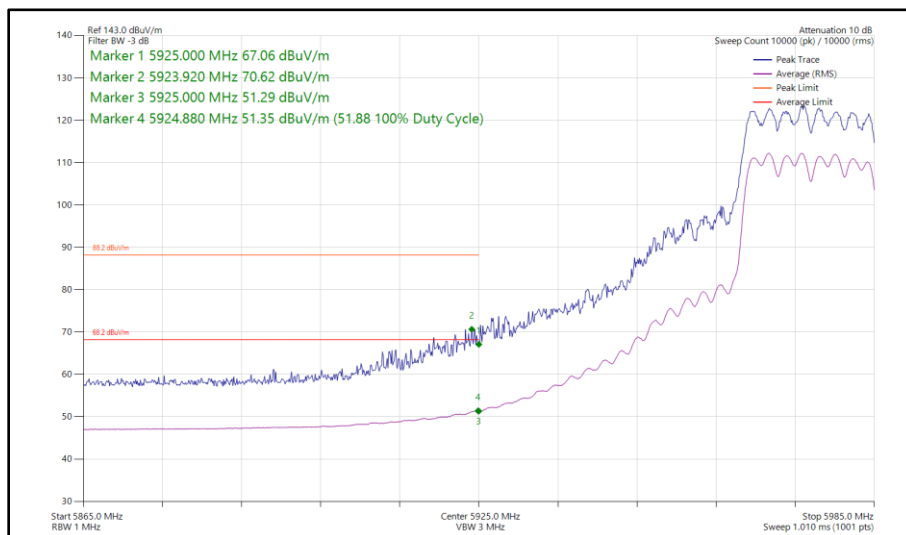


**Figure 202 - 802.11ax HE20, SU, CDD, Core 0 - Core 1 - 5975 MHz
Band Edge Frequency 5925 MHz**

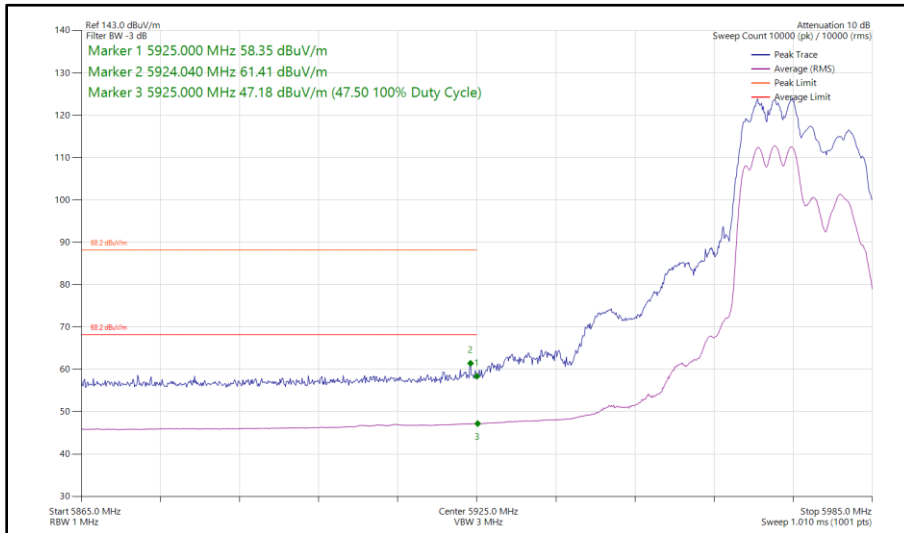

**Figure 203 - 802.11ax HE20, RU 106-53, CDD, Core 0 - Core 1 - 5975 MHz
Band Edge Frequency 5925 MHz**

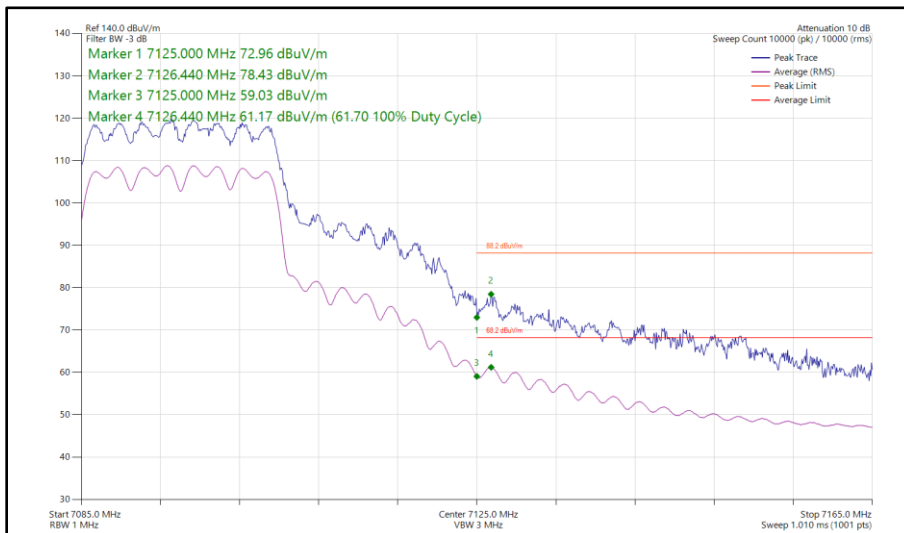

**Figure 204 - 802.11ax HE20, SU, CDD, Core 0 - Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**

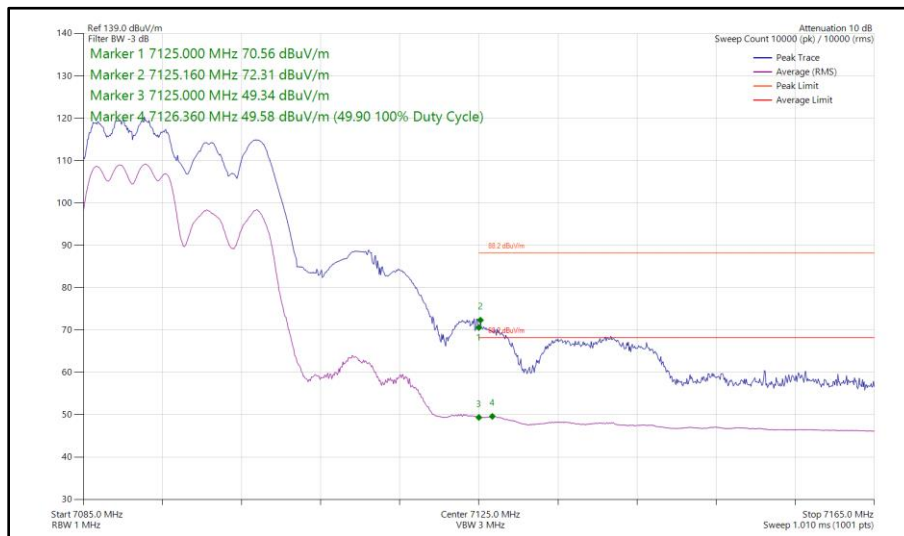

**Figure 205 - 802.11ax HE20, RU 106-53, CDD, Core 0 - Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**



20 MHz Bandwidth - Core 0 - Core 1 (SDM)

Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ax HE20	MCS 4x2	SU	-	5955	5925	79.36	64.35
802.11ax HE20	MCS 11x2	106	54	5955	5925	74.39	51.36
802.11ax HE20	MCS 4x2	SU	-	5975	5925	67.95	51.55
802.11ax HE20	MCS 11x2	106	53	5975	5925	60.07	47.44
802.11ax HE20	MCS 4x2	SU	-	7095	7125	74.77	61.84
802.11ax HE20	MCS 11x2	106	53	7095	7125	69.73	48.23

Table 235 - SDM Authorised Band Edge Results



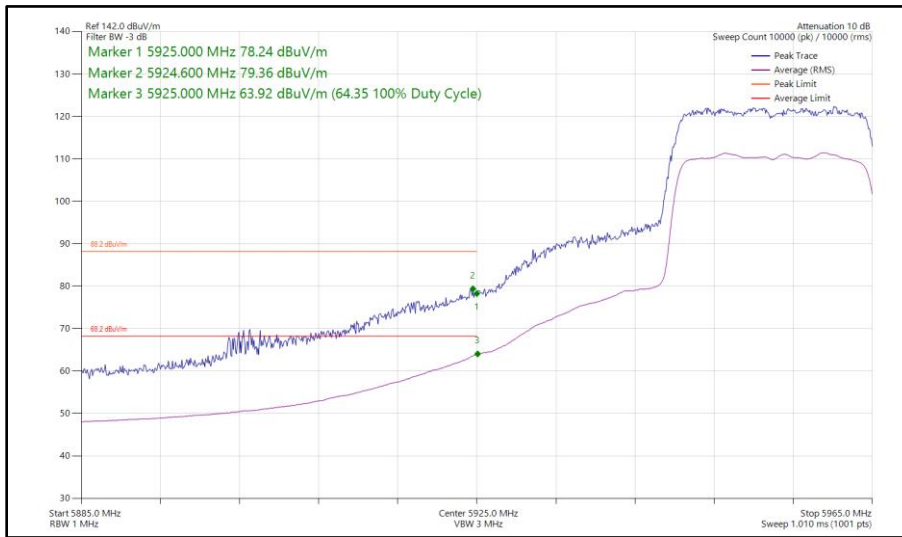



Figure 206 - 802.11ax HE20, SU, SDM, Core 0 - Core 1 - 5955 MHz Band Edge Frequency 5925 MHz

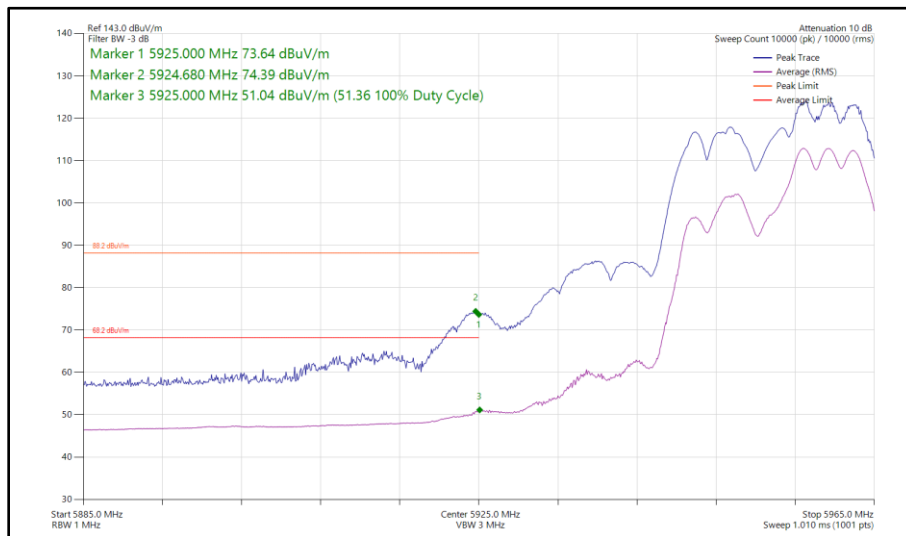


**Figure 207 - 802.11ax HE20, RU 106-54, SDM, Core 0 - Core 1 - 5955 MHz
Band Edge Frequency 5925 MHz**

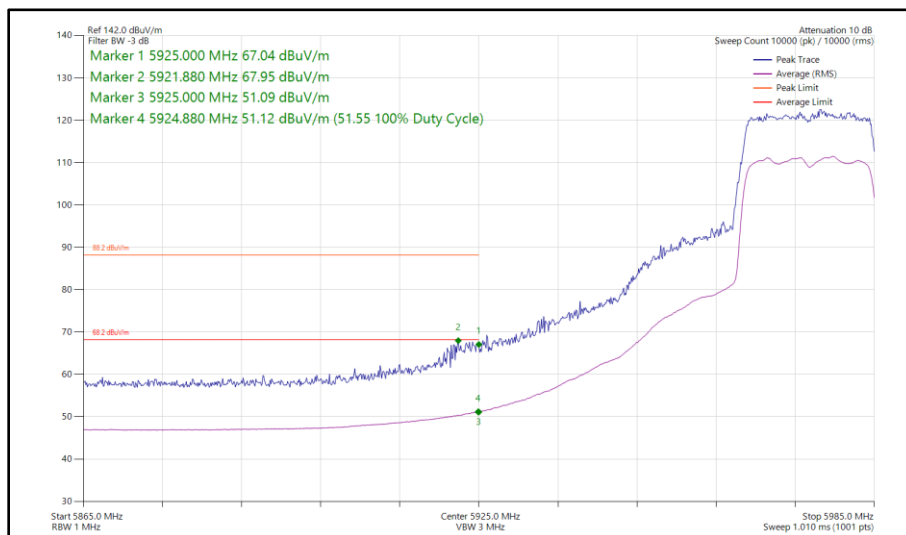


**Figure 208 - 802.11ax HE20, SU, SDM, Core 0 - Core 1 - 5975 MHz
Band Edge Frequency 5925 MHz**

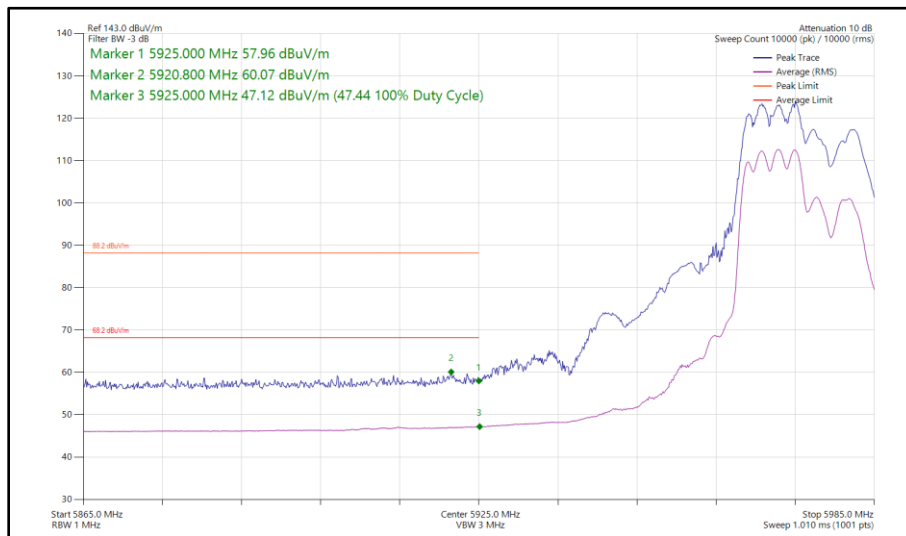

**Figure 209 - 802.11ax HE20, RU 106-53, SDM, Core 0 - Core 1 - 5975 MHz
Band Edge Frequency 5925 MHz**

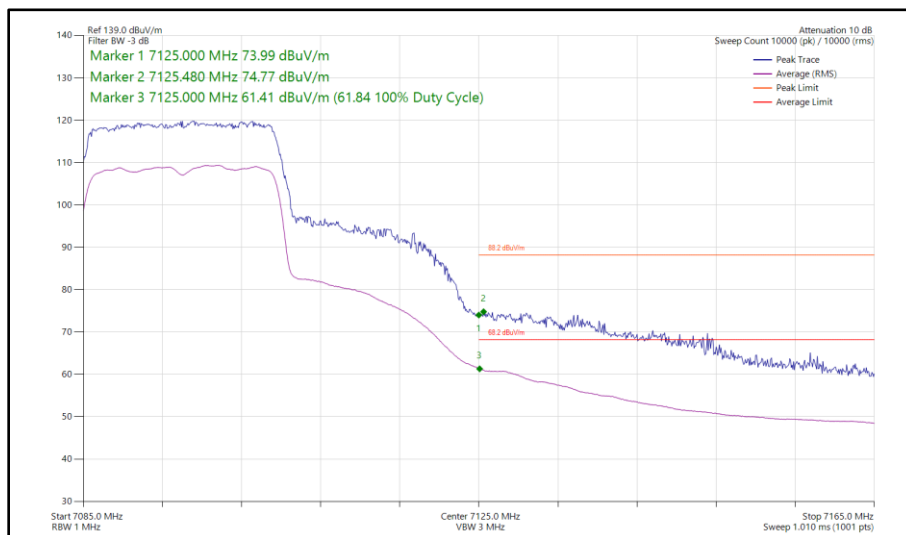

**Figure 210 - 802.11ax HE20, SU, SDM, Core 0 - Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**

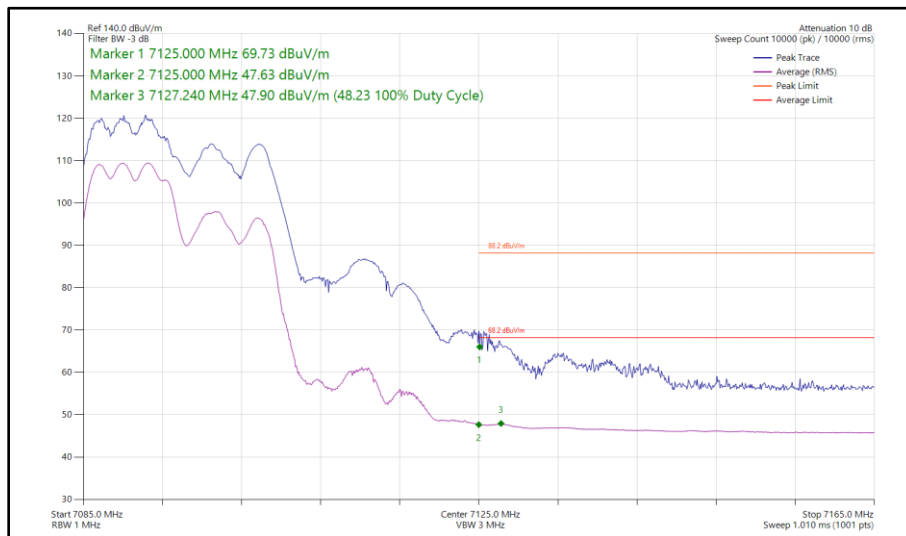

**Figure 211 - 802.11ax HE20, RU 106-53, SDM, Core 0 - Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**



20 MHz Bandwidth - Core 0 - Core 1 (TxBF)

Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ax HE20	MCS 4x1	SU	-	5955	5925	81.90	65.44
802.11ax HE20	MCS 11x1	SU	-	5975	5925	73.33	51.77
802.11ax HE20	MCS 11x1	SU	-	7075	7125	72.68	51.38
802.11ax HE20	MCS 11x1	SU	-	7095	7125	82.50	62.66

Table 236 - TxBF Authorised Band Edge Results

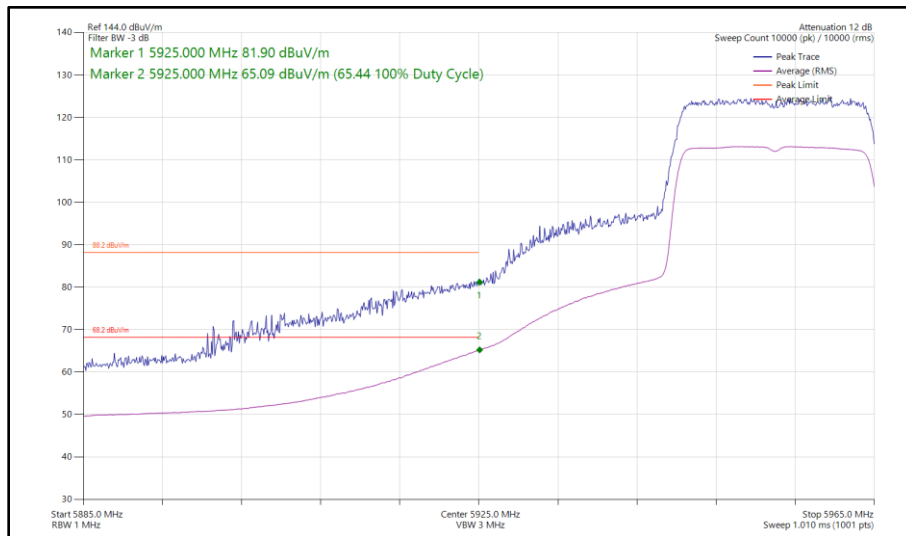


Figure 212 - 802.11ax HE20, SU, TxBF, Core 0 - Core 1 - 5955 MHz
 Band Edge Frequency 5925 MHz



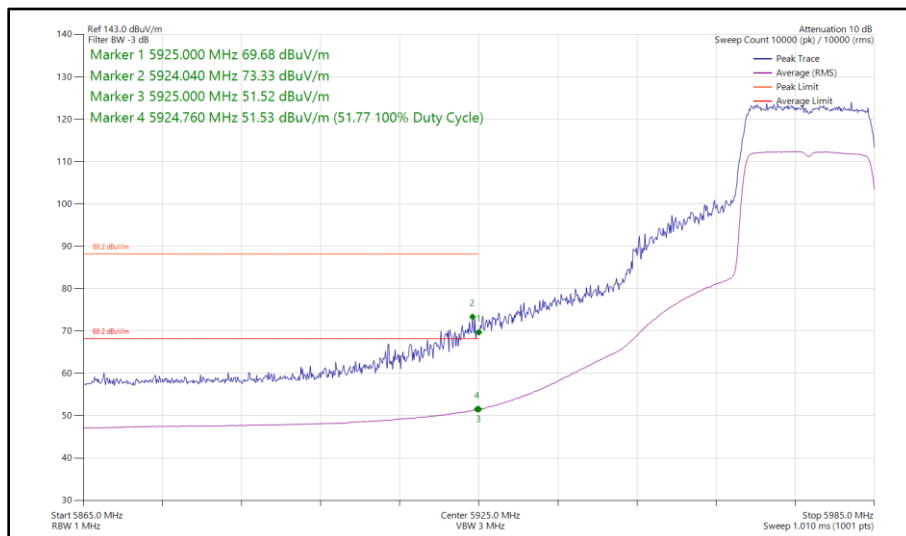


Figure 213 - 802.11ax HE20, SU, TxBF, Core 0 - Core 1 - 5975 MHz
 Band Edge Frequency 5925 MHz

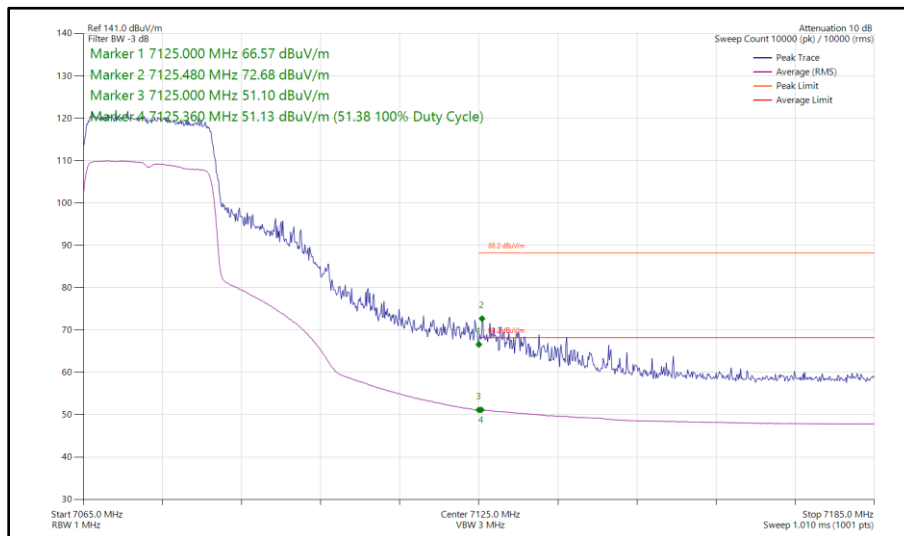

**Figure 214 - 802.11ax HE20, SU, TxBF, Core 0 - Core 1 - 7075 MHz
Band Edge Frequency 7125 MHz**

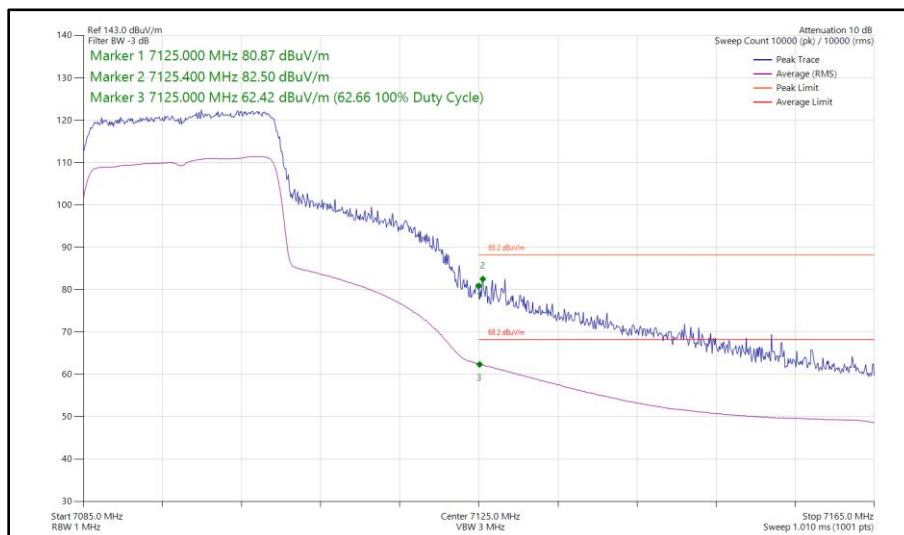

**Figure 215 - 802.11ax HE20, SU, TxBF, Core 0 - Core 1 - 7095 MHz
Band Edge Frequency 7125 MHz**



40 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ax HE40	MCS 4x1	SU	-	5965	5925	81.82	65.28
802.11ax HE40	MCS 11x1	106	56	5965	5925	58.44	45.49
802.11ax HE40	MCS 11x1	SU	-	6005	5925	66.16	50.33
802.11ax HE40	MCS 11x1	106	53	6005	5925	56.42	44.15
802.11ax HE40	MCS 4x1	SU	-	7045	7125	64.96	50.04
802.11ax HE40	MCS 11x1	106	56	7045	7125	57.41	46.14
802.11ax HE40	MCS 4x1	SU	-	7085	7125	64.03	48.33
802.11ax HE40	MCS 11x1	106	56	7085	7125	54.44	42.86

Table 237 - SISO Authorised Band Edge Results



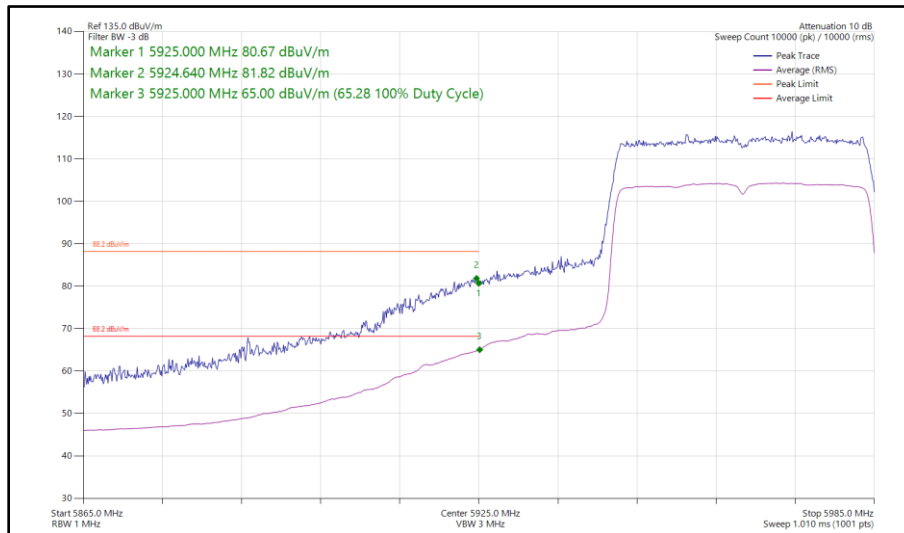



Figure 216 - 802.11ax HE40, SU, SISO, Core 0 - 5965 MHz Band Edge Frequency 5925 MHz

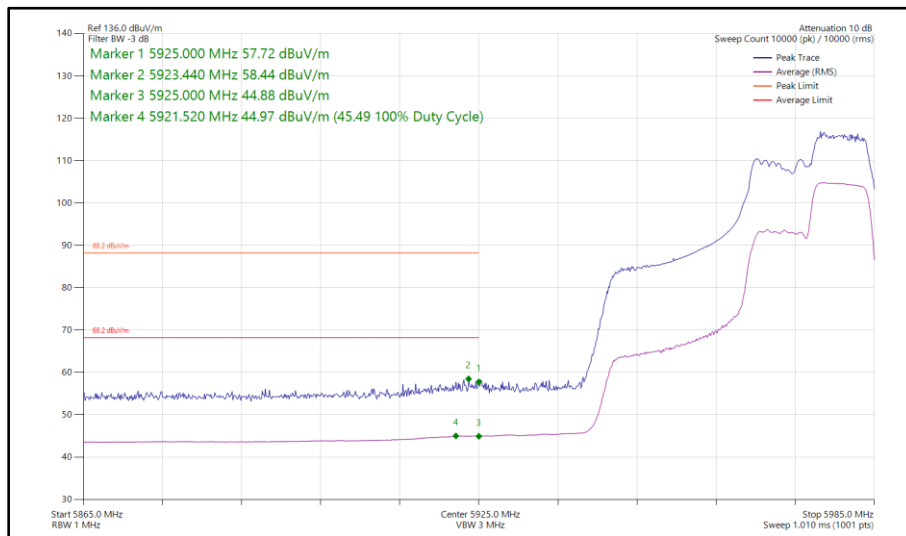


**Figure 217 - 802.11ax HE40, RU 106-56, SISO, Core 0 - 5965 MHz
Band Edge Frequency 5925 MHz**

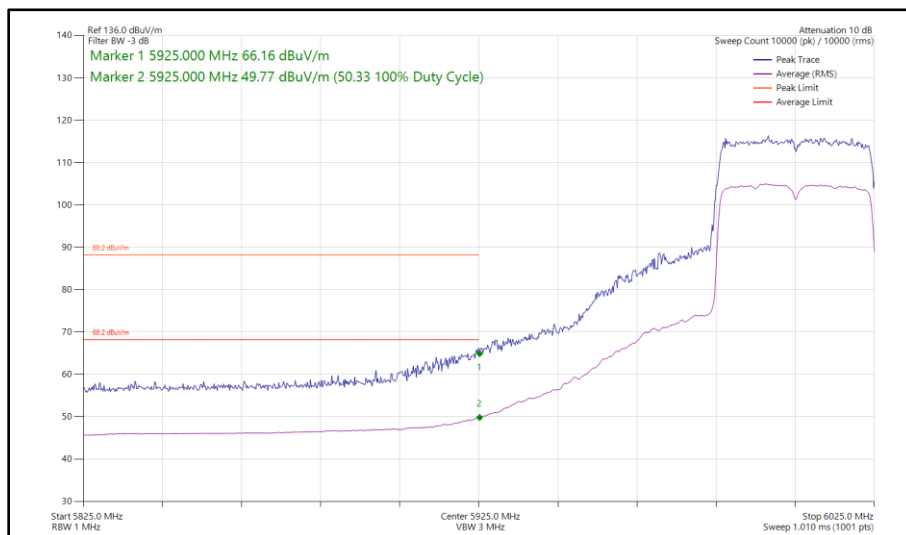


**Figure 218 - 802.11ax HE40, SU, SISO, Core 0 - 6005 MHz
Band Edge Frequency 5925 MHz**

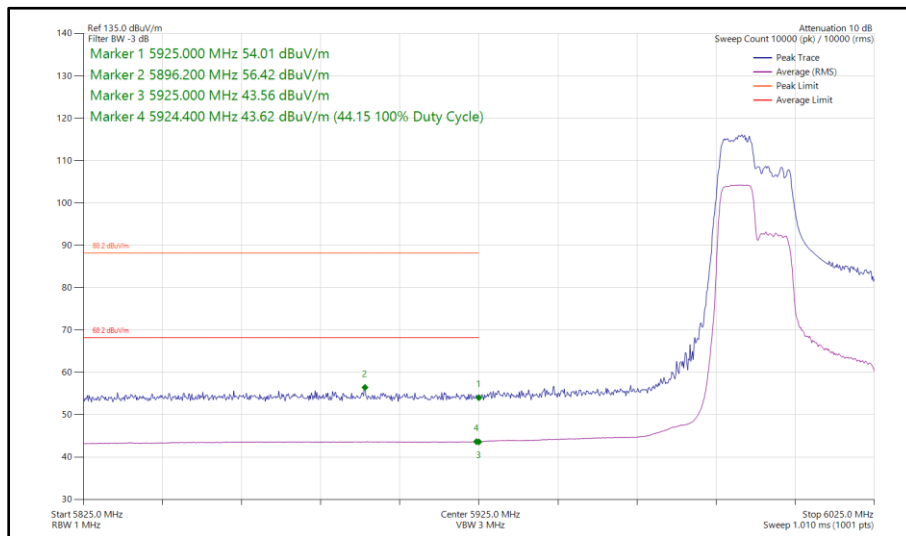


**Figure 219 - 802.11ax HE40, RU 106-53, SISO, Core 0 - 6005 MHz
Band Edge Frequency 5925 MHz**

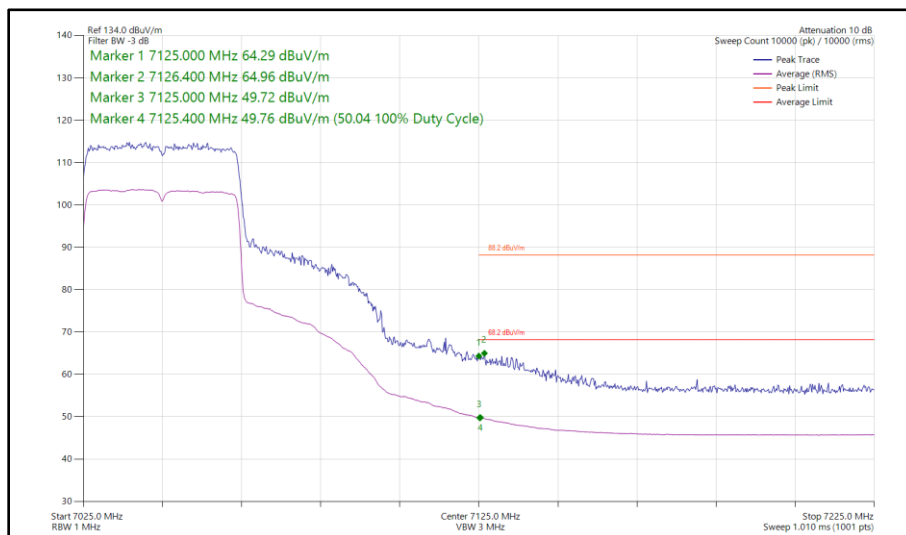


**Figure 220 - 802.11ax HE40, SU, SISO, Core 0 - 7045 MHz
Band Edge Frequency 7125 MHz**

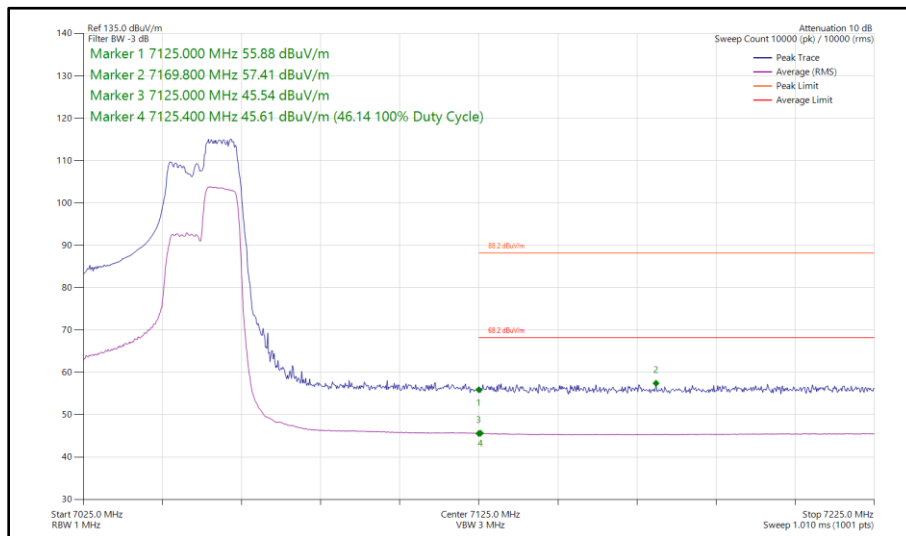

**Figure 221 - 802.11ax HE40, RU 106-56, SISO, Core 0 - 7045 MHz
Band Edge Frequency 7125 MHz**

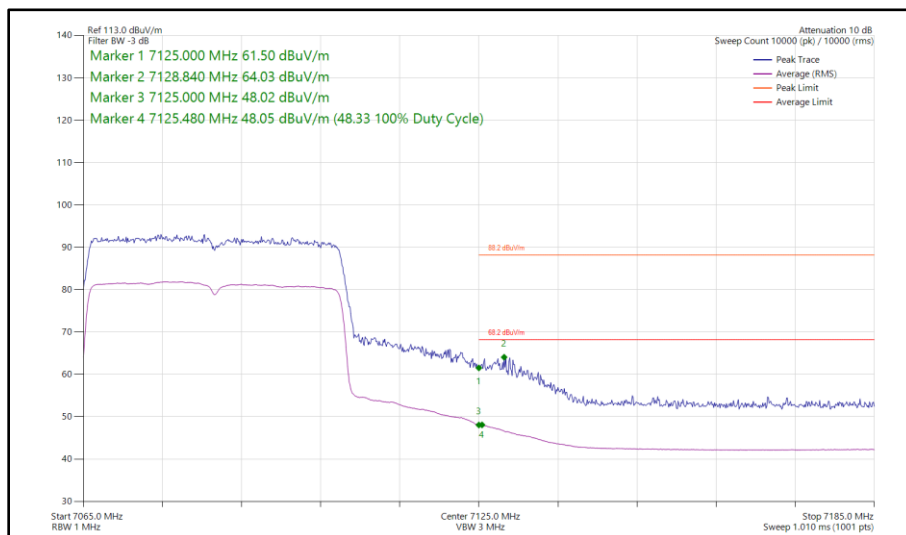

**Figure 222 - 802.11ax HE40, SU, SISO, Core 0 - 7085 MHz
Band Edge Frequency 7125 MHz**

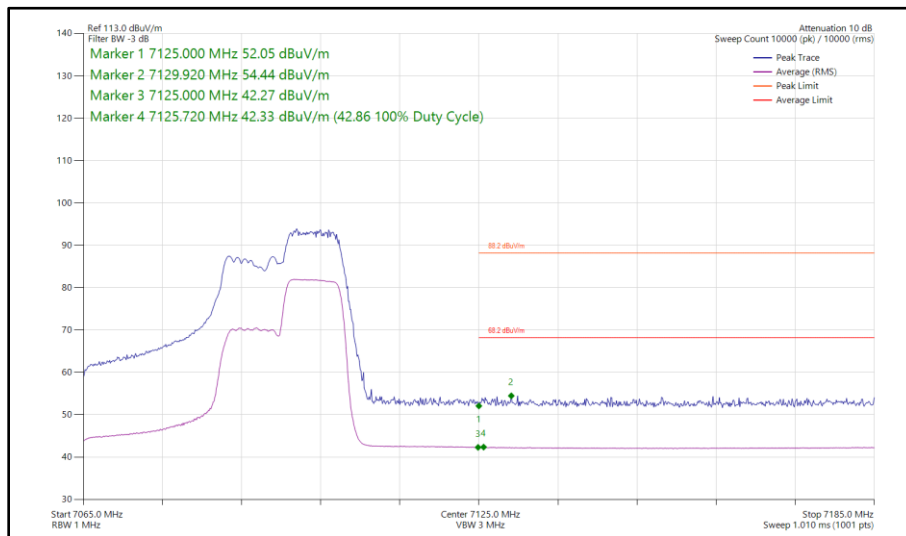

**Figure 223 - 802.11ax HE40, RU 106-56, SISO, Core 0 - 7085 MHz
Band Edge Frequency 7125 MHz**



40 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ax HE40	MCS 2x1	SU	-	5965	5925	80.82	65.13
802.11ax HE40	MCS 11x1	106	56	5965	5925	58.13	45.59
802.11ax HE40	MCS 11x1	SU	-	6005	5925	66.69	51.14
802.11ax HE40	MCS 11x1	106	56	6005	5925	56.11	44.38
802.11ax HE40	MCS 11x1	SU	-	7045	7125	68.62	53.96
802.11ax HE40	MCS 11x1	106	56	7045	7125	58.40	46.66
802.11ax HE40	MCS 4x1	SU	-	7085	7125	68.52	52.94
802.11ax HE40	MCS 11x1	26	0	7085	7125	74.35	51.59

Table 238 - SISO Authorised Band Edge Results



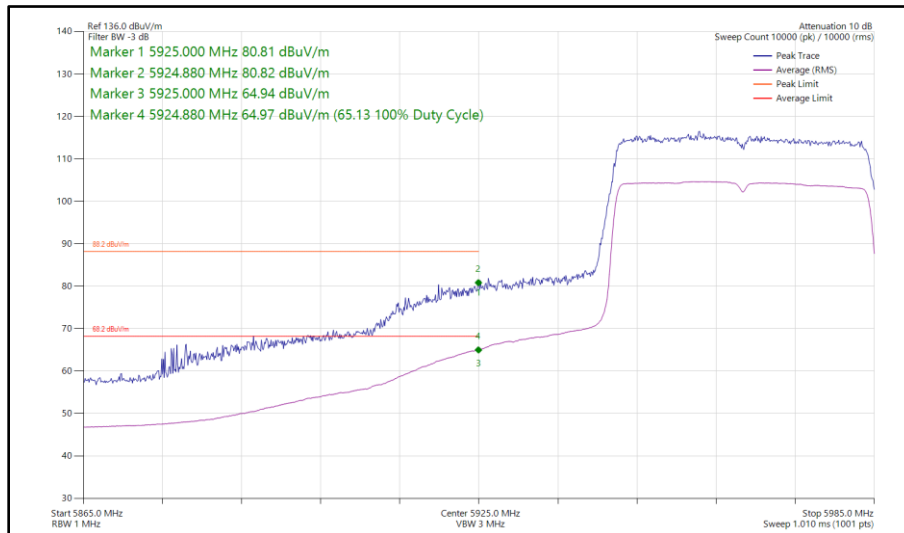


Figure 224 - 802.11ax HE40, SU, SISO, Core 1 - 5965 MHz
 Band Edge Frequency 5925 MHz

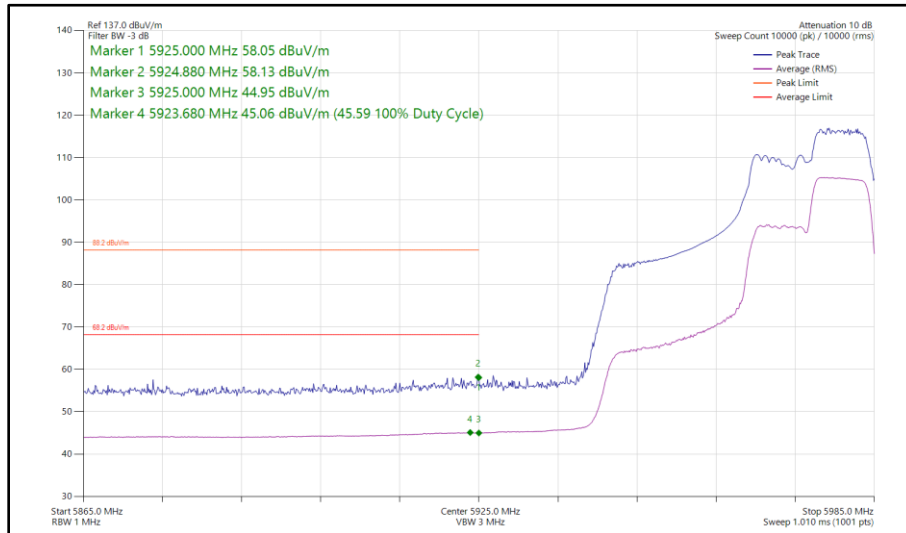

**Figure 225 - 802.11ax HE40, RU 106-56, SISO, Core 1 - 5965 MHz
Band Edge Frequency 5925 MHz**

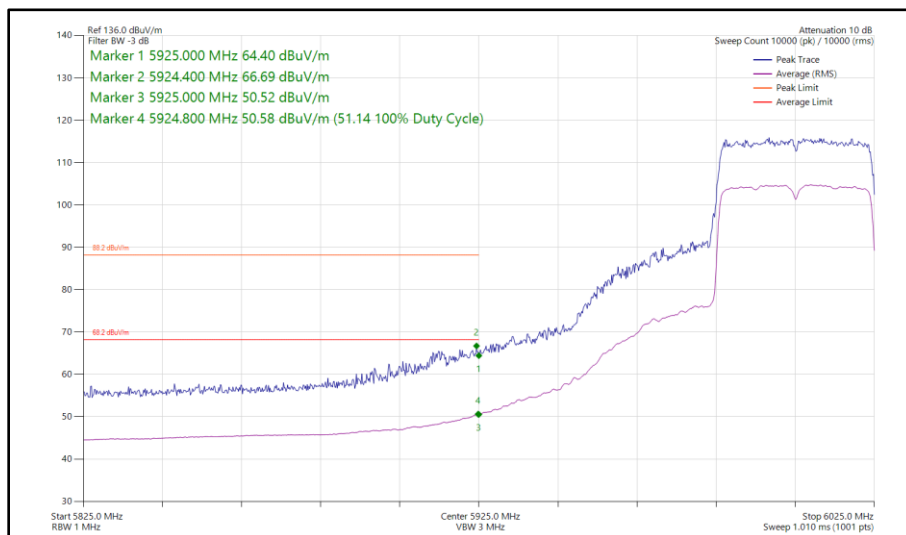

**Figure 226 - 802.11ax HE40, SU, SISO, Core 1 - 6005 MHz
Band Edge Frequency 5925 MHz**