



**Nemko Test Report:** 29941RUS1

**Applicant:** Andrew Corporation  
620 Greenfield Pkwy.  
Garner, NC 27529  
USA

**Equipment Under Test:  
(E.U.T.)** ION-M2m1

**FCC Identifier:** BCR-IONM2M1

**In Accordance With:** **CFR 47 Part 90, Subpart I**  
Private Land Mobile Repeater

**Tested By:** Nemko USA Inc.  
802 N. Kealy  
Lewisville, TX 75057-3136

**TESTED BY:**

A handwritten signature in black ink, appearing to read 'David Light'.

David Light, Senior Wireless Engineer

**DATE:** 09 July 2009

**APPROVED BY:**

A handwritten signature in blue ink, appearing to read 'Tom Tidwell'.

Tom Tidwell, Telecom Direct

**DATE:** 09 July 2009

**Number of Pages: 25**

## Table of Contents

Section 1. Summary of Test Results .....	3
Section 2. General Equipment Specification .....	5
Section 3. RF Power Output.....	7
Section 4. Occupied Bandwidth.....	8
Section 5. Spurious Emissions at Antenna Terminals .....	11
Section 6. Field Strength of Spurious Emissions.....	14
Section 7. Test Equipment List.....	15
ANNEX A - TEST METHODOLOGIES.....	16
ANNEX B - TEST DIAGRAMS .....	22

EQUIPMENT: M2m1

PROJECT NO.: 29941RUS1

---

**Section 1. Summary of Test Results**

Manufacturer: Andrew Corporation

Model No.: M2m1

Serial No.: 16

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with CFR Part 90, Subpart I.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

**Summary Of Test Data**

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	90.205	500 W	Complies
Occupied Bandwidth	90.210	Input/Output	Complies
Spurious Emissions at Antenna Terminals	90.210	Mask	Complies
Field Strength of Spurious Emissions	90.210	Mask	Complies
Frequency Stability	90.213	1 ppm	NA

**Footnotes For N/A's:**

- (1) Since the E.U.T. does not contain modulation circuitry modulation testing was not performed.
- (2) Since the E.U.T. is not a keyed carrier system, Transient Frequency Behavior was not performed.

## Section 2. General Equipment Specification


<b>Supply Voltage Input:</b>	120 Vac		
<b>Frequency Range:</b>	167.5225 to 168.8775 MHz		
<b>Type(s) of Modulation:</b>	<b>FSK</b> (F1D)		
<b>Output Impedance:</b>	50 ohms		
<b>RF Power Output (rated):</b>	$\frac{1.26}{31}$ W dBm		
<b>Operator Selection of Operating Frequency:</b>	None		
<b>Power Output Adjustment Capability:</b>	None		
<b>Frequency Translation:</b>		<b>F1-F1</b> <input checked="" type="checkbox"/>	<b>F1-F2</b> <input type="checkbox"/>
			<b>N/A</b> <input type="checkbox"/>
<b>Band Selection:</b>	<b>Set by manufacturer</b>		

## Description of EUT

The ION-M2m1 is a multi-operator Remote Unit used in conjunction with a Master Unit in the ION optical distribution system.

## System Diagram

ION-M2m1 Dallas Cowboys System Overview

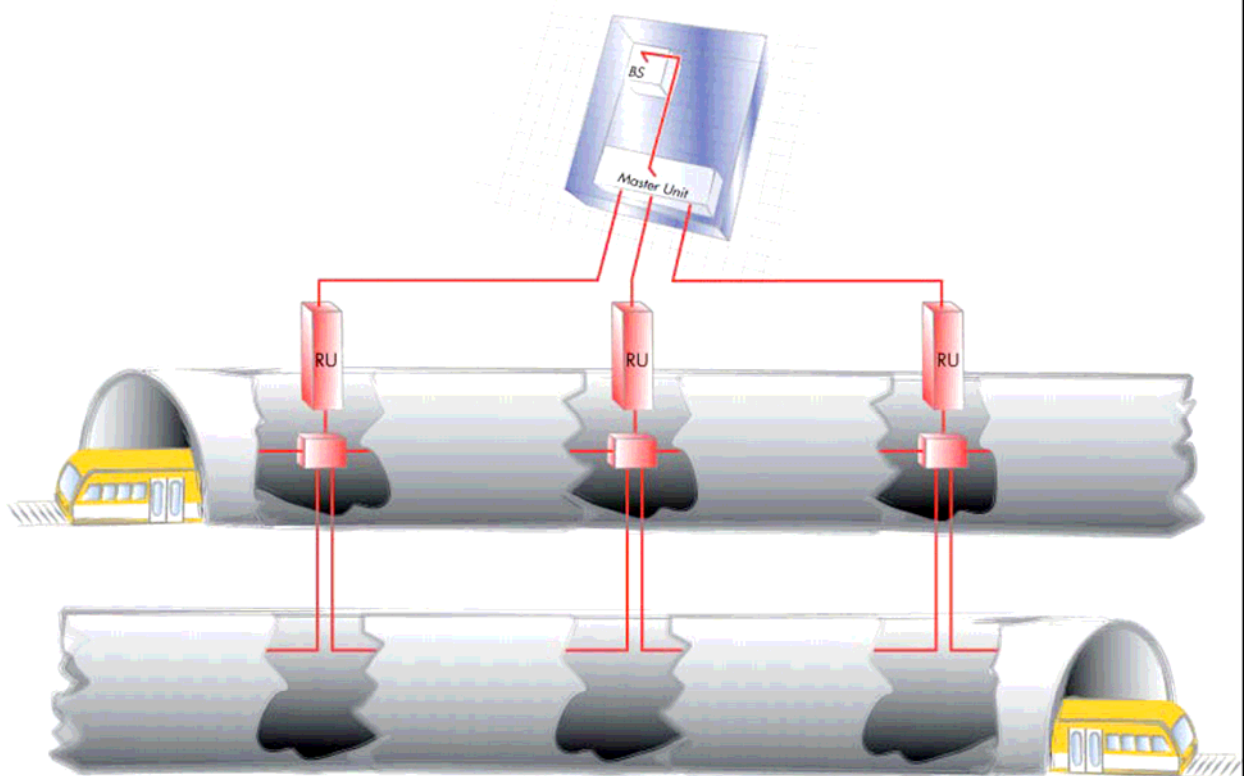

**Section 3. RF Power Output**

NAME OF TEST: RF Power Output	PARA. NO.: 2.985
TESTED BY: David Light	DATE: 09 July 2009

**Test Results:** Complies.**Measurement Data:**

Modulation	Output per Channel (dBm)	Composite Power (dBm)	Composite Power (W)
FSK	28	31	1.26

**Equipment Used:** 1036-1082-1604-1065**Measurement Uncertainty:** +/- 1.7 dB**Temperature:** 22 °C**Relative Humidity:** 35 %

**Section 4.      Occupied Bandwidth**

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.989
TESTED BY: David Light	DATE: 09 July 2009

**Test Results:**                      Complies.

**Test Data:**                        See attached plot(s).

**Equipment Used:**                1036-1082-1604-1065

**Measurement Uncertainty:**    1X10<sup>-7</sup> ppm

**Temperature:**                    22 °C

**Relative Humidity:**            35 %


# Test Data – Occupied Bandwidth

## Output



Ref Lvl  
40 dBm

RBW 300 Hz RF Att 20 dB  
VBW 300 Hz  
SWT 11.5 s Unit dBm

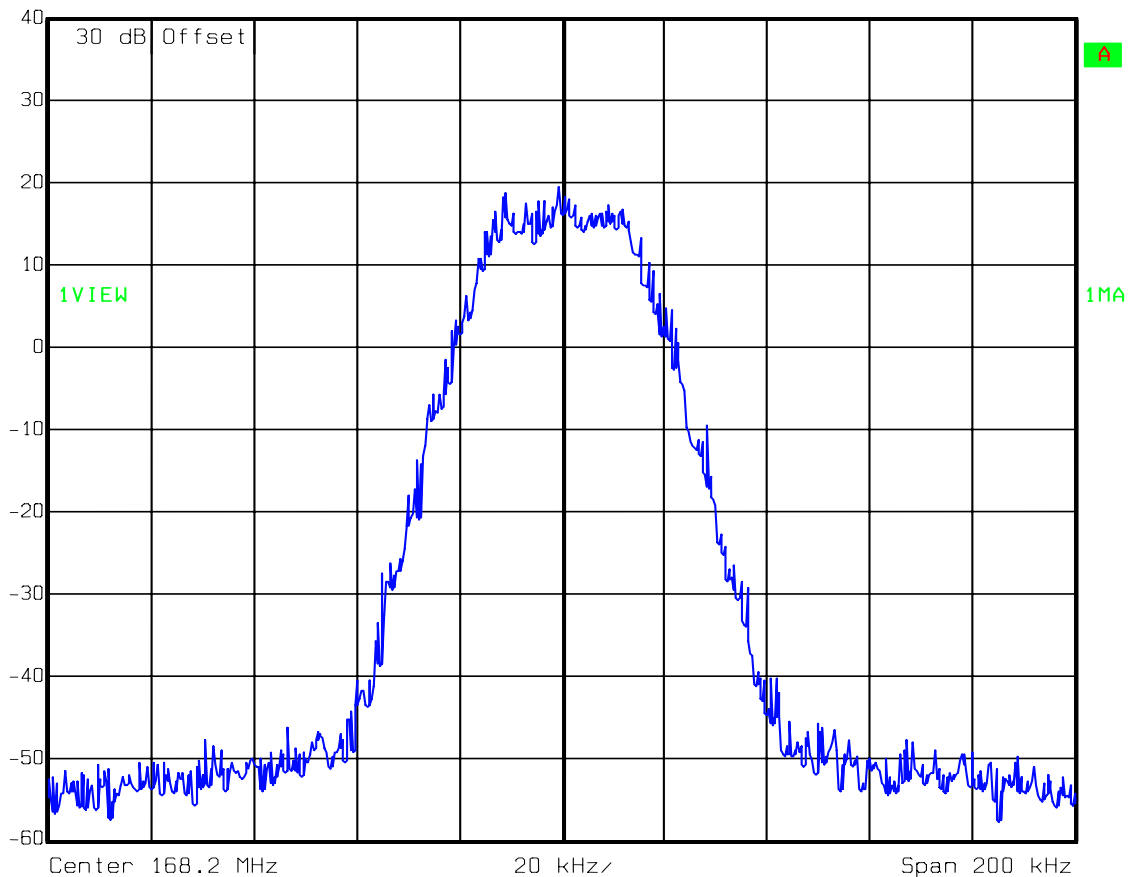

Date: 09.JUL.2009 09:32:24


# Test Data – Occupied Bandwidth

Input



Ref Lvl  
10 dBm

RBW	300 Hz	RF Att	20 dB
VBW	300 Hz		
SWT	11.5 s	Unit	dBm

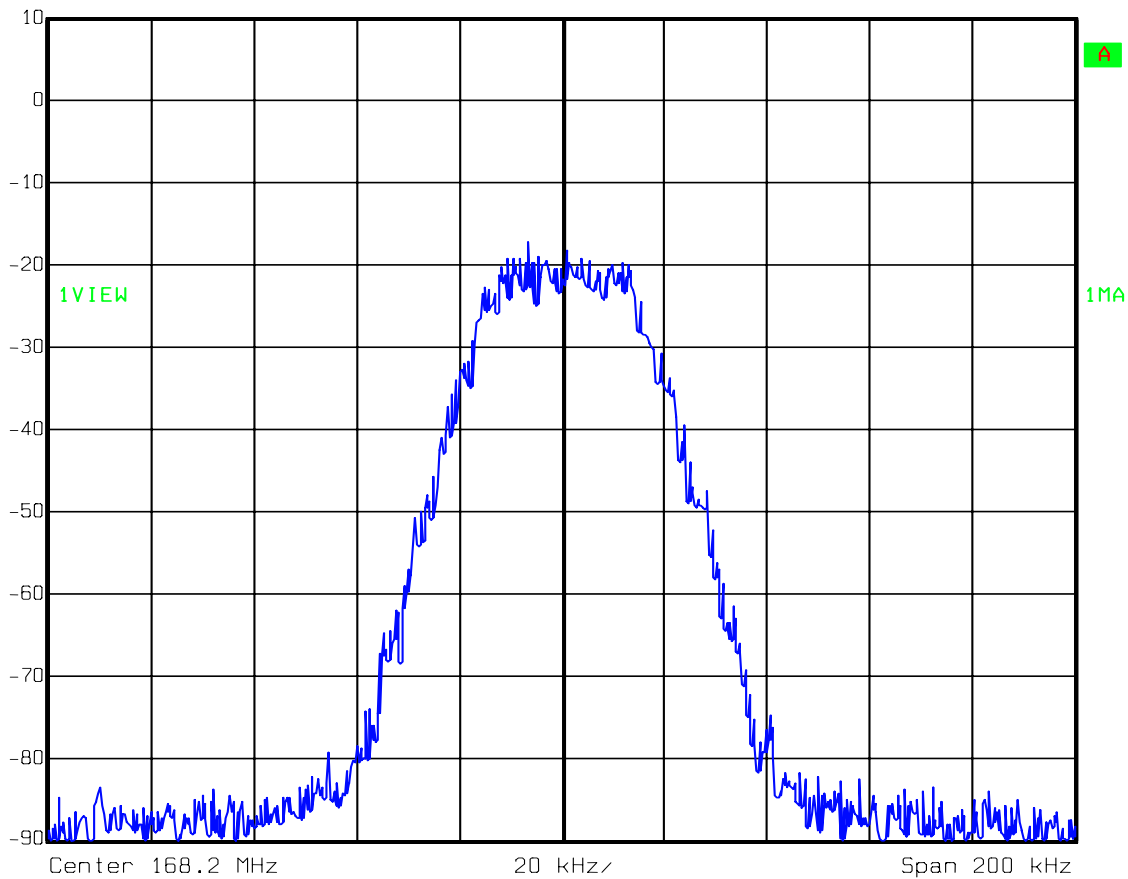

Date: 09.JUL.2009 09:33:47

## Section 5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.991
TESTED BY: David Light	DATE: 09 July 2009

**Test Results:** Complies.

**Test Data:** See attached plot(s).

**Equipment Used:** 1036-1082-1604-1065

**Measurement Uncertainty:** +/- 1.7 dB

**Temperature:** 22 °C

**Relative Humidity:** 35 %


**Test Data – Spurious Emissions at Antenna Terminals**

Upper and Lower Bandedge Intermodulation


Limits for Mask e applied

Frequency line 1 = 167.5225 MHz

Frequency line 2 = 168.8775 MHz

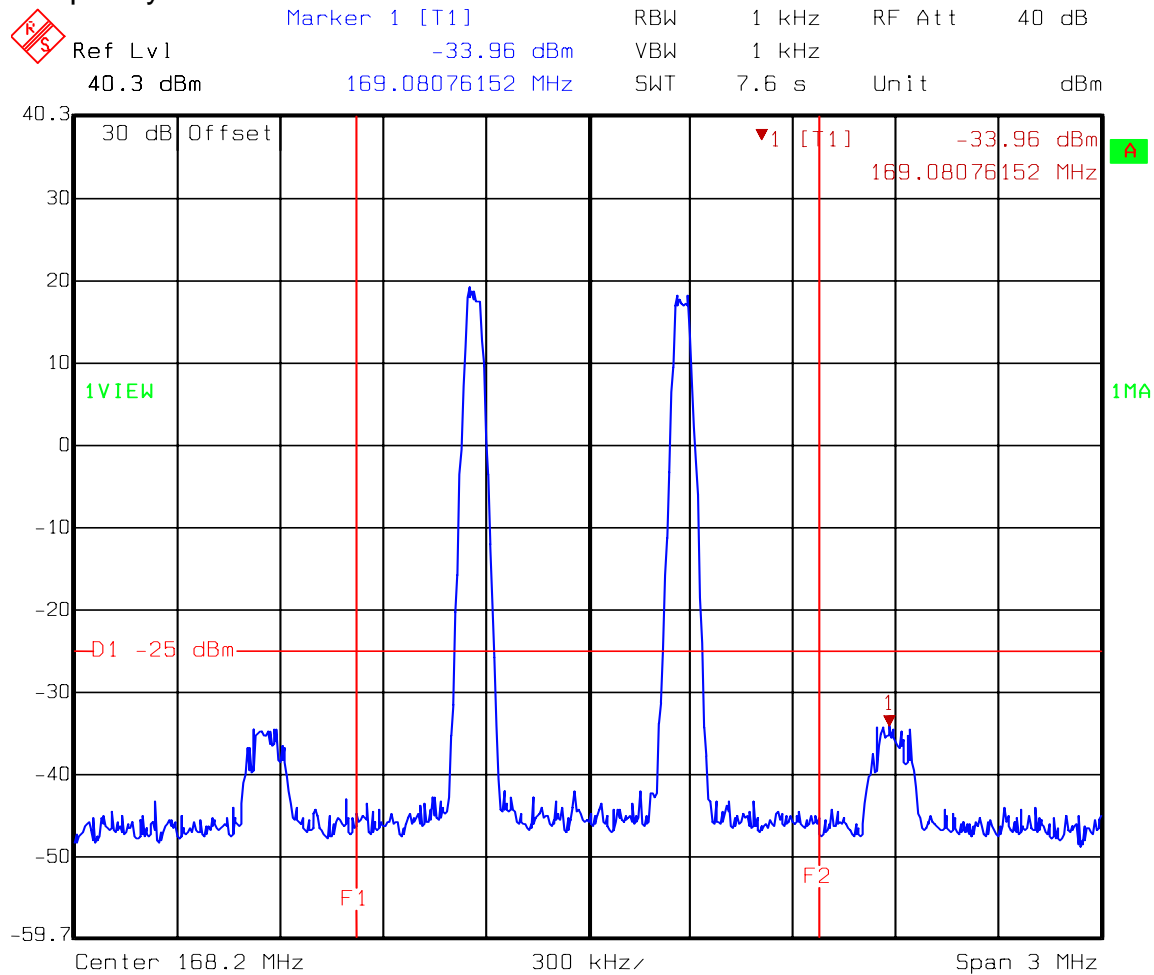

Date: 09.JUL.2009 08:58:57

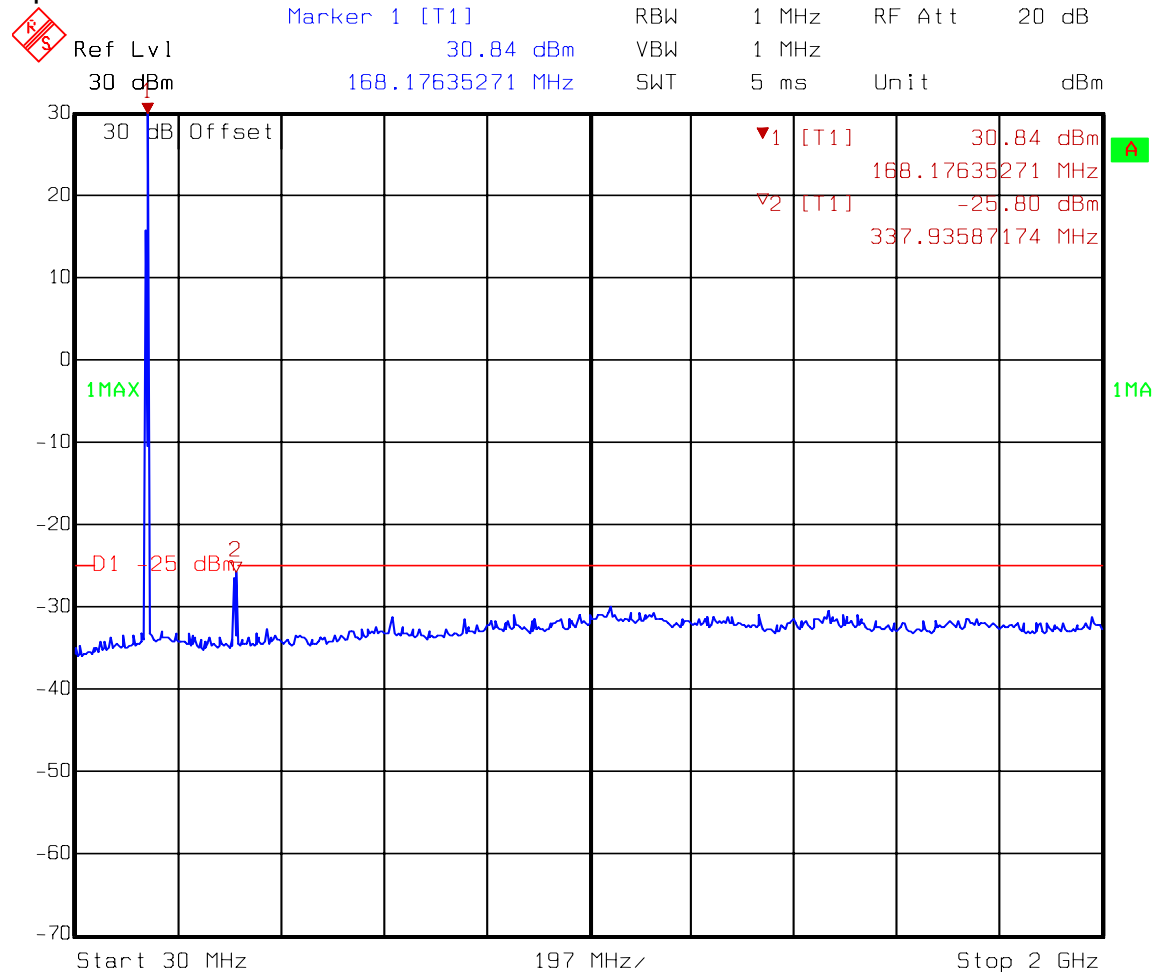**Test Data – Spurious Emissions at Antenna Terminals****Spurious Emissions**

Date: 09.JUL.2009 09:28:10

**Section 6. Field Strength of Spurious Emissions**

NAME OF TEST: Field Strength of Spurious Emissions	PARA. NO.: 2.993
TESTED BY: David Light	DATE: 09 July 2009

**Test Results:** Complies.**Test Data:** The spectrum was searched from 30 MHz to the tenth harmonic of the carrier. There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.

RBW=VBW=100 kHz below 1000 MHz

RBW=VBW=1 MHz above 1000 MHz

Peak detector

**Equipment Used:** 1763-1767-1484-1485-1785-1304**Measurement Uncertainty:** +/-1.7 dB**Temperature:** 22 °C**Relative Humidity:** 35 %**Note:** See page A5 for applicable limit.

**Section 7. Test Equipment List**

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1763	Bilog Antenna	Schaffner CBL 6111D	22926	11/04/08	11/04/09
1767	MI Test Receiver 20Hz - 26.5 GHz - 150 - +30 dBm LC	ROHDE & SCHWARZ ESIB26	837491/0002	09/20/07	09/20/09
1785	Preamplifier	A.H. SYSTEMS PAM-0126	143	04/06/09	04/06/10
1484	Cable	Storm PR90-010-072	N/A	06/23/09	06/23/10
1485	Cable	Storm PR90-010-216	N/A	06/23/09	06/23/10
1304	HORN ANTENNA	ELECTRO METRICS RGA-60	6151	09/09/08	09/10/10
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	01/19/09	01/20/11
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
1604	ATTENUATOR	NARDA 776B-20	NONE	N/A	N/A
1065	ATTENUATOR	NARDA 776B-10	NONE	CBU	N/A
1062	TUNABLE NOTCH FILTER	K&L 3TNF-250/500-N/N	81	CBU	N/A

## **ANNEX A - TEST METHODOLOGIES**

<b>NAME OF TEST: RF Power Output</b>	<b>PARA. NO.: 2.985</b>
--------------------------------------	-------------------------

**Minimum Standard:** Para. No. 90.205(a). The maximum allowable station ERP is dependent upon the stations HAAT and required service area and will be authorized in accordance with Table 1 of 90.205(d).

**Method Of Measurement:**

Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter. Power output is measured with the maximum rated input level.

Integral Antenna:

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

EQUIPMENT: M2m1

PROJECT NO.: 29941RUS1

**NAME OF TEST: Spurious Emissions at Antenna  
Terminals****PARA. NO.: 2.991****Minimum Standard:**

90.210, Table 1

**Table 1**

Frequency Band (MHz)	Mask for equipment with Low Pass Filter	Mask for equipment without Low Pass Filter
Below 25	A or B	A or C
25 - 50	B	C
72 - 76	B	C
150 - 174	B, D or E	C, D or E
150 Paging only	B	C
220 - 222	F	F
421 - 512	B, D or E	C, D or E
450 paging only	B	H
806 - 821/ 851 - 866	B	G
821 - 824/ 866 - 869	B	H
896 - 901/ 935 - 940	I	J
902 - 928	K	K
929 - 930	B	G
Above 940	B	C
All other bands	B	C

MASK	Spurious Limit
A,B,C,G,H,I	-13dBm
D,J	-20dBm
E,F,K	-25dBm

**Test Method:**

RBW: 1% of emission bandwidth in the 0 - 1 GHz range.  
 1 MHz at frequencies above 1 GHz.  
 VBW: ⇒ RBW

The spectrum is searched up to 10 times the fundamental frequency.

*EQUIPMENT: M2m1*

PROJECT NO.: 29941RUS1

---

<b>NAME OF TEST: Occupied Bandwidth</b>	<b>PARA. NO.: 2.989</b>
---	-------------------------

**Minimum Standard:** Not defined. Input/Output

**Method Of Measurement:**

Analog

Spectrum analyzer settings:

RBW=VBW=300 Hz

Span: 100 kHz

Sweep: Auto

iDEN

RBW=VBW= 300 Hz

Span: 100 kHz

Sweep: Auto

**NAME OF TEST: Field Strength of Spurious****PARA. NO.: 2.993****Minimum Standard:** Para. No. 90.210, see table 1 for applicable mask.**Method Of Measurement:** TIA/EIA-603-1992

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic radiator.

<b>MASK</b>	<b>Spurious Limit</b>
A,B,C,G,H,I	-13dBm
D,J	-20dBm
E,F,K	-25dBm

**NAME OF TEST: Frequency Stability****PARA. NO.: 2.995**

**Minimum Standard:** Para. No. 990.213. The transmitter carrier frequency shall remain


within the assigned frequency below in ppm.

**Table 2**


Frequency Band (MHz)	Fixed And Base Stations	Mobile Stations	
		> 2 Watts o/p pwr	< 2 Watts o/p pwr
Below 25	100	100	200
25 - 50	20	20	50
72 - 76	5	-	50
150 - 174	5	5	5
220 - 222	0.1	1.5	1.5
421 - 512	2.5	5	5
806 - 821	1.5	2.5	2.5
821 - 824	1.0	1.5	15
851 - 866	1.5	2.5	2.5
866 - 869	1.0	1.5	1.5
869 - 901	0.1	1.5	1.5
902 - 928	2.5	2.5	2.5
929 - 930	1.5	-	-
935 - 940	0.1	1.5	1.5
1427 - 1435	300	300	300
Above 2450	-	-	-

## **ANNEX B - TEST DIAGRAMS**


**Para. No. 2.985 - R.F. Power Output**

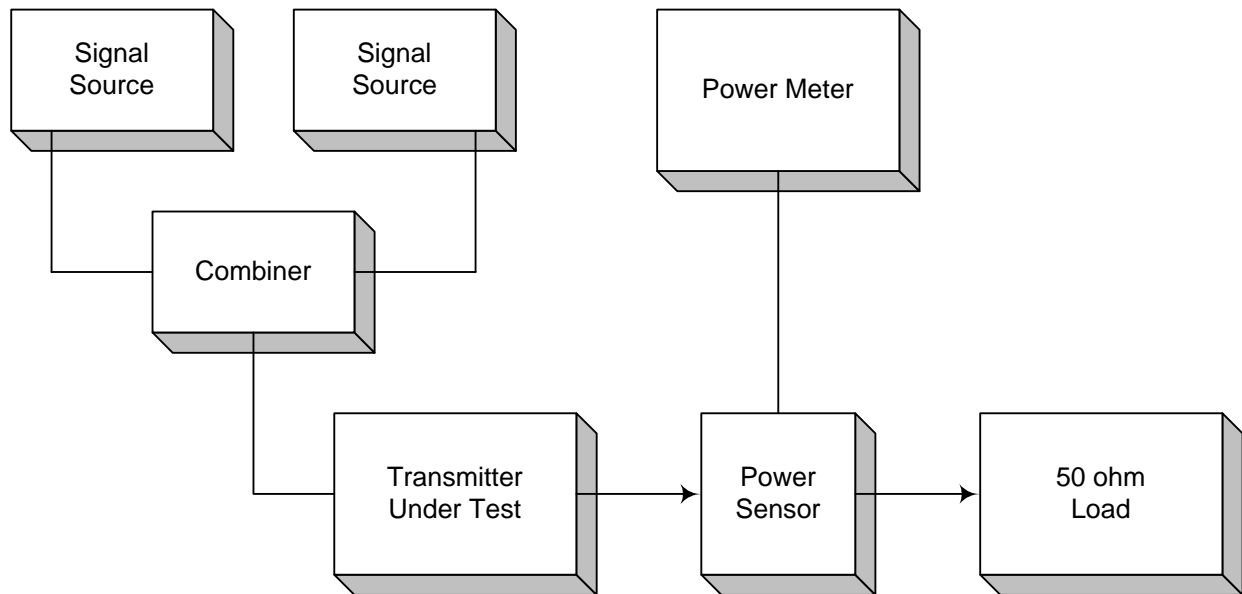


**Para. No. 2.989 - Occupied Bandwidth**

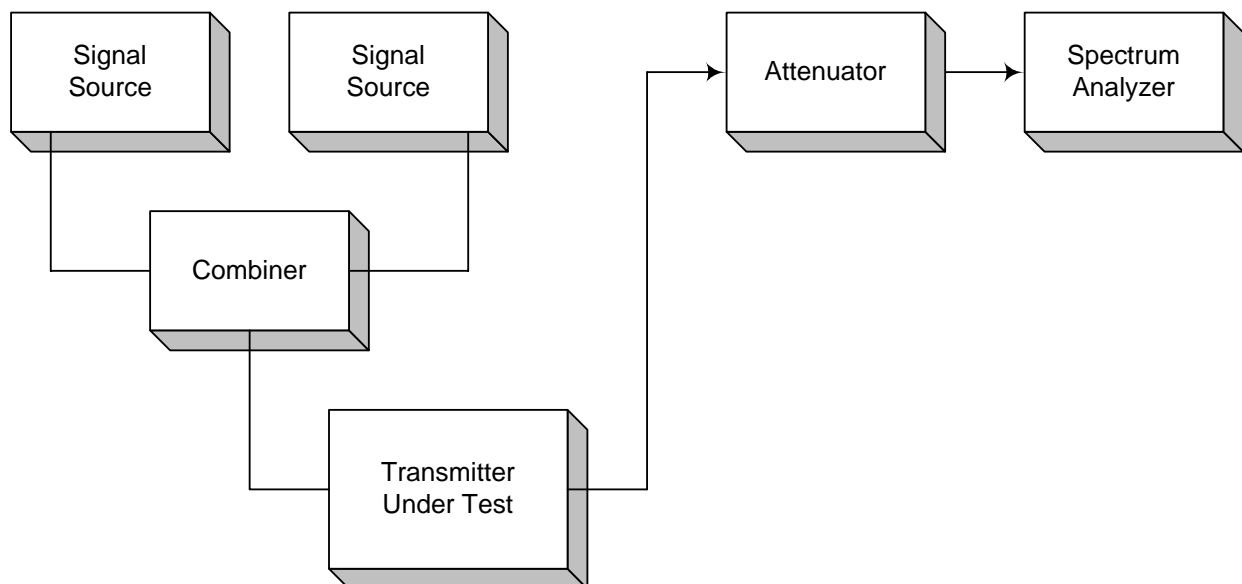

**Para. No. 2.991 - Spurious Emissions at Antenna Terminals**

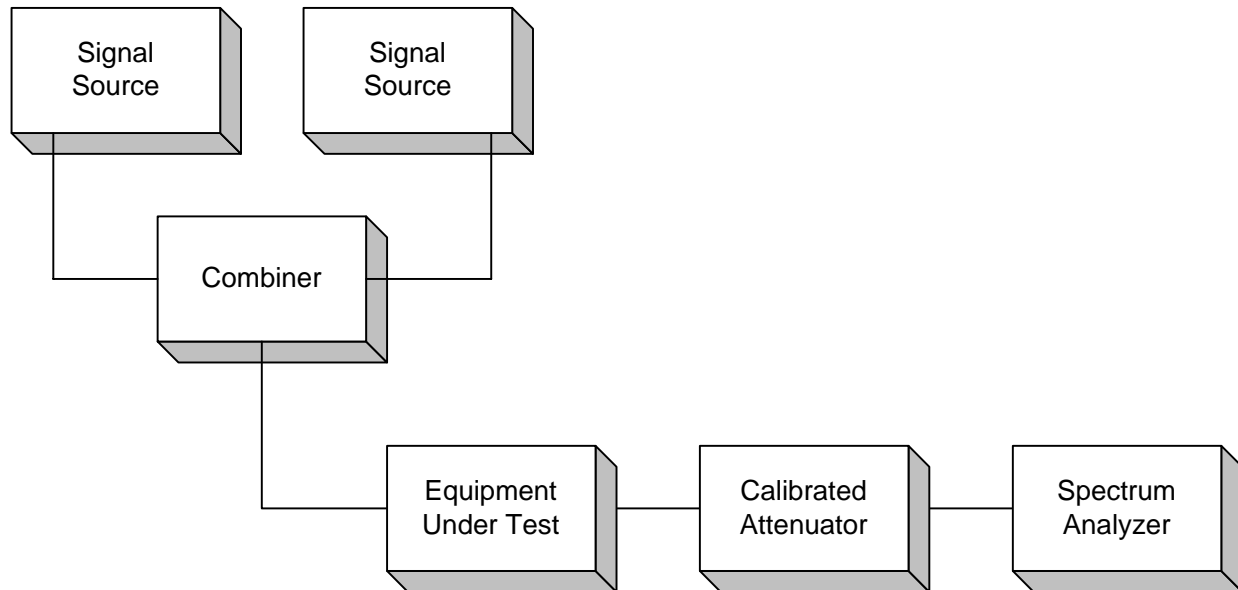

**Para. No. 2.993 - Field Strength of Spurious Radiation**

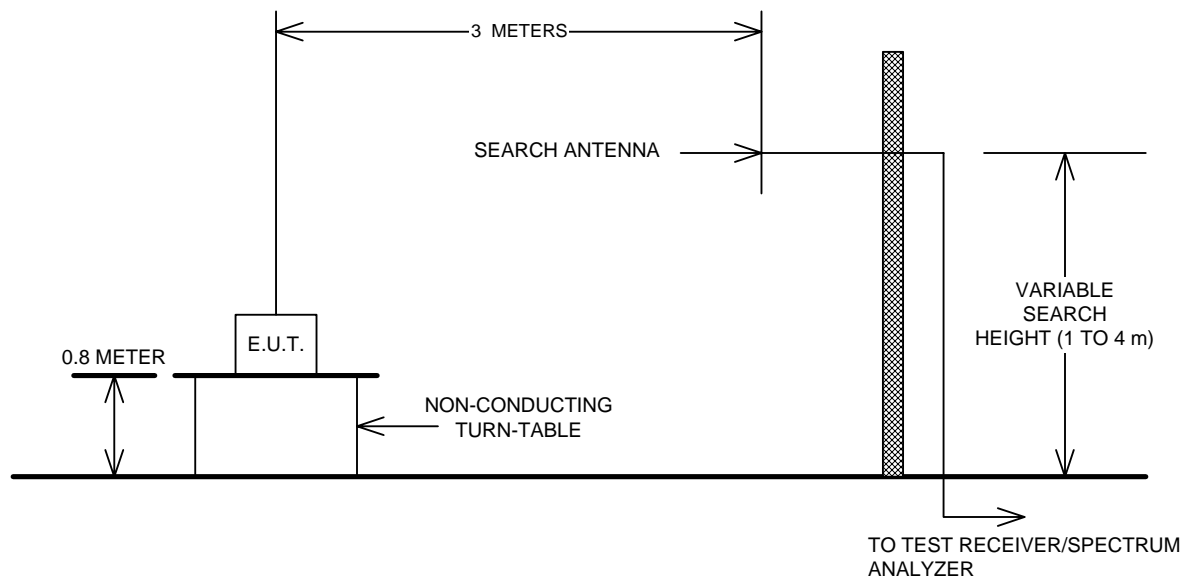

**Para. No. 2.995 - Frequency Stability**

