

# TEST REPORT

FCC/ISED BT LE Test for LAIWB3

**APPLICANT**

LG Electronics Inc.

**REPORT NO.**

HCT-RF-2207-FI002-R1

**DATE OF ISSUE**

July 22, 2022

**Tested by**  
Kyung Jun Woo

**Technical Manager**  
Seul Ki Lee

**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

<h1 style="margin: 0;">TEST REPORT</h1> <p style="margin: 0; font-weight: normal;">FCC/ISED BT LE Test for LAIWB3</p>	<p><b>REPORT NO.</b> HCT-RF-2207-FI002-R1</p> <p><b>DATE OF ISSUE</b> July 22, 2022</p> <p><b>Additional Model</b> -</p>
---	--

<b>Applicant</b>	<p><b>LG Electronics Inc.</b> 170, Seongsanpaechong-ro, Seongsan-gu, Changwon-si Gyeongsangnam-do 51533 Republic of Korea</p>
------------------	---

<b>Eut Type</b>	RF Module
<b>Model Name</b>	LAIWB3
<b>FCC ID</b>	BEJ-LAIWB3
<b>IC</b>	2703N-LAIWB3
<b>Max. RF Output Power</b>	7.639 dBm (5.81 mW)
<b>Modulation type</b>	GFSK
<b>FCC Classification</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s)</b>	Part 15.247
<b>ISED Rule Part(s)</b>	RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 14, 2022	Initial Release
1	July 22, 2022	Added Powerline Conducted Emissions Data Page 2, Revised(Applicant) Page 5, Revised(Date(s) of Tests, Factory) Page 29, Revised AC Power line Conducted Emissions

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

If this report is required to confirmation of authenticity, please contact to [www.hct.co.kr](http://www.hct.co.kr)

## CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	30
9.1 DUTY CYCLE	30
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	32
9.3 OUTPUT POWER	38
9.4 POWER SPECTRAL DENSITY	39
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	42
9.6 RADIATED SPURIOUS EMISSIONS	51
9.7 RADIATED RESTRICTED BAND EDGES	55
9.8 RECEIVER SPURIOUS EMISSIONS	57
9.9 POWERLINE CONDUCTED EMISSIONS	58
10. LIST OF TEST EQUIPMENT	62
11. ANNEX A_ TEST SETUP PHOTO	64

## 1. EUT DESCRIPTION

Model	LAIWB3	
Additional Model	-	
EUT Type	RF Module	
Power Supply	DC 12.0 V	
Frequency Range	2 402 MHz – 2 480 MHz	
Max. RF Output Power	Peak	1M Bit/s : 7.639 dBm (5.81 mW)
	Average	1M Bit/s : 7.21 dBm (5.26 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	WIFI Pattern Antenna Peak Gain : 2.6 dBi	
Date(s) of Tests	June 24, 2022 ~ July 07, 2022 Powerline Conducted Emissions Data, July 21, 2022	
PMN (Product Marketing Number)	RF Module	
HVIN (Hardware Version Identification Number)	LAIWB3	
FVIN (Firmware Version Identification Number)	V1.0	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	Radiated : 068429 Conducted : 060288	
Factory	BEACO I&C Beacon I&C, 82-1 Anyangcheondong-ro, Dongan-gu, Anyang-si, Gyeonggi-do Republic of Korea	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

### According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.



## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.48 ( Confidence level about 95 %, $k=2$ )

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

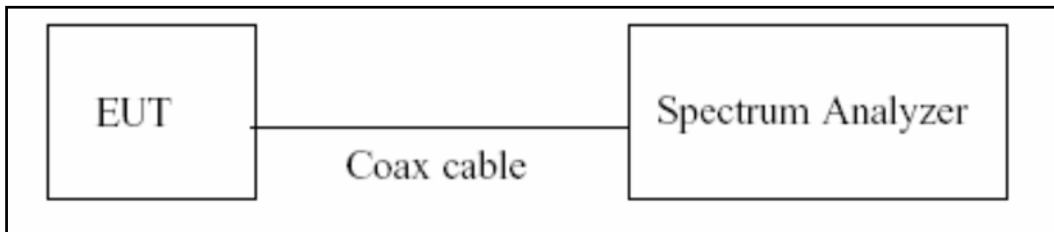

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/Duty\ Cycle)$

## 7.2. 6dB Bandwidth & 99 % Bandwidth(ISED)

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Detector = Peak
- 4) Trace mode = Max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

### Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1 % ~ 5 % of the occupied bandwidth

VBW  $\approx$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Measured Level + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Level + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = Max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Sample Calculation

- Power Spectral Density = Measured Level + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 20 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = Max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq$  2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	10.27
100	10.33
200	10.34
300	10.36
400	10.40
500	10.59
600	10.60
700	10.62
800	10.65
900	10.66
1 000	10.67
2 000	10.76
2 400	<b>10.82</b>
2 480	<b>10.82</b>
2 500	10.83
3 000	11.05
4 000	11.11
5 000	11.55
5 150	11.74
5 850	11.74
6 000	11.80
7 000	11.82
8 000	11.85
9 000	11.90
10 000	12.03
11 000	12.09
12 000	12.11
13 000	12.17
14 000	12.20
15 000	12.22
16 000	12.31
17 000	12.50
18 000	12.64
19 000	12.56
20 000	12.23
21 000	12.36
22 000	12.35
23 000	12.32
24 000	12.37
25 000	12.48
26 000	12.51

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss

## 7.6. Radiated Test

### Limit

#### FCC

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

#### ISED

Frequency (MHz)	Field Strength ( $\mu\text{A}/\text{m}$ )	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30


#### FCC&ISED

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3




**Test Configuration**


Below 30 MHz

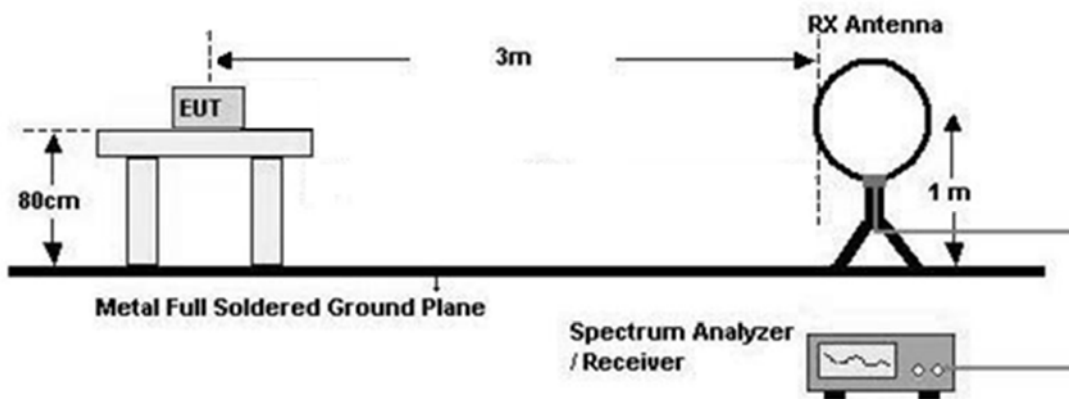

30 MHz - 1 GHz

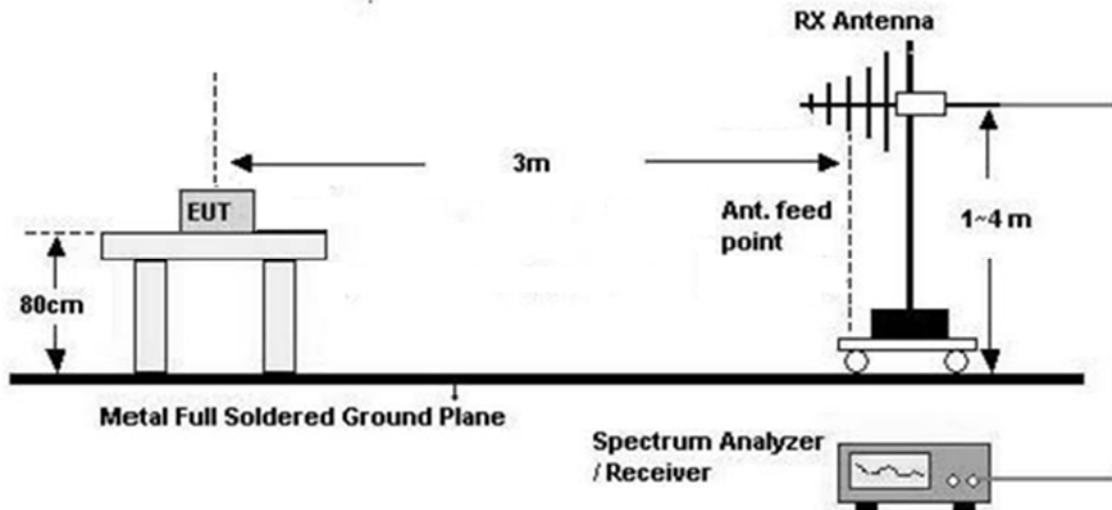

Above 1 GHz

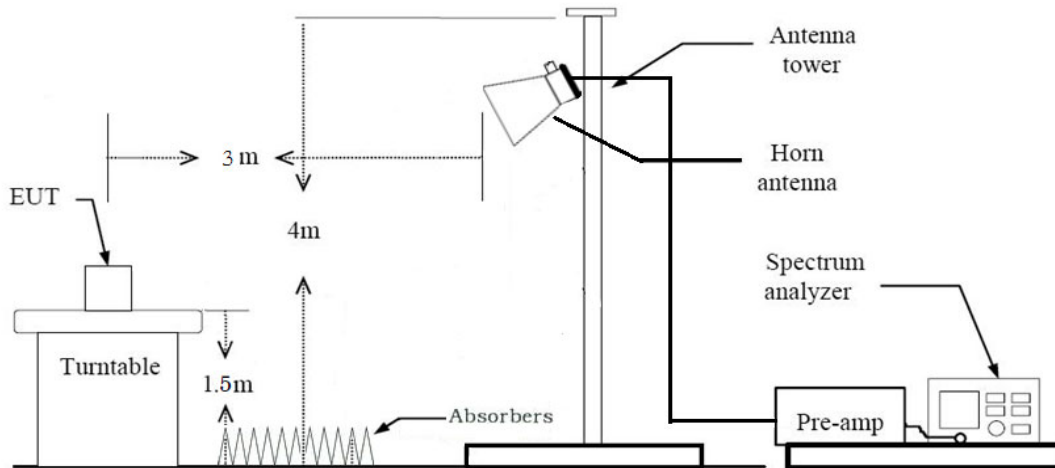

### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz

※In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### **Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range 1 GHz – 10<sup>th</sup> Harmonics
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
11. Total (Measurement Type : Peak)
  - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
- Total (Measurement Type : Average)
  - = Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F) + Duty Cycle Factor

### **Test Procedure of Radiated Restricted Band Edge**

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 10<sup>th</sup> Harmonics
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 1 GHz – 10th Harmonics
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
8. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
9. Total(Measurement Type : Peak)
  - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)
- Total(Measurement Type : Average)
  - = Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G) + Duty Cycle Factor
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (*ie*: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Level + Correction Factor

### 7.8. Receiver Spurious Emissions

#### Limit


Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

#### Test Configuration

30 MHz - 1 GHz

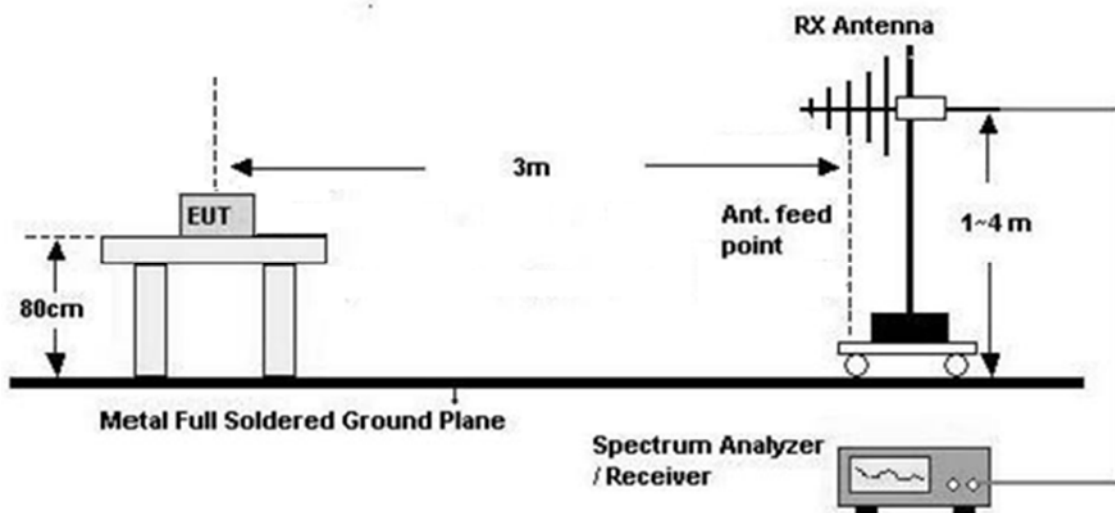


### Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)



Above 1 GHz

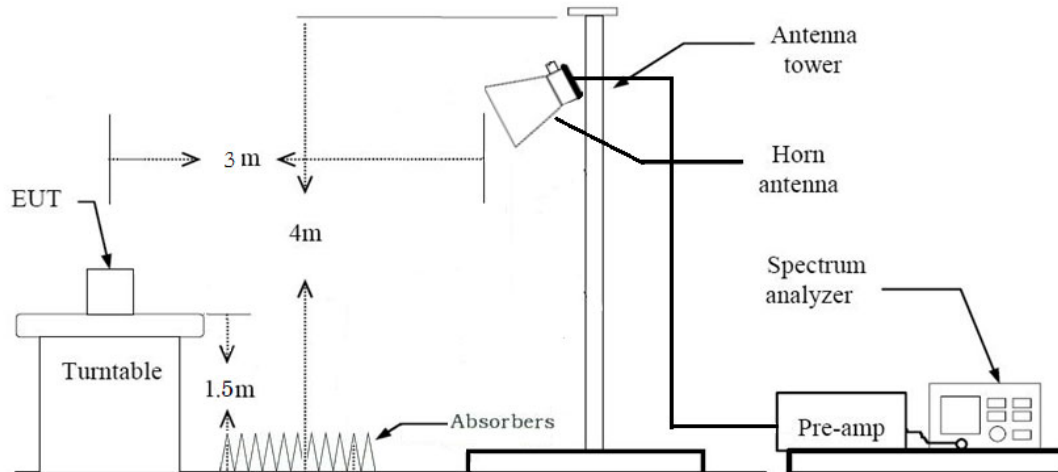

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - We performed using a reduced video BW method was done with the analyzer in linear mode
    - Measured Frequency Range : 1 GHz – 10<sup>th</sup> Harmonics

- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds

The actual setting value of VBW = 10 kHz

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

## 7.9. Worst case configuration and mode

### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone
  - Worstcase : Stand alone
2. EUT Axis:
  - Radiated Spurious Emissions : Y
  - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.  
(Worst case : 1M 37 Byte)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone
  - Worstcase : Stand alone

### Conducted test

1. The EUT was configured with packet length of highest power.
  - ALL Mode Test

## 8. SUMMARY TEST OF RESULTS

### FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

**ISED Part**

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99 % Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.b	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS

#Note1 : Not Tested


## 9. TEST RESULT

### 9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.394	0.624	0.6308	2.00
	255	2.140	2.500	0.8560	0.68

#### ▣ 1M Bit/s (37 Byte) Test Plots


Duty Cycle (Low-CH 0)

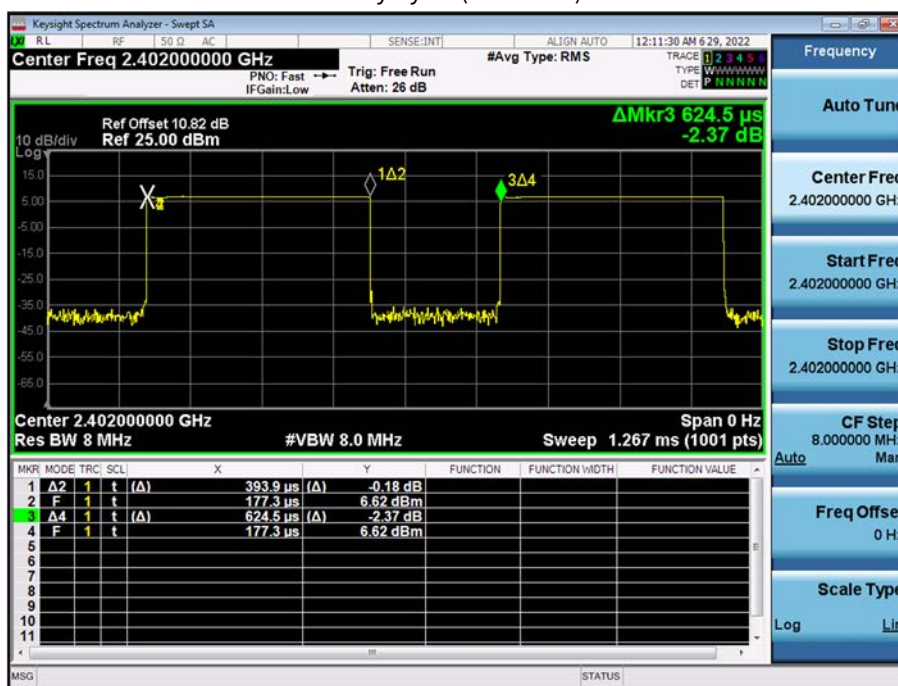



1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

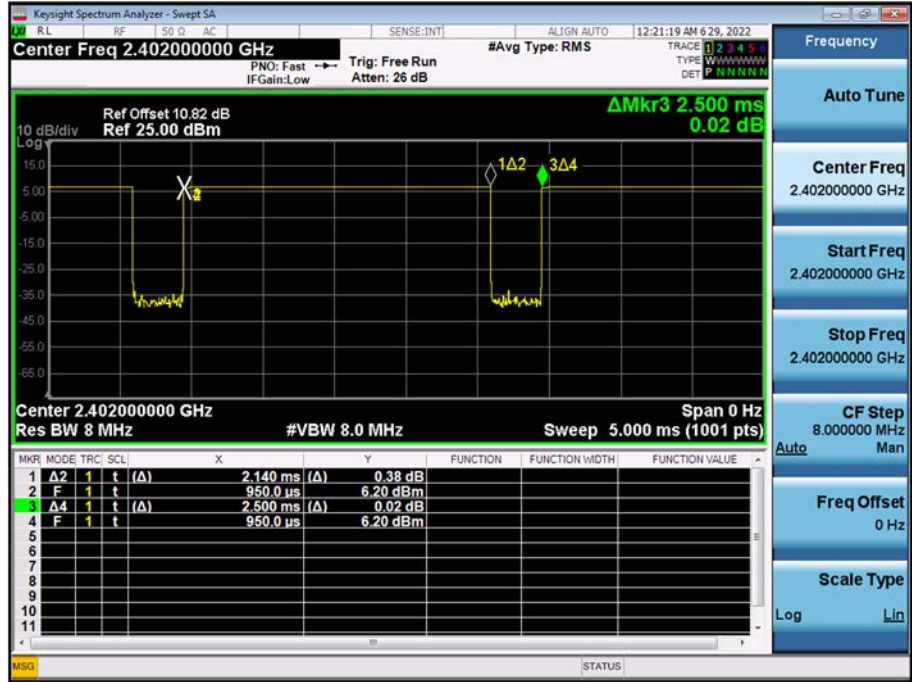



9.2 6dB BANDWIDTH & 99 % BANDWIDTH

FCC

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37 Byte	0	671.4	> 500
	19	673.7	
	39	669.3	
1M 255 Byte	0	670.0	> 500
	19	672.9	
	39	673.7	


**Note:**

Worst case test Plot Only 1M Bit/s: 37 Byte




1M Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

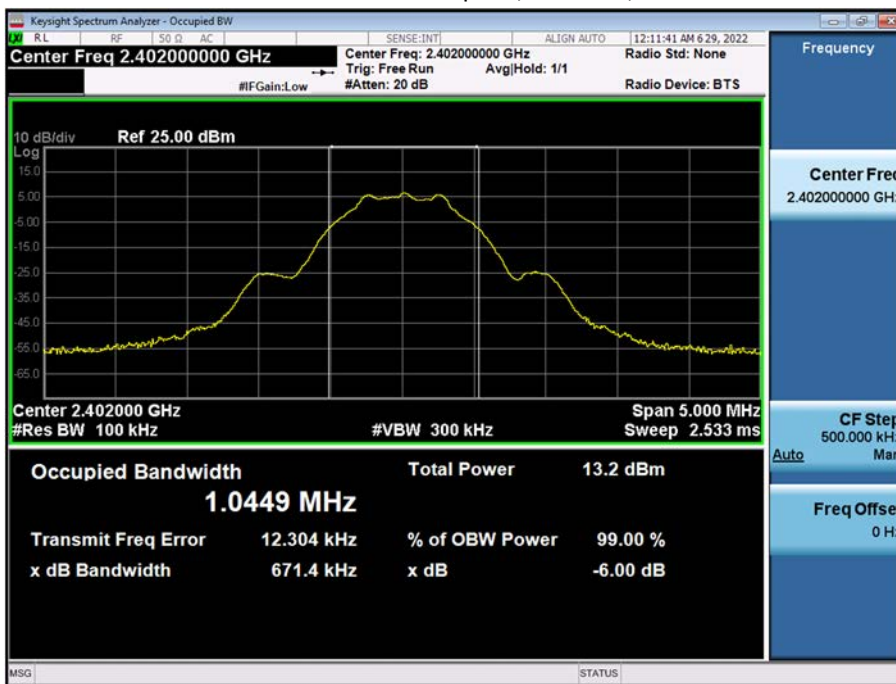

6 dB Bandwidth plot (Mid-CH 19)

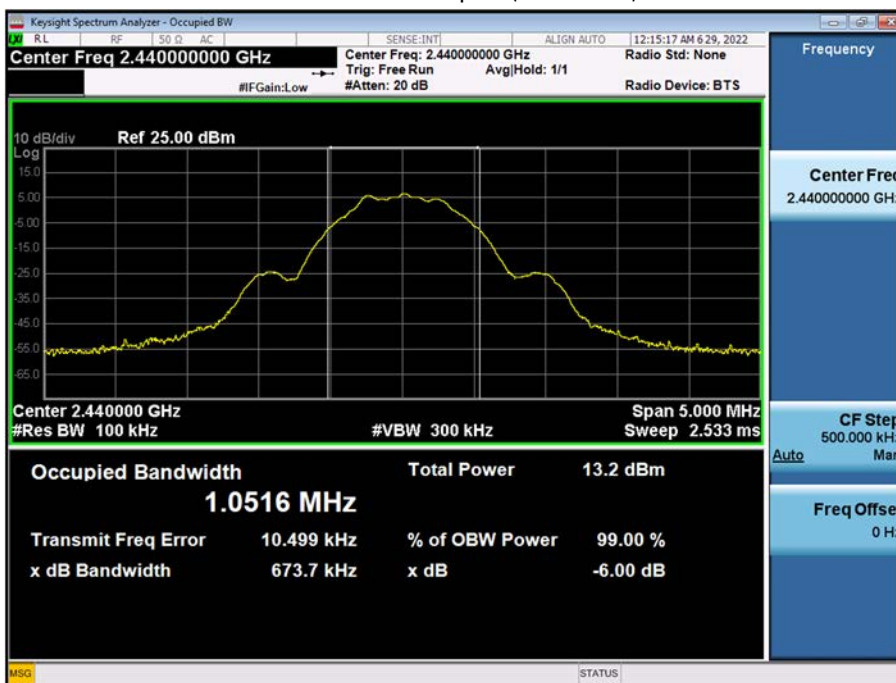

6 dB Bandwidth plot (High-CH 39)





99 % Bandwidth(ISED)

Mode (Bit/s)	Channel	99 % Bandwidth (MHz)	Limit (kHz)
1M(37)	0	1.0323	> 500
	19	1.0350	
	39	1.0421	
1M(255)	0	1.0369	> 500
	19	1.0373	
	39	1.0344	

**Note:**


Worst case test Plot Only 1M Bit/s: 37 Byte

▣ 1M Bit/s (37 Byte) Test Plots


99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)

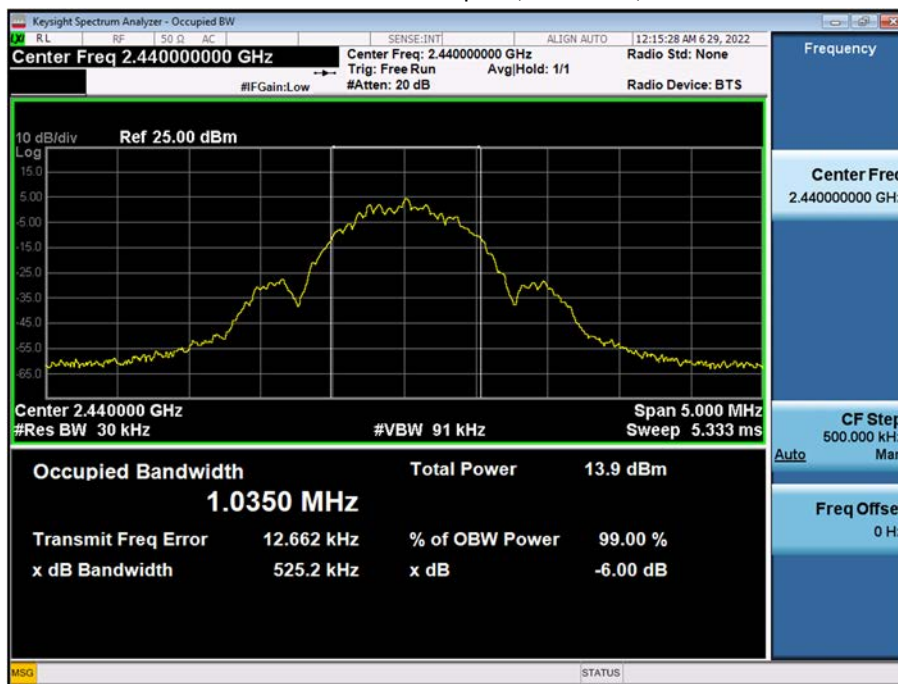

99 % Bandwidth plot (High-CH 39)

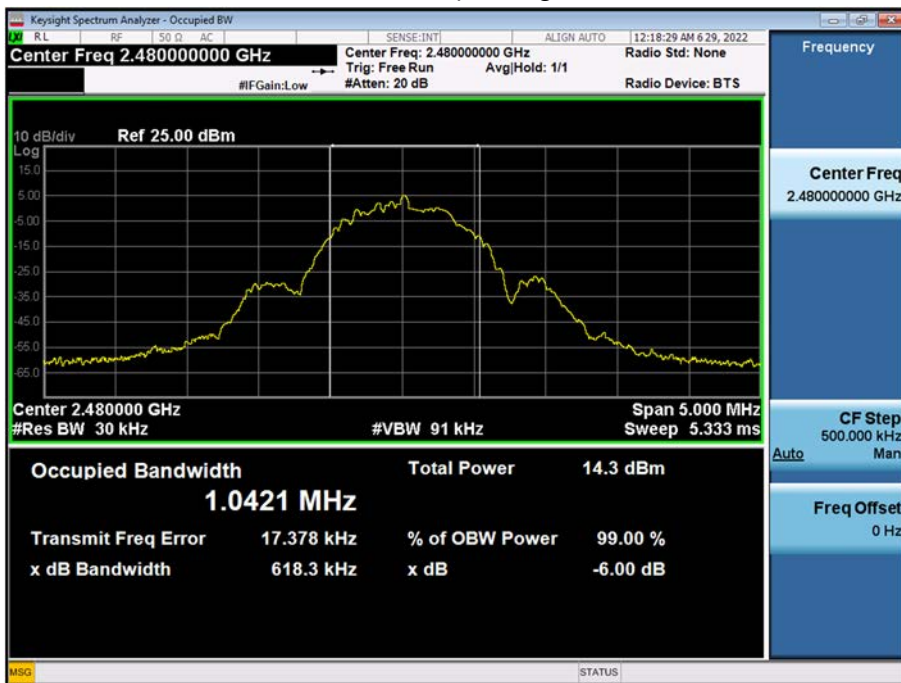

### 9.3 OUTPUT POWER

#### Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	6.745	30
		2440	19	6.780	
		2480	39	7.639	
	255	2402	0	6.653	
		2440	19	6.756	
		2480	39	7.548	

#### Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
1M	37	2402	0	4.42	2.00	6.42	30
		2440	19	4.58	2.00	6.58	
		2480	39	5.21	2.00	7.21	
	255	2402	0	5.72	0.68	6.40	
		2440	19	5.87	0.68	6.55	
		2480	39	6.43	0.68	7.11	

#### Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.82 dB is offset for 2.4 GHz Band.

### 9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm/3kHz)
2402	0	1 MBit/s 37 Byte	4.228	8
2440	19		4.365	
2480	39		5.148	
2402	0	1 MBit/s 225 Byte	4.178	
2440	19		4.338	
2480	39		5.042	

**Note :**

1. The PSD measured results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.82 dB is offset for 2.4 GHz Band.
4. Worst case test Plot Only : 1 MBit/s (37 Byte)

1 MBit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)







Power Spectral Density (High-CH 39)



### 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

**[BAND EDGE]**

Frequency (MHz)	Mode	Channel No.	Position	Test Result	
				Measured Level (dB)	Limit (dBc)
2402	1M Bit/s 37 Byte	0	Lower	56.555	30
2480		39	Upper	58.691	30
2402	1M Bit/s 255 Byte	0	Lower	56.721	30
2480		39	Upper	59.325	30

**Note :**

1. Worst case test Plot
  - (1) Lower 1M Bit/s (37 Byte)
  - (2) Upper 1M Bit/s (37 Byte)


**[CONDUCTED SPURIOUS EMISSIONS]**

**Note :**

1. Worst case test Plot  
1M Bit/s (37 Byte)


125k Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0

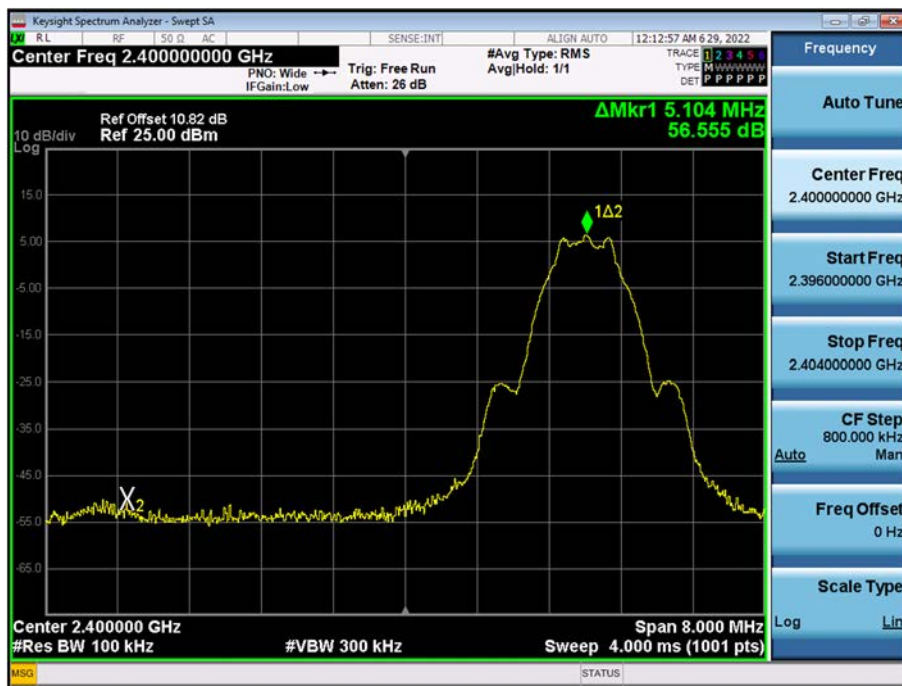

1M Bit/s (37 Byte) Test Plots -BandEdge


High-CH 39

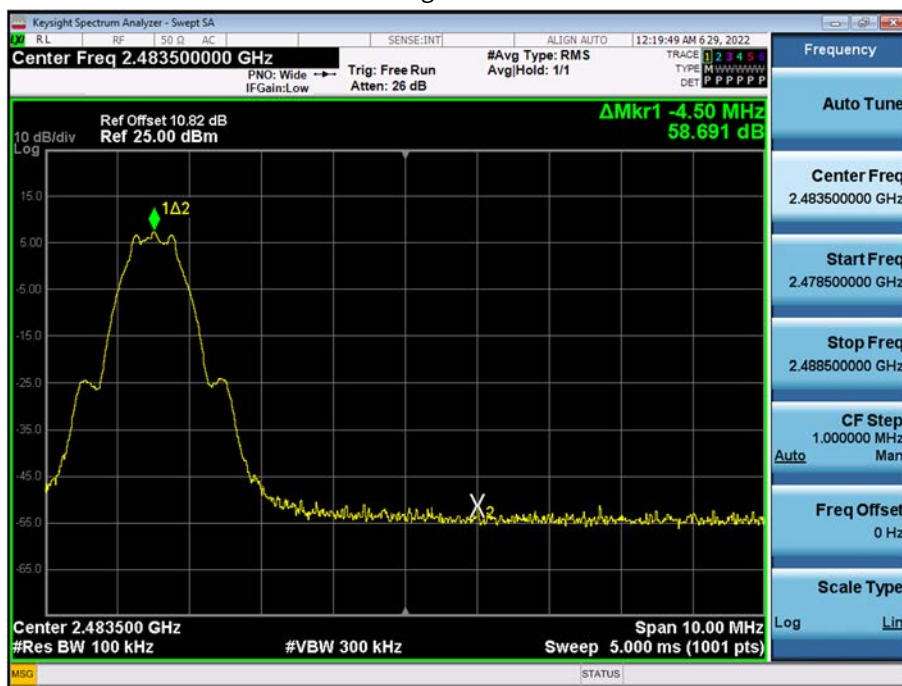

☐ 1M Bit/s (255 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 39)

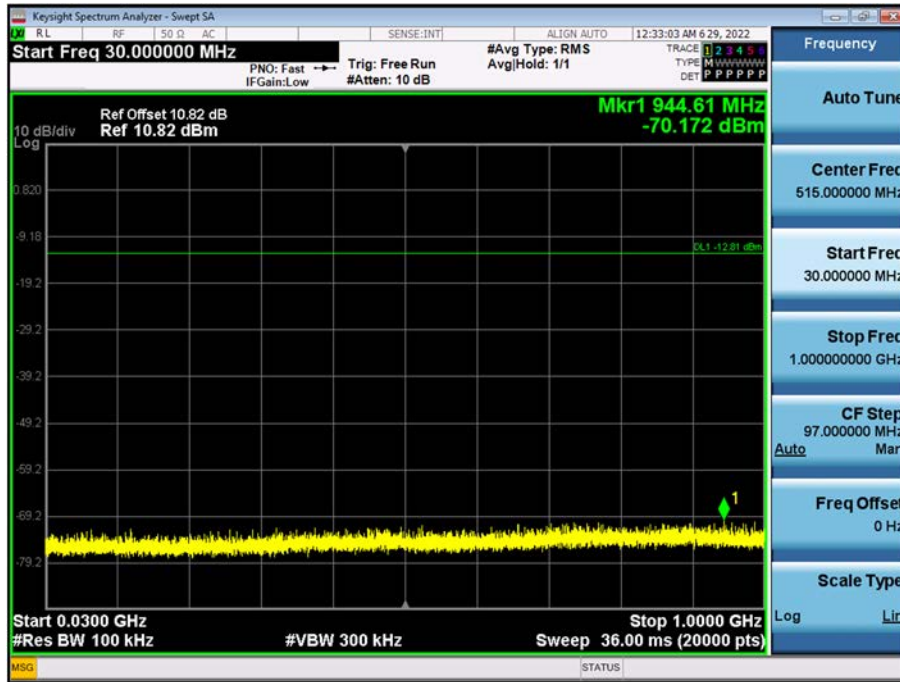

1 GHz ~ 3 GHz


Conducted Spurious Emission (Low-CH 39)

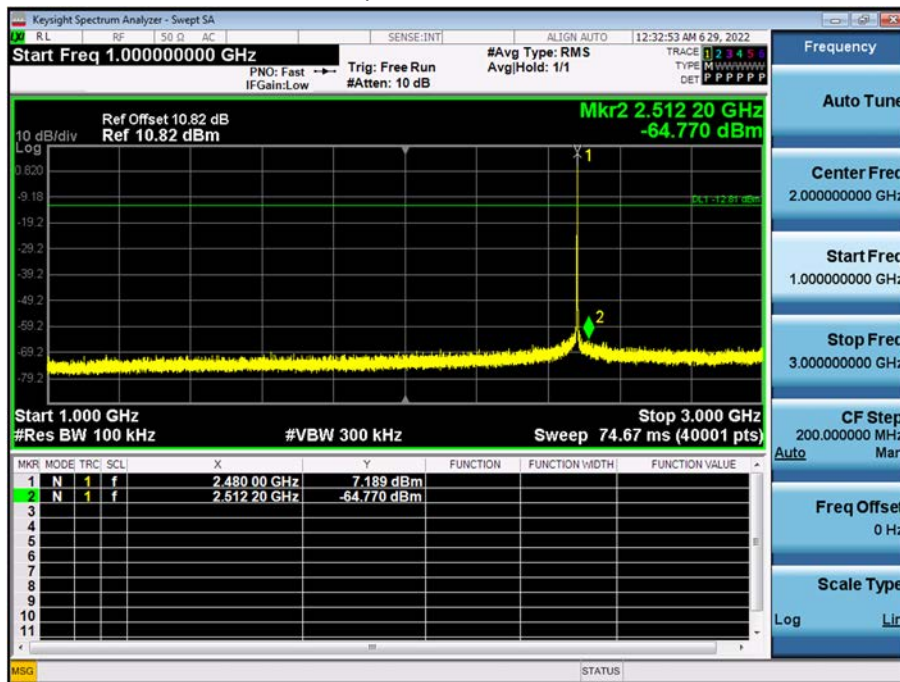




3 GHz ~ 5 GHz

Conducted Spurious Emission (Low-CH 39)

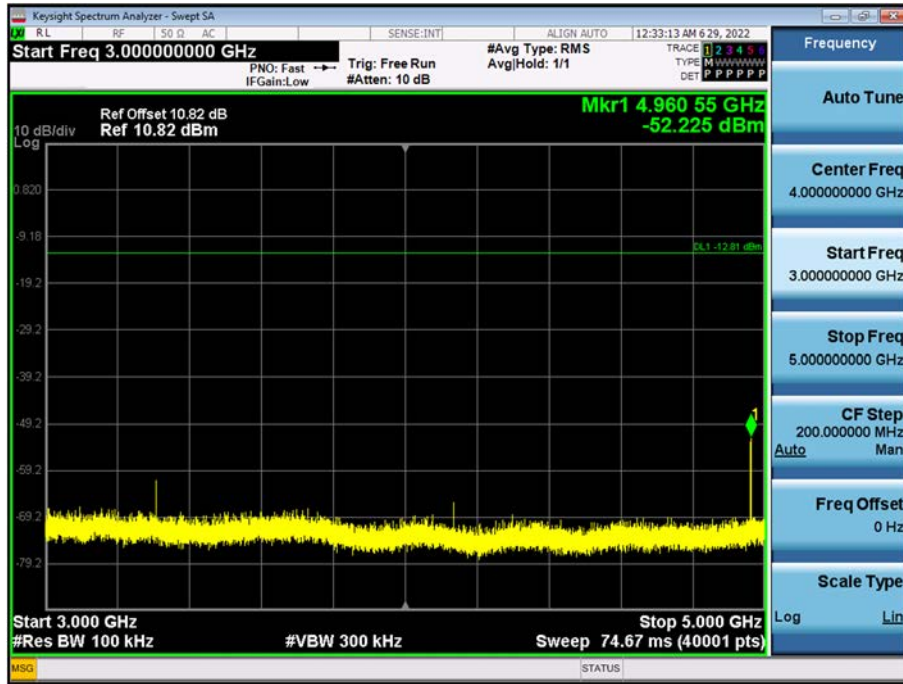

5 GHz ~ 7 GHz


Conducted Spurious Emission (Low-CH 39)

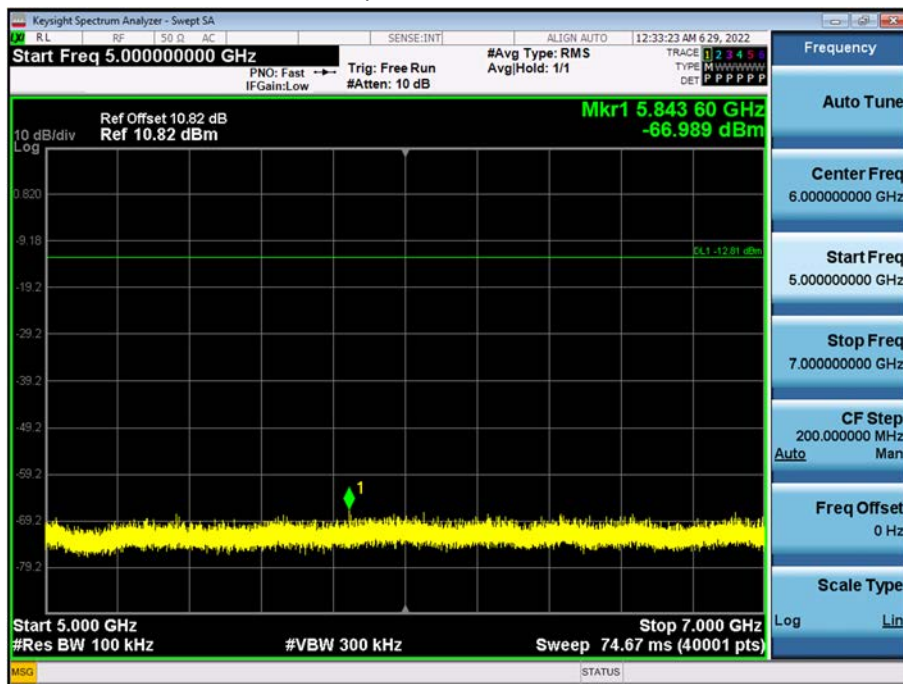




7 GHz ~ 9 GHz

Conducted Spurious Emission (Low-CH 39)

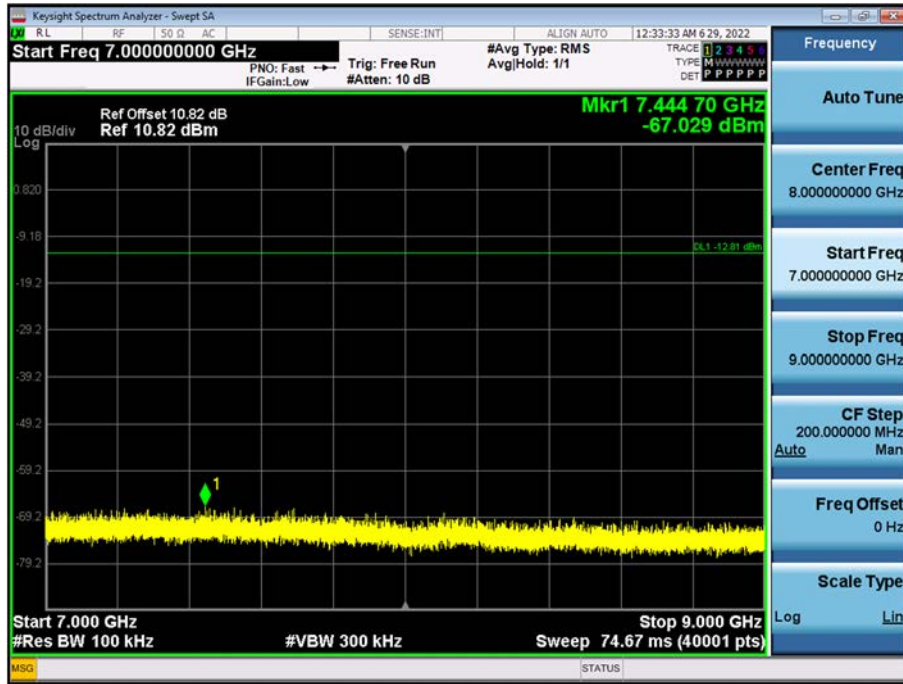

9 GHz ~ 11 GHz


Conducted Spurious Emission (Low-CH 39)

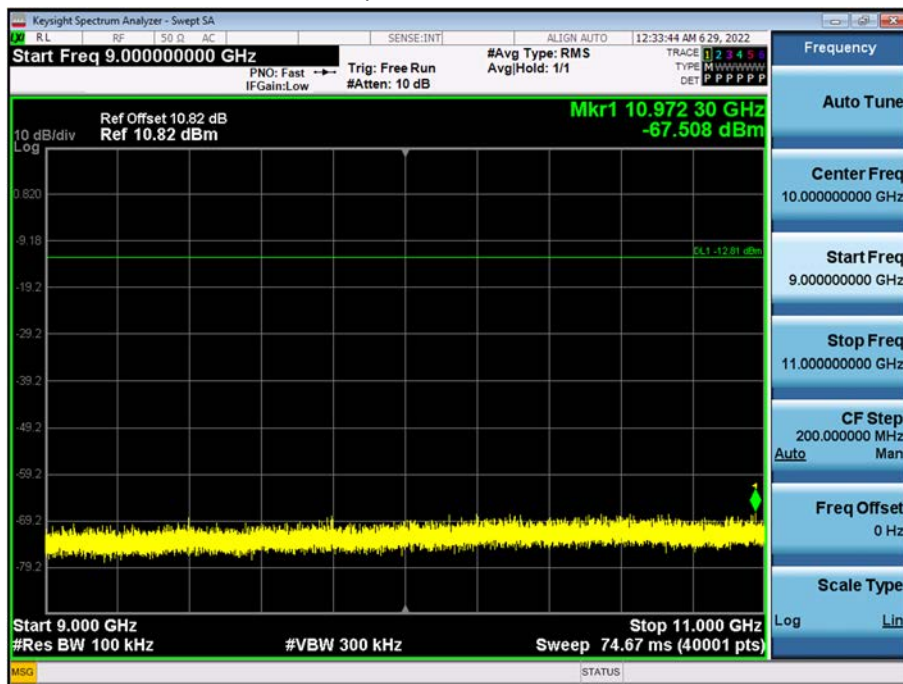




11 GHz ~ 13 GHz

Conducted Spurious Emission (Low-CH 39)

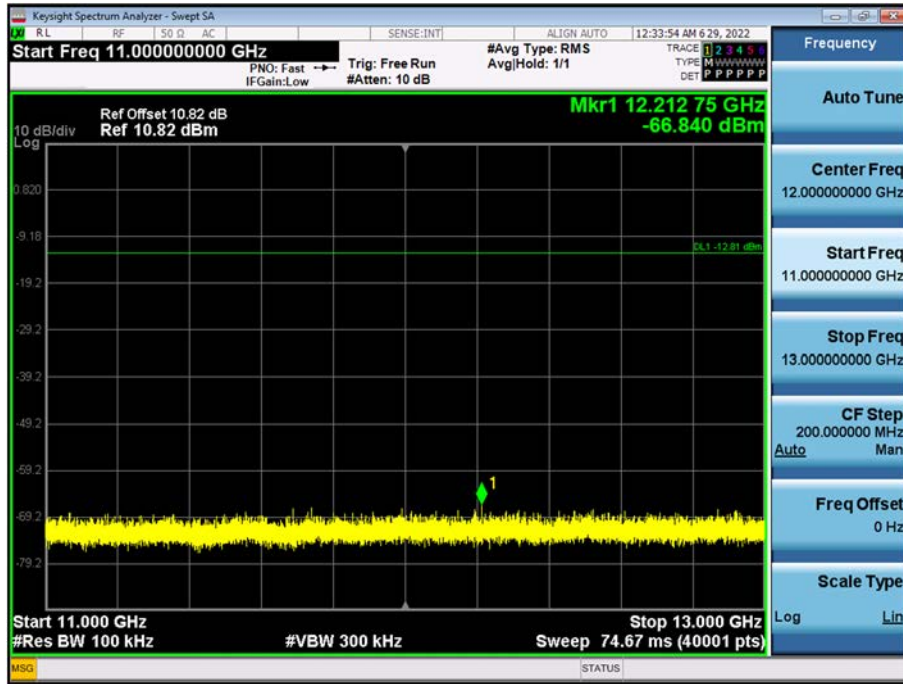

13 GHz ~ 15 GHz


Conducted Spurious Emission (Low-CH 39)

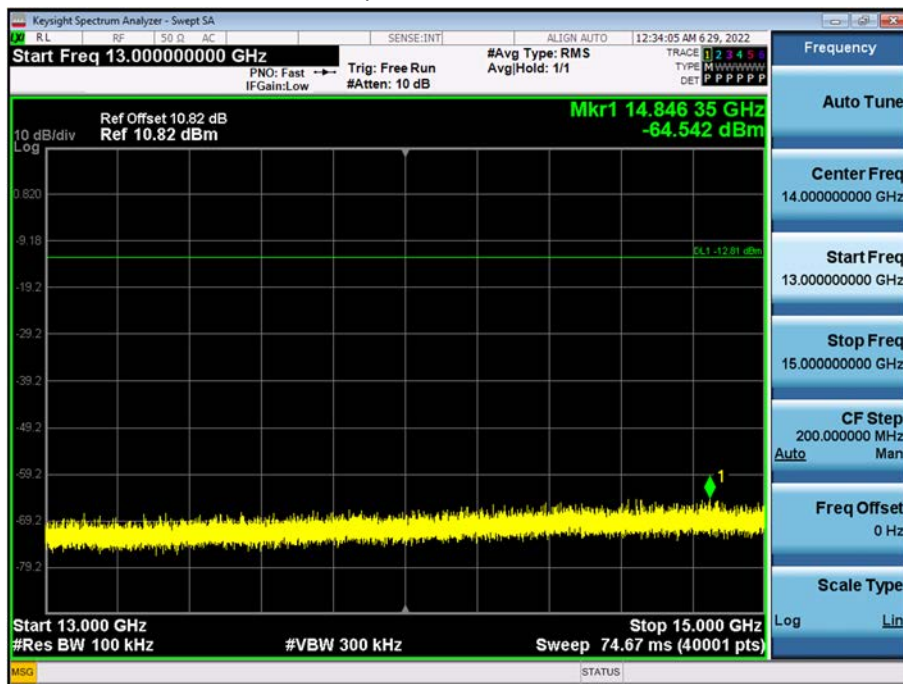




15 GHz ~ 17 GHz

Conducted Spurious Emission (Low-CH 39)

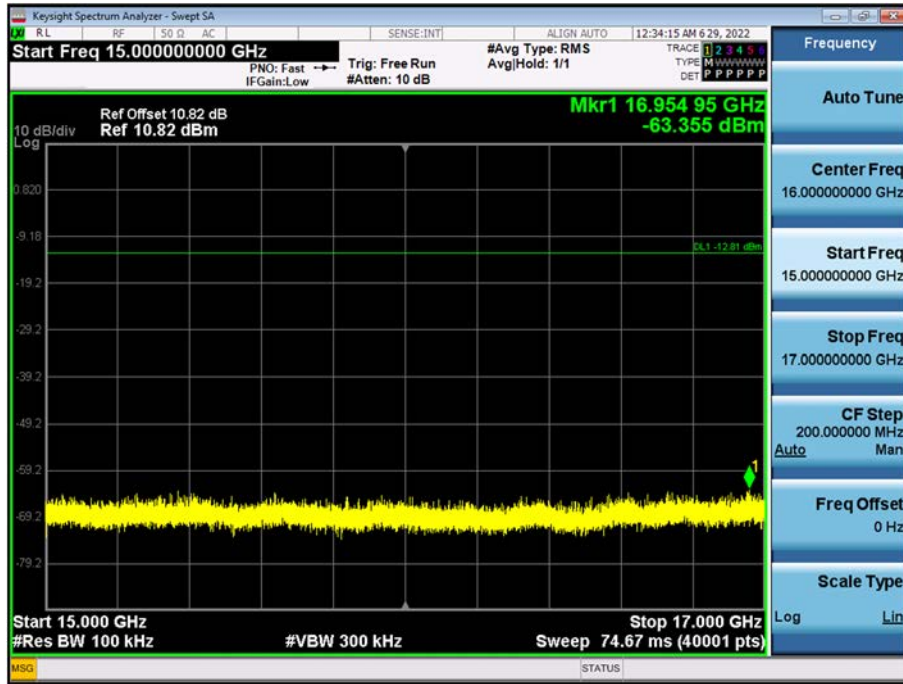

17 GHz ~ 19 GHz

Conducted Spurious Emission (Low-CH 39)

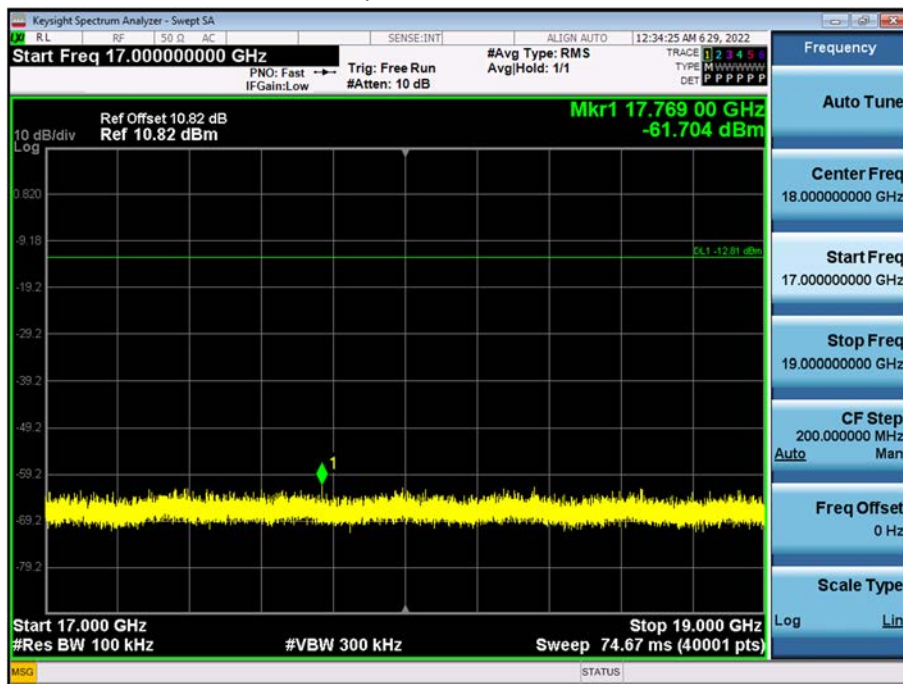







19 GHz ~ 21 GHz

Conducted Spurious Emission (Low-CH 39)

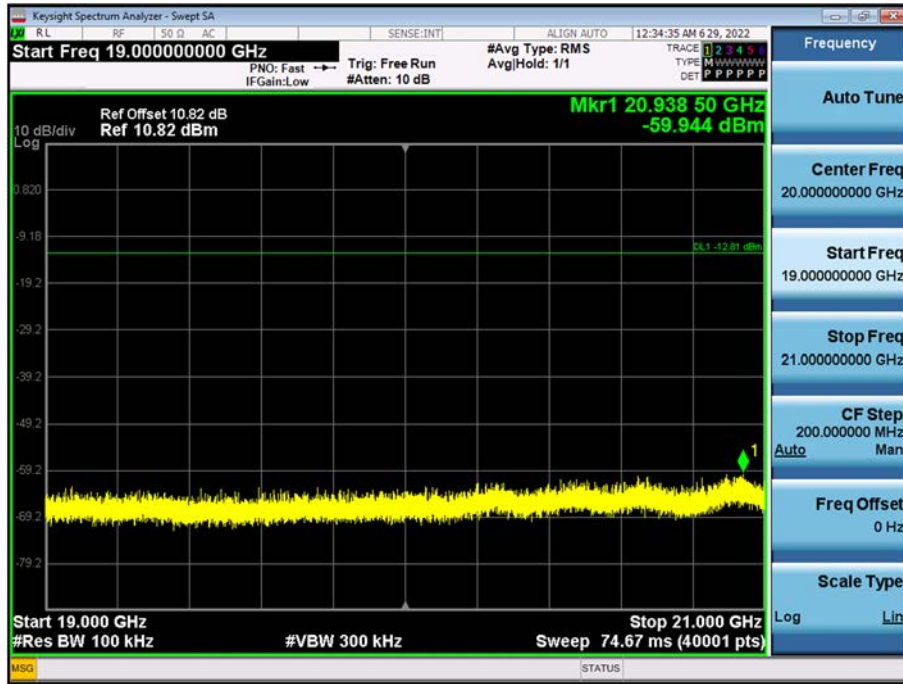

21 GHz ~ 23 GHz


Conducted Spurious Emission (Low-CH 39)

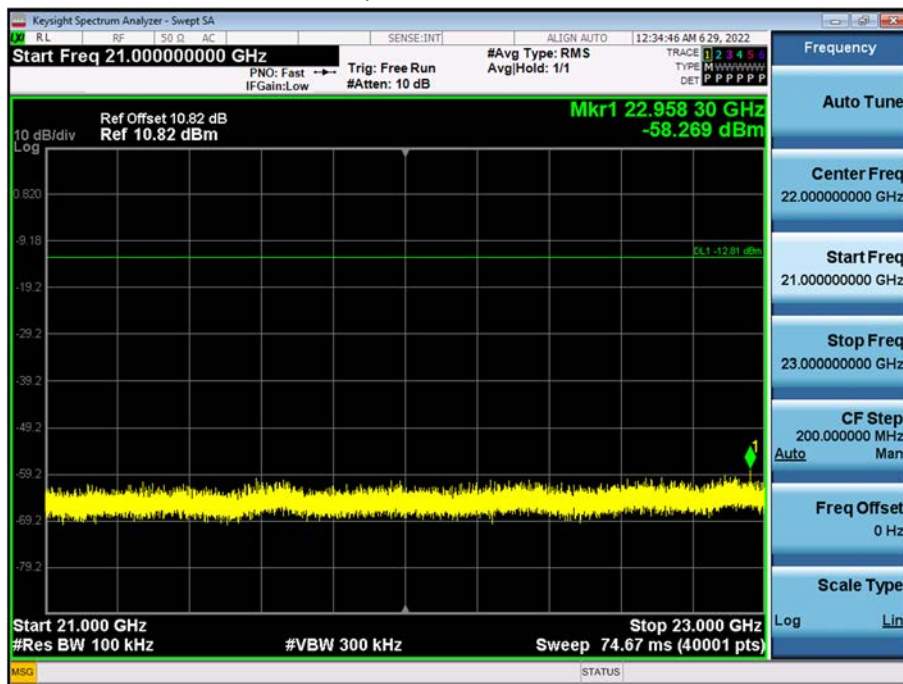



23 GHz ~ 25 GHz

Conducted Spurious Emission (Low-CH 39)

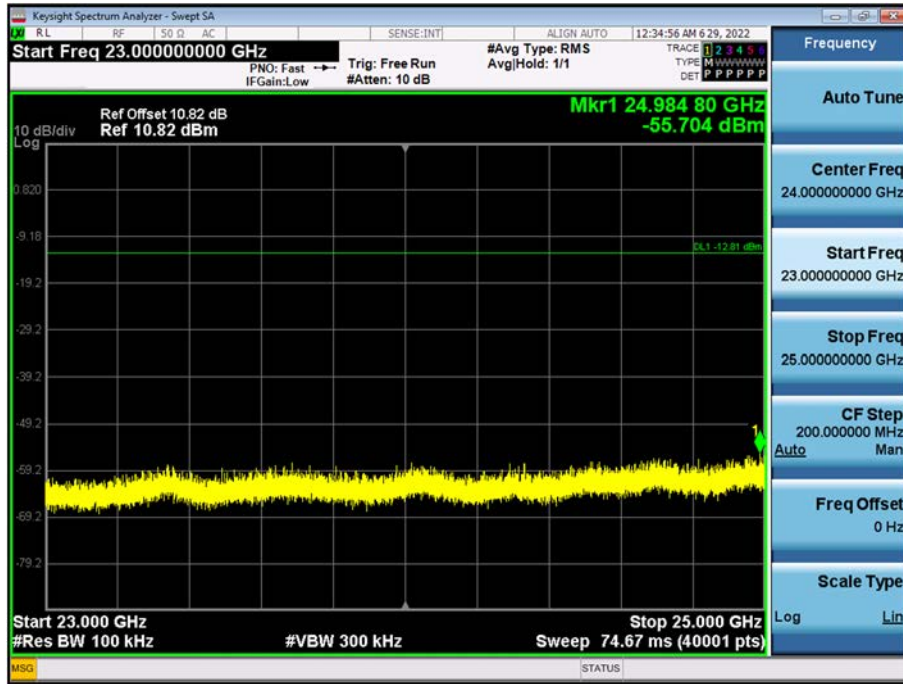

### 9.6 RADIATED SPURIOUS EMISSIONS

#### Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dB/m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Note:**

1. The Measured Level of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = 40log (specific distance / test distance) (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

#### Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dB/m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

**Mode : 1M Bit/s (37 Byte)**

Operation Mode: CH Low

Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4804	45.85	0.00	2.56	V	48.41	73.98	25.57	PK
4804	35.21	2.00	2.56	V	39.76	53.98	14.22	AV
7206	40.67	0.00	8.81	V	49.48	73.98	24.50	PK
7206	28.32	2.00	8.81	V	39.13	53.98	14.85	AV
4804	46.09	0.00	2.56	H	48.65	73.98	25.33	PK
4804	35.30	2.00	2.56	H	39.85	53.98	14.13	AV
7206	40.75	0.00	8.81	H	49.56	73.98	24.42	PK
7206	28.33	2.00	8.81	H	39.14	53.98	14.84	AV

Operation Mode: CH Mid

Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
4880	43.39	0.00	2.72	V	46.11	73.98	27.87	PK
4880	33.09	2.00	2.72	V	37.81	53.98	16.17	AV
7320	40.68	0.00	9.10	V	49.78	73.98	24.20	PK
7320	28.61	2.00	9.10	V	39.70	53.98	14.28	AV
4880	43.70	0.00	2.72	H	46.42	73.98	27.56	PK
4880	33.22	2.00	2.72	H	37.94	53.98	16.04	AV
7320	40.82	0.00	9.10	H	49.92	73.98	24.06	PK
7320	28.64	2.00	9.10	H	39.73	53.98	14.25	AV



Operation Mode: CH High

Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF-AG	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB]	[dB]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
4960	43.02	0.00	2.31	V	45.33	73.98	28.65	PK
4960	33.09	2.00	2.31	V	37.39	53.98	16.59	AV
7440	39.89	0.00	10.21	V	50.10	73.98	23.88	PK
7440	27.95	2.00	10.21	V	40.15	53.98	13.83	AV
4960	43.92	0.00	2.31	H	46.23	73.98	27.75	PK
4960	33.88	2.00	2.31	H	38.18	53.98	15.80	AV
7440	39.98	0.00	10.21	H	50.19	73.98	23.79	PK
7440	27.98	2.00	10.21	H	40.18	53.98	13.80	AV



### 9.7 RADIATED RESTRICTED BAND EDGES


**Mode : 1M Bit/s (37 Byte)**

Operating Frequency	2402 MHz & 2480 MHz
Channel No.	0 & 39


Frequency	Measured Level	Duty Cycle Factor	AF+CL+DF	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dB $\mu$ V]	[dB]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
2390.0	20.29	0.00	35.43	H	55.72	73.98	18.26	PK
2390.0	8.45	2.00	35.43	H	45.87	53.98	8.11	AV
2390.0	20.02	0.00	35.43	V	55.44	73.98	18.54	PK
2390.0	8.52	2.00	35.43	V	45.94	53.98	8.04	AV
2483.5	21.60	0.00	35.57	H	57.17	73.98	16.81	PK
2483.5	8.91	2.00	35.57	H	46.47	53.98	7.51	AV
2483.5	22.03	0.00	35.57	V	57.59	73.98	16.39	PK
2483.5	9.17	2.00	35.57	V	46.73	53.98	7.25	AV

1M Bit/s (37 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Result (Ch.39, V)

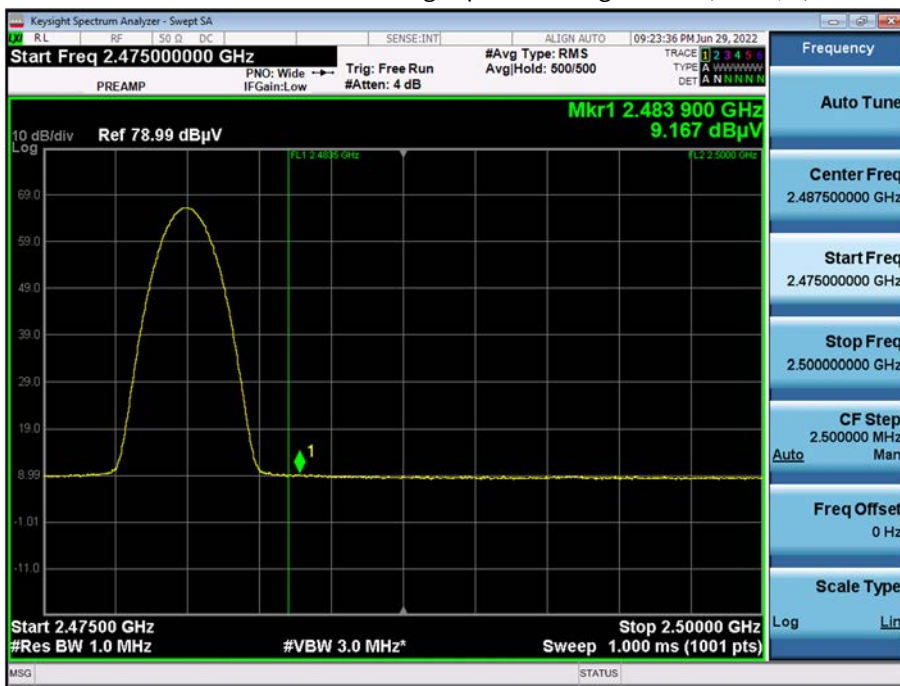

Radiated Restricted Band Edges plot – Peak Result (Ch.39, V)

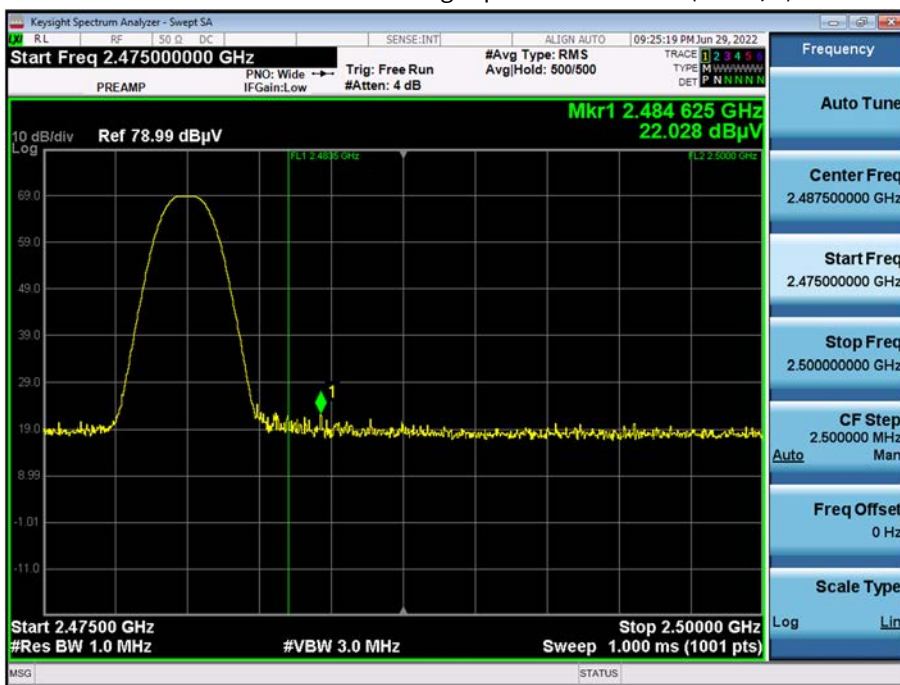

**Note:**

Plot of worst case are only reported.



### 9.8 RECEIVER SPURIOUS EMISSIONS

#### Frequency Range : Below 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dBm/m	dBm	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

#### Frequency Range : Above 1 GHz

Frequency	Measured Level	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dBm/m	dBm	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							



## 9.9 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## Test Report

### Common Information

EUT : LAIWB3  
 Manufacturer : LG Innotek  
 Test Site: SHIELD ROOM  
 Operating Conditions : BTLE L1 MODE

Full Spectrum

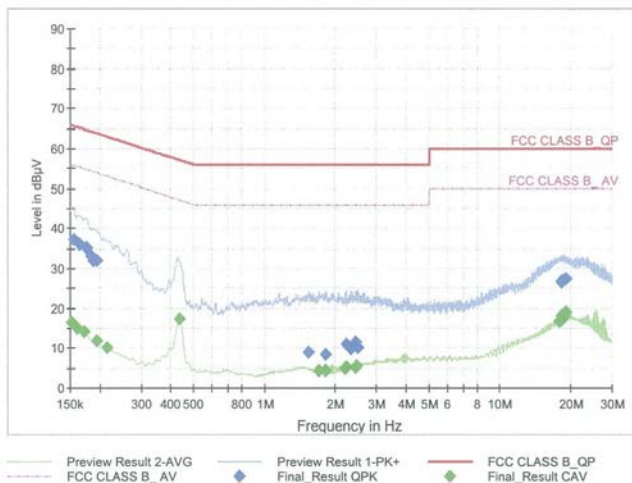

### Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	37.11	65.75	28.65	9.000	L1	OFF	9.6
0.1635	36.17	65.28	29.12	9.000	L1	OFF	9.6
0.1748	35.19	64.73	29.55	9.000	L1	OFF	9.6
0.1838	33.08	64.31	31.23	9.000	L1	OFF	9.6
0.1883	32.15	64.11	31.96	9.000	L1	OFF	9.6
0.1950	32.16	63.82	31.66	9.000	L1	OFF	9.6
1.5373	9.02	56.00	46.98	9.000	L1	OFF	9.6
1.8163	8.38	56.00	47.62	9.000	L1	OFF	9.6
2.2258	10.98	56.00	45.02	9.000	L1	OFF	9.7
2.3405	9.84	56.00	46.16	9.000	L1	OFF	9.7
2.4440	11.67	56.00	44.33	9.000	L1	OFF	9.7
2.4845	9.98	56.00	46.02	9.000	L1	OFF	9.7
18.3043	26.47	60.00	33.53	9.000	L1	OFF	9.9
18.3178	26.64	60.00	33.36	9.000	L1	OFF	9.9
18.3313	26.85	60.00	33.15	9.000	L1	OFF	9.9
18.7858	27.24	60.00	32.76	9.000	L1	OFF	9.9
18.7970	27.08	60.00	32.92	9.000	L1	OFF	9.9
19.0895	27.43	60.00	32.57	9.000	L1	OFF	9.9

2022-07-21

오후 3:00:34



Test

2 / 2

**Final Result\_CAV**

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	16.38	55.88	39.50	9.000	L1	OFF	9.6
0.1613	14.90	55.40	40.50	9.000	L1	OFF	9.6
0.1725	14.19	54.84	40.65	9.000	L1	OFF	9.6
0.1950	11.70	53.82	42.12	9.000	L1	OFF	9.6
0.2153	10.06	53.00	42.95	9.000	L1	OFF	9.6
0.4380	17.32	47.10	29.78	9.000	L1	OFF	9.6
1.7083	4.26	46.00	41.74	9.000	L1	OFF	9.6
1.8163	4.31	46.00	41.69	9.000	L1	OFF	9.6
2.2010	5.05	46.00	40.95	9.000	L1	OFF	9.7
2.2258	5.31	46.00	40.69	9.000	L1	OFF	9.7
2.4440	5.33	46.00	40.67	9.000	L1	OFF	9.7
2.4643	5.51	46.00	40.49	9.000	L1	OFF	9.7
17.9060	16.60	50.00	33.40	9.000	L1	OFF	9.9
18.2390	17.11	50.00	32.89	9.000	L1	OFF	9.9
18.3335	18.20	50.00	31.80	9.000	L1	OFF	9.9
18.6193	17.87	50.00	32.13	9.000	L1	OFF	9.9
18.8105	18.81	50.00	31.19	9.000	L1	OFF	9.9
19.0490	19.07	50.00	30.93	9.000	L1	OFF	9.9

2022-07-21

오후 3:00:34

**Conducted Emissions (Line 2)**

Test


1 / 2

**Test Report**

**Common Information**

EUT : LAIWB3  
 Manufacturer : LG Innotek  
 Test Site : SHIELD ROOM  
 Operating Conditions : BTLE N MODE

Full Spectrum

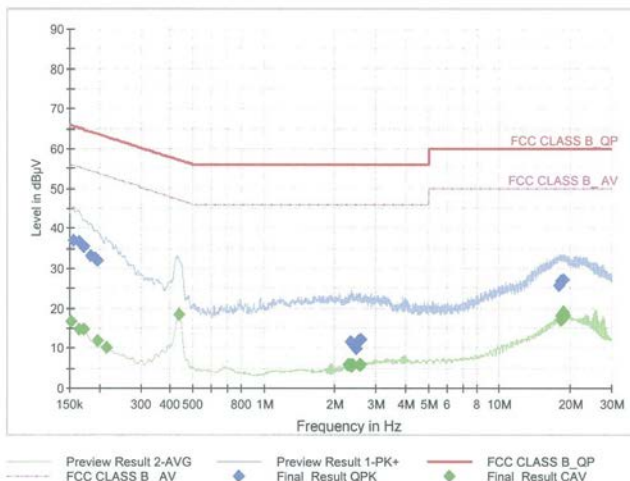

**Final Result QPK**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	37.06	65.75	28.69	9.000	N	OFF	9.6
0.1635	36.50	65.28	28.79	9.000	N	OFF	9.6
0.1725	35.49	64.84	29.35	9.000	N	OFF	9.6
0.1838	33.13	64.31	31.19	9.000	N	OFF	9.6
0.1928	32.51	63.92	31.41	9.000	N	OFF	9.6
0.1973	32.03	63.73	31.70	9.000	N	OFF	9.6
2.3473	11.40	56.00	44.60	9.000	N	OFF	9.7
2.3698	11.34	56.00	44.66	9.000	N	OFF	9.7
2.4778	9.90	56.00	46.10	9.000	N	OFF	9.7
2.5205	11.81	56.00	44.19	9.000	N	OFF	9.7
2.5453	11.95	56.00	44.05	9.000	N	OFF	9.7
2.5700	12.02	56.00	43.98	9.000	N	OFF	9.7
17.9240	25.68	60.00	34.32	9.000	N	OFF	9.9
18.3043	26.47	60.00	33.53	9.000	N	OFF	9.9
18.3155	26.79	60.00	33.21	9.000	N	OFF	9.9
18.3335	26.69	60.00	33.31	9.000	N	OFF	9.9
18.7858	27.10	60.00	32.90	9.000	N	OFF	9.9
18.8083	27.12	60.00	32.88	9.000	N	OFF	9.9

2022-07-21

오후 3:05:57



Test

2 / 2

**Final Result CAV**

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	16.82	55.88	39.06	9.000	N	OFF	9.6
0.1635	14.79	55.28	40.49	9.000	N	OFF	9.6
0.1725	14.59	54.84	40.24	9.000	N	OFF	9.6
0.1973	11.74	53.73	41.99	9.000	N	OFF	9.6
0.2153	10.07	53.00	42.93	9.000	N	OFF	9.6
0.4380	18.40	47.10	28.70	9.000	N	OFF	9.6
2.2753	5.66	46.00	40.34	9.000	N	OFF	9.7
2.3473	5.67	46.00	40.33	9.000	N	OFF	9.7
2.3698	5.54	46.00	40.46	9.000	N	OFF	9.7
2.3923	5.77	46.00	40.23	9.000	N	OFF	9.7
2.5475	5.79	46.00	40.21	9.000	N	OFF	9.7
2.5700	5.72	46.00	40.28	9.000	N	OFF	9.7
18.1918	17.10	50.00	32.90	9.000	N	OFF	9.9
18.3335	18.12	50.00	31.88	9.000	N	OFF	9.9
18.4910	17.85	50.00	32.15	9.000	N	OFF	9.9
18.4978	17.71	50.00	32.29	9.000	N	OFF	9.9
18.7160	19.05	50.00	30.95	9.000	N	OFF	9.9
18.8578	18.05	50.00	31.95	9.000	N	OFF	9.9

2022-07-21

오후 3:05:57

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/07/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/03/2023	Annual
DC Power Supply	E3646A	Agilent	MY40002937	12/14/2022	Annual
Attenuator(10 dB) (DC-26.5 GHz)	5910-N-50-010	H+S	00801	10/29/2022	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/07/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/22/2023	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5- 2370/2520-60/12SS	Wainwright Instruments	2	01/06/2023	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV5100/5850- 40/50-8EEK	Wainwright Instruments	1	02/07/2023	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHEL CERNEX	N/A	12/22/2022	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEX	N/A	12/22/2022	Annual
High Pass Filter	WHKX10-2700-3000- 18000-40SS	Wainwright Instruments	N/A	12/22/2022	Annual
High Pass Filter	WHKX8-6090-7000- 18000-40SS	Wainwright Instruments	N/A	12/22/2022	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/22/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	04/05/2023	Annual
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/13/2022	Annual
Spectrum Analyzer	FSV40-N(9 kHz ~ 30 GHz)	Rohde & Schwarz	101068-SZ	09/15/2022	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).



## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2207-FI002-P