

TEST REPORT

of

FCC Part 15 Subpart C §15.247
IC RSS-247 Issue 2 and RSS-Gen Issue 5

FCC ID: BEJCCIC2US
IC Certification: 2703H-CCIC2US


Equipment Under Test : Car Navigation System
Model Name : CCIC2
Variant Model Name(s) : Refer to the page 3
FCC Applicant : LG Electronics USA
IC Applicant : LG ELECTRONICS INC.
Manufacturer : LG Electronics Inc.
Date of Receipt : 2022.12.09
Date of Test(s) : 2022.12.14 ~ 2023.03.31
Date of Issue : 2023.03.31

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(※) provided by the customer.

Tested by:

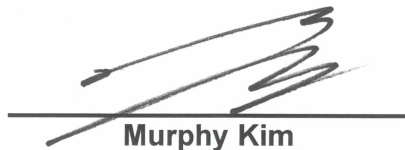

Murphy Kim

Technical
Manager:



Jinhyoung Cho

SGS Korea Co., Ltd. Gunpo Laboratory

INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emissions ----	12
3. 20 dB Bandwidth & 99 % Bandwidth -----	32
4. Maximum Peak Conducted Output Power -----	41
5. Carrier Frequency Separation -----	43
6. Number of Hopping Frequencies -----	45
7. Time of Occupancy(Dwell Time) -----	47
8. Antenna Requirement -----	55

1. General Information

1.1 Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

FCC Applicant : LG Electronics USA

FCC Address : 111 Sylvan Avenue, North Building, Englewood Cliffs, New Jersey, United States, 07632

IC Applicant : LG ELECTRONICS INC.

IC Address : 222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, Korea (Republic of), 451-713

Contact Person : Cho, Hee-jae

Phone No. : +1 201 266 2215

1.3. Details of Manufacturer

Company : LG Electronics Inc.

Address : 10, Magokjungang 10-ro, Gangseo-gu, Seoul, Korea, 07796

1.4. Description of EUT

Kind of Product	Car Navigation System
Model Name	CCIC2
Variant Model Names	Refer to the clause 1.15
Serial Number	Conducted Sample: C-001 Radiated Sample: R-001
Power Supply	DC 12 V
Frequency Range	2 402 MHz ~ 2 480 MHz (Bluetooth)
Modulation Technique	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels	79 channels (Bluetooth)
Antenna Type	PCB & Cable Assembly antenna
Antenna Gain[*]	Port 1: 0.94 dB i
H/W Version	1.0
S/W Version	1.0
FVIN	N/A

1.5. Declaration by the Manufacturer

- Adaptive Frequency Hopping is supported and use at least 20 channels.
- The EUT has two ports (Port1, Port 2).
- Bluetooth transmits only on Port 1.

1.6. Information about the FHSS characteristics:

1.6.1. Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

1.6.2. Equal Hopping Frequency Use

The channels of this system will be used equally over the long-term distribution of the hopsets.

1.6.3. Example of a 79 hopping sequence in data mode:

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

1.6.4. System Receiver Input Bandwidth

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.6.5. Equipment Description

15.247(a) (1) that the Rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

1.7. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMA100B	106887	Oct. 13, 2022	Annual	Oct. 13, 2023
Signal Generator	R&S	SMBV100A	255834	May 25, 2022	Annual	May 25, 2023
Spectrum Analyzer	R&S	FSV30	103210	Dec. 07, 2022	Annual	Dec. 07, 2023
Spectrum Analyzer	Agilent	N9020A	MY53421758	Aug. 26, 2022	Annual	Aug. 26, 2023
Bluetooth Tester	TESCOM	TC-3000C	3000C000560	Sep. 14, 2022	Annual	Sep. 14, 2023
Directional Coupler	KRYTAR	152613	122660	Jul. 06, 2022	Annual	Jul. 06, 2023
BRIDGE COUPLER	MARKI MICROWAVE INC	CBR16-0012	1542	May 06, 2022	Annual	May 06, 2023
High Pass Filter	Wainwright Instrument GmbH	WHKX3.0/18G-6SS	21	Jun. 09, 2022	Annual	Jun. 09, 2023
High Pass Filter	Wainwright Instrument GmbH	WHNX7.5/26.5G-6SS	15	May 31, 2022	Annual	May 31, 2023
Low Pass Filter	Mini-Circuits	NLP-1200+	V 8979400903-2	Feb. 09, 2023	Annual	Feb. 09, 2024
Power Sensor	R&S	NRP-Z81	100669	May 06, 2022	Annual	May 06, 2023
DC Power Supply	R&S	HMP2020	020089489	May 17, 2022	Annual	May 17, 2023
Preamplifier	H.P.	8447F	2944A03909	Aug. 04, 2022	Annual	Aug. 04, 2023
Signal Conditioning Unit	R&S	SCU-18	10117	Jun. 13, 2022	Annual	Jun. 13, 2023
Preamplifier	TESTEK	TK-PA1840H	130016	Jan. 11, 2023	Annual	Jan. 11, 2024
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 23, 2021	Biennial	Aug. 23, 2023
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB9163	01126	Feb. 09, 2023	Annual	Feb. 09, 2024
Horn Antenna	R&S	HF906	100326	Feb. 28, 2023	Annual	Feb. 28, 2024
Horn Antenna	Schwarzbeck Mess-Elektronik	BBHA 9170	9170-540	Nov. 30, 2022	Annual	Nov. 30, 2023
Test Receiver	R&S	ESU 26	100109	Jan. 18, 2023	Annual	Jan. 18, 2024
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/38330516/L	N.C.R.	N/A	N.C.R.
Antenna Mast	Innco systems GmbH	MA4640-XP-ET	MA4640/536/38330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	RFONE	MWX221-NMSNMS (4 m)	J1023142	Oct. 04, 2022	Semi-Annual	Apr. 04, 2023
Coaxial Cable	Qualwave Inc.	QA500-18-NN-10 (10 m)	22200114	Oct. 04, 2022	Semi-Annual	Apr. 04, 2023
Coaxial Cable	RADIALL	TESTPRO 3	182287	Feb. 18, 2023	Semi-Annual	Aug. 18, 2023
Coaxial Cable	RADIALL	TESTPRO 3	182288	Feb. 18, 2023	Semi-Annual	Aug. 18, 2023
Coaxial Cable	RADIALL	TESTPRO 3	182291	Feb. 18, 2023	Semi-Annual	Aug. 18, 2023

Note;

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date

1.8. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part15 Subpart C, IC RSS-247 Issue 2 and RSS-Gen Issue 5			
Section in FCC	Section in IC	Test Item(s)	Result
15.205(a) 15.209 15.247(d)	RSS-247 Issue 2 5.5 RSS-Gen Issue 5 8.9	Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	Complied
15.247(a)(1)	RSS-247 Issue 2 5.1(b) RSS-Gen Issue 5 6.7	20 dB Bandwidth and 99 % Bandwidth	Complied
15.247(a)(1) 15.247(b)(1)	RSS-247 Issue 2 5.1(b) 5.4(b)	Maximum Peak Conducted Output Power	Complied
15.247(a)(1)	RSS-247 Issue 2 5.1(b)	Carrier Frequency Separation	Complied
15.247(a)(1)(iii)	RSS-247 Issue 2 5.1(d)	Number of Hopping Frequencies	Complied
15.247(a)(1)(iii)	RSS-247 Issue 2 5.1(d)	Time of Occupancy (Dwell Time)	Complied
15.207	RSS-Gen Issue 5 8.8	AC Power Line Conducted Emission	N/A ¹⁾

Note;

1) The AC power line test was not performed because the EUT use battery power for operation and which do not operate from the AC power lines.

1.9. Test Procedure(s)

The measurement procedures described in the American National Standard of Procedure for Compliance Testing of unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 15.247 Meas Guidance v05r02 were used in the measurement of the DUT.

1.10. Sample Calculation

Where relevant, the following sample calculation is provided:

1.10.1. Conducted Test

Offset value (dB) = Directional coupler (dB) + Cable loss (dB)

1.10.2. Radiation Test

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) - Amplifier gain (dB) + Duty factor (dB)

1.11. Information of software for test

- Operating software of EUT has integrated test interface. No additional software was used.

1.12. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL003955	2023.03.31	Initial

1.13. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty	
Maximum Peak Conducted Output Power	0.33 dB	
99 & Bnadwidth	6.89 kHz	
20 dB Bandwidth	6.79 kHz	
Conducted Spurious Emission	0.87 dB	
Time of Occupancy	0.02 ms	
Radiated Emission, 9 kHz to 30 MHz	H	3.40 dB
	V	3.40 dB
Radiated Emission, below 1 GHz	H	4.50 dB
	V	5.10 dB
Radiated Emission, above 1 GHz	H	3.70 dB
	V	3.90 dB

All measurement uncertainty values are shown with a coverage factor $k = 2$ to indicate a 95 % level of confidence.

1.14. Device Capabilities

Mode	SISO		MIMO	
	Ant.1	Ant.2	Ant.1	Ant.2
Bluetooth	O	X	X	X
Bluetooth Low Energy	O	X	X	X
WLAN2	X	O	X	X
WLAN5	O	O	O	O

1.15. Information of Variant Models

Model Name		Description					
		HMC P/N	Vehicle Type	LG P/N	Navigation	Tuner	Market
Basic Model		96560-T1AD0	RG3 FL	NSHKJNNG2D6	O	SXM/HD	USA
		96560-T6EA0	JX FL	NSHKJNNG2C1	O	DMB	Korea
Variant Models	CCIC2	96560-T6EB0	JX FL	NSHKJNNG2CY	O	DAB	Australia
		96560-T6EC0	JX FL	NSHKJNNG2C5	O	SXM/HD	Canada
		96560-T6ED0	JX FL	NSHKJNNG2CM	O	SXM/HD	USA
		96560-T6EE0	JX FL	NSHKJNNG2CN	O	X	China
		96560-T6FA0	JX FL	ASHKJNNG2C1	X	X	RoW
		96560-T6FB0	JX FL	ASHKJNNG2C2	X	DRM	India
		96560-T6FD0	JX FL	ASHKJNNG2C3	X	HD	Mexico
		96560-T6FE0	JX FL	ASHKJNNG2C4	X	X	Iran
		96560-T6FF0	JX FL	ASHKJNNG2C5	X	X	Israel
		96560-T6GA0	JX FL	NSHKJNNG2C2	O	X	Middle East
		96560-T6GB0	JX FL	NSHKJNNG2CZ	O	DAB	UAE/Saudi Arabia
		96560-T6GC0	JX FL	ASHKJNNG2C6	X	X	Middle East
		96560-T6HA0	JX FL	NSHKJNNG2CJ	O	DAB	Europe
		96560-T6HB0	JX FL	ASHKJNNG2C7	X	DAB	Europe
		96560-T6HC0	JX FL	NSHKJNNG2C0	O	X	Europe
		96560-T6HD0	JX FL	ASHKJNNG2C8	X	X	Europe
		96560-T6FC0	JX FL	ASHKJNNG2CH	X	X	Brazil
		96560-T1AA0	RG3 FL	NSHKJNNG2D1	O	DMB	Korea
		96560-T1AB0	RG3 FL	NSHKJDNG2D1	O	DAB	Australia
		96560-T1AC0	RG3 FL	NSHKJNNG2D5	O	SXM/HD	Canada
		96560-T1AE0	RG3 FL	NSHKJNNG2D7	O	X	China
		96560-T1BA0	RG3 FL	ASHKJNNG2D1	X	X	RoW
		96560-T1BB0	RG3 FL	ASHKJNNG2D2	X	DRM	India
		96560-T1FC0	RG3 FL	NSHKJNNG2DI	X	X	Brazil
		96560-T1BD0	RG3 FL	ASHKJNNG2D3	X	HD	Mexico
		96560-T1BE0	RG3 FL	ASHKJNNG2D4	X	X	Iran
		96560-T1BF0	RG3 FL	ASHKJNNG2D5	X	X	Israel
		96560-T1CA0	RG3 FL	NSHKJNNG2D2	O	X	Middle East
		96560-T1CB0	RG3 FL	NSHKJDNG2D2	O	DAB	UAE/Saudi Arabia
		96560-T1CC0	RG3 FL	ASHKJNNG2D6	X	X	Middle East
		96560-T1DA0	RG3 FL	NSHKJNNG2D3	O	DAB	Europe
		96560-T1DB0	RG3 FL	ASHKJNNG2D7	X	DAB	Europe
		96560-T1DC0	RG3 FL	NSHKJNNG2D8	O	X	Europe_Russia
		96560-T1DD0	RG3 FL	ASHKJNNG2D8	X	X	Europe_Kazakhstan
		96560-ARKA0	JK FL	NSHKJNNG2DJ	O	DMB	Korea
		96560-ARAA0	JK FL	NSHKJDNG2D5	O	DAB	Australia
		96560-ARNB0	JK FL	NSHKJNNG2DN	O	SXM/HD	Canada
		96560-ARCA0	JK FL	NSHKJNNG2DP	O	X	China
		96560-ARGA0	JK FL	ASHKJNNG2DH	X	X	General
		96560-ARGB0	JK FL	ASHKJNNG2DI	X	DRM	India
		96560-AREDO	JK FL	ASHKJNNG2DJ	X	HD	Mexico
		96560-AREE0	JK FL	ASHKJNNG2DK	X	X	Iran
		96560-AREFO	JK FL	ASHKJNNG2DL	X	X	Israel
		96560-ARMA0	JK FL	NSHKJNNG2DK	O	X	Middle East
		96560-ARMB0	JK FL	NSHKJDNG2D6	O	DAB	UAE/Saudi Arabia
		96560-ARMC0	JK FL	ASHKJNNG2DM	X	X	Middle East
96560-AREA0	JK FL	NSHKJNNG2DL	O	DAB	Europe		
96560-AREB0	JK FL	ASHKJDNG2D1	X	DAB	Europe		
96560-ARRA0	JK FL	NSHKJNNG2DQ	O	X	Russia		
96560-AREC0	JK FL	ASHKJNNG2DN	X	X	Europe		
96560-IYNA0	JK FL	NSHKJNNG2DO	O	SXM/HD	USA		

Note;

- All the test was performed with basic model.
- Basic model and Variant model have the same name, but they are classified by P/N for internal management.
- HMC P/N: 96560-#####, the symbol "#" in the Variant P/N can be 0 to 9 or A to Z.
- LG P/N: NSHKJ#NG2## and ASHKJ#NG2##, the symbol "#" in the Variant P/N can be 0 to 9 or A to Z.

- Monitor Information

Vehicle Type	Product	AV/AVN/Monitor	Market	HKMC P/N	LG P/N	Note
JX FL	CCIC27 POLED Monitor	LHD	Canada/USA	940M3-T6000	COHK27DG1C0	SPK O
JX FL	CCIC27 POLED Monitor	LHD	Outside of North America	940M3-T6100	COHK27DG1C0	SPK X
JX FL	CCIC27 POLED Monitor	LHD	Outside of North America	940M3-T6150	COHK27DG1C0	SPK X
JX FL	CCIC27 POLED Monitor	RHD	Outside of North America	940M3-T6200	COHK27DG1C1	SPK X
JX FL	CCIC27 POLED Monitor	RHD	Outside of North America	940M3-T6250	COHK27DG1C1	SPK X
RG3 FL	CCIC27 POLED Monitor	LHD	North America	940M3-T1AB0	COHK27DG1D0	SPK O
RG3 FL	CCIC27 POLED Monitor	LHD	Outside of North America	940M3-T1AA0	COHK27DG1D0	SPK X
RG3 FL	CCIC27 POLED Monitor	LHD	Outside of North America	940M3-T1AC0	COHK27DG1D0	SPK X
RG3 FL	CCIC27 POLED Monitor	RHD	Outside of North America	940M3-T1BA0	COHK27DG1D1	SPK X
RG3 FL	CCIC27 POLED Monitor	RHD	Outside of North America	940M3-T1BB0	COHK27DG1D1	SPK X
JX FL	CCIC27 POLED Monitor	LHD	North America	96525-AR700	COHK27DG1D0	SPK X
JX FL	CCIC27 POLED Monitor	LHD	Outside of North America	96525-AR500	COHK27DG1D0	SPK X
JX FL	CCIC27 POLED Monitor	LHD	Outside of North America	96525-AR550	COHK27DG1D0	SPK X
JX FL	CCIC27 POLED Monitor	RHD	Outside of North America	96525-AR600	COHK27DG1D2	SPK X
JX FL	CCIC27 POLED Monitor	RHD	Outside of North America	96525-AR650	COHK27DG1D2	SPK X
JX FL	CCIC27 POLED Monitor	LHD	North America	-	COHK27DE1D0	SPK O
JX FL	CCIC27 POLED Monitor	LHD	Outside of North America	-	COHK27DE1D0	SPK X
JX FL	CCIC27 POLED Monitor	RHD	Outside of North America	-	COHK27DG1D3	SPK X

Note;

- LG P/N: COHK27D#1##, the symbol “#” in the part number can be 0 to 9 or A to Z
- Models other than those listed above are subject to Fuel type, production year.

1.16. Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Operation Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	RF Peak Output Power (dB m)
GFSK	1	Low	2 402	2.24
		Middle	2 441	2.08
		High	2 480	<u>2.48</u>
$\pi/4$ DQPSK	2	Low	2 402	1.80
		Middle	2 441	1.69
		High	2 480	<u>2.00</u>
8DPSK	3	Low	2 402	2.01
		Middle	2 441	1.85
		High	2 480	<u>2.20</u>

Note;


1. For transmitter radiated spurious emissions, conducted spurious emission, carrier frequency separation and number of hopping frequencies, GFSK / DH5 and 8DPSK / 3DH5 are tested as worst condition.
2. For 20 dB bandwidth and maximum peak conducted output power, GFSK / DH5, $\pi/4$ DQPSK / 2DH5 and 8DPSK / 3DH5 are tested as worst condition.
3. For Time of Occupancy, GFSK / DH1, DH3, DH5 and 8DPSK / 3DH1, 3DH3, 3DH5 are tested as worst condition.

1.17. Duty Cycle Correction Factor of EUT

According to KDB 558074 D01 15.247 Meas Guidance v05r02, 9, as a “duty cycle correction factor”, pulse averaging with 20 log (worst case dwell time / 100 ms) has to be used for average result.

3DH5 on time (One Pulse) Plot on Channel 39

3DH5 on time (Count Pulses) Plot on Channel 39

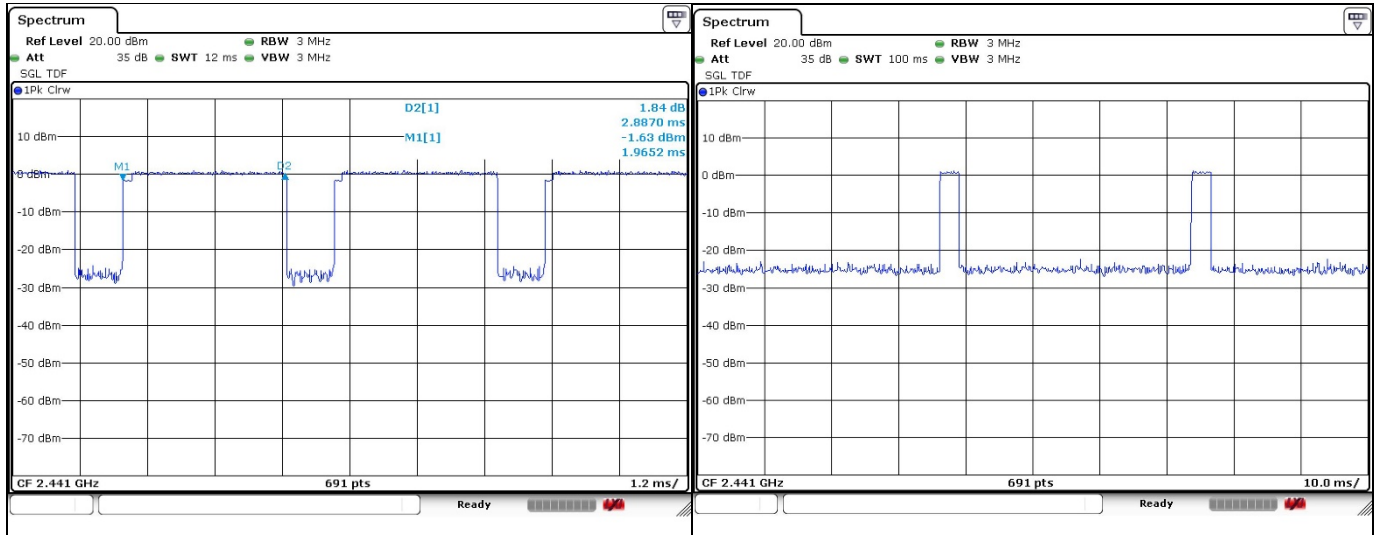

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time 3DH5 packet is observed;
 the period to have 3DH5 packet completing one hopping sequence is $2.89 \text{ ms} \times 20 \text{ channels} = 57.80 \text{ ms}$

There cannot be 2 complete hopping sequences within 100 ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.80 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time:


$$20 \times \log (5.78 \text{ ms}/100 \text{ ms}) = -24.76 \text{ dB}$$

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emissions


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz.

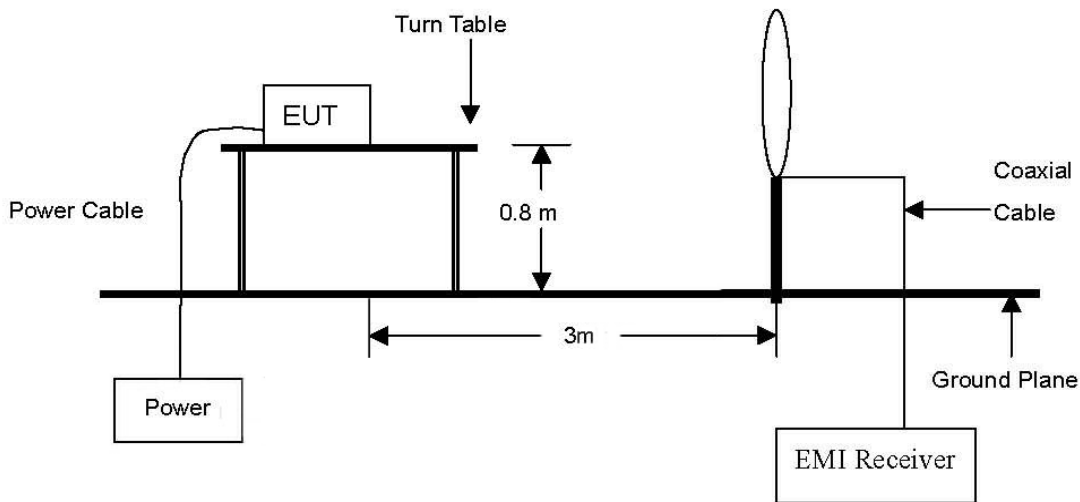


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

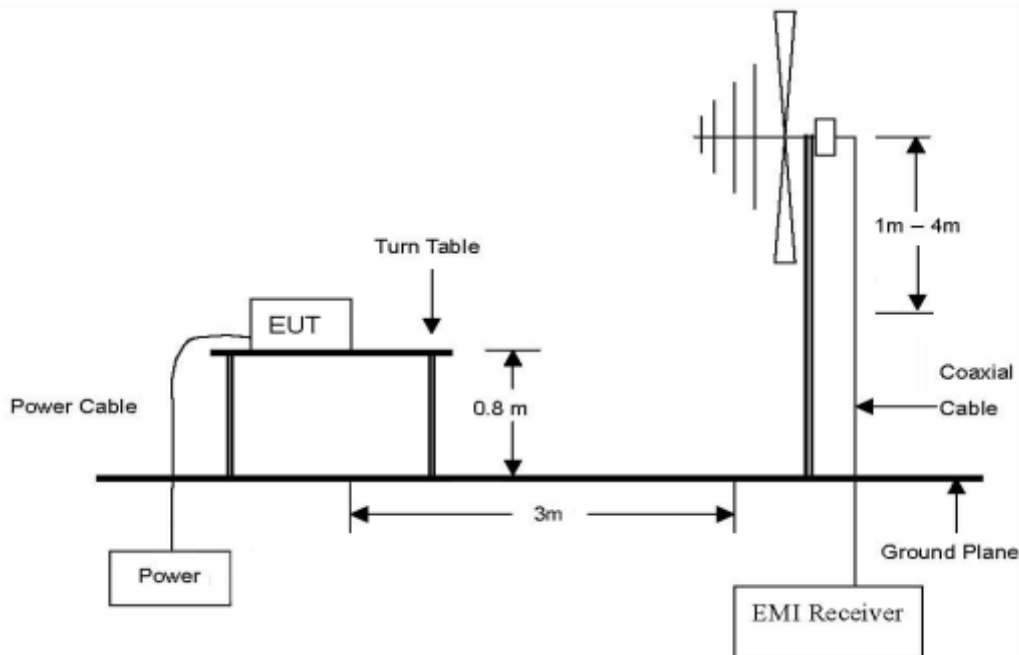

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

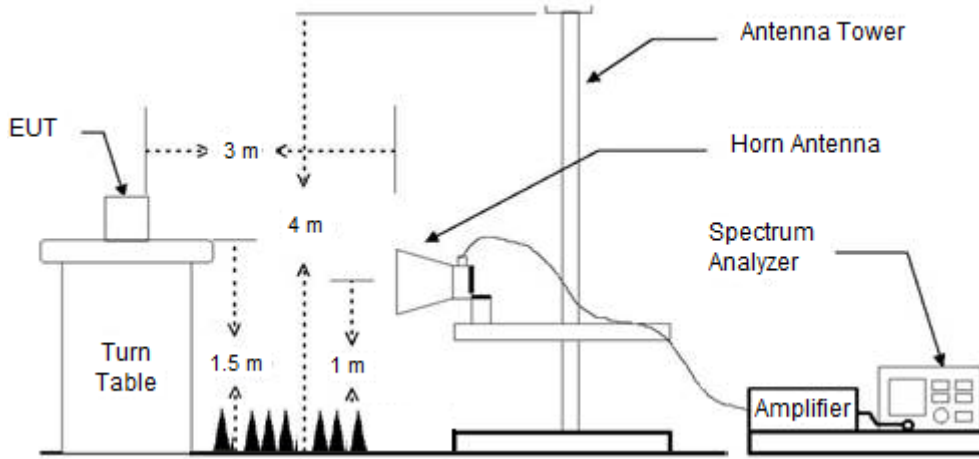

2.1.2. Conducted Spurious Emissions

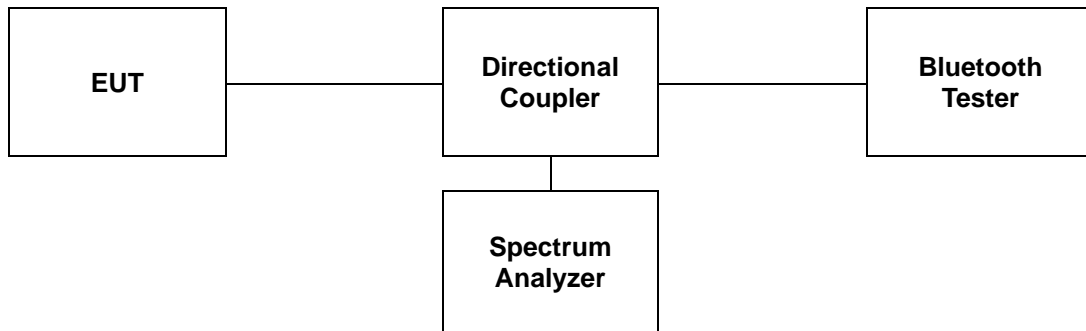

2.2. Limit

2.2.1. FCC

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (Meters)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

2.2.2. IC

According to RSS-247 Issue 2, 5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen Issue 5, 8.9, except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General Field Strength Limits at frequencies above 30 MHz

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3 m)
30-88	100
88-216	150
216-960	200
Above 960	500

Table 6 – General Field Strength Limits at frequencies below 30 MHz

Frequency	Magnetic Field Strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement Distance (meters)
9-490 kHz ¹	6.37/F (F in kHz)	300
490-1 705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

Note¹: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10-2013.

2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site below 1 GHz and 1.5 meter above the ground at a 3 meter anechoic chamber test site above 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. For measurements below 1 GHz resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.
6. For measurements Above 1 GHz resolution bandwidth is set to 1 MHz, the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

Note;

1. Definition of DUT Axis.
The test orthogonal plan of EUT was investigated with three axis described in the test setup photo.
The X-axis was worst-case, all radiated testing of EUT was performed with X-axis.

2.3.3. Test Procedures for Conducted Spurious Emissions

2.3.3.1. Band-edge Compliance of RF Conducted Emissions

The transmitter output was connected to the spectrum analyzer.

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.

RBW \geq 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

2.3.3.2. Spurious RF Conducted Emissions

The transmitter output was connected to the spectrum analyzer.

RBW = 1 MHz

VBW = 3 MHz

Sweep = auto

Detector function = peak

Trace = max hold

2.3.3.3. TDF function

- For plots showing conducted spurious emissions from 9 kHz to 25 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as TDF function.

So, the reading values shown in plots were final result.

2.4. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

2.4.1. Radiated Spurious Emission below 1 000 MHz


The frequency spectrum from 9 kHz to 1 000 MHz was investigated. All reading values are peak values.

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
58.90	31.80	Peak	V	18.62	-27.29	23.13	40.00	16.87
125.38	37.40	Peak	H	15.12	-26.64	25.88	43.50	17.62
150.93	38.00	Peak	V	13.89	-26.71	25.18	43.50	18.32
431.66	36.80	Peak	H	22.10	-25.68	33.22	46.00	12.78
881.66	36.80	Peak	H	27.70	-25.50	39.00	46.00	7.00
Above 900.00	Not detected	-	-	-	-	-	-	-

Remark;

- Spurious emissions for all channels and modes were investigated and almost the same below 1 GHz.
- Test from 30 MHz to 1 000 MHz was performed using the software of EP5RE(V5.3.70) from TOYO.
- Reported spurious emissions are in **BDR / DH5 / High channel** as worst case among other modes.
- Radiated spurious emission measurement as below.
(Actual = Reading + AF + AMP + CL)
- According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

- Test plot

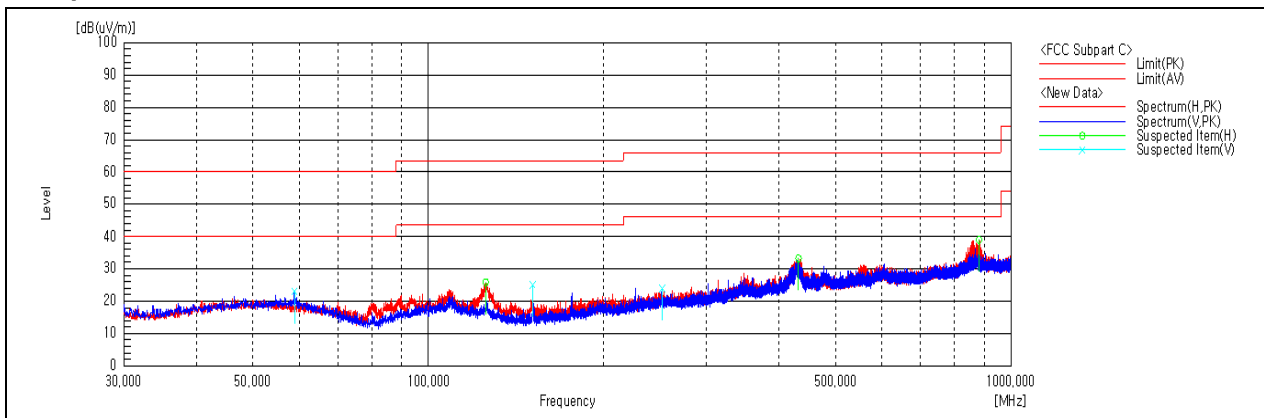

2.4.2. Radiated Spurious Emission above 1 000 MHz

The frequency spectrum above 1 000 MHz was investigated. All reading values are peak values.

Operating Mode: GFSK

A. Low Channel (2 402 MHz)

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 310.00	25.11	Peak	H	27.80	6.37	-	59.28	74.00	14.72
*2 310.00	-	Average	-	27.80	6.37	-24.76	34.52	54.00	19.48
*2 357.75	26.77	Peak	H	27.85	6.45	-	61.07	74.00	12.93
*2 357.75	-	Average	-	27.85	6.45	-24.76	36.31	54.00	17.69
*2 390.00	25.11	Peak	H	28.04	6.63	-	59.78	74.00	14.22
*2 390.00	-	Average	-	28.04	6.63	-24.76	35.02	54.00	18.98

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

B. Middle Channel (2 441 MHz)

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

C. High Channel (2 480 MHz)

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	24.77	Peak	H	28.13	6.35	-	59.25	74.00	14.75
*2 483.50	-	Average	-	28.13	6.35	-24.76	34.49	54.00	19.51
*2 490.83	27.29	Peak	H	28.12	6.34	-	61.75	74.00	12.25
*2 490.83	-	Average	-	28.12	6.34	-24.76	36.99	54.00	17.01
*2 500.00	24.97	Peak	H	28.10	6.32	-	59.39	74.00	14.61
*2 500.00	-	Average	-	28.10	6.32	-24.76	34.63	54.00	19.37

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

Operating Mode: 8DPSK

A. Low Channel (2 402 MHz)

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 310.00	24.19	Peak	H	27.80	6.37	-	58.36	74.00	15.64
*2 310.00	-	Average	-	27.80	6.37	-24.76	33.60	54.00	20.40
*2 376.45	26.17	Peak	H	27.96	6.51	-	60.64	74.00	13.36
*2 376.45	-	Average	-	27.96	6.51	-24.76	35.88	54.00	18.12
*2 390.00	24.87	Peak	H	28.04	6.63	-	59.54	74.00	14.46
*2 390.00	-	Average	-	28.04	6.63	-24.76	34.78	54.00	19.22

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

B. Middle Channel (2 441 MHz)

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

C. High Channel (2 480 MHz)

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	25.34	Peak	H	28.13	6.35	-	59.82	74.00	14.18
*2 483.50	-	Average	-	28.13	6.35	-24.76	35.06	54.00	18.94
*2 489.22	27.22	Peak	H	28.12	6.34	-	61.68	74.00	12.32
*2 489.22	-	Average	-	28.12	6.34	-24.76	36.92	54.00	17.08
*2 500.00	26.04	Peak	H	28.10	6.32	-	60.46	74.00	13.54
*2 500.00	-	Average	-	28.10	6.32	-24.76	35.70	54.00	18.30

Radiated Emissions			Ant.	Correction Factors			Total	Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	DF (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Above 1 000.00	Not detected	-	-	-	-	-	-	-	-

Remark;



1. "*" means the restricted band.
2. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
4. Actual = Reading + AF + CL + (DF) or Reading + AF + AMP + CL + (DF).
5. According to § 15.31(o), emission levels are not reported much lower than the limits by over 20 dB.
6. The maximized peak measured value complies with the average limit, to perform an average measurement is unnecessary.

- Test plots

Operating Mode: GFSK

Low channel band edge (Peak)



High channel band edge (Peak)

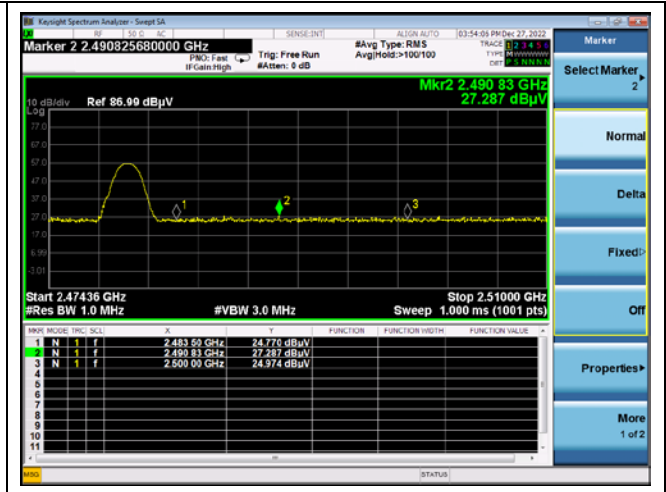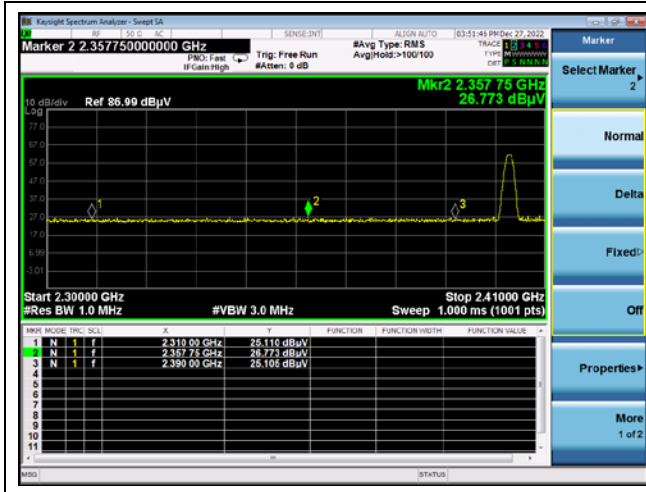


Operating Mode: 8DPSK

Low channel band edge (Peak)


High channel band edge (Peak)

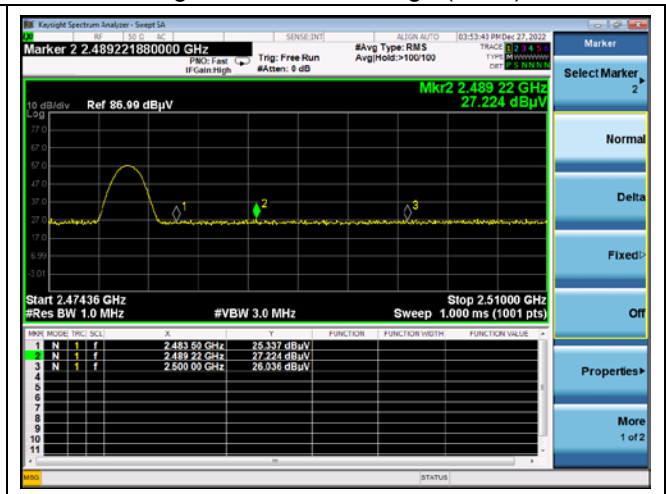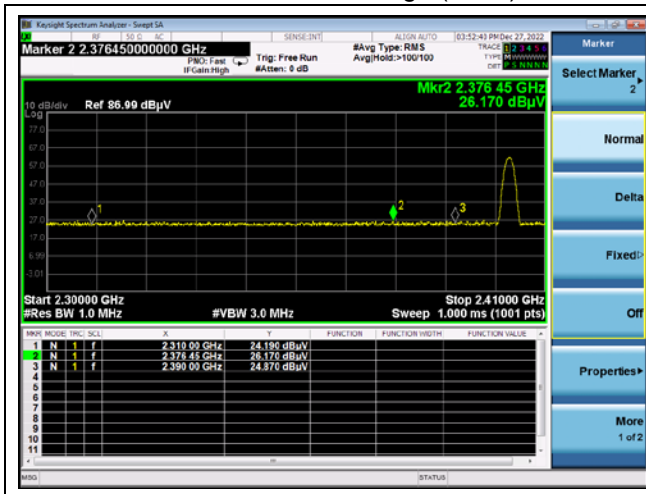


2.4.3. Plot of Spurious Conducted Emissions
Operating Mode: GFSK_hopping function turned off
 Low channel

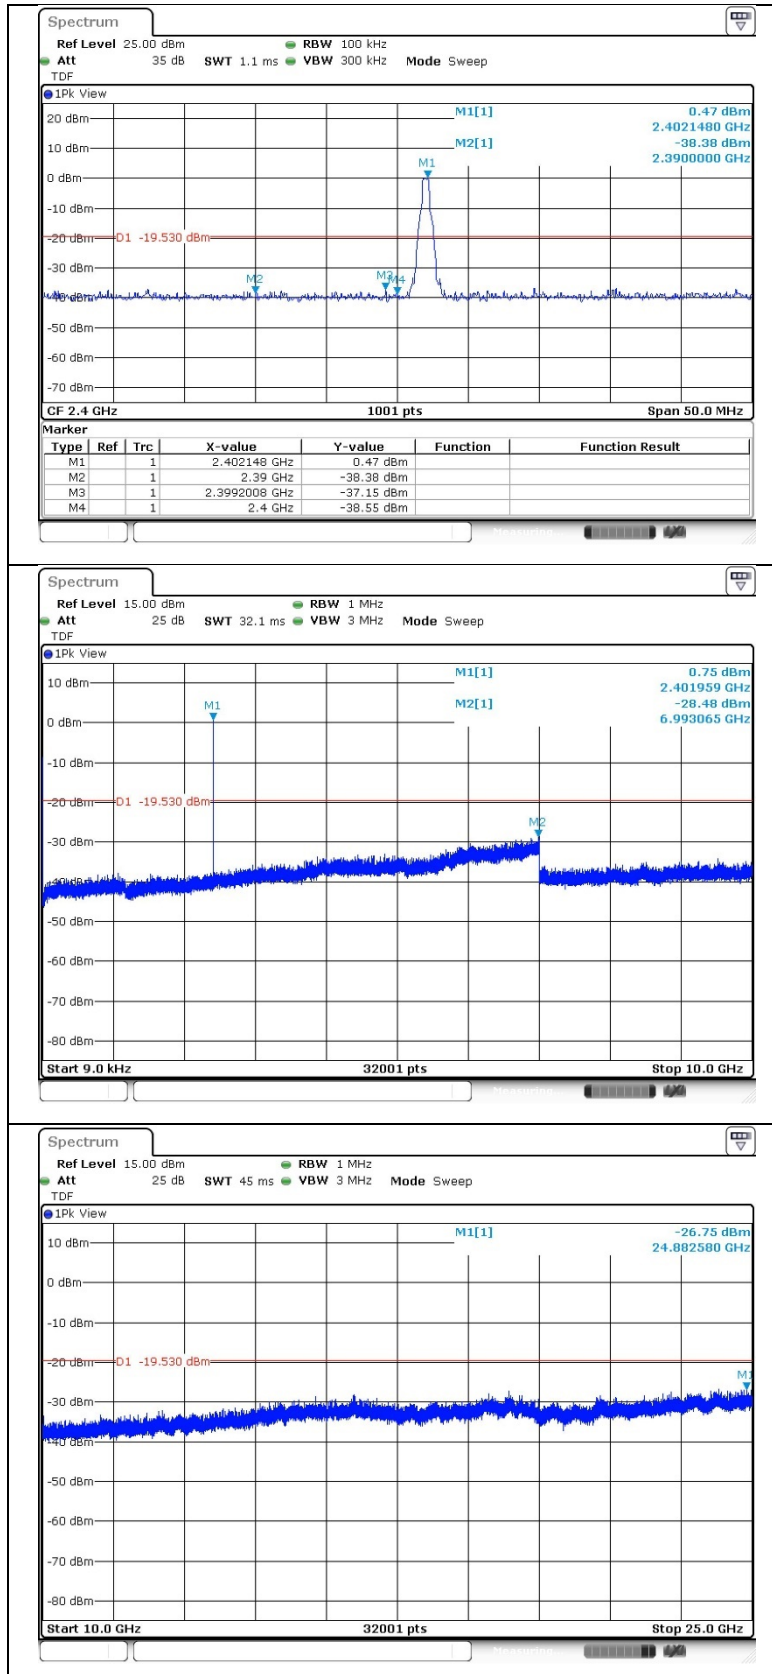


Middle channel

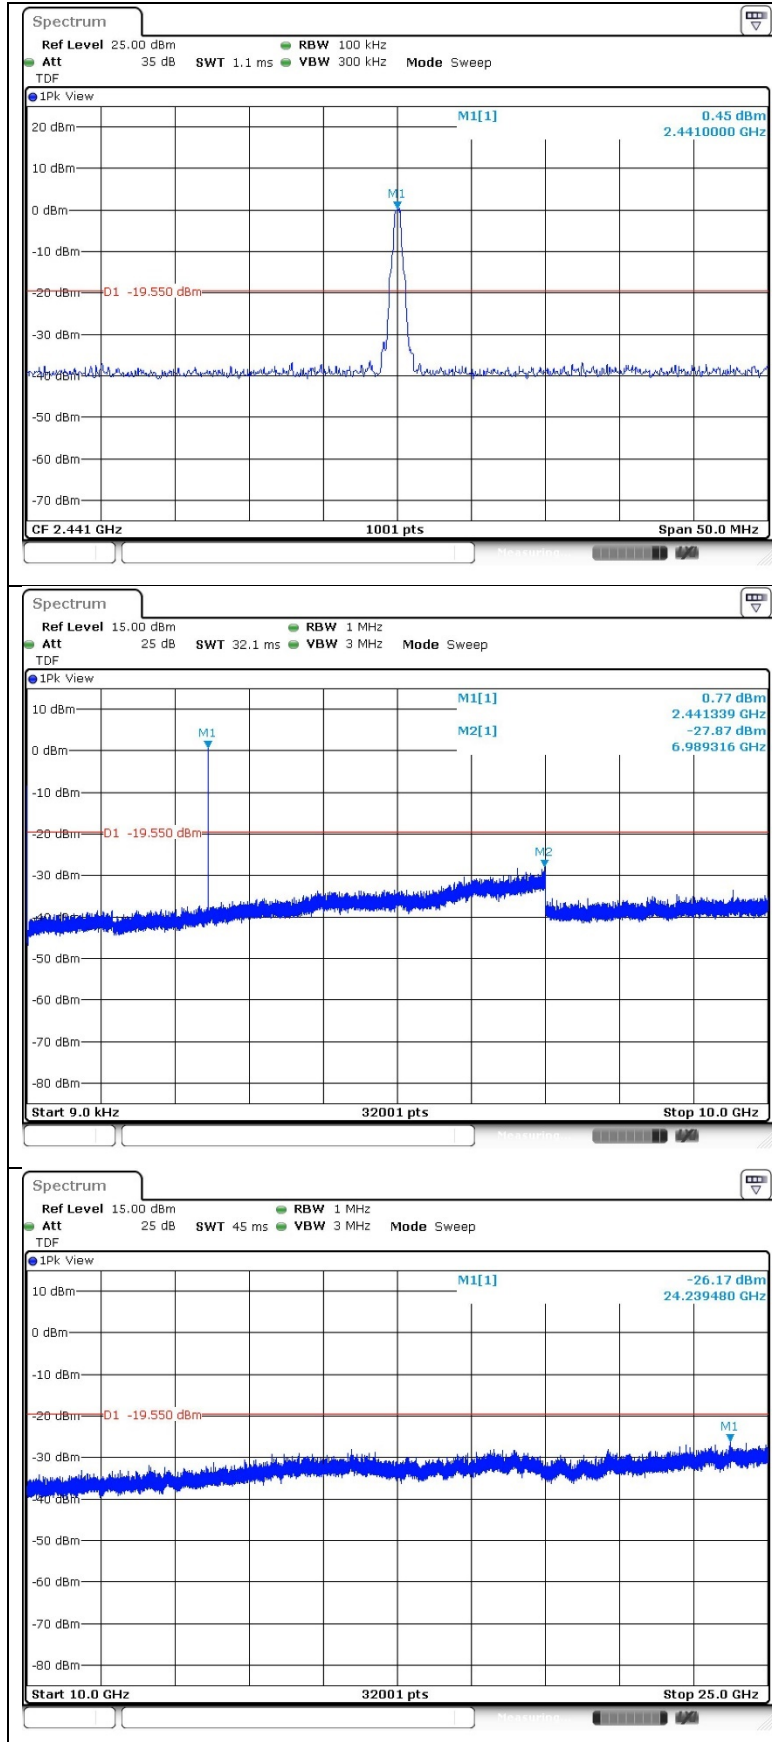


High channel

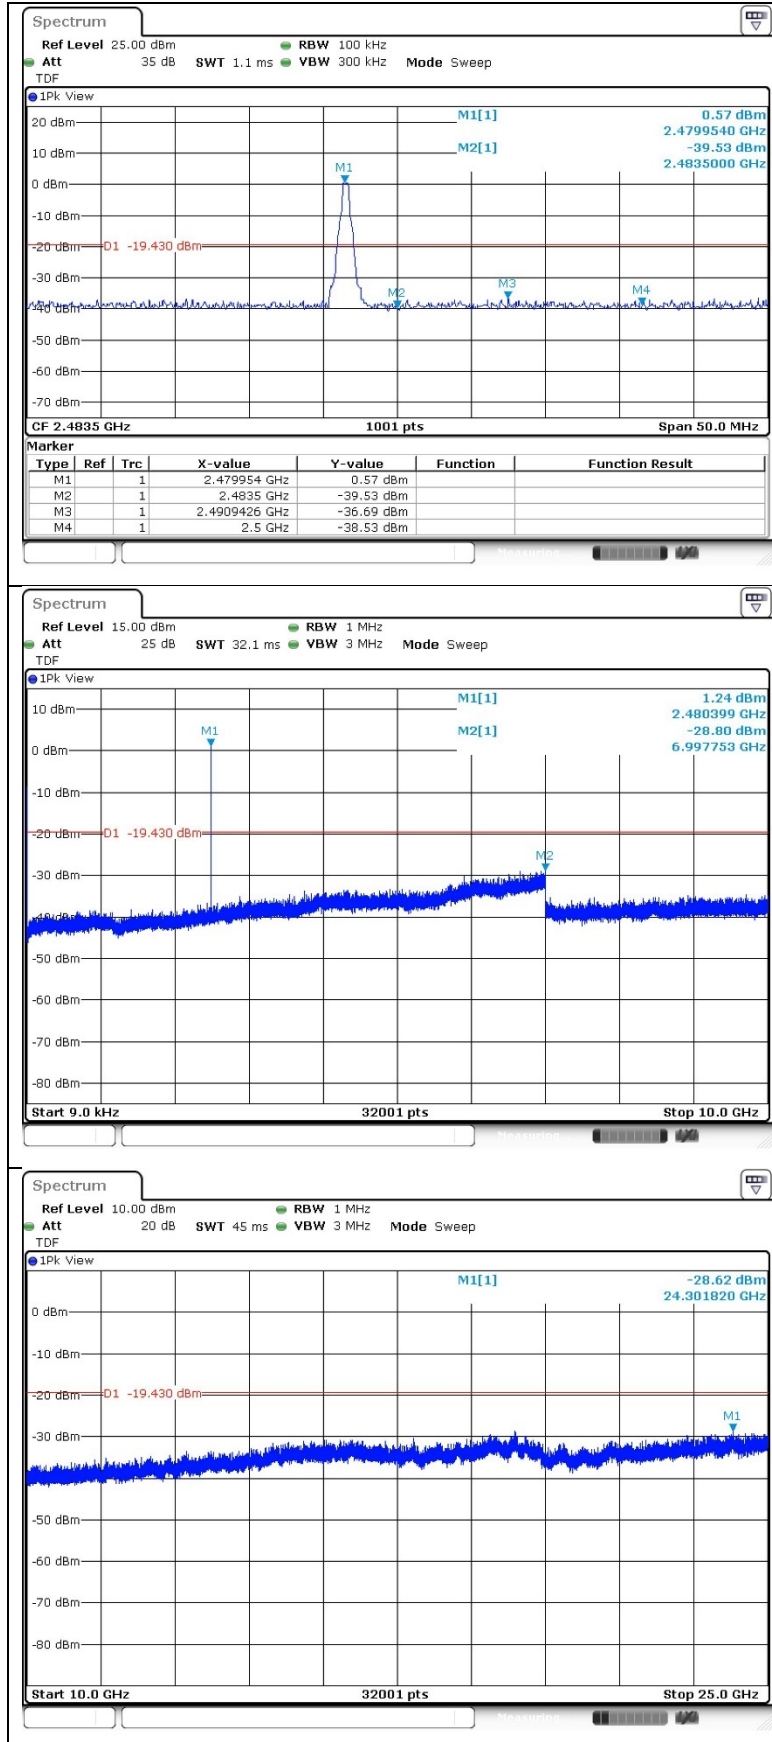


Operating Mode: GFSK_hopping function turned on
Band edge compliance
 Low channel

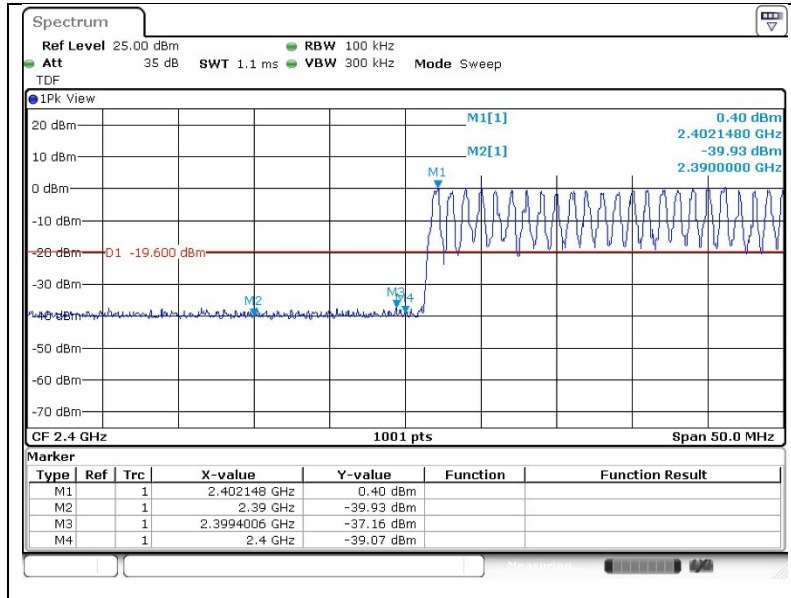

High channel

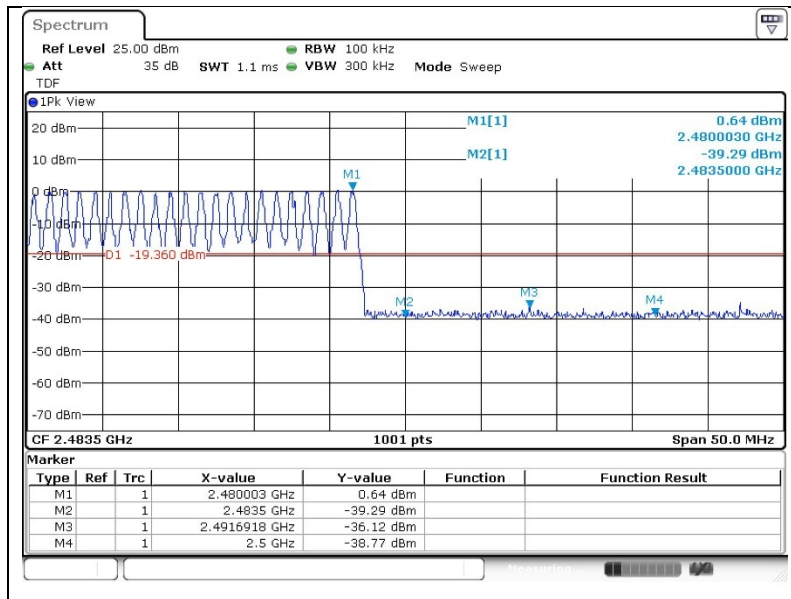

Operating Mode: 8DPSK_hopping function turned off
 Low channel

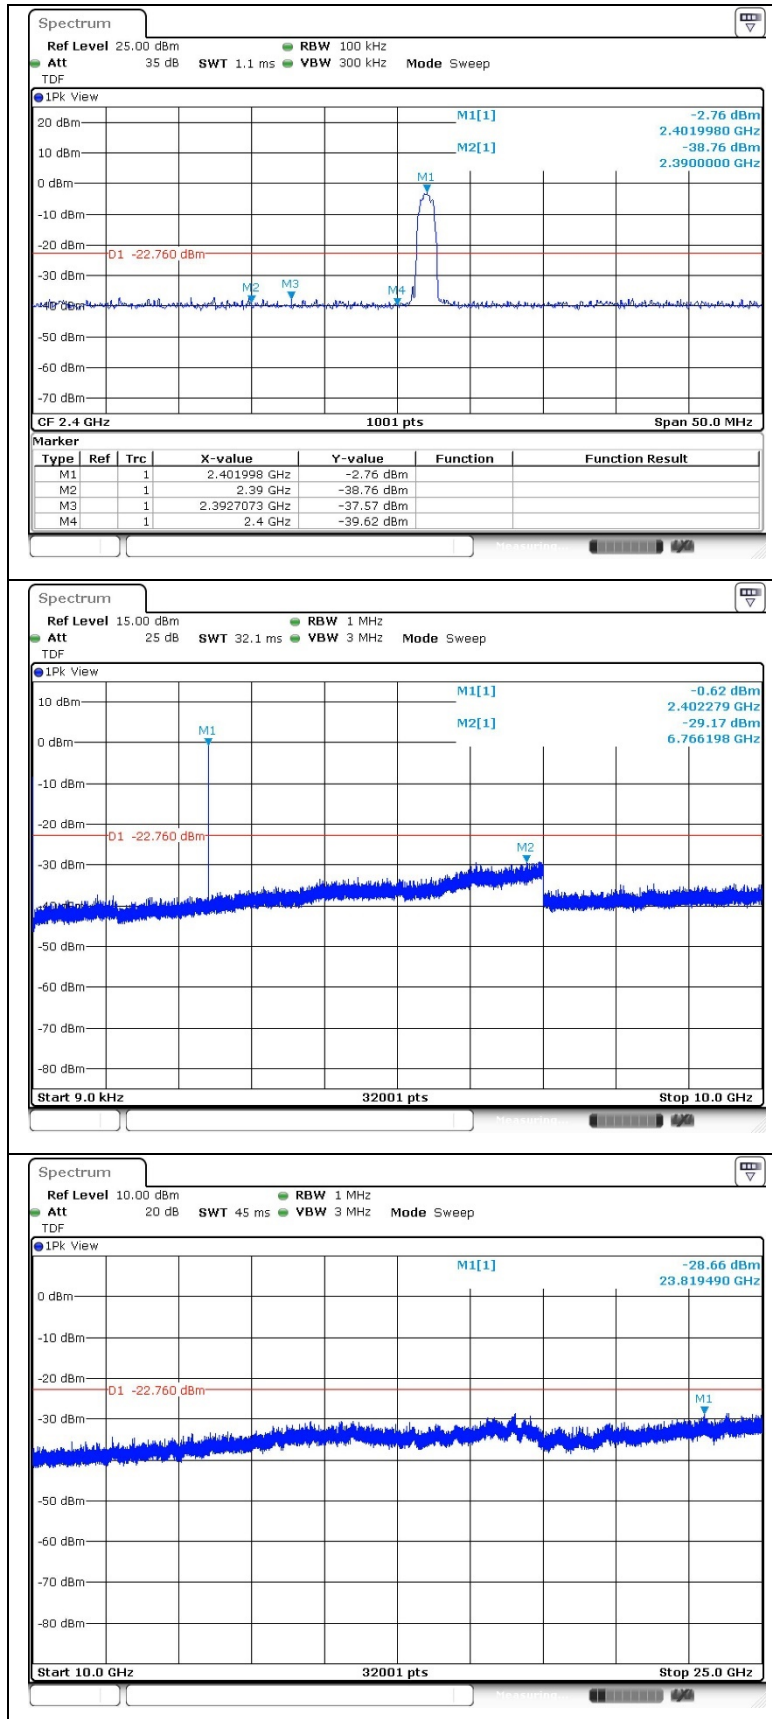

Middle channel

