

HCT CO., LTD.



PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8539 FAX : +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

Applicant:
LG Electronics Inc.
60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea

Date of Issue: May 25, 2010
Test Report No.: HCTE1005FE29
Test Site: HCT CO., LTD.
HCT FRN: 0005-8664-21

FCC ID:

BEJGD570

Rule Part(s) / Standard(s)	: FCC PART 15 Subpart B / CISPR 22 Class B
Equipment Type	: Cellular/PCS GSM/EDGE & WCDMA FDD IV Phone with Bluetooth
Trade Name /	: LG Electronics Inc.
Model(s) Name	: GD570, LG-GD570, GD570AQ, GD570PK, GD570LE
Port / Connector(s)	: USB Data Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

Report prepared by
: Dong Sup Kim
Test Engineer of EMC Tech. Part

Approved by
: Nam Wook Kang
Manager of EMC Tech. Part

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details	4
1.4 Cable description	5
1.5 Noise suppression parts on cable. (I/O cable)	5
1.6 Test methodology	6
1.7 Test facility	6
1.8 Frequency Range of Radiated Measurements	6
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	7
3. PRELIMINARY TEST	
3.1 Conducted Emission test	8
3.2 Radiated Emission test	8
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	9
4.2 Radiated Emission test	14
5. FIELD STRENGTH CALCULATION	15
6. TEST EQUIPMENT	16
7. CONCLUSION	17

ATTACHMENT : TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test (E.U.T) is **Cellular/PCS GSM/EDGE & WCDMA FDD IV Phone with Bluetooth**, Model: **GD570, LG-GD570, GD570AQ, GD570PK, GD570LE** manufactured by **LG Electronics Inc.** Its basic purpose is used for communications.

Model	GD570, LG-GD570, GD570AQ, GD570PK, GD570LE
FCC ID	BEJGD570
E.U.T Type	Cellular/PCS GSM/EDGE & WCDMA FDD IV Phone with Bluetooth
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 1 711.25 MHz to 1 753.75 MHz (AWS 1 700)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 2 111.25 MHz to 2 153.75 MHz (AWS 1 700)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Part Number	FCC ID / DoC	Connected To
Cellular/PCS GSM/ EDGE & WCDMA FDD IV Phone with Bluetooth	LG	GD570	BEJGD570	Notebook PC
Notebook PC	HP	Compaq6730b	DoC	E.U.T
Notebook PC adaptor	Hipro Electronics Co., Ltd.	PPP014Y-S	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
Cellular/PCS GSM/ EDGE & WCDMA FDD IV Phone with Bluetooth	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/ EDGE & WCDMA FDD IV Phone with Bluetooth	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Ichon-si, Kyoungki-do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

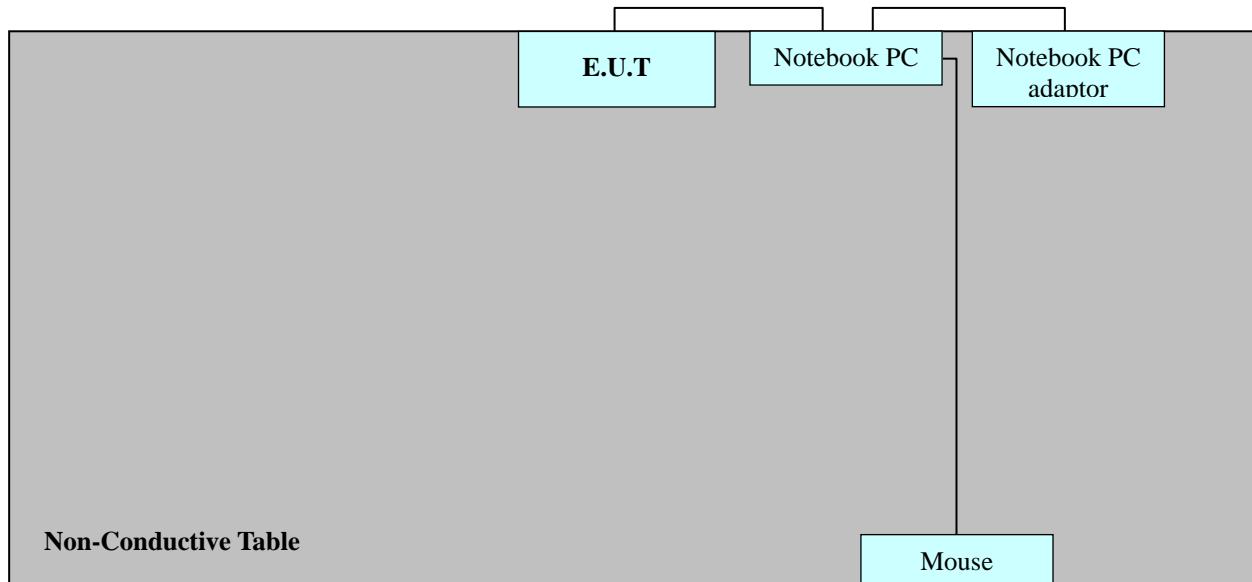
2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor.
Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]



Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- Test E.U.T with Data Communication between E.U.T and laptop, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	<input type="radio"/>

3. 2 Radiated Emission Test

- Test E.U.T with Data Communication between E.U.T and laptop, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	<input type="radio"/>

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 6.4 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 26.4 °C
Humidity level	: 35.9 %
Test date	: May 18, 2010

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
3.9880	44.7	HOT	Quasi-Peak	56.0	11.3
4.0240	39.5	NEUTRAL	Average	46.0	6.5
4.1520	39.6	HOT	Average	46.0	6.4
4.2880	44.8	NEUTRAL	Quasi-Peak	56.0	11.2

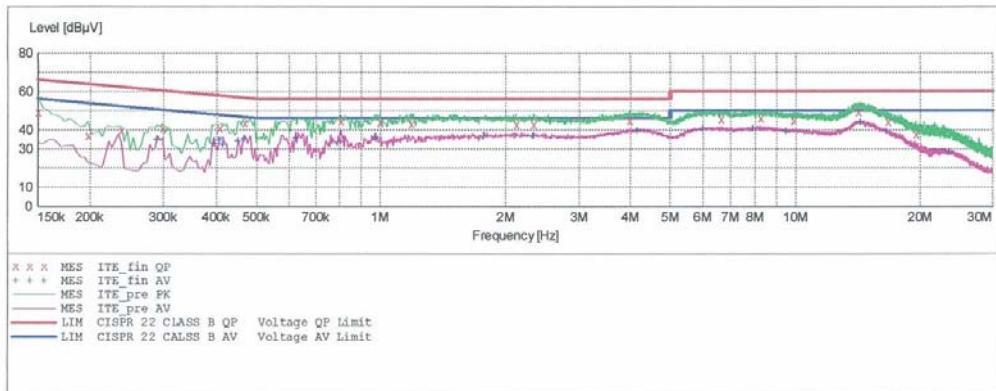
* **NOTE:** Refer to page 10 to page 13 for details.

HCT
EMC

EUT: GD570
 Manufacturer: LG ELECTRONICS
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: DS.KIM
 Test Specification: CISPR22 CLASS B
 Comment: H

SCAN TABLE: "CISPR22 CLASS B"

Short Description:			CISPR22 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			


MEASUREMENT RESULT: "ITE_fin QP"

5/18/2010 10:33AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.150001	49.00	10.1	66	17.0	---	---
0.198001	36.90	10.0	64	26.8	---	---
0.238001	39.60	10.0	62	22.6	---	---
0.298001	40.70	10.0	60	19.6	---	---
0.406001	41.00	10.1	58	16.7	---	---
0.466001	43.60	10.1	57	13.0	---	---
0.804000	44.40	10.1	56	11.6	---	---
1.000000	43.80	10.1	56	12.2	---	---
1.188000	43.10	10.1	56	12.9	---	---
2.116000	43.00	10.2	56	13.0	---	---
2.332000	42.90	10.2	56	13.1	---	---
3.988000	44.70	10.3	56	11.3	---	---
6.636000	45.40	10.6	60	14.6	---	---
8.240000	45.90	10.7	60	14.1	---	---
9.880000	44.60	10.8	60	15.4	---	---

MEASUREMENT RESULT: "ITE_fin AV"

5/18/2010 10:33AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line dB	PE
0.290001	34.90	10.0	51	15.6	----	----
0.394001	32.70	10.1	48	15.3	----	----
0.406001	34.50	10.1	48	13.2	----	----
0.414001	32.30	10.1	48	15.3	----	----
0.450001	34.10	10.1	47	12.8	----	----
0.466001	35.30	10.1	47	11.3	----	----
0.624000	35.50	10.1	46	10.5	----	----
0.804000	33.90	10.1	46	12.1	----	----
0.976000	35.90	10.1	46	10.1	----	----
1.772000	36.50	10.1	46	9.5	----	----
2.332000	36.80	10.2	46	9.2	----	----
4.152000	39.60	10.4	46	6.4	----	----
6.008000	40.30	10.5	50	9.7	----	----
7.908000	40.60	10.7	50	9.4	----	----
9.488000	39.40	10.8	50	10.6	---	----

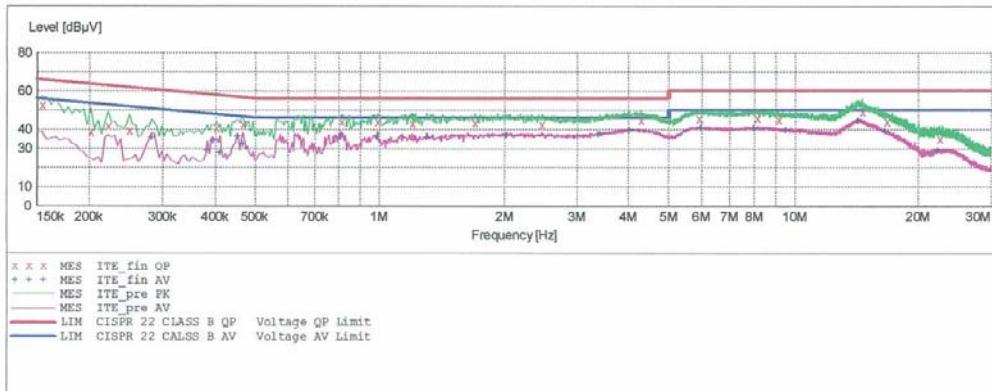
HCT**EMC**

EUT: GD570
Manufacturer: LG ELECTRONICS
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DS.KIM
Test Specification: CISPR22 CLASS B
Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Short Description: CISPR22 CLASS B

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			

**MEASUREMENT RESULT: "ITE_fin QP"**

5/18/2010 10:28AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.154001	52.50	10.1	66	13.3	---	---
0.202001	38.50	10.0	64	25.1	---	---
0.222001	41.80	10.0	63	20.9	---	---
0.250001	39.30	10.0	62	22.5	---	---
0.402001	40.80	10.1	58	17.0	---	---
0.466001	42.80	10.1	57	13.8	---	---
0.812000	44.20	10.1	56	11.8	---	---
0.992000	43.80	10.1	56	12.2	---	---
1.204000	43.10	10.1	56	12.9	---	---
1.696000	43.20	10.1	56	12.8	---	---
2.464000	42.60	10.2	56	13.4	---	---
4.288000	44.80	10.4	56	11.2	---	---
5.916000	45.70	10.5	60	14.3	---	---
8.128000	45.80	10.7	60	14.2	---	---
9.152000	45.00	10.7	60	15.0	---	---

MEASUREMENT RESULT: "ITE_fin AV"

5/18/2010 10:28AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.282001	35.80	10.0	51	14.9	----	---
0.382001	29.40	10.1	48	18.9	----	---
0.394001	33.90	10.1	48	14.1	----	---
0.410001	28.00	10.1	48	19.6	----	---
0.454001	36.40	10.1	47	10.4	----	---
0.466001	32.20	10.1	47	14.4	----	---
0.808000	35.80	10.1	46	10.2	----	---
0.992000	36.10	10.1	46	9.9	----	---
1.304000	35.90	10.1	46	10.1	----	---
2.024000	36.90	10.2	46	9.1	----	---
3.384000	37.40	10.3	46	8.6	----	---
4.024000	39.50	10.3	46	6.5	----	---
5.980000	40.60	10.5	50	9.4	----	---
7.972000	40.70	10.7	50	9.3	----	---
9.512000	39.50	10.8	50	10.5	----	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 4.4 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 17.0 °C
Humidity level	: 68.0 %
Test date	: May 24, 2010

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ N	dB/m	dB	(H/V)	dB μ N/m	dB μ N/m	dB
59.1	22.7	12.1	0.8	V	35.6	40.0	4.4
144.4	17.1	12.5	1.3	V	30.9	43.5	12.6
180.3	13.2	11.5	1.4	H	26.1	43.5	17.4
288.0	16.3	12.7	1.8	H	30.8	46.0	15.2
435.4	17.7	16.2	2.2	H	36.1	46.0	9.9
534.4	14.6	18.0	2.5	V	35.1	46.0	10.9

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
-------------	---------------------	---------------------	----------------------

Conducted Emission

<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	2011.02.19
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	2011.02.05
<input type="checkbox"/> LISN	Rohde & Schwarz	ENV216	2011.04.06
<input checked="" type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	2010.10.30

Radiated Emission

<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	2010.10.30
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
<input checked="" type="checkbox"/> Antenna Master	HD	MA240	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060	-
<input type="checkbox"/> Communication Antenna	TDK	LPDA-0802	-
<input type="checkbox"/> Antenna Position Tower	HD	240/520/00	-
<input type="checkbox"/> Base Station	Rohde & Schwarz	CMU 200	2011.02.17
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	2012.04.13
<input checked="" type="checkbox"/> RF-Amplifier	MITEQ	AMF-6D-00101800 -35.20P.PS	2011.05.20
<input type="checkbox"/> Bluetooth Base Station	TESCOM	TC-3000A	2011.01.07

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: GD570, LG-GD570, GD570AQ, GD570PK, GD570LE, Cellular/PCS GSM/EDGE & WCDMA FDD IV Phone with Bluetooth. FCC ID: BEJGD570** complies with §15.107 and §15.109 of the FCC rules.