

# LG Electronics Inc.

## Quality & Reliability Center

36, Munlae-dong, 6-ga, Youngdungpo-gu, Seoul 150-096, Korea  
Tel : + 82 2 2630 3077~9, Fax : +82 2 2635 5543

### ***CERTIFICATION OF COMPLIANCE***

---


**Date of Issue: April 15, 2002**

**Test Report No: 00431-4521-F2055**

Applicant:	LG Electronics Inc.
Regulation:	FCC Part 15 Class B
Test procedure:	ANSI C63.4-1992
Equipment Class:	Unintentional Radiators – Digital device
EUT Type:	15" LCD Monitor
<u>Trade Name(s):</u> <i>Gateway</i>	<u>Model No.:</u> <i>FPD1530</i>


This device has been verified to comply with the applicable requirements in the FCC Part 15 and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



---

Kyeom-Soon Kim / General Manager  
Quality and Reliability Center  
LG Electronics Inc.

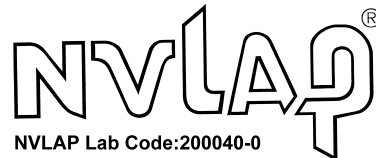

## **REPORT FOR A DIGITAL DEVICE**

---

Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

**U.S. Responsible Party:** LG Electronics USA Inc.  
**Address:** 6133 North River Road, Suite 1100 (Riverway Plaza)  
 Rosemont, IL 60018, USA

**Contact Person:** P.H.Byun, General Manager  
**Telephone No.:** (847) 692-4630 EXT.329  
**Manufacturer:** LG Electronics Inc. DID Division  
**Address:** 642 Jinpyoung-dong Kumi-City Kyongsangbuk-do,  
 730-360, Korea

**FCC ID No.:** BEJLG508J  
**EUT Class:** Unintentional Radiators - Digital device  
**EUT Type:** 15" LCD Monitor  
**Trade Name:** Gateway  
**Model No.:** FPD1530  
**Rule Part:** FCC Part 15 Class B  
**Test Procedure:** ANSI C63.4-1992  
**Date of Test:** April 11, 2002  
**Date of Receipt of EUT:** April 8, 2002  
**Date of Issue:** April 15, 2002  
**Test Report No.:** 00431-4521-F2055  
**Test Result:** **Positive**

Quality and Reliability Center authorizes the above-named applicant to reproduce this report provided it is reproduced in its entirety.

*Quality and Reliability Center reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production unit of this model are manufactured with identical electrical and mechanical components.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*

*This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.*

*The Quality and Reliability Center was accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200040-0.*


Tested by:




---

S. H. Ji / Senior Research Engineer  
 Quality and Reliability Center  
 LG Electronics Inc.

Reviewed by :

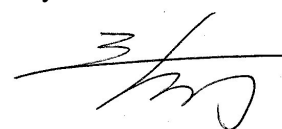


---

D. H. Lee / Research Engineer  
 Quality and Reliability Center  
 LG Electronics Inc.

# CONTENTS

	Page
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 DESCRIPTIONS OF EQUIPMENT UNDER TEST (EUT) .....	4
1.2 REGULATIONS APPLIED TO EUT .....	4
1.3 MEASUREMENT PROCEDURE .....	4
1.4 MEASUREMENT PLACE .....	4
<b>2. GENERAL TEST CONDITIONS .....</b>	<b>5</b>
2.1 OPERATING CONDITIONS OF EUT .....	5
2.2 STABILIZATION OF EUT OPERATING.....	5
2.3 TEMPERATURE AND HUMIDITY .....	5
<b>3. TEST SITE .....</b>	<b>5</b>
3.1 SEMI-ANECHOIC CHAMBER.....	5
3.2 A SHIELDED ENCLOSURE .....	5
<b>4. CALIBRATIONS OF MEASURING INSTRUMENTS .....</b>	<b>5</b>
<b>5. DESCRIPTION OF TEST CONDITION.....</b>	<b>6</b>
5.1 POWER LINE CONDUCTED EMISSION MEASUREMENTS.....	6
5.2 RADIATED EMISSIONS MEASUREMENTS .....	7
<b>6. MEASURING INSTRUMENTS AND SET-UP.....</b>	<b>8</b>
6.1 POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS .....	8
<b>7. TEST DATA .....</b>	<b>9</b>
7-1. POWER LINE CONDUCTED EMISSIONS (§15.107).....	9
7-2. RADIATED EMISSIONS (§15.109) .....	10
<b>8. LIST OF INSTRUMENTS USED .....</b>	<b>11</b>
<b>9. SUPPORT DEVICE &amp; ACCESSORIES USED.....</b>	<b>12</b>
9-1. SUPPORT DEVICE.....	12

**APPENDIX A: TEST GRAPH**

**APPENDIX B: LABELLING REQUIREMENTS**

**APPENDIX C: BLOCK DIAGRAM**

**APPENDIX D: CIRCUIT DIAGRAM**

**APPENDIX E: TEST SET-UP PHOTOGRAPHS**

**APPENDIX F: EUT PHOTOGRAPHS**

**APPENDIX G: USER'S MANUAL**

**APPENDIX H: SPECIFICATION**

## 1. GENERAL INFORMATION

### 1.1 Descriptions of equipment under test (EUT)

1.1.1 Manufacturer: LG Electronics Inc. DID Division  
 642 Jinpyoung-dong Kumi-City Kyongsangbuk-do, 730-360, Korea

1.1.2 EUT Type: 15" LCD Monitor

1.1.3 Model No.: FPD1530

1.1.4 Serial No.: KUL5065C0000001

1.1.5 Trade Name: Gateway

1.1.6 FCC ID No.: BEJLG508J

1.1.7 System characteristic and descriptions

- |                           |   |
|---------------------------|---|
| a) Max. Resolution:       | 1024 X 768 @ 75 Hz  |
| b) Sync Input:            | Horizontal Freq. 31 – 63 kHz<br>Vertical Freq. 56 – 75 Hz |
| c) Test Mode:             | Display "H" pattern on the screen                         |
| d) Power Supply:          | AC 100-240 V, 50/60 Hz, 0.6 A                             |
| e) Power Cord:            | Unshielded AC power cord                                  |
| f) Port/Input connector:  | 15 pin D-sub type connector                               |
| g) Cable:                 | 1.8 m shielded D-sub with ferrite on both ends            |
| h) Max. Video band width: | 78 MHz  |
| i) Used LCD panel:        | HT15X14-100 (Hyundai Display Technology, Inc.)            |

### 1.2 Regulations applied to EUT

- FCC Part 15 Class B
- : The limit of CISPR 22 Class B apply in this test according to part 15.107.e) and 15.109.g).

### 1.3 Measurement procedure

ANSI C63.4-1992

### 1.4 Measurement place

**LG Electronics Inc. Quality and Reliability Center**  
 36, Munlae-dong, 6-ga, Youngdungpo-gu, Seoul 150-096, Korea

## 2. GENERAL TEST CONDITIONS

The test data contained in this report were obtained by use of the measurement method recommended in FCC Rules, 47 C.F.R. § 15.31(a)(6), with equipment and at the test site filed by the Federal Communications Commission(FCC). The technical standard for a computing device is set forth in the computing devices of Part 15 of FCC Rules. The measurement for radiated emissions and power-line conducted emissions were performed in accordance with the procedures described in ANSI C63.4-1992.

### 2.1 Operating conditions of EUT

According to the requirements in the computing devices of Part 15, the measurement was made at each function of the EUT being connected with appropriate cables and peripherals. All measurement was investigated under operating conditions of clause 11.1 of ANSI C63.4-1992.

### 2.2 Stabilization of EUT operating

The EUT was operated for sufficient minutes before testing to make it stabilized in a normal operating condition. The power supplied to the EUT was filtered to meet the requirements.

### 2.3 Temperature and humidity

The measurement data in this report was obtained at the temperature in the range of 10 to 30 C and humidity in the range of 30 to 80%.

## 3. TEST SITE

### 3.1 Semi-anechoic chamber

Measurement of radiated emissions from EUT was made at semi-anechoic chamber that has been in compliance with Federal Communications Commissions (FCC) requirements of clause 2.948 according to ANSI C63.4-1992 on Jan. 29, 2001.

### 3.2 A shielded enclosure

The measurement of was made power line conducted emissions in a shielded enclosure providing sufficient shielding effectiveness.

## 4. CALIBRATIONS OF MEASURING INSTRUMENTS

All measurements were made with instruments calibrated according to the recommendation by manufacturer. Measurement of radiated emissions and power line conducted emissions were made with instruments conforming to American National Standard Specification, ANSI C63.4-1992. The calibration of measuring instrument, including any accessories that may affect test results, were performed according to the recommendation by manufacturer.

## 5. DESCRIPTION OF TEST CONDITION

### 5.1 Power line conducted emission measurements

#### 5.1.1 Shielded enclosure

The measurement for power-line emissions from EUT was made in shielded enclosure that provides sufficient shielding effectiveness enough not to affect test results.

#### 5.1.2 Detector function selection and bandwidth

During conducted emission measurement, a radio noise meter that has a CISPR quasi-peak detector with 10 kHz IF bandwidth of 6 dB was utilized.

#### 5.1.3 Frequency range to be scanned

For conducted emissions measurement, frequency range of 150 kHz to 30 MHz included, was investigated.

#### 5.1.4 Unit of measurement

Test results for conducted emissions are reported in micro-volts.

#### 5.1.5 Line impedance stabilization network (LISN)

A LISN with characteristics that conform to the requirements of ANSI C63.4-1992 was used for the measurement of conducted power-line radio noise; (50 micro-henries / 50 ohms). Chassis and earth-points for grounding of the LISN were earth-grounded.

#### 5.1.6 Test conditions and configuration of EUT

The EUT was configured and operated in all modes of operation so as to find the maximum enumeration of emissions from EUT.

The EUT has designed to use the public AC lines with rated AC voltage as specified in Owner's manual and Installation' manual of EUT and filtered to meet the requirement. AC power was supplied to the EUT through LISN with characteristics described in 5.1.5 of part I of this report.

The EUT was placed on a 1 m X 1.5 m X 80 cm high wooden table that is place on the earth-grounded conducting surface larger than 2 square meters. The vertical conducting surface was replaced with horizontal ground plane. Length of the power lead in excess of 80 cm horizontally separating the EUT from LISN was folded back-and-forth form at the center of the power cord not exceeding 40 cm in length.

Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

#### 5.1.7 Measurement uncertainty

Power line conducted emission measurements:  $\pm 3$  dB

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT in the above mentioned way.

The measurement uncertainty was calculated in accordance with NAMAS NIS 81 : The treatment of uncertainty in EMC measurement.”

The measurement uncertainty was given with a confidence of 95%.

## 5.2 Radiated emissions measurements

### 5.2.1 Test site

Measurements were made in semi-anechoic chamber as described at 3.1 in this report.

### 5.2.2 Detector function selection and bandwidth

In radiated emissions measurement, a field strength meter that has a CISPR quasi-peak detector was used. The 6 dB bandwidth of the detector of instrument is 120 kHz over frequency range of 30 to 1000 MHz. Emissions to be scanned above 1000 MHz may be detected in peak mode.

### 5.2.3 Unit of measurement

Test results of radiated emissions measurement are reported in micro-volts per meter at the specific distance. Using the unit of dBuV on the test instrument, the indication unit was converted to field strength unit of uV/m as following method;

$$F (\text{uV/m}) = 10^{\{(R+CL+AF)/20\}} (\text{uV/m})$$

here,

F: Field Strength in uV/m, R: Meter Reading Level in dB(uV),

CL: Cable Loss from antenna to meter in dB,

AF: Antenna Factor of receiving antenna in dB(/m)

### 5.2.4 Antennas

Measurements were made using calibrated half-wave tuned dipole antenna for final measurements and biconical / log-periodic antenna in range of 30 to 1000 MHz for preliminary measurements to determine the emission characteristics of the EUT. Measurements were also made for both horizontal and vertical polarization.

The horizontal distance between the receiving antenna and the closest periphery of the EUT was 3 meters as described in 8.2.3 of ANSI C63.4-1992.

### 5.2.5 Frequency range to be scanned

For radiated emissions measurements, the spectrum in the range of 30 to 1000 MHz and above, if found, was investigated.

### 5.2.6 Test conditions and configuration of EUT

The EUT was configured and operated in all modes of operation so as to find the maximum enumeration of emissions from EUT. The EUT was placed on a 80 cm high non metallic 1 m X 1.5 m table. The turn table containing the system was rotated and the antenna height was varied 4 m to find the maximum enumeration of emissions from EUT. Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

### 5.2.7 Measurement uncertainty

Radiated emissions measurements:  $\pm 5$  dB

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT in the above mentioned way.

The measurement uncertainty was calculated in accordance with NAMAS NIS 81 : The treatment of uncertainty in EMC measurement.”

The measurement uncertainty was given with a confidence of 95%.

## 6. MEASURING INSTRUMENTS AND SET-UP

### 6.1 Power line conducted emissions

#### 6.1.1 Test receiver

Rohde & Schwarz, Model ESH3 (9 kHz to 30 MHz)

Detector function: CISPR Quasi-Peak

IF Bandwidth: 10 kHz

#### 6.1.2 Line Impedance Stabilization Network (LISN)

EUT: Rohde & Schwarz, Model ESH3-Z5

Peripheral: Rohde & Schwarz, Model ESH2-Z5

Impedance Characteristic : 50 $\mu$ H / 50  $\Omega$

### 6.2 Radiated emissions

#### 6.2.1 Test receiver

Rohde & Schwarz, Model ESCS 30 (9 kHz to 2750 MHz)

Detector function: CISPR Quasi-Peak

IF Bandwidth: 120 kHz

#### 6.2.2 Receiving Antennas.

a) Schwarzbeck, Model VHAP: Tuned dipole antenna (30 to 300 MHz)

b) Schwarzbeck, Model UHAP: Tuned dipole antenna (300 to 1000MHz)

c) Schwarzbeck, Model VHA 9103: Bi-conical Antenna (30 ~ 300 MHz)

d) Schwarzbeck, Model UHALP: Log-periodic antenna (300 ~ 1000 MHz)

## 7. TEST DATA

### 7-1. Power line conducted emissions ( § 15.107)

Product: 15" LCD Monitor  
 Model: FPD1530  
 Serial No.: KUL5065C0000001  
 Test Date: April 11, 2002

*Detector: Quasi-peak /Average*  
*Test Limit: CISPR 22 Class B*

Frequency (MHz)	Quasi-Peak (dBuV)			Average (dBuV)			Phase (L1/L2)
	Tested Level	Limit	Margin (dB)	Tested Level	Limit	Margin (dB)	
0.20	52.2	63.8	-11.6	36.4	53.8	-17.4	L1
0.27	41.8	61.3	-19.5	25.4	51.3	-25.9	L1
4.32	34.1	56.0	-21.9	19.4	46.0	-26.6	L2
5.60	34.5	60.0	-25.5	19.6	50.0	-30.4	L2
6.65	35.0	60.0	-25.0	21.1	50.0	-28.9	L2

### Result: Positive

#### NOTES:

1. All modes of operation were investigated.
2. The limits of CISPR 22 Class B apply in this conducted emissions test according to § 15.107.e).
2. The EUT was tested under the condition that all of support device and accessories described in clause 9 in this test report was connected and normally operated during the testing.
3. All other emissions are non-significant.
4. Phase L1 = Hot Phase L2 = Neutral

## 7-2. Radiated emissions ( § 15.109)

Product: 15" LCD Monitor  
 Model: FPD1530  
 Serial No.: KUL5065C0000001  
 Test Date: April 11, 2002

Detector: Quasi-peak  
 Test Limit: CISPR 22 Class B

Test distance: 3m

Frequency(MHz)	Reading(dBuV)	AF(dB/m)	CL(dB)	Pol.	F/S(dBuV/m)	Limit(dBuV/m)	Margin(dB)
72.44	25.0	6.3	1.1	H	32.4	40.5	-8.1
137.84	17.3	11.7	1.5	V	30.5	40.5	-10.0
206.74	15.8	14.8	2.0	V	32.5	40.5	-8.0
620.17	10.5	19.0	3.5	V	33.0	47.5	-14.5
798.70	12.4	20.2	3.8	V	36.4	47.5	-11.1
999.87	9.7	23.5	4.2	V	37.4	47.5	-10.1

### Result: Positive

Limit Calculation 30 - 230 MHz:  $40.5 \text{ dBuV/m} = 30 \text{ dBuV/m} + 20 \text{ Log}_{10}(10/3) \text{ [dB]}$

\* Limit

30 - 230 MHz: 40.5 dBuV/m  
 230 - 1000 MHz: 47.5 dBuV/m

#### NOTES:

- All modes of operation were investigated.
- The limits of CISPR 22 Class B apply in this conducted emissions test according to § 15.109.g).
- The EUT was tested under the condition that all of support device and accessories described in clause 9 in this test report was connected and normally operated during the testing.
- All cables were maximized on the testing.
- All other emissions are non-significant.
- AF = Antenna factor CL = Cable loss F/S = Field Strength
- The conversion factor for 10 m to 3 m was used as  $20 \times \text{Log}_{10}(10/3) \text{ [dB]}$ .

## 8. LIST OF INSTRUMENTS USED

Type	Maker	Model	Cal. Date	N Date	Control No.
Test receiver	R&S	ESCS30	11-Dec.-01	11-Dec.-02	F10000084895
Test receiver	R&S	ESH3	25-Jun.-01	25-Jun.-02	F0000193AAZL
LISN	R&S	ESH3-Z5	24-Jul.-01	24-Jul.-02	F0034891AAZA
LISN	R&S	ESH2-Z5	10-Sep.-01	10-Sep.-02	F0033973AAZA
Biconical antenna	S/B	VHA9103	07-Jan-02	07-Jan.-04	F0000477AAZB
Log-periodic antenna	S/B	UHALP9107	07-Jan-02	07-Jan.-04	F0000476AAZB
Tuned dipole antenna	S/B	VHAP	08-Aug.-01	08-Aug.-03	F0000405AAZB
Tuned dipole antenna	S/B	UHAP	08-Aug.-01	08-Aug.-03	F0000408AAZB

R&S: Rohde & Schwarz  
 Cal. Date: Calibration date

S/B: Schwarzbeck  
 N Date: Next calibration date

## 9. SUPPORT DEVICE & ACCESSORIES USED

### 9-1. Support device

#### 9-1-1. Desktop computer

Model: VL800 DT  
 Maker: H/P  
 S/N: SG12504879  
 FCC ID: DOC (CLASS B)

#### 9-1-2. Keyboard

Model: SK-2511A  
 Maker: H/P  
 S/N: M010208088  
 FCC ID: GYUR73SK

#### 9-1-3. Computer Mouse

Model: M-BD58  
 Maker: LOGITECH  
 S/N: LZC11906724  
 FCC ID: DOC (CLASS B)

#### 9-1-4. Printer

Model: C6427A  
 Maker: H/P  
 S/N: CN17C1C0FP  
 FCC ID: DOC (CLASS B)

#### 9-1-5. Modem

Model: 0701  
 Maker: US ROBOTICS  
 S/N: 24LGG8DB0673  
 FCC ID: DOC (CLASS B)