

TEST REPORT

FCC/ISED BT LE Test for LGSBWAC22
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2106-FI017

DATE OF ISSUE
June 25, 2021

Tested by
Jin Gwan Lee



Technical Manager
Se Wook Park



Accredited by KOLAS, Republic of KOREA

HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

고객비밀
CUSTOMER SECRET



TEST REPORT

FCC/ISED BT LE
Test for
LGSBWAC22

REPORT NO.

HCT-RF-2106-FI017

DATE OF ISSUE

June 25, 2021

Additional Model

-

Applicant

LG Electronics Inc.

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Eut Type Model Name

RF Module
LGSBWAC22

FCC ID IC

BEJLGSBWAC22
2703H-LGSBWAC22

Max. RF Output Power

8.852 dBm (7.68 mW)

Modulation type

GFSK

FCC Classification

Digital Transmission System(DTS)

FCC Rule Part(s)

Part 15.247

ISED Rule Part(s)

RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 25, 2021	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

KOLAS Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (KOLAS Accreditation No. KT197)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	29
9. TEST RESULT	31
9.1 DUTY CYCLE	31
9.2 DUTY CYCLE CORRECTION	31
9.3 6dB BANDWIDTH & 99 % BANDWIDTH	36
9.4 OUTPUT POWER	54
9.5 POWER SPECTRAL DENSITY	56
9.6 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	59
9.7 RADIATED SPURIOUS EMISSIONS	76
9.8 RADIATED RESTRICTED BAND EDGES	82
9.9 RECEIVER SPURIOUS EMISSIONS	84
9.10 POWERLINE CONDUCTED EMISSIONS	85
10. LIST OF TEST EQUIPMENT	89
11. ANNEX A_ TEST SETUP PHOTO	91

1. EUT DESCRIPTION

Model	LGSBWAC22	
Additional Model	-	
EUT Type	RF Module	
Power Supply	DC 3.30 V	
Frequency Range	2 402 MHz – 2 480 MHz	
Max. RF Output Power	Peak	1M Bit/s : 8.846 dBm (7.67 mW) 2M Bit/s : 8.764 dBm (7.52 mW) 125k Bit/s : 8.852 dBm (7.68 mW) 500k Bit/s : 8.766 dBm (7.53 mW)
	Average	1M Bit/s : 8.66 dBm (7.34 mW) 2M Bit/s : 8.56 dBm (7.17 mW) 125k Bit/s : 8.71 dBm (7.43 mW) 500k Bit/s : 8.45 dBm (7.00 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	Metal press Antenna Peak Gain : 1.19 dBi	
Date(s) of Tests	April 15, 2021 ~ June 22, 2021	
PMN (Product Marketing Number)	RF Module	
HVIN (Hardware Version Identification Number)	LGSBWAC22	
FVIN (Firmware Version Identification Number)	1.0	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	Radiated : ETWCERBC01-01 Conducted : ETWCERBC01-02	
Manufacturer	1. PT. LG INNOTEK INDONESIA Bekasi International Industrial Estate, Blok C8 NO. 12 & 12 A, Desa Cibatun, Cikarang Selatan, Bekasi 17750 – Indonesia 2. COMPAL NETWORKING(KUNSHAN)CO.,LTD No. 520, Nanbang Rd, Economic & Technical Development Zone, Kunshan, Jiangsu Province, China	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated January 26, 2021 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203 / RSS-Gen(Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

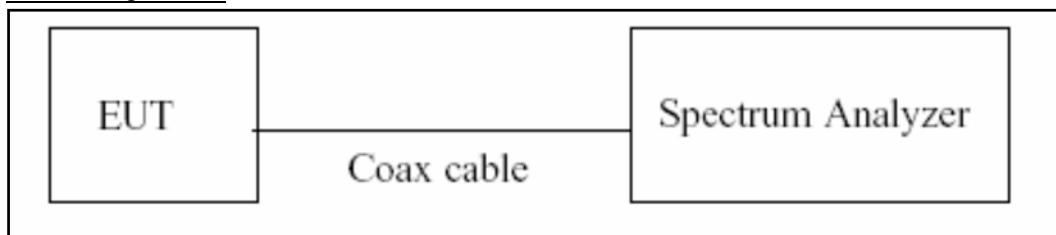

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth & 99 % Bandwidth(ISED)

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02,
Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW $\geq 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = Peak
- 7) Trace mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.05
100	20.10
200	20.14
300	20.19
400	20.25
500	20.25
600	20.26
700	20.27
800	20.28
900	20.30
1000	20.35
2000	20.50
2400	20.53
2412	20.55
2437	20.55
2462	20.55
2500	20.54
3000	20.64
4000	20.72
5000	20.79
5700	20.80
5800	20.87
6000	20.88
7000	21.01
8000	21.01
9000	21.09
10000	21.19
11000	21.28
12000	21.37
13000	21.38
14000	21.41
15000	21.51
16000	21.59
17000	21.80
18000	21.93
19000	21.85
20000	21.52
21000	21.65
22000	21.64
23000	21.65
24000	21.66
25000	21.76

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20dB) + Cable loss

7.6. Radiated Test

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

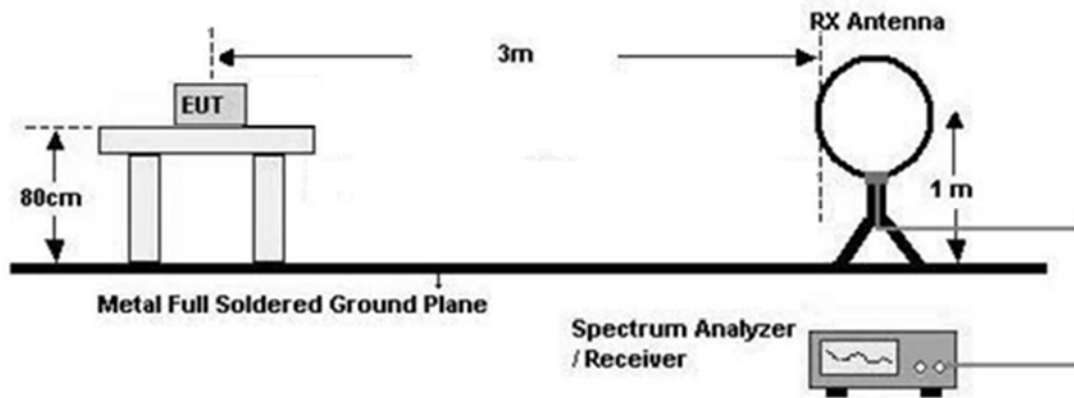

30 MHz - 1 GHz

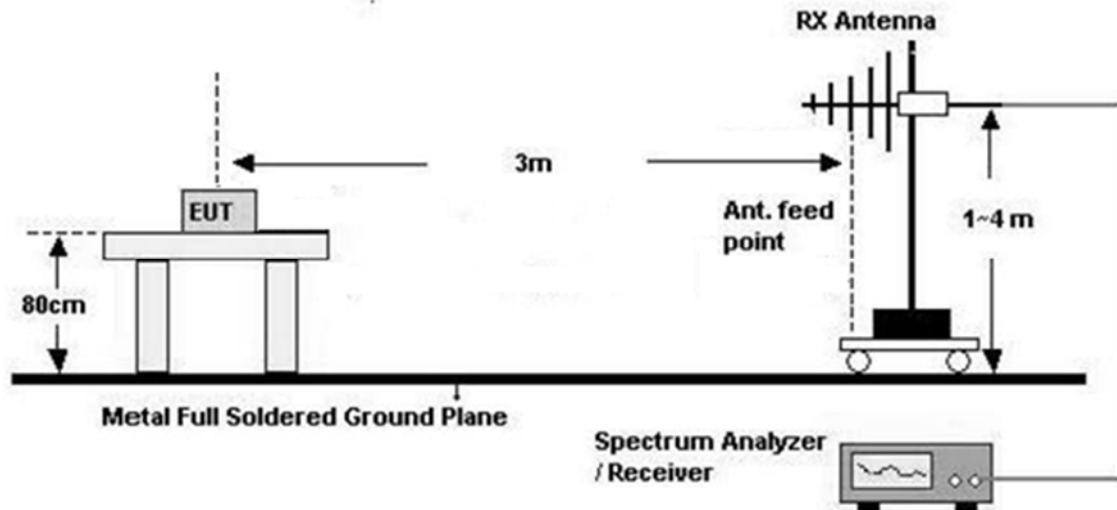

Above 1 GHz

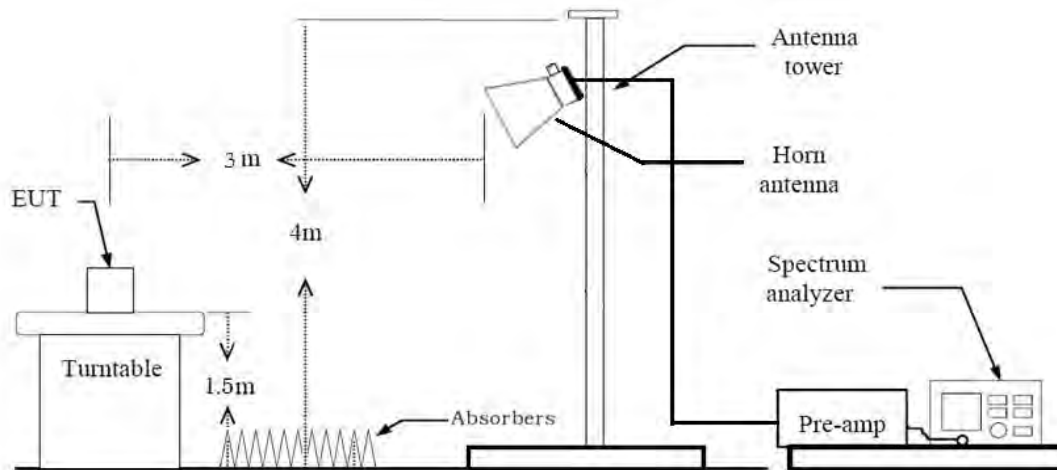

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

11. Total (Measurement Type : Peak)

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance

Factor(D.F)

Total (Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

+ Distance Factor(D.F) + Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had

the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak

= Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Average Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

+ Duty Cycle Factor + Duty Cycle Correction Factor(DCCF)

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration

30 MHz - 1 GHz

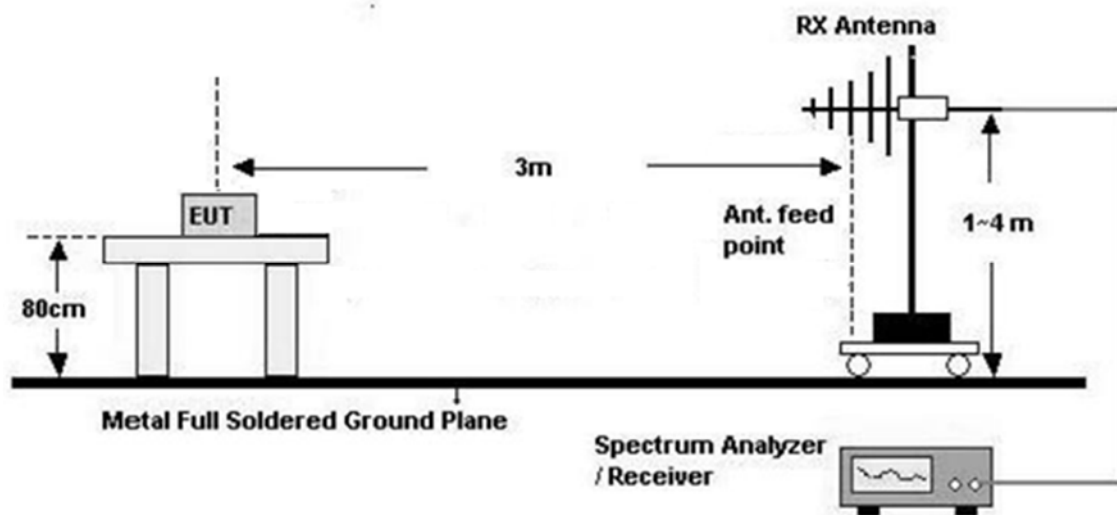

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):


- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

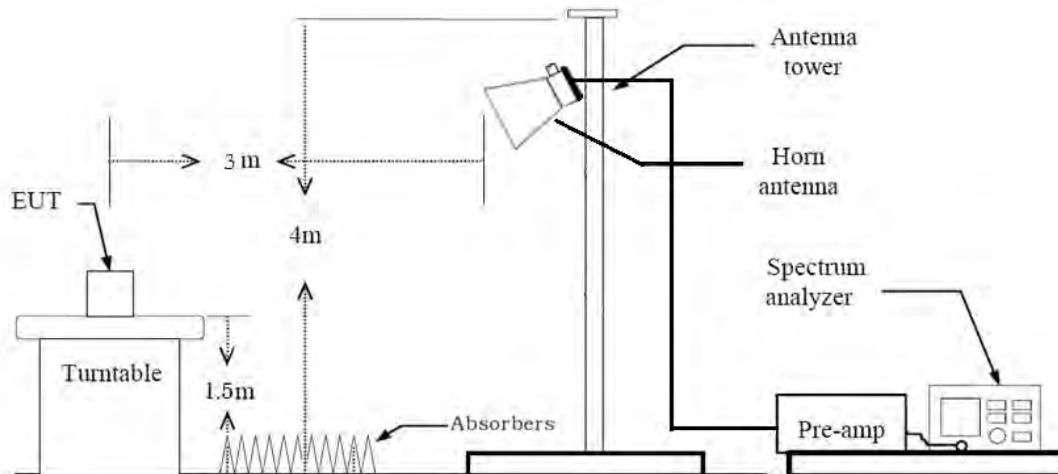

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

7.9. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
 - Worstcase : Stand alone
2. EUT Axis:
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
(Worst case : 125k 255 Bytes, 2M 255 Byte)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories (Notebook)

Conducted test

1. The EUT was configured with packet length of highest power.
 - ALL Mode Test
 (Worst case : 125k 37 Bytes, 2M 255 Byte)

8. SUMMARY TEST OF RESULTS

FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.b	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 5, 6	Radiated	PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 7		PASS

9. TEST RESULT

9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.394	0.624	0.631	2.00
	255	2.140	2.500	0.856	0.68
2M	37	0.208	0.624	0.333	4.78
	255	1.082	1.874	0.577	2.39
125k	37	3.110	3.750	0.829	0.81
	255	17.067	17.500	0.975	0.11
500k	37	1.072	1.876	0.571	2.43
	255	4.560	5.000	0.912	0.40

9.2 DUTY CYCLE CORRECTION

Worst case) Duty Cycle Correction Factor

125kbit/s_37Byte


- T_{total} [ms]= 3.750 ms
- Number of hits = 100/ T_{total} + 1 = 27
- Worst case 100ms operation = 3.110 ms
- Duty Cycle Correction Factor(DCCF)
= 20log (number of hits * (worst case 100ms operation /100ms)) = -1.52 dB

2Mbit/s_255Byte

- T_{total} [ms]= 1.874 ms
- Number of hits = 100/ T_{total} + 1 = 54
- Worst case 100ms operation = 1.082 ms
- Duty Cycle Correction Factor(DCCF)
= 20log (number of hits * (worst case 100ms operation /100ms)) = -4.67 dB

1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

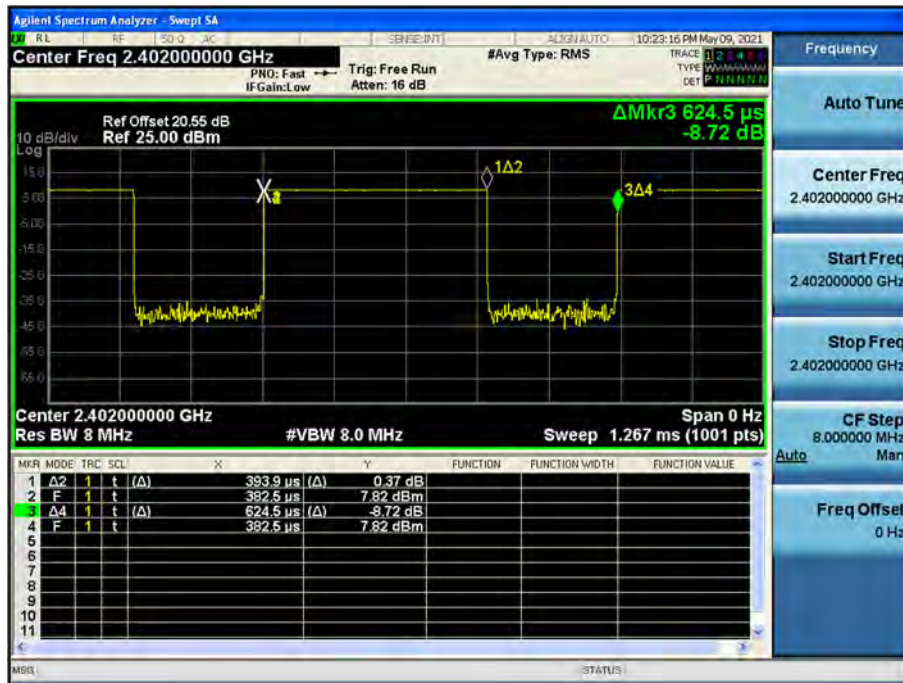


1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)




2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

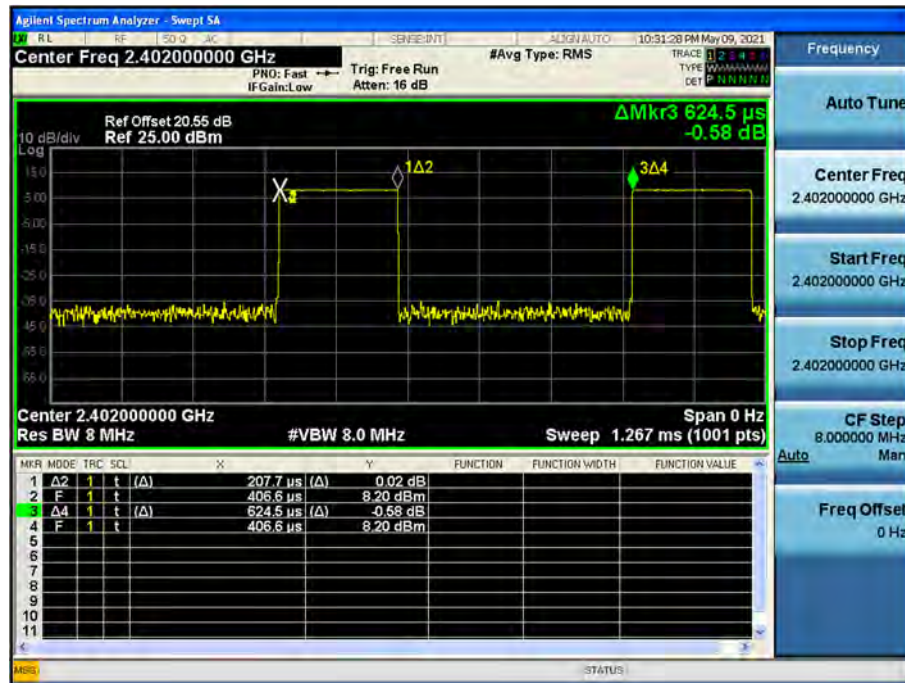


2M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

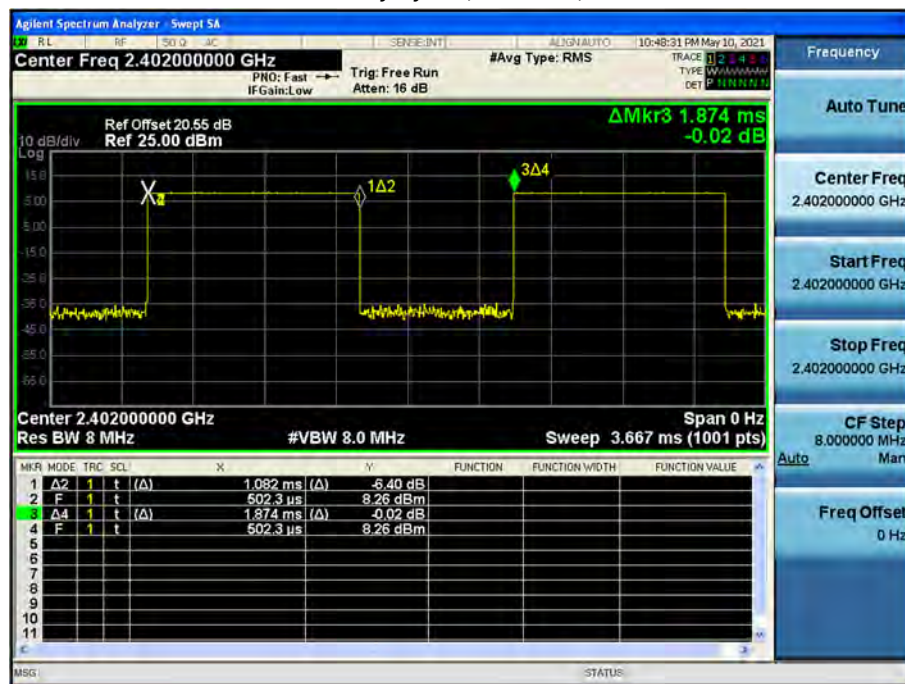

125k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

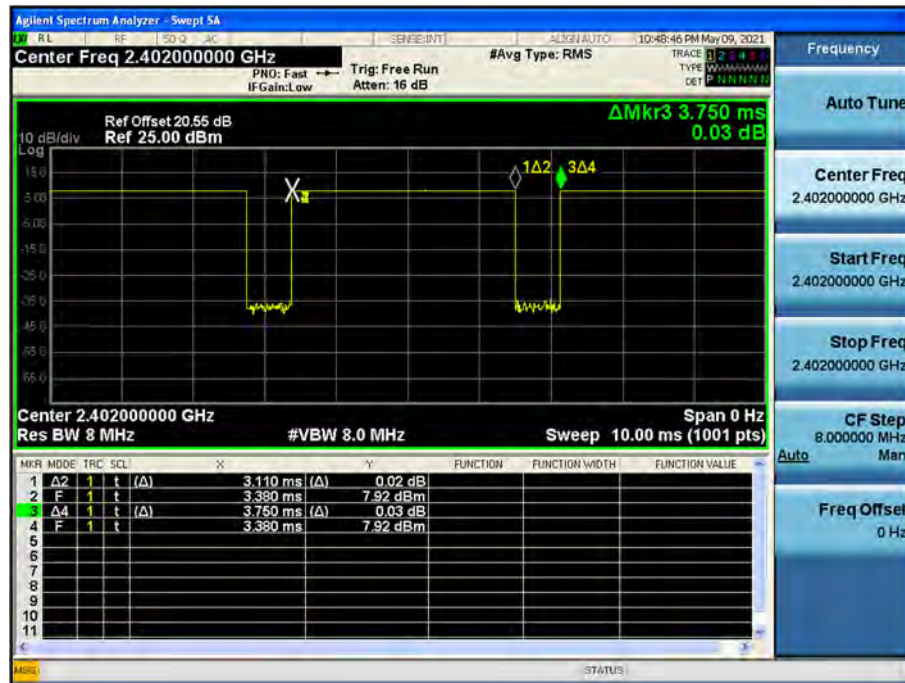


125k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)



500k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

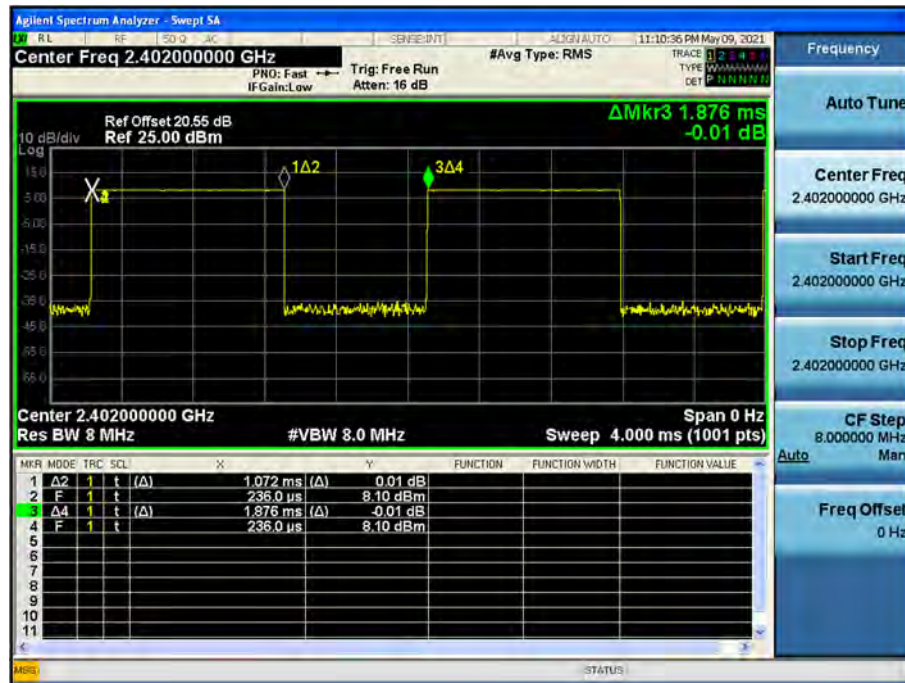

500k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)




9.3 6dB BANDWIDTH & 99 % BANDWIDTH

FCC


Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37 Byte	0	659.5	> 500
	19	664.9	
	39	665.7	
1M 255 Byte	0	673.6	> 500
	19	673.2	
	39	678.1	
2M 37 Byte	0	1136.2	> 500
	19	1135.6	
	39	950.6	
2M 255 Byte	0	1136.3	> 500
	19	1144.6	
	39	1134.6	
125k 37 Byte	0	599.4	> 500
	19	617.2	
	39	620.7	
125k 255 Byte	0	603.6	> 500
	19	634.8	
	39	618.8	
500k 37 Byte	0	672.0	> 500
	19	667.0	
	39	663.0	
500k 255 Byte	0	671.4	> 500
	19	682.7	
	39	675.2	

1M Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

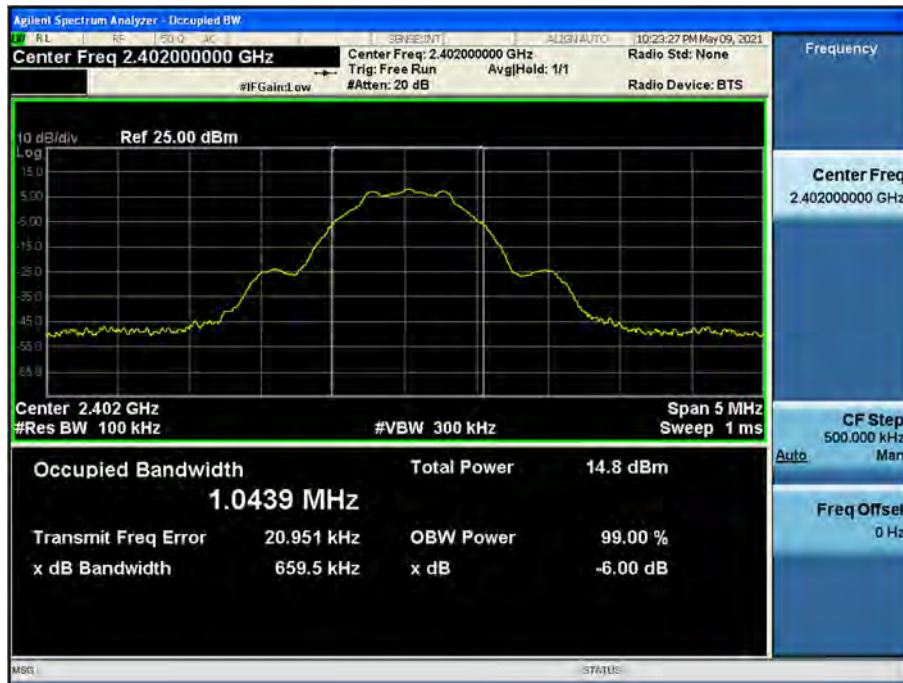

6 dB Bandwidth plot (Mid-CH 19)

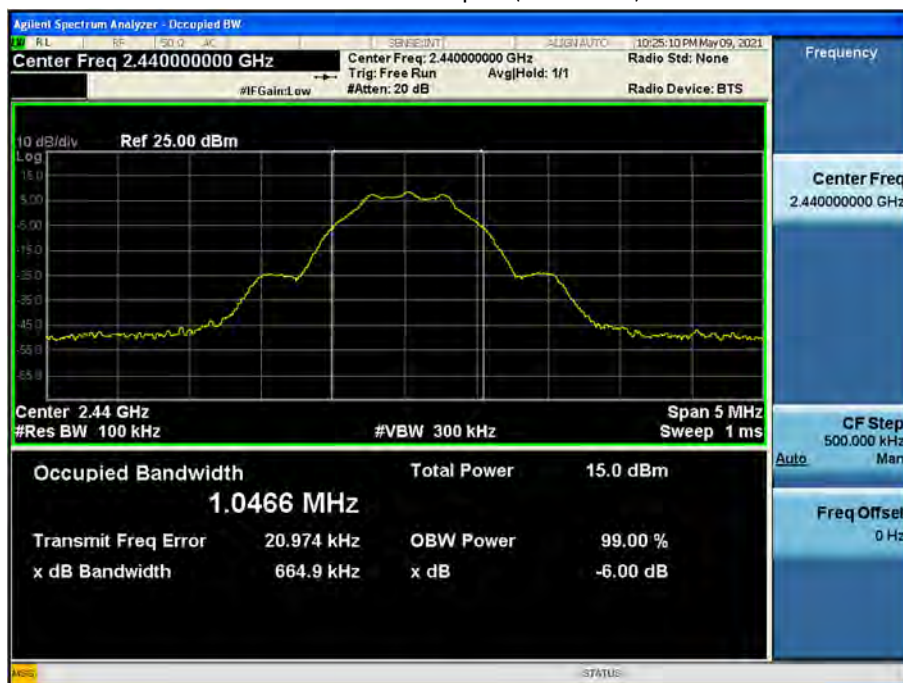

6 dB Bandwidth plot (High-CH 39)



2M Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



125k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)




6 dB Bandwidth plot (High-CH 39)




500k Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

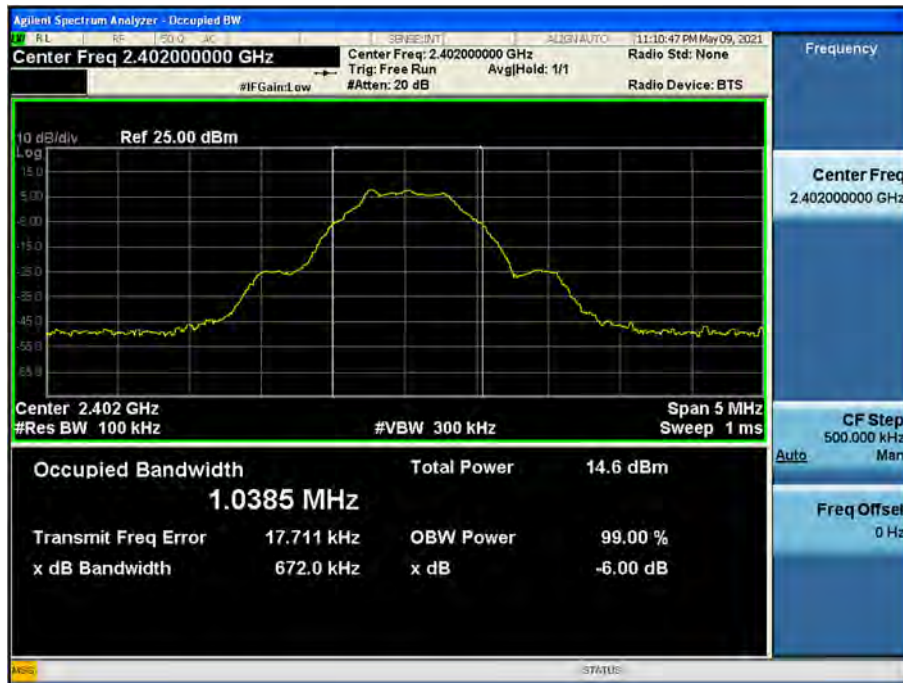

6 dB Bandwidth plot (Mid-CH 19)

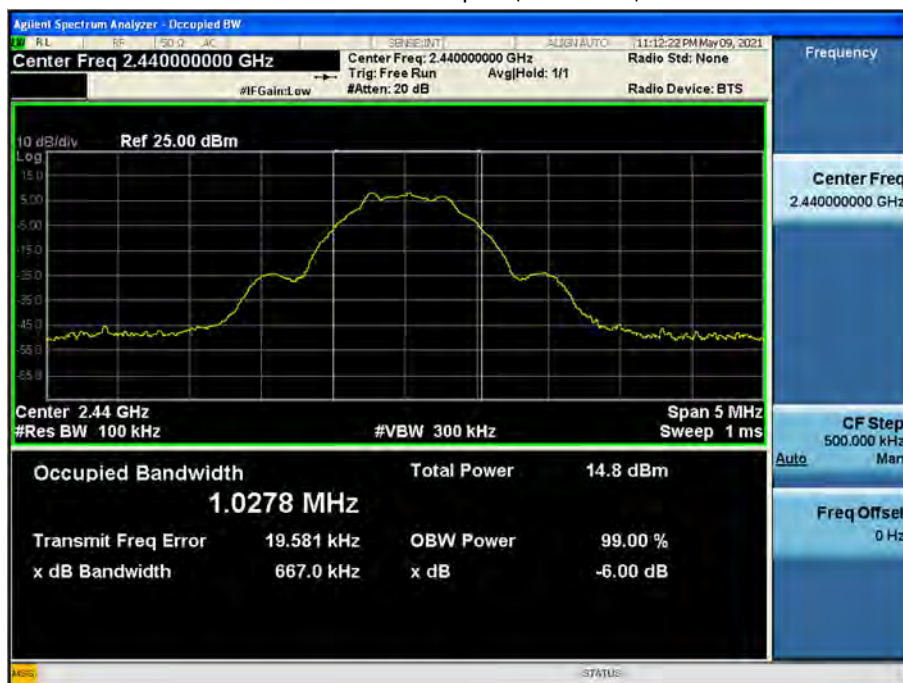

6 dB Bandwidth plot (High-CH 39)

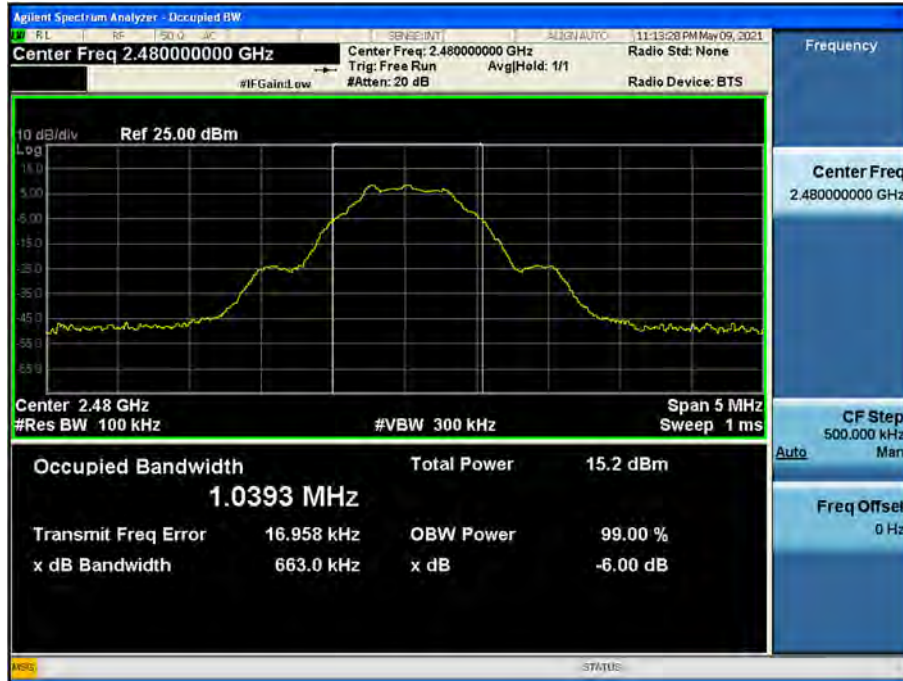


99 % Bandwidth(ISED)

Mode (Bit/s)	Packet length (Byte)	Channel	99 % Bandwidth (MHz)
1M	37	0	1.0272
		19	1.0295
		39	1.0343
	255	0	1.0240
		19	1.0253
		39	1.0243
2M	37	0	2.0580
		19	2.0732
		39	2.0643
	255	0	2.0645
		19	2.0623
		39	2.0636
125k	37	0	1.0418
		19	1.0462
		39	1.0409
	255	0	1.0491
		19	1.0485
		39	1.0501
500k	37	0	1.0130
		19	1.0154
		39	1.0196
	255	0	1.0210
		19	1.0199
		39	1.0198

1M Bit/s (37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)

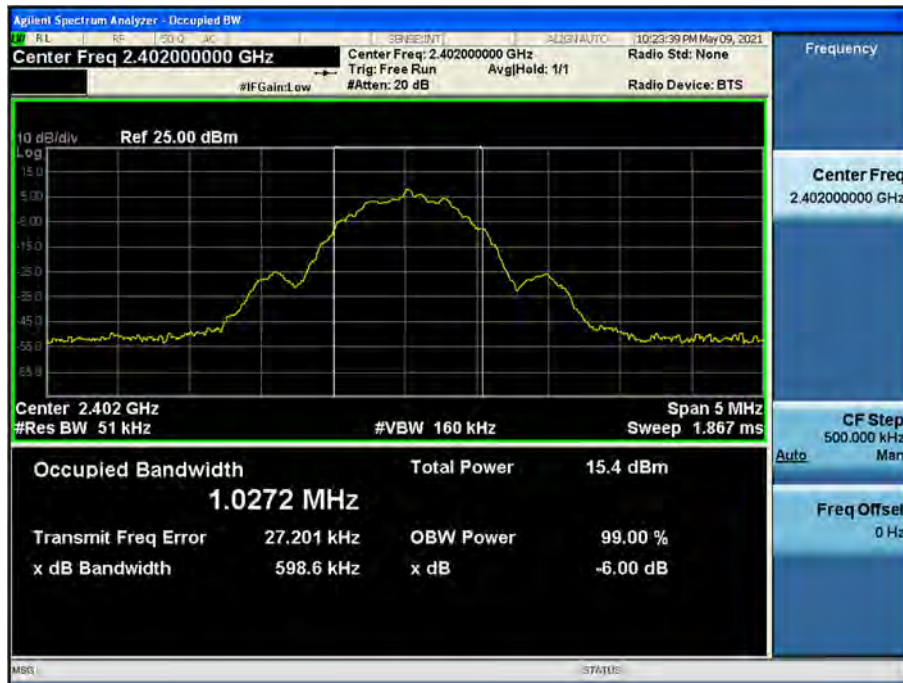

99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



2M Bit/s (37 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)



99 % Bandwidth plot (High-CH 39)



125k Bit/s(255 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)



99 % Bandwidth plot (Mid-CH 19)




99 % Bandwidth plot (High-CH 39)




500k Bit/s(255 Byte) Test Plots

99 % Bandwidth plot (Low-CH 0)

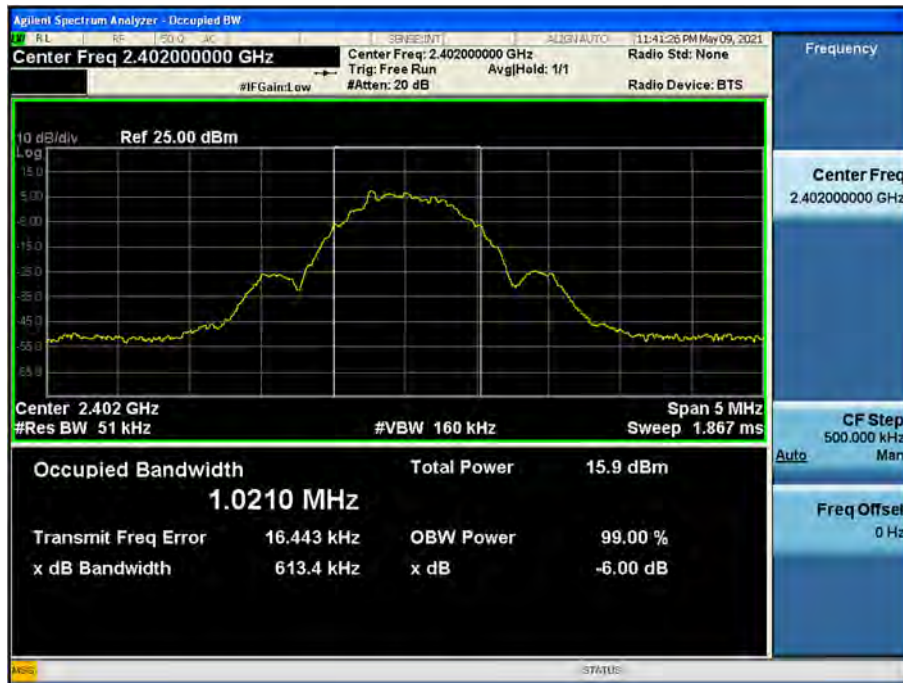

99 % Bandwidth plot (Mid-CH 19)

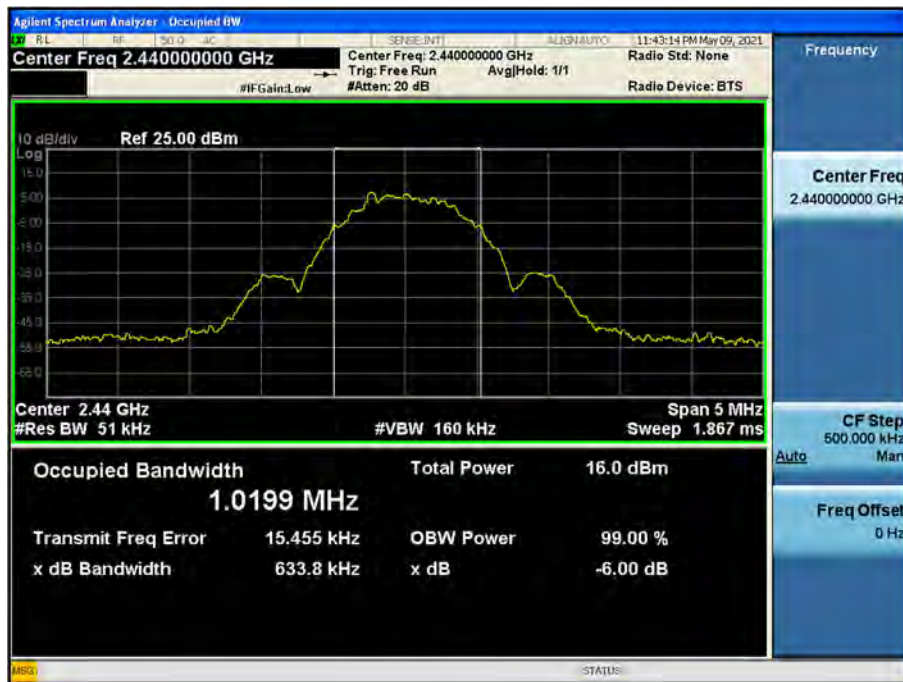

99 % Bandwidth plot (High-CH 39)



9.4 OUTPUT POWER

Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	8.239	30
		2440	19	8.382	
		2480	39	8.629	
	255	2402	0	8.515	
		2440	19	8.567	
		2480	39	8.846	
2M	37	2402	0	8.332	
		2440	19	8.513	
		2480	39	8.764	
	255	2402	0	8.327	
		2440	19	8.353	
		2480	39	8.729	
125k	37	2402	0	8.479	
		2440	19	8.528	
		2480	39	8.852	
	255	2402	0	7.791	
		2440	19	7.807	
		2480	39	8.220	
500k	37	2402	0	8.147	
		2440	19	8.331	
		2480	39	8.584	
	255	2402	0	8.308	
		2440	19	8.368	
		2480	39	8.766	

Average Power

Data rate	Packet length	LE Mode		Measured Power (dBm)	Duty Cycle Factor	Result	Limit (dBm)
(Bit/s)	(Byte)	Frequency [MHz]	Channel		(dB)	(dBm)	
1M	37	2402	0	5.92	2.00	7.92	30
		2440	19	6.14	2.00	8.14	
		2480	39	6.35	2.00	8.35	
	255	2402	0	7.57	0.68	8.25	
		2440	19	7.73	0.68	8.41	
		2480	39	7.98	0.68	8.66	
2M	37	2402	0	3.52	4.78	8.30	
		2440	19	3.61	4.78	8.39	
		2480	39	3.20	4.78	7.98	
	255	2402	0	5.88	2.39	8.27	
		2440	19	5.87	2.39	8.26	
		2480	39	6.17	2.39	8.56	
125k	37	2402	0	7.35	0.81	8.16	
		2440	19	7.46	0.81	8.27	
		2480	39	7.90	0.81	8.71	
	255	2402	0	7.54	0.11	7.65	
		2440	19	8.03	0.11	8.14	
		2480	39	7.95	0.11	8.06	
500k	37	2402	0	5.32	2.43	7.75	
		2440	19	5.65	2.43	8.08	
		2480	39	5.88	2.43	8.31	
	255	2402	0	7.69	0.40	8.09	
		2440	19	7.66	0.40	8.06	
		2480	39	8.05	0.40	8.45	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.55 dB is offset for 2.4 GHz Band.

9.5 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode (Bit/s)	Test Result	
			Measured Power(dBm)	Limit (dBm/3kHz)
2402	0	1M Bit/s 37 Byte	-6.154	8
2440	19		-7.133	
2480	39		-4.694	
2402	0	2M Bit/s 255 Byte	-8.888	
2440	19		-9.621	
2480	39		-8.525	
2402	0	125k Bit/s 37 Byte	2.121	
2440	19		2.192	
2480	39		2.574	
2402	0	500k Bit/s 255 Byte	1.756	
2440	19		1.953	
2480	39		2.332	

Note :

1. The PSD measured results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.55 dB is offset for 2.4 GHz Band.
4. The plot included is the worst mode (125k Bit/s (37 Byte)) of peak output power.

125k Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)





9.6 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

▣ 2M Bit/s (255 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39



2M Bit/s (255 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (High-CH 39)

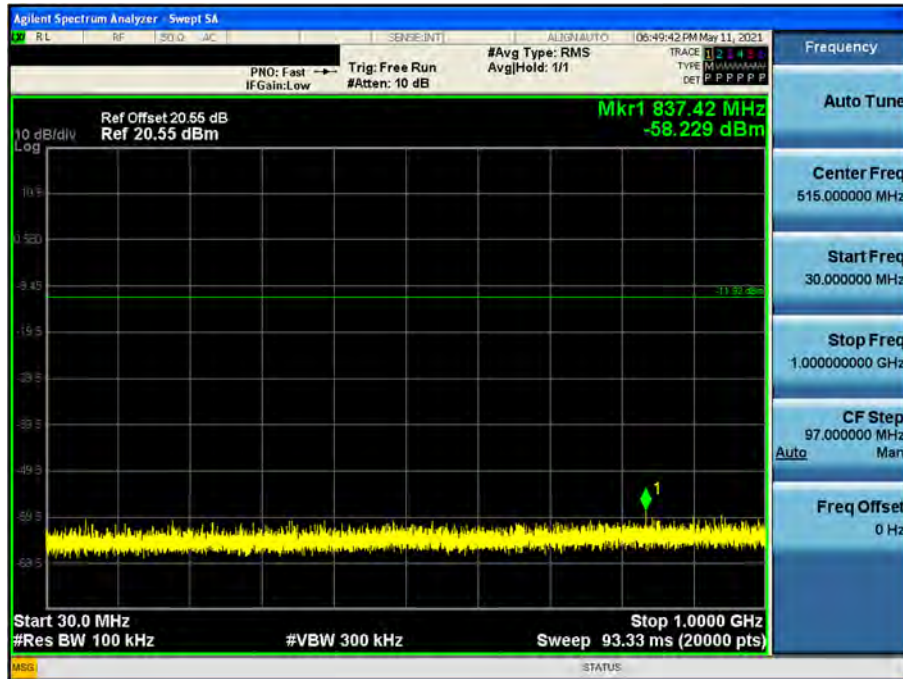


1 GHz ~ 3 GHz

Conducted Spurious Emission (High-CH 39)

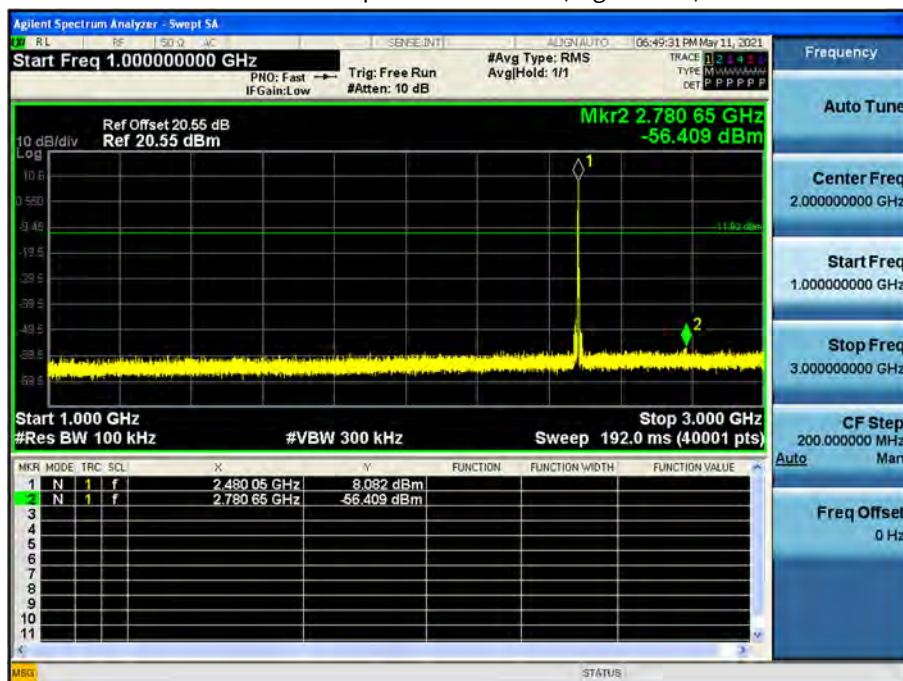


3 GHz ~ 5 GHz

Conducted Spurious Emission (High-CH 39)

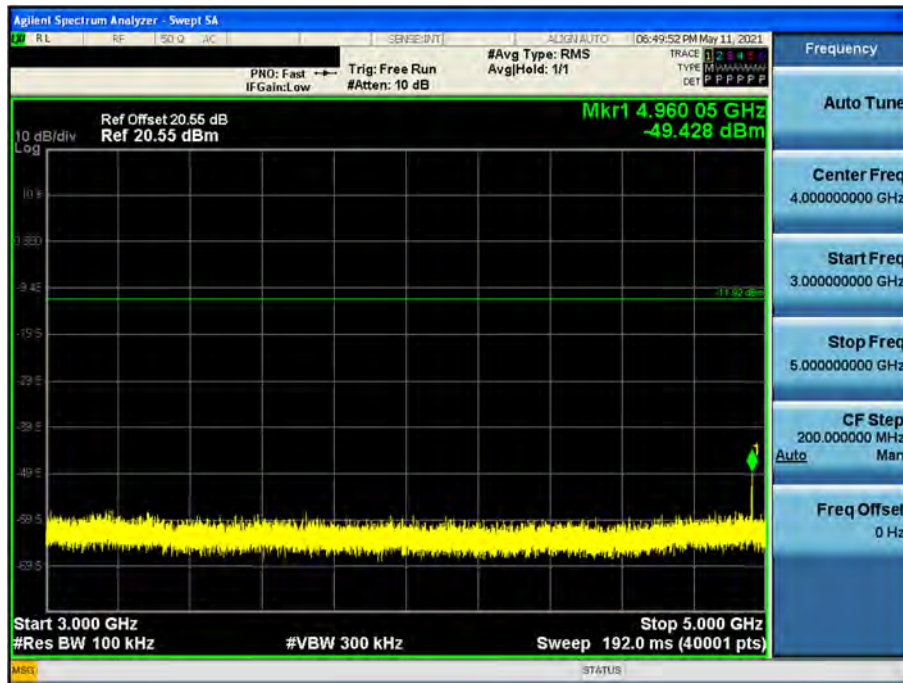


5 GHz ~ 7 GHz

Conducted Spurious Emission (High-CH 39)

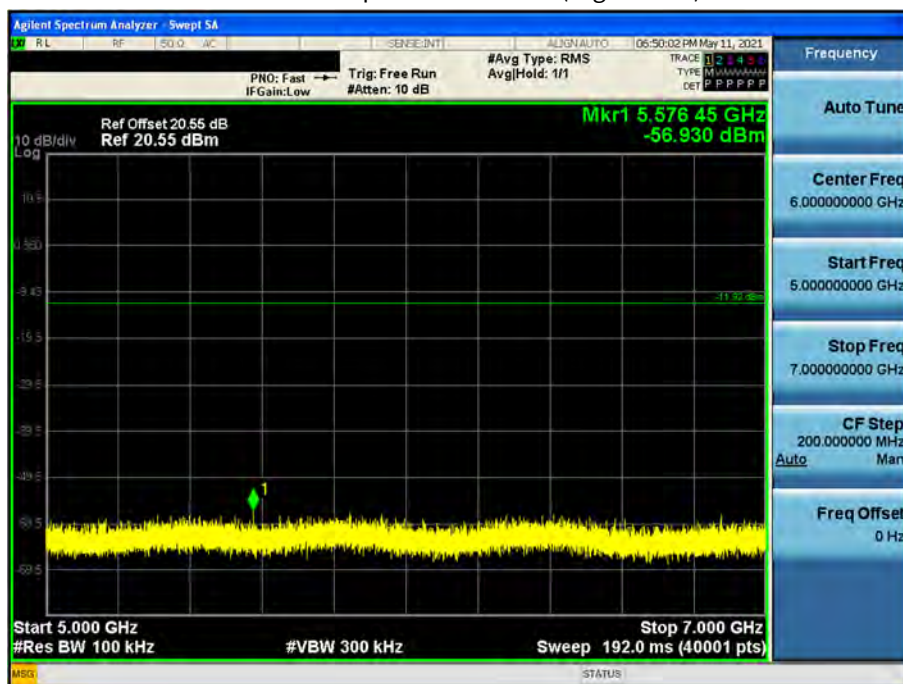


7 GHz ~ 9 GHz

Conducted Spurious Emission (High-CH 39)

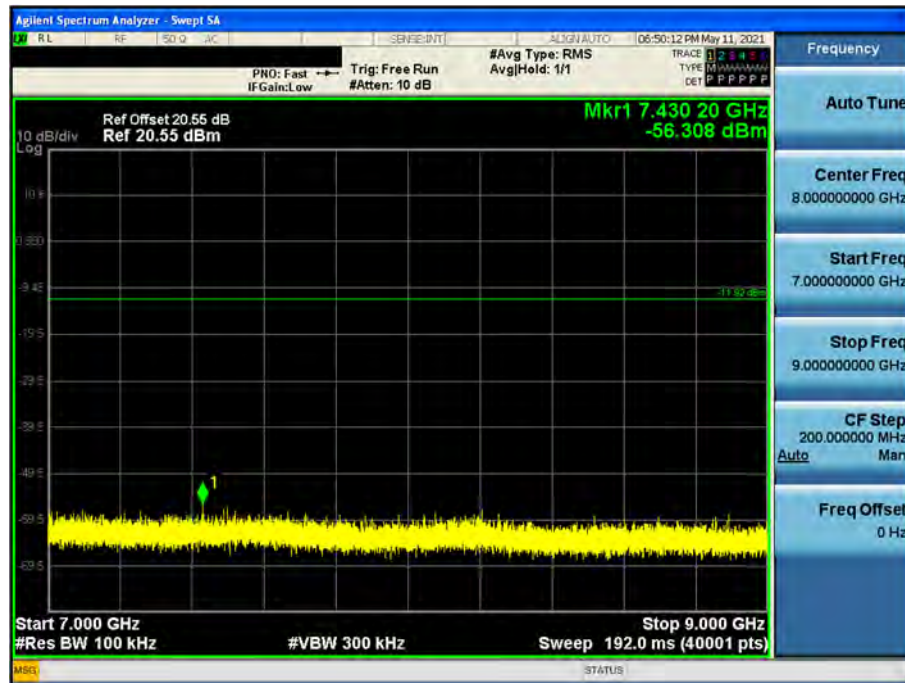


9 GHz ~ 11 GHz

Conducted Spurious Emission (High-CH 39)

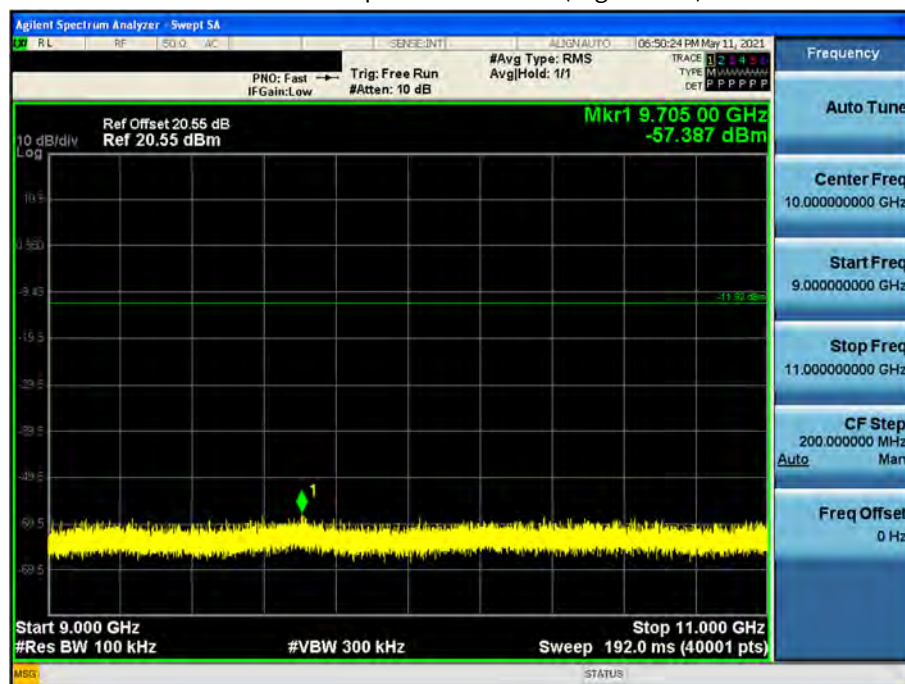


11 GHz ~ 13 GHz

Conducted Spurious Emission (High-CH 39)

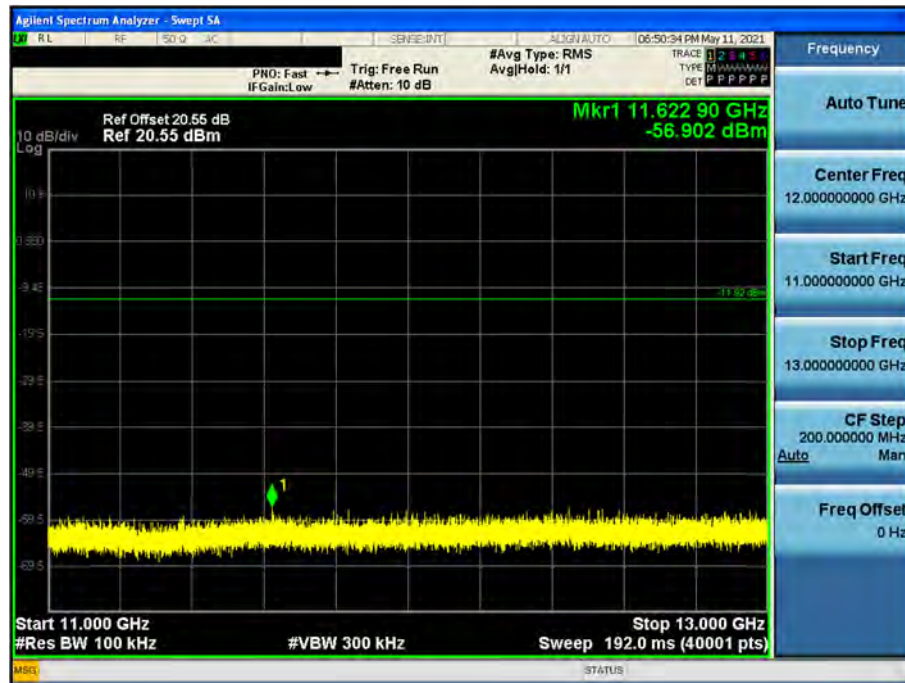


13 GHz ~ 15 GHz

Conducted Spurious Emission (High-CH 39)

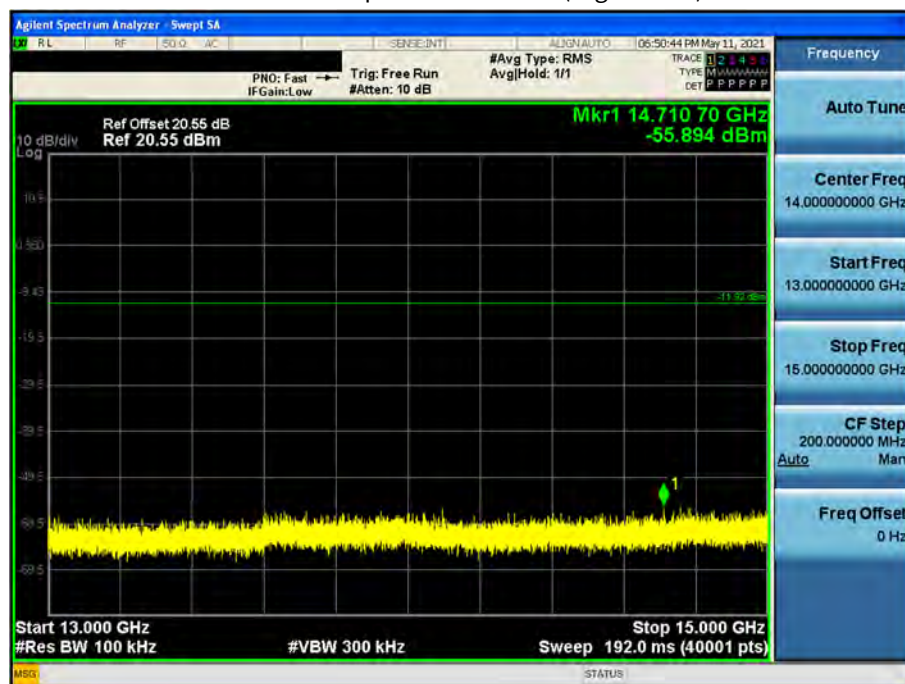


15 GHz ~ 17 GHz

Conducted Spurious Emission (High-CH 39)

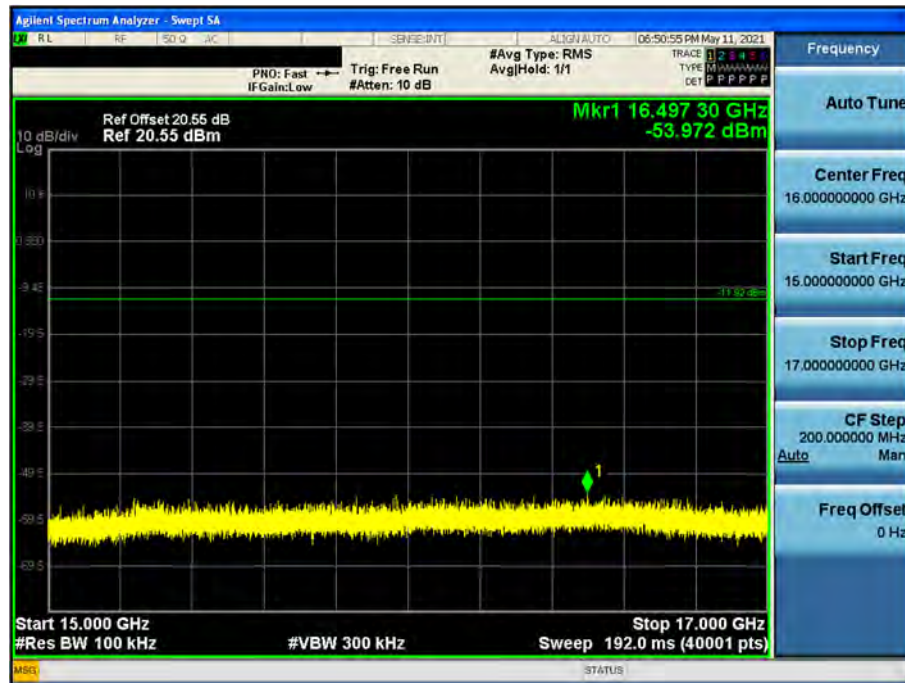


17 GHz ~ 19 GHz

Conducted Spurious Emission (High-CH 39)

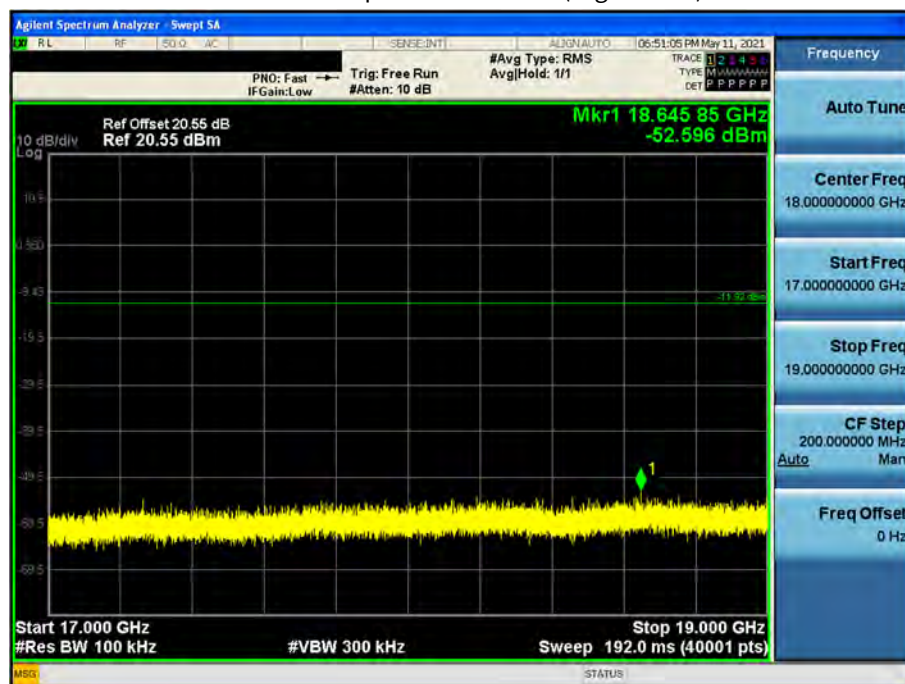


19 GHz ~ 21 GHz

Conducted Spurious Emission (High-CH 39)

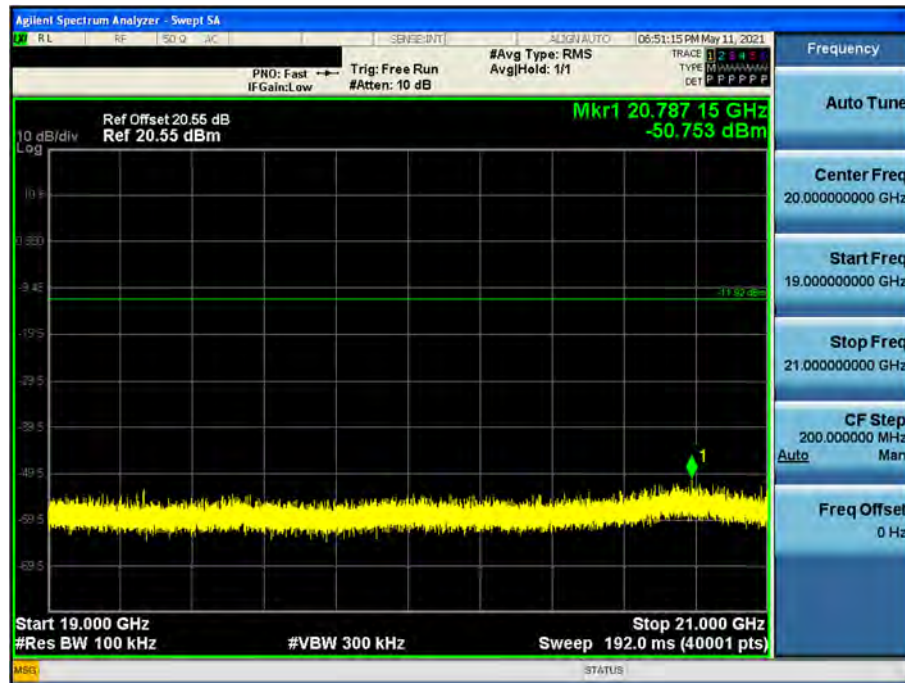


21 GHz ~ 23 GHz

Conducted Spurious Emission (High-CH 39)

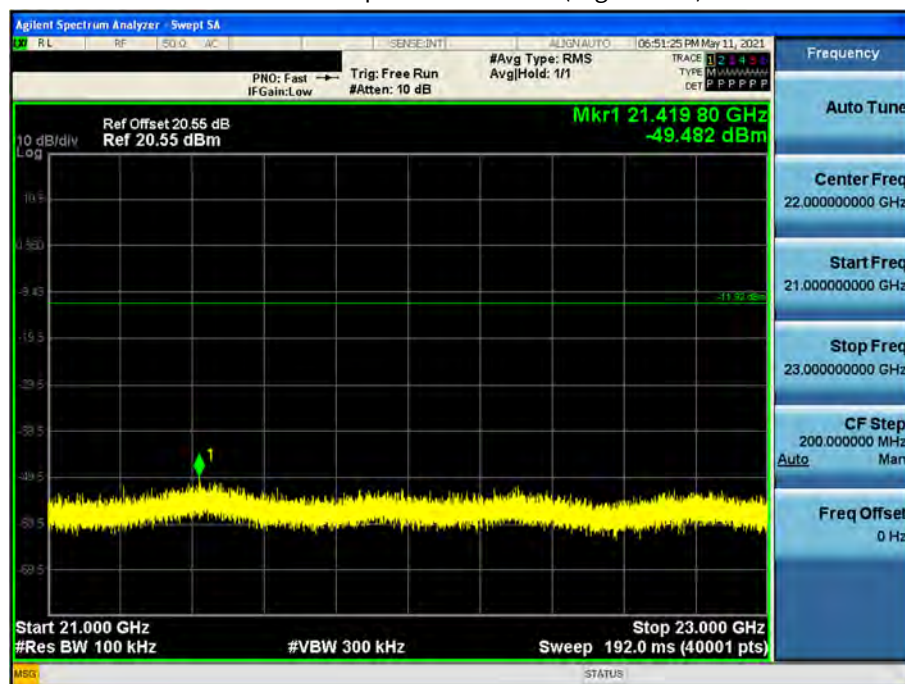

23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

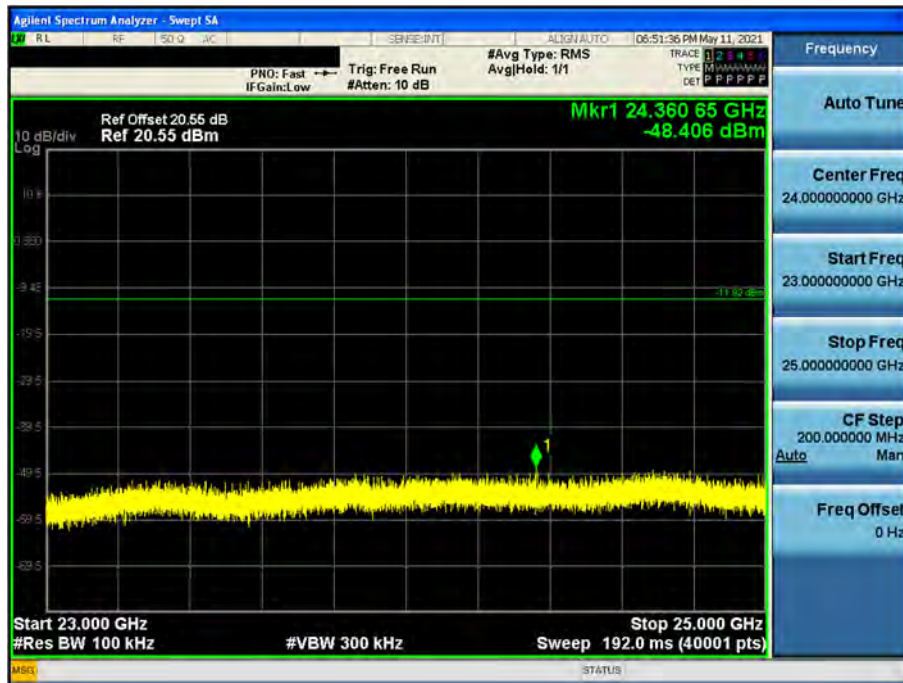


Note :


Limit : -11.92 dBm

125k Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0

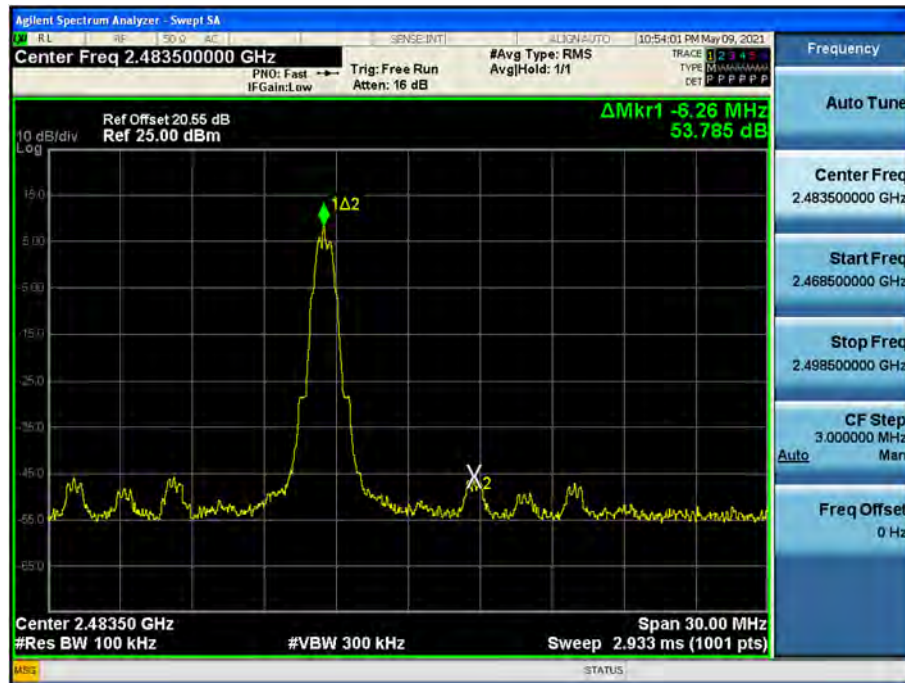


High-CH 39

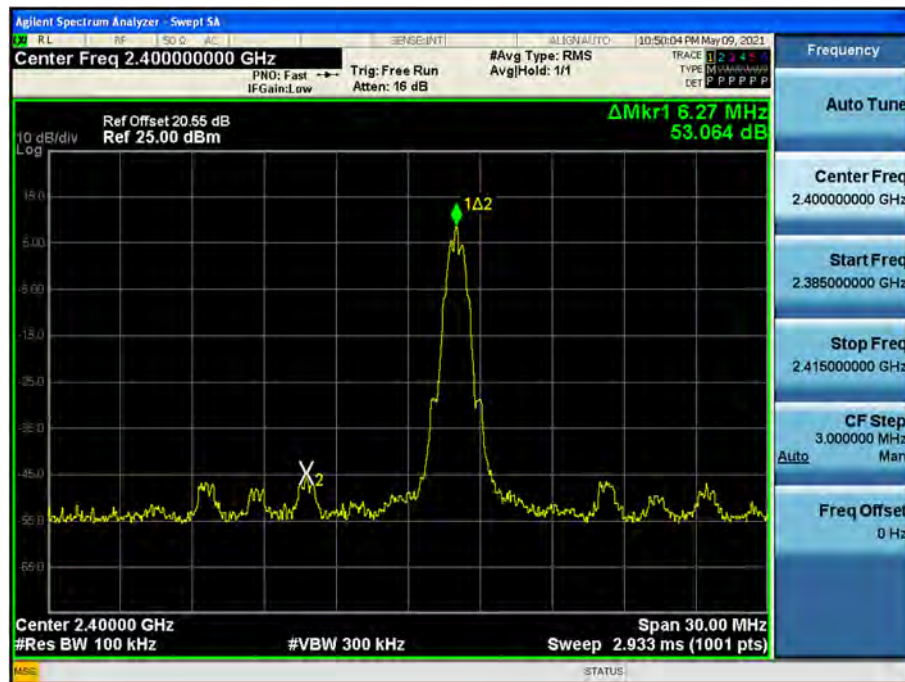

125k Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (High-CH 39)

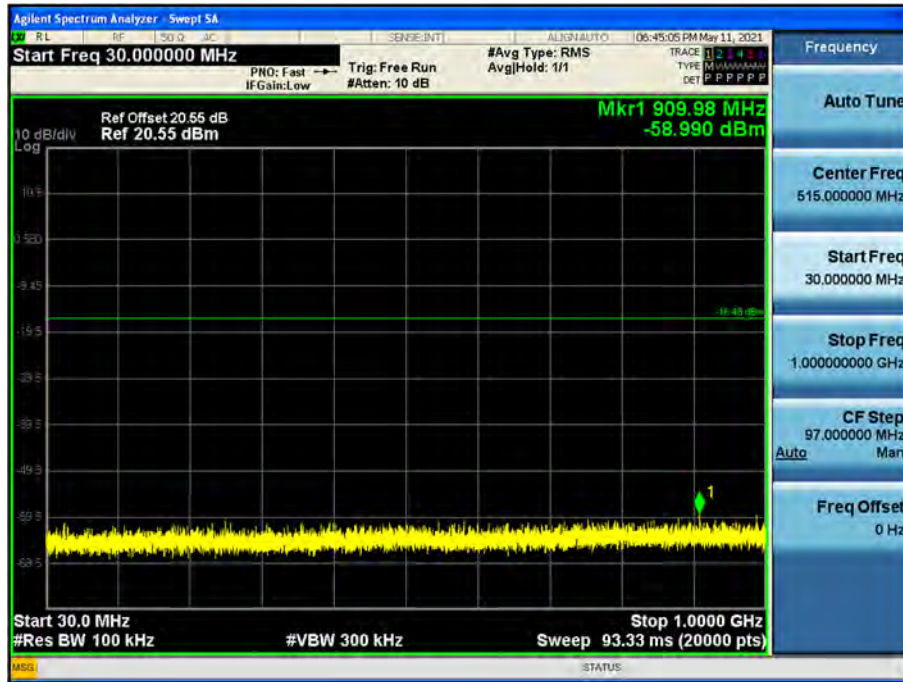


1 GHz ~ 3 GHz

Conducted Spurious Emission (High-CH 39)

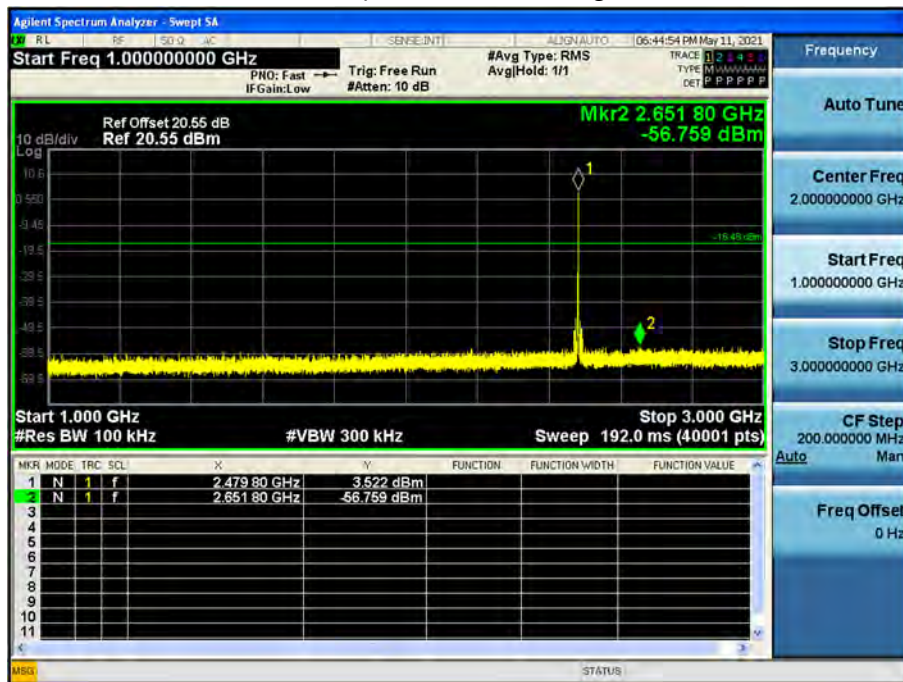


3 GHz ~ 5 GHz

Conducted Spurious Emission (High-CH 39)

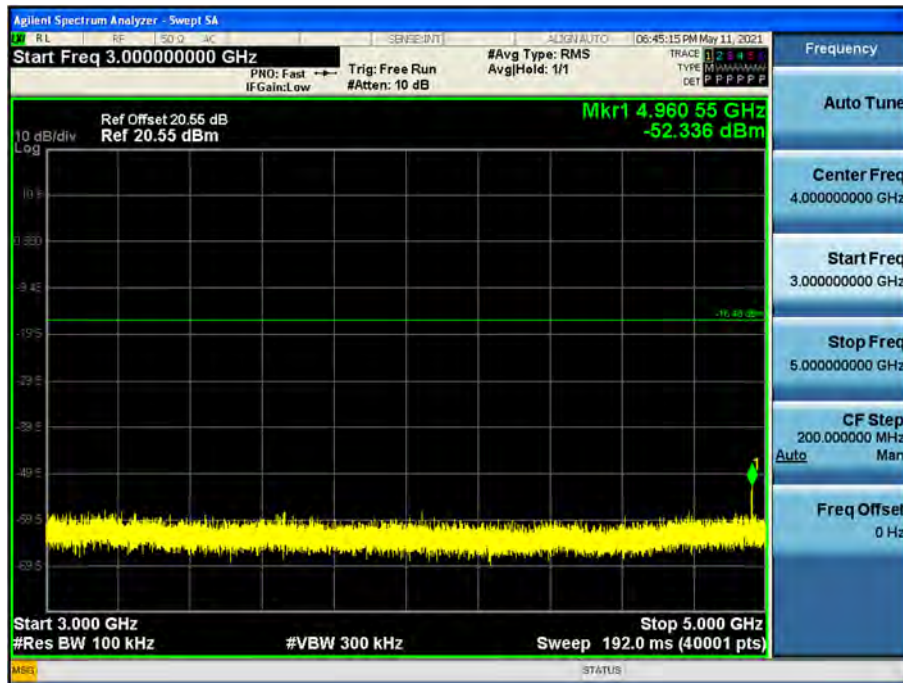


5 GHz ~ 7 GHz

Conducted Spurious Emission (High-CH 39)

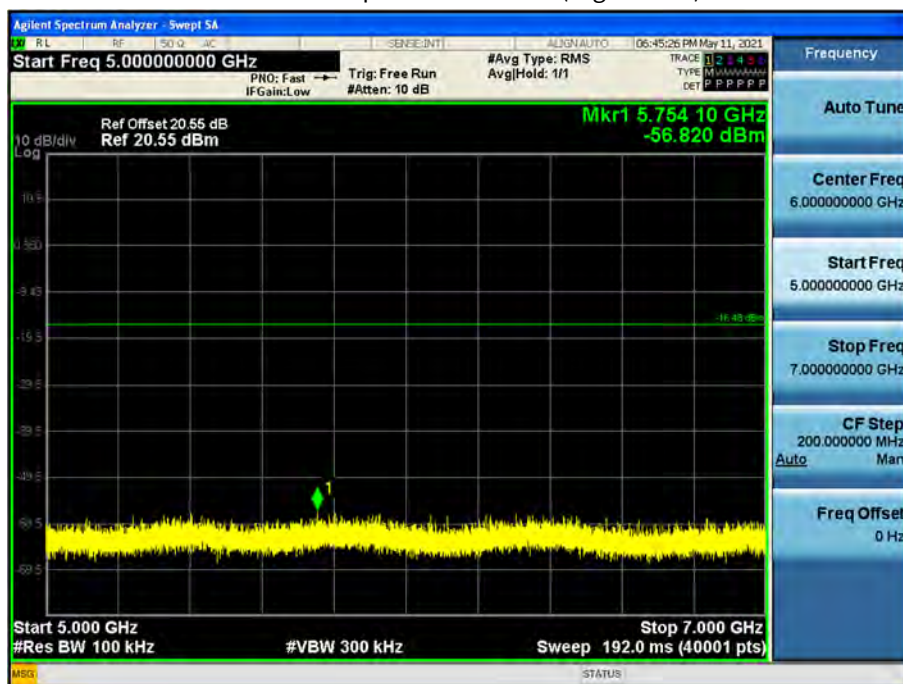


7 GHz ~ 9 GHz

Conducted Spurious Emission (High-CH 39)

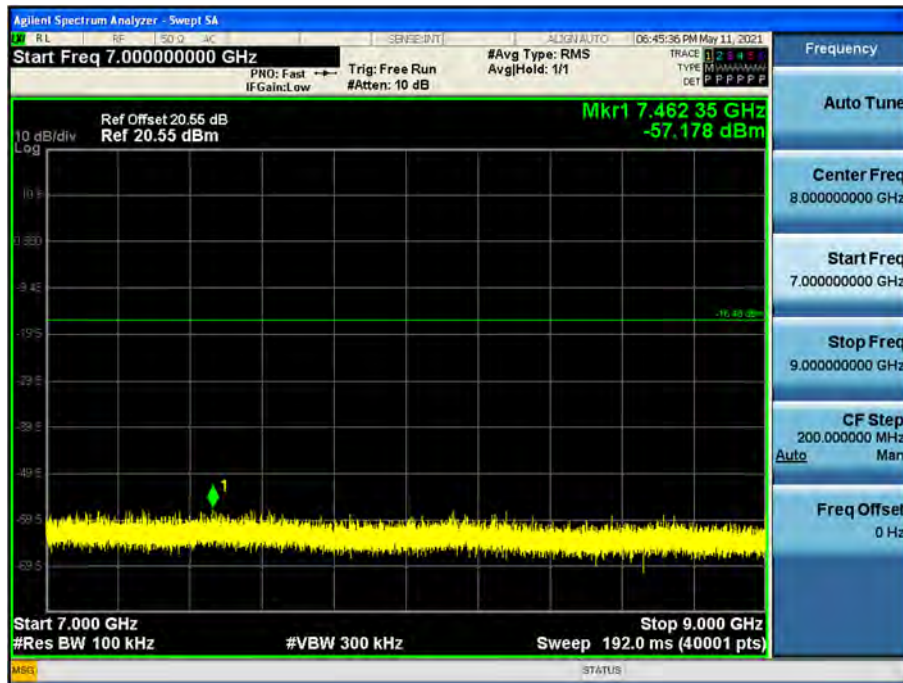


9 GHz ~ 11 GHz

Conducted Spurious Emission (High-CH 39)

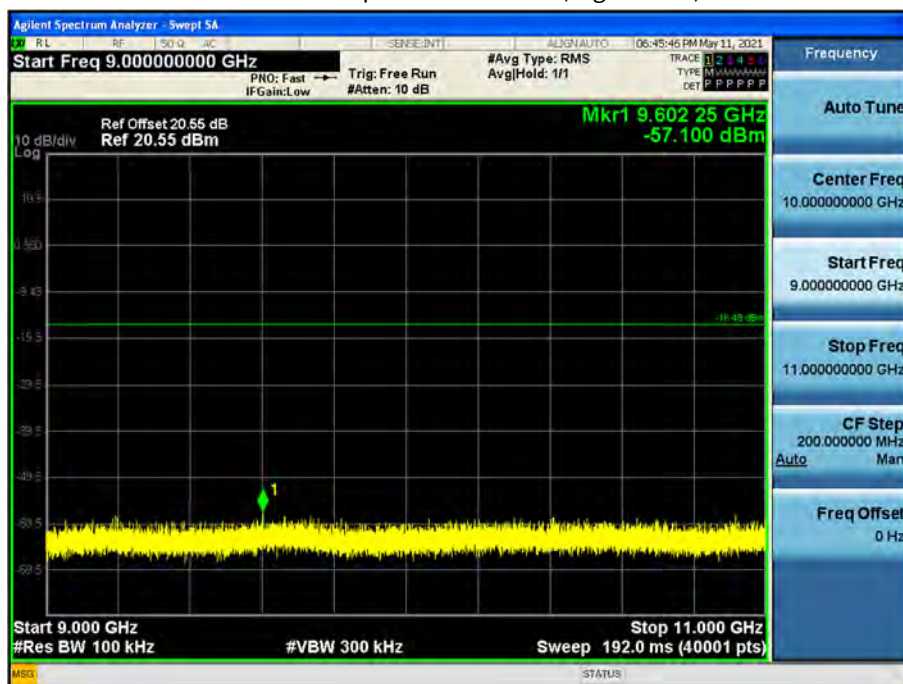


11 GHz ~ 13 GHz

Conducted Spurious Emission (High-CH 39)

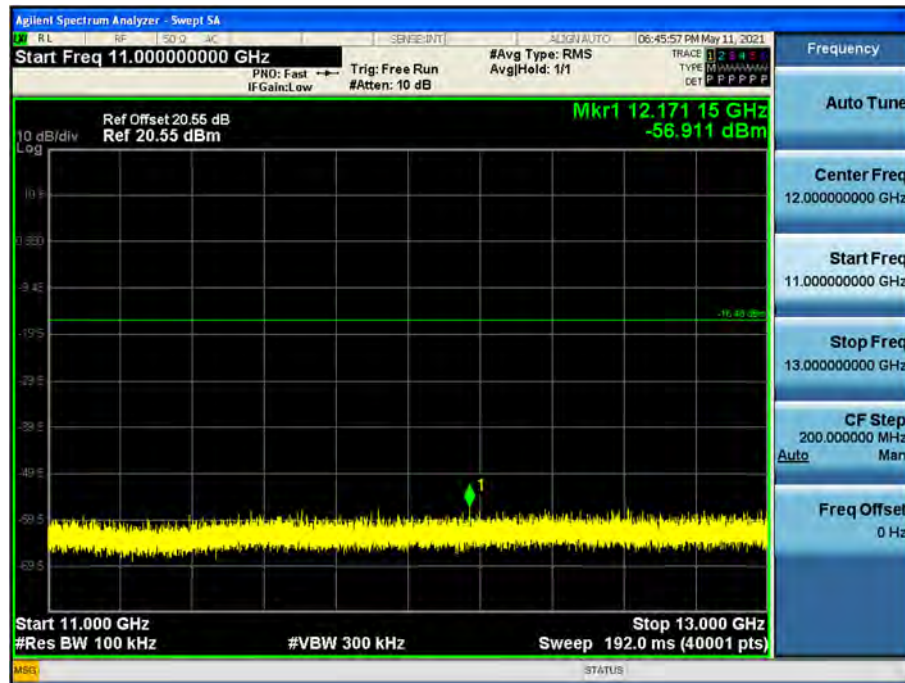


13 GHz ~ 15 GHz

Conducted Spurious Emission (High-CH 39)

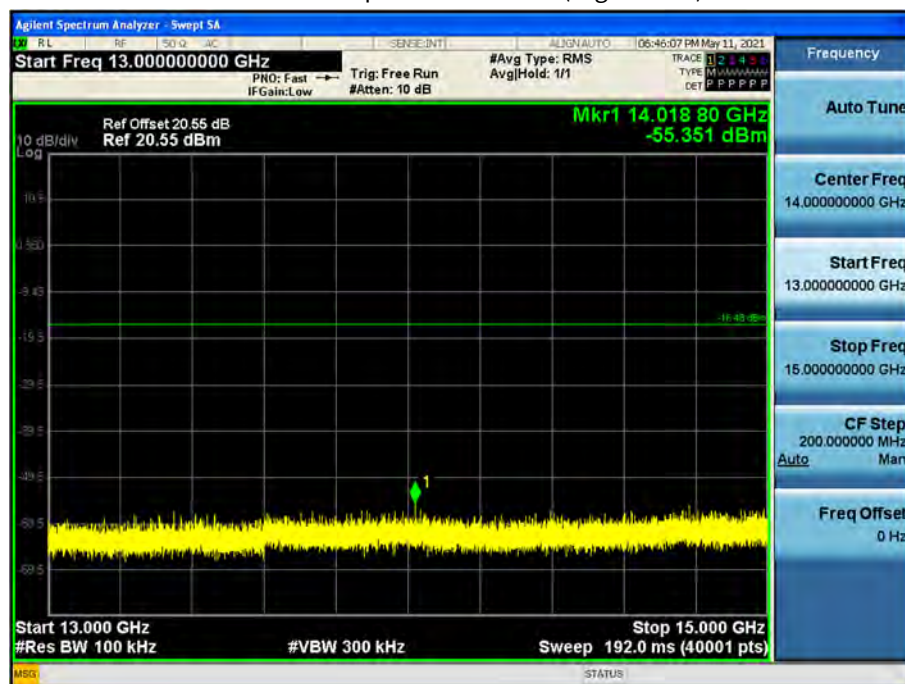


15 GHz ~ 17 GHz

Conducted Spurious Emission (High-CH 39)

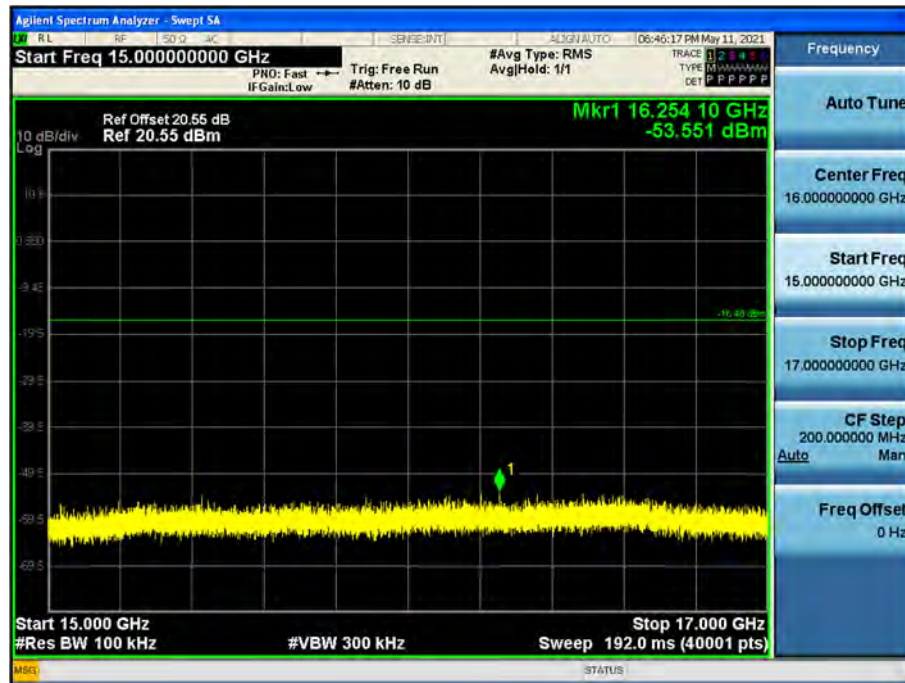


17 GHz ~ 19 GHz

Conducted Spurious Emission (High-CH 39)

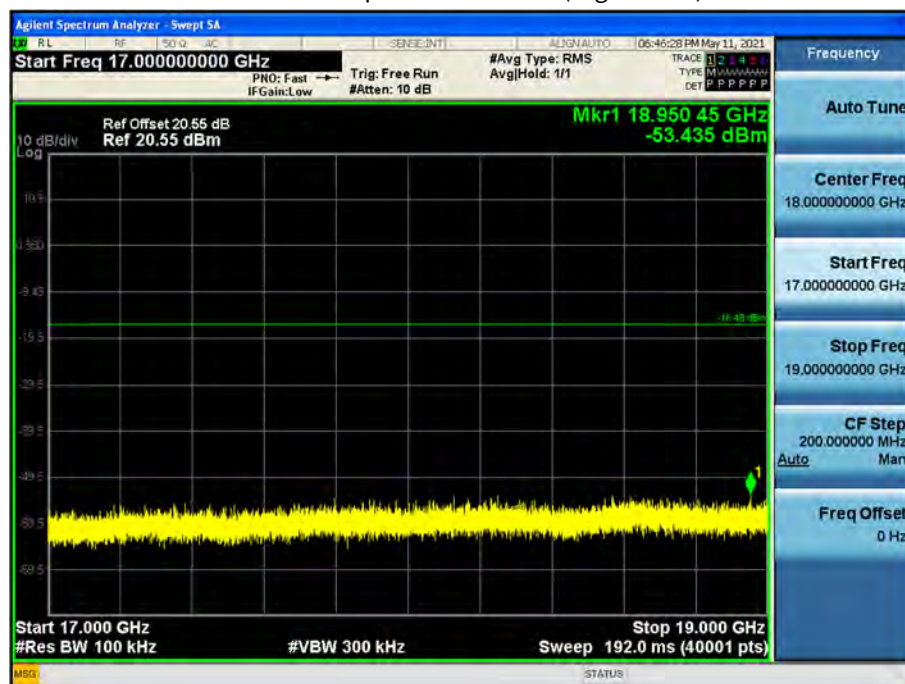


19 GHz ~ 21 GHz

Conducted Spurious Emission (High-CH 39)

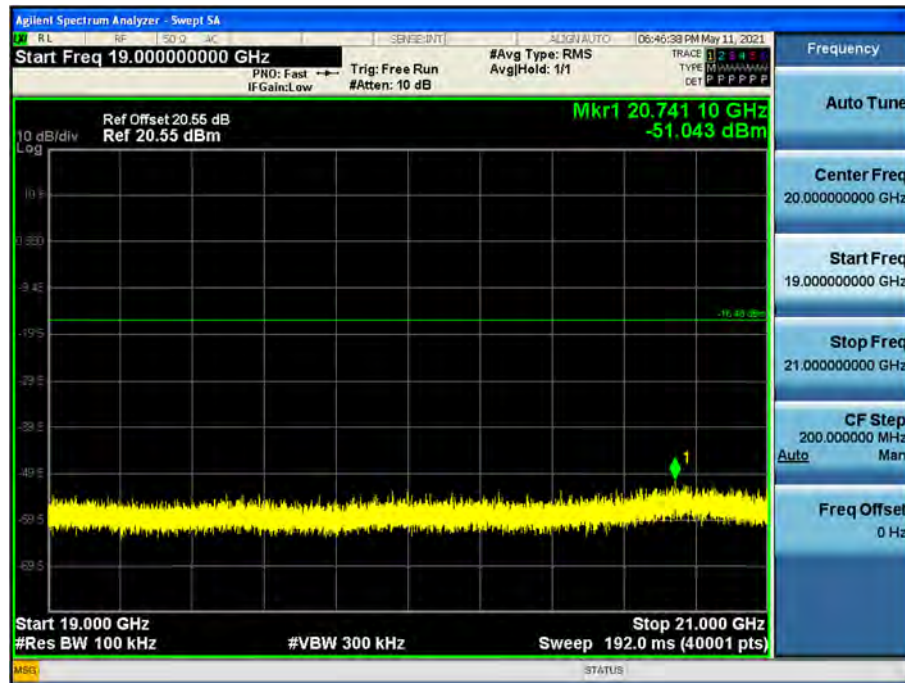


21 GHz ~ 23 GHz

Conducted Spurious Emission (High-CH 39)

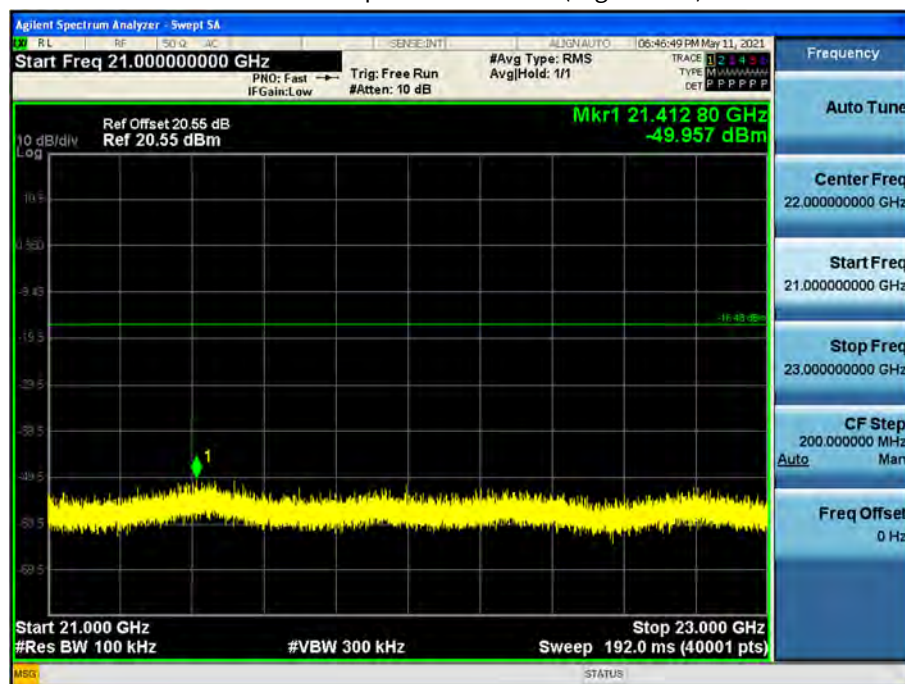

23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

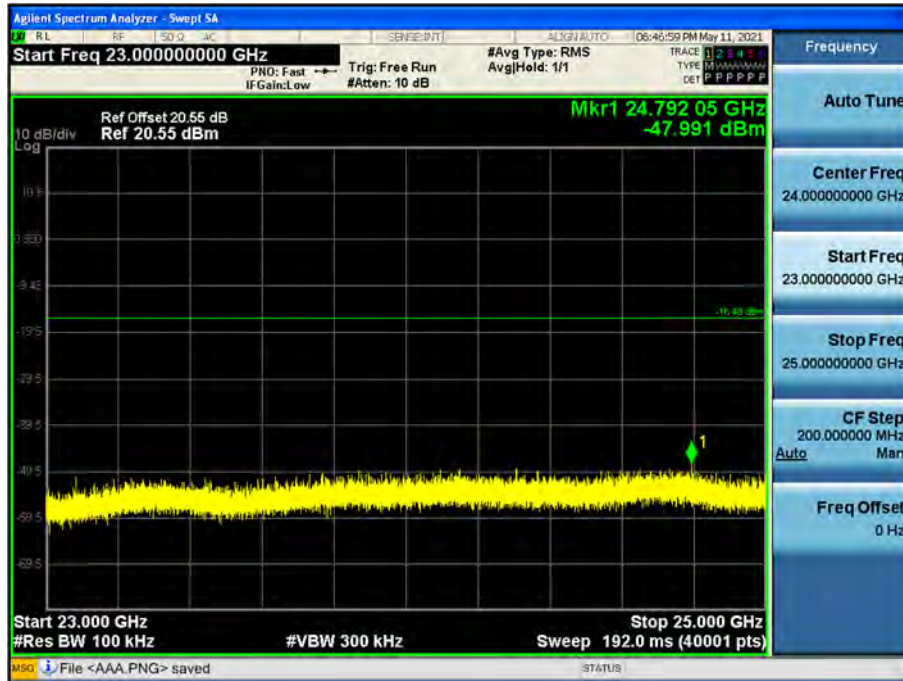

Note :

Limit : -16.48 dBm

9.7 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.



Frequency Range : Above 1 GHz

Mode : 125k Bit/s (37 Byte)

Operation Mode: CH Low

Frequency	Reading	Duty Cycle Correction	AN.+CL-AMP G	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4804	50.58	0.00	2.98	V	53.56	73.98	20.42	PK
4804	43.57	0.82	2.98	V	47.37	53.98	6.61	AV
7206	39.73	0.00	9.57	V	49.30	73.98	24.68	PK
7206	27.52	0.82	9.57	V	37.91	53.98	16.07	AV
4804	49.60	0.00	2.98	H	52.58	73.98	21.40	PK
4804	41.98	0.82	2.98	H	45.78	53.98	8.20	AV
7206	39.09	0.00	9.57	H	48.66	73.98	25.32	PK
7206	27.34	0.82	9.57	H	37.73	53.98	16.25	AV

Operation Mode: CH Mid

Frequency	Reading	Duty Cycle Correction	AN.+CL-AMP G	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4880	48.51	0.00	3.33	V	51.84	73.98	22.14	PK
4880	41.12	0.82	3.33	V	45.27	53.98	8.71	AV
7320	40.31	0.00	10.20	V	50.51	73.98	23.47	PK
7320	27.94	0.82	10.20	V	38.96	53.98	15.02	AV
4880	47.15	0.00	3.33	H	50.48	73.98	23.50	PK
4880	39.54	0.82	3.33	H	43.69	53.98	10.29	AV
7320	39.58	0.00	10.20	H	49.78	73.98	24.20	PK
7320	27.15	0.82	10.20	H	38.17	53.98	15.81	AV



Operation Mode: CH High

Frequency	Reading	Duty Cycle Correction	AN.+CL-AMP G	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4960	47.72	0.00	2.36	V	50.08	73.98	23.90	PK
4960	40.20	0.82	2.36	V	43.38	53.98	10.60	AV
7440	40.08	0.00	10.72	V	50.80	73.98	23.18	PK
7440	27.24	0.82	10.72	V	38.78	53.98	15.20	AV
4960	46.72	0.00	2.36	H	49.08	73.98	24.90	PK
4960	39.07	0.82	2.36	H	42.25	53.98	11.73	AV
7440	39.75	0.00	10.72	H	50.47	73.98	23.51	PK
7440	27.13	0.82	10.72	H	38.67	53.98	15.31	AV



Mode : 2M Bit/s (255 Byte)

Operation Mode: CH Low

Frequency	Reading	Duty Cycle Correction	AN.+CL-AMP G	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4804	50.54	0.00	2.98	V	53.52	73.98	20.46	PK
4804	37.80	2.39	2.98	V	43.17	53.98	10.81	AV
7206	39.23	0.00	9.57	V	48.80	73.98	25.18	PK
7206	27.40	2.39	9.57	V	39.36	53.98	14.62	AV
4804	47.12	0.00	2.98	H	50.10	73.98	23.88	PK
4804	29.35	2.39	2.98	H	34.72	53.98	19.26	AV
7206	35.20	0.00	9.57	H	44.77	73.98	29.21	PK
7206	24.58	2.39	9.57	H	36.54	53.98	17.44	AV

Operation Mode: CH Mid

Frequency	Reading	Duty Cycle Correction	AN.+CL-AMP G	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4880	47.77	0.00	3.33	V	51.10	73.98	22.88	PK
4880	35.09	2.39	3.33	V	40.81	53.98	13.17	AV
7320	40.57	0.00	10.20	V	50.77	73.98	23.21	PK
7320	27.83	2.39	10.20	V	40.41	53.98	13.57	AV
4880	44.83	0.00	3.33	H	48.16	73.98	25.82	PK
4880	31.52	2.39	3.33	H	37.24	53.98	16.74	AV
7320	38.55	0.00	10.20	H	48.75	73.98	25.23	PK
7320	26.13	2.39	10.20	H	38.71	53.98	15.27	AV




Operation Mode: CH High

Frequency	Reading	Duty Cycle Correction	AN.+CL-AMP G	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4960	47.57	0.00	2.36	V	49.93	73.98	24.05	PK
4960	34.83	2.39	2.36	V	39.58	53.98	14.40	AV
7440	39.16	0.00	10.72	V	49.88	73.98	24.10	PK
7440	27.12	2.39	10.72	V	40.23	53.98	13.75	AV
4960	43.87	0.00	2.36	H	46.23	73.98	27.75	PK
4960	31.11	2.39	2.36	H	35.86	53.98	18.12	AV
7440	37.08	0.00	10.72	H	47.80	73.98	26.18	PK
7440	25.10	2.39	10.72	H	38.21	53.98	15.77	AV


125k Bit/s (37 Byte) Test Plots (Worst case : V)

Radiated Spurious Emissions plot – Average Reading (Ch.0 2nd Harmonic)

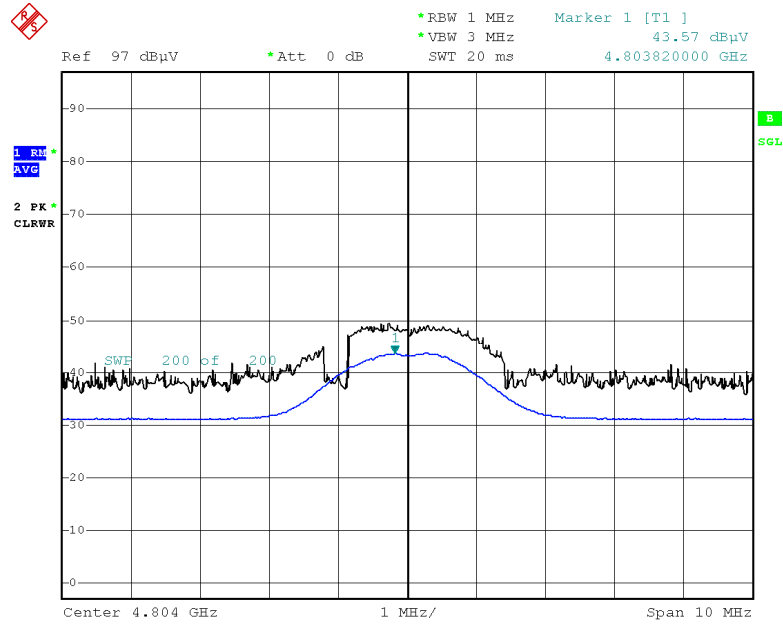

Date: 3.MAY.2021 12:00:28

Radiated Spurious Emissions plot – Peak Reading (Ch.0 2nd Harmonic)

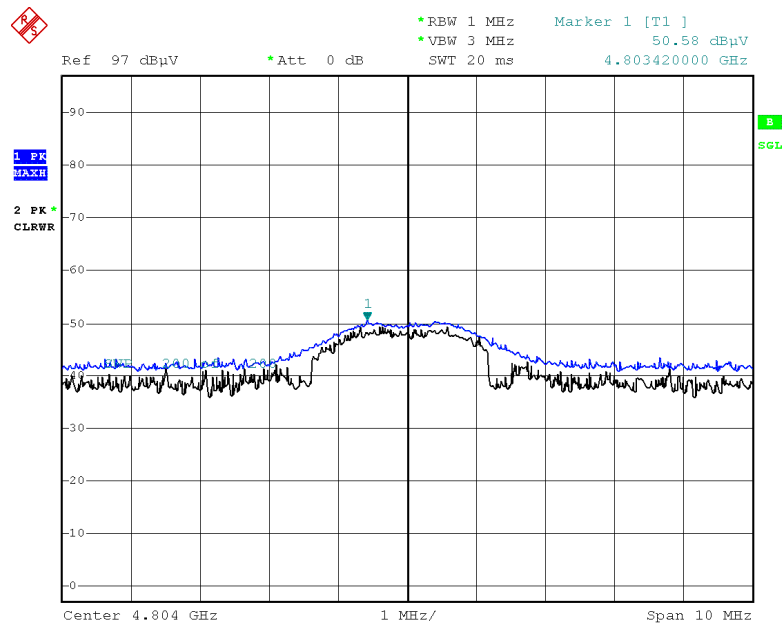

Date: 3.MAY.2021 12:00:42

Note:

Plot of worst case are only reported.

9.8 RADIATED RESTRICTED BAND EDGES

Mode : 125k Bit/s (37 Byte)

Operating Frequency

2402 MHz & 2480 MHz

Channel No.

0 & 39

Frequency	Reading	Duty Cycle Correction	DCCF	※ A.F.+CL	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	18.63	0.00	0.00	35.16	H	53.79	73.98	20.19	PK
2390.0	8.41	0.81	-1.52	35.16	H	42.87	53.98	11.11	AV
2390.0	19.68	0.00	0.00	35.16	V	54.84	73.98	19.14	PK
2390.0	8.19	0.81	-1.52	35.16	V	42.64	53.98	11.34	AV
2483.5	24.06	0.00	0.00	35.36	H	59.42	73.98	14.56	PK
2483.5	15.63	0.81	-1.52	35.36	H	50.28	53.98	3.70	AV
2483.5	21.39	0.00	0.00	35.36	V	56.74	73.98	17.24	PK
2483.5	12.39	0.81	-1.52	35.36	V	47.04	53.98	6.94	AV

Mode : 2M Bit/s (255 Byte)

Operating Frequency

2402 MHz & 2480 MHz


Channel No.

0 & 39


Frequency	Reading	Duty Cycle Correction	DCCF	※ A.F.+CL	Ant. Pol.	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	19.29	0.00	0.00	35.16	H	54.45	73.98	19.53	PK
2390.0	8.39	2.39	-4.67	35.16	H	41.26	53.98	12.72	AV
2390.0	19.71	0.00	0.00	35.16	V	54.86	73.98	19.12	PK
2390.0	8.49	2.39	-4.67	35.16	V	41.36	53.98	12.62	AV
2483.5	24.11	0.00	0.00	35.36	H	59.46	73.98	14.52	PK
2483.5	13.24	2.39	-4.67	35.36	H	46.32	53.98	7.66	AV
2483.5	21.86	0.00	0.00	35.36	V	57.22	73.98	16.76	PK
2483.5	10.35	2.39	-4.67	35.36	V	43.42	53.98	10.56	AV

Mode : 125k Bit/s (37 Byte) Test Plots

Radiated Restricted Band Edges plot – Average Reading (Ch.39, H)

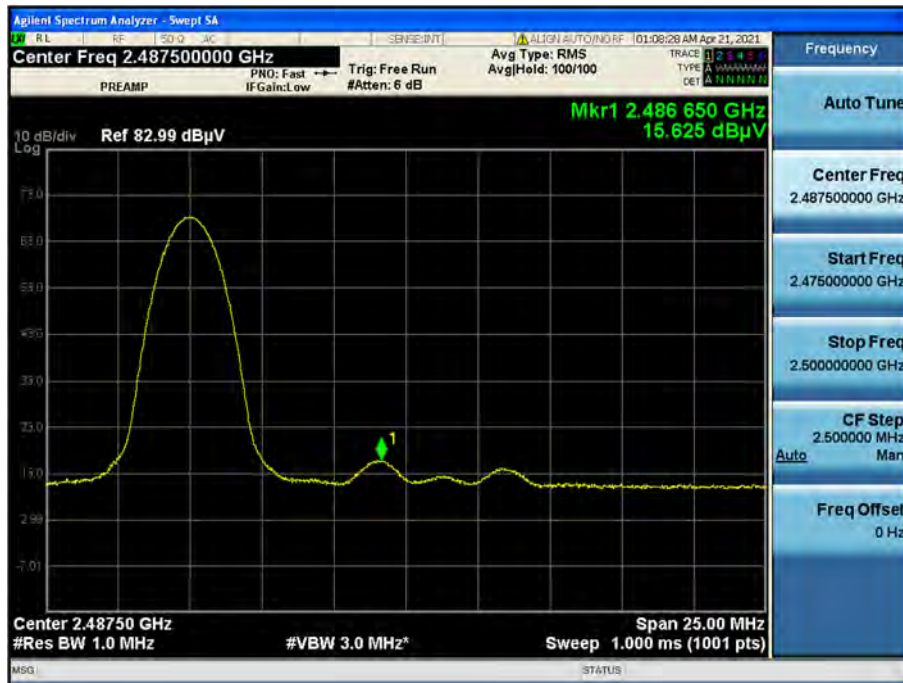

Radiated Restricted Band Edges plot – Peak Reading (Ch.39, H)

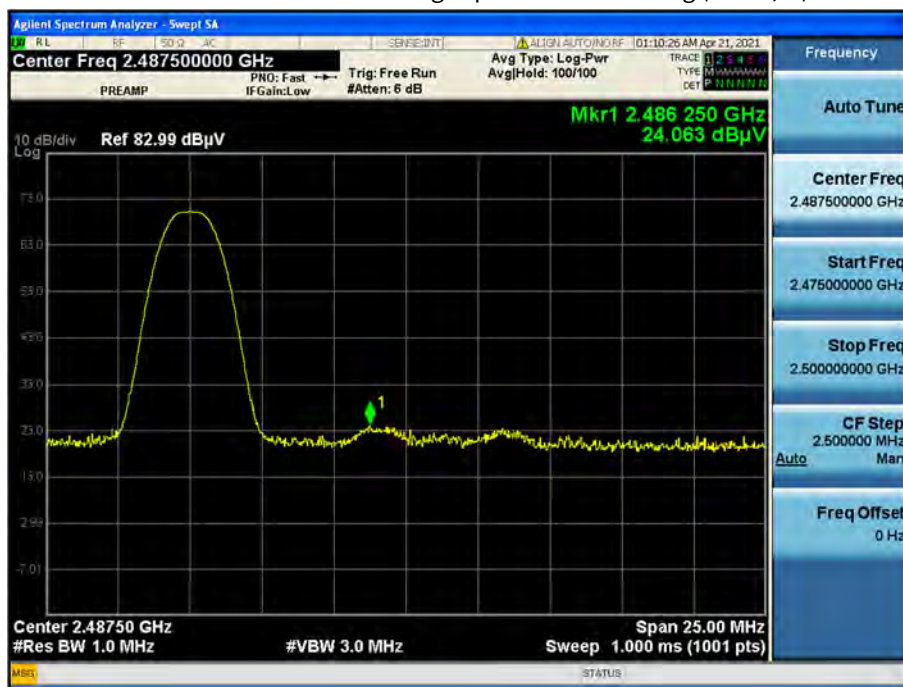

Note:

Plot of worst case are only reported.

9.9 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

9.10 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

Test Report

Common Information

EUT : LGSBWAC22
Manufacturer : LG
Test Site: SHIELD ROOM
Operating Conditions : 2-----PHONE TO PHONE mode_L1
Operator Name:
Comment:

Full Spectrum

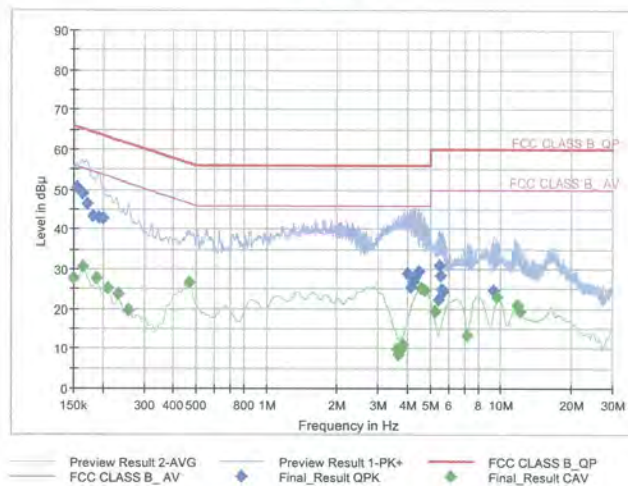

Final Result_QPK

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	50.49	65.75	15.27	9.000	N	OFF	9.6
0.1635	49.00	65.28	16.29	9.000	N	OFF	9.6
0.1725	46.47	64.84	18.37	9.000	N	OFF	9.6
0.1815	43.33	64.42	21.09	9.000	N	OFF	9.6
0.1928	42.90	63.92	21.01	9.000	N	OFF	9.6
0.2018	42.77	63.54	20.76	9.000	N	OFF	9.6
4.0213	28.78	56.00	27.22	9.000	N	OFF	9.7
4.1518	25.34	56.00	30.66	9.000	N	OFF	9.7
4.2148	26.90	56.00	29.10	9.000	N	OFF	9.7
4.2800	27.60	56.00	28.40	9.000	N	OFF	9.7
4.3453	28.32	56.00	27.68	9.000	N	OFF	9.7
4.4758	29.34	56.00	26.66	9.000	N	OFF	9.7
5.4455	22.17	60.00	37.83	9.000	N	OFF	9.7
5.4950	31.00	60.00	29.00	9.000	N	OFF	9.7
5.5445	28.19	60.00	31.81	9.000	N	OFF	9.7
5.6435	24.69	60.00	35.31	9.000	N	OFF	9.7
5.6930	24.27	60.00	35.73	9.000	N	OFF	9.7
9.3560	24.61	60.00	35.39	9.000	N	OFF	9.8

2021-05-19

오전 11:01:13



Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	27.64	56.00	28.36	9.000	N	OFF	9.6
0.1635	30.71	55.28	24.58	9.000	N	OFF	9.6
0.1883	27.55	54.11	26.56	9.000	N	OFF	9.6
0.2106	25.09	53.18	28.09	9.000	N	OFF	9.6
0.2333	23.63	52.33	28.70	9.000	N	OFF	9.6
0.2580	19.73	51.50	31.77	9.000	N	OFF	9.6
0.4673	26.46	46.56	20.10	9.000	N	OFF	9.6
3.6005	9.73	46.00	36.27	9.000	N	OFF	9.7
3.6658	8.32	46.00	37.68	9.000	N	OFF	9.7
3.7625	9.47	46.00	36.53	9.000	N	OFF	9.7
3.8188	10.99	46.00	35.01	9.000	N	OFF	9.7
4.6040	25.15	46.00	20.85	9.000	N	OFF	9.7
4.7345	24.50	46.00	21.50	9.000	N	OFF	9.7
5.2700	19.21	50.00	30.79	9.000	N	OFF	9.7
7.1780	13.35	50.00	36.65	9.000	N	OFF	9.7
9.6575	22.75	50.00	27.25	9.000	N	OFF	9.8
11.7838	20.72	50.00	29.28	9.000	N	OFF	9.8
12.0290	19.30	50.00	30.70	9.000	N	OFF	9.8

2021-05-19

오전 11:01:13

Conducted Emissions (Line 2)

Test


1 / 2

Test Report

Common Information

EUT : LGSBWAC22
 Manufacturer : LG
 Test Site: SHIELD ROOM
 Operating Conditions : BTLE_L1
 Operator Name:
 Comment:

Full Spectrum

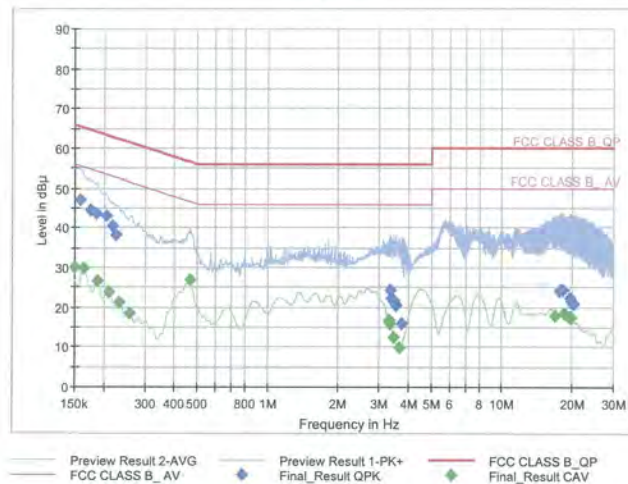

Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1590	47.06	65.52	18.46	9.000	L1	OFF	9.6
0.1748	44.29	64.73	20.44	9.000	L1	OFF	9.6
0.1860	43.60	64.21	20.61	9.000	L1	OFF	9.6
0.2063	43.12	63.36	20.24	9.000	L1	OFF	9.6
0.2175	40.33	62.91	22.58	9.000	L1	OFF	9.6
0.2243	38.06	62.66	24.60	9.000	L1	OFF	9.6
3.3485	24.14	56.00	31.86	9.000	L1	OFF	9.7
3.3935	22.33	56.00	33.67	9.000	L1	OFF	9.7
3.4655	21.51	56.00	34.49	9.000	L1	OFF	9.7
3.4700	21.21	56.00	34.79	9.000	L1	OFF	9.7
3.5240	20.43	56.00	35.57	9.000	L1	OFF	9.7
3.7603	15.80	56.00	40.20	9.000	L1	OFF	9.7
17.6788	24.05	60.00	35.95	9.000	L1	OFF	9.9
17.8025	24.18	60.00	35.82	9.000	L1	OFF	9.9
18.2368	24.17	60.00	35.83	9.000	L1	OFF	9.9
19.4653	22.24	60.00	37.76	9.000	L1	OFF	9.9
19.8950	21.43	60.00	38.57	9.000	L1	OFF	9.9
20.3270	20.75	60.00	39.25	9.000	L1	OFF	9.9

2021-05-19

오전 11:06:51



Test

2 / 2

Final Result CAV

Frequency (MHz)	Coverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	29.87	56.00	26.13	9.000	L1	OFF	9.6
0.1635	29.70	55.28	25.59	9.000	L1	OFF	9.6
0.1883	26.58	54.11	27.54	9.000	L1	OFF	9.6
0.2108	23.72	53.18	29.45	9.000	L1	OFF	9.6
0.2333	21.10	52.33	31.24	9.000	L1	OFF	9.6
0.2580	18.51	51.50	32.99	9.000	L1	OFF	9.6
0.4673	26.83	46.56	19.73	9.000	L1	OFF	9.6
3.2923	16.78	46.00	29.22	9.000	L1	OFF	9.7
3.2990	16.49	46.00	29.51	9.000	L1	OFF	9.7
3.3508	15.87	46.00	30.13	9.000	L1	OFF	9.7
3.4678	12.30	46.00	33.70	9.000	L1	OFF	9.7
3.6523	9.81	46.00	36.19	9.000	L1	OFF	9.7
16.9385	17.78	50.00	32.22	9.000	L1	OFF	9.9
18.5450	18.48	50.00	31.52	9.000	L1	OFF	9.9
18.6665	18.03	50.00	31.97	9.000	L1	OFF	9.9
19.4675	17.64	50.00	32.36	9.000	L1	OFF	9.9
19.5868	17.24	50.00	32.76	9.000	L1	OFF	9.9
19.8950	17.23	50.00	32.77	9.000	L1	OFF	9.9

2021-05-19

오전 11:06:51

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	09/16/2020	Annual	101910
ESPAC	SU-642 /Temperature Chamber	03/15/2021	Annual	0093008124
Agilent	N9020A / Signal Analyzer	04/16/2021	Annual	MY50210191
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Agilent	N1911A / Power Meter	04/08/2021	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/08/2021	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/09/2021	Annual	10545
Hewlett Packard	E3632A / DC Power Supply	06/10/2021	Annual	KR75303960
Weinschel	2-20 / Attenuator(20 dB)	10/07/2020	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/04/2021	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	03/19/2020	Biennial	1513-333
Schwarzbeck	VULB 9168 / Hybrid Antenna	09/04/2020	Biennial	9168-0895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/14/2020	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/22/2020	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/08/2021	Annual	1
CERNEX	CBLU1183540B-01/Broadband Bench Top LNA	12/23/2020	Annual	N/A
WEINSCHTEL	56-10 / Attenuator(10 dB)			
CERNEX	CBL06185030 / Broadband Low Noise Amplifier	12/23/2020	Annual	N/A
Api tech.	18B-03 / Attenuator (3 dB)			
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/23/2020	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2021	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/09/2021	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).



11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2106-FI017-P